

Digest 179

se.com/us/digestplus

Schneider Electric


Life Is On
Schneider Electric
Make the most of federal incentives
From the Infrastructure Investment and Jobs Act (IIJA) to Buy American Act (BAA), Trade Agreements Act (TAA), and Build America, Buy America Act (BABA), we leverage cost-saving government incentives with efficient, reliable solutions that meet sustainability goals for customers.
Scan to learn more and find eligible products

How to Use the Digest

Welcome to the Schneider Electric Digest!
Over a thousand pages of technical product information to help you specify and select Schneider Electric products. A key element of the Digest catalog is its color-coded Table of Contents, shown at the right, and matching product section tabs throughout the Digest. This colorful approach aids navigation and helps you quickly find the major product categories. Also, each product section begins with a detailed Table of Contents and there are two product locator indexes in the back of the book: an alphabetical listing and an alpha-numeric listing. The latest pricing information is available online at se.com/us.
Finally, the Supplemental and Obsolescence Digest (online only) contains additional product information for some of our international product offers, legacy products, and products in the obsolescence process.

DigestPLUS Online Catalog

Visit **DigestPLUS** online for easy access to this catalog (continuously updated) and available in both PDF and mobile-friendly HTML5 formats. The DigestPLUS site also provides quick access to the Supplemental and Obsolescence Digest, product selectors, and other related documents and tools. se.com/us/digestplus

Services Across the Entire Equipment Lifecycle

Schneider Electric Services helps design, modernize, maintain, and monitor your electrical assets and systems for safe, resilient, and sustainable operations 24/7 se.com/us/services

EcoConsult services help you identify potential safety, compliance, and performance issues to reduce risk and improve reliability. Our solutions include digital twin, studies, audits, and design.

EcoCare membership helps you reduce unplanned downtime and maintenance activities and extend the lifetime of your equipment. Access fast priority support, 24/7 monitoring, services discounts, and more.

EcoFit™ our unique approach to modernization and circularity services. Outdated equipment and installations waste energy, increase operating costs and put your business continuity at risk every day.

mySchneider

Check order status, price, and availability

For the distributors and partners who order directly from us, mySchneider portal offers access to:
- Real-time product price and availability
- Simplified quotes interface
- Order history and shipping details

se.com/us/en/work/support/myschneider

Login or Register

mySchneider app

Download the mySchneider app and login to access tailored services, 24/7 self-service, and quick expert support information.

se.com/us/en/work/support/myschneider-app/

mySchneider app

Self-Service and Support

Self-Service and Support Center

Support Center

Quick access to many popular self-service tools:
Chat with an Expert • Search FAQs • Product Selectors • Competitive Cross Reference • Product Substitution & Replacement • Download Center • Where to Buy • Product Registration • LayoutFAST • and more!
se.com/us/en/work/support/

Product Selectors

LayoutFAST: Add Schneider Electric products to your building and electrical designs in seconds, not minutes, with the free LayoutFAST tool. LayoutFAST integrates with Autodesk Revit® BIM software, so you can find the right product and easily add it to your existing Revit design.
se.com/us/en/partners/resources/layoutfast/

Document Number: 0100CT2401
© 2024 Schneider Electric
All Rights Reserved

Table of Contents
Product Section Listing

1 Load Centers
2 Metering Equipment
3 Safety Switches
4 Power Monitoring and Control
5 Protection, Control, and Energy Automation
6 Surge Protective Devices
7 Miniature and Molded Case Circuit Breakers
8 Operator Mechanisms and Disconnect Switches
9 Panelboards
10 Power Solutions: Integrated
11 Switchboards and Switchgear
12 Busway
13 Wire Management
14 Transformers
15 Motor Control Centers
16 NEMA Contactors and Starters
17 IEC Contactors and Starters
18 AC Drives and Soft Starters
19 Push Buttons and Operator Interface
20 Relays and Timers
21 Terminal Blocks
22 Machine Safeguarding Products
23 Automation Products
24 Universal Enclosures
25 EcoStruxure™ and Schneider Electric Services

Section 1
Load Centers



QO™ Miniature Circuit Breakers



QO™ Load Centers



Homeline™ Miniature Circuit Breakers



Homeline™ Load Centers



Schneider™ Boost and Inverter







CSEDs



Surge Protective Devices (SPD)



Wiring Devices



Energy™ Monitor

EZ Selector - Selection Assistance	1-2
QO™ Miniature Circuit Breakers	1-3
QO™ Load Centers	1-8
Homeline™ Miniature Circuit Breakers	1-19
Homeline™ Load Centers	1-23
QO/Homeline Load Center Value Packs and Accessories	1-28
QO/Homeline Load Center Dimensions	1-34
Combination Service Entrance Devices (CSEDs)	1-37
Solar Ready Plug-On Neutral (PoN) CSEDs	1-46
Circuit Breakers for CSEDs	1-47
Accessories and Hubs for CSEDs	1-48
Schneider Energy Monitor and Wiring Devices	1-49
Enclosed Devices	1-51

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


QO Load Center

QO™ and Homeline™ Load Center EZ Selector - Selection Assistance

EZ Selector

Steps to select a load center.

1. Select product type:
   - Homeline™ 1 inch format (HOM)
   - QO™ 3/4 inch format with plug-on neutral (QO) (P)
   - QO™ 3/4 inch format (QO)
2. Select enclosure type: indoor or outdoor (RB = rainproof)
3. Select single phase (1) or three phase (3)
4. Select type of main:
   - Main circuit Breaker (M)
   - Main lugs (L)
   - Generator panel (GP)
5. Select main ampacity rating
6. Select pole spaces and max. number of 1-pole, single-phase circuits
7. Select cover style:
   - Surface (box mounted on surface)
   - Surface (box mounted on surface, hinged cover included)
   - Flush (box recessed, cover is flush to wall)
8. Value pack (VP)
9. Select ground bar option:
   - Ground bar factory installed (T)
   - Ground bar included, field installation (G)
10. Select special application:
    - Riser panel with gutter
    - Mfg housing, single phase 3-wire, convertible mains
    - Manufactured housing, single phase, 3-wire
    - Manufactured housing, single phase, 2-wire

QO™ and Homeline™ Load Centers — Catalog Number Description

QO 1 8 16 M 100 P C

Type
QO = QO
HOM = Homeline

Phase (only applies to QO)
Blank or 1 = Single-phase
3 = Three phase

Spaces
Maximum number of full-size single-pole circuit breaker spaces.

Circuits[1]
Maximum number of single-pole circuits when using tandem circuit breakers.
Note: Number of circuits minus number of spaces equals number of tandem circuit breakers accepted.

Mains Type
M = Main circuit breaker
L = Main lugs
MS = 300 A or 400 A main circuit breaker
MQ = Three-phase main circuit breaker
DM = Dual mains

Ampacity
Mains rating

Plug-on Neutral
P = Plug-on Neutral Ready
Blank = Does not accept Plug-On Neutral Circuit Breakers

Covers and Construction
Q = Qwik-Grip
C = Combination cover included
Blank = No cover, order cover separately
R = Rainproof
B = Hub ready
T = Ground bar factory installed
G = Ground bar included, field installed
DF = Flush cover with door included
DS = Surface cover included
F = Flush cover included
FT = Feed-thru lugs factory installed
NM = Non-metallic
CU = Copper bus
GP = Generator panel
WG = Wide gutter
RBR = Rainproof accepts B-hubs with generator receptacle
EP = Service upgrade ready
VP = Value Pack with standard circuit breakers included
AF = (3) 15 A arc fault circuit breakers included
1A = (1) 15 A arc fault circuit breaker included

Additional Information

- **See Circuits** *[1]*.
- Search our technical FAQs page: https://www.se.com/us/en/faqs/home/
- Refer to catalog 1100CT0501.

[1] QO Plug-on neutral load center catalog numbers indicate the number of spaces only. The tables in this document containing QO plug-on neutral load centers list the maximum number of single-pole circuits when using tandem breakers.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


QO 1P
1 Space
Required


QO 2P
2 Spaces
Required


QO 3P
3 Spaces
Required


QO2200 2P 200 A
4 Spaces Required

QO Standard Plug-On Circuit Breakers

Square D brand QO miniature circuit breakers are plug-on products for use in QO and QON load centers, NQ panelboards, NQ OEM interiors or Speed-D™ switchboard distribution panels. Bolt-on QOB circuit breakers are for use in NQOB and NQ panelboards or interiors. *[1]*

The Square D exclusive Qwik-Open™ mechanism, with a trip reaction within 1/60th of a second, is standard on all 1P 15 and 20 A QO circuit breakers.

Table 1.1: Standard QO Plug-On Circuit Breakers

Amperes Rating *[2]*	1P—120/240 Vac	2P—120/240 Vac Common Trip	2P—240 Vac *[3]* Common Trip	3P—240 Vac Common Trip
10 k AIR				
10 A	QO110	QO210	—	QO310
15 A	QO115 *[4] [5]*	QO215 *[4]*	QO215H	QO315 *[4]*
20 A	QO120 *[4] [5]*	QO220 *[4]*	QO220H	QO320 *[4]*
25 A	QO125 *[4]*	QO225 *[4]*	QO225H OBS	QO325 *[4]*
30 A	QO130 *[4]*	QO230 *[4]*	QO230H	QO330 *[4]*
35 A	QO135 *[4]*	QO235 *[4]*	—	QO335 *[4]*
40 A	QO140 *[4]*	QO240 *[4]*	QO240H	QO340 *[4]*
45 A	QO145 OBS	QO245 *[4]*	—	QO345 *[4]*
50 A	QO150 *[4]*	QO250 *[4]*	QO250H OBS	QO350 *[4]*
60 A	QO160 *[4]*	QO260 *[4]*	QO260H OBS	QO360 *[4]*
70 A	QO170 *[4]*	QO270 *[4]*	QO270H OBS	QO370 *[4]*
80 A	—	QO280 *[4]*	QO280H OBS	QO380 *[4]*
90 A	—	QO290 *[4]*	QO290H OBS	QO390 *[4]*
100 A	—	QO2100 *[4]*	QO2100H	QO3100 *[4]*
110 A	—	QO2110 *[4]*	—	—
125 A	—	QO2125 *[4]*	—	—
150 A	—	QO2150 *[4] [6][7]*	—	—
175 A	—	QO2175 *[4] [6] [7]*	—	—
200 A	—	QO2200 *[4] [6] [7]*	—	—
Molded Case Switch 60 A max.–240 Vac		—	QO200	QO300 OBS
22 k AIR *[4]*				
15 A	QO115VH *[5]*	QO215VH *[8]*	—	QO315VH *[8]*
20 A	QO120VH *[5]*	QO220VH *[8]*	—	QO320VH *[8]*
25 A	—	QO225VH *[8]*	—	QO325VH *[8]*
30 A	QO130VH	QO230VH *[8]*	—	QO330VH *[8]*
40 A	QO140VH	QO240VH *[8]*	—	QO340VH *[8]*
50 A	—	QO250VH *[8]*	—	QO350VH *[8]*
60 A	QO160VH	QO260VH *[8]*	—	QO360VH *[8]*
70 A	—	QO270VH *[8]*	—	QO370VH *[8]*
80 A	—	QO280VH *[8]*	—	QO380VH *[8]*
90 A	—	QO290VH *[8]*	—	QO390VH *[8]*
100 A	—	QO2100VH *[8] [9]*	—	QO3100VH *[8]*
110 A	—	QO2110VH *[8] [9]*	—	—
125 A	—	QO2125VH *[8] [9]*	—	—
150 A	—	QO2150VH *[6] [8] [7]*	—	—
175 A	—	QO2175VH OBS	—	—
200 A	—	QO2200VH *[6] [8] [7]*	—	—
42 k AIR *[4]*				
40 A	—	QOH240 OBS	—	—
45 A	—	QOH245 OBS	—	—
50 A	—	QOH250 OBS	—	—
60 A	—	QOH260 *[10]*	—	—
70 A	—	QOH270	—	—
80 A	—	QOH280	—	—
90 A	—	QOH290	—	—
100 A	—	QOH2100	—	—
110 A	—	QOH2110 *[10]*	—	—
125 A	—	QOH2125	—	—
65 k AIR *[4]*				
15 A	QH115 OBS	QH215 OBS	—	QH315 OBS
20 A	QH120 *[5]*	QH220	—	QH320 OBS
25 A	QH125 OBS	QH225 OBS	—	QH325 *[10]*
30 A	QH130 OBS	QH230	—	QH330 OBS

OBS This product is obsolete.

Refer to Digest Section 7, QO Miniature Circuit Breakers, for interrupting ratings, accessories, and dimensions.

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.

[1] See Digest Section 1 for load centers and Section 9 for panelboards and interiors.
[2] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.
[3] UL Listed 5 k AIR on corner grounded Delta systems.
[4] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[5] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.
[6] Requires four spaces (1 AWG–300 kcmil Al/Cu.) Suitable for switching 120 Vac fluorescent lighting loads.
[7] Not suitable for use in 3Ø panels. Use only in 1Ø panel rated 150 A or greater.
[8] UL Listed for use ahead of QO, QO-GFI, QO-EPD, QOT, QO-AFI, and QO-PL 10 k AIR circuit breakers to permit their application at 22 kA fault level.
[9] 100 A maximum branch mounted opposite.
[10] Order only. Contact your local Field Office.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.2: QO/QOB 48 Vdc 5 kA

Ampere Rating	Poles	Suffix
10–60 A	2	5272

QO/QOB Ring Terminal

Table 1.3: QO/QOB Ring Terminal—Factory-Installed Only

Ampere Rating	Poles	Suffix
10–30 A	1, 2, 3	5237
35–60 A	1,2	5238
35–50 A	3	
70–110 A	2	5273
60–100 A	3	

Wire Sizes for QO/QOB Circuit Breakers

Table 1.4: Wire Sizes for QO/QOB Circuit Breakers

Circuit Breaker Type	Ampere Rating *[11]*	Wire Size (AWG/kcmil)
QO 1P	10–30 A	14–8 Al/Cu
	10–30 A	(2) 14–10 Cu
	35–70 A	8–2 Al/Cu
QO 2P	10–30 A	14–8 Al/Cu
	10–30 A	(2) 14–10 Cu
	35–70 A	8–2 Al/Cu
	80–125 A	4–2/0 Al/Cu
	150–200 A	4–300 Al/Cu
QO 3P	10–30 A	14–8 Al/Cu, (2) 14-10 Cu
	35–70 A	8–2 Al/Cu
	80–125 A	4–2/0 Al/Cu
QOB-VH	110–150 A	4–300 Al/Cu
QOT	15–20 A	12–8 Al 14–8 Cu
QO-AFI, QO-GFI or QO-EPD	15–30 A	12–8 Al 14–8 Cu
	40, 50, 60 A	12–4 Al 14–6 Cu
QO-PL	10–60 A	12–2 Al 14–2 Cu

QOT and QO Tandem Circuit Breakers

QOT tandem circuit breakers have a mounting cam as shown. Installation into a QO load center can only be made in those positions having a mounting pan rail slot. Meets Paragraph 408.54 of the NEC®. UL Listed as Class CTL.



QOT 1P Tandem
1 Space Required




Table 1.5: QOT Tandem Circuit Breakers (CTL)—Not Compatible with Plug-on Neutral Systems

Ampere Rating *[11]*	Cat. No. *[12]*
1P—120/240 Vac	
15 A and 15 A	QOT1515
15 A and 20 A	QOT1520
20 A and 20 A	QOT2020
2P—120/240 Vac Common Trip	
Order two QOT1515 or QOT2020 circuit breakers and handle tie QOTHT for common switching of center two poles.	

Table 1.6: QO Tandem Circuit Breakers (non-CTL)—Compatible with Plug-on Neutral Systems

Ampere Rating *[11]*	Cat. No. *[12]*
1P—120/240 Vac—1 Space Required	
15 A and 15 A	QO1515
15 A and 20 A	QO1520
20 A and 20 A	QO2020
20 A and 30 A	QO2030
30 A and 20 A	QO3020
Two 1P Individual Trip—120/240 Vac—2 Spaces Required	
15 A and 15 A	Order two QO1515 or QO2020 circuit breakers and handle tie QOTHT
15 A and 20 A	
20 A and 20 A	—
20 A and 30 A	QO20303020 *[13]*
30 A and 20 A	—

NOTE: The torque values for these products can be found at www.se.com

[11] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.
[12] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[13] Includes two circuit breakers (one QO2030 and one QO3020) and handle tie QOTHT.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


1P
QO-GFI


2P
QO-GFI

QO Ground-Fault Circuit Breakers (GFI)

Qwik-Gard™ circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 mA or more, for people protection. Do not connect to more than 250 feet of load conductor for the total one-way run to prevent nuisance tripping.

Table 1.7: QO-GFI Circuit Breakers

Circuit Breaker Type	Ampere Rating *[14]*	Qwik-Gard Circuit Breakers With Ground Fault Circuit Interrupter			
		1P 120 Vac		2P Common Trip 120/240 Vac	3P Common Trip 208Y/120 Vac
		10 k AIR 1 Space Required	22 k AIR 1 Space Required	10 k AIR 2 Spaces Required	10 k AIR 3 Spaces Required
Ground-Fault Circuit Interrupter (Pigtail Neutral)	15	QO115GFI	QO115VHGFI	QO215GFI	QO315GFI
	20	QO120GFI	QO120VHGFI	QO220GFI	QO320GFI
	25	—	—	QO225GFI	—
	30	QO130GFI	—	QO230GFI	QO330GFI
	35	—	—	QO235GFI	—
	40	—	—	QO240GFI	QO340GFI
	45	—	—	QO245GFI	—
	50	—	—	QO250GFI	QO350GFI
	60	—	—	QO260GFI *[15]*	—
Plug-On Neutral Ground-Fault Circuit Interrupter	15	QO115PGFI*[16]*	—	—	—
	20	QO120PGFI*[16]*	—	—	—


1P
QO-CAFI
Plug-On Neutral


1P
QO-CAFI
Pigtail

QO Arc-Fault Circuit Breaker (QO-CAFI)

QO arc-fault circuit breakers provide protection for Series and Parallel Type Arcing as required by the NEC and local code adoption, and comply with UL1699.

Table 1.8: QO-CAFI Circuit Breakers

Circuit Breaker Type *[17]*	Ampere Rating	One–Pole 120 Vac		Two–Pole 120/240 Vac
		10 k AIR 1 Space Required	22 k AIR 1 Space Required	10 k AIR 2 Space Required
Combination Arc-fault Interrupter (Pigtail Neutral)	15 20	QO115CAFI QO120CAFI	QO115VHCAFI QO120VHCAFI	QO215CAFI*[18]* QO220CAFI *[18]*
Plug-On Neutral Combination Arc-fault Interrupter	15 20	QO115PAF QO120PAF	QO115VHPAF QO120VHPAF	—


1P QO-DF
Plug-on Neutral


1P QO-DF
Pigtail

QO Dual Function Circuit Breaker

QO Combination Arc Fault and Ground Fault Circuit Interrupters (Dual Function) provide overload and short circuit protection, plus arc fault and ground fault protection in accordance with the NEC, UL1699 and UL943.

Table 1.9: QO-DF Circuit Breakers

Circuit Breaker Type *[17]*	Ampere Rating	1P 120 Vac 10 k AIR 1 Space Required	1P 120 Vac 22 k AIR 1 Space Required
Combination Arc-fault and Ground Fault Circuit Interrupter (Pigtail Neutral)	15 20	QO115DF QO120DF	— QO120VHDF
Plug-On Neutral Combination Arc-fault and Ground Fault Circuit Interrupter	15 20	QO115PAFGF QO120PAFGF	QO115VHPAFGF QO120VHPAFGF

[14] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.
[15] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.
[16] New Plug-On Neutral
[17] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[18] For 120/240 V only, not for 208Y/120 V.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



QO220EPD

QO-EPD/EPE Circuit Breakers

QO-EPD/EPE circuit breakers provide overload and short circuit protection combined with Class B ground fault protection. They are designed to provide ground fault protection of equipment at a 30 mA level (EPD) or 100 mA level (EPE). They are not designed to protect people from electrical shock.

Table 1.10: QO-EPD Circuit Breakers

Ampere Rating *[19]*	1P 120 Vac 10 k AIR 1 Space Required	2P Common Trip 120/240 Vac 10 k AIR 2 Spaces Required	
15	QO115EPD	QO215EPD	QO315EPE*[20]*
20	QO120EPD	QO220EPD	QO320EPE *[20]*
25	QO125EPD OBS	QO225EPD	—
30	QO130EPD	QO230EPD	QO330EPE *[20]*
40	—	QO240EPD	QO340EPE *[20]*
50	—	QO250EPD	QO350EPE *[20]*
60	—	QO260EPD *[21]*	—

OBS This product is obsolete.

QO Switch Neutral Common Trip Circuit Breakers (QO-SWN)

Switch Neutral Common Trip 2008 NEC® 514.11

Table 1.11: QO-SWN Circuit Breakers

Ampere Rating *[19]*	2 Wire 120 Vac 10 k AIR 2 Spaces Required
15	QO215SWN
20	QO220SWN

QO High Intensity Discharge Circuit Breakers (QO-HID)

HID circuit breakers are for use on circuits feeding fluorescent and high intensity discharge (HID) lighting systems such as mercury vapor, metal halide, or high pressure sodium. These circuit breakers are physically interchangeable with QO circuit breakers.



QO320HID

Table 1.12: QO-HID Circuit Breakers

Ampere Rating *[19]*	1P 120/240 Vac 10 k AIR	2P Common Trip 120/240 Vac 10 k AIR	3P Common Trip 240 Vac 10 k AIR
20	—	QO220HID	QO320HID

QO High Magnetic Trip Circuit Breakers (QO-HM)

High magnetic trip circuit breakers are recommended for applications where high initial inrush may occur and for individual dimmer applications.

Table 1.13: QO-HM Circuit Breakers

120 Vac—10 k AIR	
Ampere Rating *[19]*	1P
15 A	QO115HM *[22] [23]*
20 A	QO120HM *[22] [23]*

Non-Automatic (Standard) Miniature Switches

Miniature non-automatic switches have the same physical packaging as miniature circuit breakers, but open only when the handle is switched to the OFF position.

Non-automatic switches provide no overcurrent protection or short circuit protection. They must not be used on systems that have an available fault current greater than the values listed in the table. Non-automatic switches are UL Listed per UL 1087 and are CSA certified.

Table 1.14: QO Non-Automatic Miniature Switches, 240 Vac 10 kA

Ampere Rating	2P	3P
60	QO200	QO300 OBS

OBS This product is obsolete.

[19] 10–30 A circuit breakers are suitable for use with 60ºC or 75ºC conductors. 35–125 A circuit breakers are suitable for use with 75ºC conductors.
[20] See note in Instruction Bulletin when using in an enclosure with a QO403 or QON prefix.
[21] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.
[22] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[23] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Accessories for QO/QOB Circuit Breakers

Table 1.15: Accessories for use with QO and QOB Miniature Circuit Breakers

Description		Cat. No.	Schedule
Handle Attachments			
Handle Tie	Converts any two adjacent 120/240 Vac 1P QO circuit breakers to independent trip 2P Converts any two adjacent 120/240 Vac1P side-by-side QOT circuit breakers to independent trip 2P	QO1HT QOTHT QO3HT	DE2E DE2E
Handle Clamp	Clamp for holding QO 1P handle in ON or OFF position Clamp for holding QO or Q1 either 1P, 2P or 3P circuit breaker handles in ON or OFF position	QO1LO HLO1	DE2E DE2E
Handle Padlock Attachment for Padlocking in ON or OFF position	For padlocking 1P QO circuit breaker in ON or OFF position Loose attachment Fixed attachment	QOHPL QO1PA	DE2E DE2E
	For padlocking 1P side-by-side QOT circuit breaker in ON or OFF position	QOTHPA OBS	DE2E
	For padlocking 2P QO-GFI circuit breakers in either ON or OFF position, fixed attachment.	GFI2PA	DE2A
	For 2P and 3P QO and Q1 standard circuit breakers which require padlocking in either ON or OFF position. Loose attachment Fixed attachment	QO1HPL QO1PL	DE2E DE2E
Handle Padlock Attachment for Padlocking in OFF position	For padlocking 2P and 3P QO circuit breakers in OFF position only, fixed attachment.	QO2PAF	DE2E
	For padlocking 1P QO, QO-GFI, QO-CAFI, QO-DF and QO-EPD circuit breakers in OFF position only, fixed attachment.	QOADV1PAF	DE2E
	For padlocking 2P QO-GFI, QO-CAFI and QO-EPD circuit breakers in OFF position only, fixed attachment.	QOGFI2PAF	DE2E
Ring Terminal	Ring terminals are available as a factory-installed option.	See Section 7	DE2A
Sub-feed Lugs	60 A 2P plug-on – 2 spaces required (6–2 Al/Cu) 125 A 2P plug-on – 2 spaces required (12–2/0 Al/Cu) 225 A 2P plug-on – 4 spaces required (4–300 Al/Cu) 125 A 3P plug-on – 3 spaces required (12–2/0 Al/Cu)	QO60SL OBS QO2125SL QO2225SL *[24]* QO3125SL	DE2A DE2A DE2A DE3
Mechanical Interlock Attachment	For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be ON at a time (Not QOU)	QO2DTI	DE2E
With Retaining Kit	QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2Ps or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers.	QO2DTIM	DE2E

OBS This product is obsolete.



QO1PA



QO1PL



QO1HT



HLO1



QO1PAF



QO2DTI



QO1HPL



QOTHPA




QO1LO



QOHPL



QO2PAF



QOADV1PAF

[24] Not suitable for use in 3Ø panels. Use only in 1Ø panel rated 150 A or greater.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Factory-Installed Accessories for QO and QOB Miniature Circuit Breakers

Factory-installed electrical accessories take up an additional pole space on QO, QO-GFI, QO-EPD, QO-SWN and QOU circuit breakers. All AC electrical accessories shown below are rated for 50/60 Hz. Accessories are not available for QOB-VH (2P 150 A and 3P 110–150 A) circuit breakers or QO, QOU molded case switches. QO circuit breakers will accept only one accessory per circuit breaker. Undervoltage trip is not available on miniature circuit breakers. Factory-installed accessories are not available for QO-AFI or QO-CAFI Arc Fault Circuit Breakers, QO-CAFI, QO-DF, or QO-PDF circuit breakers, or on QO2150, QO2175, or QO2200 circuit breakers.

Table 1.16: Factory-Installed Accessories for QO/QOB Circuit Breakers *[25]*

Accessory	Description	Rated Voltage	Coil Burden	Cat. No. Suffix
Shunt Trip	Trips the circuit breaker from a remote location by means of a trip coil energized from a separate circuit. A 120 Vac shunt trip will operate at 55% or more of rated voltage. All other shunt trips will operate at 75% or more of rated voltage. **Application** • For use with momentary or maintained push button. • Not available on QO-GFI, QO-EPD. QO-AFI, QO-CAFI, QO-DF, or QO-PDF. • Shunt trip terminals accept (2) 14–12 AWG Cu.	12 Vac/Vdc 24 Vac/Vdc	60 VA 168 VA	-1042
		120 Vac 208 Vac 240 Vax	72 VA 228 VA 288 VA	-1021

Accessory	Description	Contact Comb.	Max. Voltage	Max.	Cat. No. Suffix
Auxiliary Switches	Monitors circuit breaker contact status and provides a remote signal indicating the circuit breaker contacts are OPEN or CLOSED. **Application** • Auxiliary switch terminals accept (2) 14–12 AWG Cu leads. • Leads (EH): Yellow for "A", Blue for "B", Striped common 18 AWG Cu.	1A 1B	120 Vac 120 Vac	5 A 5 A	-1200 -1201
Alarm Switches	Used with control circuits and is actuated only when the circuit breaker has tripped. Standard construction includes a normally-open contact. **Application** • Leads: Alarm switch terminals accept (2) 14–12 AWG Cu leads.	1A	120 Vac	5 A	-2100

Plug-on Neutral Load Center Main Lugs, Convertible Mains

Single Phase 3W—120/240 Vac Indoor—UL Listed

QO Plug-on Neutral Load Centers and CAFI Breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.17: Convertible Main Lugs Plug-on Neutral Load Center (Compatible with QO Plug-on Circuit Breaker and QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[1]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Load Center Covers: Flush/Surface	Load Center Covers: Mono-Flat	Al	CU	Bus Rating	Equipment Ground Bar Kit (Factory-Included)	Box No. *[2]*
INDOOR	**Convertible Mains—Factory-installed Main Lugs — 65 kA Short Circuit Current Rating—Copper Bus QOM1 Main Frame Size—Convertible to Main Circuit Breaker**											
	125 A	12	24	12	QO112L125PG	QOC16UF*[3]* QOC16US	—	6–2/0		125	PKGTALP1	6
		16	24	8	QO116L125PG	QOC24UF*[3]* QOC24US	—	6–2/0		125	PKGTALP1	7
		20	24	4	QO120L125PG	QOC20U100F*[3]* QOC20U100S	—	6–2/0		125	PKGTALP1	6
		24	34	10	QO124L125PG	QOC24UF*[3]* QOC24US	—	6–2/0		125	PK15GTAL	7
		30	34	4	QO130L125PG	QOC30U125C	—	6–2/0		125	PK23GTAL	9
		32	38	6	QO132L125PG	QOC32UF*[3]*	—	6–2/0		125	PKGTALP1	8
	Convertible Mains— Factory-installed Main Lugs, 65 kA Short Circuit Current Rating—Copper Bus QOM2 Main Frame Size—Convertible to Main Circuit Breaker											
	200 A	12	24	12	QO112L200PG	QOC30UF*[3]* QOC30US	QOCMF30UCW*[3]*	4–300	4–250	225	PKGTALP1	9
		24	36	12	QO124L200PG	QOC30UF*[3]* QOC30US	QOCMF30UCW*[3]*	4–300	4–250	225	PKGTALP1	9
		30	40	10	QO130L200PG	QOC30UF*[3]* QOC30US	QOCMF30UCW*[3]*	4–250		225	PK23GTAL	9
		40	60	20	QO140L200PG	QOC40UF*[3]* QOC40US	—	4–300	4–250	225	PKGTALP2	10
	225 A	42	52	10	QO142L225PG	QOC42UF*[3]* QOC42US	QOCMF42UCW*[3]*	4–300		225	PK23GTAL	11
		54	64	10	QO154L225PG	QOC54UF*[3]*	QOCMF54UCW*[3]*	4–300		225	PK23GTAL	11

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.
OBS This product is obsolete.

[25] QOB circuit breakers with shunt trip, auxiliary switches, and/or alarm switches, which are no longer active commercial references, may be available Factory Assembled into NQ Panelboards.
[1] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[2] See page 1-34
[3] Available in gray and white. For white equivalencies, add the "W" suffix to the reference, or see page 1-30.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



QOM1 Frame Size
50–125 Amperes



QOM2 Frame Size
100–225 Amperes

Field-Installed Main Circuit Breaker Kits, 1Ø

Table 1.18: QOM1 Frame Size—Use with Convertible Main Load Centers Only

Main Circuit Breaker Rating *[4]*	Convertible Load Center Mains Rating	22 k AIR *[5]* Main Circuit Breaker	Lug Wire Size *[6]* AWG/ kcmil
50 A	100–125	QOM50VH	12–2/0 Al or Cu
60 A	100–125	QOM60VH	
70 A	100–125	QOM70VH	
80 A	100–125	QOM80VH	
90 A	100–125	QOM90VH	
100 A	100–125	QOM100VH	
110 A	125	QOM110VH	
125 A	125	QOM125VH	

Table 1.19: QOM2 Frame Size—Use with Convertible Main Load Centers Only

Main Circuit Breaker Rating *[4]*	Convertible Load Center Mains Rating	22 k AIR *[5]* Main Circuit Breaker *[7]*	Lug Wire Size *[6]* AWG/kcmil
100 A	150–225	QOM2100VH	4–300 Al or Cu
125 A	150–225	QOM2125VH	
150 A	150–225	QOM2150VH	
175 A	200–225	QOM2175VH	
200 A	200–225	QOM2200VH	
225 A	225	QOM2225VH	

[4] Do not exceed the load center mains rating.
[5] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
[6] Wire range listed for QOM circuit breaker kits is the wire range of that circuit breaker. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.
[7] Add suffix 1021 for 120, 208 or 240 Vac shunt trip.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Plug-on Neutral Load Center Main Breaker, Convertible Mains

1Ø3W—120/240 Vac Indoor—UL Listed

QO Plug-on Neutral Load Centers and CAFI Breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.20: Convertible Main Breaker Plug-on Neutral Load Centers (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

		Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Breakers	Load Center Box and Interior	Load Center Covers: Flush/Surface	Load Center Covers: Mono-Flat	Al	Cu	Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[8]*
 QO154M200P	INDOOR	Convertible Mains — Factory-Installed Main Circuit Breaker— 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (see QO Standard Plug-On Circuit Breakers, page 1-3) *[9]*, QOM1 Main Circuit Breaker Frame Size—Copper Bus											
		100 A	12	24	12	QO112M100P	QOC12UF QOC12US	—	6-2/0	6–1	125	PK9GTA	5
			16	24	8	QO116M100P	QOC20U100F*[10]* QOC200U100S	—	6-2/0	6–1	125	PK9GTA	6
			20	24	4	QO120M100P	QOC20U100F*[10]* QOC200U100S	—	6-2/0	6–1	125	PK9GTA	6
			24	34	10	QO124M100P	QOC24UF*[10]* QOC24US	—	6-2/0		125	PK15GTA	7
			32	38	6	QO132M100P	QOC32UF*[10]*	—	6-2/0		125	PK15GTA	8
		125 A	24	34	10	QO124M125P	QOC24UF*[10]* QOC24US	—	6-2/0		125	PK15GTA	7
			32	38	6	QO132M125P	QOC32UF*[10]*	—	6-2/0		125	PK15GTA	8
		Convertible Mains — Factory-Installed Main Circuit Breaker— 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (see QO Standard Plug-On Circuit Breakers, page 1-3) *[9]*, QOM2 Main Circuit Breaker Frame Size—Copper Bus											
		150 A	24	36	12	QO124M150P	QOC30UF*[10]* QOC30US	QOCMF30UCW*[10]*	4-250		225	PK15GTA	9
			30	40	10	QO130M150P	QOC30UF*[10]* QOC30US	QOCMF30UCW*[10]*	4-250		225	PK15GTA	9
			32	40	10	QO132M150P	QOC40UF*[10]* QOC40US	—	4-300	4-250	225	PK15GTA	10
		200 A	24	36	12	QO124M200P	QOC30UF*[10]* QOC30US	QOCMF30UCW*[10]*	4-300	4-250	225	PK15GTA	9
			30	40	10	QO130M200P	QOC30UF*[10]* QOC30US	QOCMF30UCW*[10]*	4-250		225	PK15GTA	9
			40	60	20	QO140M200P	QOC40UF*[10]* QOC40US	—	4-300	4-250	225	PK23GTA	10
			42	52	10	QO142M200P	QOC42UF*[10]* QOC42US	QOCMF42UCW*[10]*	4-300		225	PK18GTA	11
			54	72	18	QO154M200P	QOC54UF*[10]*	QOCMF54UCW*[10]*	4-300		225	PK23GTA	12
			60	72	12	QO160M200PC *[11]*	—	—	4-300		225	PK27GTA	24
		225 A	42	52	10	QO142M225P	QOC42UF*[10]* QOC42US	QOCMF42UCW*[10]*	4-300		225	PK18GTA	11

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

OBS This product is obsolete.

Field-Installed Main Lugs Kits, 1Ø

Table 1.21: 1Ø Field-Installed Main Lug Kits—Use with Convertible Main Load Centers Only

Main Lugs Rating *[12]*	Use on Convertible Load Center with Mains Rating	Cat. No.	Lug Wire Size *[13]* AWG/kcmil Al or Cu
125 A	100–125 A	QOL125 *[14]*	6–2/0
125 A	100–125 A	QOL125VD *[14]*	6–4/0
225 A	150–225 A	QOL225 *[14]*	6–300



QOL125



QOL225

[8] See Indoor Knockout Information and Enclosure Dimensions, page 1-34.
[9] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
[10] Available in gray and white. For white equivalencies, add the "W" suffix to the reference, or see page 1-30.
[11] For Certification to IEC 60439-1 contact the local Square D sales office; otherwise panels are **NOT** CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current Rating when QOXD...branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO...VS branch circuit breakers are used).
[12] Do not exceed the load center mains rating.
[13] Wire range listed for QOL lug kits is the wire range of that lug. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.
[14] If main circuit breaker knockout has been removed from the load center's trim, order appropriate filler plate from Table 1.51, page 1-25

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



QO Plug-on Neutral
Load Center with Qwik-Grip™

QO™ Plug-On Neutral Load Centers with Qwik-Grip™

1Ø3W—120/240 Vac Indoor—UL Listed

The Square D QO plug-on neutral load centers with Qwik-Grip simplify rough-in by eliminating the need to remove knockouts, install wire connectors, and blindly pull wire into the load center. A quick bend of the wire using the wire bend guide on the Qwik-Grip insert and the wire slides into the slot. Once inserted, the Qwik-Grip shield snaps on to keep the wire behind the router for a secure, code-compliant installation.

Table 1.22: Plug-on Neutral Load Centers with Qwik-Grip (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover with Door (Order Separately)		Main Wire Size AWG/kcmil		Bus Rating	Equipment Gound Bar Kit	Box No.
						Flush/Surface	Mono-Flat	Al	Cu			
INDOOR	Convertible Mains—Factory-Installed Main Lugs, 65 kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Circuit Breaker											
	125 A	24	34	10	QO124L125PQG	QOC24UF[15] QOC24US	—	6–2/0		125	PK15GTAL Included	7Q
	Convertible Mains-Factory—Installed Main Lugs, 65 kA Short Circuit Current Rating—Copper Bus, QOM2 Main Frame Size, Convertible to Main Circuit Breaker											
	200 A	30	40	10	QO130L200PQG	QOC30UF[15] QOC30US	—	6–300		225	PK23GTAL Included	9Q
	225 A	42	52	10	QO142L225PQG	QOC42UF[15] QOC42US	—			225	PK23GTAL	9Q
	Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating—Copper Bus, QOM2 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker											
	200 A	30	40	10	QO130M200PQ	QOC30UF[15] QOC30US	—	4–250		225	PK23GTA (Order separately)	11Q
		42	52	10	QO142M200PQ	QOC42UF[15] QOC42US	—			225	PK23GTA (Order separately)	11Q

[15] Available in gray and white. For white equivalencies, add the "W" suffix to the reference, or see page 1-30.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

QO Load Centers with Included Cover
1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.23: Load Centers with Included Cover (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

Mains Rating	Short Circuit Current Rating	Spaces	Max. 1P Circuits *[16]*	Max. Tandem Circuit Breakers	Load Center *[17]* Box, Interior, and Cover	Al	Cu	Bus Rating	Equipment Ground Bar Kit	Box No. *[18]*
125 A	65 kA	12	24	12	QO112L125PGC	6-2/0		125	PKGTALP1 Included	5
	65 kA	24	34	10	QO124L125PGC	6-2/0		125	PK15GTA, LK100AN Included	7
Convertible Mains—Factory-Installed Main Lugs *[19]*—QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-3)—Copper Bus										
200 A	65 kA	30	40	10	QO130L200PGC	4-250		225	PK23GTA, LK100AN Included	9
225 A	65 kA	42	52	10	QO142L225PGC	4-300		225	PK23GTA, LK100AN Included	11
Convertible Mains—Factory-Installed Main Circuit Breaker— QOM1 Main Frame Size—Convertible to Main Lugs (See page 1-25 or Lower Amperage Main Circuit Breaker (See page 1-3)—Copper Bus *[20]*										
100 A	22 kA	12	24	12	QO112M100PC	6–2/0	6–1	125	PK9GTA	5
	22 kA	20	24	4	QO120M100PC	6–2/0	6–1	125	PK9GTA	6
	22 kA	24	34	10	QO124M100PC	4-300		125	PK15GTA	7
Convertible Mains—Factory-Installed Main Circuit Breaker— QOM2 Main Frame Size—Convertible to Main Lugs (See page 1-25 or Lower Amperage Main Circuit Breaker (See page 1-3)—Copper Bus *[20]*										
150 A	22 kA	30	40	10	QO130M150PC	4-250		225	PK15GTA	9
	22 kA	42	52	10	QO142M150PC	4-300		225	PK18GTA	11
200 A	22 kA	30	40	10	QO130M200PC	4-250		225	PK15GTA	9
	22 kA	40	60	20	QO140M200PC	4-300	4-250	225	PK23GTA	10
	22 kA	42	52	10	QO142M200PC	4-300		225	PK18GTA	11
	22 kA	54	72	18	QO154M200PC	4-300		225	PK23GTA	12

Plug–on Neutral Load Center Main Lugs, Convertible Mains
1Ø3W—120/240 Vac Rainproof—UL Listed

QO Plug-on Neutral Load Centers and CAFI Breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.24: Convertible Main Lugs Plug-on Neutral Load Center (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[16]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Al	Cu	Bus Rating	Equipment Ground Bar Kit (Factory Included)	Box No. *[21]*
RAINPROOF	Convertible Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating *[22][19][23]* QOM1 Main Circuit Breaker Frame Size, Convertible to Main Circuit Breaker — Equipment Ground Bar Included									
	125 A	12	24	12	QO112L125PGRB	6–2/0		125	PKGTALP1	3R
		16	24	8	QO116L125PGRB	6–2/0		125	PKGTALP1	4R
		24	34	10	QO124L125PGRB	6–2/0		125	PK15GTA	4R
	Convertible Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating *[22][19][23]* QOM2 Main Circuit Breaker Frame Size, Convertible to Main Circuit Breaker — Equipment Ground Bar Included									
	200 A	12	24	12	QO112L200PGRB	4–300	4–250	225	PKGTALP1	5R
		30	40	10	QO130L200PGRB	4–250		225	PK23GTAL	6R
		40	60	20	QO140L200PGRB	4–300	4–250	225	PKGTALP2	7R
	225 A	42	52	10	QO142L225PGRB	4–300		225	PK23GTA, LK100AN	8R

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

[16] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[17] Order F for flush device or S for surface device.
[18] See page 1-34
[19] UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.
[20] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
[21] See Table 1.75 Enclosure Dimensions, page 1-36 or Indoor Enclosure Dimensions and Knockout Information, page 1-34
[22] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
[23] Side hinge door device; allow 1-1/4 in. on left side for door to open.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Plug–on Neutral Load Center Main Breaker, Convertible Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

QO Plug-on Neutral Load Centers and CAFI circuit breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.25: Convertible Main Breaker Plug-on Neutral Load Center (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[24]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Al	Cu	Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[25]*
RAINPROOF	Convertible Mains — Factory-Installed Main Breaker — 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (See page 1-3)*[26]* QOM1 Main Circuit Breaker Frame Size—Copper Bus									
	100 A	12	24	12	QO112M100PRB	6–2/0		125	PK9GTA	3R
		16	24	8	QO116M100PRB	6–2/0		125	PK9GTA	4R
		20	24	4	QO120M100PRB	6–2/0		125	PK9GTA	4R
		24	34	10	QO124M100PRB	6–2/0		125	PK15GTA	4R
	125 A	24	34	10	QO124M125PRB	6–2/0		125	PK15GTA	4R
	Convertible Mains — Factory-Installed Main Breaker — 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (See page 1-3) *[26]* QOM2 Main Circuit Breaker Frame Size—Copper Bus									
	150 A	20	30	10	QO120M150PRB	4–300	4–250	225	PK15GTA	5R
		30	40	10	QO130M150PRB	4–250		225	PK15GTA	6R
	200 A	20	30	10	QO120M200PRB	4–300	4–250	225	PK15GTA	5R
		30	40	10	QO130M200PRB	4–250		225	PK15GTA	6R
		40	60	20	QO140M200PRB	4–300	4–250	225	PK23GTA	7R
		42	52	10	QO142M200PRB	4–300		225	PK18GTA	8R
	225 A	42	52	10	QO142M225PRB	4–300		225	PK18GTA	8R

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

[24] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[25] See Table 1.75 Enclosure Dimensions, page 1-36 or Indoor Enclosure Dimensions and Knockout Information, page 1-34
[26] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10 k AIR branch circuit breakers to permit their application on systems up to 22 kA

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


Backup Power Solutions
1Ø3W—120/240 Vac Backup Power—UL Listed

Table 1.26: Backup Power Solutions

	Mains Rating (A)	Spaces	Max. Single Pole Circuits *[27]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover	Equipment Grounding Bar Kit (Order Separately)	Main Wire Size AWG/kcmil Al	Main Wire Size AWG/kcmil Cu	Bus Rating	Box No. *[28]*
INDOOR	Generator Panels—Manual Transfer for Sub-Feed Applications NEMA 1 (Indoor)									
	Factory-Installed Main Circuit Breakers with Mechanical Interlock—10 kA Short Circuit Current Rating									
	30	4	8	4	QO48M30DSGP	PK7GTA	14–8	14–8	30	4
	60	4	8	4	QO48M60DSGP		8–2	8–2	60	4
RAINPROOF	Generator Panels—Manual Transfer with Generator Power Inlet Plug for Sub-Feed Applications NEMA 3R (Outdoor)									
	Factory-Installed Main Circuit Breakers with Mechanical Interlock—10 kA Short Circuit Current Rating									
	100	4	8	4	QO1DM10030TRBR	Factory-Installed	—	8–2	100	17R
		4	8	4	QO1DM10050TRBR		—		100	17R

Table 1.27: Manual Power Transfer Accessories

Description		Cat. No.	Schedule
Manual Transfer Equipment Kit	For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be "ON" at a time.	QO2DTI	DE2E
	QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2P or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers.	QO2DTIM	DE2E
	Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02.	PK4DTIM4LA	DE3A
	Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02.	PK4DTIM4HA	DE3A
	Secures two 2P circuit breakers to left side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02.	PK4DTIM4LAL	DE3A
Generator Circuit Breaker Interlock Kit	For use on "G" and "S" Series NEMA 1 and "G", "S1" and "S2" Series NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.	QOCRBGK1C	DE3A
	For use on "G" and "S" Series NEMA 1 and "G" and "S1" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.	QOCGK2C	DE3A
	For use on "S2" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.	QORBGK2C	DE3A

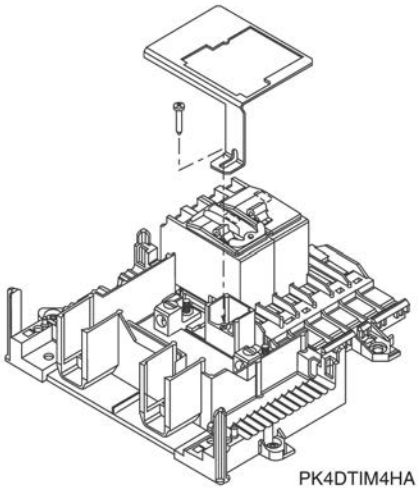

PK4DTIM4HA



QO2DTI



QOCGK2C

[27] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[28] See page 1-34 or page 1-36

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

QO Standard Load Center Main Lugs and Main Breaker, Fixed Mains

1Ø3W—120/240 Vac Special Applications—UL Listed

Table 1.28: Low Amperage Fixed Main Lugs Indoor Load Centers (Accepts Only QO Plug-on Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. 1P Circuits *[29]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover with Door		Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[30]*
						Flush	Surface	Al	Cu			
INDOOR	Fixed Mains—Factory-Installed Main Lugs—10 kA Short Circuit Current Rating *[31]*											
	30 A	2	2	0	QO2L30S *[32] [33]*	Cover Included—Without Door		12–10	14–10	30	PK3GTA1	1
	70 A	2	4	2	QO24L70F / S *[34] [35]*	Cover Included—Without Door		12–3	14–4	70	PK4GTA	2
	100 A	6	12	6	QO612L100F / S *[34] [36]*	Cover Included—Without Door		8–1		100	PK7GTA	4
		6	12	6	QO612L100DF / S *[34] [36]*	Cover Included—With Door				100	PK7GTA	4
		8	16	8	QO816L100F / S *[34] [36]*	Cover Included—Without Door				100	PK7GTA	4
		8	16	8	QO816L100DF / S *[34] [36]*	Cover Included—With Door				100		
		6	12	6	QO612L100DSCU*[34] [36] [37]*	Cover Included—With Door				100	PK7GTA	4
		8	16	8	QO816L100DSCU *[34] [36] [37]*	Cover Included—With Door				100	PK7GTA	4
	125 A	4	8	4	QO148L125GF / S *[34] [38]*	Cover Included—Without Door		12–2/0	14–2/0	125	PK7GTA *[39]*	21

Table 1.29: Low Amperage Fixed Mains Indoor Load Centers with Factory Installed Ground Bar (Accepts Only QO Plug-On Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Short Circuit Current Rating	Spaces	Max. 1P Circuits *[29]*	Max. Tandem Circuit Breakers	Load Center *[34]* Box, Interior, and Cover	Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Bus Rating	Box No. *[30]*
								Al	Cu		
INDOOR	1Ø2W 120 Vac—Main Circuit Breakers—CSA Certified										
	30 A	10 kA	3	5	2	QO35FM30TTS	Factory-installed	*[40]*		—	3
	1Ø3W 120/240 Vac—Main Lugs Only—CSA Certified										
	70 A	10 kA	2	4	2	QO24L70TS *[41]*	Factory Installed	12–3	14–4	70	2
	100 A	10 kA	8	16	8	QO816L100TS*[42]*		4–1		100	4
			8	16	8	QO816L100DTF QO816L100DTS *[42]*				100	4

Table 1.30: High Amperage Fixed Main Breaker and Main Lugs Indoor Load Centers (Accepts Only QO Plug-On Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. 1P Circuits *[29]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover with Door (Order Separately)		Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. *[30]*
						Flush	Surface	Al	Cu		
INDOOR	300 A	42	42	0	QONQ42MS300 (Int) *[43]* MH62 (Box) *[45]*	NC62NQVF	NC62NQVS	(1) 4–500 or (2) 4–3/0		PK27GTA *[44]* or PK15GTA6	16
	400 A	42	42	0	QONQ42MS400 (Int) *[43]* MH62 (Box) *[45]*	NC62NQVF	NC62NQVS	(1) 4–500 or (2) 4–3/0			16
	Fixed Mains—Factory-Installed Main Lugs—65 kA Short Circuit Current Rating *[31] [46]*										
	400 A	30	30	0	QONQ30LS400 (Int) *[43]* MH50 (box) *[45]*	NC50NQVF	NC50NQVS	(1) 1/0–750 or (2) 1/0–300		PK27GTA *[44]* or PK15GTA6	15
		42	42	0	QONQ42LS400 (Int) *[43]* MH50 (box) *[45]*	NC50NQVF	NC50NQVS				15

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

QO Standard Load Center Main Lugs, Fixed Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

[29] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[30] See Table 1.73 Knockout Information, page 1-34
[31] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
[32] Will not accept QO-EPD or Qwik-Gard™ QO-GFI or QO-AFI circuit breakers.
[33] Mains rated 25 A when Al wire is used.
[34] Order F for flush device or S for surface device.
[35] Use 10 AWG maximum size wire for GFI and AFI circuit breakers.
[36] 70 A Max. branch circuit breaker and 100 A max. back fed main circuit breaker.
[37] CU indicates copper bus.
[38] Copper bus.
[39] Factory-included.
[40] Main circuit breaker is a field-installed standard QO single pole circuit breaker. Order separately from page 1–2 and 1–3.
[41] Use 10 AWG maximum size wire for GFI and AFI circuit breakers.
[42] 70 A max. branch circuit breaker and 70 A max. back fed main circuit breaker.
[43] Interior only, order box separately.
[44] PK27GTA includes a 6–2/0 AWG Al/Cu lug.
[45] PE1A Discount Schedule.
[46] UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.31: Fixed Main Lugs Rainproof Load Centers (Accepts Only QO Plug-on Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[47]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Main Wire Size AWG/kcmil Al	Main Wire Size AWG/kcmil Cu	Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[48]*
RAINPROOF	**Non-Metallic Enclosure** Fixed Mains—Factory-installed Main Lugs—10 kA Short Circuit Current Rating									
	60 A	2	4	2	QO24L60NRNM	14–4	14–4	60	Factory-installed	1NM
	Metallic Enclosure Fixed Mains—Factory-installed Main Lugs—10 kA Short Circuit Current Rating									
	40 A	2	2	0	QO2L40RB *[49]*	12–6	14–6	40	PK3GTA1	1R
	70 A	2	4	2	QO24L70RB *[49]*	12–3	14–4	70	PK4GTA	1R
	100 A	6	12	6	QO612L100RB*[50]*	8–1		100	PK7GTA	2R
		6	12	6	QO612L100TRB*[50]*			100	Factory-installed	2R
		8	16	8	QO816L100RB *[50]*			100	PK7GTA	2R
		6	12	6	QO612L100RBCU*[50]* *[51]*			100	PK7GTA	2R
		8	16	8	QO816L100RBCU*[50]* *[51]*			100	PK7GTA	2R
	125 A	4	8	4	QO148L125GRB *[51]*	12–2/0	14–2/0	125	PK7GTA Factory-included	15R

Standard Load Center Main Breaker, Convertible Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.32: Convertible Main Breaker Load Centers (Accepts Only QO Plug-on Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[47]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Al	Cu	Equipment Ground Bar Kit (Order Separately)	Bus Rating	Box No. *[48]*
RAINPROOF	Convertible Mains —Factory-installed Main Circuit Breaker with Feed-thru Lugs, 22 kA Short Circuit Current Rating Convertible to Main Lugs (See page 1-25 or Lower Amperage Main Circuit Breaker (See page 1-3) *[52]*, *[53]* QOM1 or QOM2 Main Circuit Breaker Frame Size—Copper Bus									
	125 A	6	12	6	QO1612M125FTRB *[54]*	4–2/0		PK12GTA	125	3R
	150 A	8	16	8	QO1816M150FTRB *[54]*	4–250		PK15GTAL	200	4R
	200 A	8	16	8	QO1816M200FTRB *[54]*	4–250		PK15GTAL	200	4R

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

[47] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[48] See page 1-36 or Indoor Enclosure Dimensions and Knockout Information, page 1-34
[49] Use 10 AWG maximum size wire for GFI and AFI circuit breakers.
[50] 70 A Max. branch circuit breaker and 70 A max. back fed main circuit breaker.
[51] Copper bus.
[52] Side hinge door device; allow 1-1/4 in. on left side for door to open.
[53] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10 k AIR branch circuit breakers to permit their application on systems up to 22 kA
[54] QO1612M125FTRB provided with QOM1 frame main circuit breaker. QO1816M150FTRB and QO1816M200FTRB provided with QOM2 frame main circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

QO Riser Panels

1Ø3W—120/240 Vac Special Applications—UL Listed

Table 1.33: Riser Panels for Offset Interior for Wide Gutter—30 A Maximum Branch Circuit Breaker on Left Side of Interior *[55]*, *[56]* **(Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)**

	Mains Rating	Spaces	Max. Single Pole Circuits *[57]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Load Center Cover		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Bus Ratings	Box No. *[58]*
						Flush	Mono-Flat		Al	Cu		
INDOOR	Convertible Mains—Factory-Installed Main Lugs, 65 kA Short Circuit Current Rating Convertible to QOM1 22 kA Short Circuit Current Rating Main Circuit Breaker (See page) when used with QOC cover below—Copper Bus											
	125 A	20	24	4	QO120L125PWG	QOC20UFWG *[59]*	NQC20FWGW *[59]*	PK15GTA	6–2/0		125	14
	Convertible Mains-Factory—Installed Main Lugs, 65 kA Short Circuit Current Rating Convertible to QOM2 22 kA Short Circuit Current Rating Main Circuit Breaker (See page) when used with QOC cover below—Copper Bus											
	200 A	30	40	10	QO130L200PWG	QOC30UFWG *[59]*	NQC30FWGW *[59]*	PK23GTA	4–250		225	23

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

Panelboard-style Covers for Riser Panels

Mono-Flat™ Front available for riser panels as an alternative to standard load center cover. Provides a low-profile, aesthetically pleasing solution for high-traffic areas in upscale multi-family applications. Deadfront included. Lock kit not provided. *[60]*

Table 1.34: Auxiliary Gutter

Cat. No.	Cover	Conduit Riser Size	Width	Height	Depth
UL Listed for use with standard 1Ø and 3Ø load centers for riser applications *[61]*. For auxiliary gutter-load center compatibility, see catalog number **1100CT0501**					
SDAG26	Flush	1-3/4, 2, 2-1/2 or *[62]* 3	13.50	26.12	3.75

Table 1.35: Tap Kits for Use with Auxiliary Gutter

Cat. N0.	Use with Auxiliary Gutter Cat. No.	Riser Wire		Tap Off Wire	
		Lug Type	Al/Cu Wire Size	Lug Type	Al/Cu Wire Size
SDGT30020	SDAG26	Mechanical (Included)	(2) 6 AWG–300 kcmil	Mechanical (Included)	(1) 6–2/0 AWG
SDGT300300	SDAG26	Mechanical (Included)	(2) 6 AWG–300 kcmil	Mechanical (Included)	(1) 6 AWG–300 kcmil
QOGL20 Grounding Terminals	SDAG26	Mechanical (Included)	(2) 6–2/0 AWG	—	—

[55] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
[56] UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.
[57] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[58] See page 1-34
[59] Available in gray and white. For white equivalencies, add the “W” suffix to the reference, or see page 1-30.
[60] Order catalog number PK4FL for field-installed lock kit.
[61] One tap kit required for each riser wire.
[62] When used with B300 bolt-on hubs.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

QO Standard Load Center Main Lugs and Main Breaker

3Ø4W, 208Y/120 Vac—3Ø4W, 240/120 Vac Delta—3Ø3W, 240 Vac Delta—Indoor and Rainproof—UL Listed

Table 1.36: Main Lugs and Main Breaker Load Centers (Accepts Only QO Plug-on Circuit Breakers—Not compatible with QO Plug-on Neutral Circuit Breakers)

	Mains Rating	Max. Number of 1P QO circuit breakers	Load Center Box and Interior	Indoor Cover with Door (Order Separately)		Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. *[63]*
			Cat. No.	Flush	Surface	Al	Cu		
INDOOR	**Fixed Mains—Factory-installed Main Lugs—Copper Bus—65 kA Short Circuit Current Rating** *[64]*								
	60 A	3	QO403L60NF/S	Cover Included With Load Center (No Door)		—	10–6	PK4GTA	13
	125 A	20	QO320L125G *[65]*	QOC24UF	QOC24US	6–20	6–20	Factory-incl. *[66]*	7
		24	QO324L125G *[65]*	QOC24UF	QOC24US			Factory-incl. *[66]*	7
	200 A	18	QO318L200G *[65]*	QOC30UF	QOC30US	6–250	6–250	Factory-incl. *[67]*	9
		30	QO330L200G *[65]*	QOC30UF	QOC30US			Factory-incl. *[67]*	9
	225 A	42	QO342L225G *[65]*	QOC42UF	QOC42US	6–300	6–300	Factory-incl. *[67]*	11
	Convertible Mains—Factory-installed QDL Main Circuit Breaker—Copper Bus—25 kA Short Circuit Current Rating *[68]*								
	100 A	27	QO327M100 *[69]*	QOC30UF	QOC30US	4–2/0	4–2/0	PK15GTA	9
	125 A	30	QO330MQ125*[70]* *[65]*	QOC342MQF	QOC342MQS	4–300	4–300	PK18GTA	12
	150 A	30	QO330MQ150*[70]* *[65]*	QOC342MQF	QOC342MQS	4–300	4–300	PK18GTA	12
		42	QO342MQ150*[70]* *[65]*	QOC342MQF	QOC342MQS			PK23GTA	12
	200 A	30	QO330MQ200*[70]* *[65]*	QOC342MQF	QOC342MQS	4–300	4–300	PK18GTA	12
		42	QO342MQ200*[70]* *[65]*	QOC342MQF	QOC342MQS			PK23GTA	12
	225 A	42	QO342MQ225*[70]* *[65]*	QOC342MQF	QOC342MQS	4–300	4–300	PK23GTA	12
RAINPROOF	**Fixed Mains—Factory-installed Main Lugs—Copper Bus—65 kA Short Circuit Current Rating** *[64]* *[71]*								
	60 A	3	QO403L60NRB	Cover Included		—	10–6	PK4GTA	10R
	125 A	12	QO312L125GRB			6–2/0	6–2/0	Factory Incl. *[66]*	3R
		20	QO320L125GRB					Factory Incl. *[66]*	4R
	200 A	18	QO318L200GRB			6–250	6–250	Factory Incl. *[67]*	6R
		30	QO330L200GRB					Factory Incl. *[67]*	6R
	225 A	42	QO342L225GRB			6–300	6–300	Factory Incl. *[67]*	8R
	Convertible Mains—Factory-installed QDL Main Circuit Breaker—Copper Bus—25 kA Short Circuit Current Rating *[68]* *[71]*								
	100 A	27	QO327M100RB *[69]*	Cover Included		4–2/0	4–2/0	PK15GTA	6R
	125 A	30	QO330MQ125RB *[70]*			4–300	4–300	PK18GTA	14R
	150 A	30	QO330MQ150RB *[70]*			4–300	4–300	PK18GTA	14R
	200 A	30	QO330MQ200RB*[70]*			4–300	4–300	PK18GTA	14R
		42	QO342MQ200RB *[70]*					PK23GTA	14R
	225 A	42	QO342MQ225RB *[70]*			4–300	4–300	PK23GTA	14R

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

OBS This product is obsolete.



QO330MQ200



QO312L125G

Table 1.37: 3Ø, Main Circuit Breakers

Amperage	25 k AIR	65 k AIR	100 k AIR *[72]*
Field-installed alternate main circuit breakers for QO 3Ø main circuit breaker load centers rated 70–225 A. Do not exceed the load center main rating.			
70 A	QDL32070	QGL32070	QJL32070
80 A	QDL32080	QGL32080	QJL32080
90 A	QDL32090	QGL32090	QJL32090
100 A	QDL32100	QGL32100	QJL32100
110 A	QDL32110	QGL32110	QJL32110
125 A	QDL32125	QGL32125	QJL32125
150 A	QDL32150	QGL32150	QJL32150
175 A	QDL32175	QGL32175	QJL32175
200 A	QDL32200	QGL32200	QJL32200
225 A	QDL32225	QGL32225	QJL32225

Table 1.38: 3Ø, Main Lugs Kits

Main Lugs Amperage Rating	Cat. No.	Lug Wire Size AWG/kcmil
Field-installed main lugs for convertible 3Ø main circuit breaker load centers		
125 A	QOL3125	6–2/0 Cu/Al
225 A	QOL3225	6–300 Cu/Al

[63] See page 1-34

[64] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.

[65] For Certification to IEC 60439-1 contact the local Square D sales office; otherwise panels are **NOT** CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current Rating when QOXD...branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO...VS branch circuit breakers are used).

[66] PK15GTA.

[67] PK23GTA and LK100AN.

[68] 25 kA short circuit current rating SSCR maximum with Square D Type QDL main circuit breaker, or 22 kA SCCR maximum with back-fed Type QO-VH main circuit breaker, feeding QO 10 k AIR branch circuit breakers.

[69] Includes factory-installed back fed QO3100VH main circuit breaker.

[70] 65 kA Short Circuit Current Rating maximum with field-installed Square D type QGL 65 k AIR minimum main circuit breaker feeding QO and Q1 10 k AIR minimum branch circuit breakers.

[71] Side hinge door device allow 1-1/4 in. on left side for door to open.

[72] When these 3P circuit breakers are used as the main circuit breaker of a 3Ø load center, the maximum AIR rating is 65 kA at 240 Vac and 100 kA at 208 Vac.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026







HOM 1P and 2P



HOM2200BB Branch Circuit Breaker
4 Spaces Required

Homeline Standard Plug-On Circuit Breakers

The Square D Homeline circuit breakers are in a 1 in. wide format for 1-pole circuit breakers. They are designed to plug into Homeline load centers.

Table 1.39: Standard HOM Plug-on Circuit Breakers

Ampere Rating	AIR	1P—120 Vac, 1 Space Required	2P—120/240 Vac Common Trip 2 Spaces Required.
15 A	10 kA	HOM115 *[1][2]*	HOM215 *[2]*
20 A	10 kA	HOM120 *[1][2]*	HOM220 *[2]*
25 A	10 kA	HOM125 *[2]*	HOM225 *[2]*
30 A	10 kA	HOM130 *[2]*	HOM230 *[2]*
35 A	10 kA	—	HOM235 *[2]*
40 A	10 kA	HOM140 *[2]*	HOM240 *[2]*
45 A	10 kA	—	HOM245 *[2]*
50 A	10 kA	HOM150 *[2]*	HOM250 *[2]*
60 A	10 kA	—	HOM260 *[2]*
70 A	10 kA	—	HOM270 *[2]*
80 A	10 kA	—	HOM280 *[2]*
90 A	10 kA	—	HOM290 *[2]*
100 A	10 kA	—	HOM2100 *[2]*
110 A	10 kA	—	HOM2110 *[2]*
125 A	10 kA	—	HOM2125 *[2]*
150 A	10 kA	—	HOM2150BB *[2][3]*
175 A	10 kA	—	HOM2175BB *[2][3]*
200 A	10 kA	—	HOM2200BB *[2][3]*

Homeline High Magnetic Circuit Breakers (HOM-HM)

High magnetic trip circuit breakers are recommended for applications where high initial inrush current may occur.

Table 1.40: HOM-HM Circuit Breakers

Amperes	1P—120/240 Vac	2Ps
20 A	HOM120HM *[2]*	—

Homeline Ground-Fault Circuit Breaker (HOM-GFI)

HOM-GFI circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 milliamperes or more.



HOM 1P GFI
(With Ground Fault Circuit Interrupter)
1 Space Required



HOM 2P GFI
(With Ground Fault Circuit Interrupter)
2 Spaces Required

Table 1.41: HOM-GFI Circuit Breakers

Circuit Breaker Type	Ampere Rating	AIR	1P—120 Vac 1 Space Required	2P—120/240 Vac Common Trip 2 Spaces Required
Ground-Fault Circuit Interrupter(Pigtail Neutral)	15 A	10 kA	HOM115GFI	HOM215GFI
	20 A	10 kA	HOM120GFI	HOM220GFI
	25 A	10 kA	—	HOM225GFI
	30 A	10 kA	—	HOM230GFI
	35 A	10 kA	—	HOM235GFI
	40 A	10 kA	—	HOM240GFI
	45 A	10 kA	—	HOM245GFI
	50 A	10 kA	—	HOM250GFI
Plug-On Neutral Ground-Fault Circuit Interrupter	15 A	10 kA	HOM115PGFI	—
	20 A	10 kA	HOM120PGFI	—

[1] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.
[2] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[3] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



HOM 1P CAFI
Plug-on Neutral



HOM 1P CAFI
Pigtail



HOM 1P DF
Plug-on Neutral



HOM 1P DF
Pigtail

Homeline Combination Arc Fault Circuit Interrupters (HOM-CAFI)

Homeline Combination Arc Fault Circuit Interrupters—Provide overload and short circuit protection, plus arc fault protection in accordance with the NEC and UL1699.

Table 1.42: HOM-CAFI Circuit Breakers

Circuit Breaker Type	Ampere Rating	Poles 120 Vac	Cat. No.
One-Pole			
Combination Arc-Fault Circuit Interrupter with Pigtail Neutral	15 A	1	HOM115CAFI *[4]*
	20 A	1	HOM120CAFI *[4]*
Plug-On Neutral Combination Arc-Fault Interrupter	15 A	1	HOM115PCAFI *[4]*
	20 A	1	HOM120PCAFI *[4]*
Two-Pole			
Combination Arc-Fault Circuit Interrupter with Pigtail Neutral	15 A	2	HOM215CAFI *[4]* *[5]*
	20 A	2	HOM220CAFI *[4]* *[5]*

Homeline Dual Function Circuit Breaker (HOM-DF)

Homeline Combination Arc Fault and Ground Fault Circuit Interrupters (Dual Function)—Provide overload and short circuit protection, plus arc fault and ground fault protection in a single device in accordance with the NEC, UL1699 and UL943.

Table 1.43: HOM-DF Circuit Breakers

Circuit Breaker Type	Ampere Rating	Poles 120 Vac	Cat. No.
Combination Arc-Fault and Ground Fault Circuit Interrupter with Pigtail Neutral	15 A	1	HOM115DF *[4]*
	20 A	1	HOM120DF *[4]*
Plug-On Neutral Combination Arc-Fault and Ground Fault Circuit Interrupter	15 A	1	HOM115PDF *[4]*
	20 A	1	HOM120PDF *[4]*

Homeline Equipment Protection Device (HOM-EPD)

Homeline Equipment Protection Device—Circuit Breakers with 30 mA Equipment Ground Fault Protection (UL Listed).

Table 1.44: HOM-EPD Circuit Breakers

Amperes	1P—120 Vac	2P—120/240 Vac Common Trip
20 A	HOM120EPD	HOM220EPD
30 A	—	HOM230EPD
40 A	—	HOM240EPD
50 A	—	HOM250EPD

[4] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[5] For 120/240 V only, not for 208Y/120 V.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Homeline Tandem and Quad Tandem Circuit Breakers (HOMT)



HOMT Tandem
Circuit Breaker

Table 1.45: HOMT Tandem Circuit Breakers

Ampere Rating *[6]*	AIR	1P Tandem—120/240 Vac (One Space Required)
15 and 15 A	10 kA	HOMT1515 *[7]*
15 and 20 A	10 kA	HOMT1520 *[7]*
20 and 20 A	10 kA	HOMT2020 *[7]*
30 and 15 A	10 kA	HOMT3015 *[7]*
30 and 20 A	10 kA	HOMT3020 *[7]*



HOMT1515215
2 Spaces Required

Table 1.46: HOMT Quad Tandem 1P Circuit Breakers

Ampere Rating *[6]*		AIR	2P Tandem—120/240 Vac (Two Spaces Required)
1P	2P		
(2) 15 A	15 A	10 kA	HOMT1515215
(2) 15 A	20 A	10 kA	HOMT1515220
(2) 15 A	30 A	10 kA	HOMT1515230
(2) 15 A	40 A	10 kA	HOMT1515240
(2) 15 A	50 A	10 kA	HOMT1515250
(2) 20 A	20 A	10 kA	HOMT2020220
(2) 20 A	25 A	10 kA	HOMT2020225
(2) 20 A	30 A	10 kA	HOMT2020230
(2) 20 A	40 A	10 kA	HOMT2020240
(2) 20 A	50 A	10 kA	HOMT2020250

NOTE: Typical catalog no. (e.g. HOMT 1515230) represents two 1P, outer poles (two 15 A 1P CBs) and one 2P inner circuit breaker with common trip (one 30 A 2P CB).



HOMT225225
2 Spaces Required

Table 1.47: HOMT Quad Tandem 2P Circuit Breakers

Ampere Rating *[6]*		AIR	(2) 2P Tandem—120/240 Vac (Two Spaces Required)
2P	2P		
15 A	15 A	10 kA	HOMT215215
15 A	20 A	10 kA	HOMT215220
15 A	25 A	10 kA	HOMT215225
15 A	30 A	10 kA	HOMT215230
15 A	40 A	10 kA	HOMT215240
15 A	50 A	10 kA	HOMT215250
20 A	20 A	10 kA	HOMT220220
20 A	25 A	10 kA	HOMT220225
20 A	30 A	10 kA	HOMT220230
20 A	40 A	10 kA	HOMT220240
20 A	50 A	10 kA	HOMT220250
25 A	25A	10 kA	HOMT225225
25 A	30 A	10 kA	HOMT225230
25 A	40 A	10 kA	HOMT225240
25 A	50 A	10 kA	HOMT225250
30 A	30 A	10 kA	HOMT230230
30 A	40 A	10 kA	HOMT230240
30 A	50 A	10 kA	HOMT230250

NOTE: Typical catalog no. (i.e. HOMT215230) represents two 2P; outer poles (one 15 A 2P with common trip) and inner poles (one 30 A 2P with common trip).

[6] 15–20 A tandem or quad tandem circuit breakers are suitable for use with 60°C or 75°C conductors. 25–50 A tandem or quad tandem circuit breakers are suitable for use with 75°C conductors only.
[7] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Homeline Circuit Breaker Wire Sizes

Table 1.48: Wire Sizes for Homeline Circuit Breakers

Breaker Type	Ampere Rating	Wire Size (AWG/kcmil) *[8]*	
		Aluminum	Copper
HOM 1P	15–30 A	14–8 AWG	14–8 AWG or (2) 14–10 AWG
	40–50 A	8–2 AWG	8–2 AWG
HOM 2P	15–30 A	14–8 AWG	14–8 AWG or (2) 14–10 AWG
	35–70 A	8–2 AWG	8–2 AWG
	80–125 A	4–2/0 AWG	4–2/0 AWG
	150–200 A	4 AWG–300 kcmil	4 AWG–300 kcmil
HOMT and Quad	15–30 A	14–8 AWG	14–8 AWG
Quad Only	40–50 A	6–12 AWG	6–14 AWG
HOM-GFI - 1P	15–20 A	14–10 AWG	14–10 AWG
HOM-GFI - 2P	15–50 A	12–4 AWG	14–6 AWG

Accessories for Homeline Circuit Breakers

Table 1.49: Accessories for Use with Homeline Circuit Breakers

Description		Cat. No.
Handle Attachments		
Handle Tie: Converts any two adjacent 120/240 Vac single HOM circuit breakers to independent trip 2P		HOM1HT
Handle Tie: Converts any two adjacent 120/240 Vac 1P side-by-side HOMT circuit breakers to independent trip 2P		HOMTHT
Handle Clamp: Clamp for holding HOM 1P handle in the ON or OFF position		QO1LO
Handle Blocking Device: Attaches to standard HOM 2P circuit breakers for holding the handle in the OFF position		HOM2HBD
Handle Padlock Attachment: For padlocking 1P Standard HOM breakers in the ON or OFF position		HOM1PA
Handle Padlock Attachment: For padlocking 2P Standard HOM circuit breakers in ON or OFF position	15–70 A	HOM2PALA
	80–125 A	HOM2PAHA
Handle Padlock Attachment: For padlocking 1P CAFI, DF, GFI, and EPD HOM breakers in ON or OFF position		HOMELEC1PA
Handle Padlock Attachment: For padlocking 2P CAFI, GFI, and EPD HOM breakers in ON or OFF position		HOMELEC2PALA
Handle Padlock Attachment: For padlocking center poles of Homeline Quad breakers in the OFF position		HOMQPA
Handle Padlock Attachment: For padlocking main circuit breakers in convertible load center in OFF position	50–125 A	QOM1PA *[9]*
	100–225 A	QOM2PA *[9]*
Sub-Feed Lugs		
125 A 2P plug-on—2 spaces required		HOML2125
225 A 2P plug-on—4 spaces required		HOML2225 *[10]*

OBS This product is obsolete.

[8] 15–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 40–125 A circuit breakers are suitable for use with 75°C conductors.
[9] 50–125 A QOM1 frame size; 100–225 A QOM2 frame size.
[10] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

HOM Standard Load Center Main Lugs, Fixed Mains

1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.50: Fixed Main Lugs Load Centers (Accepts Only HOM Plug-on Circuit Breakers - Not compatible with HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[1]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover *[2]*	Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[3]*
						Al	Cu			
INDOOR	**Main Lugs—10 kA Short Circuit Current Rating** Order HOM Circuit Breakers (See page 1-19) Factory-installed Fixed Main Lugs									
	70 A	2	4	2	HOM24L70F/S*[4] [5]*	12–3	14–4	70	PK3GTA1	2
	100 A	6	12	6	HOM612L100F/S*[4] [6]*	8–1		100	PK7GTA	4
	125 A	4	8	4	HOM48L125GC	12–2/0	14–2/0	125	PK7GTA Included	21

HOM Plug-on Neutral Load Center Main Lugs, Convertible Mains

1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.51: Convertible Main Lugs Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[1]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover *[2]*	Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[3]*
						Al	Cu			
INDOOR	Convertible Mains—Factory-installed Main Lugs QOM1 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27)									
	125 A	8	16	8	HOM816L125PC	6–2/0	6–1	125	PK9GTA	6
		12	24	12	HOM1224L125PC		6–1	125	PK15GTA	6
		16	32	16	HOM1632L125PC[OBS]		6–1/0	125	PK15GTA	8
		20	40	20	HOM2040L125PC		6–1/0	125	PK18GTA	8
		30	60	30	HOM3060L125PC		6–2/0	125	PK23GTA	10
	Convertible Mains—Factory-installed Main Lugs QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27)									
	225 A	30	60	30	HOM3060L225PC	4–300	4–250	225	PK23GTA	10
		40	80	40	HOM4080L225PC			225	PK27GTA	12
		42	84	42	HOM4284L225PC			225	PK27GTA	12
		60	120	60	HOM60120L225PC			225	PK27GTA	25
	Convertible Mains—Factory-installed Main Lugs—Ground Bar Included QOM1 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27)									
	125 A	8	16	8	HOM816L125PGC	6–2/0	6–1	125	PKGTALP1 Included	6
		12	24	12	HOM1224L125PGC		6–1	125	PKGTALP1 Included	6
		20	40	20	HOM2040L125PGC		6–1/0	125	PKGTALP1 Included	8
		24	48	24	HOM2448L125PGC		6–1/0	125	PKGTALP2 Included	8
	Convertible Mains—Factory-installed Main Lugs—Ground Bar Included QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27)									
	225 A	30	60	30	HOM3060L225PGC	4–300	4–250	225	PKGTALP2 Included	10
		16	32	16	HOM1632L225PGC[OBS]			225	PKGTALP1 Included	9
		20	40	20	HOM2040L225PGC			225	PKGTALP1 Included	9
		40	80	40	HOM4080L225PGC			225	PKGTALP3 Included	12
		42	84	42	HOM4284L225PGC			225	PKGTALP3 Included	12

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.
[OBS] This product is obsolete.

[1] Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.
[2] C at end of catalog number indicates combination flush/surface cover included with device.
[3] See page 1-34
[4] F/S at end of catalog number indicates to order F for flush device or S for surface device. The cover does not have a door.
[5] HOM-GFI and HOM-AFI branch circuit breakers are limited to number 10 maximum wire.
[6] 70 A maximum branch circuit breaker, 100 A maximum back feed main circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Field-Installed Main Circuit Breaker Kits, 1Ø



QOM1 Frame Size
50–125 Amperes



QOM2 Frame Size
100–225 Amperes

Table 1.52: QOM1 Frame Size—Use with Convertible Main Load Centers Only

Main Circuit Breaker Rating *[7]*	Convertible Load Center Mains Rating	22 k AIR *[8]* Main Circuit Breaker	Lug Wire Size *[9]* AWG/ kcmil
50 A	100–125	QOM50VH	12–2/0 Al or Cu
60 A	100–125	QOM60VH	
70 A	100–125	QOM70VH	
80 A	100–125	QOM80VH	
90 A	100–125	QOM90VH	
100 A	100–125	QOM100VH	
110 A	125	QOM110VH	
125 A	125	QOM125VH	

Table 1.53: QOM2 Frame Size—Use with Convertible Main Load Centers Only

Main Circuit Breaker Rating *[7]*	Convertible Load Center Mains Rating	22 k AIR *[8]* Main Circuit Breaker *[10]*	Lug Wire Size *[9]* AWG/kcmil
100 A	150–225	QOM2100VH	4–300 Al or Cu
125 A	150–225	QOM2125VH	
150 A	150–225	QOM2150VH	
175 A	200–225	QOM2175VH	
200 A	200–225	QOM2200VH	
225 A	225	QOM2225VH	

[7] Do not exceed the load center mains rating.
[8] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
[9] Wire range listed for QOM circuit breaker kits is the wire range of that circuit breaker. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.
[10] Add suffix 1021 for 120, 208 or 240 Vac shunt trip.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

HOM Plug-on Neutral Load Center Main Breaker, Convertible Mains

1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.54: Convertible Main Breaker Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[11]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover *[12]*	Main Wire Size AWG/kcmil Al	Main Wire Size AWG/kcmil Cu	Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[13]*
INDOOR	**Main Circuit Breaker—**22 kA Short Circuit Current Rating Convertible Mains—Factory-installed Main Circuit Breaker QOM1 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See page 1-27)									
	100 A	8	16	8	HOM816M100PC	6–1		125	PK9GTA	5
		12	24	12	HOM1224M100PC	6–2/0		125	PK15GTA	6
		20	40	20	HOM2040M100PC	6–1		125	PK18GTA	7
		24	48	24	HOM2448M100PC	6–2/0		125	PK23GTA	8
		30	60	30	HOM3060M100PC	6–2/0		125	PK23GTA	10
	125 A	24	48	24	HOM2448M125PC	6–2/0	6–1/0	125	PK23GTA	8
		30	60	30	HOM3060M125PC		6–2/0	125	PK23GTA	10
	Convertible Mains—Factory-installed Main Circuit Breaker QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See page 1-27)									
	150 A	30	60	30	HOM3060M150PC	4–250		225	PK23GTA	10
	200 A	20	40	20	HOM2040M200PC	4–250		225	PK18GTA	9
		30	60	30	HOM3060M200PC			225	PK23GTA	10
		40	80	40	HOM4080M200PC			225	PK27GTA	12
		42	84	42	HOM4284M200PC			225	PK27GTA	12
		60	120	60	HOM60120M200PC			225	PK27GTA	25
	225 A	42	84	42	HOM4284M225PC	4–300	4–250	225	PK27GTA	12
	Split Bus Plug-on Neutral Load Center—Manual Transfer for use with Temporary Backup Power Source Applications NEMA 1 (indoor)									
	200 A	36	72	36	HOM1428X2244M200PC	4–250		—	PK27GTA	12

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

1Ø, Field-Installed Mains Kits

Table 1.55: 1Ø Field Installed Main Lug Kits – Use with Convertible Main Load Centers Only

Field-Installed Main Type	Frame Size	Main *[14]* Ampere Rating	Use on Convertible Load Center with Mains Rating	Cat. No.	Lug Wire Size *[15]* AWG/kcmil
Main Lugs *[16]*	—	125 A	100–125 A	QOL125	6–2/0 Al or Cu
		125 A	100–125 A	QOL125VD	6–4/0 Al or Cu
		225 A	150–225 A	QOL225	6–300 Al or Cu
Main Circuit Breaker *[17]*	QOM1	50 A	100–125 A	QOM50VH	12–2/0 Al or Cu
		60 A	100–125 A	QOM60VH	
		70 A	100–125 A	QOM70VH	
		80 A	100–125 A	QOM80VH	
		90 A	100–125 A	QOM90VH	
		100 A	100–125 A	QOM100VH	
		110 A	125 A	QOM110VH	
		125 A	125 A	QOM125VH	
	QOM2 *[18]*	100 A	150–225 A	QOM2100VH	4–300 Al or Cu
		125 A	150–225 A	QOM2125VH	
		150 A	150–225 A	QOM2150VH	
		175 A	200–225 A	QOM2175VH	
		200 A	200–225 A	QOM2200VH	
		225 A	225 A	QOM2225VH	



QOL125



QOL225

[11] Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.
[12] C at end of catalog number indicates combination flush/surface cover included with device.
[13] See page 1-34
[14] Do not exceed the load center mains rating.
[15] Wire range listed for main device kits is the wire range of that device. To find out maximum wire size permitted in a particular load center per UL, see tables in page 1-8 and page 1-28 under Main Wire Size.
[16] If main circuit breaker knockout has been removed from the load center's trim, order appropriate filler plate from page 1-29.
[17] 22 k AIR main circuit breaker UL Listed for use ahead of HOM and HOMT 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
[18] Add suffix 1021 for 120, 208, 240 Vac shunt trip.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

HOM Plug-on Neutral Load Centers with Qwik-Grip

1Ø3W—120/240 Vac Indoor—UL Listed



HOM Plug-on Neutral
Load Center with Qwik-Grip

The Square D Homeline plug-on neutral load centers with Qwik-Grip simplify rough-in by eliminating the need to remove knockouts, install wire connectors, and blindly pull wire into the load center. A quick bend of the wire using the wire bend guide on the Qwik-Grip insert and the wire slides into the slot. Once inserted, the Qwik-Grip shield snaps on to keep the wire behind the router for a secure, code-compliant installation.

Table 1.56: Plug-on Neutral Load Centers with Qwik-Grip (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

	Main Ratings	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit	Box No.
						Al	Cu			
INDOOR	125 A	24	48	24	HOM2448L125PQGC	6–2/0	6–1/0	125	PKGTALP2 Included	8Q
		30	60	30	HOM3060L125PQGC	6–2/0	6–2/0	125	PKGTALP2 Included	10Q
	Convertible Mains—Factory-Installed Main Lugs, 10 kA Short Circuit Current Rating— QOM2 Main Frame Size, Convertible to Main Circuit Breaker									
	225 A	30	60	30	HOM3060L225PQGC	4–250		225	PKGTALP2 Included	10Q
		40	80	40	HOM4080L225PQGC	4–250		225	PKGTALP3 Included	12Q
		42	84	42	HOM4284L225PQGC	4–250		225	PKGTALP3 Included	12Q
	Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating— QOM2 Main Circuit Breaker Frame Size, Convertible to Main Lugs or Main Circuit Breaker									
	200 A	30	60	30	HOM3060M200PQC	4–250		225	PK23GTA (Order separately)	10Q
		40	80	40	HOM4080M200PQC	4–250		225	PK27GTA (Order separately)	12Q
		42	84	42	HOM4284M200PQC OBS	4–250		225	PK27GTA (Order separately)	12Q

OBS This product is obsolete.

Homeline Service Upgrade Load Centers

1Ø3W—120/240 Vac Special Applications—UL Listed

Table 1.57: Service Upgrade Load Centers with Removable End Walls (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. 1P Circuits *[19]*	Max. Tandem Circuit Breakers	Load Center Box and Interior	Extra Long Cover with Door (Order Separately)		Main Wire Size AWG / Kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[20]*
						Flush	Surface	Al	Cu			
Convertible Mains—Factory-Installed Main Circuit Breaker—22KA QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See page 1-19)—Copper Bus *[21]*												
INDOOR	200 A	30	60	30	HOM3060M200PCEP OBS *[22]*	HOMC30UFL	—	4-250		225	PK23GTA	10

OBS This product is obsolete.

[19] Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.
[20] See page 1-34
[21] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
[22] Ships with standard length cover.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

HOM Standard Load Center Main Lugs, Fixed Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.58: Fixed Main Lugs Load Centers (Accepts Only HOM Plug-on Circuit Breakers - Not compatible with HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[23]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[24]*
					Cat. No. (DE3C)	Al	Cu		Cat. No. (DE3A)	
RAINPROOF	**Main Lugs**—10 kA Short Circuit Current Rating Factory-installed Fixed Main Lugs, 10 kA Short Circuit Current Rating									
	70 A	2	4	2	HOM24L70RB *[25]*	12–3	14–4	70	PK4GTA	1R
	100 A	6	12	6	HOM612L100RB *[26]*	8–1		100	PK7GTA	2R
	125 A	4	8	4	HOM48L125GRB	12–2/0	14–2/0	125	PK7GTA Included	15R

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

HOM Plug-on Neutral Load Center Main Lugs, Convertible Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.59: Convertible Main Lugs Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Bus Rating	Spaces	Max. Single Pole Circuits *[23]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[24]*
						Cat. No. (DE3C)	Al	Cu		Cat. No. (DE3A)	
RAINPROOF	Convertible Mains with Factory-installed Main Lugs *[27]*, QOM1 Main Frame Size—Convertible to Main Circuit Breaker (See Below)										
	125 A	125	8	16	8	HOM816L125PRB	6–2/0	6–1	125	PK9GTA	3R
		125	12	24	12	HOM1224L125PRB			125	PK15GTA	3R
		125	20	40	20	HOM2040L125PRB			125	PK18GTA	4R
		125	24	48	24	HOM2448L125PRB			125	PK23GTA	6R
	Convertible Mains with Factory-installed Main Lugs *[27]*, QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See Below)										
	225 A	225	12	12	0	HOM12L225PRB	4–300	4–250	225	PK9GTA	5R
		225	16	32	16	HOM1632L225PRB OBS			225	PK15GTA	6R
		225	20	40	20	HOM2040L225PRB			225	PK18GTA	6R
		225	30	60	30	HOM3060L225PRB			225	PK23GTA	7R
		225	40	80	40	HOM4080L225PRB			225	PK27GTA	14R
		225	42	84	42	HOM4284L225PRB			225	PK27GTA	14R

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.
OBS This product is obsolete.

HOM Plug-on Neutral Load Center Main Breaker, Convertible Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.60: Convertible Main Breaker Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. Single Pole Circuits *[23]*	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/kcmil		Bus Rating	Equipment Ground Bar Kit (Order Separately)	Box No. *[24]*
					Cat. No. (DE3C)	Al	Cu		Cat. No. (DE3A)	
	Main Circuit Breaker—22 kA Short Circuit Current Rating Convertible Mains with Factory-Installed Main Circuit Breaker, QOM1 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See Below) *[28]*									
RAINPROOF	100 A	8	16	8	HOM816M100PRB	6–2/0	6–1	125	PK9GTA	3R
		12	24	12	HOM1224M100PRB			125	PK15GTA	3R
		20	40	20	HOM2040M100PRB			125	PK18GTA	4R
	125 A	8	16	8	HOM816M125PRB OBS	6–2/0	6–1	125	PK9GTA	3R
		24	48	24	HOM2448M125PRB			125	PK23GTA	6R
	Convertible Mains with Factory-installed Main Circuit Breaker , QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See Below)									
	150 A	30	60	30	HOM3060M150PRB	4–250		225	PK23GTA	7R
	200 A	12	12	0	HOM12M200PRB	4–250		225	PK9GTA	5R
		20	40	20	HOM2040M200PRB			225	PK18GTA	6R
		30	60	30	HOM3060M200PRB			225	PK23GTA	7R
		40	80	40	HOM4080M200PRB			225	PK27GTA	14R
	Convertible Mains with Factory-installed Main Circuit Breaker with Feed-thru Lugs, QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See Below) *[27]*									
	150 A	8	16	8	HOM816M150PFTRB	4–250		150	PK15GTA	6R
	200 A	8	16	8	HOM816M200PFTRB	4–250		225	PK15GTA	6R

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.
OBS This product is obsolete.

[23] Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.
[24] See page 1-36
[25] HOM-GFI and HOM-AFI branch circuit breakers are limited to number 10 maximum wire.
[26] 70 A maximum branch circuit breaker, 100 A maximum back feed main circuit breaker.
[27] Side hinge door device allow 1-1/4 in. on left side for door to open.
[28] 22 k AIR main circuit breaker UL Listed for use ahead of HOM and HOMT 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Plug-on Neutral Indoor Load Center Value Packs

Table 1.61: Plug-on Neutral Indoor Load Center Value Packs (Compatible with Plug-on and Plug-on Neutral Circuit Breakers)

	Mains Rating	Spaces	Max. 1P Circuits [1]	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size| AWG/kcmil| Al/Cu		Bus Rating	Box No. [2]
					Cat. No.	Included Load Center/Circuit Breakers	Cat. No.				
INDOOR	QO (Accepts Only QO Plug-On Circuit Breakers) QO—Copper Bus; Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs (See page 1-10) or QOM Main Circuit Breaker (See page 1-24)										
	125 A	24	34	10	QO124L125PGCVP	(1) QO124L125PGC, (3) QO120, (2) QO230	PK15GTA Included	6–2/0		125	7
	225 A	42	52	10	QO142L225PGCVP OBS	(1) QO142L225PGC, (3) QO120, (2) QO230	PK23GTA Included	4–300		—	11
	Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs or Main Circuit Breaker (See page 1-27)										
	100 A	24	34	10	QO124M100PCVP	(1) QO124M100PC, (3) QO120, (2) QO230	PK15GTA	6–2/0		125	7
		32	38	6	QO132M100PCVP	(1) QO132M100PC, (3) QO120, (2) QO230	PK18GTA	6–2/0		125	8
	200 A	42	52	10	QO142M200PCVP	(1) QO142M200PC, (3) QO120, (2) QO230	PK23GTA	4–300		225	11
		42	52	10	QO142M200PCAFVP OBS	(1) QO142M200PC, (3) QO120, (2) QO230, (3) QO115PCAFI	PK23GTA			—	11
	Homeline (Accepts Only HOM Plug-On Circuit Breakers); Convertible Mains—Factory-Installed Main Lugs, 10 kA Short Circuit Current Rating Convertible to appropriate QOM 22 kA Short Circuit Current Rating Main Circuit Breaker (See page 1-27)										
	125 A	12	24	12	HOM1224L125PGCVP	(1) HOM1224L125PGC, (2) HOM120	PKGTALP1 Included	6–2/0	6–1	125	6
	225 A	30	60	30	HOM3060L225PGCVP	(1) HOM3060L225PGC, (3) HOM120, (2) HOM230	PKGTALP2 Included	4–300	4–250	225	10
	Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs or Main Circuit Breaker (See page 1-27)										
	100 A	20	40	20	HOM2040M100PCVP	(1) HOM2040M100PC, (2) HOM120, (1) HOM230	PK18GTA	6–1	6–3	125	7
		20	40	20	HOM2040M100PC1AVP	(1) HOM2040M100PC, (2) HOM120, (1) HOM230, (1) HOM115PCAFI	PK18GTA	6–1	6–3	125	7
		24	48	24	HOM2448M100PCVP	(1) HOM2448M100PC, (3) HOM120, (2) HOM230	PK23GTA	6–2/0	6–1/0	125	8
	150 A	30	30	30	HOM3060M150PCVP	(1) HOM3060M150PC, (3) HOM120, (2) HOM230	PK23GTA	4–250		225	10
	200 A	20	40	20	HOM2040M200PCVP	(1) HOM2040M200PC, (3) HOM120, (2) HOM230	PK18GTA	4–250		225	9
		30	60	30	HOM3060M200PCVP	(1) HOM3060M200PC, (3) HOM120, (2) HOM230	PK23GTA			225	10
		30	60	30	HOM3060M200PC1AVP	(1) HOM3060M200PC, (3) HOM120, (2) HOM230, (1) HOM115PCAFI	PK23GTA			225	10
		30	60	30	HOM3060M200PCAFVP OBS	(1) HOM3060M200PC, (3) HOM120, (2) HOM230, (3) HOM115PCAFI	PK23GTA			225	10
		40	80	40	HOM4080M200PCVP	(1) HOM4080M200PC, (3) HOM120, (2) HOM230	PK27GTA			225	12
		40	80	40	HOM4080M200PC1AVP	(1) HOM4080M200PC, (3) HOM120, (2) HOM230, (1) HOM115PCAFI	PK27GTA			225	12
		40	80	40	HOM4080M200PCAFVP	(1) HOM4080M200PC, (3) HOM120, (2) HOM230, (3) HOM115PCAFI	PK27GTA			225	12

OBS This product is obsolete.

Table 1.62: Plug-on Neutral with Qwik-Grip Indoor Load Center Value Packs (Compatible with Plug-on and Plug-on Neutral Breakers)

	Main Ratings	Spaces	Max. 1P Circuits	Max. Tandem| Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size| AWG/ kcmil| Al/Cu		Bus Rating	Box No. [3]
					Cat. No.	Included Load Center/Circuit Breakers	Cat. No.				
INDOOR	QO Convertible Mains—Factory-Installed Main Lugs, up to 65 kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Circuit Breaker										
	125 A	24	34	10	QO124L125PQGCVP OBS	(1) QO124L125PQGC, (3) QO120, (2) QO230 and (1) PKQGA Qwik-Grip assembly kit	PK15GTAL Included	6–2/0		—	7Q
	QO Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating—Copper Bus, QOM2 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker										
	200 A	42	52	10	QO142M200PQCVP	(1) QO142M200PQC, (3) QO120, (2) QO230 and (1) PKQGA Qwik-Grip assembly kit	PK23GTA (Order separately)	4–250		225	11Q
	Homeline Convertible Mains—Factory-Installed Main Circuit Breaker, 22kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker										
	100 A	20	40	20	HOM2040M100PQCVP	(1) HOM2040M100PQC, (2) HOM120, (1) HOM230 and (1) PKQGA Qwik-Grip assembly kit	PK18GTA (Order separately)	6–2/ 0	6–1	125	7Q
	200 A	30	60	30	HOM3060M200PQCVP	(1) HOM3060M200PQC, (3) HOM120, (2) HOM230 and (1) PKQGA Qwik-Grip assembly kit	PK23GTA (Order separately)	4–250		225	10Q
		40	80	40	HOM4080M200PQCVP	(1) HOM4080M200PQC, (2) HOM120, (1) HOM230 and (1) PKQGA Qwik-Grip assembly kit	PK27GTA (Order separately)	4–250		225	12Q

OBS This product is obsolete.

Table 1.63: Plug-on Neutral Rainproof Load Center Value Packs (Compatible with Plug-on and Plug-on Neutral Circuit Breakers)

	Main Ratings	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil Al/Cu		Bus Rating	Box No. [3]
					Cat. No.	Included Load Center/Circuit Breakers	Cat. No.				
RAINPROOF	Homeline (Accepts Only HOM Plug-On Circuit Breakers) Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible to Main Lugs or Lower Amperage QOM2 Main Circuit Breaker (See page 1-27)										
	125 A	12	24	12	HOM1224M125PRBVP	(1) HOM1224M125PRB, (3) HOM120, (2) HOM230	PK23GTA	6–2/0	6–1	125	3R
	200 A	30	60	30	HOM3060M200PRBVP	(1) HOM3060M200PRB, (3) HOM120, (2) HOM230	PK23GTA	4–250		225	7R

[1] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
[2] See page 1-34 or page 1-36
[3] See page 1-34

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

QO Load Center Accessories

Table 1.64: QO Load Center Accessories

	Description		Cat. No.	Schedule
Circuit Identification Stickers	Circuit identification stickers for use on cover directory labels to identify branch circuits		PSDS	DE5
Cover Sealing Strap	Provides means of sealing trim mounting screws on QO load center covers		QO1SE	DE3A
Door Lock Kits	Use with QO612L100DF/S, QO612L100DFCU/SCU, QO612L100DTF/S, QO816L100DF/S, QO816L100DFCU/SCU, QO816L100DTF/S, QO48M30DSGP, or QO48M60DSGP		PK8FL *[4]*	DE3A
	Use with convertible mains, 1Ø and 3Ø 100–225 A, and fixed mains, 3Ø 125–225 A indoor load centers		PK6FL	DE3A
	Use with 300 and 400 ampere indoor load centers		PK4FL	PE1A
Filler Plates	Fills opening in covers if twistout is removed in error		QOFP	DE3A
	Fills main circuit breaker opening in convertible load center covers 100–125 A		QOM1FP	DE3A
	Fills main circuit breaker opening in convertible load center covers 150–225 A		QOM2FP	DE3A
	Fills main circuit breaker opening in 3Ø load center covers (S01 and S02 Series)		KFP OBS	DE3A
	Fills main circuit breaker opening in “Q” style 3Ø load center covers (S03 Series)		Q2FP	DE3A
Ground Bar Kits	Ground Bar Assembly—3 connectors		PK3GTA1	DE3A
	Ground Bar Assembly—4 connectors		PK4GTA	DE3A
	Ground Bar Assembly—7 connectors		PK7GTA	DE3A
	Ground Bar Assembly—12 connectors		PK12GTA	DE3A
	Ground Bar Assembly—15 connectors		PK15GTA	DE3A
	Ground Bar Assembly—18 connectors		PK18GTA	DE3A
	Ground Bar Assembly—23 connectors		PK23GTA	DE3A
	Ground Bar Assembly—27 connectors		PK27GTA	DE3A
	Ground Bar Assembly—21 connectors. Use in high amperage load centers.		PK15GTA6	DE3A
	Standard PK15GTA with a 1–4/0 Al/Cu Lug		PK15GTAL	DE3A
	Standard PK18GTA with a 1–4/0 Al/Cu Lug		PK18GTAL	DE3A
	Standard PK23GTA with a 1–4/0 Al/Cu Lug		PK23GTAL	DE3A
	Ground Bar Pack— PK9GTA, PK9GTA, & LK100AN		PKGTALP1	DE3A
	Ground Bar Pack— PK9GTA, PK18GTA, & LK100AN		PKGTALP2	DE3A
	Ground Bar Pack—PK15GTA, PK18GTA, & LK100AN		PKGTALP3	DE3A
	Insulator Kit for PK7GTA through PK27GTA		PKGTAB	DE3A
Handle Padlock Attachments	For padlocking main circuit breakers in convertible load centers OFF	50A–125A	QOM1PA	DE2E
	For padlocking main circuit breakers in convertible load centers OFF	100A–225A	QOM2PA	DE2E
Neutral Bonding Screw	For use on all Homeline and QO 125A convertible main load centers		4028344850K	DE5
	For use on QO 150A–225A convertible main load centers		4028345850K	DE5
Neutral / Ground Lugs	Field-installed for 12– 2 Al or 14–4 Cu AWG wire		LK70AN	DE3A
	Field-installed for 6–2/0 Al/Cu AWG wire		LK100AN	DE3A
	Field-installed for 14–2/0 Al/Cu AWG wire		LK125AN	DE3A
	Field-installed for 2–3/0 Al/Cu AWG wire		LK150AN	DE3A
	Field-installed for 4 AWG to 300 kcmil Al/Cu wire. Use in Series S, 150-225A QO load center or S03 and below, 150-225A HOM load center		LK225AN	DE3A
Replacement Cover Directory Label	1 through 42 numbered universal replacement directory label for load center covers		LSDL	DE5
Retaining Kit for Breakers Used as Back-fed Mains	Secures circuit breaker to interior when used as a back-fed main. For QO612L100F/S, RB, QO612L100DF/S, QO816L100F/S, RB, QO816L100DF/S and QO148L125GF/S, GRB load centers		PK2MB	DE3A
	Secures 3P circuit breaker without accessories to left side of interior when used as a back-fed main. For 3Ø load centers		PK3MB	DE3A
	Secures circuit breaker to interior when used as a back-fed main for 2P QO 150–200 A circuit breakers		PK5RK OBS	DE3A
	Secures ONE circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02		PK4MB2LA	DE3A
	Secures ONE circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02		PK4MB2HA	DE3A
Service Entrance Barriers	QO / Homeline 1Ø 100–125 A QOM1 convertible main load centers		PKSB1LA	DE3A
	QO / Homeline 1Ø 150–225 A QOM2 convertible main load centers		PKSB1HA	DE3A
	QO 3Ø convertible main load centers		PKSB3	DE3A
	QO 1Ø back-fed main breaker applications		PKSB1QOBF	DE3A
	QO 3Ø back-fed main breaker applications		PKSB3BF	DE3A
	QO2 enclosed circuit breaker devices		PKSB1QO2	DE3A
QO Load Center Manual Power Transfer Accessories				
Generator Circuit Breaker Interlock Kit	For use on “G” and “S” Series NEMA 1 and “G”, “S1” and “S2” Series NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.		QOCRBGK1C	DE3A
	For use on “G” and “S” Series NEMA 1 and “G” and “S1” Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.		QOCGK2C	DE3A
	For use on “S2” Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.		QORBGK2C	DE3A
Manual Transfer Equipment Kit	For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be “ON” at a time.		QO2DTI	DE2E
	QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2P or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers.		QO2DTIM	DE2E
	Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02.		PK4DTIM4LA	DE3A
	Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02.		PK4DTIM4HA	DE3A
	Secures two 2P circuit breakers to left side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02.		PK4DTIM4LAL	DE3A

OBS This product is obsolete.

[4] QO403L60NF/S does not have provisions for a field-installed lock.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.65: QO Load Center Accessories



PKGTAB



PK3MB



QOFP



PK6FL and PK8FL



PK4FL



4028345850K

Table 1.66: QO Load Center Covers

Mains Rating	Spaces	QO Standard Covers			QO Mono-Flat Covers	
		Flush	Surface	Flush		
		Gray Covers		White Covers	Gray Covers	White Covers
QO 1 Phase Load Center Covers — Convertible Mains						
100 A	12	QOC12UF	QOC12US	—	—	—
	16	QOC20U100F	QOC20U100S	—	—	—
	20	QOC20U100F	QOC20U100S	—	—	—
	24	QOC24UF	QOC24US	QOC24UFW	—	—
	32	QOC32UF	—	QOC32UFW	—	—
125 A	12	QOC16UF	QOC16US	QOC16UFW	—	—
	16	QOC24UF	QOC24US	QOC24UFW	—	—
	20	QOC20U100F	QOC20U100S	—	—	—
	24	QOC24UF	QOC24US	QOC24UFW	—	—
	30	QOC30U125C	—	—	—	—
	32	QOC32UF	—	QOC32UFW	—	—
150 A	20	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	24	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	30	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	32	QOC40UF	QOC40US	QOC40UFW	—	—
200 A	12	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	20	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	24	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	30	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	40	QOC40UF	QOC40US	QOC40UFW		
	42	QOC42UF	QOC42US	QOC42UFW	QOCMF42UC	QOCMF42UCW
	54	QOC54UF	—	QOC54UFW	QOCMF54UC	QOCMF54UCW
	60	—	—	—	QOCMF60UC	QOCMF60UCW
225 A	40	QOC42UF	QOC42US	QOC42UFW	QOCMF42UC	QOCMF42UCW
	42	QOC42UF	QOC42US	QOC42UFW	QOCMF42UC	QOCMF42UCW
	54	QOC54UF	—	QOC54UFW	QOCMF54UC	QOCMF54UCW
QO Rise Panel (Wide Gutter) Covers						
125 A	12	QOC20UFWG	—	QOC20UFWGW	NQC20FWG*[5]*	NQC20FWGW
	20	QOC20UFWG	—	QOC20UFWGW	NQC20FWG	NQC20FWGW
200 A	24	QOC30UFWG	—	QOC30UFWGW	NQC30FWG OBS	NQC30FWGW
	30	QOC30UFWG	—	QOC30UFWGW	NQC30FWG	NQC30FWGW
QO 3–Phase Load Center Covers — Fixed Mains						
125 A	12	QOC16UF	QOC16US	QOC16UFW	—	—
	20	QOC24UF	QOC24US	QOC24UFW	—	—
	24	QOC24UF	QOC24US	QOC24UFW	—	—
200 A	18	QOC30UF	QOC30US	QOC30UFW	—	—
	30	QOC30UF	QOC30US	QOC30UFW	—	—
225 A	42	QOC42UF	QOC42US	QOC42UFW	—	—
QO 3–Phase Load Center Covers — Convertible Mains						
100 A	27	QOC30UF	QOC30US	QOC30UFW	—	—
125 A	30	QOC342MQF	QOC342MQS	—	—	—
150 A	30	QOC342MQF	QOC342MQS	—	—	—
	42	QOC342MQF	QOC342MQS	—	—	—
200 A	30	QOC342MQF	QOC342MQS	—	—	—
	42	QOC342MQF	QOC342MQS	—	—	—
225 A	42	QOC342MQF	QOC342MQS	—	—	—

OBS This product is obsolete.

[5] End of service December, 2024.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.67: QO Load Center Covers

QOCMF42UCW


QOC40UFW



QOC20UFWG

Homeline Load Center Accessories

Table 1.68: Homeline Load Center Accessories

Description			Cat. No.	Schedule
Circuit Identification Stickers	Circuit identification stickers for use on cover directory labels to identify branch circuits		PSDS	DE5
Door Lock Kit	Use with convertible indoor load center covers (Series S-1)		PK6FL	DE3A
Filler Plates	Fills opening in covers if twistout is removed in error		HOMFP	DE3C
	Fills main circuit breaker opening in convertible load centers	100–125 A	QOM1FP	DE3A
		150–225 A	QOM2FP	DE3A
Generator Circuit Breaker Interlock Kit	For use on “S” Series NEMA 1 and NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a Homeline 2P (15–125 A) branch circuit breaker		HOMCRBGK1C	DE3D
	For use on “S” Series NEMA 1 and “S1” Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a Homeline 2P (15–125 A) branch circuit breaker		HOMCGK2C	DE3D
	For use on “S2” and “S3” Series NEMA 3R QOM2 load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a Homeline 2P (15–125 A) branch circuit breaker		HOMRBGK2C	DE3D
Ground Bar Kits	Ground Bar Assembly - 3 connectors		PK3GTA1	DE3A
	Ground Bar Assembly - 4 connectors		PK4GTA1	DE3A
	Ground Bar Assembly - 7 connectors		PK7GTA1	DE3A
	Ground Bar Assembly - 9 connectors		PK9GTA1 OBS	DE3A
	Ground Bar Assembly - 15 connectors		PK15GTA1	DE3A
	Ground Bar Assembly - 19 connectors		PK18GTA1	DE3A
	Ground Bar Assembly - 23 connectors		PK23GTA1	DE3A
	Ground Bar Assembly - 27 connectors		PK27GTA1	DE3A
	Standard PK15GTA with a 1–4/0 Al/Cu Lug		PK15GTA	DE3A
	Standard PK18GTA with a 1–4/0 Al/Cu Lug		PK18GTAL	DE3A
	Ground Bar Pack - PK9GTA, PK9GTA & Lug		PKGTALP1	DE3A
	Ground Bar Pack - PK9GTA, PK18GTA & Lug		PKGTALP2	DE3A
	Ground Bar Pack - PK15GTA, PK18GTA & Lug		PKGTALP3	DE3A
	Insulator Kit for PK7GTA through PK27GTA		PKGTAB	DE3A
Handle Padlock Attachment	For padlocking main circuit breakers in convertible load center, “OFF”	50–125 A	QOM1PA	DE2E
		100–225 A	QOM2PA	DE2E
Neutral Bonding Screw	For use on all Homeline and QO 125A convertible main load centers		4028344850K	DE5
	For use on QO 150A-225A convertible main load centers		4028345850K	DE5
Neutral / Ground Lugs	Field-installed for 14–2 AWG Al or 14–4 AWG Cu wire		LK70AN	DE3B
	Field-installed for 6–2/0 AWG Al/Cu wire		LK100AN	DE3B
	Field-installed for 14–2/0 AWG Al/Cu wire		LK125AN	DE3B
	Field-installed for 4 AWG to 300 kcmil Al/Cu wire. Use in Series S, 150-225A QO load center or S03 and below, 150-225A HOM load center		LK225AN	DE3A
	Field-installed for 4 AWG–300 kcmil Al/Cu wire. Use in Series S04, 150–225 A HOM load center		LK225ANHOM OBS	DE3A
Replacement Cover Directory Label	1 through 42 numbered universal replacement directory label for load center covers		LSDL	DE5
Retaining Kit for Breakers Used as Back-fed Mains	Secures circuit breaker to interior when used as a back-fed main. For HOM612L100F/S, RB and HOM48L125GC, GRB load centers		HOM1RK	DE3C
	Secures ONE circuit breaker right side of interior when used as a back-fed main For 100–125 A convertible main load centers, Series S01 and S02		HOM4RK2LA	DE3C
	Secures ONE circuit breaker right side of interior when used as a back-fed main For 150–225 A convertible main load centers, Series S01 and S02		HOM4RK2HA OBS	DE3C
	Secures circuit breaker to interior when used as a back-fed main For 2P 150–200 A circuit breakers		HOM5RK	DE3C
Service Entrance Barriers	QO / Homeline 1Ø 100–125 A QOM1 convertible main load centers		PKSB1LA	DE3A
	QO / Homeline 1Ø 150–225 A QOM2 convertible main load centers		PKSB1HA	DE3A
	Homeline back-fed main breaker applications		PKSB1HOMBF	DE3A
	HOM24L fixed main load centers		PKSB1FM	DE3A

OBS This product is obsolete.


HOMCMF60UC


HOMC12UCW

Table 1.69: Homeline Load Center Replacement Covers

Mains Rating	Spacers	Homeline Standard Covers Combination Gray	Homeline Standard Covers Combination White	Homeline Mono Flat Covers Gray
100 A	8	HOMC8UC OBS	—	—
	12	HOMC12UC OBS	HOMC12UCW OBS	—
	24	HOMC24UC	HOMC24UCW	—
125 A	8	HOMC12UC	HOMC12UCW	—
	16	HOMC24UC	HOMC24UCW	—
	20	HOMC24UC	HOMC24UCW	—
	24	HOMC24UC	HOMC24UCW	—
150 A	16	HOMC20UC	HOMC20UCW	—
	20	HOMC20UC	HOMC20UCW	—
	30	HOMC30UC	HOMC30UCW	—
200 A	12	HOMC20UC	HOMC20UCW	—
	16	HOMC20UC	HOMC20UCW	—
	20	HOMC20UC	HOMC20UCW	—

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.69 Homeline Load Center Replacement Covers (cont'd.)

Mains Rating	Spacers	Homeline Standard Covers		Homeline Mono Flat Covers
		Combination	Combination	
		Gray	White	Gray
	30	HOMC30UC *[6]*	HOMC30UCW	—
	40	HOMC42UC	—	—
	42	HOMC42UC	—	—
	60	HOMC60UC	—	HOMCMF60UC
225 A	16	HOMC20UC	HOMC20UCW	—
	20	HOMC20UC	HOMC20UCW	—
	30	HOMC30UC	HOMC30UCW	—
	40	HOMC42UC	—	—
	42	HOMC42UC	—	—
	60	HOMC60UC OBS	—	HOMCMF60UC

OBS This product is obsolete.

QO and Homeline Qwik-Grip Load Center Accessories

Table 1.70: Qwik-Grip Load Center Accessories

Description		Cat. No.	Schedule
Qwik-Grip replacement shield	(1) Qwik-Grip shield	PKQGS	DE3A
Qwik-Grip fillers	(4) Qwik-Grip fillers	PKQGFP	DE3A
Qwik-Grip replacement insert	(1) Qwik-Grip insert	PKQGI	DE3A
Qwik-Grip assembly kit	(4) Qwik-Grip shields, (4) Qwik-Grip fillers	PKQGA	DE3A

[6] Extra long version available HOMC30UFL

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



HEPD25



HEPD50



HEPD80

Surge Protective Devices (SPD)

Table 1.71: Load Center and CSED Surge Protection Devices

Description	Cat. No.	Description	Surge Current per Phase	Schedule
Surge Protective Devices	QO2175SB	QO Surgebreaker	22.5 kA	DE1B
	HOM2175SB	HOM Surgebreaker	22.5 kA	DE1B
	HEPD25	1Ø3W—120/240 V Compact SPD	25 kA	DE1B
	SDSA2040	3Ø4W—208Y/120 V Compact SPD	40 kA	DE1B
	SDSA2040D	3Ø3W—240 V Compact SPD	40 kA	DE1B
	QO250PSPD	QO Plug-on Neutral SPD	50 kA	DE1B
	HOM250PSPD	HOM Plug-on Neutral SPD	50 kA	DE1B
	HEPD50	SurgeArrest Whole Home Electronic Protection	50 kA	DE1B
	HEPD80	SurgeArrest Whole Home Electronic Protection	80 kA	DE1B
	SDSB80111 OBS	Surgebreaker Plus (alll-in-one protection for appliances, ethernet, and telephone)	80 kA	DE1B
Surge Protective Device Mounting Kits	HEPD25MKF	HEPD25 Flush Mount Kit	—	DE1B
	HEPD58MKF	HEPD50 and HEPD80 Flush Mount Kit	—	DE1B

OBS This product is obsolete.

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.



QO250PSPD



HOM250PSPD



QO2175SB



HOM2175SB

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Indoor Enclosure Dimensions and Knockout Information


Table 1.72: Enclosure Dimensions


Box No.	Dimensions W in.	W mm	H in.	H mm	D in.	D mm
1	3.81	97	6.72	171	3.00	76
2	4.81	122	9.30	236	3.19	81
3	4.81	122	9.30	236	3.19	81
4	8.88	226	12.57	319	3.80	97
5	14.25	362	14.92	379	3.75	95
6	14.25	362	17.92	455	3.75	95
7	14.25	362	20.92	531	3.75	95
8	14.25	362	26.04	661	3.75	95
9	14.25	362	29.86	758	3.75	95
10	14.25	362	33.78	858	3.75	95
11	14.25	362	37.98	965	3.75	95
12	14.25	362	39.37	1000	3.75	95


Box No.	Dimensions W in.	W mm	H in.	H mm	D in.	D mm
13	5.88	149	13.12	333	3.38	86
14	14.25	362	20.92	531	3.75	95
15	20.00	508	50.00	1270	5.75	146
16	20.00	508	62.00	1727	5.75	146
17	20.00	508	53.00	1346	5.75	146
18	5.88	149	16.12	409	3.38	86
19	7.56	192	23.12	587	4.25	108
20	9.62	244	26.12	663	4.75	121
21	8.88	226	14.80	376	3.80	97
22	8.55	217	23.92	608	3.95	100
23	14.25	362	29.86	758	3.75	95
24	14.25	362	43.15	1096	3.75	95
25	14.25	362	48.50	1235	3.75	95


Table 1.73: Knockout Information


Knockouts									
Symbol	A	B	C	D	E	F	G	H	I
Conduit Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2

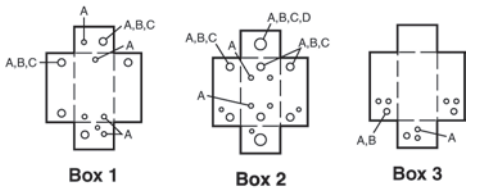


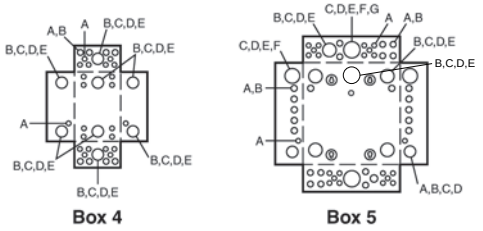














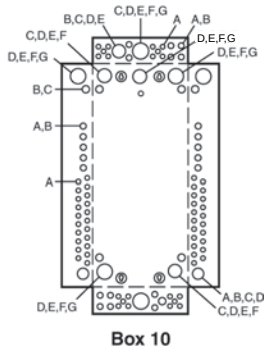


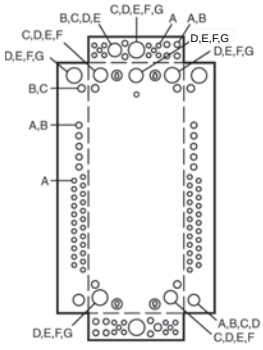


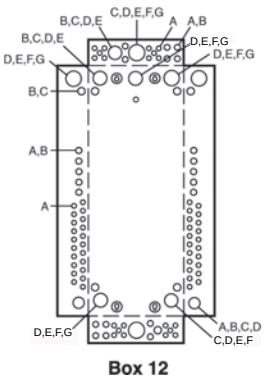


























© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.74: Indoor Knockout Information and Enclosure Dimensions for Qwik Grip Loadcenters


Box No.	Dimensions					
	W		H		D	
	in.	mm	in.	mm	in.	mm
7Q	14.25	362	20.92	531	3.75	95
8Q	14.25	362	26.04	661	3.75	95
9Q	14.25	362	29.86	758	3.75	95
10Q	14.25	362	33.78	858	3.75	95
11Q	14.25	362	37.98	965	3.75	95
12Q	14.25	362	39.37	1000	3.75	95




Box 7Q




Box 8Q




Box 9Q



Box 10Q




Box 11Q



Box 12Q

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

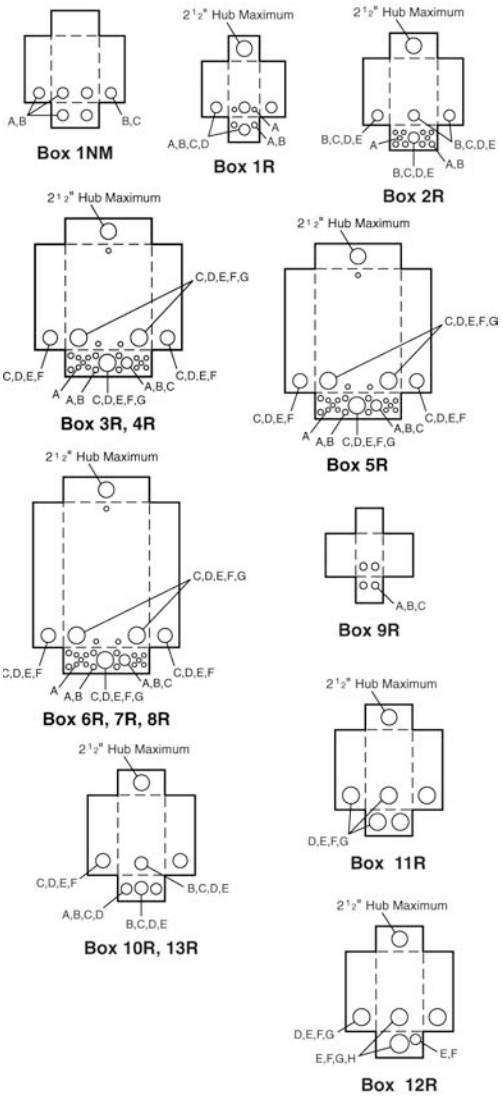


Enclosure Dimensions and Knockout Information

Table 1.75: Enclosure Dimensions

Box No.	Dimensions					
	W		H		D	
	in.	mm	in.	mm	in.	mm
1NM	6.52	166	8.79	223	3.90	99
1R *[1]*	4.88	124	9.38	238	4.00	102
2R	8.88	226	12.65	321	4.27	108
3R	14.75	375	18.92	481	4.52	115
4R	14.75	375	22.06	560	4.52	115
5R	14.75	375	26.04	661	4.52	115
6R	14.75	375	29.86	758	4.52	115
7R	14.75	375	33.78	858	4.52	115
8R	14.75	375	37.98	965	4.52	115
9R	4.56	116	6.50	165	3.88	99
10R	6.92	176	13.18	335	4.12	105
11R	7.56	192	23.24	590	4.75	121
12R	9.62	244	26.24	666	5.50	140
13R	6.92	176	16.18	411	4.12	105
14R	14.75	375	39.37	1000	4.52	115
15R	8.88	226	14.80	376	4.27	108
16R	8.55	217	24.75	629	4.16	106
17R	8.88	226	12.65	321	4.27	108

Table 1.76: Knockout Information

Knockouts								
Symbol	A	B	C	D	E	F	G	H
Conduit Size	1/2 in.	3/4 in.	1 in.	1-1/4 in.	1-1/2 in.	2 in.	2-1/2 in.	3 in.

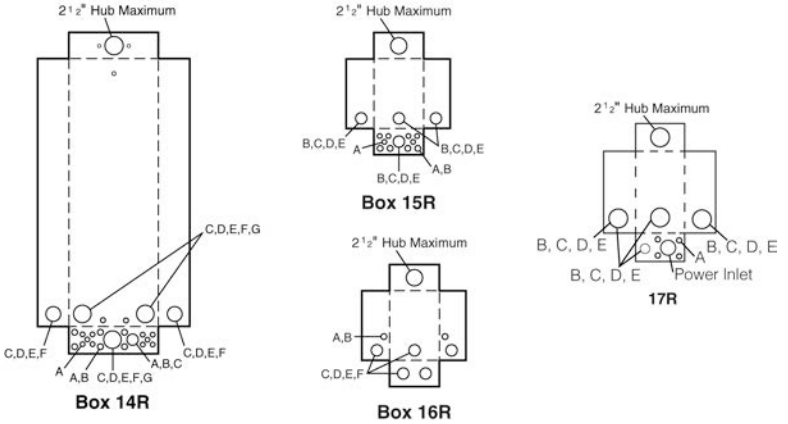

Bolt-On Hubs

Square D equipment with “R’’ or “RB’’ suffix, designated NEMA 3R rainproof construction, utilizes bolt-on hubs listed below. “RB’’ devices will accept 3/4 in. through 2-1/2 in. bolt-on hubs without the use of reducers. Off-center conduit thread openings and elongated mounting holes provide quick and easy adjustment to eliminate costly conduit offsets and bends. Catalog suffix “R’’ devices require 3 in. through 4 in. field cut opening. Hubs are suitable for use with conduit having ANSI standard taper pipe thread.



Table 1.77: Bolt-On Hubs UL Listed for Rainproof Devices

Conduit Size	3/4 in.	1 in.	1-1/4 in.	1-1/2 in.	2 in.	2-1/2 in.
Hub Cat. No.	B075	B100	B125	B150	B200	B250
NOTE: Closing cap (Cat. No. BCAP) is provided factory-installed on each device having “RB’’ suffix.						

Table 1.78: Bolt-On Hubs UL Listed for Mounting in Field-Cut Opening

Conduit Size	3 in.	4 in.	
Hub Cat. No.	B300	B400	Designed for mounting in field cut opening. Includes gasket and four mounting bolts and nuts.

[1] HOME250SPA and QO260NATR top endwall has no hub opening.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Catalog Number Logic for CSED

Table 1.79: Catalog Numbers for Combination Service Entrance Devices

Number Segment	Character	Description	R	Q	C	8	16	D	200	C	H	X	S
Socket Type	Q	QO Ringless											
	R	HOM Ringless											
	C	QO Ring type											
	S	HOM Ring type											
Service Disconnect Install	Blank	Field Installed											
	Q	Factory Installed											
Service Feed	Blank	Combination overhead/underground											
	C	Combination overhead/underground											
	O	Overhead only											
	U	Underground only											
	RA	“A” Hub provision in top endwall											
	RB	“B” Hub provision in top endwall											
Spaces (Service Discounts or Branches)	#	Maximum # of 1-pole circuits											
	#	Maximum # of 1-pole spaces											
Interior	D	Dual main service disconnects (feed-thru lugs on meter mains only)											
	F	Single main service disconnect with feed-thru lugs											
	L	Main lug interior (service disconnects field installed)											
	M	Single main service disconnect											
Amperage Rating	100	100 A											
	125	125 A											
	150	150 A											
	200	200 A											
	225	225 A											
	400	400 A											
Enclosure Mounting Style	C	Surface mount or convertible to semi-flush (use appropriate flange kit)											
	F	Semi-flush mount only											
	R	Reverse mount only											
	S	Surface mount only											
	PF	Home PoN semi-flush mount device											
	PS	Home PoN surface mount device											
Meter Socket Bypass Type	H	Horn by-pass											
	K	K-4 bolt-on, no by-pass											
	L	Class 320 with lever by-pass											
	N	Class 320, No by-pass											
	B	Class 320 Manual by-pass											
	Blank	No by-pass											
	X	2 piece lever by-pass cover											
Application	S	Solar ready											
	FMG	Florida Meter Group											
	MEG	Meter Equipment Group											

This table is for interpreting existing part number only. All possible combinations are not available.

Table 1.80: Catalog Numbers Square D™ Energy Center

Number Segment	Character	Description	QO	W	C	60	M	200	P	F		Y
Architecture platform	QO	QO architecture platform										
Wiser Energy	W	Wiser Energy										
Socket Type	C	QO Ringless										
Spaces	#	Number of Spaces										
Interior	M	Single main service disconnect										
Amerpage Rating	200	200 A										
Plug-on-neutral	P	Plug-on-neutral ready										
Enclosure mounting style	F	Semi-flush mount only										
		Meter Socket Bypass Type										
Application	Y	Universal — compatible with any solar inverter										

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Rainproof Meter Mains

Table 1.81: Rainproof Meter Mains

Ampere Rating	Bypass Type	Service (Type of Feed)		Short Circuit Current Rating	Cat. No.	Service Disconnect(s)			Load Center and Branch Circuit Breakers (Order separately [1])				Hub Type (Order separately [2])	Line Side Main Lugs AWG/ kcmil (Al/Cu)	Service Ground Lug AWG/ kcmil (Al/Cu)	Bus Rating	Weight Each (Lbs) and Pallet Qty.
						2P Circuits (Max.)	Type (Order separately [3])	Ampere Rating Max.	Max. Quantity			Ampere Rating Max.					
		UL	UL and EU-SERC						Spaces	1P Circuits	1P Tandems						
Ring Type, QO™																	
Surface Mount Only																	
125 A	None	OH/UG	—	10 kA	C125RB	1	QOM1-VH	125 A	—	—	—	—	B	4–1/0	8–1/0	—	15, 54
200 A	None	OH/UG	—	22 kA	CM200S	1	QOM2-VH	200 A	—	—	—	—	A	4–250	(2)8–2/0	—	26, 24
		OH/UG	— —	22 kA	C2M200S OBS	1 1	QOM2-VH QO-VH	200 A 50 A	— —	— —	— —	— —	A	4–250	(2)8–2/0	—	27, 20
		OH/UG	—	10 kA	C4L200S OBS	2	QO	100 A	—	—	—	—	A	4–250	(2)8–2/0	—	27, 28
Ring Type, Homeline™																	
Surface Mount Only																	
125 A	None	OH/UG	OH/UG	10 kA	SC8L125S	4	HOM	125 A	—	—	—	—	A	6–2/0	6–2/0	125	31, 24
200 A	None	OH/UG	OH/UG	10 kA	SC12L200S OBS	6	HOM	200 A [4]	—	—	—	—	A–L	4–250	8–2/0	200	40, 10
Semiflush Mount only																	
125 A	None	OH/UG	OH/UG	10 kA	SC8L125F OBS	4	HOM	110 A	—	—	—	—	A or B300	6–2/0	6–2/0	—	37, 20
200 A	None	OH [5]/UG	OH [5]/ UG	10 kA	SC12L200F OBS	6	HOM	200 A [6]	—	—	—	—	A–L	4–250	8–2/0	225	47, 10
Surface Mount—Supplied with Feed-Thru Lugs and provisions for Branch Circuit Breakers																	
150 A	None	OH/UG	— UG	10 kA	SC816D150C [7] [8] SU816D150C [7] [8] OBS	1 1	HOM2150 [9] HOM	150 A 50 A	8	16	8	100 A [10]	A or A–L	6–300	8–1/0	200 —	48, 18
200 A	None	UG	— UG	10 kA	SC816D200C [7] [8] SU816D200C OBS	1 1	HOM2200 [9] HOM	200 A 50 A	8	16	8	100 A [10]	A or A–L	6–300	8–1/0	200 —	48, 18
Ringless, QO™																	
Surface Mount Only																	
200 A	None	OH/UG	—	22 kA	RC200S [11]	1	QOM2-VH	200 A	—	—	—	—	A	6–350	(2)8–2/0	—	26, 24
	Lever			10 kA	RCM200SL [11] [12]	1	QOM2-VH	200 A					A	6–350	8-1/0	—	60 / 14
	None			22 kA	RC2M200S [11]	1	QOM2-VH	200 A					A	6–350	(2)8–2/0	—	27, 20
	Horn				RC2M200SH OBS [11]	1	QO-VH	50 A					A	6–350	(2)8–2/0	—	27, 20
	Lever			10 kA	RC2M200SL OBS [11] [12]	1	QOM2-VH	200 A					A	6–350	8-1/0	—	60 / 14
						1	QO-VH	50 A							8-1/0		
	None			22 kA	QC12L200S OBS [11] [12]	6	QO-VH	200 A					A	6–350	8–2/0	—	43, 21
	None			22 kA	QC12L200C OBS [11]	6	QO-VH	200 A [6]					A	6–350	12-2/0	200	40, 21
Surface Mount Only, Supplied with Feed-Thru Lugs and provisions for Branch Circuit Breakers																	
100 A	Horn	OH/UG	—	22 kA	QC816F100CH [7] [11] [12]	1	QOM2100VH [9]	100 A	8	16	8	100	A	6–350	12-2/0	200	40, 21
125 A	None	OH/UG	—	22 kA	QC816F125S OBS	1	QOM2125VH [9]	125 A	8	16	8	100	A	6–350	8–2/0	—	43, 21
	None	OH/UG	—	22 kA	QC816F125C [7][11]	1	QOM2125VH [9]	125 A	8	16	8	100	A	6–350	12-2/0	125	40, 21
150 A	None	OH/UG	—	22 kA	QC816F150S [7][11] [12]	1	QOM2150VH [9]	150 A	8	16	8	150 A [13]	A	6–350	8–2/0	200	43, 21
	None	OH/UG	—	22 kA	QC816F150C [7][11]	1	QOM2150VH [9]	150 A	8	16	8	150 A [13]	A	6–350	12-2/0	200	40, 21
	Lever	OH/UG	—	22 kA	QC816F150SL OBS [7] [11] [12]	1	QOM2150VH [9]	200 A	8	16	8	150 A	A	6–350	8-2/0	—	74 / 12
200 A	None	OH/UG	—	22 kA	QC816F200S OBS [7] [11] [12]	1	QOM2200VH [9]	200 A	8	16	8	200 A [6]	A	6–350	8–2/0	200	43, 21
	Horn	OH/UG	—	22 kA	QC816F200SH OBS [7][11] [12]	1	QOM2200VH [9]	200 A	8	16	8	200 A [6]	A	6–350		—	
	Horn	OH/UG	—	22 kA	QC816F200CH OBS [7] [11]	1	QOM2200VH [9]	200 A	8	16	8	200 A [6]	A	6–350	12-2/0	200	40, 21
	Lever	OH/UG	—	22 kA	QC816F200SL [7] [11] [12]	1	QOM2200VH [9]	200 A	8	16	8	200 A	A	6–350	8–2/0	200	74 / 12
Ringless, Homeline™																	
Surface Mount Only																	
125 A	None	OH/UG	—	10 kA	RC8L125S OBS [14]	4	HOM	125 A [15]	—	—	—	—	A	6–2/0	6–2/0	125	27, 32

[1] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
[2] To order hubs, see Accessories and Hubs for CSEDs, page 1-48
[3] To order service disconnects, see Circuit Breakers for CSEDs, page 1-47 except as noted)
[4] Use only 15–110 A and 150–200 A breakers.
[5] Suitable for OH service with addition of tunnel kit (SCTK20). Order separately.
[6] Use only 15–100 A and 150–200 A circuit breakers.
[7] Supplied with load side feed-thru lugs, for 4 AWG–250 kcmil (Al/Cu) conductors.
[8] Convertible to semiflush with SC200F flange kit (order separately).
[9] Service disconnect supplied factory-installed.
[10] A 100 A circuit breaker can be installed in bottom position only, all other positions are limited to 70 A max.
[11] Device supplied with barrel lock provisions factory-installed.
[12] 5th jaw factory-installed.
[13] Use only 15–100 A and 150 A circuit breakers.
[14] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).
[15] 125 A Homeline™ 2P circuit breaker can be installed in top position only. All other positions are limited to 100 A max.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.81 Rainproof Meter Mains (cont'd.)

Ampere Rating	Bypass Type	Service (Type of Feed)		Short Circuit Current Rating	Cat. No.	Service Disconnect(s)			Load Center and Branch Circuit Breakers (Order separately *[16]*)				Hub Type (Order separately *[17]*)	Line Side Main Lugs AWG/ kcmil (Al/Cu)	Service Ground Lug| AWG/| kcmil| (Al/Cu)	Bus Rating	Weight Each (Lbs) and Pallet Qty.
						2P Circuits (Max.)	Type (Order separately *[18]*)	Ampere Rating Max.	Max. Quantity								
									Spaces	1P							
		UL	UL and EU-SERC							Circuits	Tandems	Ampere Rating Max.					
200 A	None	OH/UG	—	10 kA	RC12L200S OBS	6	HOM	200 A *[19]*	—	—	—	—	A	6–350	8–2/0	—	43, 21
200 A	None	OH/UG	—	22 kA	RC12L200C *[20]*	6	HOM	200 A *[19]*	—	—	—	—	A	6–350	12-2/0	200	40, 21
Surface Mount Only, Supplied with Feed-Thru Lugs and provisions for Branch Circuit Breakers																	
100 A	Horn	OH/UG	—	22 kA	RC816F100SH OBS *[21] [20] [22]*	1	QOM2100VH *[23]*	100 A	8	16	8	100 A			8–2/0	—	43, 21
100 A	Horn	OH/UG	—	22 kA	RC816F125SH OBS RC816F100CH *[21] [20] [22]*	1	QOM2100VH *[23]*	100 A	8	16	8	100 A			12-2/0	—	40, 21
125 A	Horn	OH/UG	—	22 kA	RC816F125SH OBS	1	QOM2125VH *[23]*	125 A	8	16	8	100 A			8–2/0	—	43, 21
125 A	Horn	OH/UG	—	22 kA	RC816F125CH *[21] [20]*	1	QOM2125VH *[23]*	125 A	8	16	8	100 A			12-2/0	200	40, 21
150 A	None	OH/UG	—	22 kA	RC816F150S OBS *[21] [20]*	1	QOM2150VH *[23]*	150 A	8	16	8	150 A *[24]*			8–2/0	—	43, 21
	None	OH/UG	—	22 kA	RC816F150C *[21] [20]*	1	QOM2150VH *[23]*	150 A	8	16	8	150 A *[23]*			12-2/0	200	40, 21
	Horn	OH/UG	—	22 kA	RC816F150SH OBS *[21] [20] [22]*	1	QOM2150VH *[23]*	150 A	8	16	8	150 A *[24]*			8–2/0	—	43, 21
	Horn	OH/UG	—	22 kA	RC816F150CH *[21] [20] [22]*	1	QOM2150VH *[23]*	150 A	8	16	8	150 A *[24]*	A	6–350	12-2/0	200	40, 21
	Lever	OH/UG	—	22 kA	RC816F150SL OBS *[20] [22] [25]*	1	QOM2150VH *[23]*	200 A	8	16	8	150 A			8-2/0	200	72 / 12
200 A	None	OH/UG	—	22 kA	RC816F200S OBS *[21] [20] [22]*	1	QOM2200VH *[23]*	200 A	8	16	8	200 A *[19]*			8–2/0	200	43, 21
	None	OH/UG	—	22 kA	RC816F200C *[21] [20]*	1	QOM2200VH *[23]*	200 A	8	16	8	200 A *[19]*			12-2/0	200 *[26]*	40, 21
	Horn	OH/UG	—	22 kA	RC816F200SH OBS	1	QOM2200VH *[23]*	200 A	8	16	8	200 A *[19]*			8–2/0	—	43, 21
	Horn	OH/UG	—	22 kA	RC816F200CH *[21] [20] [22]*	1	QOM2200VH *[23]*	200 A	8	16	8	200 A *[19]*			12-2/0	200	40, 21
	Lever	OH/UG	—	22 kA	RC816F200SL OBS *[19] [20] [22] [25]*	1	QOM2200VH *[23]*	200 A	8	16	8	200 A			8-2/0	200	72 / 12
200 A	Horn	OH/UG	—	10 kA	RC816D200CH *[27] [21] [22] [28]*	1 1	HOM2200 *[23]* HOM	200 A 50 A	8	16	8	100 A *[29]*		6–300	6–1/0	200	48, 18

OBS This product is obsolete.

[16] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
[17] To order hubs, see Accessories and Hubs for CSEDs, page 1-48
[18] To order service disconnects, see Circuit Breakers for CSEDs, page 1-47 except as noted)
[19] Use only 15–100 A and 150–200 A circuit breakers.
[20] Device supplied with barrel lock provisions factory-installed.
[21] Supplied with load side feed-thru lugs, for 4 AWG–250 kcmil (Al/Cu) conductors.
[22] 5th jaw factory-installed.
[23] Service disconnect supplied factory-installed.
[24] Use only 15–100 A and 150 A circuit breakers.
[25] Suitable for load wires to exit top endwall with addition of Tunnel Kit OHBL, see Table 1.89 Accessories, page 1-48, check with local utility for approval.
[26] Not solar ready.
[27] Convertible to semiflush with SC200F flange kit (order separately).
[28] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).
[29] A 100 A circuit breaker can be installed in bottom position only, all other positions are limited to 70 A max.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Meter Mains and All-In-Ones (100 to 225 A Maximum)

- Ring or ringless type meter socket designs available
- UL Listed, suitable only for use as service equipment
- Meets EUSERC standards
- Service disconnect(s) are supplied factory-installed, except where noted
- Semiflush-reverse design available, supplied with load center (indoor access)
- Supplied with 100% branch neutrals, all unused terminals may be used for equipment grounding wires.
- Meets Federal Specification W-P-115c as Type 1, Class 2

Table 1.82: All-In-One Combination Service Entrance Devices

Ampere Rating	Bypass Type	Service (Type of Feed) UL and EUSERC	Short Circuit Current Rating	Cat. No. (DE3A)	Service Disconnect(s)			Load Center and Branch Circuit Breakers (Order separately *[30]*)				Hub Type *[31]* (Order separately)	Line Side Main Lugs AWG/ kcmil (Al/ Cu)	Service Ground Lug AWG/ kcmil (Al/Cu)	Bus Rating	Weight Each (Lbs) and Pallet Qty.
					2P Circuits (Max.)	Type (Factory Installed)	Ampere Rating Max.	Max. Quantity Spaces	1P Circuits	1P Tandems	Ampere Rating Max.					
Ring Type, Homeline™																
Surface Mount Only																
100 A	None	OH/UG	10 kA	SC1624M100S	1	HOM2100	100 A	16	24	8	100 A	A	6–2/0	6–2/0	125	32, 24
125 A	None	OH/UG	10 kA	SC1624M125S	1	HOM2125	125 A	16	24	8	125 A *[32]*	A	6–2/0	6–2/0	125	32, 24
200 A	None	OH/UG	10 kA	SC2040M200C *[33]*	1	HOM2200	200 A	20	40	20	100 A	A or A-L	6–300	8–1/0	200	47, 18
200 A	None	UG	10 kA	SU2040M200C OBS	1	HOM2200	200 A	20	40	20	100 A	A or A-L	6–300	8–1/0	—	47, 18
Semiflush Mount Only																
100 A	None	OH/UG	10 kA	SC1624M100F	1	HOM2100	100 A	16	24	8	100 A	A or B300	6–2/0	6–2/0	125	44, 20
125 A	None	OH/UG	10 kA	SC1624M125F	1	HOM2125	125 A	16	24	8	110 A	A or B300	6–2/0	6–2/0	125	44, 20
Surface Mount Only																
100 A	None	OH*[34]*	10 kA	SO1020M100S	1	HOM2100	100 A	10	20	10	80 A	A	6–1	8–4	100	20, 42
200 A	None	OH*[34]*	22 kA	SO2040M200S	1	QOM2200VH	200 A	20	40	20	200 A	A	6–350	8–2/0	200	43, 21
REVERSE All-In-One—Semiflush Mount with Service Disconnect (outdoor access) and Load Center (indoor access)																
200 A	None	UG	10 kA	SU3040M200R OBS	1	QOM2200VH	200 A	30	40	10	200 A *[35]*	A or B300	6–300	12–1/0	—	60, 15
225 A	None	UG	10 kA	SU3040M225R OBS	1	QOM2225VH	225 A								—	60, 15
Ringless, Homeline																
Surface Mount Only																
100 A	None	OH/UG *[34]*	10 kA	RC1624M100S	1	HOM2100	100 A	16	24	8	100 A	A	6–2/0	6–2/0	125	32, 24
125 A	None	OH/UG *[34]*	10 kA	RC1624M125S OBS	1	HOM2125	125 A	16	24	8	125 A *[32]*	A	6–2/0	6–2/0	—	32, 24
125 A	Horn	OH/UG *[34]*	22 kA	RC2040M125CH OBS *[36][37]*	1	QOM2125VH	125 A	20	40	20	125 A	A	6–2/0	6–2/0	200	40, 21
150 A	Horn	OH/UG *[34]*	22 kA	RC2040M150SH *[36]*	1	QOM2150VH	150 A	20	40	20	150 A	A	6–2/0	6–2/0	—	43, 21
150 A	Horn	OH/UG *[34]*	22 kA	RC2040M150CH *[36] [37]*	1	QOM2150VH	150 A	20	40	20	150 A	A	6–2/0	6–2/0	200	40, 21
150 A	Lever	OH/UG *[34]*	22 kA	RC3040M150SL *[38]*	1	QOM2150VH *[32]*	200 A	30	40	10	150 A	A	6–2/0	6–2/0	200	76 / 12
200 A	None	OH/UG *[34]*	22 kA	RC2040M200S *[36]*	1	QOM2200VH	200 A	20	40	20	200 A	A	6–2/0	6–2/0	200	43, 21
200 A	None	OH/UG *[34]*	22 kA	RC2040M200C *[36]*	1	QOM2200VH	200 A	20	40	20	200 A	A	6–2/0	6–2/0	200	40, 21
200 A	Horn	OH/UG *[34]*	22 kA	RC2040M200SH OBS	1	QOM2200VH	200 A	20	40	20	200 A	A	6–2/0	6–2/0	—	43, 21
200 A	Horn	OH/UG *[34]*	22 kA	RC2040M200CH *[36]*	1	QOM2200VH	200 A	20	40	20	200 A	A	6–2/0	6–2/0	200	40, 21
200 A	Lever	OH/UG *[34]*	22 kA	RC3040M200SL *[38]*	1	QOM2200VH *[32]*	200 A	30	40	10	200 A	A	6–2/0	6–2/0	200	76 / 12
200 A	None	OH/UG *[34]*	22 kA	RC2040M200CGP	1	QOM2200VH	200 A	20	40	20	200 A	A	6–2/0	6–2/0	200	48 / 21
Ringless, QO																
Surface Mount Only																
150 A	Horn	OH/UG *[34]*	22 kA	QC2442M150SH OBS	1	QOM2150VH	150 A	24	42	18	150 A	A	6–350	8–2/0	—	43, 21
200 A	None	OH/UG *[34]*	22 kA	QC2442M200S OBS	1	QOM2200VH	200 A	24	42	18	200 A	A	6–350	8–2/0	—	43, 21
200 A	None	OH/UG *[34]*	22 kA	QC2442M200C *[36]*	1	QOM2200VH	200 A	24	42	18	200 A	A	6–350	8–2/0	200	40, 21
200 A	Horn	OH/UG *[34]*	22 kA	QC2442M200SH*[36]*	1	QOM2200VH	200 A	24	42	18	200 A	A	6–350	8–2/0	—	43, 21
200 A	Horn	OH/UG *[34]*	22 kA	QC2442M200CH OBS *[36][37]*	1	QOM2200VH	200 A	24	42	18	200 A	A	6–350	8–2/0	—	40, 21
200 A	None	OH/UG *[34]*	22 kA	QC3040M200S	1	QOM2200VH	200 A	30	40	10	200 A	A	6–350	8–2/0	200	40, 21
200 A	Hom	OH/UG *[34]*	22 kA	QC3040M200SH OBS	1	QOM2200VH	200 A	30	40	10	200 A	A	6–350	8–2/0	—	40, 21

OBS This product is obsolete.

[30] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
[31] To order hubs, see Accessories and Hubs for CSEDs, page 1-48
[32] 125 A Homeline™ 2P circuit breaker can be installed in top position only. All other positions are limited to 100 A max.
[33] Convertible to semiflush with SC200F flange kit (order separately).
[34] Device does not meet EUSERC Specifications.
[35] Use only 15–110 A and 150–200 A circuit breakers.
[36] Device supplied with barrel lock provisions factory-installed.
[37] 5th jaw factory-installed.
[38] Suitable for load wires to exit top endwall with addition of Tunnel Kit OHBL, (see Table 1.89 Accessories, page 1-48, check with local utility for approval.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

New!

Energy Center



QOWC60M200PFY Energy Center



Energy Center with Cover Removed

Ampere Rating	Bypass Type	Service (Type of Feed)		Short Circuit Current Rating	Cat. No.	Service Disconnect(s)			Load Center and Branch Circuit Breakers (Order separately [39])				Hub Type [40] (Order separately)	Line Side Main Lugs AWG/ kcmil (Al/Cu)	Service Ground Lug AWG/kcmil (Al/Cu)	Bus Ratings
									Max. Quantity							
										1P						
		UL	UL and EU-SERC			2P Circuits (Max.)	Type (Order separately [41])	Ampere Rating (Max.)	Spaces	Circuits	Tandems	Ampere Rating Max.				
Square D™ Energy Center																
Semi-flush Mount Only																
200 A	—	UG	—	22 kA	QOWC60M200PFY	—	QOM2 [42]	200 A	60 [43]	61	10	200 A	A300L	6–250	14–2/0	225 A



New!

Schneider Pulse CSED

Schneider Pulse smart panel intelligently interconnects a home's various energy sources, optimizes energy usage, extends battery run time, and helps minimize the need for a service level upgrade.

- QO™ product range
- Ringed meter socket, no bypass, meets EUSERC
- Specifications
- Service feed: Overhead / Underground (OH / UG)
- Ampere rating: 200 A Maximum
- Busbar rating: 225 A
- Short-circuit current: 22 KA
- Semiflush mounting (surface mounting to be announced)
- Plug-on neutral connections
- Total spaces: 44 (4 used by submains, 2 used by SPD, 2 used by monitor)
- Usable spaces: 36 (18 top interior, 18 bottom interior)
- Battery charging sources: solar, grid
- Submain rating: 125 A (both top and bottom interiors)
- Max solar back-feed: 145 A
- Factory installed power distribution block
- Backup controller (Microgrid Interconnect Device) available as factory or field installed
- Dimensions (W x H x D): 14.3 x 51.9 x 9.7 in.

Table 1.83: Schneider Pulse CSED

Description	Catalog Number
Schneider Pulse CSED	CC18X18M200PCY
Schneider Pulse CSED with backup controller	CC18X18M200PCZ
Circuit breaker hold down kit (optional)	QOCRBGK2EC

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.

[39] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
[40] To order hubs, see Accessories and Hubs for CSEDs, page 1-48
[41] To order service disconnects, see Circuit Breakers for CSEDs, page 1-47 except as noted)
[42] One service disconnect with 2 — 110 A sub-main feeds.
[43] Nine spaces are used for factory-installed components, leaving 51 available spaces for branch circuits.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

PoN Meter Mains and All-in-Ones (300–400 A Devices)

PoN Meter Mains and All-in-Ones
- Ring or ringless type meter socket designs available
- UL Listed, suitable **only** for use as service equipment
- Meets EUSERC standards where indicated.
- Service disconnects are supplied factory-installed, except where noted
- Supplied with 100% branch neutrals; all unused terminals may be used for equipment grounding wires
- Meets Federal Specification W-P-115c as Type 1, Class 2

Meter Mains: Meets Federal Specification W-P-115c as Type 1, Class 2, UL Listed, suitable only for use as service equipment, 120/240 Vac, 1Ø3W, NEMA 3R Enclosure

Table 1.84: Meter Mains

Ampere Rating	Bypass Type	Service (Type of Feed)		Short Circuit Current Rating	Cat. No.	Service Disconnect(s) [44]			Load Center and Branch Circuit Breakers (Order separately [45])				Hub Type (Order separately [46])	Line Side Main Lugs AWG/ kcmil (Al/Cu)	Bus Rating	Service Ground Lug AWG/ kcmil (Al/Cu)	Weight Each (Lbs) and Pallet Qty.
						2P Circuits (Max.)	Type (Order separately [47])	Ampere Rating (Max.)	Max. Quantity			Ampere Rating Max.					
		UL	UL and EUSERC						Spaces	1P Circuits	1P Tandems						
Ring Type, QO																	
Surface and Semiflush Mount [44]																	
400 A	None	UG	UG	25 kA	CU816D400PCN [48] [49]	1	QDL22200 [50]	200 A	8	16	8	200 A	A–L	(2) Studs	225	4–250	108, 4
400 A	Class 320 Manual Bypass	UG	—	25 kA	CU816D400PCB [48] [51] [52]		QDL, QGL, QJL [53]						A–L	(2) Studs	225	4–250	108, 4
400 A	Class 320 Manual Bypass	UG	—	65 kA [44]	CUM400CB [48] [52]	1	LJL36400U31X [50]	400 A	—	2 [54]	—	200 A	A–L	(2) Studs	—	4–250	115, 4
Ringless Type, QO																	
400 A	Class 320 Lever	OH/ UG	—	25 kA	QCD400PSL [55]	1	QDL, QGL, QJL [53]	200 A	—	—	—	—	A–L	4–600 (2) 1/0–350	—	12–2/0	75, 4
						1	QDL, QGL, QJL [53]	200 A	—	—	—	—					
Surface Mount Only, Supplied with Feed-Thru Lugs and Provisions for Branch Circuit Breakers																	
400 A	[56]	UG	—	25 kA	QU816D400PSL [51] [55] [52]	1	QDL22200 [50] QDL, QGL, QJL [53]	200 A	8	16	8	200 A	A–L	(2) Studs	225	4–250	108, 4
400 A	Class 320 Lever	OH/ UG	—	25 kA	QC816D400PSL [51] [49] [55]	1	QDL22200 [50]	200 A	8	16	8	200 A	A–L	4–600 (2) 1/0–350	225	12–2/0	77, 4
						1	QDL, QGL, QJL [53]	200 A									
Surface and Semiflush Mount [44]																	
400 A	Class 320 Lever	UG	—	25 kA	QU816D400PCL [55] [51] [57] [52]	1	QDL22200 [50]	200 A	8	16	8	200 A	A–L	(2) Studs	225	4–250	108, 4
400 A	Class 320 Lever	UG	—	65 kA [44]	QUM400CL [55] [52]	1	LJL36400U31X [50]	400 A	—	2 [54]	—	200 A	A–L	(2) Studs	—	4–250	120, 4
Ringless Type, Homeline																	
Surface Mount Only, Supplied with Feed-Thru Lugs and Provisions for Branch Circuit Breakers																	
400 A	Class 320 Lever	OH/ UG	—	25 kA	RC816D400PSL [49] [55]	1	QDL22200 [50]	200 A	8	16	8	200 A	A–L	4–600 (2) 1/0–350	225	12–2/0	77, 4
						1	QDL, QGL, QJL [53]										

Table 1.85: All-in-One Combination Service Entrance Devices

Surface and Semiflush Mount [44]																
Ring Type, Homeline																
300 A	Class 320 Manual	UG	—	25 kA	SU2040D300PCB [48] [58] [52]	1	QDL22200 [50] QDL, QGL, QJL [53]	200 A 100 A	20	40	20	200 A	A–L	(2) Studs	225	4–250	106, 4
					SU2040D300PFB [48] [58] [52]	1										
400 A	None	UG	UG	25 kA	SU2040D400PCN [48] [58]	1	QDL22200 [50] QDL, QGL, QJL [53]	200 A 200 A	20	40	20	200 A	A–L	(2) Studs	225	4–250	106, 4
					SU2040D400PFN [48] [58]	1									225		

[44] UL short circuit current rating is equal to the lowest interrupting rating of any circuit breaker installed.
[45] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
[46] To order hubs, see Accessories and Hubs for CSEDs, page 1-48
[47] To order service disconnects, see Circuit Breakers for CSEDs, page 1-47 except as noted)
[48] For use only on 120/240 Vac 1Ø3W system (4-jaw meter socket).
[49] Supplied with load side feed-thru lugs for 6 AWG–250 kcmil (Al/Cu) conductors.
[50] Service disconnect supplied factory-installed.
[51] QO panel is rated 200 A maximum.
[52] Device configuration is not included in EUSERC standards. Consult applicable utility for acceptance.
[53] Additional service disconnect for field-installation: order prefix QBL at 10 kA, QDL at 25 kA, QGL at 65 kA, or QJL at 100 kA. Order separately. For complete circuit breaker catalog number, see Digest Section 7.
[54] Option for field installation of two Q-frame, 200 A max. 2-pole branch circuit breakers used as mains for two downstream load centers. Purchase installation kit BMK2Q400 and two Q-frame circuit breakers separately. Order QBL prefix at 10 kA, QDL prefix at 25 kA, or QGL prefix at 65 kA.
[55] Fifth jaw factory-installed.
[56] Device with suffix L has Class 320 lever bypass and device with suffix K has a K-4 bolt-on, no bypass.
[57] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Table 1.89 Accessories, page 1-48).
[58] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.85 All-in-One Combination Service Entrance Devices (cont'd.)

Surface and Semiflush Mount *[59]*																
400 A	Class 320 Manual	UG	—	25 kA	SU2040D400PCB *[60] [61][62]*	1	QDL22200 *[63]*	200 A	20	40	20	200 A	A–L	(2) Studs	225	4–250	106, 4
					SU2040D400PFB *[60] [61][62]*	1	QDL, QGL, QJL *[64]*	200 A							225		
Ringless, Homeline																
400 A	Class 320 Lever	UG	—	25 kA	RU2040D400PCL *[61] [65][62]*	1	QDL22200 *[62]*	200 A	20	40	20	200 A	A–L	(2) Studs	225	4–250	109, 4

[59] UL short circuit current rating is equal to the lowest interrupting rating of any circuit breaker installed.
[60] For use only on 120/240 Vac 1Ø3W system (4-jaw meter socket).
[61] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).
[62] Device configuration is not included in EUSERC standards. Consult applicable utility for acceptance.
[63] Service disconnect supplied factory-installed.
[64] Additional service disconnect for field-installation: order prefix QBL at 10 kA, QDL at 25 kA, QGL at 65 kA, or QJL at 100 kA. Order separately. For complete circuit breaker catalog number, see Digest Section 7.
[65] 5th jaw factory-installed.


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Dimensions for CSEDs


Table 1.86: Knockouts

Symbol	A	B	C	D	E	F	G	H	I	J
Conduit Size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4


▲ Driphood supplied factory-installed and is required for surface mount installation. For semi-flush installation, remove driphood and install flange kit SC200F (order separately).
■ Unit supplied with blank top endwall (factory-installed) for surface mount installation. For semi-flush installation, install flange kit FK400 (order separately). Kit includes replacement top endwall (with knockouts) and flanges.
♦ Unit supplied with semi-flush top endwall factory installed and semi-flush flanges factory included.




Drip Hood



Semi-Flush End Wall




C125RB (shown)
CQRB100




Ring Type:
C125RB
CM200S
C2M200S (shown)
C4L200S

Ringless Type:
RC200S
RCSM200S




SO1020M100S

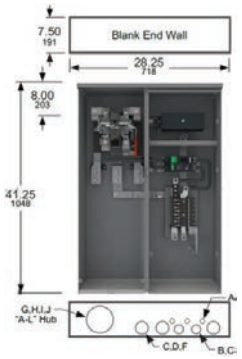


Ring Type:
CU816D400PCB■
CU816D400PCN■

Ringless Type:
QU816D400PCL■
QU816D400PCLX■
QU816D400PSL
QU816D400PSL150

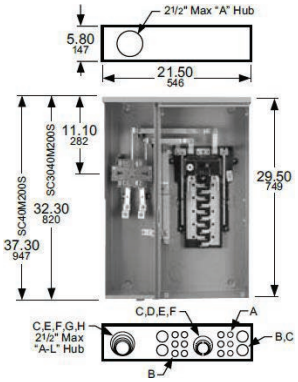


SC816F150S
SC816F200S
SC40M200S
SC2040M200S
SC3040M200S

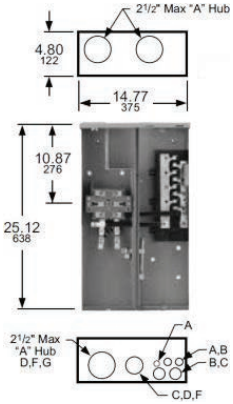


Ring Type:
SC8L125S (shown)
SC1624M100S
SC1624M125S

Ringless Type:
RC8L125S
RC1624M100S
RC1624M125S

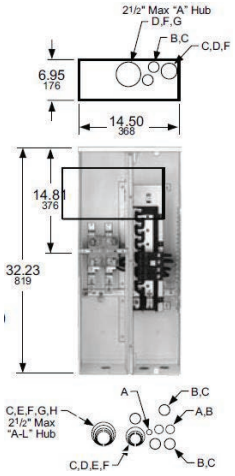

SU816D150C
SU816D200C
SU2040M200C
RC816D200CH
SC816D150C
SC816D200C

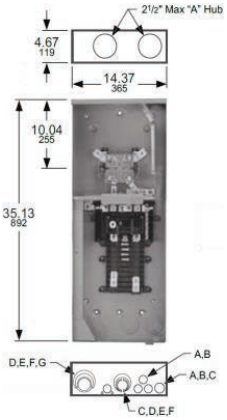


QC816F100CH
QC816F125C
QC816F150C
QC816F200C
QC816F200CH
RC816F100CH
RC816F125CH
RC816F150C
RC816F150CH

RC816F200C
RC816F200CH
RC2040M125CH
RC2040M150CH
RC2040M200C
RC2040MC00CH
QC2442M200C
QC2442M200CH


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Class **4119, 4120** / Refer to Catalog 4120CT2201

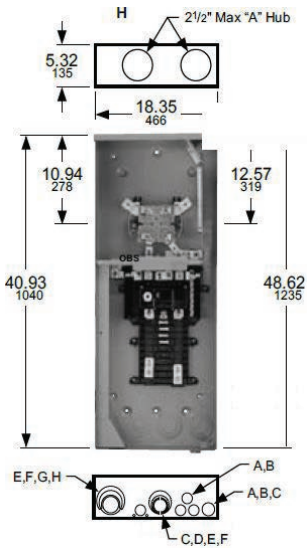


RC816F100SH
RC816F125SH
RC816F150SL
RC816F200SL
RC816F200S
RC2040M125SH
RC2040M150SH
RC2040M200SH
RC3040M150SL

RC3040M200SL
QC816F100SH
QC815F125SH
QC816F150S,SH,SL
QC816F200S,SH,SL
QC2442M200SH
SO2040M200S
QC3040M200SH

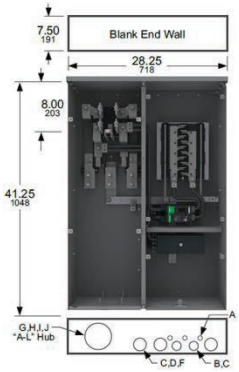


SU2040D400PCB■
SU20240D400PCN■
SU2040D400PFB♦
SU2040D400PFN♦
SU2040D300PCB■

SU2040D300PFB♦
RU2040D400PCL■
RU2040D400PCLX■
CUM400CB■
QUM400CL■

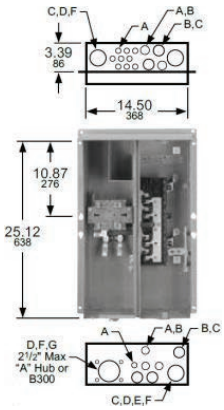

SC8L125F (shown)
SC1624M100F
SC1624M125F

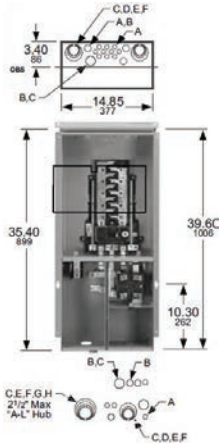

SC816F200F
SC2040M125F
SC2040M200F

SC3040M200F
SC3040M225PF

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Solar Ready PoN CSEDs

- Ring or ringless type meter socket designs available
- UL Listed, suitable only for use as service equipment
- Service disconnect(s) are supplied factory-installed, except where noted
- Interiors accept plug-on neutral and pigtail style branch circuit breakers
- Supplied with a fully distributed neutral bar, all unused terminals may be used for equipment grounding wires
- Meets Ferderal Specification W-P-115c as Type 1, Class 2
- Solar ready kits for line side tap available, see accessories table
- All devices have a 3" KO in the bottom endwall
- Provisions for field installed CTs on All devices


Amperage Rating	Bus Bar Ampere Rating	Bypass type	Service (Type of Feed)	Short Circuit Current Rating	Cat. No.	Service Disconnect(s)		Load Center and Branch Circuit Breakers (Order seperately pages….)				Bus Rating	Hub Type	Line Side Main Lugs	Service Ground Lug
						2P Circuits	Type (Factory installed except where noted)	Spaces	Circuits	Tandems	Ampere Rating Max.				
Ring Type, QO															
Surface Mount Only															
100 A	225 A	None	UG	22 kA	CU816F100PS*[1][2]*	1	QOM2100VH	8	16	8	70 A	—	A-L	4-250	14-2/0 CU 12-2/0 AL
200 A		None	UG	22 kA	CU48F200PS*[1][2]*	1	QOM2200VH	4	8	4	110 A	—			
200 A		None	UG	22 kA	CU816F200PS*[1][2]*	1	QOM2200VH	8	16	8	110 A	—			
Ring Type, Homeline															
Surface Mount Only															
100 A	225 A	None	UG	22 kA	SU816F100PS*[1][2]*	1	QOM2100VH	8	16	8	70 A	—	A-L	4-250	14-2/0 CU 12-2/0 AL
200 A		None	UG	22 kA	SU48F200PS*[1][2]*	1	QOM2200VH	4	8	4	110 A	—			
200 A		None	UG	22 kA	SU816F200PS*[1][2]*	1	QOM2200VH	8	16	8	110 A	—			
150 A		None	OH/UG	22 kA	SC816F150PS*[1][2]*	1	QOM2150VH	8	16	8	150 A	225			8-2/0
200 A		None	OH/UG	22 kA	SC816F200PS*[1][2]*	1	QOM2200VH	8	16	8	200 A	225			
200 A		None	OH/UG	22 kA	SC2040M200PS*[2]*	1	QOM2200VH	20	40	20	200 A	225			
200 A		None	OH/UG	22 kA	SC3042M200PS*[2]*	1	QOM2200VH	30	42	12	200 A	225			
200 A		None	OH/UG	22 kA	SC42M200PS*[2]*	1	QOM2200VH	42	42	0	200 A	225			
Semiflush Mount Only															
200 A	225 A	None	OH*[3]*/UG	22 kA	SC816F200PF*[1][2]*	1	QOM2200VH	8	16	8	200 A	225	A-L	4-250	8-2/0
125 A		None	OH*[3]*/UG	22 kA	SC2040M125PF*[2]*	1	QOM2125VH	20	40	20	110 A	225			
200 A		None	OH*[3]*/UG	22 kA	SC2040M200PF*[2]*	1	QOM2200VH	20	40	20	200 A	225			
200 A		None	OH*[4]*/UG	22 kA	SC3042M200PF*[2]*	1	QOM2200VH	30	42	12	200 A	225			
225 A		None	OH*[4]*/UG	22 kA	SC3042M225PF*[2]*	1	QOM2225VH	30	42	12	200 A	225			
Ringless, QO															
Surface Mount Only															
100 A	225 A	None	UG	22 kA	QU48F100PS*[1]*	1	QOM2100VH	4	8	4	70 A	—	A-L	4-250	14-2/0 CU 12-2/0 AL
100 A		Lever	UG	22 kA	QU48F100PSL*[1]*	1	QOM2100VH	4	8	4	70 A	—			
125 A		None	UG	22 kA	QU48F125PS*[1]*	1	QOM2125VH	4	8	4	70 A	—			
150 A		None	UG	22 kA	QU48F150PS*[1]*	1	QOM2150VH	4	8	4	110 A	—			
200 A		None	UG	22 kA	QU48F200PS*[1]*	1	QOM2200VH	4	8	4	110 A	—			
150 A		None	UG	22 kA	QU816F150PS*[1]*	1	QOM2150VH	8	16	8	110 A	—			
200 A		None	UG	22 kA	QU816F200PS*[1]*	1	QOM2200VH	8	16	8	110 A	—			
200 A		Lever	UG	22 kA	QU816F200PSL*[1]*	1	QOM2200VH	8	16	8	110 A	—			
200 A		None	UG	22 kA	QU816M200PS	1	QOM2200VH	8	16	8	110 A	—			
Ringless, Homeline															
Surface Mount Only															
100 A	225 A	None	UG	22 kA	RU48F100PS*[1]*	1	QOM2100VH	4	8	4	70 A	—	A-L	4-250	14-2/0 CU 12-2/0 AL
100 A		Lever	UG	22 kA	RU48F100PSL*[1]*	1	QOM2100VH	4	8	4	70 A	—			
125 A		None	UG	22 kA	RU48F125PS*[1]*	1	QOM2125VH	4	8	4	70 A	—			
150 A		None	UG	22 kA	RU48F150PS*[1]*	1	QOM2150VH	4	8	4	110 A	—			
200 A		None	UG	22 kA	RU48F200PS*[1]*	1	QOM2200VH	4	8	4	110 A	—			
150 A		None	UG	22 kA	RU816F150PS*[1]*	1	QOM2150VH	8	16	8	110 A	—			
200 A		None	UG	22 kA	RU816F200PS*[1]*	1	QOM2200VH	8	16	8	110 A	—			
200 A		Horn	UG	22 kA	RU816F200PSH*[1]*	1	QOM2200VH	8	16	8	110 A	—			
200 A		Lever	UG	22 kA	RU816F200PSL*[1]*	1	QOM2200VH	8	16	8	110 A	—			
200 A		None	UG	22 kA	RU816M200PS	1	QOM2200VH	8	16	8	110 A	—			

Table 1.87: Knockouts


Symbol	A	B	C	D	E	F	G	H	I	J
Conduit Size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4

[1] Supplied with load side feed-thru lugs, for 4AWG-250 kcmil Al/Cu conductors.
[2] Meets EUSERC requirements.
[3] Suitable for OH service with addition of tunnel kit (SCTKP20). Check with local utility for approval and order separately.
[4] Suitable for OH service with addition of tunnel kit (SCTKP30). Check with local utility for approval and order separately.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

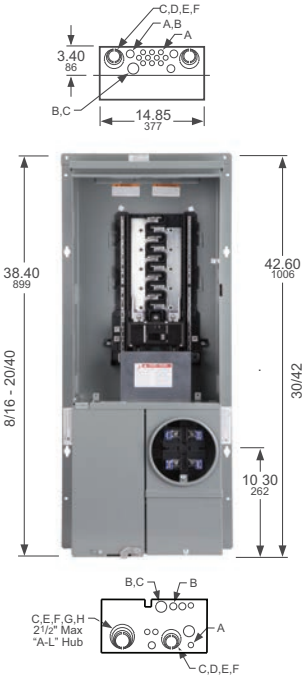

Semiflush Mount type "SC-" (Ring Type, no bypass)

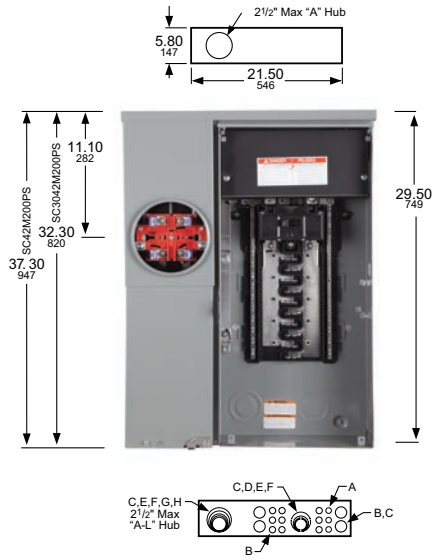

Surface Mount type "SC-" (Ring Type, no bypass)

NOTE: See each catalog number's associated technical drawing online for additional dimensions and enclosure details.

Circuit Breakers for CSEDs

Table 1.88: Circuit Breakers for use with Meter Mains and All-In-One Devices

Ampere Rating *[1]*	Type: HOM, 1P	Type: HOM, 2P	Type: QO, 1P	Type: QO, 2P	Type: QO-VH, 1P	Type: QO-VH, 2P
	Cat. No. (DE3D)	Cat. No. (DE3D)	Cat. No. (DE2A)	Cat. No. (DE2A)	Cat. No. (DE2A)	Cat. No. (DE2A)
10	—	—	QO110	—	—	—
15	HOM115	—	QO115	—	QO115VH	—
20	HOM120	—	QO120	—	QO120VH	—
25	HOM125	—	QO125	—	QO125VH OBS	—
30	HOM130	HOM230	QO130	QO230	QO130VH	QO230VH
35	—	HOM235	QO135	QO235	—	—
40	HOM140	HOM240	QO140	QO240	—	QO240VH
45	—	HOM245	QO145 OBS	QO245	—	—
50	HOM150	HOM250	QO150	QO250	—	QO250VH
60	—	HOM260	QO160	QO260	—	QO260VH
70	—	HOM270	QO170	QO270	—	QO270VH
80	—	HOM280	—	QO280	—	QO280VH
90	—	HOM290	—	QO290	—	QO290VH
100	—	HOM2100	—	QO2100	—	QO2100VH
110	—	HOM2110	—	QO2110	—	QO2110VH
125	—	HOM2125	—	QO2125	—	QO2125VH
150	—	HOM2150BB	—	QO2150	—	QO2150VH
175	—	HOM2175BB	—	QO2175	—	QO2175VH OBS
200	—	HOM2200BB	—	QO2200	—	QO2200VH

OBS This product is obsolete.

Ampere Rating *[1]*	Type: QOM1-VH, 2P	Type: QOM2-VH, 2P	Type: QDL, 2P *[2]*
	Cat. No. (DE3D)	Cat. No. (DE3D)	Cat. No. (DE2A)
50	QOM50VH *[3]*	—	—
60	QOM60VH	—	—
70	QOM70VH	—	QDL22070
80	QOM80VH	—	QDL22080
90	QOM90VH	—	QDL22090
100	QOM100VH	QOM2100VH	QDL22100
110	QOM110VH	—	QDL22110
125	QOM125VH	QOM2125VH	QDL22125
150	—	QOM2150VH	QDL22150
175	—	QOM2175VH	QDL22175
200	—	QOM2200VH	QDL22200
225	—	QOM2225VH	—

[1] Do not exceed mains rating of device
[2] For additional interrupting rating circuit breakers, order circuit breaker prefix QBL at 10 kA, QGL at 65 kA or QJL at 100 kA.
[3] Reference National Electrical Code Article 230-79.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Accessories and Hubs for CSEDs

Table 1.89: Accessories

Description		Cat. No.
Generator Kit: Interlocks main service disconnect and generator circuit breaker (order separately). For : Homeline™ CSED Devices RC816F-, RC2040M-, SO2040M- containing suffix -C or -CH QO CSED Devices QC816F-, QC2442M- containing suffix -C or -CH		RCGK2 QCGK3
Backfed inverter circuit breaker retaining kit for SC2636M225FPV		PK2SCPV OBS
Fifth Jaw Kit for:	Meter Main Types: C, RC, SC, QC All-In-One Types: SC, SU (100–225 A), QC, RC, SO	5J
Bypass (Horn Type) for Ringless Type Meter Mains and All-In-Ones (100–200 A) (except for RC8L125S, RC1624M100S and RC1624M125S–use RCHB).		MMHB
Lexan Meter Socket Cover Plate for: Ring and Ringless Type Meter Mains Ring and Ringless Type All-In-Ones		29007
Meter Socket Sealing Rings for Ring Type Meter Mains and All-In Ones: Snap Type Aluminum (Std.) Screw Type Aluminum Snap Type Stainless Steel		2920910001 29008W ARP00026
Anti-Inversion Kit . For use ONLY on 400 A Meter Mains and All-In-Ones with lever bypass.		MMLRK
Trim Kit for 2 in. X 6 in. stud wall, used with Reverse All-In-Ones, SU3040M200R, and SU3040M225R		SU2X6TRIM
Barrel Lock Kit (Barrel Lock not included), supplied with bracket and mounting screw, refer to listings for where used.		SCBRLLOCK OBS
Semiflush Flange Kit for:	Meter Mains: SC816D150/200C and RC816D200CH All-In-Ones: SC2040M200C	SC200F
Semiflush Flange Kit for ring- and ringless-type Meter Mains and All-In-Ones (400 A Only)		FK400
Lug Kit includes (4) lugs, for use with 2 AWG–600 kcmil Al/Cu conductors. Lugs are for standard 2-Hole mounting. Meter Main and All-In-One units supplied with (2) studs per phase and neutral will accept one lug per phase and neutral. Not for use on 400 A devices with “K” suffix.		CMELK4
Branch Circuit Breaker Field Installation Kit for two Q-Frame Circuit Breakers (QBL, QDL, or QGL, order separately). For CUM400CB, QUM400CL or QUM400CK - includes (2) mounting pans, (4) wires.		BMK2Q400
Overhead Feed Trough for 400 A ring- and ringless-type Meter Mains and All-In-Ones.		OCK400
Touch-Up Paint (ASA49 Gray)		PK49SP
Ground Bar Kit, Meter Mains and All-In-Ones QC, RC, and SC (100–225 A)		PK15GTA
Filler Plate for:	Meter Main Types: QC, CU All-In-One Types: QC	QOFP
Filler Plate for:	Meter Main Types: RC, SC All-In-One Types: SC, RC, SU	HOMFP
Neutral Lug (6-2/0 AWG) for:	Meter Main Types: RC, SC, QC All-In-One Types: SC, SU, QC, RC	LK100AN
Overhead Barrier Tunnel Kit for Ringless & Horn Bypass in RC/QC Devices		OHBS OBS
Overhead Barrier Tunnel Kit for Lever Bypass RC/QC Devices		OHBL
Solar Ready Kit for Type SC Semiflush Mounted Solar Ready Devices (includes lugs and replacement UL67 barrier)		SR69064AF
Solar Ready Kit for Type SC Surface Mounted Solar Ready Devices (includes lugs and replacement UL67 barrier)		SR69064AS
Energy Center Manual Transfer Kit		QO2DTEC
Energy Center Hold-Down Bracket Kit		QOCRBGK2EC
Solar Ready Kit for UG 200 A Max Meter Mains		SRKUGMM
Generator Kit for RU/SU/QU/CU- 200 A Max Meter Mains		SRUGK

OBS This product is obsolete.

Table 1.90: Hubs and Closing Plates

Hub Series	Conduit Size (inches)	Cat. No.	Disc. Sch.
Closing Plate for “A” Hub opening		ACP	DE4
A	1.00	A100	DE4
	1.25	A125	DE4
	1.50	A150	DE4
	2.00	A200	DE4
	2.50	A250	DE4
Adapter plate to allow use of “A” Hubs on “A-L” size hub openings		AAP	DE4
Closing Plate for “A-L” Hub opening		ACPL	DE4
A-L	2.00	A200L *[1]*	DE4
	2.50	A250L	DE4
	3.00	A300L	DE4
	3.50	A350L	DE4
	4.00	A400L	DE4
Closing Plate for “B” Hub opening		BCAP	DE1A
B	0.75	B075	DE1A
	1.00	B100	DE1A
	1.25	B125	DE1A
	1.50	B150	DE1A
	2.00	B200	DE1A
	2.50	B250	DE1A
B300	3.00	B300	DE1A

[1] Supplied with AAP adapter plate and “A” hub.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



New!

Schneider Energy Monitor

The Schneider Energy Monitor (formerly Wiser Energy) helps manage electricity usage, from the circuit to the plug level with an easy-to-use app. This gives meaningful insight to take control of energy usage and reduce electric bills.

- Monitor what is powered on in the home
- Reduce electric bills with 24/7 real time tracking of home energy usage.
- Easy installation to home electrical panel.
- Circuit-level control using Control Relays for backup power and advanced load management.
- * Integrate the Schneider Inverter, Boost battery, and Connected Devices with the Schneider Home app.

More information can be found at:

https://www.se.com/us/en/home/offers/connected-home/

Table 1.91: Schneider Energy Monitor (formerly Wiser Energy)

Description	Contents	CT Rating	Catalog Number
Schneider Energy Monitor (formerly Wiser Energy) is intended for installation in new or existing 120 V split-phase residential panels; cETLus listed			
Schneider Energy Monitor	Monitoring hub, Main CTS	200 A	WISEREMZ
Schneider Energy Monitor Solar version	Monitoring hub, Main CTS, Solar CTS		WISEREMPVZ
* Schneider Energy Monitor Solar version with PoE	Monitoring hub, Main CTS, Solar CTS, PoE		SEMONITOR
Schneider Energy Monitor Solar add-on CT Kit	Solar CTS (hub purchased separately)		WISERCTPV
Schneider Energy Monitor CT extension cable - 4 ft.	Solar CTS (hub purchased separately)	N/A	WISEREMCTEXT4
Schneider Energy Monitor CT extension cable - 12 ft.			WISEREMCTEXT12
Schneider Energy Monitor CT extension cable - 25 ft.			WISEREMCTEXT25
Schneider Energy Monitor CT extension cable - 40 ft.			WISEREMCTEXT40

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.



New!

Schneider Boost and Inverter

Schneider Boost and Inverter provide an easier solution for the increasingly complex needs of solar and battery installations. With fewer steps of power conversion, Boost battery can charge more efficiently from solar for maximum electricity bill savings. When installed with Schneider Pulse, Boost and Inverter provide backup power to protect the home from outages.

Description	Catalog Number
Inverter, 7.7 kW for Residential Solar and Battery	HY8K1NA1
Home Battery, Boost, 10 kWh, LFP	BAT10K1
Backup Controller, Pulse, 120/240 Vac, 200 A, MID, 12 space QO breaker panel	BC200A1NAWM
Battery accessories for 2-stack installation	BA10KNA2S
Battery accessories for 3-stack installation	BA10KNA3S

Visit **Schneider Home Solar and Energy Storage** on www.se.com/us.

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.



New!

Square D™ Control Relays

Management and control at the circuit level.

Pair the Schneider Energy Monitor with Square D Control Relays to turn any of our QO™ load panels into a smart, connected panel, providing enhanced home automation and control over individual circuits.

- Smart: Schedule, monitor, and manage energy usage on each circuit
- Flexible: Modular and scalable load control can be added at any time to any circuit
- Easy to Maintain: Easily replace the impacted relay with minimal rewiring.

Table 1.92: Square D Control Relays

Description	Catalog Number	Spaces	Circuits	Voltage	Works With	Cert.	Requires	W x H x D (mm)	W x H x D in.	A (Max)
Square D Control Relay 120 V Dual Relay	QO200PWX120	2	2	120/60 Hz	Wiser Home App*	cULus	WISEREMPVZ WISEREMZ	127 x 36 x 66	5 x 1.4 x 2.6	20
Square D Control Relay 240 V	QO200PWX240		1	240/60 Hz						30
	QO260PWX240	4						127 x 73 x 66	5 x 2.8 x 2.6	60

* WISEREMZ and WISEREMPVZ compatible with the Wiser Energy app until Fall 2024.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



New!

Dimmers, Switches, and Outlets

Management and control at the device level.

Square D X Series Wiring Devices

X Series connected products include outlets (receptacles).

With Matter compliance and intelligent connectivity, the new X Series connected wiring devices can be controlled through any major smart home platform such as Amazon, Alexa, Google Home, and Apple HomeKit.

This next chapter of X Series wiring devices offers the same stylish design and color selection as our non-connected X Series devices.

View the X Series products at https://www.se.com/us/en/product-range/26420638 or scan the QR code.

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.

Table 1.93: Square D X Series Wiring Devices

Description	Catalog Number	Gang	Tech	Amp. Rating (A)	Voltage Rating (Vac)	No. of Poles	Device Type	Nominal Load 1 (W)	Load Type 1	Nominal Load 2 (W)	Load Type 2
Switch, X Series, single pole, 3 way, WiFi, Matter, white, matte finish, neutral required	SQR141U1WHWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	–	–
Switch, X Series, single pole, 3 way, WiFi, Matter, black, matte finish, neutral required	SQR141U1BKWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	–	–
Switch, X Series, single pole, 3 way, WiFi, Matter, light almond, matte finish, neutral required	SQR141U1LAWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	–	–
Switch, X Series, single pole, 3 way, WiFi, Matter, grey, matte finish, neutral required	SQR141U1GYWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	–	–
Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi , Matter, white, matte finish, neutral required	SQR226U1WHWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	150	Dimmable LED
Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, black, matte finish, neutral required	SQR226U1BKWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	150	Dimmable LED
Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi , Matter, light almond, matte finish, neutral required	SQR226U1LAWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	150	Dimmable LED
Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, Grey, matte finish, neutral required	SQR226U1GYWM	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	150	Dimmable LED
Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, white, matte finish, neutral required	SQR441U1WHWM	1	2.4 GHz Wi-Fi	15	125	2	Duplex	–	–	–	–
Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, black , matte finish, neutral required	SQR441U1BKWM	1	2.4 GHz Wi-Fi	15	125	2	Duplex	–	–	–	–
Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, light almond, matte finish, neutral required	SQR441U1LAWM	1	2.4 GHz Wi-Fi	15	125	2	Duplex	–	–	–	–
Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, Grey, matte finish, neutral required	SQR441U1GYWM	1	2.4 GHz Wi-Fi	15	125	2	Duplex	–	–	–	–
Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, white, matte finish, wall plate, neutral required	SQR226U1WHWMP	1	2.4 GHz Wi-Fi	15	125	1	Multi-way	600	Halogen, Incandescent	150	Dimmable LED
Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, white, matte finish, wall plate, neutral required	SQR441U1WHWMP	1	2.4 GHz Wi-Fi	15	125	2	Duplex	–	–	–	–
Switch, X Series, single pole, 3 way, WiFi, Matter, white, matte finish, wall plate, neutral required	SQR141U1WHWMP	1	2.4 GHz Wi-Fi	15	120	1	Multi-way	600	Halogen, Incandescent	–	–

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



Enclosure


PowerPacT Q-Frame
Molded Case Circuit Breaker

Service Entrance Devices

Table 1.94: Residential Enclosed Circuit Breakers with PowerPacT Q Frame MCBs

Enclosure	Mains Rating	Short Circuit Rating	Commercial Reference	Included in Package
Rainproof NEMA 3R	150 A	25 kA	Q2150MRBE	Factory Installed: (1) QDL22150, (1) service entrance barrier, (1) emergency disconnect label & (1) service disconnect label
Rainproof NEMA 3R	200 A	25 kA	Q2200MRBE	Factory Installed: (1) QDL22200, (1) service entrance barrier, (1) emergency disconnect label & (1) service disconnect label
Rainproof NEMA 3R	70-200 A	10-100 kA	Q2200RBE *[1]*	Factory Installed: (1) emergency disconnect label & (1) service disconnect label Factory Included: (1) service entrance barrier*[2]*

Table 1.95: Replacement Kit for Residential Enclosed Circuit Breakers with PowerPacT Q Frame

Mains Rating	Short Circuit Rating	Commercial Reference	Included in Package
70 -200 A	10-100 kA	PKSB1Q2	(1) Service entrance barrier & (1) emergency disconnect label.*[1]*

Table 1.96: PowerPacT Q-Frame Molded Case Circuit Breakers for Residential Enclosed Circuit Breakers

Service	Type 3R — Rainproof Circuit Breaker not included	Ampere rating	Short Circuit Rating			
			10 k AIR	25 k AIR	65 k AIR	100 k AIR
2P 240 Vac Maximum	Q2200RBE	70 A	QBL22070	QDL22070	QGL22070	QJL22070
		80 A	QBL22080	QDL22080	QGL22080	QJL22080
		90 A	QBL22090	QDL22090	QGL22090	QJL22090
		100 A	QBL22100	QDL22100	QGL22100	QJL22100
		110 A	QBL22110	QDL22110	QGL22110	QJL22110
		125 A	QBL22125	QDL22125	QGL22125	QJL22125
		150 A	QBL22150	QDL22150	QGL22150	QJL22150
		175 A	QBL22175	QDL22175	QGL22175	QJL22175
		200 A	QBL22200	QDL22200	QGL22200	QJL22200

[1] Suitable ONLY for breakers from 70A-200A. Not compatible with 225A breakers.
[2] Suitable only for 2P Q Frame MCBs only.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



QO200TRNM



QO3100BNF
With Cover Removed

Non-Service Entrance Enclosed Devices

1Ø3W—120/240 Vac—240 Vac—UL Listed

Table 1.97: Enclosed Molded Case Switch, Switch Included, Does NOT provide overcurrent protection

Service		Ampere Rating	General Purpose	Rainproof	Box. No. [3]
240 Vac	GB	60 A[4] [5]	QO260NATS	QO200TR	2, 9R[6]
				QO200TRNM	1NM
				QO260NATR	1R
120/240 Vac	SN	100 A[7]	QO2000NS	QO2000NRB	13, 10R

Table 1.98: Enclosed GFCI Circuit Breakers, GFCI Circuit Breaker Included—10 kA Short Circuit Current Rating

Service		Ampere Rating	Type 3R—Rainproof Circuit Breaker Included	Circuit Breaker Only	Box. No. [3]
120/240 Vac	SN	50 A	QOE250GFINM	QO250GFI	1NM (Non-metallic) 1R (Metallic)
			HOME250SPA	HOM250GFI	
		60 A	QOE260GFINM	QO260GFI3W	

Table 1.99: 2-Pole Circuit Breaker Enclosures—22 kA Short Circuit Current Rating

Service [8]		Ampere Rating	General Purpose [9]	Rainproof	Box. No. [3]
120/240 Vac	SN	100 A 125 A	QO2100BNF/S QO2125BNF OBS QO2125BNS	QO2100BNRB QO2125BNRB	13, 10R 18, 13R
240 Vac	SN	100 A	QO3100BNF/S	QO3100BNRB	13, 10R
60A Max. Circuit Breaker Enclosures—10 kA Short Circuit Current Rating Circuit breaker not included. Order separately from QO Plug-On Circuit Breakers, page 1-3. Will not accept QO-GFI circuit breaker nor QO circuit breakers with factory-installed accessories.					
240 Vac	GB	60 A[4]	—	QO2TR	9R[6]

OBS This product is obsolete.

Table 1.100: Q Frame Enclosures and Q Frame Circuit Breakers

Service	Enclosure Only [10]			Circuit Breaker (Order Separately)				
	Type 1—General Purpose [9]	Type 3R—Rainproof	Box No. [3]	Ampere Rating	10 k AIR	25 k AIR	65 k AIR	100 k AIR
SN 2P 240 Vac Maximum	Q22200NS [11] or Q23225NF/S	Q22200NRB [11] or Q23225NRB	19, 11R 20, 12R	70 A	QBL22070	QDL22070	QGL22070	QJL22070
				80 A	QBL22080	QDL22080	QGL22080	QJL22080
				90 A	QBL22090	QDL22090	QGL22090	QJL22090
				100 A	QBL22100	QDL22100	QGL22100	QJL22100
				110 A	QBL22110	QDL22110	QGL22110	QJL22110
				125 A	QBL22125	QDL22125	QGL22125	QJL22125
				150 A	QBL22150	QDL22150	QGL22150	QJL22150
				175 A	QBL22175	QDL22175	QGL22175	QJL22175
				200 A	QBL22200	QDL22200	QGL22200	QJL22200
				225 A	QBL22225	QDL22225	QGL22225	QJL22225
SN 3P 240 Vac	Q23225NF/S	Q23225NRB	20, 12R	70 A	QBL32070	QDL32070	QGL32070	QJL32070 [12]
				80 A	QBL32080	QDL32080	QGL32080	QJL32080 [12]
				90 A	QBL32090	QDL32090	QGL32090	QJL32090 [12]
				100 A	QBL32100	QDL32100	QGL32100	QJL32100 [12]
				110 A	QBL32110	QDL32110	QGL32110	QJL32110 [12]
				125 A	QBL32125	QDL32125	QGL32125	QJL32125 [12]
				150 A	QBL32150	QDL32150	QGL32150	QJL32150 [12]
				175 A	QBL32175	QDL32175	QGL32175	QJL32175 [12]
				200 A	QBL32200	QDL32200	QGL32200	QJL32200 [12]
				225 A	QBL32225	QDL32225	QGL32225	QJL32225 [12]

[3] See Table 1.73 Knockout Information, page 1-34
[4] Not suitable for service equipment.
[5] Maximum 10 hp 240 Vac.
[6] Top endwall has no hub opening.
[7] Maximum 20 hp 240 Vac.
[8] Not for use with one pole QO circuit breakers. Circuit breakers not included. Order QO type circuit breakers separately from pages 1-2 and 1-3. Accepts QO circuit breakers with factory-installed accessories. Order equipment ground bar PKOGTA2, if required.
[9] Order F for flush, S for surface.
[10] Factory-installed groundable neutral assembly includes (2) ground lugs and (2) neutral lugs. Equipment ground kit PKOGTA2 also included.
[11] Accepts 200 A max. 2P Q Frame circuit breakers.
[12] Equipment ground bar kit PKOGTA2 factory-included.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 1.101: QOM2 Enclosures and QOM2 Circuit Breakers

Service	Enclosure Only *[13]*			QOM2 Circuit Breaker (Order Separately) *[14]*	
	Type 1 General Purpose *[15]*	Type 3R Rainproof	Box No. *[16]*	Ampere Rating	22 k AIR
	Cat. No.	Cat. No.			Cat. No.*[17]*
 2P 240 Vac Maximum	QOM22225NF/S	QOM22225NRB	22, 16R	100 A	QOM2100VH
				125 A	QOM2125VH
				150 A	QOM2150VH
				175 A	QOM2175VH
				200 A	QOM2200VH
				225 A	QOM2225VH



QOM22225NS
With Cover Removed



Q22200NS
With Cover Removed



Q23225NF

(Order Q-Frame circuit breaker separately)

[13] Equipment ground bar kit PKOGTA2 factory-included.
[14] Add suffix 1021 for 120, 208 or 240 Vac shunt trip.
[15] Order F for flush, S for surface.
[16] See Table 1.73 Knockout Information, page 1-34
[17] DE3A Discount Schedule.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Product Selection made EASY.

Our online product selector tools are designed to assist you through the product selection process with the click of a button.



Save Time

Click-to-answer questions guide you through selecting the right product for your application!

Dive Deeper

Direct links to detailed product information at your fingertips.

Share your Projects

Email data sheets directly from product selectors.

Manage Large Projects

Create a project list online to keep you organized.

Efficient

Distributors can add product selector results directly to their cart and checkout.

Join the Movement

Try our online product selectors and other tools and see why thousands of customers are using them to make their jobs easier.

se.com/us/en/work/support/resources-and-tools/calculators-and-online-tools/

Other Digital Self-Service Tools:

mySchneider App

Access tailored services, 24/7 self-service and expert help. Anywhere, anytime, any project.

Digest Plus

Find the latest product information including catalogs, trip curves and more.

Technical FAQs

Find the answers you need from our online database of frequently asked questions.

Product Competitor Cross Reference Tool

Find the replacement for competitor and obsolete part numbers.

Schneider Electric USA, Inc.

800 Federal Street
Andover, MA 01810 USA
888-778-2733

se.com/us

June 2024
Document Number **0100CT2401**

Life Is On Schneider Electric

©2024 Schneider Electric. All Rights Reserved. Schneider Electric and Life is On, Square D are trademarks and the property of Schneider Electric SE, its subsidiaries, and affiliated companies. All other trademarks are the property of their respective owners.

Section 2

Metering Equipment



Individual Meter Socket



MP Meter-Pak Metering Equipment



EZ Meter-Pak Metering Equipment

Meter Sockets 2-2

- Ring and Ringless Type Individual Meter Sockets 2-2
- Horizontal Ganged, Test Block Bypass Sockets and Accessories 2-4
- Dimensions 2-6

MP Meter-Pak™ Meter Centers 2-7

- Ring and Ringless Devices 2-7
  - Ring and Ringless Type Devices 2-7
  - Tenant Circuit Breakers 2-9
  - Accessories for MP Meter-Pak Meter Centers 2-9
  - Dimensions and Knockouts for MP Meter-Pak Meter Centers 2-10

EZ Meter-Pak™ Meter Centers 2-11

- Indoor/Rainproof EZM General Information 2-11
- Selection Information 2-13
- 1 Phase Main Devices 2-14
- 1 Phase Branch Devices 2-16
- 3 Phase Main Devices 2-17
- 3 Phase Branch Devices 2-19
- 3 Phase Main Devices (Busway Side Tap) 2-21
- 3 Phase Main Devices (Busway Center Tap) 2-22
- Tenant Circuit Breakers and EZM Accessories 2-23
- Dimensions 2-25

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Individual Meter Sockets

This metering is generally utility specific. Always check with local utility company before installing. Contact your nearest Field Sales Office for additional catalog numbers, if required by utility.

- Available single or three phase, 600 Vac max., with and without horn or lever bypass, overhead and underground service feed.
- 10 kA short circuit current rating (or higher with utility approval).
- UL Listed, NEMA 3R enclosure.
- Units supplied with bonded neutral.
- Units supplied with hub opening in top endwall require the use of a bolt-on hub, or closing plate.
- Units supplied with solid top are for underground feed only.
- For accessories, refer to page 2-5.


UTRS101B


UTRS202B
(Cover not shown)


UTH5203T
(Cover not shown)


URTRS213B

Table 2.1: Individual Meter Sockets

Ampere Rating *[1]*	Jaw Qty.	Service Type	Cat. No. *[2]*	Lug Wire Range (Al/Cu)			Enclosure Information			Box No. *[3]*
				Line, Load, and Neutral (AWG/kcmil)	Wire Binding	Gnd. (AWG)	Material	Top Endwall Conf. Order Separately		
								Hub Opening *[4]*	Closing Plate *[4]*	
Ringless Type, 1Ø3W 600 Vac Max., Without Bypass or Jaw Release										
125	4	UG	UTZRS101A OBS *[5]*	8–2/0	1/2 in. Hex	14–2	Steel	Solid Top *[5]*	—	1R
125	4	OH	UTRS101B	8–2/0	Slotted	14–2	Steel	Series A	ACP	1R
125	4	OH	UATRS101B OBS	8–2/0	Slotted	14–2	Aluminum	Series A	ACPA	1R
125	4	OH	URS101BCPL	8–2/0	Slotted	14–2	Steel	Series A	ACP	1R
125	5	OH/UG	1003880A OBS *[6]*	8–2/0	Slotted	14–2	Steel	Series A	ACP	1R
125	4	OH/UG	UTZRS101CFL	8-2/0	1/2 in.	14-2	Steel	Series A	ACP *[7]*	1R
200	4	OH	UTRS202B	8–250	1/2 in. Hex	14–2	Steel	Series A	ACP	3R
200	4	OH	UATRS202B OBS	8–250	1/2 in. Hex	14–2	Aluminum	Series A	ACPA	3R
200	4	UG	UTRS213A *[5]*	1/0–350	1/2 in. Hex	14–2	Steel	Solid Top *[5]*	—	5R
200	4	OH/UG	UTRS213B *[6]*	1/0–350	1/2 in. Hex	14–2	Steel	Series A	ACP	5R
200	4	OH/UG	UATRS213B *[6]*	1/0–350	1/2 in. Hex	14–2	Aluminum	Series A	ACPA	5R
200	4	OH/UG	U92197CCCPL *[8]*	1/0–350	1/2 in. Hex	14–2	Steel	(2) Series A	(2) ACP *[8]*	7R
200	4	OH/UG	1004710E	8-250	1/2 in. Hex 5/16 Allen	None	Steel	Series A	ACP *[7]*	4R
200	4	OH/UG	UT92197CCFL	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	(2) Series A	(2) ACP *[8]*	7R
200	4	OH/UG	UTRS212C	8-250	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP *[7]*	4R
200	4	OH/UG	UTRS213CFL	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP *[7]*	5R
200	4	UG	UTRS220A OBS	3/8 in. Studs	9/16 in. Hex	14-2	Steel	Solid Top *[5]*	—	15.13x-13x5 inches
200	4	UG	UTRS223A	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Solid Top *[5]*	—	2R
200	4	OH/UG	UTRS233C	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP *[7]*	17.13x-13x5 inches
Ringless Type, 1Ø3W 600 Vac Max., With Test Switch										
20	8	UG	1007361C	#10 CU *[9]*	Studs	14-2	Steel	Solid Top *[5]*	—	16.5x1-4x3.5 inches
Ringless Type, 3Ø4W 600 Vac Max., With Test Switch										
20	13	UG	1007003C	#10 CU *[9]*	Studs	14-2	Steel	Solid Top *[5]*	—	16.5x1-4x3.5 inches
Ringless Type, 1Ø3W 600 Vac Max., With Horn Bypass, Without Jaw Release										
125	4	OH/UG	UHTRS101B	8–2/0	Slotted	14–2	Steel	Series A	ACP	1R
125	4	OH/UG	1004162A	8-2/0	Slotted	14-2	Steel	Series A	ACP	1R
125	4	OH/UG	UFHTRS101B	8-2/0	Slotted	14-2	Steel	Series A	ACP	1R
125	5	OH/UG	UGHTRS101B	8-2/0	Slotted	14-2	Steel	Series A	ACP	1R
125	5	OH	UGHTRS101L OBS *[10]*	8–2/0	Slotted	14–2	Steel	A125 *[10]*	—	1R
125	4	OH	URS101BDQ OBS *[11]*	8–2/0	1/2 in. Hex	None	Steel	Series A	ACP	1R
125	5	OH/UG	UGHTRS111C OBS *[7]*	8–2/0	Slotted	14–2	Steel	Series A	ACP *[7]*	4R
200	4	OH/UG	UBHMRS212B OBS *[6]*	8–250	1/2 in. Hex	None	Steel	Series A	ACP	4R
200	4	OH	UHTRS202B	8–250	1/2 in. Hex	14–2	Steel	Series A	ACP	3R
200	4	OH/UG	UHTRS212B *[6]*	8–250	1/2 in. Hex	14–2	Steel	Series A	ACP	4R
200	4	OH/UG	UHTRS213B *[6]*	1/0–350	1/2 in. Hex	14–2	Steel	Series A	ACP	5R

[1] Rating is continuous.
[2] Device requires approval from the serving utility, consult your nearest Schneider Electric sales office.
[3] For box dimensions, see page 2-6
[4] Order appropriate bolt-on hub or closing plate separately and install on TOP endwall.
[5] Device supplied with solid top endwall (without hub opening).
[6] When unit is installed for underground feed, the appropriate closing plate must be ordered separately and installed over hub opening in TOP endwall of device.
[7] Device supplied with closing plate ACP mounted on TOP endwall.
[8] Device supplied with two closing plates ACP mounted in TOP endwall.
[9] Factory wiring is #12 CU. Field wiring can be up to #10.
[10] Device supplied with 1-1/4 in. bolt-on hub (Cat. No. A125) mounted on TOP endwall.
[11] Contains "Duquesne Light Co." approved label.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Table 2.1 Individual Meter Sockets (cont'd.)

Ampere Rating *[12]*	Jaw Qty.	Service Type	Cat. No. *[13]*	Lug Wire Range (Al/Cu)			Enclosure Information			Box No. *[14]*
				Line, Load, and Neutral (AWG/kcmil)	Wire Binding	Gnd. (AWG)	Material	Top Endwall Conf. Order Separately		
								Hub Opening *[15]*	Closing Plate *[15]*	
200	4	UG	UHTRS223A *[16]*	1/0–350	1/2 in. Hex	14–2	Steel	Solid Top *[16]*	—	2R
200	4	UG	URS212ADQ OBS *[17]*	8–250	1/2 in. Hex	None	Steel	Solid Top *[16]*	—	4R
200	4	OH/UG	1004159A	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP *[18]*	5R
200	4	UG	1006388	Line 4/0 Comp Line Neut 2/0 Comp Load 6-250	9/16 in. Hex	(2) 14-2	Steel	Solid Top *[16]*	—	61x9x5 inches
200	4	OH	1007665	8-250	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP	3R
200	5	OH/UG	UGHTRS213B	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP	5R
200	5	OH/UG	UGHTRS213C	8-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP *[18]*	5R
Ringless Type, 1Ø3W 600 Vac Max., With Lever Bypass and Jaw Release										
200	4	OH	UTH4203T OBS	6–350	1/2 in. Hex	14–2	Steel	Series A-L	ACPL	8R
200	4	OH/UG	UTH4213T *[19]*	6–350	1/2 in. Hex	14–2	Steel	Series A-L	ACPL	9R
200	5	OH	UTH5203T OBS	6–350	1/2 in. Hex	14–2	Steel	Series A-L	ACPL	8R
200	5	OH/UG	UTH5213T *[19]*	6–350	1/2 in. Hex	14–2	Steel	Series A-L	ACPL	9R
320	4	OH/UG	UTH4330T *[20]*	Studs Only	3/8 in. dia. studs	14–1/0	Steel	Series A-L	ACPL	11R
320	4	OH/UG	1008068	Dual 6-350	5/16 in. Allen	14-1/0	Steel	Series A-L	ACPL *[18]*	34.5x1-6.44x6.-5 inches
200	5	OH/UG	1008801	6-350	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP *[18]*	9R
320	4	OH/UG	1009788A	3/8 in. Studs	9/16 in. Hex	None	Steel	Series A-L	ACPL *[18]*	34.5x1-3x5 inches
320	4	OH/UG	UATH4330U	3/8 in. Studs	9/16 in. Hex	14-1/0	Aluminum	Series A-L	ACPL *[18]*	11R
320	4	OH/UG	UTH43369T	Line 4-600 Load Dual 6-350	Line 1/2 in. Allen Load 5/16 in. Allen	14-1/0	Steel	Series A-L	ACPL	11R
Ringless Type, 3Ø4W 600 Vac Max., With Lever Bypass and Jaw Release										
200	7	OH/UG	UTH7213T *[19]*	6–350	1/2 in. Hex	14–2	Steel	Series A-L	ACPL	9R
320	7	OH	UTH7300T *[20]*	Studs Only	3/8 in. dia. studs	14–1/0	Steel	Series A-L	ACPL	10R
200 A	7	OH/UG	UH7213C	6-350	1/2 in. Hex 5/16 Allen	None	Steel	Series A	ACP *[18]*	19x13-x5 inches
Ringless Type, 3Ø4W 600 Vac Max., Bolt-On Socket Without Bypass										
400	7	OH/UG	UK7T OBS *[20]*	Studs Only	1/2 in.–20 dia. studs	1/2 in.–20 dia. studs	Steel	Series A-L	ACPL	12R
400	7	OH/UG	UAK7T OBS *[20]*	Studs Only	1/2 in.–20 dia. studs	1/2 in.–20 dia. studs	Aluminum	Series A-L	ACPLA	12R
Ring Type, 1Ø3W 600 Vac Max., Without Bypass or Jaw Release										
125	4	OH/UG	URTRS101B *[19]*	8–2/0	Slotted	14–2	Steel	Series A	ACP	1R
200	4	OH/UG	URTRS213B *[19]*	1/0–350	1/2 in. Hex	14–2	Steel	Series A	ACP	5R
125	5	OH	URS101BCR	8-2/0	Slotted	14-2	Steel	Series A	ACP	1R
200	5	OH	URS202BCR	8-250	1/2 in. Hex 5/16 Allen	14-2	Steel	Series A	ACP	3R

OBS – This product is obsolete.

[12] Rating is continuous.
[13] Device requires approval from the serving utility, consult your nearest Schneider Electric sales office.
[14] For box dimensions, see page 2-6
[15] Order appropriate bolt-on hub or closing plate separately and install on TOP endwall.
[16] Device supplied with solid top endwall (without hub opening).
[17] Contains “Duquesne Light Co.” approved label.
[18] Device supplied with closing plate ACP mounted on TOP endwall.
[19] When unit is installed for underground feed, the appropriate closing plate must be ordered separately and installed over hub opening in TOP endwall of device.
[20] Order lugs separately, see page 2-5.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



UT2R1121B

Horizontal Ganged Meter Sockets

- 1Ø, 600 Vac max., main lugs only, 2 through 6 meter positions, with and without horn or lever bypass, end or center feed, overhead and underground service feeds.
- 10 kA short circuit current rating (or higher with utility approval).
- UL Listed, NEMA® 3R enclosure.
- Supplied with ground lugs.
- Supplied with hub opening in top endwall, requires the use of a bolt-on hub, or closing plate.

This metering is generally utility specific. Always check with local utility company before installing. Contact your nearest Field Sales Office for additional catalog numbers, if required by utility.

Table 2.2: Horizontal Ganged Meter Sockets

Branch Ratings				Mains Rating (A)	Cat. No.	Main Lugs Phase and Neutral Al/Cu (AWG/kcmil)	Branch Lugs Phase and Neutral Al/Cu (AWG)	Top Endwall *[21]*		Box No. *[22]*
Amperes *[23]*	No. of Positions	Socket Jaw Qty. *[24]*	Service Type					Hub Type (Order Separately)	Closing Plate (Order Separately)	
Ringless Type, 1Ø3W 600 Vac Max., Without Bypass or Jaw Release										
100	2	4	OH/UG	200	UT2R1121B	6–250	8–2/0	Series A	ACP	13R
	3			205	UT3R1121B OBS	6–250				13R1
	4			205	UT4R1131B OBS	6–350				14R
	5			250	UT5R1131B OBS	6–350				15R
	6			300 CU / 250 AL	UT6R1131B OBS	6–350				16R
200	2	4	OH/UG	205	UT2R2122B	6–250	8–250	Series A	ACP	17R
	4			360 CU / 310 AL	UT4R2352T	1/0–500		Series A-L	ACPL	18R
	5			500	UT5R2392TU	1/0–500 or (2)1/0–350		Series A-L	ACPL*[25]*	19R
	6			620	UT6R2392TU	1/0–500 or (2)1/0–350		Series A-L	ACPL*[25]*	20R
	3			300 CU / 250 AL	UT3R2332T	6–350		Series A-L	ACPL	14.13x32.4-x5.38 inches
Ringless Type, 1Ø3W 600 Vac Max., With Horn Bypass, Without Jaw Release										
200	2	4	OH/UG	200	UHT2R1421C	6–250	8–2/0	Series A	ACP *[26]*	14.13x20.16-x5.38 inches

[21] For hubs and closing plates, see page 2-5.
[22] For box dimensions, see page 2-6
[23] Rating is continuous.
[24] Fifth jaw kit available to convert 4-jaw socket to a 5-jaw socket. See page 2-5.
[25] Device supplied with 1 closing plate ACPL mounted in TOP endwall. A second closing plate needs to be ordered separately.
[26] Device supplied with two closing plates ACP mounted in TOP endwall.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



EMT3225CB



EMT1225CB
Without Covers

Meter Mains with Test Block Bypass

Table 2.3: Ring Type, 1Ø3W and 3Ø4W, Meter Main with Test Block Bypass (Meets EUSERC Requirements)

System (Incoming) and Service (Outgoing)	Meter Socket Type	Ampere Rating (Max.)	Short Circuit Current Rating	Cat. No. *[27][28]*	Main Circuit Breaker Type (Order Separately) *[29]*
120/240 Vac 1Ø3W	5-Jaw	225 A	100 kA max.	EMT1225CB	2P Type QB, QD, QG, QJ (QO, QO-VH, QOH) *[30]*
208Y/120 Vac 3Ø4W *[31]* or 240/120 Vac 3Ø4W Delta	7-Jaw	225 A	65 kA max.	EMT3225CB	3P Type QB, QD, QG or QJ

Table 2.4: EMT Terminal Wire Size *[32]*

Line Phase Lug	Line Neutral Lug	Service Ground Lug	Equipment Ground Lug	Load Neutral Lug
6 AWG–300 kcmil Al/Cu	6 AWG–350 kcmil Al/Cu	4 AWG–300 kcmil Al/Cu	6 AWG–300 kcmil Al/Cu	4 AWG–300 kcmil Al/Cu

Meter Socket Accessories

Table 2.5: Adapter Plate, Lug Kits, and Sealing Rings

Accessory	Description	Cat. No.
Adapter Plate	To allow the use of a Series A Hub on a device that is setup for a series A-L Hub.	AAP
Lug Kits	For use on meter sockets supplied with Line, Load, and Neutral Studs only. Be sure to order enough lugs for each device (a typical 1Ø device requires 6 lugs).	
	Includes one, two-barrel lug (6-250 kcmil)	ARP00118 OBS
	Includes one, single barrel lug (4-600 kcmil)	ARP00129 OBS
	Includes three, two-barrel lugs (6-350 kcmil)	ARP00427
Sealing Ring	Snap-on Aluminum (Standard)	2920910001
	Snap-on Stainless Steel (Non-standard)	ARP00026
	Screw Type Aluminum (Non-standard)	29008W

OBS – This product is obsolete.

Table 2.6: Fifth-Jaw Kit, Closing Plates, and Hubs

Accessory		Description	Cat. No.
Fifth-Jaw Kit		Converts a 4-jaw meter socket to a 5-jaw meter socket. For use on meter sockets supplied without lever bypass or jaw release only.	A5J
Closing Plates (to seal hub openings)		For Series A (steel)	ACP
		For Series A (aluminum)	ACPA
		For Series A-L (steel)	ACPL
		For Series A-L (aluminum)	ACPLA OBS
Hubs (listed by conduit size)	Series A	1.00 inch	A100
		1.25 inch	A125
		1.50 inch	A150
		2.00 inch	A200
		2.50 inch	A250
	Series A-L	2.00 inch	A200L
		2.50 inch	A250L
		3.00 inch	A300L
		3.50 inch	A350L OBS
		4.00 inch	A400L
	Series B	3.00 inch	B300

OBS – This product is obsolete.

[27] For box dimensions, see page 2-6.
[28] Supplied with bondable neutral, suitable for use as service equipment , suiteable for overhead or underground service. UL Listed E6294.
[29] See page 2-23 to select main circuit breaker.
[30] Requires use of an EZM125QOA adapter (order separately), when using QO (40 A–125 A, 2-pole) 10 kA max. SCCR, QO-VH (40 A–60 A, 2-pole) 22 kA max. SCCR, or QOH (40 A–60 A, 2-pole) 42 kA max. SCCR.
[31] 100 kA max.
[32] Refer to circuit breaker listings for usable load lug wire sizes.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025


Table 2.7: Enclosure Dimensions

Dimensions (Inches)				
Box No.	H	W	D	Hub Opening (Max. Conduit Size) *[33]*
1R	10.88	8.00	3.50	Series A
2R	13.00	13.00	4.94	Solid Top
3R	14.00	8.00	4.38	Series A
4R	14.00	11.00	4.38	Series A
5R	15.00	11.00	4.38	Series A
6R	15.50	8.00	4.36	Series A
7R	17.13	13.00	4.94	(2) Series A
8R	19.00	10.50	4.94	Series A-L
9R	19.00	13.00	4.94	Series A-L
10R	34.50	15.00	5.68	Series A-L
11R	36.62	15.00	5.68	Series A-L
12R	43.00	20.25	6.00	Series A-L
13R	14.12	24.31	4.50	Series A
13R1	14.12	32.50	4.50	Series A
14R	14.12	40.62	4.50	Series A
15R	14.12	48.75	4.50	Series A
16R	14.12	57.00	4.50	Series A
17R	14.12	24.31	5.38	Series A
18R	14.12	40.62	5.38	Series A-L
19R	14.12	54.75	5.38	(2) Series A-L
20R	14.12	63.00	5.38	(2) Series A-L


Table 2.8: Knockout Information

Knockouts						
Symbol	S	A	B	C	D	
Conduit Size (in.)	5/16 *[34]*	1/2	3/4	1	1-1/4	
Symbol	E	F	G	H	I	J
Conduit Size (in.)	1-1/2	2	2-1/2	3	3-1/2	4


Dimensions and Knockouts for Meter Sockets




1R




2R




3R, 6R




4R, 5R




7R




8R




9R




10R




11R




12R

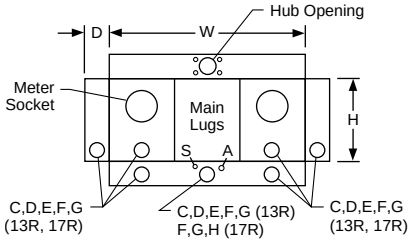


13R and 17R

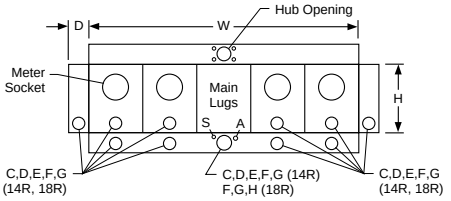


14R and 18R

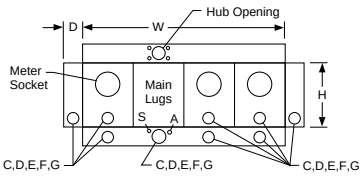


13R1

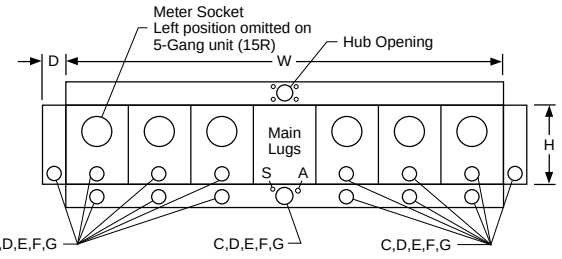

15R and 16R

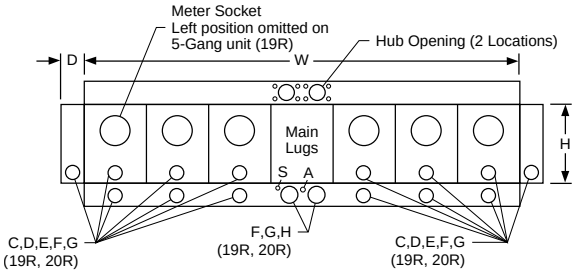

19R and 20R

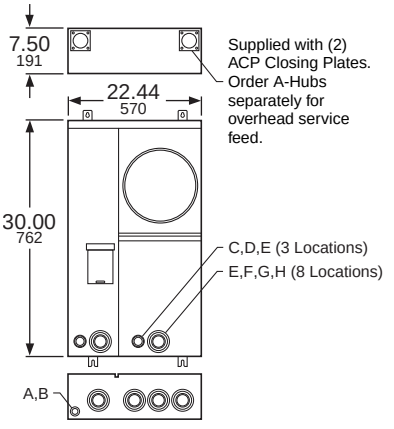

EMT1225CB and EMT3225CB

[33] Refer to page 2-5 for closing plates and hubs.
[34] Knockout for grounding conductor.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



MP44125

Ring and Ringless Type Devices

- Consult local utility for approval before installation.
- 120/240 Vac 1Ø3W.
- Main lugs only—two to six meter sockets.
- Enclosures are indoor/rainproof NEMA 3R construction.
- Suitable only for use as service equipment.
- Swingable mounting feet supplied at bottom of device.
- Factory-installed mechanical lugs, alternate lugs and NEMA/EUSERC lug landing kits available.
- Surface mount, convertible to semi-flush with field installed flange kit.
- Ring type devices supplied with 4-jaw meter sockets (5th jaw kits available, order separately).
- Ringless type devices supplied with 5-jaw meter sockets, available with and without horn or lever bypass.
- Provisions for mounting 2-pole circuit breaker for each meter socket position (order circuit breakers separately).
- Mounting channel supplied, except for box 1R (125 A, 2-position).
- Combination overhead/underground feed.

Table 2.9: MP Catalog Number Description

Number Segment	Character	Description	MP	H	4	4	125
Device Name	MP	Meter-Pak Meter Center					
Socket/Bypass Type	Blank	Ring Type					
	R	Ringless Type with 5th Jaw					
	H	Ringless with Horn Bypass and 5th Jaw					
	L	Ringless with Lever Bypass, Jaw Release and 5th Jaw					
Bus Ampacity	2	200 A					
	3	300 A					
	4	400 A					
	5	500 A					
	6	600 A					
	8	800 A					
Number of Meter Sockets	2	2-Positions MP, MPH, MPL, and MPR					
	3	3-Positions MP, MPH, MPL, and MPR					
	4	4-Positions MP, MPH, MPL, and MPR					
	5	5-Positions MP, MPH and MPR					
	6	6-Positions MP, MPH, MPL and MPR					
Max. Tenant Circuit Breaker Amperage	125	125 A					
	200	200 A					
	225	225 A					

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Table 2.10: Ring Type MP Meter-Pak Metering Equipment with 125 A (42 kA Maximum SCCR) or 200 A (22 kA Maximum SCCR) Meter Socket Positions

Amperes per Pos.	No. of Positions	Factory-Installed Main Lugs Ampacity (alternate lugs *[1]*)	Main Bus Ampacity (A)	Cat. No.	Line Lug Wire Size Al/Cu AWG/kcmil	Circuit Breaker Type (2P)	Hub Prov. *[2]*	Semi-Flush Flange Kit	Wt Lbs	Box No.
125	2	200	200	MP22125 *[3]*	(1) 4–250	QO, QO-VH, QOH	A/B300	MPSF12	46	1R
	3	300	300	MP33125 *[4]*	(1) 1/0–600 or (2) 1/0–250		A-L	MPSF14	95	2R
	4	400	400	MP44125 *[4]*	(1) 1/0–600 or (2) 1/0–250		A-L	MPSF14	97	2R
	5	400 Al 500 Cu	500	MP55125 *[4]*	(1) 1/0–600 or (2) 1/0–250		(4) A-L	MPSF16	130	3R
	6	400 Al 500 Cu	600	MP66125 *[4]*	(1) 1/0–600 or (2) 1/0–250		(4) A-L	MPSF16	132	3R
200	2	400	400	MP42200 *[4]*	(1) 1/0–600 or (2) 1/0–250	QOM2-MM, QOM2-MVH	(4) A-L	MPSF23	99	4R
	3	400	400	MP43200 *[4]*	(1) 1/0–600 or (2) 1/0–250			MPSF23	99	4R
	4	400	600	MP64200 *[4]*	(1) 1/0–600 or (2) 1/0–250			MPSF24	135	5R
	5	600 Al, 750 Cu	800	MP85200 *[4]*	(2) 3/0–500			MPSF26	173	6R
	6	600 Al, 750 Cu	800	MP86200 *[4]*	(2) 3/0–500			MPSF26	173	6R


Table 2.11: Ringless Type MP Meter-Pak Metering Equipment with 125 A (42 kAMaximum SCCR) or 200 A Type MPR, MPH (22 kA Maximum SCCR) or 225 A Type MPL (100 kA Maximum SCCR) Meter Socket Positions

Amperes Per Pos.	No. of Pos.	Factory-Installed Main Lugs Ampacity (alternate lugs *[1]*)	Main Bus Ampacity	No. Bypass Cat. No.	Horn Bypass Cat. No.	Lever Bypass Cat. No.	Line Lug Wire Size Al/Cu AWG/kcmil	Circuit Breaker Type (2P) *[5]*.	Hub Prov. *[2]*	Semi-Flush Flange Kit	Wt Lbs	Box No.
125	2	200	200	MPR22125	MPH22125	—	(1) 4–250	QO, QO-VH, QOH	A/B300	MPSF12	46	1R
	3	300	300	MPR33125	MPH33125	—	(1) 1/0–600 or (2) 1/0–250		A-L	MPSF14	95	2R
	4	400	400	MPR44125	MPH44125	—	(1) 1/0–600 or (2) 1/0–250			MPSF14	97	2R
	5	400 Al 500 Cu	500	MPR55125	MPH55125	—	(1) 1/0–600 or (2) 1/0–250		(2) A-L	MPSF16	130	3R
	6	400 Al 500 Cu	600	MPR66125	MPH66125	—	(1) 1/0–600 or (2) 1/0–250			MPSF16	132	3R
200	2	400	400	MPR42200	MPH42200	—	(1) 1/0–600 or (2) 1/0–250	QOM2-MM, QOM2-MVH	(2) A-L	MPSF23	99	4R
	3	400	400	MPR43200	MPH43200					MPSF23	99	4R
	4	400	600	MPR64200	MPH64200					MPSF24	135	5R
225	2	350	350	—	—	MPL32225	(1) 1/0–600 or (2) 1/0–250	QBP-TM, QDP-TM, QGP-TM or QJ-TM QO *[6]*, QO-VH *[6]* or QOH *[6]*		N/A	105	7R
	3	400	500	—	—	MPL53225				N/A	147	8R
	4	400	600	—	—	MPL64225				N/A	200	9R
200	5	600 Al, 750 Cu	800	MPR85200	MPH85200	—	(2) 3/0–500	QOM2-MM, QOM2-MVH		MPSF26	173	6R
	6	600 Al, 750 Cu	800	MPR86200	MPH86200	—	(2) 3/0–500			MPSF26	173	6R

NOTE: UL Listed short circuit current rating depends on lowest interrupting rating of circuit breaker installed.

[1] See page 2-9 for alternate lugs.
[2] For A and A-L Hubs see page 2-4, for B Hubs see Digest Section 3.
[3] Meets EUSERC standards.
[4] Meets EUSERC standards with addition of lug landing kit, MMSK2.
[5] See page 2-9
[6] Requires use of EZM125QOA adapter (order separately).

© 2025 Schneider Electric
All Rights Reserved
3/18/2025


QOM2200MVH


QO2100VH
2P, Plug-on Type
Circuit Breaker


QDP22200TM
2P, Plug-on Type
Circuit Breaker


MMLK500

Tenant Circuit Breakers

UL Listed Short Circuit Current Rating depends on lowest interrupting rating of circuit breaker installed. (Refer to page 2-13 for Square D certified ratings for downstream panelboards and load centers.)

Table 2.12: Tenant Circuit Breakers

Amperes	10 k AIR 120/240 Vac	22 k AIR 120/240 Vac	42 k AIR 120/240 Vac	100 k AIR 120/240 Vac
For use in 125 A Max. Type MP, MPR and MPH Meter-Pak Metering Equipment				
40	QO240	QO240VH *[7]*	QOH240	—
50	QO250	QO250VH *[7]*	QOH250 *[7]*	—
60	QO260	QO260VH	QOH260 *[7]*	—
70	QO270	QO270VH	QOH270 *[7]*	—
80	QO280	QO280VH	QOH280 *[7]*	—
90	QO290	QO290VH	QOH290	—
100	QO2100	QO2100VH	QOH2100	—
125	QO2125	QO2125VH	QOH2125	—
For use in 200 A Max. Type MP, MPR and MPH Meter-Pak Metering Equipment				
100	QOM2100MM	QOM2100MVH	—	—
125	QOM2125MM	QOM2125MVH	—	—
150	QOM2150MM	QOM2150MVH	—	—
175	QOM2175MM	QOM2175MVH	—	—
200	QOM2200MM	QOM2200MVH	—	—
Amperes	10 k AIR 120/240 Vac	25 k AIR 120/240 Vac	65 k AIR 120/240 Vac	100 k AIR 120/240 Vac
For use in 225 A MPL Lever Bypass Meter-Pak Metering Equipment				
40	QO240 *[8]*	QO240VH *[7] [9] [8]*	QOH240 *[10] [8]*	—
50	QO250 *[8]*	QO250VH *[7] [9] [8]*	QOH250 *[10] [7] [8]*	—
60	QO260 *[8]*	QO260VH *[7] [9][8]*	QOH260 *[10] [7] [8]*	—
70	QBP22070TM	QDP22070TM	QGP22070TM	QJP22070TM
80	QBP22080TM	QDP22080TM	QGP22080TM	QJP22080TM
90	QBP22090TM	QDP22090TM	QGP22090TM	QJP22090TM
100	QBP22100TM	QDP22100TM	QGP22100TM	QJP22100TM
110	QBP22110TM	QDP22110TM	QGP22110TM	QJP22110TM
125	QBP22125TM	QDP22125TM	QGP22125TM	QJP22125TM
150	QBP22150TM	QDP22150TM	QGP22150TM	QJP22150TM
175	QBP22175TM	QDP22175TM	QGP22175TM	QJP22175TM
200	QBP22200TM	QDP22200TM	QGP22200TM	QJP22200TM
225	QBP22225TM	QDP22225TM	QGP22225TM	QJP22225TM

Accessories for MP Meter-Pak Meter Centers


Table 2.13: Accessories

Accessory	Description	Cat. No.
Fifth Jaw Kit	Fifth Jaw Kit	5J
Horn Bypass Kit	For MPR and MPH only	MMHB
QO™ Adapter	For Bolt-on Q2M tenant circuit breakers (40–125 A, 2P)	EZM125QOA
Slider Type Manual Circuit Closing:	125 A Ring Style 2 Position Top Meter (Only) 125 and 200 A Ring Style	MM125MB *[11]* MM200MB *[11]*
Sealing Rings:	Snap-on Aluminum Screw Type Aluminum Snap-on Type Stainless Steel	2920910001 29008W ARP00026
Meter Cover-Lexan™	Meter Cover-Lexan™	29007
Optional Lug Kits:	(1) 1/0–600 AWG/kcmil or (2) 1/0–250 AWG/kcmil per phase	MMLK250 *[12][13]*
	(2) 3/0–500 AWG/kcmil per phase (2) 2–600 AWG/kcmil per phase	MMLK500 *[13]* MMLK600 *[13]*
Semiflush Kits:	125 A 2 Position 125 A 3–4 Position 125 A 5–6 Position 200 A 2–3 Position 200 A 4 Position 200 A 5–6 Position	MPSF12 MPSF14 MPSF16 MPSF23 MPSF24 MPSF26
NEMA/EUSERC Lug Landing Kit:	For 3 through 6 position 125 A and 200 A devices. Each pad rated 600 A maximum and includes (2) 1/2-13 studs and mounting hardware.	MMSK2 *[13]*
MP Meter-Pak Wireway: (Wall Mount Pedestal)	125 A 2 Position ONLY 125 A 3–6 Position 200 A 2–6 Position MPL53-225 MPL64-225	MP43X8PED MP43X11PED MP43X11PED MP43X11PED MP35X11PED*[14]*
MP Meter-Pak Wireway Extensions:	Used ONLY with MP43X8PED Used with MP43X11PED and MP35X11PED	MP12X8PEDEXT*[14]* MP12X11PEDEXT *[14]*


[7] Order only. Not stocked in PDS. Order Point: Lincoln.
[8] Requires use of EZM125QOA adapter (order separately).
[9] QO-VH tenant circuit breakers are rated 22 kAIR at 120/240 Vac.
[10] QOH tenant circuit breakers are rated 42 k AIR at 120/240 Vac.
[11] The meter center short circuit current rating is 10 kA when manual circuit closing is used. Not rated for continuous duty.
[12] Standard lug for 3 through 6 position 125 A and 2 through 4 position 200 A devices.
[13] Cannot be installed on 2 position 125 A device.
[14] Order only. Not stocked in PDS. Order point: Lexington. For hubs and closing plates, see page 2-4.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025


Dimensions and Knockouts for MP Meter-Pak Meter Centers

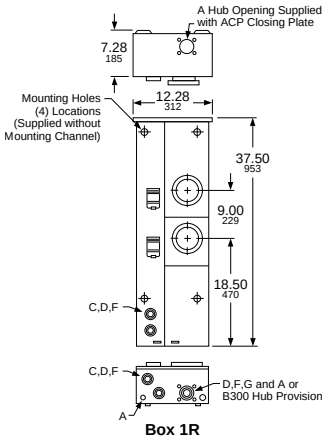


Box 1R

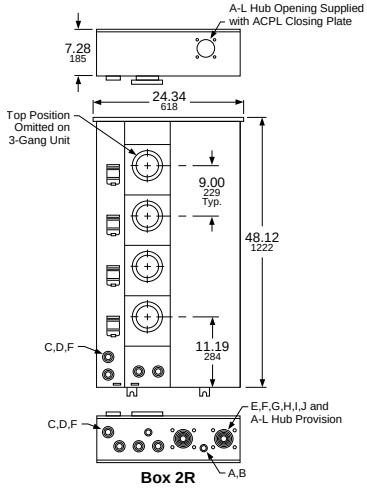


Box 2R

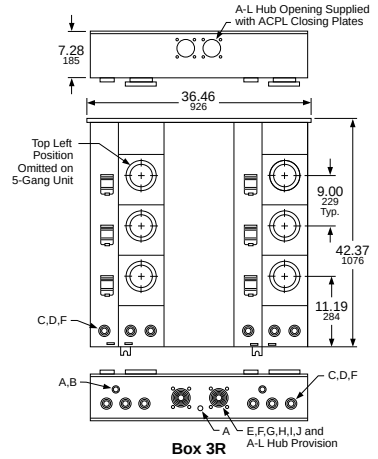


Box 3R

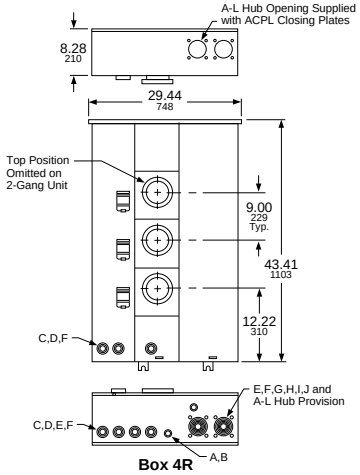


Box 4R

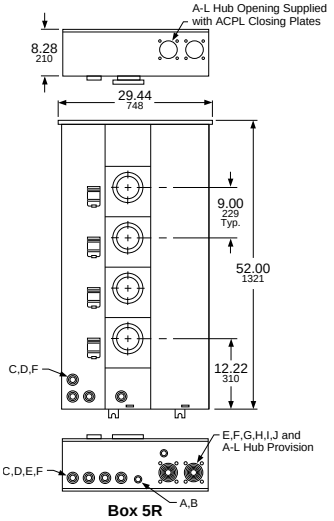


Box 5R

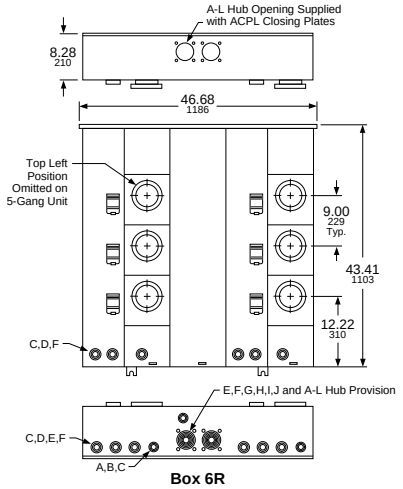


Box 6R

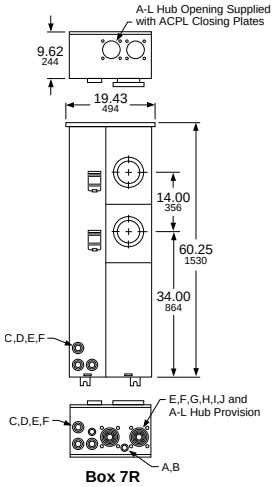

Box 7R

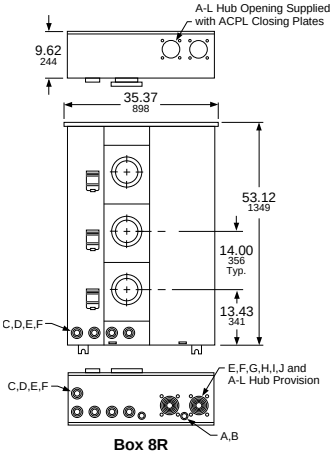

Box 8R

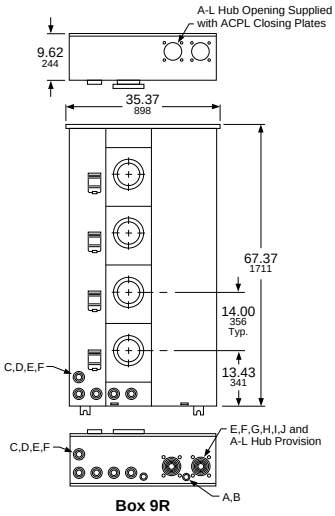

Box 9R

Knockouts										
Symbol	**A**	**B**	**C**	**D**	**E**	**F**	**G**	**H**	**I**	**J**
Conduit Size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

EZM General Information

NEMA 3R Construction

240 Vac Maximum, for use on AC systems, suitable for use as Service Equipment.

Utility Company Requirements Review local utility requirements to ensure that metering equipment meets their standards.

EZ Meter-Pak meter center enclosures meet NEC wire bending requirements, and are designed for wall mounting only (not suitable for floor mounting). All unmetered conductor compartments may be sealed by the utility company.

EZ Meter-Pak meter centers have UL Listed short circuit current ratings up to 100 kA at 240 Vac when properly applied. For three-tier series ratings refer to Data Bulletin 4100DB0301.

Suitable incoming services for an EZM main device and available outgoing feeder(s) to downstream panelboards from EZM branch section(s)—

Incoming Service to Main Device 120/240 Vac, 1Ø3W
Available outgoing feeder(s) to downstream panelboards:
- 120/240 Vac, 1Ø3W
  (4-jaw ring type meter sockets, two-pole circuit breakers),
  (5-jaw ringless meter sockets, two-pole circuit breakers).

Incoming Service to Main Device 240/120 Vac, 3Ø4W Delta
Available outgoing feeder(s) to downstream panelboards:
- 120/240 Vac, 1Ø3W (Fed from transformer's "A-Phase" and "C-Phase" only.) NOTE: Connection to High-Leg "B-Phase" not permitted for this service
  (4-jaw ring type meter sockets, two-pole circuit breakers)
  (5-jaw ringless meter sockets, two-pole circuit breakers)
  Standard 3Ø IN/1Ø OUT branch units **are not suitable for use on this Delta System.** Special branch units are available for this System by adding suffix: **"CA"** to catalog number (Typical Examples: EZM313125XCA, EZM313125CUXCA, EZM314225CA, EZM314225XCA, EZM314225CUXCA, EZM315225CA, EZM314225CUCA, etc.).
- 240/120 Vac, 3Ø4W Delta (7-jaw meter sockets, three-pole circuit breakers).

Incoming Service to Main Device 208Y/120 Vac, 3Ø4W
Available outgoing feeder(s) to downstream panelboards:
- 120/208 Vac, 1Ø3W (5-jaw meter sockets, two-pole circuit breakers)
- 208Y/120 Vac, 3Ø4W (7-jaw meter sockets, three-pole circuit breakers).

Main Devices

- 400, 600 and 800 A main disconnects may be end-mounted with branch units having 800 A or 1200 A continuous horizontal cross bus.
- 1000 and 1200 A main disconnect or terminal box **must be center mounted** when used with branch devices with main bus rated 800 A continuous.
- 1600 A main disconnect or terminal box **must be center mounted.**
- 2000 A main disconnect **must be center mounted** and requires use of branch units having 1200 A continuous horizontal cross bus.
- 400, 800 and 1200 A Type EZM-TBU terminal boxes supplied with lug landings to meet EUSERC requirements.

Main Circuit Breaker ratings: 400, 600, 800, 1000, 1200, 1600 and 2000 A
Main Fusible Switch ratings: 400, 600, 800, and 1200 A (1Ø3W only)
Main Lugs Terminal Box ratings: 225, 400, 600, 800, 1200, 1600, and 2000 A

Branch Units

- **125 and 225 A residential branch units** are available in ring type or ringless type construction and are supplied with 800 A continuous aluminum horizontal cross bus as standard (Example: EZM314125). For optional 1200 A continuous copper horizontal cross bus with aluminum vertical connectors, add suffix **"X"** to catalog number (Example: EZM314125X). For optional 1200 A continuous all-copper bussing, add suffix **"CUX"** to catalog number (Example: EZM314125CUX). NOTE: 5-gang 225 A EZM, EZMR and EZMH residential branch units are supplied with 1200 A continuous Cross Bus as standard, do not add suffix "X" or "CUX" to these units (Examples: EZMR315225 or EZMR315225CU). Plug-in style residential meter sockets are available as ring type **EZM** without bypass, ringless type **EZMR** without bypass, and ringless type **EZMH** with horn bypass.
  Tenant circuit breakers must be ordered separately for these branch units. 125 A max. units make use of Type QO, QO-VH or QO-H two-pole tenant circuit breakers (40–125 A). 225 A max. units make use of Type QDP-TM, QBP-TM, QGP-TM and QJP-TM two-pole tenant circuit breakers (70–225 A), and may also make use of two-pole Type QO (40–125 A at 10 kA max.), two-pole Type QO-VH (40–60 A at 100 kA max.), or two-pole Type QO-H (40–60 A at 100 kA max.) tenant circuit breakers.
- **225 A commercial branch units** are available in ring type or ringless type construction and are supplied with 1200 A copper horizontal cross bus with aluminum vertical connectors as standard (Example: EZML314225). For optional 1200 A continuous all-copper bussing, add suffix **"CU"** to catalog number (Example: EZML314225CU). Plug-in style commercial meter sockets are available as ring type **EZMT** with test block bypass (meets EUSERC requirements), ringless type **EZMR** without bypass, and ringless type **EZML** with lever bypass.

  225 A max. units make use of type QDP-TM, QBP-TM, QGP-TM and QJP-TM two-pole or three-pole tenant circuit breakers (70– 225 A), and may also make use of two-pole type QO (40–125 A at 10 kA max.), two-pole type QO-VH (40–60 A at 100 kA max.), or two-pole type QO-H (40–60 A at 100 kA max.) tenant circuit breakers.

Note: QO, QO-VH and QO-H tenant circuit breakers used in 225 A branch units require the use of adapter **EZM125QOA** (purchased separately).

- **400 A branch units** are available in ringless type construction only, and are supplied with 1200 A continuous all-copper bussing as standard (Example: EZML332400). These branch units are supplied with factory-installed type LJL tenant circuit breakers that have a field adjustable ampere rating trip setting from 125 A min. to 400 A max.
  A tamper-evident seal kit is available where needed, order seal kit **MICROTUSEAL** (refer to NEC 240-6 [c]). 400 A branch units are available as Type **EZML** with plug-in style lever bypass type meter sockets, or Type **EZMK** with bolt-on style with manual bypass type meter sockets.
- Units having **800 A continuous horizontal cross bus** WILL CONNECT with units having **1200 A continuous horizontal cross bus**.
- **Single phase units** (three bus bars in horizontal cross bus) WILL NOT CONNECT with **three phase units** (four bus bars in horizontal cross bus).

For Load Center Three-Tiered Series Ratings used downstream from Metering Equipment, refer to Data Bulletins: 4100DB0301 and 2700DB9901.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

EZM Configuration Information

Table 2.14: EZM Mains Devices

Number Segment	Character	Description	EZM	1	1000	CB	U	CU
Device Name	EZM	EZ Meter-Pak Meter Center						
Service Feed	1	1Ph, 3W						
	3	3Ph, 4W						
Mains Rating		225 A						
		400 A						
		600 A						
		800 A						
		1000 A						
		1200 A						
		1600 A						
		2000 A						
Main Type	CB	Main Circuit Breaker						
	FS	Main Fusible Switch						
	TB	Terminal Box						
	GCB	Main Circuit Breaker (65 kAIC)						
	JCB	Main Circuit Breaker (100 kAIC)						
Feed Direction	Blank	Overhead / Underground						
	C	Overhead / Underground						
	B	Underground Only						
	T	Overhead Only						
	U	Underground Only, Meets EUSERC Standards up to 1200 A max.						
	E	Underground Only, Meets EUSERC Standards up to 1200 A max.						
Special Construction	Blank	Aluminum Horizontal Cross Bus Bar up to 1000A max.						
	CU	Copper Horizontal Cross Bus Bar						
	MS	Includes Energy Reduction Maintenance Switch						

This table is for interpreting existing part numbers only. All possible combinations are not available.

Table 2.15: EZM Branch Devices




Number Segment	Character	Description	EZM	R	1	1	3	125	CU
Device Name	EZM	EZ Meter-Pak Meter Center							
Socket/Bypass Type	Blank	Ring Type							
	R	Ringless Type with 5th Jaw							
	H	Ringless with Horn Bypass and 5th Jaw							
	L	Lever Bypass with 5th Jaw, 7th Jaw if Three Phase							
	T	Ring Type Test-Block Bypass EUSERC							
	K	K-Base Bolt-On Type							
Service Feed	1	1Ph, 3W							
	3	3Ph, 4W							
Load Feed	1	1Ph, 3W							
	3	3Ph, 4W							
Number of Meter Sockets	Meter Sockets Available	1,2,3,4,5 or 6							
Maximum Tenant Circuit Breaker Amperage	125	125 A							
	225	225 A							
	400	400 A							
Special Construction	Blank	Aluminum Horizontal Cross Bus Bar							
	CA	For 240/120 Vac Delta Systems							
	CU	Copper Horizontal Cross Bus Bar							
	D	Removable Drip Hood with Indoor Top Endwall with Knockouts							
	M10	10-Inch Meter Centers							
	X	1200A Copper Horizontal Cross Bus Bar							

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Selection Information

- Review local utility requirements to ensure that metering equipment meets their standards.
- Check local utility to determine available fault current at the meter center.
- Using the SCCR table:
  - Select meter center configuration, main lugs only (Six Disconnect Rule), or remote main, main circuit breaker, or main fusible switch.
  - Read down to select SCCR equal to, or greater than desired rating.
  - Read across to select branch unit tenant circuit breaker type.
  - Continue reading across to select EZM main device type.

Table 2.16: UL Listed Meter Center Short-Circuit Current Ratings (SCCR) *[1]*

Figures	Short Circuit Current Rating (240 Vac Maximum) *[2][3]*	EZM Meter Center Overcurrent Protection Devices	
		EZM Branch Unit Tenant Circuit Breaker Types Available (Branch Unit Amperes max., Number of Poles, Tenant Circuit Breaker Amperes Rating Range)	EZM Main Device with Integral Mounted Main, Remote Mounted Main or without an Upstream Mounted Main (Six Disconnect Rule)
 **Figure 1** *[4]*	**EZ Meter-Pak (Six Disconnect Rule Applications)—See Figure 1**		
	10 kA	QO (**125 A**, 2P, 40–125 A) QO (**225 A**, 2P, 40–125 A) *[5]* QB (**225 A**, 2P or 3P, 70–225 A)	400–2000 A Main Lugs Terminal Box (Tenant Circuit Breakers used as Service Disconnects—6 maximum)
	22 kA	QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]*	
	25 kA	QD (**225 A**, 2P or 3P, 70–225 A)	
	42 kA	QOH (**125 A**, 2P, 40–125 A) QOH (**225 A**, 2P, 40–60 A) *[5]*	
	65 kA	QG (**225 A**, 2P or 3P, 70–225 A)	
	100 kA	QJ (**225 A**, 2P or 3P, 70–225 A) *[6]* LJL (**125–400 A**, 2P or 3P) *[7]*	
 **Figure 2** *[4]*	**EZ Meter-Pak 225–2000 A Main Lugs Terminal Box Applications Protected by Remote Main—See Figure 2**		
	10 kA	QO (**125 A**, 2P, 40–125 A) QO (**225 A**, 2P, 40–125 A) *[5]* QB (**225 A** 2P or 3P, 70–225 A) LJL (**125–400 A**, 2P or 3P) *[7]*	Must be protected by an upstream disconnecting means rated 10 k AIR minimum
	22 kA	QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]* LJL (**125–400 A**, 2P or 3P) *[7]*	Must be protected by an upstream disconnecting means rated 22 k AIR minimum
	25 kA	QD (**225 A** 2P or 3P, 70–225 A) LJL (**125–400 A**, 2P or 3P) *[7]*	Must be protected by an upstream disconnecting means rated 25 k AIR minimum
	42 kA	QOH (**125 A**, 2P, 40–125 A) QOH (**225 A**, 2P, 40–60 A) *[5]* LJL (**125–400 A**, 2P or 3P) *[7]*	Must be protected by an upstream disconnecting means rated 42 k AIR minimum
		QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]* QD (**225 A** 2P or 3P, 70–225 A)	Must be protected by a Square D™ circuit breaker Type LA (400 A max.) or MA (1000 A max.) Rated 42 k AIR minimum
	65 kA	QG (**225 A** 2P or 3P, 70–225 A) LJL (**125–400 A**, 2P or 3P) *[7]*	Must be protected by an upstream disconnecting means rated 65 k AIR minimum
		QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]* QD (**225 A** 2P or 3P, 70–225 A) LJL (**125–400 A**, 2P or 3P) *[7]*	Must be protected by a Square D circuit breaker Type LH (400 A max.); MG or MJ (800 A max.); MH (1000 A max.); PG or PJ (1200 A max.); RG or RJ (2000 A max.).
	100 kA	QJ (**225 A** 2P or 3P, 70–225 A) *[6]* LJL (**125–400 A** 2P or 3P) *[6]*	Must be protected by an upstream disconnecting means rated 100 k AIR minimum
		QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]*	Must be protected by an upstream disconnection means with Class R (600 A max.); Class J (600 A max); Class T6 (800 A max.); Class T3 (1200 A max.) or Class L (1200 A max.).
		QD (**225 A** 2P only, 70–225 A) LJL (**125–400 A**, 2P or 3P) *[7]* QD (**225 A** 3P only, 70–225 A) *[6]*	Must be protected by an upstream disconnection means with Class R (600 A max.); Class J (600 A max); Class T6 (800 A max.); Class T3 (1200 A max.) or Class L (1200 A max.) fuses or by a Square D circuit breaker Type MJ (800 A max.); MHF (1000 A max.); PJ (1200 A max.); or RJ (2000 A max.) rated 100 k AIR minimum.
	EZ Meter-Pak—Main Circuit Breaker Applications—See Figure 3		
	10 kA	QO (**125 A**, 2P, 40–125 A)	400–2000 A EZM Main Device with Type LH (400 A max.); MG or MJ (800 A max.); MH (1000 A max); PG or PJ (1200 A max.); RG or RJ (2000 A max.)
		QO (**225 A**, 2P, 40–125 A) *[5]* QB (**225 A** 2P or 3P, 70–225 A)	
	65 kA	QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]* QD (**225 A** 2P or 3P, 70–225 A) LJL (**125–400 A**, 2P or 3P) *[7]*	
 **Figure 3** *[7]*	100 kA	QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]* QD (**225 A** 2P only, 70–225 A) QD (**225 A** 3P only, 70–225 A) *[6]* LJL (**125–400 A**, 2P or 3P) *[7]*	1000 A Main Device with catalog number suffix "CBU" supplied with Type MHF circuit breaker.
		QD (**225 A** 2P only, 70–225 A) QD (**225 A** 3P only, 70–225 A) *[6]* LJL (**125–400 A** 2P or 3P) *[7]*	800–2000 A EZM Main Device with Type MJ (800 A max.); MHF (1000 A max.); PJ (1200 A max.) or RJ (2000 A max.)
	EZ Meter-Pak—Main Fusible Switch Applications—See Figure 3		
	10 kA	QO (**125 A**, 2P, 40–125 A) QO (**225 A**, 2P, 40–125 A) *[5]* QB (**225 A** 2P or 3P, 70–225 A)	400–1200 A EZM Main Device (1Ø or 3Ø) with Class T (300 Vac) fuses installed.
	100 kA	QO-VH (**125 A**, 2P, 40–125 A) QO-VH (**225 A**, 2P, 40–60 A) *[5]* QD (**225 A** 2P, only, 70–225 A) QD (**225 A** 3P only, 70–225 A) *[6]* LJL (**125–400 A**, 2P or 3P) *[7]*	400–1200 A EZM Main Device (1Ø or 3Ø) with Class T (300 Vac) fuses installed.

[1] Tenant circuit breakers of same frame size having higher AIR values may replace tenant circuit breakers as listed in this table and maintain the series rating.
[2] Meter center short circuit current rating is equal to the lowest short circuit current rating given in table for any circuit breaker installed in any meter panelboard in the meter center.
[3] Short circuit current rating is measured at the LINE SIDE terminals of the integral mounted or remote mounted main providing overcurrent protection for the EZM metering equipment lineup.
[4] For three-tier series ratings refer to Data Bulletin 4100DB0301.
[5] Requires use of EZM125QOA adapter (order separately).
[6] 3P only tenant circuit breaker(s) are limited to: 100 kA Max. at 208Y/120 Vac or 65 kA Max at 240/120 Vac.
[7] Supplied with factory-installed circuit breaker(s), with an adjustable trip range of 125–400 A.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

1 phase, 3 wire 120/240 Vac EZ Meter-Pak™ Meter Centers

1 phase, Indoor/Rainproof, UL Listed

1200 A Main CB/Fusible Switch Devices come Standard with 2-STEP Removable Service Entrance Endwalls

Select EZM meter center short circuit current rating from Table 2.16 UL Listed Meter Center Short Circuit Current Ratings (SCCR), page 2-13. Using this table as a reference, make the following selections:

1. Select EZM 1Ø main device from Table 2.17 or Table 2.18, with an equal or higher short circuit rating than the application.
2. Select EZM 1Ø branch units from Table 2.19, Table 2.20 or Table 2.21.
3. Select proper 2P type QO, QO-VH, QOH, QBP-TM, QDP-TM, QGP-TM or QJP-TM branch circuit breakers for use as tenant mains in branch unit from Table 2.33 and Table 2.34.
4. Select accessories as required from Table 2.35.
5. Dimensions; see page 2-25 and page 2-26.

Select Main Devices—NEMA 3R Construction

Table 2.17: 1Ø Main Devices


EZM11200FST

Ampere Rating	Service Feed	Horizontal Cross Bus Rating and Bus Bar Material	Cat. No. *[8]*		Width (in.)	Factory-Installed Line Side Lug (Conductors per Phase and Neutral) Wire Size (AWG/kcmil)
Main Circuit Breaker (1Ø Incoming and 1Ø Outgoing)						
			65 kA	100 kA		
400	OH/UG	400 A, Al	EZM1400CB	—	18.66	(1) 1–600 or (2) 1–250
600	OH/UG	600 A, Al	EZM1600CB	—	18.66	(3) 3/0–500
800	OH/UG	800 A, Al	EZM1800CB	—	18.66	(3) 3/0–500
1000	OH/UG	1200 A, Cu	EZM11000CB	—	18.66	(3) 3/0–500
1200	OH	1200 A, Al	EZM11200GCBT *[9]*	EZM11200JCBT *[9]*	23.69	(4) 3/0-500
1200	UG	1200 A, Al	EZM11200GCBU *[9] [10]*	—	23.69	(4) 3/0–500
1600	UG	1200 A, Al/Cu	EZM11600GCBU *[9] [11]*	EZM11600JCBU *[9] [11]*	22.48	6 (Order Lugs Separately)
1600	OH/UG	1200 A, Al/Cu	EZM11600GCBC *[9] [11]*	EZM11600JCBC *[9] [11]*	30.19	(6) 1/0–750 or (12) 1/0–250
2000	OH/UG	1200 A, Al/Cu	—	EZM12000CB *[11]*	30.19	(6) 1/0–750 or (12) 1/0–250
2000	UG	1200 A, Al/Cu	—	EZM12000CBU *[11]*	30.19	6 (Order Lugs Separately)
Main Fusible Switches (1Ø Incoming and 1Ø Outgoing) Requires 300 Vac Class T Fuses (Order Separately)						
400	OH/UG	400 A, Al	—	EZM1400FS	18.66	(1) 1–600 or (2) 1–250
600	OH/UG	600 A, Al	—	EZM1600FS	18.50	(3) 3/0–500
600	UG	600 A, Al	—	EZM1600FSU	20.46	2 (Order Lugs Separately)
800	OH/UG	800 A, Al	—	EZM1800FS	18.50	(3) 3/0–500
800	UG	800 A, Al	—	EZM1800FSU	20.46	2 (Order Lugs Separately)
1200	OH	1200 A, Al	—	EZM11200FST	23.69	(4) 3/0–500
1200	UG	1200 A, Al	—	EZM11200FSB*[10]*	23.69	(4) 3/0–500
Main Lug Terminal Boxes (1Ø Incoming and 1Ø Outgoing)						
225	OH/UG	800 A, Al	—	EZM1225TB *[12]*	11.66	(1) 4–300
400	OH/UG	800 A, Al	—	EZM1400TB *[13]*	17.15	(2) 3/0–500
600	OH/UG	800 A, Al	—	EZM1600TB *[13]*	17.15	(2) 1/0–750 or (4) 1/0–300
800	OH/UG	800 A, Al	—	EZM1800TB *[13]*	18.66	(4) 3/0–500
800	OH/UG	800 A, Cu	—	EZM1800TBCU *[13][14]*	24.08	(4) 3/0–500
1600	OH/UG	1200 A, Al/Cu	—	EZM11600TB *[13][14]*	22.48	(6) 1/0-600 or (12) 1/0-300
2000	OH/UG	1200 A, Al/Cu	—	EZM12000TB *[13][11]*	30.19	6 (Order Lugs Separately)
Main Circuit Breaker (1Ø Incoming and 1Ø Outgoing) with Energy Reduction Maintenance (ERMS)						
1200	UG	1200 A, Al	EZM11200GCBUMS	EZM11200JCBUMS	26.39	(4) 3/0–500
1200	OH	1200 A, Cu	—	EZM11200JCBTMS	23.69	(4) 3/0–500
1600	OH/UG	1200 A, Cu	EZM11600GCBCMS	—	30.19	(6) 1/0–750 or (12) 1/0–250
1600	UG	1200 A, Al	EZM11600GCBUMS	EZM11600JCBUMS	30.19	6 (Order Lugs Separately)
2000	OH/UG	1200 A, Cu	EZM12000CBMS	—	30.19	(6) 1/0-750 or (12) 1/0-250
2000	UG	1200 A, Al	EZM12000CBUMS	—	30.19	6 (Order Lugs Separately)

[8] Does not meet EUSERC requirements.
[9] Ampere rating of the circuit breaker supplied with this device can be changed to a LOWER value in the field by changing the setting on the circuit breaker.
[10] For field installed Lug Landing Kit, order catalog number EZM1200ULL. Order lugs separately.
[11] Supplied with copper horizontal bus bars and aluminum vertical bus bars.
[12] 225 A terminal box supplied with isolated neutral that cannot be bonded Not suitable for use on the LINE side of service equipment.
[13] Terminal box is suitable for use on LINE or LOAD side of service equipment. Supplied with isolated neutral and provided with neutral bonding kit for use as required. Refer to page 2-13 for appropriate short circuit current ratings.
[14] Feed-thru lug kit available, see page 2-23.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Table 2.18: 1Ø Main Devices, EUSERC

	Ampere Rating	Service Feed	Horizontal Cross Bus Rating and Bus Bar Material	Cat. No.		Width (in.)	Factory-Installed Lug Landings for use with Crimp-Type Lugs (2-Hole Mounting) Qty. per Phase and Neutral, except non-EUSERC. *[15]*
 EZM11200GCBE	Main Circuit Breakers (1Ø Incoming and 1Ø Outgoing)*[15]*						
				65 kA	100 kA		
	400	UG	400 A, Al	EZM1400CBU *[16]*	—	20.46	1 (Order Lugs Separately)
	600	UG	600 A, Al	EZM1600CBU *[16]*	—	26.19	2 (Order Lugs Separately)
	800	UG	800 A, Al	EZM1800CBU*[16]*	—	26.19	2 (Order Lugs Separately)
	1000	UG	1200 A, Cu	EZM11000CBU*[17]*	—	34.19	2 (Order Lugs Separately)
	1200	UG	1200 A, Al	EZM11200GCBE *[18]*	EZM11200JCBE *[18]*	32.39	3 (Order Lugs Separately)
	Main Fusible Switches (1Ø Incoming and 1Ø Outgoing) *[15]* **Requires 300 Vac Class T Fuses (Order Separately)**						
	400	UG	400 A, Al	—	EZM1400FSU	20.46	1 (Order Lugs Separately)
	600	UG	600 A, Al	—	EZM1600FSE	18.36	2 (Order Lugs Separately)
	1200	UG	1200 A, Al	—	EZM11200FSE	32.39	3 (Order Lugs Separately)
	Main Lug Terminal Boxes (1Ø Incoming and 1Ø Outgoing)						
	400	UG	800 A, Al	—	EZM1400TBU *[19]*	17.16	1 (Order Lugs Separately)
	800	UG	800 A, Al	—	EZM1800TBU *[19]*	25.16	2 (Order Lugs Separately)
	1200	UG	1200 A, Al/Cu	—	EZM11200TBU *[19]*	33.16	3 (Order Lugs Separately)
	Main Circuit Breaker (1Ø Incoming and 1Ø Outgoing) with Energy Reduction Maintenance Switch (ERMS)						
	1200	UG	1200 A, Al	EZM11200GCBEMS	EZM11200JCBEMS	32.39	3 (Order Lugs Separately)

[15] For mechanical lugs (3/0 AWG–600 kcmil) order kit CMELK4. Kit includes 4 lugs only. Multiple kits may be required, consult factory. For crimp-type lugs refer to Anderson Electrical Connector Products Catalog AEC-40R.
[16] Available by special order with main circuit breaker supplied with other standard ampere ratings, consult local Field Office (allow 6 weeks for delivery).
[17] Supplied with copper horizontal bus bars and aluminum vertical bus bars.
[18] Ampere rating of the circuit breaker supplied with this device can be changed to a LOWER value in the field by changing the setting on the circuit breaker.
[19] Terminal box is suitable for use on LINE or LOAD side of service equipment. Supplied with isolated neutral and provided with neutral bonding kit for use as required. Refer to page 2-13 for appropriate short circuit current ratings.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

1 Phase Branch Devices—NEMA 3R Construction

Table 2.19: Branch Units—1Ø Incoming and 1Ø Outgoing

	System Type	Number of Meter Sockets	Horizontal Cross Bus Rating	Ring Type 4-Jaw Meter Socket without Bypass *[20]*		Ringless Type 5-Jaw Meter Socket without Bypass		Ringless Type 5-Jaw Meter Socket with Horn Bypass		Ringless Type 5-Jaw Meter Socket with Lever Bypass	
				Cat. No *[21]*	Width (in.)	Cat. No *[21]*	Width (in.)	Cat. No *[21]*	Width (in.)	Cat. No *[21]*	Width (in.)
 EZMH114125	125 A Maximum (Order Type QO, QO-VH or QOH Circuit Breakers Separately) *[22][23]*										
	1Ø3W 120/240 Vac 2P Branch Circuit Breakers	3	800 A	EZM113125	12.25	EZMR113125	12.25	EZMH113125	12.25	EZML113125	15.56
			1200 A	EZM113125X		EZMR113125X		—		EZML113125X	
		4	800 A	EZM114125		EZMR114125		EZMH114125		EZML114125	
			1200 A	EZM114125X		EZMR114125X		EZMH114125X		EZML114125X	
		5	800 A	EZM115125		EZMR115125		EZMH115125		EZML115125	
			1200 A	EZM115125X		EZMR115125X		EZMH115125X		EZML115125X	
		6	800 A	EZM116125		EZMR116125		EZMH116125		EZML116125	
			1200 A	EZM116125X		EZMR116125X		EZMH116125X		EZML116125X	
	225 A Maximum Branch Units (Order Type QBP-TM, QDP-TM, QGP-TM or QJP-TM Circuit Breakers Separately) *[24]*										
	1Ø3W 120/240 Vac 2P Branch Circuit Breakers	2	800 A	EZM112225	17.38	EZMR112225	17.38	EZMH112225	17.38	—	—
			1200 A	EZM112225X		—		EZMH112225X		—	—
		3	800 A	EZM113225		EZMR113225		EZMH113225		—	—
			1200 A	EZM113225X		EZMR113225X		—		—	—
		4	800 A	EZM114225		EZMR114225		EZMH114225		—	—
			1200 A	EZM114225X		EZMR114225X		EZMH114225X		—	—
		5	1200 A	EZM115225		EZMR115225		EZMH115225		—	—
			1200 A	EZM115225CU		EZMR115225CU		—		—	—
		6	1200 A	EZM116225		EZMR116225		EZMH116225		—	—

Table 2.20: Branch Units—225 A Maximum Commercial (Order Type QBP-TM, QDP-TM, QGP-TM or QJP-TM Circuit Breakers Separately) *[25]*

	System Type	Number of Meter Sockets	Horizontal Cross Bus Rating	Ringless Type 5-Jaw Meter Socket with Lever Bypass and Jaw Release		Ring Type 5-Jaw Meter Socket with Test Block Bypass. Meets EUSERC Requirements	
				Cat. No.	Width (in.)	Cat. No.	Width (in.)
 EZMT111225  EZML113225	1Ø3W 120/240 Vac 2P Branch Circuit Breakers	1	1200 A	EZML111225	19.44	EZMT111225 *[26]*	22.42
		2	1200 A	EZML112225	19.44	EZMT112225 *[26]*	22.42
		3	1200 A	EZML113225	19.44	EZMT113225 *[26][27]*	22.42
		4	1200 A	EZML114225	19.44	—	—
			1200 A	EZML114225CU		—	—

Table 2.21: Branch Units—400 A Maximum Commercial

System Type	Number of Meter Sockets	Main Cross Bus Rating	Ringless Type 5-Jaw Meter Socket with Lever Bypass and Jaw Release. Includes Factory-Installed 400 A Type LJL Circuit Breaker *[28] [29]*		Ringless Type K Bolt-on 4-Jaw Meter Socket with Manual Bypass. Includes Factory-Installed 400 A Type LJL Circuit Breaker *[29]*	
			Cat. No.	Width (in.)	Cat. No.	Width (in.)
1Ø3W 120/240 Vac 2P Branch Circuit Breakers	1	1200 A	EZML111400	23.21	EZMK111400	27.56
	2	1200 A	EZML112400	23.21	—	27.56

[20] Snap-on aluminum sealing rings supplied as standard.
[21] 800 A rated Horizontal Cross Bus is standard for most configurations. 1200 A cross bus is available for most configurations and is typically noted with an X suffix. Cross bus may be Copper or Aluminum unless CU appears in the part number, as "CU "indicates all bus is copper.
[22] Supplied with removable drip hood and equipped with an indoor top endwall with knockouts provided.
[23] Compatible with a branch terminal box accommodating a maximum conductor size of 300 kcmil when voltage drop calculations require sizes over 2/0, see Table 1.35: Accessories, page 2-23.
[24] Type QO, QO-VH and QOH branch circuit breakers (40–60 A) may be installed with use of EZM125QOA adapter kits, see page 2-23.
[25] 2P Type QO (40–125 A, 10 kA max. meter center SCCR) or QO-VH and QO-H (40–60 A, 100 kA max. meter center SCCR) may be installed using EZM125QOA adapter kit, see page 2-23.
[26] Supplied with bondable neutral, suitable for use as service equipment. Use main lugs terminal box type EZM-TBU for Six Disconnect Rule applications to feed this device. Supplied with copper horizontal bus bars and aluminum vertical bus bars.
[27] Does not meet EUSERC 48 in. minImum / 75 in. maximum meter height requirements for outdoor installations. The bottom meter socket is 37 inches above ground when the device is mounted with the top meter socket at 75 inches above ground. EUSERC indoor requirements are 36 in. minimum / 75 in. maximum.
[28] Supplied with Class 320 lever bypass meter socket. Utilizes anti-inversion clip kit MMLRK, if required, refer to page 2-23.
[29] LJL circuit breaker has adjustable trip settings from 125-400 A. Use seal kit MICROTUSEAL, if required. LJL circuit breaker terminal lug kit factory-installed and accommodates (2) 2/0-500 kcmil Cu-Al per phase. Alternate lug kit AL400L61K3 for LJL circuit breaker is available, see. page 2-23.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

3Ø4W 208Y/120 Vac or 240/120 Vac Delta EZ Meter-Pak™ Meter Centers—3Ø Indoor/Rainproof, UL Listed

1200 A Main CB/Fusible Switch Devices come Standard with 2-STEP Removable Service Entrance Endwalls

Select EZM meter center short circuit current rating from Table 2.16. Using this table as a reference, make the following selections:

1. Select 3Ø EZM main device below with an equal or higher short circuit rating than the application from Table 2.22 and Table 2.23.
2. Select EZM 3Ø branch units from Table 2.24, Table 2.25, and Table 2.26.
3. Select proper 2P type QO, QO-VH, QOH, QBP-TM, QDP-TM, QGP-TM or QJP-TM or 3P QBP-TM, QDP-TM, QGP-TM or QJP-TM branch circuit breakers for use as tenant mains in branch unit; from Table 2.33 and Table 2.34.
4. Select accessories as required, from page 2-23.
5. Dimensions see page 2-25.

3 Phase Main Devices—NEMA 3R Construction

Table 2.22: 3Ø Main Devices

	Ampere Rating	Service Feed	Horizontal Cross Bus Rating	Cat. No.*[30]*		Width (in.)	Factory-Installed Line Side Lug (Conductors per Phase and Neutral) Wire Size (AWG–kcmil)
	Main Circuit Breakers (3Ø Incoming and 3Ø Outgoing) 65 kA Short Circuit Current Rating (400–1600 A Max.), 100 kA Short Circuit Current Rating (2000 A Max.)						
	Short Circuit Rating			65 kA	100 kA		
	400	OH/UG	400 A	EZM3400CB	—	18.66	(1) 1–600 or (2) 1–250
	600	OH/UG	600 A	EZM3600CB	—	18.66	(3) 3/0–500
	800	OH/UG	800 A	EZM3800CB	—	18.66	(3) 3/0–500
	1000	OH/UG	1200 A	EZM31000CB	—	18.66	(3) 3/0–500
	1200	OH	1200 A	EZM31200GCBT *[31]*	—	23.69	(4) 3/0-500
	1200	UG	1200 A	EZM31200GCBU *[32] [31]*	EZM31200JCBU *[32] [31]*	23.69	(4) 3/0-500
	1600	OH/UG	1200 A	EZM31600GCBC*[31] [33]*	EZM31600JCBC*[31] [33]*	30.19	(6) 1/0–750 or (12) 1/0–250
	1600	UG	1200 A	EZM31600GCBU *[31][33]*	EZM31600JCBU *[31][33]*	30.19	6 (Order Lugs Separately)
	2000	OH/UG	1200 A	—	EZM32000CB *[33]*	30.19	(6) 1/0–750 or (12) 1/0–250
	2000	UG	1200 A	—	EZM32000CBU *[33]*	30.19	6 (Order Lugs Separately)
	Main Fusible Switches (3Ø Incoming and 3Ø Outgoing) Requires 300 Vac Class T Fuses (Order Separately)						
	400	OH/UG	400 A	—	EZM3400FS	18.66	(1) 1–600 or (2)1–250
	600	OH/UG	600 A	—	EZM3600FS	18.66	(3) 3/0–500
	800	OH/UG	800 A	—	EZM3800FS	18.66	(3) 3/0–500
	1200	OH	1200 A	—	EZM31200FST	23.69	(4) 3/0–500
	1200	UG	1200 A	—	EZM31200FSB *[32]*	23.69	(4) 3/0-500
	Main Lug Terminal Boxes (3Ø Incoming and 3Ø Outgoing)						
	225	OH/UG	800 A	—	EZM3225TB *[34]*	11.66	(1) 4–300
	400	OH/UG	800 A	—	EZM3400TB *[35]*	17.15	(2) 3/0–500
	600	OH/UG	800 A	—	EZM3600TB *[35]*	17.15	(2) 1/0–750 or (4) 1/0–300
	800	OH/UG	800 A	—	EZM3800TB *[35]*	18.66	(4) 3/0–500
	800	OH/UG	800 A	—	EZM3800TBCU *[35] [36]*	24.08	(4) 3/0–500
	1600	OH/UG	1200 A	—	EZM31600TB *[33] [36] [35]*	22.48	(6) 1/0-600 or (12) 1/0-300
	2000	OH/UG	1200 A	—	EZM32000TB *[35]*	30.19	6 (Order Lugs Separately)
	Main Circuit Breakers (3Ø Incoming and 3Ø Outgoing) with Energy Reduction Maintenance Switch (ERMS)						
	1200	OH	1200 A	EZM31200GCBTMS	EZM31200JCBTMS	23.69	(4) 3/0–500
	1200	UG	1200 A	EZM31200GCBUMS	EZM31200JCBUMS	23.69	(4) 3/0–500
	1600	OH/UG	1200 A	EZM31600GCBCMS	EZM31600JCBCMS	30.19	(6) 1/0–750 or (12) 1/0–250
	1600	UG	1200 A	EZM31600GCBUMS	EZM31600JCBUMS	30.19	6 (Order Lugs Separately)
	2000	OH/UG	1200 A	EZM32000CBMS	—	30.19	(6) 1/0–750 or (12) 1/0–250
	2000	UG	1200 A	EZM32000CBUMS	—	30.19	6 (Order Lugs Separately)



EZM31200FST

[30] Does not meet EUSERC requirements.
[31] Ampere rating of the circuit breaker supplied with this device can be changed to a LOWER value in the field by changing the setting on the circuit breaker.
[32] For field installed Lug Landing Kit order catalog number EZM1200ULL.
[33] Supplied with copper horizontal bus bars and aluminum vertical bus bars.
[34] 225 A terminal box supplied with isolated neutral that cannot be bonded.
[35] Terminal box is suitable for use on LINE or LOAD side of service equipment. Supplied with isolated neutral and provided with neutral bonding kit for use as required. Refer to page 2-13 for appropriate short circuit current ratings.
[36] Feed-thru lug kit available, see Table 2.35.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Table 2.23: 3Ø Main Devices, EUSERC

	Ampere Rating	Horizontal Cross Bus Rating	Cat. No.		Width (in.)	Factory-Installed Lug Landings For use with Crimp-Type Lugs (2-Hole Mounting) Qty. per Phase and Neutral, except non-EUSERC device.*[37]*
 EZM31200GCBEMS	**Main Circuit Breakers (3Ø Incoming and 3Ø Outgoing)**					
	Short Circuit Rating		65 kA	100 kA		
	400	400 A	EZM3400CBU *[38]*	—	20.46	1 (Order Lugs Separately)
	600	600 A	EZM3600CBU*[38]*	—	26.19	2 (Order Lugs Separately)
	800	800 A	EZM3800CBU *[38]*	—	26.19	2 (Order Lugs Separately)
	1000	1200 A	EZM31000CBU	—	34.19	3 (Order Lugs Separately)
	1200	1200 A	EZM31200GCBE *[39]*	—	32.39	3 (Order Lugs Separately)
	Main Fusible Switches (3Ø Incoming and 3Ø Outgoing) Requires 300 Vac Class T Fuses (Order Separately)					
	400	400 A	—	EZM3400FSU	20.46	1 (Order Lugs Separately)
	600	600 A	—	EZM3600FSU	26.19	2 (Order Lugs Separately)
	800	800 A	—	EZM3800FSU	26.19	2 (Order Lugs Separately)
	1200	1200 A	—	EZM31200FSE	32.39	3 (Order Lugs Separately)
	Main Lugs Terminal Boxes (3Ø Incoming and 3Ø Outgoing)					
	400	400 A	—	EZM3400TBU *[40]*	17.16	1 (Order Lugs Separately)
	800	800 A	—	EZM3800TBU *[40]*	25.16	2 (Order Lugs Separately)
	1200	1200 A	—	EZM31200TBU *[40]*	33.16	3 (Order Lugs Separately)
	Main Circuit Breaker (3Ø Incoming and 3Ø Outgoing) with Energy reduction Maintenance Switch (ERMS)					
	1200	1200 A	EZM31200GCBEMS	EZM31200JCBEMS	32.39	3 (Order Lugs Separately)

NOTE: All EUSERC main devices are designed for underground utility service feed.

[37] For mechanical lugs (3/0 AWG–600 kcmil) order kit CMELK4. Kit includes 4 lugs only. Multiple kits may be required, consult factory. For crimp-type lugs refer to Anderson Electrical Connector Products Catalog AEC-40R.

[38] Available by special order with main circuit breaker supplied with other standard ampere ratings, consult your nearest Field Sales Office (allow 6 weeks for delivery).

[39] Ampere rating of the circuit breaker supplied with this device can be changed to a LOWER value in the field by changing the setting on the circuit breaker.

[40] Terminal box is suitable for use on LINE or LOAD side of service equipment. Supplied with isolated neutral and provided with neutral bonding kit for use as required. Refer to page 2-13 for appropriate short circuit current ratings.

© 2025 Schneider Electric
All Rights Reserved
3//18/2025

3 Phase Branch Devices—NEMA 3R Construction

Table 2.24: Branch Units—3Ø Incoming and 1Ø Outgoing

System Type	Number of Meter Sockets	Horizontal Cross Bus Rating	Ring Type 5-Jaw Meter Socket without Bypass *[41]*		Ringless Type 5-Jaw Meter Socket without Bypass		Ringless Type 5-Jaw Meter Socket with Horn Bypass		Ringless Type 5-Jaw Meter Socket with Lever Bypass	
			Cat. No *[42]*	Width (in.)	Cat. No *[42]*	Width (in.)	Cat. No *[42]*	Width (in.)	Cat. No *[42]*	Width (in.)
125 A Maximum (Order Type QO, QO-VH or QOH Circuit Breakers Separately) *[43] [44]*										
3Ø4W 208Y/120 Vac 5-Jaw-Meter Socket 2P Branch Circuit Breakers	3	800 A	EZM313125	12.25	EZMR313125	12.25	EZMH313125	12.25	EZML313125	15.56
		800 A	EZM313125M10 *[45]*		—		—		—	
		1200 A	EZM313125X		EZMR313125X		EZMH313125X		EZML313125X	
	4	800 A	EZM314125		EZMR314125		EZMH314125		EZML314125	
		800 A	EZM314125M10 *[45]*		—		—		—	
		1200 A	EZM314125X		EZMR314125X		EZMH314125X		EZML314125X	
	5	800 A	EZM315125		EZMR315125		EZMH315125		EZML315125	
		800 A	EZM315125M10 *[45]*		—		—		—	
		1200 A	EZM315125X		EZMR315125X		EZMH315125X		EZML315125X	
	6	800 A	EZM316125		EZMR316125		EZMH316125		EZML316125	
		800 A	EZM316125M10 *[45]*		—		—		—	
		1200 A	EZM316125X		EZMR316125X		EZMH316125X		EZML316125X	
225 A Maximum (Order Type QBP-TM, QDP-TM,QGP-TM or QJP-TM Circuit Breakers Separately) *[46]*										
3Ø4W 208Y/120 Vac 5-Jaw-Meter Socket 2P Branch Circuit Breakers	2	800 A	EZM312225	17.38	EZMR312225	17.38	EZMH312225	17.38	—	—
		1200 A	EZM312225X		EZMR312225X		EZMH312225X		—	—
	3	800 A	EZM313225		EZMR313225		EZMH313225		—	—
		1200 A	EZM313225X		EZMR313225X		EZMH313225X		—	—
	4	800 A	EZM314225		EZMR314225		EZMH314225		—	—
		1200 A	EZM314225X		EZMR314225X		EZMH314225X		—	—
	5	1200 A	EZM315225		EZMR315225		EZMH315225		—	—
		1200 A	EZM315225CU		EZMR315225CU		EZMH315225CU		—	—
	6	1200 A	EZM316225		EZMR316225		EZMH316225		—	—
		1200 A	EZM316225CU		EZMR316225CU		—		—	—
		1200 A	EZM316225CA		EZMR316225CA		EZMH316225CA		—	—

Table 2.25: Branch Units—225 A Maximum Commercial

		System Type	Number of Meter Sockets	Horizontal Cross Bus Rating	Ringless Type Meter Socket without Bypass		Ringless Type Meter Socket with Lever Bypass and Jaw Release		Ring Type Meter Socket with Test Block Bypass. Meets EUSERC Requirements	
					Cat. No. *[42]*	Width (in.)	Cat. No. *[42]*	Width (in.)	Cat. No.	Width (in.)
		3Ø Incoming and 1Ø Outgoing *[47]* (Order Type QBP-TM, QDP-TM,QGP-TM or QJP-TM circuit breakers separately) *[46]*								
EZML313225	EZMT311225	3Ø4W 208Y/120 Vac 5-Jaw Meter Sockets 2P Branch Circuit Breakers	1	1200 A	—	—	—	—	EZMT311225 *[48]*	22.42
			2	1200 A	—	—	EZML312225	19.44	EZMT312225 *[48]*	22.42
			3	1200 A	—	—	EZML313225	19.44	EZMT313225 *[48][49]*	22.42
			4	1200 A	—	—	EZML314225	19.44	—	—
		3Ø Incoming and 3Ø Outgoing (Order QBP-TM, QDP-TM, QGP-TM or QJP-TM circuit breakers separately.								
	EZMT311225 Without Cover	3Ø4W 240/120 Vac Delta or 208Y/120 Vac 7-Jaw Meter Socket 3P Branch Circuit Breakers	1	1200 A	—	—	EZML331225	19.44	EZMT331225 *[48]*	22.42
				1200 A	—	—	EZML331225CU		—	—
			2	1200 A	EZMR332225	19.44	EZML332225	19.44	EZMT332225 *[48]*	22.42
			3	1200 A	EZMR333225	19.44	EZML333225	19.44	EZMT333225 *[48][49]*	22.42
				1200 A	—		EZML333225D *[43]*		—	—
			4	1200 A	EZMR334225	19.44	EZML334225	19.44	—	—
				1200 A	—		EZML334225D *[50]*		—	

[41] Snap-On aluminum sealing rings supplied as standard.
[42] 800 A rated Horizontal Cross Bus is standard for most configurations. 1200 A cross bus is available for most configurations and is typically noted with an X suffix. Cross bus may be Copper or Aluminum unless CU appears in the part number, as "CU "indicates all bus is copper.
[43] Supplied with removable drip hood and equipped with an indoor top endwall with knockouts provided.
[44] Compatible with a branch terminal box accommodating a maximum conductor size of 300 kcmil when voltage drop calculations require sizes over 2/0, see Table 1.35: Accessories, page 2-23.
[45] Distance between meter sockets as measured from centerline to centerline is 10 inches.
[46] 2P Type QO (40–125 A, 10 kA max. meter center SCCR) or QO-VH and QO-H (40–60 A, 100 kA max. meter center SCCR) may be installed using EZM125QOA adapter kit, see page 2-23.
[47] For 240/120 Vac Delta Systems add Suffix "CA" to catalog number (Example: EZM316125**CA**). All meter sockets are phased A and C only. Price remains the same as the base catalog number. Order only branch units, not stocked in PDS (6-week delivery).
[48] Supplied with bondable neutral, suitable for use as service equipment. Use main lugs terminal box type EZM-TBU for Six Disconnect Rule applications to feed this device. Supplied with copper horizontal bus bars and aluminum vertical bus bars.
[49] Does not meet EUSERC 48 in. minImum / 75 in. maximum meter height requirements for outdoor installations. The bottom meter socket is 37 inches above ground when the device is mounted with the top meter socket at 75 inches above ground. EUSERC indoor requirements are 36 in. minimum / 75 in. maximum.
[50] Supplied with removable drip hood and equipped with an indoor top endwall with knockouts provided.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



Table 2.26: Branch Units—400 A Maximum Commercial

System Type	Number of Meter Sockets	Horizontal Cross Bus Rating	Ringless Type Meter Socket with Lever Bypass and Jaw Release—Includes Factory-Installed 400 A Type LJL Circuit Breaker. *[51]*, *[52]*		Ringless Type K Bolt-on Meter Socket with Manual Bypass—Includes Factory-Installed 400 A Type LJL Circuit Breaker. *[52]*	
			Cat. No.	Width (in.)	Cat. No.	Width (in.)
3Ø Incoming and 1Ø Outgoing *[53]*						
3Ø4W 208Y/120 Vac 5-Jaw Meter Socket 2P Circuit Breakers	1	1200 A Cu	EZML311400	23.21	—	—
	2	1200 A Cu	EZML312400	23.21	—	—
3Ø Incoming and 3Ø Outgoing						
3Ø4W 240/120 Vac Delta or 208Y/120 Vac 7-Jaw Meter Socket 3P Circuit Breakers	1	1200 A Cu	EZML331400	23.21	EZMK331400	27.56
	2	1200 A Cu	EZML332400	23.21	EZMK332400	27.56

Starting Position		Possible Ending Position (By moving only one "Z" connector)
AØ and BØ	can be changed to	AØ and CØ
AØ and CØ	can be changed to	AØ and BØ or BØ and CØ
BØ and CØ	can be changed to	AØ and CØ

3Ø–1Ø OUT EZM Branch Unit Phase Balancing Flexibility

The major benefit of factory phase balancing is that most jobs will not require field phase balancing. To see if meter socket phase balancing in the field is required, do the following (refer to wiring diagram for complete instructions):


A. Determine if the load in amperes on each phase of the transformer using handle rating of tenant circuit breakers installed at each number of meter sockets. Use Phase Balancing Chart to determine total number of connections each meter socket makes on each phase of transformer.

B. If phase balancing is required, determine which meter sockets should be changed to properly phase balance metering equipment lineup.

C. Once meter socket(s) is selected to be phase balanced, remove individual meter socket cover from each meter socket to be phase balanced. The vertical bus bars running top to bottom in the branch unit behind each meter socket are phased: **AØ, BØ, CØ, left to right.**

D. By moving only the line side meter socket "Z" shaped connectors per meter socket to be changed, phase balancing can easily be accomplished on-site:

Table 2.27: Example: To change an AØ and CØ meter socket to a BØ and CØ socket

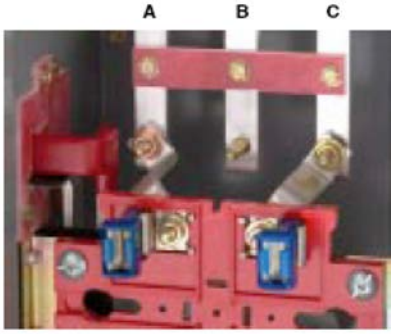

Starting Position
Meter Socket Phaseing: AØ and CØ



Step 2: Loosen hex nut from AØ line side meter socket jaw and slide "Z" connector down to free connector from stud.



Step 1: Remove hex nut from AØ line side connection to vertical bus.



Step 3: Rotate "Z" connector to right and align with stud on BØ vertical bus.



Step 4: Slide "Z" connector up to engage stud on BØ vertical bus. Torque hex nut of meter socket jaw to 75 lb-in (8 N•m).




Step 6: Replace hex nut (removed in Step 1) onto stud of BØ vertical bus and torque to 75 lb-in (9 N•m).
Phase balancing of meter socket is complete: BØ and CØ.

[51] Supplied with Class 320 lever bypass meter socket. Use anti-inversion clip kit, catalog number MMLRK, if required. See page 2-23.


[52] LJL circuit breaker has adjustable trip settings from 125-400 A. Use seal kit MICROTUSEAL, if required. LJL circuit breaker terminal lug kit factory-installed and accommodates (2) 2/0-500 kcmil Cu-Al per phase. Alternate lug kit AL400L61K3 for LJL circuit breaker is available, see page 2-23.

[53] For 240/120 Vac Delta Systems add Suffix "CA" to catalog number (Example: EZML311400**CA**). All meter sockets are phased A and C only. Price remains the same as the base catalog number. "Order only" branch units, not stocked in PDS (4–6 week delivery). Order point Lexington.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



Plan View Detail

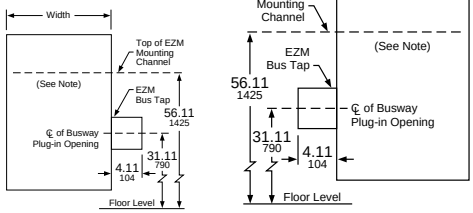

EZM 3 Phase Busway Side Tap Right

EZM 3 Phase Busway Side Tap Left

EZM Main with Busway Side Tap

EZ Meter-Pak™ metering equipment is available for use in high rise applications for connection to 800–5000 A I-Line™ or I-Line II plug-in busway installed as a vertical riser. Three phase only EZM main devices in the form of a main circuit breaker or main fusible switch are available with an integral busway tap extending from the right or left side of the main device and phased to align with the busway for either neutral front or neutral back installations.

Busway Mains, 3Ø only (Indoor only) ordering instructions:

Step 1: Determine height to center line of busway plug-in opening, check local utility requirements for minimum and maximum meter socket heights.

Step 2: Determine side of EZM main section for busway tap to extend from (busway tap is an integral part of the main and extends to the left or right on the EZM device as viewed from the front).

Step 3: Check phasing of busway riser to insure that it matches phasing of busway tap on main section (indicated as neutral front or neutral back as viewed from the front).

Step 4: Select Cat. No. from tables below.

Step 5: Busway main devices are build to order specials and require 4 to 6 weeks for delivery.

Table 2.28: EZM Busway Side Tap Mains Devices

Number Segment	Character	Description	EZM	3	800	CB	NF	BTR
Device Name	EZM	EZ Meter-Pak Meter Center						
Service Feed	3	3Ph, 4W						
Mains Rating	400 A							
	600 A							
	800 A							
	1000 A							
	1200 A							
Main Type	CB	Main Circuit Breaker						
	FS	Main Fusible Switch						
	GB	Main Circuit Breaker (65 kAIC)						
	JB	Main Circuit Breaker (100KAIC)						
Neutral Position	NF	Neutral Front						
	NB	Neutral Back						
Bus Tap Location	BTL	Bus Tap Left						
	BTR	Bus Tap Right						

This table is for interpreting existing part numbers only. All possible combinations are not available.

Table 2.29: 1200 A EZM Mains with Busway Side Tap (Three Phase Only—Note positioning left or right below)


Ampere Rating	Width (in.)	Horizontal Cross Bus Rating	Busway to LEFT of EZM Metering Equipment Lineup		Busway to RIGHT of EZM Metering Equipment Lineup	
			Neutral Front	Neutral Back	Neutral Front	Neutral Back
Main Circuit Breaker with Busway Tap						
65,000 RMS Symmetrical Amperes Maximum Short Circuit Current Rating						
400	18.66	400 A	EZM3400CBNFBTL	EZM3400CBNBBTL	EZM3400CBNFBTR	EZM3400CBNBBTR
600	18.66	600 A	EZM3600CBNFBTL	EZM3600CBNBBTL	EZM3600CBNFBTR	EZM3600CBNBBTR
800	18.66	800 A	EZM3800CBNFBTL	EZM3800CBNBBTL	EZM3800CBNFBTR	EZM3800CBNBBTR
1000	18.66	1000 A	EZM31000CBNFBTL *[54]*	EZM31000CBNBBTL *[54]*	EZM31000CBNFBTR *[54]*	EZM31000CBNBBTR *[54]*
1200	23.36	1200 A	EZM31200GBNFBTL *[54]*	EZM31200GBNBBTL*[54]*	EZM31200GBNFBTR *[54]*	EZM31200GBNBBTR *[54]*
Main Fusible Switch with Busway Tap Requires Class T (300 Vac) Fuses - Order Separately						
100,000 RMS Symmetrical Amperes Maximum Short Circuit Current Rating						
400	18.66	400 A	EZM3400FSNFBTL	EZM3400FSNBBTL	EZM3400FSNFBTR	EZM3400FSNBBTR
600	18.66	600 A	EZM3600FSNFBTL	EZM3600FSNBBTL	EZM3600FSNFBTR	EZM3600FSNBBTR
800	18.66	800 A	EZM3800FSNFBTL	EZM3800FSNBBTL	EZM3800FSNFBTR	EZM3800FSNBBTR
1200	22.36	1200 A	EZM31200FSNFBTL *[54]*	EZM31200FSNBBTL *[54]*	EZM31200FSNFBTR *[54]*	EZM31200FSNBBTR *[54]*

NOTE: Dimensions shown position the centerline of top meter socket of a 125 A, 5-Gang or 6-Gang branch unit at 72" above floor level. Check with utility to meet local requirements.


Busway Transition Section

EZM busway transition section provides no overcurrent protection for the downstream EZM branch units.

Tenant main circuit breakers in these branch units must be selected as “fully rated” equipment. (Examples: QO for 10 kA, QO-VH for 22 kA or QOH for 42 kA.)



EZM3BUSRF and EZM3BUSRB



EZM3BUSLF and EZM3BUSLB

Table 2.30: EZM Busway Transition Sections (3Ø only)

Ampere Rating	I-Line™ Busway location	Neutral Front	Neutral Back	Width (in.)
1200	RIGHT of EZM Transition Section	EZM3BUSRF	EZM3BUSRB	12.00
1200	LEFT of EZM Transition Section	EZM3BUSLF	EZM3BUSLB	12.00

[54] Requires use of branch units supplied with 1200 A horizontal cross bus.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



EZM Main with Center-Mounted Busway Tap

The EZM Main with center-mounted busway tap is a space-saving design for high rise applications that is installed as an integral component of the vertical riser busway and allows standard EZM branches to be mounted from both sides. See online digest updates for availability or contact your local field sales office for additional information

EZM Busway Center Tap Mains

The EZM Busway Center Tap mains offer provides a convenient space saving method for connecting EZM Branch Meter sections to I-Line II Busway in vertical riser applications. The mains are connected "inline" with the Busway column conserving precious electrical room space.


1. The Part Number Coding Table is to be used for interpreting existing part numbers only. All possible combinations are not available. Please contact product support for additional references needed.
2. Outgoing Feeder Bus Joint-Pak is included with each EZM CTM Section.
3. EZM Horizontal Cross Bus is 1200 A Copper Only
4. Busway Center Tap Mains are fully NEMA 3R Rated.
5. Mains Devices are fully sealable by utility.
6. EZM Branch units are installed using the mounting kit - EZMCTMKIT.
7. Short circuit current rating = 150,000 symmetrical amps.
8. EZM CTM is configured for neutral front only (G-> N-> C-> B->A-> G) as viewed front to rear.
9. Compatible with I-LINE II Busway rated 2000–5000 A.
10. Includes factory installed PowerPact M- and P-frame Circuit Breakers and Switches (Rated 600–1200 A.)
11. Fully compatible with all standard EZ Meter-Pak Branch Devices and Extenders.

Table 2.31: Part Number Coding

Number Segment	Character	Description	EZM	3	1000	JCB	C	20
Device Name	EZM	EZM Busway Center Tap Main						
System Connection (Phase Order: Front to Back)	3	3 Phase (N, C, B, A)						
Maximum Current of Main Service Disconnect	600	600 A						
	800	800 A						
	1000	1000 A						
	1200	1200 A						
Type of Main Service Disconnect (with AIC Rating)	GCB	65 kAIC Circuit Breaker						
	JCB	100 kAIC Circuit Breaker						
	FS	100 kAIC Fused Switch						
Material of I-Line II Busway	C	Copper						
	A	Aluminum						
Amperage of I-Line II Busway	20	2000 A						
	25	2500 A						
	30	3000 A						
	32	3200 A						
	40	4000 A						
	50	5000 A						

This table is for interpreting existing part numbers only. All possible combinations are not available.

Table 2.32: EZM Busway Center Tap Mains

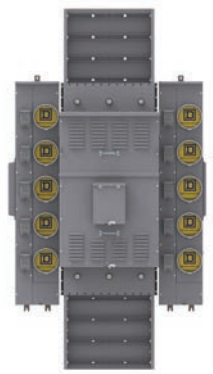

Main CB Ampere Rating (A)	I-Line II Busway Rating, Material	Cat. No.		Height (in.)	Width (in.)	Depth (in.)	MC *[55]* Height (in.)
Main Circuit Breakers (3Ø Incoming and 3Ø Outgoing)							
SCCR		65 kA	100 kA				
600	2000A, Al	—	EZM3600JCBA20	43.08	22.70	14.78	56.11
	3000A, Al	—	EZM3600JCBA30	43.08	22.70	14.78	56.11
	4000A, Al	EZM3600GCBA40	EZM3600JCBA40	43.08	27.96	14.78	56.11
800	2000A, Al	EZM3800GCBA20	—	43.08	22.70	14.78	56.11
	2500A, Al	EZM3800GCBA25	—	43.08	22.70	14.78	56.11
	3000A, Al	EZM3800GCBA30	EZM3800JCBA30	43.08	22.70	14.78	56.11
	4000A, Al	EZM3800GCBA40	EZM3800JCBA40	43.08	27.96	14.78	56.11
1000	4000A, Al	—	EZM31000JCBA40	43.08	27.96	14.78	56.11
1200	3000A, Al	EZM31200GCBA30	—	43.08	22.70	14.78	56.11
	4000A, Al	EZM31200GCBA40	EZM31200JCBA40	43.08	27.96	14.78	56.11

[55] Meter Center (MC)

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Tenant Circuit Breakers and EZM Accessories

Table 2.33: 125 A Max. EZM Branch Unit Tenant Circuit Breakers

	Poles	Ampere Rating	10 k AIR	22 k AIR	42 k AIR	100 k AIR
 QO2100VH, Plug-on Type Circuit Breaker	2	40 50 60	QO240 QO250 QO260	QO240VH QO250VH QO260VH	QOH240 QOH250 QOH260	— — —
		70 80 90	QO270 QO280 QO290	QO270VH QO280VH QO290VH	QOH270 QOH280 QOH290	— — —
		100 110 125	QO2100 QO2110 QO2125	QO2100VH QO2110VH QO2125VH	QOH2100 QOH2110 QOH2125	— — —

Table 2.34: 225 A Max. EZM Branch Unit Tenant Circuit Breakers

	Poles	Ampere Rating	10 k AIR	25 k AIR	65 k AIR	100 k AIR
 QDP22200TM	2	40 50 60	QO240 *[56]* QO250 *[56]* QO260 *[56]*	QO240VH *[56] [57]* QO250VH *[56] [57]* QO260VH *[56] [57]*	QOH240 *[56] [57]* QOH250 *[56] [57]* QOH260 *[56] [57]*	— — —
		70 80 90	QBP22070TM QBP22080TM QBP22090TM	QDP22070TM QDP22080TM QDP22090TM	QGP22070TM QGP22080TM QGP22090TM	QJP22070TM QJP22080TM QJP22090TM
		100 110 125	QBP22100TM QBP22110TM QBP22125TM	QDP22100TM QDP22110TM QDP22125TM	QGP22100TM QGP22110TM QGP22125TM	QJP22100TM QJP22110TM QJP22125TM
		150 175 200	QBP22150TM QBP22175TM QBP22200TM	QDP22150TM QDP22175TM QDP22200TM	QGP22150TM QGP22175TM QGP22200TM	QJP22150TM QJP22175TM QJP22200TM
		225	QBP22225TM	QDP22225TM	QGP22225TM	QJP22225TM
	3	70 80 90	QBP32070TM QBP32080TM QBP32090TM	QDP32070TM QDP32080TM QDP32090TM	QGP32070TM QGP32080TM QGP32090TM	QJP32070TM *[58]* QJP32080TM *[58]* QJP32090TM *[58]*
		100 110 125	QBP32100TM QBP32110TM QBP32125TM	QDP32100TM QDP32110TM QDP32125TM	QGP32100TM QGP32110TM QGP32125TM	QJP32100TM*[58]* QJP32110TM *[58]* QJP32125TM *[58]*
		150 175 200	QBP32150TM QBP32175TM QBP32200TM	QDP32150TM QDP32175TM QDP32200TM	QGP32150TM QGP32175TM QGP32200TM	QJP32150TM *[58]* QJP32175TM *[58]* QJP32200TM *[58]*
		225	QBP32225TM	QDP32225TM	QGP32225TM	QJP32225TM *[58]*

Table 2.35: Accessories

Accessory	Description	Cat. No.
1200 A Bus Extension (Indoor/ Outdoor Cu bus)	1Ø3W Bus Extension (6 in.wide) 1Ø3W Bus Extension (12 in.wide) 3Ø4W Bus Extension (6 in. wide) 3Ø4W Bus Extension (12 in. wide)	EZM1EXT6 EZM1EXT EZM3EXT6 EZM3EXT
1200 A Bussed Corner Sections (Indoor/Outdoor Cu bus only)	1Ø3W Inside Corner (14.75 in. wide) 1Ø3W Outside Corner (6.20 in. wide) 3Ø4W Inside Corner (14.75 in. wide) 3Ø4W Outside Corner (6.20 in. wide)	EZM1CORNER EZM1ELBOW EZM3CORNER EZM3ELBOW
1200 A Transition Sections—Old to New (10.7 in. wide Cu bus)	Add right of old style 1Ø EZM lineup Add right of old style 3Ø EZM lineup Add left of old style 1Ø EZM lineup Add left of old style 3Ø EZM lineup	EZM1TRANR EZM3TRANR EZM1TRANL EZM3TRANL
Mounting Channel	72" long	EZM72MC
Secondary Surge Arrester Mounting kit	For use with 1 or 2-SDSA1175 or 1-SDSA3650 (order surge arrester separately)	MMSAMK *[59]*
Stud Kit for EZM-TB 400–600 A terminal box	Includes (2) 1/2 in.-13 studs per pad and mounting hardware. Four pads per kit.	EZMSK2
Al/Cu Lug Kits (Each kit includes three, 2-barrel lugs.)	(1) 1/0–600 kcmil or (2) 1/0–250 kcmil per lug	MMLK250
	(2) 3/0–500 kcmil per lug	MMLK500
	(2) 2–600 kcmil per lug	MMLK600
Feed -Thru for EZM-TB 800 A Terminal Box	(4) 750 kcmil Al/Cu lugs per phase and neutral. Al wire 600 A max. Cu wire 800 A max.	EZM600FTLK3
Feed-Thru for EZM-TB 1600 A Terminal Box	(24) additional lugs, 600 kcmil Al/Cu, (6) per phase and neutral.	EZM1600FTLK3
EZM Mains Right Side Closure Cap	Replacement right side end cap for EZM Cross Bus Opening	EZMSCAP
EZM Mains Left Side Closure Cap	Replacement left side end cap for EZM Cross Bus Opening	EZMCAP
Fifth Jaw Kit	1 per kit	5J *[60]*
Horn Bypass Kit	Use with Type EZMR 1Ø meter socket only	MMHB
Slider Type Manual Circuit Closer	For (1) 125–225 A ring-type socket only—indoor/outdoor	MM200MB *[61] [62]*
Anti-inversion Clip	Rejects 100 A and 200 A watt-hour meters in Class 320 meter sockets in Type EZML branch units.	MMLRK
QO Adapter for bolt-on Q-frame tenant circuit breakers	For 2P Type QO (40–125 A, 10 kA max. meter center SCCR) or QO-VH and QOH (40–60 A, 100 kA max. meter center SCCR)	EZM125QOA
LJL Circuit Breaker Alternate Lug (DE2)	Kit includes (3) separate lugs for (1) #2 AWG - 500 kcmil Al or (1) #2 AWG - 600 kcmil Cu per lug.	AL400L61K3
LJL Circuit Breaker Seal Kit	Tamper-evident kit to seal LJL trip dial cover, (1) per circuit breaker, if required. Meets NEC 240-6 [c]	MICROTUSEAL
Meter Socket Closing Plates	Lexan Closing Plate—EZM, EZMR, EZMH, EZMT Metal Closing plate—EZMR, EZMH, EZML	29007 RSG4
Sealing Rings	Snap-on (Stainless Steel) Screw-Type (Aluminum) Latch-Type (Aluminum)-standard	ARP00026 29008W 2920910001
Barrel Lock Kit	For use on ringless EZM or MP branch unit covers, includes 6 each of head protectors, lock nuts and sealing caps. (Barrel lock not included)	MMBLC
Tenant Circuit Breaker Filler Plates	125 A Branches—2P Type QO (2 per opening) 225 A Branches—2P and 3P Q-Frame	QOFP
Lug Landing Kit	For use with EZM 1200 A Mains suffix -CBU or -FSB. Order lugs separately	EZM1200ULL

[56] Must use EZM125QOA adapter.
[57] QO-VH tenant circuit breaker is rated 22 k AIR max.
[58] 3-pole QJP tenant circuit breaker is rated 65 k AIR max. at 240/120 Vac, 3Ø4W High Leg Delta, or 100 k AIR max. at 208Y/120 Vac, 3Ø4W.
[59] Consult your nearest Schneider Electric sales office for details.
[60] All sockets include 5th Jaw factory-installed except EZM11__ devices.
[61] Meter center short circuit current rating is 10,000 RMS symmetrical amperes with manual circuit closers installed (bypass is not designed for use as continuous duty).
[62] For use on ring type meter sockets only.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025


Table 2.35 Accessories (cont'd.)

Accessory	Description	Cat. No.
Branch Section Mounting Kit for Riser Applications	This kit is needed when installing and connecting meter center branch sections to EZ-Meter Pak busway center tap mains in multi-floor riser applications (1 per branch section)	EZMCTMKIT
Branch Terminal Box	This device accommodates a maximum conductor size of 300 kcmil when voltage drop calculations require sizes over 2/0. The EZM3BTB accommodates oversizing conductors of up to 3 circuits, mounts above or below a 125 A EZM branch, and is rated NEMA 3R when below device, NEMA 1 when above device. The EZM6BTB accommodates oversizing conductors of up to 6 circuits, mounts above a 125 A EZM branch, and is rated NEMA 1.	EZM3BTB EZM6BTB
Load Center Main Lug Kit 125 A	125 A main lug kit for load centers, supporting larger wire sizes 6-4/0.	QOL125VD


© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Dimensions for EZ Meter-Pak Meter Centers

Table 2.36: Main Device Dimensions and Accessories (in.)

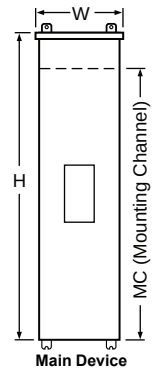

Main Device

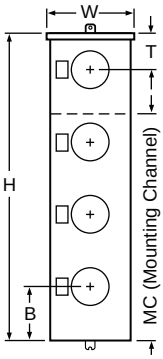


Branch Device

Cat. No.	Height (H)	Width (W)	Depth (D)	MC Channel (MC)	Cat. No.	Height (H)	Width (W)	Depth (D)	MC Channel (MC)
EZM11000CB	53.97	18.66	11.50	34.30	EZM1ELBOW *[63] [64] [65]*	19.50	14.52	8.01	11.85
EZM11000CBU	66.27	32.39	13.70	47.28	EZM31000CB	53.97	18.66	11.50	34.30
EZM11200G/JCBT	46.90	23.69	13.69	13.75	EZM31000CBU	66.27	32.39	13.70	47.28
EZM11200G/JCBE	66.20	32.39	13.69	50.09	EZM31200G/JCBT	46.90	23.69	13.69	13.75
EZM11200FST	46.90	23.69	13.69	13.75	EZM31200G/JCBE	66.20	32.39	13.69	50.09
EZM11200FSE	66.20	32.39	13.69	50.09	EZM31200TBU	44.71	33.16	11.68	31.17
EZM11200G/JCBU	65.30	23.69	13.69	49.11	EZM31200G/JCBU	65.30	23.69	13.69	49.11
EZM11200FSB	65.30	23.69	13.69	49.11	EZM31200FSB	65.30	23.69	13.69	49.11
EZM11200TBU	44.71	33.16	11.68	31.17	EZM31200FST	46.90	23.69	13.69	13.75
EZM11200GCBUMS	65.30	23.69	13.63	49.12	EZM31200FSE	66.20	32.39	13.69	51.09
EZM11200GCBEMS	66.27	32.39	13.70	50.09	EZM31200GCBUMS	65.30	23.69	13.63	49.12
EZM11200JCBUMS	65.30	23.69	13.63	49.12	EZM31200GCBEMS	66.27	32.39	13.70	50.09
EZM11200JCBEMS	66.27	32.39	13.70	50.09	EZM31200GCBTMS	46.93	23.69	13.63	13.75
EZM11200JCBTMS	46.93	23.69	13.63	13.75	EZM31200JCBUMS	65.30	23.69	13.63	49.12
EZM11600G/JCBC	68.70	30.19	18.33	38.13	EZM31200JCBEMS	66.27	32.39	13.70	50.09
EZM11600G/JCBU	68.70	30.19	18.33	49.12	EZM31200JCBTMS	46.93	23.69	13.63	13.75
EZM11600TB	55.09	22.48	13.00	27.92	EZM31600G/JCBC	68.70	30.19	18.33	38.13
EZM11600GCBUMS	68.91	30.19	18.31	44.50	EZM31600G/JCBU	68.70	30.19	18.33	49.12
EZM11600GCBCMS	68.91	30.19	18.31	44.50	EZM31600TB	55.09	22.48	13.00	27.92
EZM11600JCBUMS	68.91	30.19	18.31	44.50	EZM31600GCBUMS	68.91	30.19	18.31	44.50
EZM11600JCBCMS	68.91	30.19	18.31	44.50	EZM31600GCBCMS	68.91	30.19	18.31	44.50
EZM12000CB	68.70	30.19	18.33	44.25	EZM31600JCBUMS	68.91	30.19	18.31	44.50
EZM12000CBU	68.70	30.19	18.33	44.25	EZM31600JCBCMS	68.91	30.19	18.31	44.50
EZM12000TB	71.09	30.19	21.46	37.62	EZM32000CB	68.70	30.19	18.33	44.25
EZM12000CBMS	68.91	30.19	18.31	44.50	EZM32000CBU	68.70	30.19	18.33	44.25
EZM12000CBUMS	68.91	30.19	18.31	44.50	EZM32000TB	71.09	30.19	21.46	37.62
EZM1225TB *[65]*	21.81	11.66	6.37	13.00	EZM32000CBMS	68.91	30.19	18.31	44.50
EZM1400CB	53.97	18.66	11.50	34.30	EZM32000CBUMS	68.91	30.19	18.31	44.50
EZM1400CBU	69.03	20.46	11.50	49.37	EZM3225TB *[65]*	21.81	11.66	6.37	13.00
EZM1400FS	53.97	18.66	11.50	34.30	EZM3400CB	53.97	18.66	11.50	34.30
EZM1400FSU	69.03	20.46	11.50	49.37	EZM3400CBU	69.03	20.46	11.50	49.37
EZM1400TB	30.46	17.15	7.09	16.29	EZM3400FS	53.97	18.66	11.50	34.30
EZM1400TBU	35.71	17.16	8.00	27.17	EZM3400FSU	69.03	20.46	11.50	49.37
EZM1600CB	53.97	18.66	11.50	34.30	EZM3400TB	30.46	17.15	7.09	16.29
EZM1600CBU	69.03	20.46	11.50	49.37	EZM3400TBU	35.71	17.16	8.00	27.17
EZM16000FS	53.97	18.66	11.50	34.30	EZM3600CB	53.97	18.66	11.50	34.30
EZM1600FSU	69.03	20.46	11.50	49.37	EZM3600CBU	69.03	20.46	11.50	49.37
EZM1600TB	30.46	17.15	7.09	16.29	EZM36000FS	53.97	18.66	11.50	34.30
EZM1800CB	53.97	18.66	11.50	34.30	EZM3600FSU	69.03	20.46	11.50	49.37
EZM1800CBU	69.03	20.46	11.50	49.37	EZM3600TB	30.46	17.15	7.09	16.29
EZM1800FS	53.97	18.66	11.50	34.30	EZM3800CB	53.97	18.66	11.50	34.30
EZM1800FSU	69.03	20.46	11.50	49.37	EZM3800CBU	69.03	20.46	11.50	49.37
EZM1800TB	53.97	18.66	11.50	34.30	EZM3800FS	53.97	18.66	11.50	34.30
EZM1800TBCU	51.76	22.48	7.09	28.01	EZM3800FSU	69.03	20.46	11.50	49.37
EZM1800TBU	39.96	25.16	11.68	31.17	EZM3800TB	53.97	18.66	11.50	34.30
EZM1EXT *[65]*	19.34	11.66	6.37	11.85	EZM3800TBCU	51.76	22.48	7.09	28.01
EZM1EXT6 *[65]*	19.34	6.00	6.37	11.85	EZM3800TBU	39.96	25.16	11.68	31.17
EZM1CORNER *[63][65][66]*	19.50	14.40	8.02	11.85	EZM3EXT *[65]*	19.34	11.66	6.37	11.85
EZM3BTB *[67]*	19.31	12.25	8.43	—	EZM3EXT6 *[65]*	19.34	6.00	6.37	11.85
EZM6BTB *[63]*	23.00	12.13	8.00	—	EZM3CORNER *[63] [65] [66]*	19.50	14.40	8.02	11.85

[63] Indoor only.
[64] Each leg of elbow section measures 6.17 in. corner of wall to start of next enclosure.
[65] Device supplied without mounting channel, secure to wall by use of swingable mounting feet.
[66] Each leg of this corner section measures 14.72 in. from wall to start of next enclosure.
[67] Outdoor when mounted below branch device. Indoor only when mounted above branch device.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



Branch Device

Table 2.37: Single Phase Branch Device Dimensions (in.) *[68]*

Cat. No. [available suffix]	Height (H)	Width (W)	Depth (D)	MC Channel (MC)	Top Meter (T)	Bottom Meter (B)	Cat. No. [available suffix]	Height (H)	Width (W)	Depth (D)	MC Channel (MC)	Top Meter (T)	Bottom Meter (B)
EZM112225 [X, CUX]	43.41	17.38	8.09	32.34	22.18	12.23	EZML112225 [CU]	39.06	19.44	9.44	25.51	11.67	13.39
EZM113125 [X, CUX]	42.37	12.25	7.09	31.30	13.18	11.19	EZML112225D	39.06	19.44	9.44	25.51	11.67	13.39
EZM113225 [X, CUX]	43.41	17.38	8.09	32.34	13.18	12.23	EZML112400	69.61	23.21	9.44	37.81	20.64	21.53
EZM114125 [X, CUX]	48.12	12.25	7.09	31.30	9.93	11.19	EZML113125 [X, CUX]	45.06	15.56	9.48	34.23	12.84	12.22
EZM114225 [X, CUX]	52.00	17.38	8.09	32.34	12.77	12.23	EZML113225 [CU]	53.06	19.44	9.44	39.51	11.67	13.39
EZM115125 [X, CUX]	57.12	12.25	7.09	31.30	9.93	11.19	EZML114125 [X, CUX]	55.06	15.56	9.48	34.29	12.84	12.22
EZM115225 [CU]	61.00	17.38	8.09	32.35	12.77	12.23	EZML114225 [CU]	67.06	19.44	9.44	39.51	11.67	13.39
EZM116125 [X, CUX]	66.12	12.25	7.09	40.30	9.93	11.19	EZML114225D	67.06	19.44	9.44	39.51	11.67	13.39
EZM16225	69.94	17.38	8.09	41.33	12.72	12.22	EZML115125 [X, CUX]	65.06	15.56	9.48	34.29	12.84	12.22
EZMH112225 [X, CUX]	43.41	17.38	8.09	32.34	22.18	12.23	EZML116125 [X, CUX]	75.06	15.56	9.48	44.29	12.84	12.25
EZMH113125 [X, CUX]	42.37	12.25	7.09	31.30	13.18	11.19	EZMR112225 [X, CUX]	43.41	17.38	8.09	32.34	22.18	12.23
EZMH113225 [X, CUX]	43.41	17.38	8.09	32.34	13.18	12.23	EZMR113125 [X, CUX]	42.37	12.25	7.09	31.30	13.18	11.19
EZMH114125 [X, CUX]	48.12	12.25	7.09	31.30	9.93	11.19	EZMR113225 [X, CUX]	43.41	17.38	8.09	32.34	13.18	12.23
EZMH114225 [X, CUX]	52.00	17.38	8.09	32.34	12.77	12.23	EZMR114125 [X, CUX]	48.12	12.25	7.09	31.30	9.93	11.19
EZMH115125 [X, CUX]	57.12	12.25	7.09	31.30	9.93	11.19	EZMR114225 [X, CUX]	52.00	17.38	8.09	32.34	12.77	12.23
EZMH115225 [CU]	61.00	17.38	8.09	32.35	12.77	12.23	EZMR115125 [X, CUX]	57.12	12.25	7.09	31.30	9.93	11.19
EZMH116125 [X, CUX]	66.12	12.25	7.09	40.30	9.93	11.19	EZMR115225 [CU]	61.00	17.38	8.09	32.35	12.77	12.23
EZMH116225	69.94	17.37	8.09	41.33	12.72	12.22	EZMR116125 [X, CUX]	66.12	12.25	7.09	40.30	9.93	11.19
EZMK111400	45.55	27.56	9.74	37.81	24.51	21.04	EZMR116225	69.94	17.37	8.09	41.33	12.72	12.22
EZML111225 [CU]	39.06	19.44	9.44	25.51	25.67	13.39	EZMT111225	25.45	22.42	9.38	16.19	4.67	20.45
EZML111225D	39.06	19.44	9.44	25.51	25.67	13.39	EZMT112225	60.56	22.42	9.38	43.63	12.67	28.89
EZML111400	44.55	23.21	9.44	37.81	24.02	21.53	EZMT113225	79.56	22.42	9.38	48.25	12.67	28.89

Table 2.38: Three Phase Branch Device Dimensions (in.) *[68]*

Cat. No. [available suffix]	Height (H)	Width (W)	Depth (D)	MC Channel (MC)	Top Meter (T)	Bottom Meter (B)	Cat. No. [available suffix]	Height (H)	Width (W)	Depth (D)	MC Channel (MC)	Top Meter (T)	Bottom Meter (B)
EZM312225 [X, CUX, CA, XCA, CUXCA]	43.41	17.38	8.09	32.34	22.18	12.23	EZML314225 [CU, CA, CUCA]	67.06	19.44	9.44	39.51	11.67	13.39
EZM313125 [X, CUX, CA, XCA, CUXCA]	42.37	12.25	7.09	31.30	13.18	11.19	EZML315125 [X, CUX]	65.06	15.56	9.48	34.29	12.84	12.22
EZM313125M10	42.37	12.25	7.09	24.29	10.18	12.19	EZML316125 [X, CUX]	75.06	15.56	9.48	44.29	12.84	12.25
EZM313225 [X, CUX, CA, XCA, CUXCA]	43.41	17.38	8.09	32.34	13.18	12.23	EZML331225 [CU]	39.06	19.44	9.44	25.51	25.67	13.39
EZM314125 [X, CUX, CA, XCA, CUXCA]	48.12	12.25	7.09	31.30	9.93	11.19	EZML331225D	39.06	19.44	9.44	25.51	25.67	13.39
EZM314125M10	52.12	12.25	7.09	34.29	9.93	12.19	EZML331400	45.55	23.21	9.44	37.81	24.02	21.53
EZM314225 [X, CUX, CA, XCA, CUXCA]	52.00	17.38	8.09	32.34	12.77	12.23	EZML332225 [CU]	39.06	19.44	9.44	35.51	11.67	13.39
EZM315125 [X, CUX, CA, XCA, CUXCA]	57.12	12.25	7.09	31.30	9.93	11.19	EZML332225D	39.06	19.44	9.44	35.51	11.67	13.39
EZM315125M10	62.12	12.25	7.09	34.29	9.93	12.19	EZML332400 [CU]	69.61	23.21	9.44	37.82	20.64	21.53
EZM315225 [CU, CA, CUCA]	61.00	17.38	8.09	32.35	12.77	12.23	EZML333225 [CU]	53.06	19.44	9.44	39.51	11.67	13.39
EZM316125 [X, CUX, CA, XCA, CUXCA]	66.12	12.25	7.09	40.30	9.93	11.19	EZML333225D	53.06	19.44	9.44	39.51	11.67	13.39
EZM316225 [CU, CA]	69.94	17.37	8.09	41.33	12.72	12.22	EZML334225 [CU]	67.06	19.44	9.44	39.51	11.67	13.39
EZMH312225 [X, CUX, CA, XCA]	43.41	17.38	8.09	32.34	22.18	12.23	EZML334225D	67.06	19.44	9.44	39.51	11.67	13.39
EZMH313125 [X, CUX, CA, XCA]	42.37	12.25	7.09	31.30	13.18	11.19	EZMR312225 [X, CUX, CA, XCA]	43.41	17.38	8.09	32.34	22.18	12.23
EZMH313225 [X, CUX, CA, XCA]	43.41	17.38	8.09	32.34	13.18	12.23	EZMR313125 [X, CUX, CA, XCA]	42.37	12.25	8.09	31.30	13.18	11.19
EZMH314125 [X, CUX, CA, XCA]	48.12	12.25	7.09	31.30	9.93	11.19	EZMR313225 [X, CUX, CA, XCA]	43.41	17.38	8.09	32.34	13.18	12.23
EZMH314225 [X, CUX, CA, XCA]	52.00	17.38	8.09	32.34	12.77	12.23	EZMR314125 [X, CUX, CA, XCA]	48.12	12.25	7.09	31.30	9.93	11.19
EZMH315125 [X, CUX, CA, XCA]	57.12	12.25	7.09	31.30	9.93	11.19	EZMR314225 [X, CUX, CA, XCA]	52.00	17.38	8.09	32.34	12.77	12.23
EZMH315225 [CU, CA, CUCA]	61.00	17.38	8.09	32.35	12.77	12.23	EZMR315125 [X, CUX, CA, XCA]	57.12	12.25	7.09	31.30	9.93	11.19
EZMH316125 [X, CUX, CA, XCA]	66.12	12.25	7.09	40.30	9.93	11.19	EZMR315225 [CU, CA, CUXCA]	61.00	17.38	8.09	32.35	12.77	12.23
EZMH316225 [CU, CA]	69.94	17.37	8.09	41.33	12.72	12.22	EZMR316125 [X, CUX, CA, XCA]	66.12	12.25	7.09	40.30	9.93	11.19
EZMK331400	45.55	27.56	9.74	30.60	24.51	21.04	EZMR316225 [CU, CA]	69.94	17.37	8.09	41.33	12.72	12.22
EZMK332400	72.99	27.56	9.74	37.81	22.26	21.04	EZMR332225 [CU]	39.06	19.44	9.44	25.51	11.67	13.39
EZML311400 [CA]	45.55	23.21	9.44	37.81	24.02	21.53	EZMR333225 [CU]	53.06	19.44	9.44	39.51	11.67	13.39
EZML311225 [CU, CA, CUCA]	39.06	19.44	9.44	25.51	25.67	13.39	EZMR334225 [CU]	67.06	19.44	9.44	39.51	11.67	13.39
EZML312225 [CU, CA, CUCA]	39.06	19.44	9.44	25.51	11.67	13.39	EZMT311225 [CA]	25.45	22.42	9.38	16.19	4.67	20.45
EZML312225D [CA]	39.06	19.44	9.44	25.51	11.67	13.39	EZMT312225 [CA]	60.56	22.42	9.38	43.63	12.67	28.89
EZML312400 [CA]	69.61	23.21	9.44	37.82	20.64	21.53	EZMT313225 [CA]	79.56	22.42	9.38	48.25	12.67	28.89
EZML313125 [X, CUX]	45.06	15.56	9.48	34.23	12.84	12.22	EZMT331225	25.12	22.42	9.38	16.19	4.67	20.45
EZML313225 [CU, CA, CUCA]	53.06	19.44	9.44	39.51	11.67	13.39	EZMT332225	60.56	22.42	9.38	43.63	12.67	28.89
EZML313225D [CA]	53.06	19.44	9.44	39.51	11.67	13.39	EZMT333225	79.56	22.42	9.38	48.25	12.67	28.89
EZML314125 [X, CUX]	55.06	15.56	9.48	34.29	12.84	12.22							

[68] Standard branch units are available without suffix added.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Section 3

Safety Switches



Light Duty



General Duty



Heavy Duty



Stainless Steel Heavy Duty

EZ Selector - Selection Assistance 3-2

- Safety Switches EZ Selector - Selection Assistance 3-2
  - Steps to select a safety switch 3-2
  - Wiring Diagrams 3-3
  - Enclosure Options 3-4
  - Class H, R, J, and L Fuse Provisions 3-4

Light Duty Safety Switches 3-5

- Light Duty—Visible Blades 10 kA Short Circuit Current Rating 3-5

General Duty Safety Switches 3-6

- General Duty—Up to 100 kA Short Circuit Current Rating 3-6
  - 240 Volt – Single Throw Fusible Switches 3-6
  - 240 Volt—Single Throw Non-Fusible Switches 3-7
- Accessories and Lug Data 3-8
  - Field-Installed Fuse Puller Kits 3-8
  - Field-Installed Electrical Interlock Kits 3-8
  - Equipment Grounding Kits 3-8
  - Field-Installed Lug Kit 400–600 A 3-8
  - Terminal Lug Data 3-9
- Dimensions for General Duty Safety Switches 3-9

Heavy Duty Safety Switches 3-10

- 240 Volt—Single Throw Fusible Switches 3-10
- 600 Volt—Single Throw Fusible Switches 3-11
- 600 Volt—Single Throw Non-Fusible Switches 3-12
- UL Listed Maximum Short Circuit Current Ratings—AC only 3-13
- Special Applications 3-14
- Accessories and Special Features 3-16
- Dimensions for Heavy Duty Safety Switches 3-22
  - Dimensions for NEMA Type 1 and 3R Safety Switches 3-22
  - Dimensions for NEMA Type 4, 4X, 5, 7, 9, and 12 Safety Switches 3-24

Double Throw Safety Switches 3-25

- Fusible and Non-Fusible Overview 3-25
- 240 Volt — Double Throw Safety Switches 3-26
- 600 Volt — Double Throw Safety Switches 3-27
- Accessories and Lug Data 3-28
- Terminal Lug Data 3-30
- Application Data 3-30
- Dimensions for Double Throw Safety Switches 3-31
  - Dimensions for DT/DTU (Series F) Safety Switches 30–100 A 3-31
  - Dimensions for DTU (Series A E T4) Safety Switches 200–600 A 3-32










© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Steps to select a safety switch

1. Select product type:
   - General duty safety switch
   - Heavy duty safety switch
   - Double throw safety switch
2. Select switch type.
3. Select fuse type: fused, non-fused, cartridge, class T or plug
4. Select maximum voltage: 240 Vac / 250 Vdc, 600 Vac / 600 Vdc
5. Select amperes:
   - General/light duty – 30 A, 60 A, 100 A, 200 A, 400 A, 800 A
   - Heavy duty – 30 A, 60 A, 100 A, 200 A, 225 A, 400 A, 600 A, 800 A, 1200 A
   - Double throw – 30 A, 60 A, 100 A, 200 A, 600 A
6. Select number of poles:
   - General/light duty – 1, 2 or 3
   - Heavy duty – 2, 3, 4 or 6
   - Double Throw– 2, 3, 4 or 6
7. Select if neutral is needed.
8. Select enclosure type:
   - General/light duty – NEMA 1, NEMA 3R
   - Heavy duty – NEMA1, NEMA 12K, NEMA 3R, 5, 12, NEMA 4, 4X, 5 (stainless steel 304), NEMA 4, 4X, 5 (stainless steel 316)
   - Double throw – NEMA1, NEMA 12K, NEMA 3R, 5, 12, NEMA 4, 4X, 5 (stainless steel 304)
   - Optional enclosure types for special heavy duty applications.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Wiring Diagrams

Fuse	Fused with Neutral	Non-Fused
	Two-wire **(1 blade and fuse holder)** 	
Two-wire **(2 blades and fuse holder)** 	**Three-wire** **(2 blades and fuse holder)** 	**Two-wire** **(2 blades)** 
Three-wire **(3 blades and fuse holders)** 	**Four-wire** **(3 blades and fuse holders)** 	**Three-wire** **(3 blades)** 
Four-wire **(4 blades and fuse holders)** 		**Four wires (4 blades)** 
Six-wire **(6 blades and fuse holders)** 		**Six-wires (6 blades)** 


© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Enclosure Options

Enclosure units are third party certified to UL 50E by Underwriters Laboratories

Type 1	Design for indoor use provide degree of protection against access to hazardous parts, protects against ingress of solid foreign objects.
Type 3R	Design for indoor or outdoor use provide degree of protection against access to hazardous parts, protects against ingress of solid foreign objects, degree of protection to due ingress of water (rain, sleet, snow) and will remain undamaged by external formation of ice.
Type 4X	Design for indoor or outdoor use provide degree of protection against access to hazardous parts, prevents ingress of solid foreign objects, degree of protection to due ingress of water (rain, sleet, snow, splashing water, and hose directed water) and provides additional protection against corrosion, and will remain undamaged by external formation of ice.
Type 12	Design for indoor use provide degree of protection against access to hazardous parts, protects against ingress of solid foreign objects (falling dirt and circulating dust, ling, fibers, and flyings) provide degree of protection due to ingress of water (dripping and light splashing).

- Type 4X enclosures can be used for Type 4 or Type 5 Applications.
- Type 12 enclosures can be used for Type 5 applications and Type 3R via removal of drip hole knock out or drain screw.
- Type 3R (800 and 1200 A Heavy Duty) are shipped as Type 5 - must remove drain screw for Type 3R applications.



Class R Fuse

Class H, R, J, and L Fuse Provisions

Plug Type Fuses: Fuses for standard circuits (not high-voltage appliance circuits) are called plug fuses and have screw-in bases. There are two different types of bases and screw-in fuses: the Edison base (found on Type T fuses) and the rejection base (found on Type S fuses).

Class H or K Fuse Provisions: Fusible Square D 30–600 A heavy duty safety switches accept Class H or K fuses as standard. With Class H or K fuses installed, the switch is UL Listed for use on systems with up to 10 kA available short circuit current.

Class R Fuse Provisions: Fusible Square D 30–600 A heavy duty safety switches will accept Class R fuses as standard. A field-installed rejection kit is available which, when installed, accepts only Class R fuses. With the installation of the rejection kit and Class R fuses, the switch is UL Listed for use on systems with up to 200 kA available short circuit current.

Class J Fuse Provisions: Provisions for installing Class J fuses are included in 30–400 A 600 Volt, and 100–400 A 240 Volt, fusible heavy duty safety switches. Conversion to Class J fuse spacing requires relocating the load side fuse base assembly from the standard Class H fuse location to an alternate position as marked in the enclosure. With Class J fuses installed, the switch is UL Listed for use on systems with up to 200 kA available short circuit current. Switches rated 600 A, 240 or 600 Volt require the addition of an adapter kit: H600J.

Class L Fuse Provisions: Fusible 800 and 1200 A safety switches use Class L bolt-in fuses and are rated for use on systems with up to 200 kA at 600 Vac maximum. 1200 A switches accept class L fuses from 601–1200 A, 800 A switches accept Class L fuses from 601–800 A.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



L111N

Light Duty—Visible Blades 10 kA Short Circuit Current Rating

The Square D light duty enclosed switch is ideal for home applications in disconnecting power to workshops, hobby rooms, furnaces, and garages.

The light duty safety switch has visible blades and a ground lug as standard features. NEC 2023 protects against these units from being applied in any application, for compliance with NE2023 obtain Heavy Duty Safety Switch.

Table 3.1: Light Duty 120 V or 120/240 Volt — Single Throw Fusible Switches

System	Amperes	NEMA Type 1 Indoor Cat. No.	Equipment Ground Kit	Horsepower Ratings			
				Std (Fast Acting One-Time Fuses)		Max (Dual Element Time-Delay Fuses)	
				1Ø	3Ø	1Ø	3Ø
2 Wire (1 Blade and Fuseholder, 1 Neutral) – 120 Vac Plug Type Fuses							
	30	L111N	Standard	—	—	—	—
3 Wire (2 Blade and Fuseholder, 1 Neutral) – 120/240 Vac Plug Type Fuses							
	30	L211N	Standard	1/2	2	1-1/2	3
3 Wire (2 Blade and Fuseholder, 1 Neutral) – 120/240 Vac Cartridge Type Fuses							
	30	L221N	Standard	1/2	2	1-1/2	3

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



D223N

General Duty—Up To 100 kA Short Circuit Current Rating

General duty safety switches are designed for residential and commercial applications where durability and economy are prime considerations. Typical loads are lighting, air conditioning, and appliances. They are suitable for use as service equipment when equipped with a factory or field-installed neutral assembly or a field-installed service grounding kit, (see page 3-8) as applicable.

General duty safety switches are UL Listed, File E2875, and meet or exceed the NEMA Standard KS1. NEC 2023 protects against these units from being applied in any application; for compliance with NE2023 obtain Heavy Duty Safety Switch.

240 Volt – Single Throw Fusible Switches

Table 3.2: Fusible Single Throw Safety Switches

System	Amperes	NEMA TYPE 1	NEMA Type 3R *[1]*	Class R Fuse Kits *[2]*	Line Side Barrier	Horsepower Ratings			
						Std. (Fast Acting One-Time Fuses		Max. (Dual Element Time-Delay Fuses)	
		Cat. No.	Cat. No.	Cat. No.		1Ø	3Ø	1Ø	3Ø
2 Wire (1 Blade and Fuseholder, 1 Neutral)—120 Vac									
Use Light Duty Devices or use three-wire devices									
3 Wire (2 Blade and Fuseholder, 1 Neutral) – 120/240 Vac Plug Type Fuses									
	30	D211N	D211NRB	—	—	1-1/2	—	3	—
3 Wire (2 Blade and Fuseholder, 1 Neutral) –240 Vac Cart. Type Fuses									
	30	D221N	D221NRB	DRK30	—	1-1/2	3 *[3]*	3	7-1/2 *[3]*
	60	D222N	D222NRB	RFK03H	Factory Included	3	7-1/2 *[3]*	10	15 *[3]*
	100	D223N	D223NRB	RFK10	Factory Included	7–1/2	15 *[3]*	15	30 *[3]*
	200	D224N *[4]*	D224NRB *[4]*	HRK1020	Factory Included	15	25 *[3]*	—	60 *[3]*
	400	D225N	D225NR	DRK40	LSBI02	—	—	—	—
	600 *[5]*	D226N	D226NR	DRK600	LSBI02	—	—	—	—
4 Wire (3 Blade and Fuseholder, 1 Neutral) –240 Vac Cart. Type Fuses									
	30	D321N	D321NRB	DRK30	—	1-1/2	3	3	7-1/2
	60	D322N	D322NRB	RFK03H	Factory Included	3	7-1/2 *[6]*	10	15 *[6]*
	100	D323N	D323NRB	RFK10	Factory Included	7-1/2	15 *[6]*	15	30 *[6]*
	200	D324N *[4]*	D324NRB *[4]*	HRK1020	Factory Included	15	25 *[6]*	—	60 *[6]*
	400	D325N	D325NR	DRK40	LSBI02	—	50	—	—
	600 *[5]*	D326N	D326NR	DRK600	LSBI02	—	75	—	150
4 Wire (3 Blade and Fuseholder, 1 Neutral) –240 Vac CLASS T Type Fuses									
	400 *[7]*	D325NT	D325NTR	DRK40	LSBI02	—	50	—	—
	600 *[7]*	D326NT	D326NTR	DRK600	LSBI02	—	75	—	150
	800 *[7]*	T327N	T327NR	—	LSBI02	—	100	—	—

Table 3.3: Fusible Switch UL Listed Maximum Short Circuit Current Ratings — AC Only

Fuse Class	UL Listed Short Circuit Rating
Plug	10 kA
H, K	10 kA
R	10 kA *[8]*
R with Rejection Fuse Clips	100 kA
J	100 kA
T	100 kA

[1] Bolt-on hubs —Refer to Table 3.24 Rainproof Bolt-On Hubs., page 3-16
[2] When properly installed, the Class R Fuse Kit accepts only Class R fuses.
[3] For corner grounded delta systems, use switching poles for ungrounded conductors. See data bulletin 2700DB0202 for additional information.
[4] For 200% neutral, order (1) additional neutral kit SN20A and (1) neutral jumper kit SN20NI.
[5] Order Class J Fuse Kit GDJK600 if using Class J fuses.
[6] If corner grounded delta system, use outer switching poles for ungrounded conductors.
[7] D325NT, D325NTR, D326NT, D326NTR, T327N and T327NR accept only 300Vac Class T fuses.
[8] Class R fuses are rated for 100 kA, however without the rejection fuse clips - system is limited to 10 kA since Class H or K fused could be installed in the future.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

240 Volt—Single Throw Non-Fusible Switches

Table 3.4: Non-Fusible Single Throw Safety Switches

System	Amperes	NEMA Type 1	NEMA Type 3R *[9]*	Line Side Barriers *[10]*	Equipment Ground Kit	Neutral Kit	Horsepower Ratings (Max.) Max. (Dual Element Time-Delay Fuses)	
		Cat. No.	Cat. No.		Cat. No.		1Ø	3Ø
2 Wire (2 Blade)—240 Vac								
	30	—	DU221RB	—	PK3GTA1	—	3	—
	60	—	DU222RB	—	GTK03	—	10	—
	100	Use three wire switch	—	—	—	—	—	—
	200		—	—	—	—	—	—
	400		—	—	—	—	—	—
	600		—	—	—	—	—	—
3 Wire (3 Blade)—240 Vac								
	30	DU321	DU321RB	—	PK3GTA1	—	3	7-1/2
	60	DU322	DU322RB	—	GTK03	—	10	15
	100	DU323 *[11]*	DU323RB *[11]*	Factory Included	GTK0610	—	10	30
	200	DU324 *[12]*	DU324RB *[12]*	Factory Included	PKOGTA2	—	15	60
	400	DU325	—	LSBI02	PKOGTA2	—	—	125
	600	DU326 *[13]*	—	LSBI02	PKOGTA2	—	—	150

System equal or less than 10 kA SCCR — Any Brand of circuit breaker or fuse not exceeding the ampere rating of the switch may be used in conjunction with a non-fusible safety switch.

Systems above 10kA SCCR — The UL listed short circuit current rating for Square D non-fusible switches is based upon the switch being used in conjunction with fuses or Square D circuit breakers or Mag-Gard motor circuit protection.

Table 3.5: Non-Fusible Safety Switch Short Circuit Current Rating

Fuse Class or Circuit Breaker Type *[14]*	UL Listed Short Circuit Rating
Any Brand Circuit Breaker	10 kA
H or J PowerPact Circuit Breaker	Up to 65 kA *[15]*
H, K	10 kA
J, R	100 kA *[16]*
T	100 kA *[17]*

[9] Bolt-on hubs—Refer to Hubs, page 3-16.
[10] Factory included to protect against inadvertent contact with live parts per UL 869A and NEC Service entrance barrier requirements.
[11] If a neutral assembly is required, order and field install SN0610.
[12] If a neutral assembly is required, order and field install a SN20A Neutral Assembly Kit. For a 200% neutral application, order and field install (2) SN20A Neutral Assembly Kits and (1) SN20NI Neutral Jumper Kit.
[13] If a neutral assembly is required, order and field install D600SN.
[14] Ampere rating of fuse or circuit breaker not to exceed switch ampere rating.
[15] Only applicable to DU324 and DU324RB. HD, JD = 25 kA maximum.
[16] SCCR = 50 kA, applicable to DU222RB, DU322 and DU322RB.
[17] Only applicable to DU323, DU323RB, DU325 and DU326.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



FPK03 Fuse Puller Kit
Series F Fusible Switches Only

Field-Installed Fuse Puller Kits

Kit consists of three fuse pullers as required for a 3P, fusible, 60 or 100 A general duty switch. Kits can be installed only in 60 or 100 A Series F fusible switches.

Table 3.6: Fuse Puller Kits

Switch Ampere Rating	Series No.	Cat. No.
60	F	FPK03
100	F	FPK0610



EIK031



EIK1

Field-Installed Electrical Interlock Kits

Electrical interlocks for Series F 100–200 A general duty safety switches & Series F 60 A fusible general duty safety switches are available in kit form for field installation. Each kit contains instructions for proper field mounting. A pivot arm operates from switch mechanism, breaking the control circuit before the main switch blades break. Switches with electrical interlocks installed are UL Listed.

Table 3.7: Electrical Interlock Kit

Switch Amperes Rating	Electrical Interlock Kit Cat. No. *[18]*
Fusible Series F 60	EIK031 or EIK032
Series F 100–200	EIK1 or EIK2

Table 3.8: Electrical Interlock Contact Ratings *[19]*

Interlock Type	AC 50 or 60Hz				DC		
	Volts	Make	Break	Cont.	Volts	Make / Break	Cont.
1 N. O. / 1 N. C. Contact (-1 Suffix *[20]*)	120	40.00 A	15.00 A	15.00 A	115	0.50 A	15.00 A
	240	20.00 A	10.00 A	15.00 A	230	0.25 A	15.00 A
2 N. O. / 2 N. C. Contacts (-2 Suffix *[21]*)	120	30.00 A	3.00 A	10.00 A	115	1.00 A	10.00 A
	240	15.00 A	1.5 A	10.00 A	230	0.30 A	10.00 A

Equipment Grounding Kits

Table 3.9: Equipment Grounding Kits

Switch Ampere Rating	Cat. No.	Lug Wire Range (AWG)
30 *[22]*	Std.	(1) 14 – 10 Cu or (1) 12 – 8 Al
30	PK3GTA1	(3) 14 – 4 Cu or (3) 12 – 4 Al or (6) 14 – 12 Cu or (6) 12 – 10 Al
60 *[23]*	GTK03	(2) 14 – 4 Cu or (2) 12 – 4 Al (4) 14 – 12 Cu or (4) 12 – 10 Al
100	GTK0610	(2) 14 – 1/0 Cu or (2) 12 – 1/0 Al (2) 14 – 6 Cu or (2) 12 – 6 Al
200	PKOGTA2	(2) 10 – 2/0 Cu or (2) 6 – 2/0 Cu Al
400, 600	PKOGTA2 *[24]*	(2) 10 – 2/0 Cu or (2) 6 – 2/0 Cu Al
800	PKOGTA3	(6) 6 – 3/0 Al/Cu Max.



PK3GTA1



GTK0610



PKOGTA2

Field-Installed Lug Kit 400–600 A

Table 3.10: Field-Installed Lug Kit 400–600 A

Switch Ampere Rating	Lug Kit Cat. No.	Wire Range/NEC	Lug Wire Range
400 or 600 Series E01, E02, and E03*[25]*	GD4060LK	1-1/0-600 kcmil 2-1/0-500 kcmil 4-1/0-250 kcmil	2-1/0-600 kcmil 4-1/0-250 kcmil

Line Side Barrier Kits

The field instable line side barrier kits are required to meet National Electric Code (NFPA 70) for service entrance applications. Barrier kits protect against inadvertent contact with line side, uninsulated, ungrounded or service terminal live parts.

Table 3.11: Line Side Barrier Kits for General Duty Safety Switches

Amperes	Voltage	Blades/Fuses	Catalog
30	600	2 or 3	LSBD602
60 *[26]*	240	2 or 3	LSBD202
60	600	2 or 3	LSBC02
100	240 / 600		
200	240	2	LSBE202
		3	LSBE203
	600	3	LSBE603
400 / 600 / 800	240	2 or 3	LSBI02

[18] Electrical interlock kit catalog numbers with -1 suffix indicate one normally open and one normally closed contact; -2 indicates two normally open and two normally closed contacts. Kits are UL Listed.
[19] Single-pole single-throw interlock kits are rated 1/2 hp at 110 and 220 Vac.
[20] -1 Suffix uses a 9007A01 limit switch.
[21] -2 Suffix uses a 9007C03 limit switch.
[22] Light duty switches only.
[23] 60 A non-fusible switches accept PK3GTA1.
[24] Two required if ground conductors are run in parrellel.
[25] Not suitable for use on 400 A NEMA Type 3R.
[26] Only for Fused applications

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Terminal Lug Data

Table 3.12: Terminal Lug Data *[27]*

Amperes	Conductors Per Phase	Wire Range Wire Bending Space Per NEC Table 312.6 AWG/kcmil	Lug Wire Range AWG/kcmil
30 *[28]*	1	12–8 (Al) or 14–8 (Cu)	12–8 (Al) or 14–8 (Cu)
30	1	12–6 (Al) or 14–6 (Cu)	12–6 (Al) or 14–6 (Cu)
60	1	12–3 (Al) or 14–3 (Cu)	12–2 (Al) or 14–2 (Cu)
100	1	12–1 (Al) or 14–1 (Cu)	12–1/0 (Al) or 14–1/0 (Cu)
200	1	6 –250 (Al/Cu)	6 –300 (Al/Cu)
400 NEMA Type 1	1 or 2	1/0 –600 (Al/Cu) or 1/0 –300 (Al/Cu)	(1) 1/0 –750 (Al/Cu) or (2) 1/0 –300 (Al/Cu)
400 NEMA Type 3R	2	1/0–250 (Al/Cu)	(1) 1 –600 (Al/Cu) or (2) 1/0 –250 (Al/Cu)
600	2	4 –500 (Al/Cu)	4 –600 (Al/Cu)
800	3	3/0 –500 (Al/Cu)	3/0 –500 (Al/Cu)

Dimensions for General Duty Safety Switches

Table 3.13: Approximate Dimensions

Cat.No.	Series	H		W		W/H		D		Std. Pack
		in.	mm	in.	mm	in.	mm	in.	mm	
L111N	E2	7.63	194	5.00	127	127	156	4.00	102	1
L211N	E2	7.63	194	5.00	127	6.13	156	4.00	102	1
L221N	E2	7.63	194	5.00	127	6.13	156	4.00	102	1
D211N	E3	9.25	235	6.75	171	7.25	184	3.63	92	5
D211NRB	E2	9.63	245	7.25	184	7.75	197	3.75	95	5
D221N	E3	9.25	235	6.75	171	7.25	184	3.63	92	5
D221NRB	E3	9.63	245	7.25	184	7.75	197	3.75	95	5
D222N	F1	14.63	372	6.50	165	7.45	189	4.88	124	1
D222NRB	F1	14.88	378	6.63	168	7.45	189	4.88	124	1
D223N	F3	17.50	445	8.50	216	10.50	267	6.50	165	1
D223NRB	F3	17.50	445	8.50	216	10.50	267	6.50	165	1
D224N	F1	29.00	737	17.25	438	19.00	483	8.25	210	1
D224NRB	F1	29.25	743	17.25	438	19.00	483	8.25	210	1
D225N	E3	45.12	1146	24.00	610	24.88	632	8.88	226	1
D225NR	E1	30.63	778	21.38	543	22.25	565	10.13	257	1
D226N	E3	49.13	1248	24.00	610	24.88	632	8.88	226	1
D226NR	E1	49.13	1248	24.75	629	25.13	638	8.88	226	1
D321N	E3	9.25	235	6.75	171	7.25	184	3.63	92	5
D321NRB	E3	9.63	245	7.25	184	7.75	197	3.75	95	5
D322N	F1	14.63	372	6.50	165	7.45	189	4.88	124	1
D322NRB	F1	14.88	378	6.63	168	7.45	189	4.88	124	1
D323N	F3	17.50	445	8.50	216	10.50	267	6.50	165	1
D323NRB	F3	17.50	445	8.50	216	10.50	267	6.50	165	1
D324N	F1	29.00	737	17.25	438	19.00	483	8.25	210	1
D324NRB	F1	29.25	743	17.25	438	19.00	483	8.25	210	1
D325N	E3	45.12	1146	24.00	610	24.88	632	8.88	226	1
D325NT	E3	45.12	1146	24.00	610	24.88	632	8.88	226	1
D325NR	E1	30.63	778	21.38	543	22.25	565	10.13	257	1
D325NTR	E1	30.63	778	21.38	543	22.25	565	10.13	257	1
D326N	E3	49.13	1248	24.00	610	24.88	632	8.88	226	1
D326NT	E3	49.13	1248	24.00	610	24.88	632	8.88	226	1
D326NR	E1	49.13	1248	24.75	629	25.13	638	8.88	226	1
D326NTR	E1	49.13	1246	24.75	629	25.13	638	8.88	226	1
DU221RB	E2	9.63	245	7.25	184	7.75	197	3.75	95	5
DU222RB	E1	9.63	245	7.25	184	7.75	197	3.75	95	5
DU321	E2	9.25	235	6.75	171	7.25	184	3.63	92	5
DU321RB	E2	9.63	245	7.25	184	7.75	197	3.75	95	5
DU322	E1	9.25	235	6.75	171	7.25	184	3.63	92	5
DU322RB	E1	9.63	245	7.25	184	7.75	197	3.75	95	5
DU323	F3	17.50	445	8.50	216	10.50	267	6.50	165	1
DU323RB	F3	17.50	445	8.50	216	10.50	267	6.50	165	1
DU324	F1	29.00	737	17.25	438	19.00	483	8.25	210	1
DU324RB	F1	29.25	743	17.25	438	19.00	483	8.25	210	1
DU325	E3	45.12	1146	24.00	610	24.88	632	8.88	226	1
DU326	E3	49.13	1248	24.00	610	24.88	632	8.88	226	1
T327N	E1	49.13	1248	24.00	610	24.88	632	8.88	226	1
T327NR	E1	49.13	1248	24.75	629	25.13	638	8.88	226	1

[27] 30–100 A switches suitable for 60°C or 75°C conductors. 200–800 A switches suitable for 75°C conductors.
[28] Light duty switches only.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Heavy Duty Safety Switches


NEMA Type 1


NEMA Type 3R


NEMA Type 12


NEMA Type 4, 4x, 5 Stainless Steel

Visible blade heavy duty safety switches are designed for application where maximum performance and continuity of service are required. Heavy duty safety switches feature quick-make, quick-break operating mechanism, a dual cover interlock and a color coded indicator handle. They are suitable for use as service equipment when equipped with a field- or factory-installed neutral assembly or equipment grounding kit, unless a 600Y/347 V or 480 Y/277 V, 1000 A or greater, solidly grounded WYE system is used, per NEC 230-95. Heavy duty safety switches are UL Listed (except as noted). Files E2875 and E154828 meet or exceed the NEMA Standard KS1. For UL Listed short circuit current ratings, see UL Listed Maximum Short Circuit Current Ratings-AC only, page 3-13.

Table 3.14: 240 Volt — Single Throw Fusible Switches

System	Amp	Type 1	Type 3R *[1]*	Type 12*[1]*	Type 4X 304 Stainless Steel*[1]*	Line Side Barriers *[2]*	Horsepower Ratings				
							Std (Fast Acting One-Time Fuses)		Max (Dual Element Time-Delay Fuses)		250 Vdc *[3]*
							1Ø	3Ø *[4]*	1Ø	3Ø *[4]*	
2 Wire (2 Blade and Fuseholder) – 240 Vac 250 Vdc											
	30	Use device with factory neutral		VH221AWKGL *[5]*	VH221DSGL *[5]*	Factory Included	1-1/2	3	3	7-1/2	5
	30			VH2213AWKGL *[5]*	VH2213DSGL *[5]*	Factory Included	1-1/2	—	3	—	5
	60			VH222AWKGL *[5]*	VH222DSGL *[5]*	Factory Included	3	7-1/2	10	15	10
	100			VH223AWKGL *[5]*	VH223DSGL *[5]*	Factory Included	7-1/2	15	15	30	20
	200			VH224AWKGL *[5]*	VH224DSGL *[5]*	Factory Included	15	25	—	60	40
	400	H225	H225R	H225AWK	H225DS	LSBG202	—	—	—	—	50
	600	H226	H226R	H226AWK	H226DS	LSBG202	—	75	—	200	50
	800	H227	H227R	H227AWK	—	LSBF202	50	—	—	—	50
	1200	H228	H228R	H228AWK	—	LSBF202	50	—	—	—	50
3 Wire (2 Blade and Fuseholder, 1 neutral) – 240 Vac 250 Vdc											
	30	VH221N	VH221NRB	VH221NAWKGL *[5]*	VH221NDSGL *[5]*	Factory Included	1-1/2	3	3	7-1/2	5
	60	VH222N	VH222NRB	VH222NAWKGL *[5]*	VH222NDSGL *[5]*	Factory Included	3	7-1/2	10	15	10
	100	VH223N	VH223NRB	VH223NAWKGL *[5]*	VH223NDSGL *[5]*	Factory Included	7-1/2	15	15	30	20
	200	VH224N	VH224NR *[6]*	VH224NAWKGL *[5]*	VH224NDSGL *[5]*	Factory Included	15	25	—	60	40
	400	H225N	H225NR	H225NAWK	H225NDS	LSBG202	—	50	—	125	50
	600	H226N	H226NR	H226NAWK	H226NDS	LSBG202	—	75	—	200	50
	800	H227N	H227NR	H227NAWK	—	LSBF202	50	—	—	—	50
	1200	H228N	H228NR	H228NAWK	—	LSBF202	50	—	—	—	50
3 Wire (3 Blade and Fuseholder) – 240 Vac 250 Vdc											
	30	Use device with factory neutral		VH321AWKGL *[5]*	VH321DSGL *[5]*	Factory Included	1-1/2	3	3	7-1/2	5
	60			VH322AWKGL *[5]*	VH322DSGL *[5]*	Factory Included	3	7-1/2	10	15	10
	100			VH323AWKGL *[5]*	VH323DSGL*[5]*	Factory Included	7-1/2	15	15	30	20
	200			VH324AWKGL *[5]*	VH324DSGL *[5]*	Factory Included	15	25	—	60	40
	400	H325	H325R	H325AWK	H325DS	LSBG203	—	50	—	125	50
	600	H326	H326R	H326AWK	H326DS	LSBG203	—	75	—	200	50
	800	H327	H327R	H327AWK	—	LSBF203	50	—	—	—	50
	1200	H328	H328R	H328AWK	—	LSBF203	50	—	—	—	50
4 Wire (3 Blade and Fuseholder, 1 neutral) –240 Vac 250 Vdc											
	30	VH321N	VH321NRB	VH321NAWKGL *[5]*	VH321NDSGL *[5]*	Factory Included	1-1/2	3	3	7-1/2	5
	60	VH322N	VH322NRB	VH322NAWKGL *[5]*	VH322NDSGL *[5]*	Factory Included	3	7-1/2	10	15	10
	100	VH323N	VH323NRB	VH323NAWKGL *[5]*	VH323NDSGL *[5]*	Factory Included	7-1/2	15	15	30	20
	200	VH324N	VH324NR*[6]*	VH324NAWKGL *[5]*	VH324NDSGL *[5]*	Factory Included	15	25	—	60	40
	400	H325N	H325NR	H325NAWK	H325NDS	LSBG203	—	50	—	125	50
	600	H326N	H326NR	H326NAWK	H326NDS	LSBG203	—	75	—	200	50
	800	H327N	H327NR	H327NAWK	—	LSBF203	50	—	—	—	50
	1200	H328N	H328NR	H328NAWK	—	LSBF203	50	—	—	—	50

Accessories: see page 3-16
Dimensions: NEMA Type 1 and 3R, see page 3-22
Dimensions: NEMA Type 4, 4X and 5 Stainless and NEMA Type 12, see page 3-24

[1] For rainproof bolt-on hubs and water resistant hubs.
[2] Factory included to protect against inadvertent contact with live parts per .UL 869A and NEC Service entrance barrier requirements.
[3] For switching dc, use two outside switching poles.
[4] For corner grounded delta systems, use switching poles for ungrounded conductors. See data bulletin 2700DB0202 for additional information.
[5] Ground Lug Factory Included.
[6] This catalog is shipped with HUB provision and knockouts.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

600 Volt–Single Throw Fusible

Table 3.15: 600 Volt–Single Throw Fusible

System	Amp	Type 1	Type 3R [7]	Type 12 [7]	Type 4X 304 Stainless Steel [7]	Line Side Barriers	Horsepower Ratings					
							Std (Fast Acting One-Time Fuses)		Max (Dual Element Time-Delay Fuses)		250 Vdc [8]	600 Vdc
							1Ø	3Ø	1Ø	3Ø		
2 Wire (2 Blade and Fuseholder) – 600 Vac 600 Vdc												
	30	Use device with three blade										
	60											
	100											
	200											
	400	H265	H265R	H265AWK	H265DS	LSBG602	100	250	—		50	50
	600	H266	H266R	H266AWK	H266DS	LSBG602	150	400	—		50	50
	800	H267	H267R	H267AWK	—	LSBF602		—	—	—	—	50
	1200	H268	H268R	H268AWK	—	LSBF602	—	—	—	—	—	50
3 Wire (3 Blade and Fuseholder) – 600 Vac 600 Vdc												
	30	VH361	VH361RB	VH361AWKGL [9]	VH361DSGL [9]	Factory Included	5	15	7-1/2	20	5	15
	30	—	—	VH3613AWKGL [9]	VH3613DSGL [9]	Factory Included	5	15	7-1/2	20	—	15
	60	VH362	VH362RB	VH362AWKGL [9]	VH362DSGL [9]	Factory Included	15	30	15	50	—	30
	100	VH363	VH363RB	VH363AWKGL [9]	VH363DSGL [9]	Factory Included	25	60	30	100	—	50
	200	VH364	VH364R [10]	VH364AWKGL [9]	VH364DSGL [9]	Factory Included	50	125	60	150	40	50
	400	H365	H365R	H365AWK	H365DS	LSBG602	100	250	125	350	50	50
	600	H366	H366R	H366AWK	H366DS	LSBG602	150	400	200	500	50	50
	800	H367	H367R	H367AWK	—	LSBF602	200	500	250	500	—	50
	1200	H368	H368R	H368AWK	—	LSBF602	200	500	250	500	—	50
4 Wire (3 Blade and Fuseholder, 1 neutral) – 600 Vac 600 Vdc												
	30	VH361N	VH361NRB	VH361NAWKGL [9]	VH361NDSGL [9]	Factory Included	5	15	7-1/2	20	5	15
	60	VH362N	VH362NRB	VH362NAWKGL [9]	VH362NDSGL [9]	Factory Included	15	30	15	50	—	30
	100	VH363N	VH363NRB	VH363NAWKGL [9]	VH363NDSGL [9]	Factory Included	25	60	30	100	—	50
	200	VH364N	VH364NR [10]	VH364NAWKGL [9]	VH364NDSGL [9]	Factory Included	50	125	60	150	40	50
	400	H365N	H365NR	H365NAWK	H365NDS	LSBG602	100	250	125	350	50	50
	600	H366N	H366NR	H366NAWK	H366NDS	LSBG602	150	400	200	500	50	50
	800	H367N	H367NR	H367NAWK	—	LSBF602	200	500	250	500	—	50
	1200	H368N	H368NR	H368NAWK	—	LSBF602	200	500	250	500	—	50

Accessories: see page 3-16
Dimensions: NEMA Type 1 and 3R, see page 3-22
Dimensions: NEMA Type 4, 4X and 5 Stainless and NEMA Type 12, see page 3-24

Table 3.16: 4-Pole and 6-Pole - Single Throw Fusible (NOT SUITABLE FOR SERVICE ENTRANCE)

System	Amperes	Type 12	Type 4X	Class R	Line Side	Horsepower Ratings Max (Dual Eleemnt Time-Delay Fuses)							
				Fuse KITS	Barriers	240 V		480 V		600 V		250 Vdc	600 Vdc
						2Ø	3Ø	2Ø	3Ø	2Ø	3Ø		
4-Wire (4 Blades and fuse holders) - 600 Vac 600 Vdc													
	30	H461AWK	H461DS	RFK03L	Factory Included	10	10	20	20	25	30	10	15
	60	H462AWK	H462DS	RFK03H	Factory Included	20	20	40	50	50	60	10	30
	100	H463AWK	H463DS	RFK10	Factory Included	30	40	50	75	50	75	20	30
	200	H464AWK	H464DS	HRK1020	Factory Included	50	60	50	125	50	150	40	50
	400	H465AWK	—	HRK4060	Qty. (2): LSBG602	—	125	—	250	—	350	50	50
6-Wire (6 Blades and fuse holders) – 600 Vac 600 Vdc													
	100	H663AWK	H663DS	RFK10	Factory Included	—	50	—	75	—	75	—	—
	200	H664AWK	H664DS	HRK1020	Factory Included	—	60	—	125	—	150	—	—

[7] For rainproof bolt-on hubs and water resistant hubs.
[8] For switching dc, use two outside switching poles.
[9] Ground Lug Factory Included.
[10] This catalog is shipped with HUB provision and knockouts.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

600 Volt–Single Throw Non-Fusible

Table 3.17: 600 Volt—Single Throw Non-Fusible

System	Amp	Type 1	Type 3R *[11]*	Type 12 *[11]*	Type 4X 304 Stainless Steel *[11]*	Line Side Barriers *[12]*	Horsepower Ratings					
							Std (Fast Acting One-Time Fuses)		Max (Dual Element Time-Delay Fuses)		250 Vdc *[13]*	600 Vdc
							1Ø	3Ø	1Ø	3Ø		
2 Wire (2 Blade) – 600 Vac 600 Vdc *[14]*												
	400	HU265	HU265R	HU265AWK	HU265DS	LSBG602	—	125	—	250	50	50
	600	HU266	HU266R	HU266AWK	HU266DS	LSBG602	—	200	—	400	50	50
	800	HU267	HU267R	HU267AWK	—	LSBF602	—	—	—	—	—	50
	1200	HU268	HU268R	HU268AWK	—	LSBF602	—	—	—	—	—	50
3 Wire (3 Blade) – 600 Vac 600 Vdc												
	30	VHU361	VHU361RB	VHU361AWKGL *[15]*	VHU361DSGL *[15]*	Factory Included	5	15	7-1/2	20	5	15
	30	—	—	VHU3613AWKGL *[15]*	VHU3613DSGL *[15]*	Factory Included	5	15	7-1/2	20	—	15
	60	VHU362	VHU362RB	VHU362AWKGL *[15]*	VHU362DSGL *[15]*	Factory Included	15	30	15	50	—	30
	100	VHU363	VHU363RB	VHU363AWKGL *[15]*	VHU363DSGL *[15]*	Factory Included	25	60	30	100	—	50
	200	VHU364	VHU364R *[16]*	VHU364AWKGL *[15]*	VHU364DSGL *[15]*	Factory Included	50	125	60	150	40	50
	400	HU365	HU365R	HU365AWK	HU365DS	LSBG602	100	250	125	350	50	50
	600	HU366	HU366R	HU366AWK	HU366DS	LSBG602	150	400	200	500	50	50
	800	HU367	HU367R	HU367AWK	—	LSBF602	200	500	250	500	—	50
	1200	HU368	HU368R	HU368AWK	—	LSBF602	200	500	250	500	—	50
	1200	HU268	HU268R	HU268AWK	—	LSBF602	—	—	—	—	—	50

Table 3.18: 4-Pole and 6-Pole - Single Throw Non-Fusible (NOT SUITABLE FOR SERVICE ENTRANCE)

System	Amperes	Type 12	Type 4X	Class R Fuse KITS	Line Side Barriers	Horsepower Ratings Max (Dual Eleemnt Time-Delay Fuses)							
						240 V		480 V		600 V		250 Vdc	600 Vdc
						2Ø	3Ø	2Ø	3Ø	2Ø	3Ø		
4-Wire (4 Blades) - 600 Vac 600 Vdc													
	30	—	HU461DS	RFK03L	Factory Included	10	10	20	20	25	30	10	15
	30	HU461AWK (SeriesF6)	—	—	Factory Included	10	10	20	20	25	30	5	15
	60	HU462AWK	HU462DS	RFK03H	Factory Included	20	20	40	50	50	60	10	30
	100	HU463AWK	HU463DS	RFK10	Factory Included	30	40	50	75	50	75	20	30
	200	HU464AWK	HU464DS	HRK1020	Factory Included	50	60	50	125	50	150	40	50
	400	HU465AWK	—	HRK4060	Qty. (2): LSBG602	—	125	—	250	—	350	50	50
6-Wire (6 Blades) - 600 Vac 600 Vdc													
	30	HU661AWK	HU661DS	—	Factory Included	—	10	—	20	—	30	—	—
	60	HU662AWK	HU662DS	—	Factory Included	—	20	—	50	—	60	—	—
	100	HU663AWK	HU663DS	RFK10	Factory Included	—	50	—	75	—	75	—	—
	200	HU664AWK	HU664DS	HRK1020	Factory Included	—	60	—	125	—	150	—	—

[11] For rainproof bolt-on hubs and water resistant hubs.
[12] Factory Included to protect against inadvertent contact with live parts per UL 869A and NEC service entrance barrier requirements.
[13] For switching dc, use two outside switching poles.
[14] For 30-200 A two wire application use a three blade device.
[15] Ground Lug Factory Included.
[16] This catalog is shipped with HUB provision and knockouts.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

UL Listed Maximum Short Circuit Current Ratings—AC only

NOTE: Consult the wiring diagram of the switch to verify the UL Listed short circuit current rating.

Table 3.19: Fusible Safety Switches

Heavy Duty Safety Switch Type	UL Listed Fuse Class	UL Listed Short Circuit Current Ratings
Fusible	H, K	10 kA
	R, J, L	200 kA *[17]*

Non-Fusible Safety Switches – Ratings

Systems equal or less than 10 kAIR SCCR —Any brand of circuit breaker or fuse not exceeding the ampere rating of the switch may be used in conjunction with a non-fusible safety switch.

Systems above 10 kAIR SCCR—The UL Listed short circuit current rating for Square D non-fusible switches is based upon the switch being used in conjunction with fuses or Square D circuit breakers or Mag-Gard motor circuit protectors.

Table 3.20: Non-Fusible Safety Switches *[18] [19]*

Switch Rating (A)	Fuse or Circuit Breaker Type *[20]*	3-Phase			250 Vdc / 600 Vdc
		240 Vac	480 Vac	600 Vac	
With Upstream Fuse Protection					
All	H, K	10 kA	10 kA	10 kA	Up to 10 kA
	R,T,J,L	200 kA	200 kA	200 kA	
With Upstream Circuit Breaker Protection					
All	Any brand circuit breaker	10 kA	10 kA	10 kA	Up to 10 kA
30–100	HD	25 kA	18 kA	14 kA	
30–100	HG	65 kA	35 kA	18 kA	
30–100	HJ	65 kA	35 kA	25 kA	
30–100	HL	65 kA	35 kA	35 kA	
30–100	HR	65 kA	35 kA	35 kA	
30–100	FA	14 kA	14 kA	14 kA	
30–100	FH	18 kA	18 kA	18 kA	
200	HD, JD	25 kA	18 kA	14 kA	
200	HG, JG	65 kA	35 kA	18 kA	
200	HJ, JJ	65 kA	35 kA	25 kA	
200	HL, JL	65 kA	35 kA	35 kA	
200	HR, JR	65 kA	35 kA	35 kA	
400	LA	22 kA	22 kA	22 kA	
400	LH	25 kA	25 kA	25 kA	
400–600	LD	25 kA	18 kA	14 kA	
400–600	LG	65 kA	35 kA	18 kA	
400–600	LJ	100 kA	65 kA	25 kA	
400–600	LL	100 kA	65 kA	50 kA	
400–600	LR	100 kA	65 kA	65 kA	

[17] On 600 V, 200 A switches, 100,000 A max. on corner grounded delta when using Class J or R fuses.
[18] For NEMA Type 4X Fiberglass Reinforced Polyester switches, see page 3-15.
[19] NEMA Type 7/9 SCCR 10 kAIR 600 Vac maximum.
[20] Ampere rating of fuse or circuit breaker not to exceed switch ampere rating.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Special Application Heavy Duty Safety Switches


VH361SSGL


H363DF


H361DX


VH361SSGL

316 Grade Stainless Steel—NEMA Type 3, 3R, 4, 4X, 5, 12

316 stainless steel enclosure safety switches offer superior corrosion resistance to a wider range of chemicals than 304 stainless switches. 316 better resists chloride and is often used in marine, waste treatment and transportation applications. Use water resistant hubs, see Hubs, page 3-16. Equipment grounding lugs are supplied as standard through 200 A. See Terminal Lug Data, page 3-21 for wire Termination data for grounding lugs.

For 304 stainless switches, see 240 Volt, page 3-10 and 600 Volt, page 3-11.

Table 3.21: 316 Grade Stainless Steel 3 Pole 600 Vac, 600 Vdc

System	Amperes	Cat. No	Line Side Barriers *[21]*	Horsepower Ratings– 3Ø				
				480 Vac *[22]*		600 Vac *[22]*		600 Vac *[23]*
				Std.	Max.	Std.	Max.	Max.
Fusible - 3 Wire (3 Blade and fuse holders) - 600 Vac 600 Vdc								
	30	VH361SSGL	Factory included	5	15	7-1/2	20	15
	60	VH362SSGL	Factory included	15	30	15	50	30
	100	VH363SSGL	Factory included	25	60	30	75	50
	200	VH364SSGL	Factory included	50	125	60	150	50
	400	H365SS	LSBG602	100	250	125	350	50
	600	H366SS	LSBG602	150	400	200	500	50
Non-Fusible - 3 Wire (3 Blades) - 600 Vac 600 Vdc								
	30	VHU361SSGL	Factory included	—	20	—	30	15
	60	VHU362SSGL	Factory included	—	50	—	60	30
	100	VHU363SSGL	Factory included	—	75	—	100	50
	200	VHU364SSGL	Factory included	—	125	—	150	50
	400	HU365SS	LSBG602	—	250	—	350	50
	600	HU366SS	LSBG602	—	400	—	500	50

[21] Factory included to protect against inadvertent contact with live parts per UL 869A and NEC service entrance barrier requirements.
[22] Std.—Using fast acting, one time fuses. Max.—Using dual element time delay fuses.
[23] For switching dc use two switching poles.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Fiberglass Reinforced Polyester Enclosures—NEMA Type 4X

Fiberglass reinforced polyester enclosures are water resistant, corrosion resistant, and resists to windblown dust, rain, and splashing liquid. The molded fiberglass can withstand a wide range of operating temperatures and can withstand heavy impact. Switches are furnished with hubs, conduit provisions Table 3.40 Conduit Provisions, page 3-22, and equipment grounding lugs. See CAD drawings of the switch to verify the UL listed short circuit current rating or the enclosed safety switch catalog. UL Listed.



H363DF

Table 3.22: Fiberglass Reinforced Polyester Enclosures NEMA Type 4X 3 Pole 600 Vac, 600 Vdc

System	Amperes	Cat. No.	Solid Neutral Assembly Kit	Class R Fuse Kits	Electrical Interlock Kits Field-Installed Cat. No.		Line Side Barriers Factory Included [24]	Horsepower Ratings– 3Ø					Hubs [25]
								480 Vac [26]		600 Vac [26]		Max.	
				Cat. No.	1 NO/1 NC Contacts	2 NO/2 NC Contacts		Std.	Max.	Std.	Max.		
Fusible - 3 Wire (3 Blade and fuse holders) - 600 Vac 600 Vdc													
	30	H361DF	SN03	RFK06	9999TC10	9999TC20	Factory Included	5	15	7-1/2	20	15	3/4
	60	H362DF	SN03	RFK06H	9999TC10	9999TC20	Factory Included	15	30	15	50	30	1-1/4
	100	H363DF	SN0610	RFK10	9999TC10	9999TC20	Factory Included	25	60	30	75	50	2
	200	H364DF	—	HRK1020	9999R8	9999R9	Factory Included	50	125	60	150	50	2-1/2
Non-Fusible - 3 Wire (3 Blade) - 600 Vac 600 Vdc													
	30	HU361DF	SN03	—	9999TC10	9999TC20	Factory Included	—	20	—	30	15	3/4
	60	HU362DF	SN03	—	9999TC10	9999TC20	Factory Included	—	50	—	60	30	1-1/4
	100	HU363DF	SN0610	—	9999TC10	9999TC20	Factory Included	—	75	—	75	50	2
	200	HU364DF	—	—	9999R8	9999R9	Factory Included	—	125	—	150	50	2-1/2

Krydon™ Enclosures—NEMA Type 4X

Krydon enclosures are compression molded of fiberglass reinforced polyester, specially formulated to withstand attack from almost any corrosive atmosphere found in the toughest industrial application. Switches are furnished with water resistant hubs and equipment grounding lugs. See CAD drawing of the switch to verify the UL listed short circuit current rating or the enclosed safety switch catalog. UL Listed.



H361DX

Table 3.23: Krydon™ Enclosures — NEMA Type 4X 3 Pole 600 Vac, 600 Vdc

System	Amperes	Cat. No.	Solid Neutral Assembly Kit	Class R Fuse Kits	Electrical Interlock Kits Field-Installed Cat. No.		Line Side Barriers Factory Included [24]	Horsepower Ratings– 3Ø					Hubs [25]
								480 Vac [26]		600 Vac [26]		600 Vdc [27]	
				Cat. No.	1 NO/1 NC Contact	2 NO/2 NC Contacts		Std.	Max.	Std.	Max.	Max.	
Fusible - 3 Wire (3 Blade and fuse holders) - 600 Vac 600 Vdc													
	30	H361DX	H60SN	RFK06	9999TC10	9999TC20	Factory Included	5	15	7-1/2	20	15	3/4
	60	H362DX	H60SN	RFK06H	9999TC10	9999TC20	Factory Included	15	30	15	50	30	1-1/4
	100	H363DX	SN0610	RFK10	9999TC10	9999TC20	Factory Included	25	60	30	75	50	2
Non-Fusible - 3 Wire (3 Blade) - 600 Vac 600 Vdc													
	30	HU361DX	H60SN	—	9999TC10	9999TC20	Factory Included	—	20	—	30	15	3/4
	60	HU362DX	H60SN	—	9999TC10	9999TC20	Factory Included	—	50	—	60	30	1-1/4
	100	HU363DX	SN0610	—	9999TC10	9999TC20	Factory Included	—	75	—	75	50	2

[24] Factory included to protect against inadvertent contact with live parts per UL 869A and NEC service entrance barrier requirements.
[25] Two hubs and hub drilling template are provided for field installation.
[26] Std.—Using fast acting one time fuses. Max.—Using dual element time delay fuses.
[27] For switching dc, use two outside switching poles.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



Rainproof Bolt-On Hubs

Heavy Duty Safety Switch Accessories

Square D by Schneider Electric brand heavy duty safety switches are UL listed for use with the following accessories:

Rainproof Bolt-On Hubs and Water Resistant Hubs

Rainproof Bolt-On Hubs

- UL Listed for indoor or rainproof applications
- Suitable for use with conduit having ANSI standard taper pipe thread
- NEMA Type 3R switches with catalog number ending in RB have a bolt-on closing cap factory installed
  - Accepts 3/4 in. through 2-1/2 in. bolt-on hubs
  - No gaskets required
- NEMA Type 3R switches with R suffix have blank top endwalls *[28]*
  - Accepts 3 in. through 4 in. bolt on hubs
  - Gaskets provided
  - Conduit entry holes must be cut in the field

Table 3.24: Rainproof Bolt-On Hubs *[29]*

Conduit Size	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	Closing Cap
Hub Cat. No	B075	B100	B125	B150	B200	B250	B300	B400	BCAP

Water Resistant Hubs

- UL Listed for dusty and wet applications
- Suitable for use with conduit having ANSI standard taper pipe thread
- Water resistant hubs are field installed on NEMA Type 4/4X/5 stainless steel and NEMA Type 12/3R and 12K enclosures
- Water resistant hubs are available in zinc or chrome plated finish
- Gaskets provided



H200 Zinc Plated



H050CP Chrome Plated

Table 3.25: Water Resistant Hubs *[30]*

Conduit Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4
Standard-Zinc Hub Cat. No	H050	H075	H100	H125	H150	H200	H250	H300	H350	H400
Chrome Plated Hub Cat. No.	H050CP	H075CP	H100CP	H125CP	H150CP	H200C-P	—	—	—	—

[28] 200 A Heavy Duty catalogs VH364NR, VH364R, VHU364R, VH224NR, VH324NR, and variants, comes with HUB provision and knockouts.
[29] Gaskets are provided on 3 in. and larger hubs.
[30] Gaskets are provided.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



EIK1 Electrical Interlock Kit

Electrical Interlock Kits

Electrical interlocks for heavy duty safety switches 30 A through 1200 A are available as field installed kits, or on Type 12 or Type 4X enclosure factory installed. A pivot arm operates from the switch mechanism, breaking the control circuit before the main switch blades break. See supplemental digest section 2 for contact ratings. UL Listed for factory or field installation.

For factory installation catalog numbers available on Type 12 or 4X enclosures use the product configurator.

Table 3.26: Electrical Interlock Kit *[31] [32]*

Switch Amperes Rating	Series Number *[33]*	Electrical Interlock Kit Cat. No. *[34]*
30	F5–F8	EIK031
		EIK032
60 (600 V)	F5–F8	EIK1
		EIK2
60 (240 V)	F5–F8	EIK031
		EIK032
100–200	F5–F8	EIK1
		EIK2
30–100 Receptacle Switches	F5–F7	EIK1
		EIK2
30–200 Four- and Six-Pole Switches	F5–F6	EIK1
		EIK2
400–1200	E4–E5	EIK40601
		EIK40602

Table 3.27: Electrical Interlock Contact Ratings *[35]*

Interlock Type	AC 50 or 60Hz				DC		
	Volts	Make	Break	Cont.	Volts	Make / Break	Cont.
1 N. O. / 1 N. C. Contact (-1 Suffix *[36]*)	120	40.00 A	15.00 A	15.00 A	115	0.50 A	15.00 A
	240	20.00 A	10.00 A	15.00 A	230	0.25 A	15.00 A
2 N. O. / 2 N. C. Contacts (-2 Suffix *[37]*)	120	30.00 A	3.00 A	10.00 A	115	1.00 A	10.00 A
	240	15.00 A	1.5 A	10.00 A	230	0.30 A	10.00 A

Class R Fuse Rejection Kits

When installed, kit limits switch to Class R fuses only. Kits are available for field installation. Each kit supports one three pole switch.

Table 3.28: 240 Vac — Class R Fuse Kits *[38]*

Amperes	Series Number	Class R Fuse Kit Cat. No.
30	F5–F8	RFK03L
60	F5–F8	RFK03H
100	F5–F8	RFK10
200	F5–F8	HRK1020
400–600	E4–E5	HRK4060

Table 3.29: 600 Vac — Class R Fuse Kits *[38] [39]*

Amperes	Series Number	Class R Fuse Kit Cat. No.
30 *[40]*	F5–F8	RFK03H
30 A Receptacle Switches	F7	RFK06
30 A Four-Pole Switches	F5–F6	RFK06
60	F5–F8	RFK06H
100	F5–F8	RFK10
200	F5–F8	HRK1020
400–600	E4–E5	HRK4060

[31] For series not shown in the table, refer to the switch wiring diagram.
[32] Electrical interlocks for NEMA Type 4X fiberblass reinforced polyester and Krydon™ see Table 3.22 and Table 3.23 respectively.
[33] See page 3-22 and page 3-24 for safety switch series.
[34] Electrical interlock kit catalog numbers ending in 1 indicates one normally open and one normally closed contact. These kits use a 9007A01 industrial snap switch. Electrical interlock kit catalog numbers ending in 2 indicates two normally open and two normally closed contacts. These kits use a 9007C03 industrial snap switch.
[35] Single-pole single-throw interlock kits are rated 1/2 hp at 110 and 220 Vac.
[36] -1 Suffix uses a 9007A01 limit switch.
[37] -2 Suffix uses a 9007C03 limit switch.
[38] For series not shown in the table, refer to the switch wiring diagram.
[39] Class R Fuse Kits for Fiberglass Reinforced Polyester enclosures and Krydon™ enclosures see Table 3.22 Fiberglass Reinforced Polyester Enclosures NEMA Type 4X 3 Pole 600 Vac, 600 Vdc, page 3-15 and Table 3.23 Krydon™ Enclosures — NEMA Type 4X 3 Pole 600 Vac, 600 Vdc, page 3-15 respectively.
[40] H361-2, H361-2A, H361-2AWK and H361-2RB use RFK06.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Line Side Barrier Kits

The field instable line side barrier kits are required to meet National Electric Code (NFPA 70) for service entrance applications. Barrier kits protect against inadvertent contact with line side, uninsulated, ungrounded or service terminal live parts.

Table 3.30: Line Side Barrier Kits for Heavy Duty Safety Switch

Amperes	Voltage	Blades/Fuses	Catalog
30	600	2 or 3	LSBD602
30 / 60	240		LSBD202
60	600		LSBC02
100	240 / 600		LSBC02
200	240	2	LSBE202
		3	LSBE203
	600		LSBE603
400 / 600	240	2 or 3	LSBG203
	600	2 or 3	LSBG602
800 / 1200	240	2	LSBF202
		3	LSBF203
	600	2 or 3	LSBF602

Internal Barrier Kits

Internal barrier kits provide an additional barrier that helps prevent accidental contact with live parts. Field-installed transparent barriers do not restrict visual inspection of the switch. Barrier provides IEC529 IP2X protection when door of enclosed disconnect switch is open. Designed with convenient door for accessing fuses for replacement without removing barrier, and allows use of test probes.

Internal barrier kits are not designed to meet NEC2020 for service entrance applications, see Table 3.30 Line Side Barrier Kits for Heavy Duty Safety Switch, page 3-18 for meeting this standard.



SS20

Table 3.31: Internal Barrier Kits for Heavy Duty

Amperes	Voltage	Barrier for	Cat. No.
30	600	Line and Load	SS03 *[41]*
60	240		SS03 *[41]*
	600		SS06 *[41]*
100	240 / 600		SS10 *[41]*
200			SS20 *[41]* *[42]*
400 / 600		Line Side	SS4060LI
		Load Side	SS4060LO *[43]*
800 / 1200		Line Side	SS80120LI
		Load Side	SS80120LO *[43]*

Solid Neutral Assembly Kits for Safety Switches

Table 3.32: Solid Neutral Assembly Kits *[44] [45] [46] [47]*

Amperes	Series Number *[48]*	Standard Neutral Kit Cat. No.	Terminal Data AWG/kcmil	Optional Copper Only Neutral Kit Cat. No.	Terminal Data AWG/kcmil
30	F5–F8	SN03 *[49]*	(2) 14-3 Al/Cu plus (1) 14-3 Al/Cu Svc Ground	SN03C *[49]*	(2) 14-6 Cu plus (1) 14-6 Cu Svc Ground
60	F5–F8, (600 V)	SN0610	(2) 14-1/0 Al/Cu plus (2) 14-6 Al/Cu Svc Ground	SN0610C	(2) 14-1/0 Cu plus (2) 14-6 Cu Svc Ground
	F5–F8 (240 V)	SN03	(2) 14-3 Al/Cu plus (1) 14-3 Al/Cu Svc Ground	SN03C	(2) 14-1/0 Cu plus (2) 14-6 Cu Svc Ground
100	F5–F8	SN0610	(2) 14-1/0 Al/Cu plus (2) 14-6 Al/Cu Svc Ground	SN0610C	(2) 14-1/0 Cu plus (2) 14-6 Cu Svc Ground
200 *[50]*	F5–F8	SN20A	(2) 6-250 Al/Cu plus (1) 14-10 Al/Cu Svc Ground	SN20C	(2) 6-250 Cu plus (1) 14-1/0 Cu Svc Ground
400 and 600	E4–E5	H600SN	(4) 1-750 Al/Cu plus (1) 4-300 Al/Cu Svc Ground	H600SNC	(2) 1-600 Cu and (2) 4-350 Cu plus (2) 6-250 Cu Svc Ground
800	E4	H800SNE4	(6) 3/0-750 Al/Cu plus (2) 6-350 Al/Cu Svc Ground	—	—
1200	E4	H1200SNE4	(8) 3/0-750 Al/Cu plus (2) 6-350 Al/Cu Svc Ground	—	—

[41] Can only be applied to F series.
[42] For 200 A 240 V devices is also needed to order line side barriers kits from table 3.29 LSBE202 or LSBE2023.
[43] Must buy line side also
[44] For series not shown in the table, refer to the switch wiring diagram.
[45] For solid Neutral Assembly Kits for Krydon™ enclosure see Table 3.23.
[46] For Solid Neutral Assembly Kits for Fiberglass Reinforced Polyester enclosures see Table 3.22.
[47] Neutrals cannot be installed in 4 or 6 pole switches or receptacle switches.
[48] See page 3-22 and page 3-24 for safety switch series.
[49] The following 30 A Series F5-F6 switches use SN0610 or SN0610C: H3612, H3612RB, H3612A, H3612AWK, HU3612, HU3612RB, HU3612A and HU3612AWK.
[50] For 200% neutral, order (2) SN20A Neutral Kits and (1) SN20NI Neutral Jumper Kit.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025


Fuse Puller Kits

Fuse Puller Kits

Fuse Puller Kits are standard equipment on the following 30 A – 100 A switches: NEMA Type 12, Type 4/4X/5 stainless steel, Type 4X fiberglass reinforced polyester and Krydon™.

Fuse Puller Kit available for field installation on Type 1 and Type 3R, 30 A – 100 A switches. One Fuse Puller Kit required for a 3 pole fusible 240 V or 600 V heavy duty switch. Fuse Puller Kits can be field installed on switches manufactured since February 1980.

Table 3.33: Fuse Puller Kits for Heavy Duty Safety Switches

Amperes	Series Number *[51]*	Fuse Puller Kit Cat. No.
30	F5–F7	FPK03 *[52]*
60 60	F5–F7 (600 V) F5 (240 V)	FPK0610 FPK03
100	F5–F7	FPK0610

Equipment Grounding Kits For Safety Switches

Equipment grounding kits are available for field installation.

Factory included ground lug comes as standard on heavy duty safety switches Type 12 and 4X enclosures.

Table 3.34: Equipment Grounding Kits and Terminal Data *[51] [53]*

Amperes	Series Number	Standard Cat. No.	Terminal Data AWG/kcmil	Optional Copper Only Cat. No.	Terminal Data AWG/kcmil
30	F5–F8	GTK03 *[54]*	(2) 14-4 Cu or (2) 12-4 Al or (4) 14-12 Cu or (4) 12-10 Al	GTK03C *[54] [55]*	(2) 14-6 Cu
60	F5–F8 (600 V)	GTK0610	(2) 14-1/0 Cu or (2) 12-1/0 Al and (2) 14-6 Cu or (2) 12-6 Al	GTK0610C	(2) 14-1/0 Cu and (2) 14-6 Cu
60	F5–F8 (240 V)	GTK03	(2) 14-4 Cu or (2) 12-4 Al or (4) 14-12 Cu or (4) 12-10 Al	GTK03C	(2) 14-6 Cu
100	F5–F8	GTK0610	(2) 14-1/0 Cu or (2) 12-1/0 Al and (2) 14-6 Cu or (2) 12-6 Al	GTK0610C	(2) 14-1/0 Cu and (2) 14-6 Cu
200	F5–F8	PKOGTA2	(2) 10-2/0 Cu or (2) 6-2/0 Al	PKOGTC2	(2) 14-4 Cu
400 and 600	E4–E5	PKOGTA2 *[56]*	(2) 10-2/0 Cu or (2) 6-2/0 Al	PKOGTC3	(4) 14-1/0 Cu
800	E4	PKOGTA7	(4) 4-350 Al/Cu	—	—
1200	E4	PKOGTA8	(8) 4-350 Al/Cu	—	—

Touch-Up Paint for Safety Switches

Description	Cat. No.
12 oz. Aerosol Paint Can, Square D ANSI-49 Gray Touch-Up Paint	PK49SP

NOTE: Standard package quantity is 6 cans.

Cover Viewing Window – Heavy Duty Single Throw Switches

Cover viewing window is positioned over the blades to allow visual verification of "ONOFF" status.

- Available as standard on Heavy Duty Single Throw Safety Switches 30, 60, 100, and 200 AMP, Type 1, Type 3R, Type 12, and Type 4X Stainless Steel Enclosures.
- Units can be obtained without window on Type 12 and Type 4X stainless steel devices – shipped from factory.
- Available as factory modification on Type 12 and Type 4X enclosures – 400, 600, 800, and 1200 A.



[51] For series not shown in the table, refer to the switch wiring diagram.
[52] 30 A 4 pole, H361-2 and H361-2RB Series F5, H361WA and H361WC Series F6 use FPK0610.
[53] Equipment Ground Kits (Al/Cu) are factory installed standard in 30-200 A Series F NEMA Type 4/4X/5 (stainless steel), 12. Equipment Ground Kits are standard factory installed on receptacle switches and Series F 30-200 A, 4 and 6 pole switches.
[54] H2212AWK accepts GTK03 or GTK03C. H3612A or AWK accepts GTK03C. H3612 and H3612RB accepts GTK0610 HU3612AWK accepts GTK03C. HU3612A accepts GTK0610C. HU3612RB accepts GTK0610 or GTK0610C.
[55] Optional copper equipment grounding kit for the 4 and 6 pole 30 A F Series: H461DS, H461AWK, HU461DS, HU661DS and HU661AWK accepts GTK03C HU461AWK accepts GTK0610C.
[56] Two required if equipment grounding conductors are run in parallel.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



Optional Lock-OFF Guard Kit Installed

Lock OFF / Lock ON

Lock off provisions are standard on Heavy Duty Switches

Lock-on is also available as a factory modification on Type 12 and 304 Stainless Steel Type 4X enclosures. Obtain by selecting on product configurator.

Lock Off Guard Kits

For field installed kits, the lock off guard works by covering the lockout tagout openings whenever the switch is in the ON POSITION. This protects against a padlock from being inadvertently inserted into the switch lockplate. Available ONLY for use on Type 1, Type 3R, Type 12, Heavy Duty Safety Switches.

Table 3.35: Lock-Off Guard Kits for Heavy Duty Safety Switches

Switch Rating	Cat. No.
30 A 60 A 240 V	LOGK1
60 A 600 V 100 and 200 A	LOGK2



Key Interlock System

Key Interlock Systems

Factory installed only on heavy duty safety switches from 30 amp to 1200 amp, Type 12 and 304 stainless steel Type 4X.

The key interlock system is a simple and easy method of applying individual key interlock units and assemblies to the above equipment so as to require operation in a predetermined sequence. UL Listed.

Quoting: Contact Schneider Electric for catalog number, availability, and pricing prior to quoting a job. Detailed information is required before an order can be processed. Please see Supplemental Digest Section 2 for further information.

Use these suffixes on switch catalog numbers:

- KI = 1 lock per switch
- KI2 = 1 lock with 2 cylinders (2 keys) per switch
- KIKI = 2 separate locks per switch



Safety Switch with Voltage Monitoring

Voltage Monitors for Safety Switches

Voltage monitors installed on safety switches indicate when voltage is present, helping to prevent hazards during maintenance work. Voltage monitors can be combined with other safety features such as Key Interlock, Viewing Windows or Lock-ON provisions.

- UL Listed
- Available on 30-1200 A Type 12 and 4X - 304 Stainless steel Heavy duty Safety Switches
- Obtain by selecting on product configurator *[57]*
- Not available on NEMA Type 7 and 9 and NEMA Type 4X Fiberglass and Krydon™ switches

NOTE: When voltage monitoring is required for 30 and 60 A application, a 100 A enclosure is used.



AL20DTF

Load Side Double Lug Kits

200 A heavy duty F-series switches are supplied standard with lugs suitable for one wire per phase. For two wires per phase and neutral, order the Double Lug Kit.

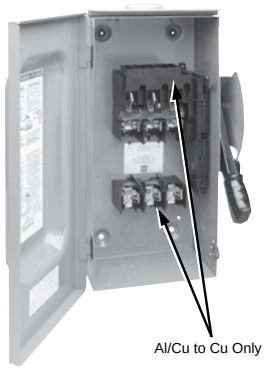
UL Recognized. Not included on switch wiring diagram as an accessory, available for Load Connections only. Lug can only be field installed on load side terminals. *[58]*

Table 3.36: Double Lug Kits

Amperes	Cat. No. *[59]*	Lug Wire Range per Phase and Neutral AWG/kcmil	Wire Range Wire Bending Space per NEC Table 312.6 AWG/kcmil
200	AL20DTF	(2) 6 –300 Cu/Al	(2) 6 –250 Cu/Al

[57] For 30-60 A 240 Vac application, order 600 Vac heavy duty safety switch.
[58] Double lug kit is a UL recognized component accessory kit consisting of UL listed lugs.
[59] Kit contains 3 lugs. Order two kits for line and load lugs.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025


Al/Cu to Cu Only

Copper Lug Kits

Lug kits that accept only copper wire are available for field installation:

- UL Listed
- UL Marine Listed
  - UL Marine listing is applicable ONLY to 30 - 200 A, NEMA Type 12/3R, NEMA Type 12K and NEMA Type 4/4X/5 stainless steel, safety switches
  - When copper only lugs kits are factory installed the switch will bear the UL Marine mark and be suitable for use on vessels over 65 feet long
  - When the copper only lugs kits are field installed the switch will not bear the UL Marine mark and would not be suitable for use on vessels over 65 feet long
- Not available for use on NEMA Type 4X Fiberglass, Krydon or NEMA Type 7 and 9 switches
- For field installation, order copper lug kits. See Table below
- For factory installation of copper lugs, add the suffix SLC to the standard catalog number

Table 3.37: Copper Lug Kits *[60]*

Amperes	Lug Kit Cat. No.	Lug Wire Range AWG/kcmil
30–60	CL0306F	(1) 14-8 Cu solid or 14-4 Cu stranded
100	CL10F	(1) 14-8 Cu solid or 14-1/0 Cu stranded
200	CL20F	(1) 6-250 Cu
400	CL40F	(1) 1-600 Cu plus (1) 6-250 Cu
600	CL60F	(1) 4-350 Cu
800	—	—
1200	—	—


H12LKE2

Compression Lug Kits — 800 A and 1200 A Safety Switches

- UL Listed
- Compression Lug Kits available for field installation
- Compression Lug Kits contain VCEL07512H1 Versa-Crimp™ compression lugs
- Order one Compression Lug Kit per switching pole and/or neutral (see Table below)

Table 3.38: Compression Lug Kits

Amperes	Lug Kit Cat. No.	Conductors per Phase	Lug Wire Range kcmil
800	H8LKE2	(3) Line and (3) Load	500-750 kcmil (Al) or 500 kcmil (CU)
1200	H12LKE2	(4) Line and (4) Load	500-750 kcmil (Al) or 500 kcmil (CU)

Table 3.39: Terminal Lug Data *[61]*

Rating (A)	Wires Per Phase and Neutral	Wire Range Wire Bending Space per NEC Table 312.6 AWG/kcmil	Lug Wire Range AWG/kcmil	Optional *[62]* Compression Lug Field-Installed	Optional Copper Only *[62]* Compression Lug Field-Installed *[63]*
30	1	12–6 (Al) or 14–6 (Cu)	12–2 (Al) or 14–2 (Cu)	C10–14, *[64]* D8–14–SK, or E6–14	—
	2	12–10 (Al) or 14–10 (Cu)			
60 *[65]*	1	12–3 (Al) or 14–3 (Cu)	12–2 (Al) or 14–2 (Cu)	C10–14, *[64]* D8–14–SK, or E6–14	—
100 *[66]*	1	12–1/0 (Al) or 14–1/0 (Cu)	12–1/0 (Al) or 14–1/0 (Cu)	VCEL02114S1	VCELC02114S1
200 *[67]*	1	6–250 (Al/Cu)	6–300 (Al/Cu)	VCEL030516H1	VCELC030516H1
400 *[68]*	1 or 2	1/0–750 (Al/Cu) or 1/0–300 (Al/Cu)	1/0–750 (Al/Cu) or 1/0–300 (Al/Cu)	VCEL07512H1 or VCEL030516H1 *[69]* and VCEL05012H1	VCELC07512H1 or VCELC030516H1 *[70]* and VCELC05012H1
600	2	3/0–500 (Al/Cu)	3/0–500 (Al/Cu)	VCEL05012H1	VCELC05012H1
800	3	3/0–750 (Al/Cu)	3/0–750 (Al/Cu)	H8LKE2 *[71]*	—
1200	4	3/0–750 (Al/Cu)	3/0–750 (Al/Cu)	H12LKE2 *[71]*	—

[60] One kit includes line/load lugs for a 3-pole switch. CL0306F, CL10F and CL20F includes six lugs. CL40F and CL60F includes twelve lugs.
[61] 30–100 A switches suitable for 60°C or 75°C conductors. 200–1200 A switches suitable for 75°C conductors.
[62] Hubbell Versa-Crimp™ unless otherwise noted.
[63] For NEMA Type 1, 12/3R, 12K and 4/4X/5 stainless steel switches only.
[64] Order from Thomas and Betts.
[65] H60XFA and H60XFA1212 — use 75°C copper wire only. #6 AWG copper wire required for 60 A rating.
[66] H100XFA and H100XFA1212 — use 75°C copper wire only. #3 AWG copper wire required for 100 A rating.
[67] H225XJG and H225XJGAA — use 75°C copper wire only. Lug wire range is #3 AWG – 350 kcmil. Not UL Listed due to inadequate wire bending space (5" on ON end, 6" on OFF end).
[68] Maximum wire bending space allows for (1) 600 kcmil or (2) 300 kcmil Al/Cu on NEMA Type 4/4X/5 stainless steel and NEMA Type 12 switches.
[69] Order two PK516KN mounting kits when installing VCEL030516H1 lugs. Only one kit is required on 2 pole switches. PK516KN consists of (4) 5/16-18 Keps Nuts.
[70] Order two PK516KN mounting kits when installing VCEL030516H1 or VCELC030516H1 lugs. Only one kit is required on 2 pole switches. PK516KN consists of (4) 5/16-18 Keps Nuts.
[71] For 800 and 1200 A compression lug kits see Table 3.38 Compression Lug Kits, page 3-21 for additional information.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Table 3.40: Conduit Provisions

Amperes	Top and Bottom Endwall
	NEMA Type 4X Fiberglass Reinforced Polyester and Krydon *[72]*
30	3/4 in.
60	1-1/4 in.
100	2 in.
200	2-1/2 in.

Dimensions for VisiPacT Type 1 and 3R Safety Switches

See Terminal Lug Data, page 3-21 for terminal lug data for the series switches listed in the dimension table below.

Table 3.41: Approximate Dimensions

Cat. No.	Series	H		W		D		W/H		Cat. No.	Series	H		W		D		W/H	
		in.	mm	in.	mm	in.	mm	in.	mm			in.	mm	in.	mm	in.	mm	in.	mm
VH221N	F8	14.57	370	6.36	162	5.11	130	7.48	190	VH221NRB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VH321N	F8	14.57	370	6.36	162	5.11	130	7.48	190	VH321NRB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VH361	F8	14.57	370	6.36	162	5.11	130	7.48	190	VH361RB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VH361N	F8	14.57	370	6.36	162	5.11	130	7.48	190	VH361NRB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VHU361	F8	14.57	370	6.36	162	5.11	130	7.48	190	VHU361RB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VH222N	F8	14.57	370	6.36	162	5.11	130	7.48	190	VH222NRB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VH322N	F8	14.57	370	6.36	162	5.11	130	7.48	190	VH322NRB	F8	14.84	377	6.63	168	5.05	128	7.60	193
VH362	F8	18.18	462	8.91	226	7.04	179	10.26	261	VH362RB	F8	18.40	467	9.08	231	6.98	177	10.39	264
VH362N	F8	18.18	462	8.91	226	7.04	179	10.26	261	VH362NRB	F8	18.40	467	9.08	231	6.98	177	10.39	264
VHU362	F8	18.18	462	8.91	226	7.04	179	10.26	261	VHU362RB	F8	18.40	467	9.08	231	6.98	177	10.39	264
VH223N	F8	21.84	555	8.91	226	7.04	179	10.28	261	VH223NRB	F8	22.10	561	9.08	231	7.02	178	10.42	265
VH323N	F8	21.84	555	8.91	226	7.04	179	10.28	261	VH323NRB	F8	22.10	561	9.08	231	7.02	178	10.42	265
VH363	F8	21.84	555	8.91	226	7.04	179	10.28	261	VH363RB	F8	22.10	561	9.08	231	7.02	178	10.42	265
VH363N	F8	21.84	555	8.91	226	7.04	179	10.28	261	VH363NRB	F8	22.10	561	9.08	231	7.02	178	10.42	265
VHU363	F8	21.84	555	8.91	226	7.04	179	10.28	261	VHU363RB	F8	22.10	561	9.08	231	7.02	178	10.42	265
VH224N	F8	28.00	711	16.61	422	8.51	216	18.55	471	VH224NRB	F8	28.94	735	17.02	432	8.51	216	18.36	466
VH324N	F8	28.00	711	16.61	422	8.51	216	18.55	471	VH324NRB	F8	28.94	735	17.02	432	8.51	216	18.36	466
VH364	F8	28.00	711	16.61	422	8.51	216	18.55	471	VH364RB	F8	28.94	735	17.02	432	8.51	216	18.36	466
VH364N	F8	28.00	711	16.61	422	8.51	216	18.55	471	VH364NRB	F8	28.94	735	17.02	432	8.51	216	18.36	466
VHU364	F8	28.00	711	16.61	422	8.51	216	18.55	471	VHU364RB	F8	28.94	735	17.02	432	8.51	216	18.36	466

Dimensions for NEMA Type 1 and 3R Safety Switches

See Terminal Lug Data, page 3-21 for terminal lug data for the series switches listed in the dimension table below.

Table 3.42: Approximate Dimensions

Cat. No.	Series	H		W		D		W/H		Cat. No.	Series	H		W		D		W/H	
		in.	mm	in.	mm	in.	mm	in.	mm			in.	mm	in.	mm	in.	mm	in.	mm
H225	E4	50.25	1276	27.63	702	10.13	257	27.63	702	H327NR	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H225N	E4	50.25	1276	27.63	702	10.13	257	27.63	702	H328	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H225NR	E5	50.31	1278	27.76	705	9.53	242	27.88	708	H328N	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H225R	E5	50.31	1278	27.76	705	9.53	242	27.88	708	H328R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H226	E4	50.25	1276	27.63	702	10.13	257	27.63	702	H328NR	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H226N	E4	50.25	1276	27.63	702	10.13	257	27.63	702	H365	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H226NR	E5	50.31	1278	27.76	705	9.53	242	27.88	708	H365N	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H226R	E5	50.31	1278	27.76	705	9.53	242	27.88	708	H365R	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H227	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H365NR	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H227N	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H366	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H227NR	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H366N	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H227R	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H366NR	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H228	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H366R	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H228N	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H367	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H228NR	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H367N	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H228R	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H367NR	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H265	E4	50.25	1276	27.63	702	10.13	257	27.63	702	H367R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H265R	E5	50.31	1278	27.76	705	9.53	242	27.88	708	H368	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H266	E4	50.25	1276	27.63	702	10.13	257	27.63	702	H368N	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H266R	E5	50.31	1278	27.76	705	9.53	242	27.88	708	H368NR	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H267	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H368R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H267R	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU265	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H268	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU265R	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H268R	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU266	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H321N	F5	14.60	371	6.50	165	4.88	124	7.55	192	HU266R	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H321NRB	F5	14.88	378	6.63	168	4.88	124	7.55	192	HU267	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H322N	F5	14.60	371	6.50	165	4.88	124	7.55	192	HU267R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H322NRB	F5	14.88	378	6.63	168	4.88	124	7.55	192	HU268	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H323N	F5	21.25	540	8.50	216	6.38	162	10.50	267	HU268R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H323NRB	F5	21.25	540	8.50	216	6.38	162	10.50	267	HU365	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H324N	F5	29.00	737	17.13	435	8.25	210	18.50	470	HU365R	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H324NRB	F5	29.25	743	17.25	438	8.50	216	18.63	473	HU366	E4	50.25	1276	27.63	702	10.13	257	27.63	702
H325	E4	50.25	1276	27.88	708	10.13	257	27.88	708	HU366R	E5	50.31	1278	27.76	705	9.53	242	27.88	708
H325N	E4	50.25	1276	27.88	708	10.13	257	27.88	708	HU367	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H325R	E5	50.31	1278	27.76	705	9.53	242	27.88	708	HU367R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H325NR	E5	50.31	1278	27.76	705	9.53	242	27.88	708	HU368	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H326	E4	50.25	1276	27.63	702	10.13	257	27.63	702	HU368R	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H326N	E4	50.25	1276	27.63	702	10.13	257	27.63	702	HU461	F5	20.50	521	14.75	375	6.85	174	16.13	410
H326R	E5	50.31	1278	27.76	705	9.53	242	27.88	708	HU462	F5	20.50	521	14.75	375	6.85	174	16.13	410
H326NR	E5	50.31	1278	27.76	705	9.53	242	27.88	708	HU463	F5	20.50	521	14.75	375	6.85	174	16.13	410
H327	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU464	F5	29.00	737	23.25	591	8.75	222	24.88	632
H327N	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU465	E4	50.25	1276	33.88	861	10.13	257	33.88	861
H327R	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU466	E4	50.25	1276	33.88	861	10.13	257	33.88	861

[72] Hubs and hub drilling templates are provided for field-installation.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Dimensions for VisiPacT Type 4X and 12 Safety Switches

See Terminal Lug Data, page 3-21 for terminal lug data for the series switches listed in the dimension table below.

Table 3.43: Approximate Dimensions

Cat. No.	Series	H		W		D		W/H		Cat. No.	Series	H		W		D		W/H	
		in.	mm	in.	mm	in.	mm	in.	mm			in.	mm	in.	mm	in.	mm	in.	mm
VH221DSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH364SSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489
VH221NDSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VHU364SSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489
VH321DSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH221AWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH321NDSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH221NAWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH361DSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH321AWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH361NDSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH321NAWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VHU361DSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH361AWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH361SSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH361NAWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VHU361SSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VHU361AWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH222DSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VHU361NAWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH222NDSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH222AWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH322DSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH222NAWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH322NDSGL	F8	14.93	379	7.91	201	5.40	137	8.40	213	VH322AWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH362DSGL	F8	16.93	430	8.90	226	7.26	184	10.71	272	VH322NAWKGL	F8	14.57	370	6.48	165	5.25	133	7.67	195
VH362NDSGL	F8	16.93	430	8.90	226	7.26	184	10.71	272	VH362AWKGL	F8	16.53	420	8.91	226	7.17	182	10.45	265
VU362DSGL	F8	16.93	430	8.90	226	7.26	184	10.71	272	VH362NAWKGL	F8	16.53	420	8.91	226	7.17	182	10.45	265
VH362SSGL	F8	16.93	430	8.90	226	7.26	184	10.71	272	VHU362AWKGL	F8	16.53	420	8.91	226	7.17	182	10.45	265
VHU362SSGL	F8	16.93	430	8.90	226	7.26	184	10.71	272	VHU362NAWKGL	F8	16.53	420	8.91	226	7.17	182	10.45	265
VH223DSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH223AWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VH223NDSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH223NAWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VH323DSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH323AWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VH323NDSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH323NAWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VH363DSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH363AWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VH363NDSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH363NAWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VU363DSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VHU363AWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VH363SSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VHU363NAWKGL	F8	20.49	520	8.92	227	7.15	182	10.44	265
VHU363SSGL	F8	20.73	527	9.34	237	7.20	183	11.15	283	VH224AWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VH224DSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VH224NAWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VH224NDSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VH324AWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VH324DSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VH324NAWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VH324NDSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VH364AWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VH364DSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VH364NAWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VH364NDSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VHU364AWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472
VU364DSGL	F8	28.90	734	17.47	444	8.94	227	19.27	489	VHU364NAWKGL	F8	28.93	735	17.01	432	9.02	229	18.58	472

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Dimensions for NEMA Type 4, 4X, 5, 7, 9, and 12 Safety Switches

See Terminal Lug Data, page 3-21 for terminal lug data for the series switches listed in the dimension table below.

Table 3.44: Approximate Dimensions

Cat. No.	Series	H		W		D		W/H		Cat. No.	Ser-ies	H		W		D		W/H	
		in.	mm	in.	mm	in.	mm	in.	mm			in.	mm	in.	mm	in.	mm	in.	mm
H225AWK	E4	46.25	1175	26.25	667	10.13	259	26.25	667	H461AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H225NAWK	E4	46.25	1175	26.25	667	10.13	259	26.25	667	H461DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H225NDS	E4	46.25	1175	26.25	667	10.13	259	26.25	667	H462AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H225XJG	A1	22.56	573	10.88	276	7.75	197	10.88	276	H462DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H226AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	H463AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H226DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	H463DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H226NDS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	H464AWK	F6	29.00	737	23.25	591	8.75	222	24.88	632
H226NAWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	H464DS	F6	29.00	737	23.75	603	8.88	226	25.25	641
H227AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H465AWK	E5	46.25	1175	32.50	826	10.13	259	32.50	826
H227NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H663AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H228AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H663DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H228NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	H664AWK	F6	29.00	737	23.25	591	8.75	222	24.88	632
H265AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	H664DS	F6	29.00	737	23.75	603	8.88	226	25.25	641
H265DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU265AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H266AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU265DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H266A	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU266AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H266DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU266DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H267AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU267AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H267NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU268AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H268AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU361DF	F1	16.50	419	11.00	279	8.80	224	11.00	279
H268NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU361DX	F1	19.40	493	11.40	290	8.60	218	11.40	290
H325AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU362DF	F1	16.50	419	11.00	279	8.80	224	11.00	279
H325DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU362DX	F1	19.40	493	11.40	290	8.60	218	11.40	290
H325NAWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU363DF	F1	24.80	630	13.70	348	12.00	305	13.70	348
H325NDS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU363DX	F1	25.25	641	11.40	290	8.60	218	11.40	290
H326AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU364DF	E1	31.30	795	26.30	668	11.80	300	26.30	668
H327AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU365AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H327NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU365DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H328AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU365SS	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H328NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU366AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H361DF	F1	16.50	419	11.00	279	8.80	224	11.00	279	HU366DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H361DX	F1	19.40	493	11.40	290	8.60	218	11.40	290	HU366SS	E5	46.25	1175	26.25	667	10.13	259	26.25	667
H362DF	F1	16.50	419	11.00	279	8.80	224	11.00	279	HU367AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H362DX	F1	19.40	493	11.40	290	8.60	218	11.40	290	HU368AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930
H363DF	F1	24.80	630	13.70	348	12.00	305	13.70	348	HU461AWK	F6	20.50	521	14.75	375	6.80	173	16.13	411
H363DX	F1	25.25	641	11.40	290	8.60	218	11.40	290	HU461DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H365SS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU462AWK	F6	21.25	540	16.13	410	6.80	173	16.13	410
H364DF	E1	31.30	795	26.30	668	11.80	300	26.30	668	HU462DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H365AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU463AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H365DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU463DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H365NAWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU464AWK	F6	29.00	737	23.25	591	8.75	222	24.88	632
H365NDS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU464DS	F6	29.00	737	23.75	603	8.88	226	25.25	641
H366AWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU465AWK	E5	46.25	1175	32.50	826	10.13	259	32.50	826
H366DS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU661AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H366NAWK	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU661DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H366NDS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU662AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H366SS	E5	46.25	1175	26.25	667	10.13	259	26.25	667	HU662DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H367AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU663AWK	F6	20.50	521	14.75	375	6.80	173	16.13	410
H367NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU663DS	F6	20.82	529	15.08	383	6.97	177	16.85	428
H368AWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU664AWK	F6	29.00	737	23.25	591	8.75	222	24.88	632
H368NAWK	E4	69.13	1756	36.62	930	17.75	451	36.62	930	HU664DS	F6	29.00	737	23.75	603	8.88	226	25.25	641

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



30–100 A DT, DTU (Series F)
NEMA Type 1

30–100 A Types DT, DTU (Series F)

- Fusible (DT) and non-fusible (DTU) switches available
- Manually-operated switch suitable for use in accordance with article 702 of the NEC, ANSI/NFPA 70
- Standards: UL 98, Type KS1, CSA, and NOM
- Modular design—switch handle, lock-plate, switch mechanism; line and load bases are field replaceable
- UL Listed short circuit current ratings up to 200 kA (using with (fusible) or (non-fusible) Class R, J, or T fuses—see table for rating)
- Load make/break rated
- Horsepower rated
- Dual cover interlock
- May be padlocked ON (I) or OFF (O)
- Lock-off accepts up to three padlocks
- Side-opening door
- Quick make / quick break mechanism
- Meets NEMA requirements as heavy duty switch
- Field-installed electrical interlock kits
- Field-installed neutral assembly kits (2P and 3P switches)
- UL Listed as suitable for use as service equipment
- Supplied as standard for switching one load between two power sources, and may be field-converted to switch one power source between two loads.



82,000 Line
NEMA Type 1

30 (Series T4), 200–600 A Types 82,000 & 200 A DTU (Series E, A)

- Non-fusible
- Designed for manual transfer of one load between two power sources
- UL Listed switches are suitable for use in accordance with Article 702 of the National Electrical Code, ANSI / NFPA 70
- 82,000 and DTU double throw switches are continuous duty rated for their nameplate ampere rating
- The 82,000 and DTU (Series E, A) switches are load make/break rated
- UL Listed as suitable for use as service equipment
- Horsepower rated only as footnoted







Field-Installable Accessories

- Neutral
- Electrical Interlock
- Grounding Terminals

© 2024 Schneider Electric
All Rights Reserved
3/18/2025

Double Throw Safety Switches (240 V)

Table 3.45: 240 V Double Throw Safety Switches







System	Amperes	Current Series	NEMA Type 1	NEMA Type 3R	NEMA Type 4,4X,5 304 Stainless Steel	NEMA Type 12 Gasketed	Horsepower Ratings *[1] [2]*				
							240 Vac				250 Vdc *[3]*
							Std.		Max.		
			Cat. No.	Cat. No.	Cat. No.	Cat. No.	1Ø	3Ø	1Ø	3Ø	
Fusible—2P, 240 Vac—250 Vdc											
	100	F	DT223	DT223RB	—	—	7.5	15 *[4]*	15	30 *[4]*	20
Fusible—3P, 240 Vac—250 Vdc											
	30	F	DT321	DT321RB	—	—	1.5 *[5]*	3 *[4]*	3 *[5]*	7.5 *[4]*	5
	60	F	DT322	DT322RB	—	—	3 *[5]*	7.5 *[4]*	10 *[5]*	15 *[4]*	10
	100	F	DT323	DT323RB	—	—	7.5 *[5]*	15 *[4]*	15 *[5]*	30 *[4]*	20
Non-Fusible—2P, 240 Vac—250 Vdc											
	60	F	DTU222	—	—	—	—	—	10	—	10 *[6]*
	100	F	DTU223	DTU223RB	—	—	—	—	15	—	20 *[6]*
	30	T4	92251 *[7]*	—	—	—	—	—	—	—	—
	200	E	82254	DTU224NRB *[7] [8]*	—	H82254	15	—	—	—	—
	400	A	DTU225	DTU225R	—	—	—	—	—	—	50
Non-Fusible—3P, 240 Vac—250 Vdc											
	30	F	DTU321	—	—	—	—	3 *[4]*	5 *[5]*	10 *[4]*	5 *[6]*
	60	F	DTU322	—	—	—	—	—	10 *[5]*	15 *[4]*	10 *[6]*
	100	F	DTU323	DTU323RB	—	—	—	—	15 *[5]*	30 *[4]*	20 *[6]*
	30	T4	92351 *[7]*	—	—	—	—	—	—	—	—
	200	E	82354 *[7]*	—	—	H82354 *[7]*	—	15	—	—	—
	200	E	DTU324N *[7] [8]*	DTU324NRB *[7] [8]*	—	—	—	15	—	—	—
	400	A	DTU325	DTU325R	—	—	—	125	—	—	50
	600	A	DTU326	DTU326R	—	—	—	125	—	—	50
Non-Fusible—4P, 240 Vac											
	30	T4	92451 *[7]*	—	—	—	—	—	—	—	—
	600	A	DTU426	DTU426R	—	—	—	125	—	—	50

[1] The starting current of motors or more than standard horsepower may require the use of fuses with appropriate time delay characteristics.
[2] Std.—Using fast acting one time fuses. Max.—Using dual element time delay fuses.
[3] For switching dc, use two switching poles.
[4] If used on corner grounded delta systems, install neutral and use outer switching pole for ungrounded conductors. See data bulletin 2700DB0202 for additional information.
[5] Use outer switching poles.
[6] Maximum rating.
[7] 240 Vac only. Not Vdc rated.
[8] Neutral included with device.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Double Throw Safety Switches (600 V)

Table 3.46: 600 V Double Throw Safety Switches

System	Amperes	Current Series	NEMA Type 1	NEMA Type 3R	NEMA Type 4,4X,5 304 Stainless Steel	NEMA Type 12 Gasketed	Horsepower Ratings [9] [10]							
							240 Vac		480 Vac		600 Vac		Vdc [11]	
							Std	Max	Std	Max	Std	Max	250	600
			Cat. No.	Cat. No.	Cat. No.	Cat. No.	3Ø	3Ø	3Ø [12]	3Ø [12]	3Ø	3Ø		
Fusible 3P, 600 Vac—600 Vdc														
	30	F	DT361	DT361RB	—	—	—	—	5 [13]	15 [13]	7.5	20	5	15 [14]
	60	F	DT362	DT362RB	—	—	—	—	15 [15]	30 [15]	15	50	—	30 [16]
	100	F	DT363	DT363RB	—	—	—	—	25 [17]	60 [17]	30	75	—	50 [18]
Non-Fusible 3P, 600 Vac—600 Vdc							1Ø [11] [19]	3Ø [12] [19]	1Ø [11] [19]	3Ø [12] [19]	1Ø [11] [19]	3Ø [19]		
	30	F	DTU361	DTU361RB	—	—	5	10	7.5	20	10	30	5	15
	60	F	DTU362	DTU362RB	DTU362DS	DTU362AWK [20]	10	20 [21]	25	50 [22]	30	60 [23]	10	30
	100	F	DTU363	DTU363RB	DTU363DS	DTU363AWK [20]	20	40 [24]	40	75 [24]	40	100 [24]	20	50
	200	E	82344 [25]	82344RB [25]	82344DS [25] [26]	H82344 [25]	—	—	—	15 [27]	—	—	—	—
	400	A	DTU365	DTU365R	DTU365DS	DTU365AWK	—	125	—	250	—	350	50	—
	600	A	DTU366 [28]	DTU366R [28]	—	DTU366AWK [28]	—	125	—	250	—	350	50	—
Non-Fusible 4P, 600 Vac—600 Vdc							2Ø	3Ø	2Ø	3Ø	2Ø	3Ø		
	60	F	DTU462 [29]	Use NEMA Type 12	DTU462DS [29]	DTU462AWK [20] [29]	20	20	40	50	50	60	10	30
	100	F	DTU463 [29]		DTU463DS [29]	DTU463AWK [20] [29]	30	40	50	75	50	100	20	50
	400	A	DTU465 [28]	DTU465R [28]	—	—	—	125	—	250	—	350	50	—
	600	A	DTU466 [28]	DTU466R [28]	—	—	—	125	—	250	—	350	50	—
Non-Fusible 6P, 600 Vac—600 Vdc							1Ø	3Ø	1Ø	3Ø	1Ø	3Ø		
	60	F	—	—	—	DTU662AWK [20] [29]	—	20	—	50	—	60	10	30
	100	F	—	—	—	DTU663AWK [20] [29]	—	40	—	75	—	100	20	50

[9] The starting current of motors of more than standard horsepower may require the use of fuses with appropriate time delay characteristics.
[10] Std.—Using fast acting one time fuses. Max.—Using dual element time delay fuses. (Non-fusible switches have max rating unless noted.)
[11] Use outer switching poles.
[12] If used on corner grounded delta systems, install neutral and use outer switching pole for ungrounded conductors.See data bulletin 2700DB0202 for additional information.
[13] 480 Vac 1 Phase HP = 3 Std, 7.5 Max
[14] 10 Std, 15 Max
[15] 480 Vac 1 Phase HP = 5 Std, 20 Max
[16] 25 Std, 30 Max
[17] 480 Vac 1 Phase HP = 10 Std, 30 Max
[18] 40 Std, 50 Max
[19] Maximum HP
[20] Complete rating on switch is NEMA Type 3R, 5 or 12. For 3R applications, remove drain screw from bottom endwall.
[21] Maximum HP is 15 for corner grounded delta systems.
[22] Maximum HP is 30 for corner grounded delta systems.
[23] Use 75°C #4 Cu or #2 Al conductors only on DTU362 and DTU362RB.
[24] Use 75°C #1 Cu conductors only.
[25] 480 Vac, 250 Vdc maximum
[26] Not UL Listed.
[27] Standard Hp rating.
[28] 250 Vdc maximum.
[29] Not suitable for use as service equipment.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Electrical Interlocks for Double Throw Safety Switches

Table 3.47: Electrical Interlocks (For Electrical Interlock Contact Ratings, see Supplemental Digest Section 2)

Switch	Field-Installed Electrical Interlock Kit Cat. No. *[30]*
30–100 A Type DT, DTU (Series F)	EIK1, EIK2 *[31]* *[32]*
200 A Type 82000 and DTU (Series E) *[33]*	*[34]*
400–600 A Type DTU (Series A)	DS200EK2D

Neutral Assemblies for Double Throw Safety Switches

Table 3.48: Neutral Assemblies

Switch	Field-Installed Standard Neutral Kit Cat. No.	Terminal Data AWG/kcmil	Field-Installed Copper only Neutral Kit Cat. No.	Terminal Data AWG/kcmil
30–100 A Type DT, DTU (Series F) (2- and 3-pole switches only)	SN0310	(3) 14-1/0 Al/Cu plus (2) 14-6 Al/Cu Svc Ground	SN0310C	(3) 14-1/0 Cu plus (2) 14-6 Cu Svc Ground
30 A (Series T4) (2- and 3-pole switches only)	DT30SN	(3) 14-4 Al/Cu plus (2) 14-4 Al/Cu Svc Ground	—	—
200 A Type 82000 (Series E) (2- and 3-pole switches only) *[35]*	*[36]*	(3) 6-300 Al/Cu plus (1) 6-2/0 Al or 10-2/0 Cu Svc Ground	—	—
200 A Type DTU (Series E)	Factory Installed	(3) 4-300 Al/Cu plus (1) 4-300 Al/Cu Svc Ground	—	—
400 A Type DTU (Series A)	DT400NKD	(1) 1/0-720 Al/Cu or (2) 1/0-300 Al/Cu plus (2) 6-250 Al/Cu Svc Ground	—	—
600 A Type DTU (Series A)	DT600NKD	(6) 250-500 Al/Cu plus (1) 6-250 Al/Cu Svc Ground	—	—



DS468GKD

Service Grounding Kits for Double Throw Safety Switches

Table 3.49: Service Grounding Kits—Required for Service Equipment Use

Switch	Field-Installed Service Grounding Lug Kit Cat. No.	Terminal Data AWG/kcmil
30–60 A Type DT, DTU (Series F)	Included	(3) 14-2 Al/Cu or (6) 14-10 Al/Cu
100 A Type DT, DTU (Series F)	Included	(3) 14 - 1/0 Al/Cu
30 A Type 92,000 (Series T4)	DT30SG	(4) 14-4 Al/Cu
200 A Type 82000 and DTU (Series E)	DT100SG	(3) 14–1/0 Al/Cu
400–600 A Type DTU (Series A)	DS468GKD	(2) 6–250 Al/Cu *[37]*



RFK06



RFK10

Class R Fuse Rejection Kits

When properly installed, this kit accepts only Class R fuses. Kits are available for field installation.

Table 3.50: Class R Fuse Rejection Kits

Switch	Series Number	Class R Fuse Kit Cat. No.
Class R Fuse Kits—240 V (two kits per 3P switch)		
30 A	F5	RFK03
60 A	F5	RFK06
100 A	F5	RFK10
Class R Fuse Kits—600 V (two kits per 3P switch)		
30 A	F5	RFK06
60 A	F5	RFK06H
100 A	F5	RFK10

Viewing Windows for Double Throw Safety Switches

Accessory available on 30–100 A DT and DTU Series F switches only. Add the suffix **VW** to the catalog number.

Key Interlock Systems for Double Throw Safety Switches

For factory-installed key interlocks, refer to page 3-20.

Lock-ON Provisions for Double Throw Safety Switches

Standard feature on 30–100 A type DT and DTU (Series F), and type 92000 switches. Feature available as factory installed option for Type 82000 (200 A only) and 200 A DTU (Series E) switches. Add the suffix **SPLO** to the catalog number.

[30] Electrical interlock kit catalog numbers with "1" suffix indicate one normally open and normally closed contact; "2" indicates two normally open and two normally closed contacts. See Table 3.27 Electrical Interlock Contact Ratings., page 3-17

[31] 30–100 and 600 A Type DT, DTU (Series F) switches contain (2) separate switching mechanisms. Each mechanism will accept an electrical interlock. Some applications may therefore require (2) electrical interlocks.

[32] Double throw switches 92251, 92351, and 92451 are not available with factory or field installed electrical interlocks.

[33] Electrical interlock EK400DTU2 can be added to 200 A, 4-pole Type 82000 switches in the field.

[34] Type 82000 and DTU switches are available with electrical interlock factory-installed only. Not UL listed. Electrical interlocks are furnished with 2 N.O./N.C. contacts and are installed in both "ON" positions. To order, add suffix EI to standard switch catalog number.

[35] Neutral assembly catalog number DT200N can be added to 4P, 200 A, Type 82000 switches in the field.

[36] For 200 A Type 82000, a neutral assembly is available factory installed on 2P and 3P switches. Not UL Listed. To order, add suffix N to the standard catalog number. Neutral terminal lug data = (3) #4 - 250 kcmil Al/Cu wire and (1) #4 - 250 kcmil Al/Cu service ground.

[37] (3) 6-250 ground lugs are provided as standard. DS468GKD provides an additional (2) 6-250 ground lugs.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025



Rainproof Bolt-On Hubs for Double Throw Safety Switches

- UL Listed for indoor or rainproof applications
- Suitable for use with conduit having ANSI standard taper pipe thread
- NEMA Type 3R switches with catalog number ending in RB have a bolt-on closing cap factory installed
  - Accepts 3/4 in. through 2-1/2 in. bolt-on hubs
  - No gaskets required
- NEMA Type 3R switches with R suffix have blank top endwalls
  - Accepts 3 in. through 4 in. bolt on hubs
  - Gaskets provided
  - Conduit entry holes must be cut in the field

Table 3.51: Rainproof Bolt-On Hubs

Conduit Size	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4	Closing Cap
Hub Cat. No	B075	B100	B125	B150	B200	B250	B300	B350	B400	BCAP

Water Resistant Hubs for Double Throw Safety Switches

- UL Listed for dust resistant and water resistant applications
- Suitable for use with conduit having ANSI standard taper pipe thread
- Water resistant hubs are field installed on NEMA Type 4/4X/5 stainless steel and NEMA Type 12/3R and 12K enclosures
- Water resistant hubs are available in zinc or chrome plated finish
- Gaskets provided



H200 Zinc Plated



H050CP Chrome Plated

Table 3.52: Water Resistant Hubs *[38]*

Conduit Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4
Standard-Zinc Hub Cat. No	H050	H075	H100	H125	H150	H200	H250	H300	H350	H400
Chrome Plated Hub Cat. No.	H050CP	H075CP	H100CP	H125CP	H150CP	H200CP	—	—	—	—

[38] Gaskets are provided.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Terminal Lug Data for Double Throw Safety Switches

Table 3.53: Terminal Lug Data for Type DT, DTU (Series F) Double Throw Safety Switches *[39]*

Switch Type	Wires per Phase	NEMA Type 1, 3R, 4, 4X, 12			Optional Copper Only Lug
		Wire Range Wire Bending Space Per NEC Table 373-6 AWG/kcmil	Standard Lug Wire Range AWG/kcmil	Optional Compression Lug Field-Installed	
30–60 A Type DT, DTU (Series F)	1	12–2 Al or 14–2 Cu	12–2 Al or 14–2 Cu	C10-14, D8-14-SK, or E6-14 *[40]*	See Table 3.37 Copper Lug Kits, page 3-21 and Double Lug Kits, page 3-20 for appropriate kit. Order two kits per switch.
100 A Type DT, DTU (Series F)	1	12–1/0 Al or 14–1/0 Cu	12–1/0 Al or 14–1/0 Cu	VCEL02114S1 *[41]*	

Table 3.54: Terminal Lug Data for Types 82,000 and for A and E-Series DTU devices *[39]*

Amperes	Wires per Phase	Wire Range Wire Bending Space Per NEC Table 373-6 AWG/kcmil	Lug Wire Range AWG/kcmil	Optional Compression Lugs Field-Installed
30 A (Series T4)	1	14–8 Al/Cu	12–2 Al or 14–2 Cu	—
200	1	6–300 Al/Cu	6–300 Al/Cu	VCEL030516H1 *[41]*
400	1 or 2	1/0–600 Al/Cu or 1/0–300 Al/Cu	1/0 - 750 Al/Cu or 1/0 - 300 Al/Cu	—
600	2	250–500 Al/Cu	250–500 Al/Cu	—

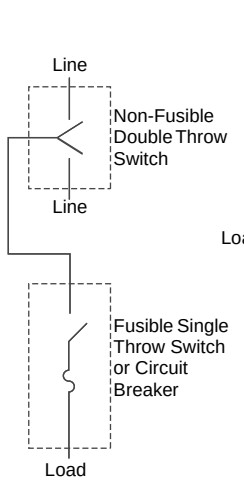


Diagram 1

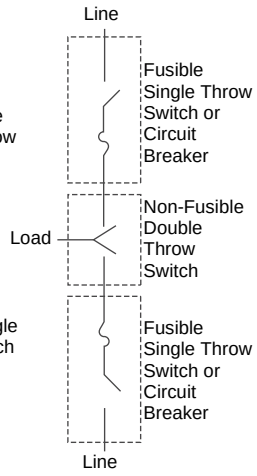


Diagram 2

Application Data for Double Throw Safety Switches

Situations Requiring Fuses

- 30–100 A Type DT (Series F):
  Select DT switches from 240 Volt Double-Throw Safety Switches, page 3-26 and 600 Volt Double Throw Safety Switches, page 3-27 which have provisions for accepting fuses.
- 30 A, 200–600 A Type 82,000 (Series E, T4, A), DTU devices:
  Use the non-fusible double throw switches from 240 Volt Double-Throw Safety Switches, page 3-26 and 600 Volt Double Throw Safety Switches, page 3-27 in conjunction with standard fusible devices, and install them according to diagram 1 or 2, below.

Table 3.55: UL Listed Short Circuit Current Ratings

Switch Type	Amperes	Voltage Rating	UL Listed Fuse Class	Short Circuit Current Rating *[42]* (A)
Type 92000	30 A	240 V	H, K	10,000 *[43]*
Type DT (Series F)	30–100 A	240 V or 600 V	H, K	10,000
			R, J	200,000
Type DTU *[44]* (Series F)	30–100 A	240 V or 600 V	H or K	10,000 *[43]*
			R, J or T	200,000
DTU224NRB and DTU324NRB (Series E)	200 A	240 V	H, K	10,000 *[43]*
DTU324N (Series E)	200 A	240 V	H, K	10,000 *[43]*
			R, J	100,000
Type 82,000	All	240 V or 600 V	H, J	10,000 *[43]*
Type DTU (Series A)	400–600 A	240 V or 600 V	H, K	10,000
			R, J, T	100,000

[39] 30-100 A switches suitable for 60° C or 75° C conductors. 200-600 A switches suitable for 75° C conductors.
[40] Order from Thomas and Betts
[41] Hubbell Versa-Crimp™ catalog numbers.
[42] Rating applies to AC only. The UL Listed short circuit current rating for non-fusible switches is based on the switch being used in conjunction with the corresponding fuse type. Evaluation of non-fusible switches in conjunction with molded case circuit breakers has not been performed.
[43] Any brand of circuit breaker or fuse not exceeding the ampere rating of the switch may be used ahead of a non-fusible safety switch when there is up to 10 kA short circuit current available.
[44] The DTU361 and DTU361RB are also suitable for use on a circuit capable of delivering not more than
(A) 18 kA, 600 Vac maximum when using Type FH circuit breaker rated 30 A maximum or
(B) 14 kA, 600 Vac maximum when using Type FA circuit breaker rated 30 A maximum.

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Dimensions for DT/DTU (Series F) Safety Switches 30–100 A

Table 3.56: 30–100 A Type DT, DTU (Series F)—Approximate Dimensions

Cat. No.	Series	H		W		W/H		D	
		in.	mm	in.	mm	in.	mm	in.	mm
DT223	F5	38.00	965	9.88	251	11.13	283	6.75	171
DT223RB	F5	38.00	965	6.87	174	8.12	206	6.60	168
DT321	F5	38.00	965	10.25	260	11.50	292	6.75	171
DT321RB	F5	38.00	965	10.25	260	11.80	300	6.60	168
DT322	F5	38.00	965	10.25	260	11.50	292	6.75	171
DT322RB	F5	38.00	965	10.25	260	11.80	300	6.60	168
DT323	F5	38.00	965	9.88	251	11.13	283	6.75	171
DT323RB	F5	38.00	965	6.87	174	8.12	206	6.60	168
DT361	F5	38.00	965	10.25	260	11.50	292	6.75	171
DT361RB	F5	38.00	965	10.25	260	11.80	300	6.60	168
DT362	F5	38.00	965	10.25	260	11.50	292	6.75	171
DT362RB	F5	38.00	965	10.25	260	11.80	300	6.60	168
DT363	F5	38.00	965	9.88	251	11.13	283	6.75	171
DT363RB	F5	38.00	965	6.87	174	8.12	206	6.60	168
DTU222	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU223	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU223RB	F5	30.50	775	10.25	260	11.96	304	6.93	176
DTU321	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU322	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU323	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU323RB	F5	30.50	775	10.25	260	11.96	304	6.93	176
DTU361	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU361RB	F5	30.50	775	10.25	260	11.96	304	6.93	176
DTU362	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU362AWK	F6	29.94	760	10.25	260	11.96	304	6.93	176
DTU362DS	F6	30.26	769	10.25	260	11.50	292	7.12	181
DTU362RB	F5	30.50	775	10.25	260	11.96	304	6.93	176
DTU363	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU363AWK	F6	29.94	760	10.25	260	11.96	304	6.93	176
DTU363DS	F6	30.26	769	10.25	260	11.50	292	7.12	181
DTU363RB	F5	30.50	775	10.25	260	11.96	304	6.93	176
DTU462	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU462AWK	F6	30.26	769	15.50	394	16.75	425	7.12	181
DTU462DS	F6	30.26	769	15.50	394	16.75	425	7.12	181
DTU463	F5	29.94	760	10.25	260	11.96	304	6.93	176
DTU463AWK	F6	30.26	769	15.50	394	16.75	425	7.12	181
DTU463DS	F6	30.26	769	15.50	394	16.75	425	7.12	181
DTU662AWK	F6	30.26	769	15.50	394	16.75	425	7.12	181
DTU663AWK	F6	30.26	769	15.50	394	16.75	425	7.12	181

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Dimensions for DTU (Series A E T4) Safety Switches 200–600 A

Table 3.57: 200–600 A Types 82,000 and E-Series DTU and 30 A devices—Approximate Dimensions

Cat. No.	Series	H		W		W/H		D	
		in.	mm	in.	mm	in.	mm	in.	mm
DTU224NRB	E1	32.50	826	20.63	524	24.00	610	10.63	270
82254	E1	30.88	784	15.75	400	19.63	499	9.75	248
82254NW	E1	30.88	784	20.00	508	23.88	607	11.75	298
82344	E2	30.88	784	20.00	508	23.88	607	11.75	298
82344RB	E1	32.50	826	20.63	524	24.00	610	10.63	270
82354	E1	30.88	784	20.00	508	23.88	607	11.75	298
92251	T4	10.00	254	8.00	203	9.75	248	4.75	121
82344DS	E1	30.88	784	20.00	508	23.88	607	11.75	298
DTU324N	E1	32.50	826	24.50	622	26.25	667	10.63	270
DTU324NRB	E1	32.50	826	24.50	622	26.25	667	10.63	270
H82344	E2	32.50	826	24.50	622	26.25	667	10.63	270
H82444	E2	32.50	826	30.21	767	33.61	854	10.63	270
H82454	E3	32.50	826	30.21	767	33.61	854	10.63	270
82454	E3	38.00	965	29.62	753	33.02	839	10.63	270
82444	E3	38.00	965	29.62	753	33.02	839	10.63	270
82454R	E3	38.00	965	29.62	753	33.02	839	10.63	270
82444R	E3	38.00	965	29.62	753	33.02	839	10.63	270
H82254	E3	32.50	826	24.50	622	26.25	667	10.63	270
H82354	E3	32.50	826	24.50	622	26.25	667	10.63	270
82444DS	E3	38.00	965	29.62	753	33.02	839	10.63	270
DTU326	A1	63.31	1608	23.66	601	24.46	621	8.88	226
DTU426	A1	63.31	1608	27.00	686	27.80	706	8.88	226
DTU366	A1	63.31	1608	23.66	601	24.46	621	8.88	226
DTU466	A1	63.31	1608	27.00	686	27.80	706	8.88	226
DTU326R	A1	63.76	1619	23.66	601	24.46	621	8.88	226
DTU426R	A1	63.76	1619	27.00	686	27.80	706	8.88	226
DTU366R	A1	63.76	1619	23.66	601	24.46	621	8.88	226
DTU466R	A1	63.76	1619	27.00	686	27.80	706	8.88	226
DTU366AWK	A1	63.76	1619	23.66	601	24.46	621	8.88	226
DTU225	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU225R	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU325	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU325R	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU365	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU325R	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU365AWK	A1	57.50	1461	23.00	584	23.75	603	7.25	184
DTU365DS	A1	57.50	1461	23.00	584	23.75	603	7.25	184
DTU465	A1	53.81	1367	23.13	588	23.88	607	7.25	184
DTU465R	A1	53.81	1367	23.13	588	23.88	607	7.25	184

© 2025 Schneider Electric
All Rights Reserved
3/18/2025

Section 4

Power Monitoring and Control



EcoStruxure Power Monitoring Expert Software



ION9000 Series Advanced Power Quality Meters



PowerLogic PM8000 Advanced Power Quality Meters



AccuSine PCS+ AccuSine PFV+



VarSet Low-Voltage Capacitor Banks

PowerLogic™ Energy and Power Management Systems 4-2

- Power Monitoring Software 4-4
  - EcoStruxure™ Power Monitoring Expert Software 4-4
  - EcoStruxure™ Power Operation 4-5
- Power Quality Meters — Selection 4-6
- Power Quality Meters — ION9000 4-7
  - ION9000 Series Advanced Power Quality Meters 4-7
- Power Quality Meters — ION8650 4-9
  - PowerLogic™ ION7400 Utility Feeder Meter 4-11
  - PowerLogic PM8000 Advanced Power Quality Meters 4-13
- Power and Energy Meters 4-15
  - Series PM5000 Power Meters 4-15
  - Series PM2000 Power Meters 4-15
  - PowerLogic™ EM3500 Power and Energy Meters 4-16
  - PowerLogic™ EM3570 Power and Energy Meters 4-17
  - PowerLogic™ PM3000 Power and Energy Meters 4-18
  - iEM3000 Energy Meters 4-18
  - Power and Energy Meter Selection 4-21
  - PowerLogic™ EM4200 Enercept Meter 4-22
  - Multi Circuit Energy Meters 4-23
  - PowerLogic™ HDPM6000 High-Density Power Meters 4-24
- Communications—EcoStruxure™ Panel Server 4-26
  - EcoStruxure™ Panel Server 4-26
- Engineering, Maintenance, and Training Services 4-28
- Integration and Equipment 4-32
  - System Integration 4-32
  - Factory Assembled Equipment 4-33

Power Quality Improvement Solutions 4-35

- Power Factor Correction 4-36
  - PowerLogic™ PFC Smart Cap Banks 4-36
  - PowerLogic™ PFC Smart Cap Banks 4-37
  - PowerLogic™ PFC 4-38
  - AccuSine PFV+ Electronic VAR Control 4-39
  - AccuSine Current Transformers 4-40
  - VarSet Hybrid 4-42
- Harmonic Filtration 4-43
  - AccuSine PCS+ Active Harmonic Filter (AHF) 4-43
  - AccuSine PCSn Active Harmonic Filter (AHF) 4-44
  - PowerLogic™ AccuSine™ EVC+ 4-45

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Join the Next Generation of Power and Energy Management

More performance. More intelligence. More integration.

Our industry-leading systems offer the latest in technological advancements to help you simultaneously maximize reliability, availability, and quality, as well as improve operational and cost efficiency for your entire enterprise. You'll benefit from:

- **Holistic approach**
  Our solutions aggregate data from all your energy assets, including power, building, and process systems, into one user-friendly view so you can make more informed decisions and address problems efficiently.
- **Actionable intelligence**
  Our solutions provide real-time and historical information to multiple stakeholders anywhere in the world, including easy-to-use analytics, alarms and controls, as well as regulatory compliance and financial reporting.
- **Proactive capabilities**
  Our sophisticated products help you analyze and identify future needs so you can develop a long-term plan for things like energy purchasing, demand response, load changes, and equipment maintenance or replacement.





Advanced Power Management

Delivers power quality, availability, and reliability

- Maximize facility uptime by reducing power outages and ensuring back-up power generation
- Verify reliable power equipment operation and proactively optimize power networks
- Improve power reliability, availability, and quality through proactive analytics and diagnostics
- Optimize existing infrastructure capacity and avoid over-building
- Prolong asset life with proactive maintenance and optimization
- Reduce peak demand and power factor penalties with monitoring, alerts, and corrective actions
- Deliver enhanced network protection and control with data integration and automation

Superior Energy Management

Delivers cost and operational efficiencies

- Identify, prioritize, and verify savings through automated load management, benchmarking, and progress reporting
- Improve sustainability performance with greenhouse gas emissions tracking and industry compliance reporting
- Improve rates with energy suppliers through demand response programming
- Confirm ROI for system improvements with advanced reporting and analysis
- Identify billing discrepancies and avoid contract penalties by validating utility bills and confirming onsite generation benefits
- Encourage conservation among tenants, departments, and processes through cost allocation reporting

Don't settle for fragmented views and unreliable data

Maximize performance with a fully integrated power management solution

You'll benefit from our decades of expertise in electrical system management, hardware and software development, and integration. Our solutions are designed for compatibility so your installation is both optimized and more efficient. Our systems are modular and interoperable for better continuity of supply, enhanced safety for people and equipment, and more effective monitoring and control. Plus, our full range of in-person and remote services keep your system operating at peak performance.

Schneider Electric is committed to supporting growth in America. We offer thousands of American-made products and solutions for energy management and industrial automation to power smart industries and intelligent buildings, future-proof data centers, and build intuitive homes. To learn more, refer to https://www.se.com/us/en/schneider-in-america/.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Application

		Data Presentment & Management		Data Acquisition, Alarms & Monitoring		
		Enterprise	Online Energy Analysis	Supervisory Control & Data Acquisition	Power Monitoring System	Tenant Submetering
		Data Centers; Industrial Buildings, Property Management, Utilities	Utilities	Water/Wastewater, Heavy Process Industry, Data Centers, Critical Power	Industrial, large commercial buildings, Military Bases, Healthcare	Commercial Buildings, Government Buildings, Military Bases
Cost Management	Meter Application					
	Automatic Meter Reading			•	••••	••
	Revenue Metering			•	••••	••
	WAGES Utility Pulses				•••	
	Sub-billing	•••	•••			••••
	Measurement & Verification	••••	••		•••	
	Cost Allocation & Utility Billing					
	Energy Usage Analysis	••••	•••	•	••	•
	Procurement Optimization	••	•••	•	•	
	Allocate Energy Costs	•			•	
	Interval Benchmarking & Profiling	••••	•••	•	••	
	Total Load Aggregation	••••				
	Energy Efficiency					
	Emissions Tracking	••	•••			
	Power Factor Correction	•	•		•••	
	Peak Demand Reduction	••	•	•••	•••	
	Demand Response & Curtailment			•••	•••	
Ensure Power Quality	Improve Maintenance Practices					
	Commissioning & Troubleshooting			•••	••••	
	Equipment Monitoring: transformers, MCCs, switchgear, switchboards, circuit breaker status, protective equipment, capacitors, generators, panelboards, PDU, UPS, etc.			•••	••••	
	Facility Planning					
	Identify Equipment Capacity				•••	
	Determine Transformer Stress				•••	
	Equipment Asset Optimization	••		••	•••	
	Improve Efficiency					
	Balance Circuit Loading				•••	
	Balance Generator Usage				•••	
	Optimize Chiller & Mechanical Equipment				•	
Network Management	System Monitoring & Analysis					
	Transient Voltage Detection				••••	
	Sag/Swell Disturbance Monitoring				••••	
	Power Quality & Harmonic Analysis				••••	
	Power Quality Compliance	••••		•	•••	
	Alarm & System Diagnositics					
	Electrical Distribution Alarm & Event Analysis	•		•••	••••	
	Waveform capture viewing				••••	
	Remote alarm notification			••••	•••	
Engineering, Maintenance, and Training Services	Energy Services					
	Total Energy Control Services	••••	see Engineering, Maintenance, and Training Services, page 4-28		•••	see Engineering, Maintenance, and Training Services, page 4-28
	Peak Shaving/Generator Control	see Engineering, Maintenance, and Training Services, page 4-28		••••	••	
	Load Management/ Shedding			••••	••	
	WAGES				•••	
	Advanced Reliability Services					
	Auto Throw Over (ATO)	see Engineering, Maintenance, and Training Services, page 4-28		••••	••	see Engineering, Maintenance, and Training Services, page 4-28
	Emergency Power Supply System Test Reporting				••••	
	Sequence of Events Recording (1ms time/ stamp)			••••	•••	
	GPS Time Stamping			••••	•••	
	Power System Control			••••	•	
	Network Protection			••••	••	
	Consulting Services					
	System Studies (SC/TCC/ Arc Flash)	see Engineering, Maintenance, and Training Services, page 4-28				
	Power System Assessments					

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



- Manage power quality, availability, and reliability
- Optimize use of your electrical and infrastructure assets
- Drive energy efficiency initiatives and improve financial performance



Modular Design:
Power Monitoring Expert also features many application modules that add specific functionality to extend the base platform. Available modules include

- Energy Analysis
- UPS Performance
- Breaker Performance
- Energy Cost Allocation & Billing
- Automated Generator Testing

EcoStruxure™ Power Monitoring Expert Software

EcoStruxure Power Monitoring Expert

EcoStruxure™ Power Monitoring Expert is an integrated power and energy management software platform that enables you to optimize your power distribution infrastructure, maximize operational efficiency, and improve your bottom-line performance. This complete, interoperable, and scalable solution will help you

- Maximize facility uptime and reliability
- Analyze and mitigate power quality related issues
- Track and optimize equipment performance
- Analyze energy consumption, uncover savings opportunities and accurately allocate energy related costs
- Enable compliance with power quality and energy standards such as ANSI/IEEE and ISO50001

Typical Applications

- Monitor the facility electrical network to verify reliable operation and proactively optimize performance
- Maximize facility uptime by improving response to power-related events and restore operations quickly
- Perform root cause analysis to power-related disturbances through sequence of events reporting
- Analyze and isolate the source of power quality problems
- Analyze total energy use from all electrical and piped utilities identify waste and reduce cost
- Improve sustainability performance with greenhouse gas emissions tracking and industry compliance reporting
- Identify billing discrepancies and avoid contract penalties by validating utility bills to verify accuracy
- Allocate energy costs to departments to drive accountability, awareness and support energy action programs like ISO50001
- Reduce peak demand and power factor penalties with monitoring, alerts, and corrective actions
- Negotiate rates with energy suppliers and enable participation in demand response programs
- Confirm return on investment for infrastructure improvements with advanced reporting and analysis
- Optimize existing infrastructure capacity and avoid over-building
- Prolong asset life with proactive maintenance and optimization

Functional Components:

- Power quality analytics
  - Monitor events and waveform plotting system-wide
  - Monitor harmonics, K-factor, crest factor, symmetrical components
  - Diagnose and isolate PQ problems to increase reliability
  - Automatically detect and report on voltage disturbances
  - Quickly evaluate PQ events plotted on standard ITIC curve
- Customized real-time monitoring
  - Access real-time status of sensitive power distribution components
  - Trend chart tools with customized views to reveal patterns and anomalies quickly
- Data analytics and visualization
  - Smart dashboards with configurable presentation widgets and kiosk options
  - Powerful graphics templates and libraries
  - Automated power quality reports and waveform analysis tools
  - Comprehensive templates for energy and power reporting, with flexible report distribution options
- Alarm and event management
  - Powerful alarm triggering, notification, and analysis tools
  - Accurate time-stamped sequence of events reporting for power system event root cause analyses
- Robust technical infrastructure
  - Solid data acquisition architecture including ready-to-use communications drivers with many electrical distribution devices
  - Fully compatible with current operating systems and databases
  - Interoperable with integration to other systems and devices through open data and protocol standards (ODBC, OPC, XML, Modbus, Web/SOAP Services)
  - Scalable to thousands of metered points through flexible deployment options

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Table 4.1: Power Monitoring Expert Plan Features

Package features	Advanced	Advanced+
This table identifies the two plan levels and what features would be included or can be added.		
Core		
Energy monitoring and analysis	●	●
Capacity management	●	●
Electrical distribution monitoring and alarming	●	●
Thermal and arc flash monitoring	●	●
Power quality monitoring	●	●
Access to latest software releases and updates	●	●
Customer success management	●	●
Energy efficiency		
Cost allocation and utility bill verification	●	●
Energy efficiency compliance	●	●
Energy benchmarking	●	●
Energy modeling and verification		●
Power reliability		
Power quality analysis and compliance	●	●
Power events analysis	●	●
Asset performance		●
Connectivity		
Protocols to integrate with connected products	●	●
Protocols to integrate with 3rd party systems	●	●
Extended connectivity to 3rd party systems		●
Add-on		
Insulation monitoring	o	o
Backup power testing	o	o
# of connected devices	Incremental of 10 devices	

Note:
● Included feature
o Optional feature



EcoStruxure™ Power Operation

- Increase uptime of power systems
- Provides accurate and actionable information in real time
- Highlights issues, remediation, and their impacts

EcoStruxure™ Power Operation (EPO) is electrical distribution network monitoring and control software that provides vital tools to enhance your power system reliability and operational efficiency. Its powerful architecture combines our proven expertise in electrical distribution with the speed and control of high-performance to reduce outages while increasing power system efficiency. An excellent fit for virtually every industry and application, Power Operation delivers exceptional scalability so that it can grow to match your changing business requirements while driving down the total cost of ownership. Components interact seamlessly across Schneider Electric's extensive product portfolio and third party suppliers.

- Dynamic electrical network view to improve production, reduce costs and boost safety
- Highly reliable monitoring and control tailored to unique electrical network needs
- Detailed electrical information across the multi-vendor network
- Fast issue resolution and reporting to improve electrical network quality and energy use
- Report KPIs, energy costs, and filtered alarming
- Real-time visualization of the network
- Disturbance waveform views for analysis and control for remediation

For quoting and pricing, please contact PowerLogic™ Sales at 615-287-3535.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Power Quality Meter Selection

Features *[1]*	ION9000	ION9000T	ION8650			ION7400	PM8000
			A	B	C		
Inputs, outputs and control power							
3-phase / single-phase	• / •	• / •	• / •	• / •	• / •	• / •	• / •
Digital in and out / analog in and out	46 / 24	46 / 24	16 / 4	16 / 4	16 / 4	36/24	36/24
Power supply options	AC / -	AC / -	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC
Power and energy measurements							
Voltage, current, frequency, power factor	•	•	•	•	•	•	•
Power / Demand	•	•	• / •	• / •	• / •	• / •	• / •
Energy / time-of-use (energy per shift)	• / •	• / •	• / •	• / •	• / •	• / •	• / •
IEC / ANSI energy accuracy class (% of reading)	0.1	0.1	0.2(1)	0.2(1)	0.2(1)	0.2	0.2
Loss compensation	•	•	•	•	•	•	-
Power quality analysis							
EN50160 compliance reporting / IEC 61000-4-30 Class A or S	• / A	• / A	• / A	• / S	- / -	• / A*[2]*	• / S
Flicker measurement	•	•	•	•	-	•*[3]*	-
Transient detection duration	20 µs	100 ns	17 µs	-	-	-	-
Sag and swell monitoring / disturbance direction detection	• / •	• / •	• / -	• / -	• / -	• / •*[4]*	• / •
Harmonic distortion: total/ individual / inter	• / • / •	• / • / •	• / • / •	• / • / -	• / • / -	• / • / -	• / • / -
Waveform capture	•	•	•	-	-	•	•
Rapid Voltage Change	•	•	-	-	-	•	•
On-board data and event logging							
Trending / forecasting / billing	• / • / •	• / • / •	• / - / •	• / - / •	• / - / •	• / • / •	• / • / •
Minimum and maximum	• / •	• / •	•	•	•	•	•
Events and alarms with timestamps	•	•	•	•	•	•	•
Timestamp resolution (seconds)	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Time sync: Network / GPS / IRIG-B / DCF77-B / PTP	• / • / • / • / •	• / • / • / • / •	• / • / • / - / -	• / • / • / - / -	• / • / • / - / -	• / • / • / - / -	• / • / • / - / -
Setpoints, alarms and control							
Log alarm conditions / call out on alarm	• / •	• / •	• / •	• / •	• / •	• / •	• / •
Trigger data logging / waveform capture	• / •	• / •	• / •	• / -	• / -	• / •	• / •
Trigger relay or digital output	•	•	•	•	•	•	•
Special features							
Custom programming	•	•	•	•	•	•	•
Downloadable firmware	•	•	•	•	•	•	•
Communications							
Ports:							
Ethernet: Copper / Fiber	2 / 1	2 / 1	• / •	• / •	• / •	2 / 1	2 / 1
Ethernet-to-serial gateway	•	•	•	•	•	•	•
Telephone modem	-	-	•	•	•	-	-
Modem-to-serial gateway	-	-	•	•	•	-	-
Verizon 4G LTE Cellular Modem*[5]*	-	-	•	•	•	-	-
Infrared port	•	•	•	• / •	• / •	•	-
RS485/RS232	• / -	• / -	• / •	• / •	• / •	• / -	• / -
Misc: Web server / Email / SNMP / XML	• / • / • / •	• / • / • / •	• / • / - / •	• / • / - / •	• / • / - / •	• / • / • / •	• / • / • / •
Protocols: Modbus / DNP / MV-90 / DLMS	• / • / • / -	• / • / • / -	• / • / • / -	• / • / • / -	• / • / • / -	• / • / • / -	• / • / • / -
Protocols: IEC61850 / Jbus / M-Bus / LON / BACnet	• / - / - / - / -	• / - / - / - / -	• / - / - / - / -	• / - / - / - / -	• / - / - / - / -	• / - / - / - / -	• / - / - / - / -

NOTE:

1. The ION8650 is two times more accurate than the 0.2 IEC/ANSI accuracy classes according to the same conditions used to specify the 0.2 accuracy class.
2. ION8800, ION8650, ION8600, PM8000 also offer Modbus Master capabilities.

[1] Specifications represent maximum capabilities with all options installed. Some options are not available concurrently. This is not a complete feature list, please refer to detailed product specifications.
[2] Advanced Variant is Class A and Standard Variant is Class S.
[3] Flicker not available on Essential Variant.
[4] Disturbance Direction Detection not available on Essential Variant.
[5] Only available on socket meter versions.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



ION9000 Series Advanced Power Quality Meters

Web enabled PowerLogic™ ION9000 series meters are used to monitor electric distribution networks, service entrances and substations. It enables businesses to manage complex energy supply contracts that include power quality guarantees. Low-range current accuracy makes it ideal for independent power producers and cogeneration applications that require the accurate bi-directional measurement of energy. It is well suited to load curtailment, equipment monitoring and control and energy pulsing and totalization applications. Integrate it with Power Management Software applications. The ION9000T captures extremely fast voltage events that are missed by most other power meters, enabling advanced diagnostics and high-resolution event associations for fast, conclusive diagnosis and resolution to transient voltages.

ION9000 Power and Energy Meter Features

- PQ compliance reporting and basic PQ analysis:
  - Monitors and logs parameters in support of international PQ standards
    - IEC 61000-4-30 Class A (test methods as per IEC 62586-2)
  - High resolution waveform capture: triggered manually or by alarm. Captured waveforms available directly from the meter via FTP in a COMTRADE format, and viewable in the meter's web interface.
  - Generates PQ compliance reports accessible via onboard web pages
- Harmonic analysis:
  - THD and TDD per phase, min/max, custom alarming
  - Individual harmonic magnitudes and angles on voltage and current, up to the 63rd harmonic
- Disturbance detection and capture: sag/swell on any current and voltage channel, alarm on disturbance event, waveform capture with per-event information
- Patented disturbance direction detection: provides indication of the captured disturbance occurring upstream or downstream of the meter; timestamped results provided in the event log, with degree of certainty of disturbance direction
- Transient capture of events 20 microseconds or longer in duration on any voltage channel with waveform capture and per-event information
- PowerLogic ION9000T provides high-speed transient capture (HSTC) of voltage events 100 nanoseconds or longer in duration and up to 10,000 V in magnitude on voltage channels and with an alarm on the event, the ION9000T provides high-speed and disturbance waveform captures, as well as per-event statistics on each transient.
- Metering precision:
  - IEC 61557-12 PMD/SD/K70/0.2 and PMD/SS/K70/0.2 3000m (performance measuring and monitoring devices (PMD))
  - Class 0.1S accuracy IEC 62053-22, ANSI C12.20 Class 0.1 (active energy)
  - Industry leading Class 0.5S accuracy for reactive energy (IEC 62053-24)
  - Cycle-by-cycle RMS measurements updated every cycle
  - Full 'multi-utility' WAGES metering support
  - Net metering
  - Anti-tamper protection seals and hardware metrology lock
- Cybersecurity:
  - Security events logging with Syslog protocol support
  - HTTPS secure protocol
  - Ability to enable or disable any communication port and any protocol per port
  - Anti-tamper protection seals and hardware metrology lock
  - User accounts with strong passwords
    Used with Schneider Electric's advanced software tools, provides detailed PQ reporting across entire network:
  - EN 50160 compliance report
  - IEEE 519 harmonic compliance report
  - IEC 61000-4-30 report
  - Power quality compliance summary
    Energy reports for consumption analysis and cost management
  - WAGES dashboards and reports
    Display of waveforms and PQ data from all connected meters
  - Onboard web-based waveform viewer
  - EcoStruxure™ Power Events Analysis, including alarm management, sequency of events, and root cause analysis
- Data and event logging:
  - Onboard data and event logging
  - 2 GB of standard non-volatile memory
  - No data gaps due to network outages or server downtime
  - Min/max log for standard values
  - 100 user-definable data logs, recording up to 16 parameters on a cycle-bycycle or other user definable interval
  - Continuous logging or snapshot, triggered by setpoint and stopped after defined duration

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

  - Trend energy, demand and other measured parameters
  - Forecasting via web pages: average, minimum and maximum for the next four hours and next four days
  - Advanced time-of-use capability
  - Security/event log: alarm conditions, metering configuration changes, power outages, firmware download, and user login/logout all timestamped to ±1 millisecond
- Alarming and control:
  - 50+ definable alarms to log critical event data, trigger waveform recording, or perform control function
  - Trigger on any condition, with 1/2-cycle and 1-second response time
  - Combine alarms using Boolean logic enabling customization of alarms
  - Alarm notification via email
  - In conjunction with Schneider Electric's EcoStruxure software, alarms, software alarms, and alarm frequency are categorized and trended enabling sequence of events and root cause analyses

Table 4.2: Typical PowerLogic ION9000 Power and Energy Meter Ordering Configurations

Description*[6]*	Catalog Number
ION9000 meter, DIN mount, no display, HW kit	METSEION92030 METSEION92030-US*[7]*
ION9000 meter, DIN mount, 192 mm display, B2B adapter, HW kit	METSEION92040 METSEION92040-US*[7]*
ION9000 meter, LVDC control power, DIN mount, no display, HW kit	METSEION92130 METSEION92130-US*[7]*
ION9000 meter, LVDC control power, DIN mount, 192mm display, B2B adapter, HW kit	METSEION92140 METSEION92140-US*[7]*
ION9000 meter, low voltage current sensor inputs, DIN mount, no display, HW kit	METSEION93030
ION9000 Meter, low voltage current sensor inputs, DIN mount, 192mm display, B2B adapter, HW kit	METSEION93040
ION9000 meter, low voltage current sensor inputs, LVDC control power, DIN mount, no display, HW kit	METSEION93130
ION9000 meter, low voltage current sensor inputs, LVDC control power, DIN mount, 192mm display, B2B adapter, HW kit	METSEION93140
ION9000 meter, high-speed transient capture, DIN mount, no display, HW kit	METSEION95030 METSEION95030-US*[7]*
ION9000 meter, high-speed transient capture, DIN mount, 192 mm display, B2B adapter, HW kit	METSEION95040 METSEION95040-US*[7]*
Remote display, color LCD, 96 x 96 mm	METSEPM89RD96
Remote display, color touchscreen, 192 x 192 mm	METSERD192
I/O module, 2 relay outputs, 6 digital inputs	METSEPM89M2600
I/O module, 2 analog outputs, 4 analog inputs	METSEPM89M0024
ION9000 meter hardware kit – plugs, terminal guards, spare grounding screw, DIN clips	METSE9HWK
ION9000 meter hardware kit for low voltage current sensor models	METSE9HWKLVCS
RD192 remote display hardware kit	METSERD192HWK
ION9000 B2B adapter	METSE9B2BMA
ION9000 USB cover hardware kit	METSE9USBK
ION9000 Current Input hardware kit – terminal screws, CT covers	METSE9CTHWK
Battery replacement kit – ION7400/ION9000/PM8000	METSEPMBATK
ION7x50 Mounting Adapter Kit	METSE7X4MAK

[6] NOTE: Contact your local Schneider Electric representative for complete ordering information.

[7] Catalog numbers ending in "-US" are Buy American Act (BAA) compliant. Schneider Electric is committed to supporting growth in America. We offer thousands of American-made products and solutions for energy management and industrial automation to power smart industries and intelligent buildings, future-proof data centers, and build intuitive homes. To learn more, refer to https://www.se.com/us/en/schneider-in-america/.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026





ION8650 Power and Energy Meters

The web-enabled PowerLogic™ ION8650 is used to monitor electric distribution networks, service entrances and substations. It enables businesses to manage complex energy supply contracts that include power quality guarantees. Low-range current accuracy makes it ideal for independent power producers and cogeneration applications that require the accurate bi-directional measurement of energy. It is well suited to load curtailment, equipment monitoring and control and energy pulsing and totalization applications. Integrate it with Power Management Software applications to get the most out of the meter's capabilities and data produced.

Applications

- Revenue metering
- Cogeneration and IPP monitoring
- Power Quality Compliance monitoring
- Power quality analysis
- Demand and power factor control
- Load curtailment
- Equipment monitoring and control
- Energy pulsing and totalization
- Instrument transformer correction
- Outage Notification

ION8650 Power and Energy Meter Features

- **Feature set C includes:**
  - 9S, 35S, 36S socket and switchboard cases
  - True RMS 3-phase voltage, current, power and meets stringent ANSI revenue metering standards including ANSI C12.20 0.2 and Class 2, 10, & 20
  - Power quality: sag/swell, individual, even, odd, total harmonics to the 31st and symmetrical components
  - 32 Mb log/event memory, min/max for any parameter, historical logs up to 80 channels, timestamp resolution to 0.001 seconds and GPS time synchronization
  - Transformer/line loss compensation and Instrument transformer correction
  - Communications: Ethernet, Serial, Modem, Internet and Ethernet to serial gateway and ION, DNP 3.0, Modbus RTU, Modbus TCP, MV-90 protocols, IEC 61850
  - C model limited to IR + 2 other ports at one time. Ports can be enabled/disabled by user
  - Dial-out capability when memory is near full
  - Multi-user, multi-level security with control and customized access to sensitive data for up to 50 users
  - Data push capability through SMTP (email)
  - 65 setpoints — math, logic, trig, log, linearization formulas
  - Password protection and anti-tamper seal protection
  - Built-in I/O: 4 KYZ digital outs and 3 form A digital ins, 4 KYZ digital outs and 1 form A digital out and 1 form A digital in, an optional external I/O expander provides additional I/O
  - Optional Outage Notification Card for JSON outage notification message over ethernet
- **Feature set B adds the following to feature set C:**
  - Harmonics—individual, total even, total odd up to the 63rd
  - 64 Mb standard memory
  - Historical logs up to 320 channels
  - Modbus RTU Master on serial ports
  - Cycle setpoint minimum response time
- **Feature set A adds the following to feature sets C and B:**
  - Waveform capture up to 1024 samples/cycle, PQ compliance monitoring, flicker to EN50160 Ed2, IEC 61000-4-7/4-15 (also configurable to IEEE519 2014, IEEE159, SEMI) CBEMA/ITIC
  - Transient detection to 17µs at 60 Hz
  - Harmonics: magnitude, phase and inter-harmonics to the 50th
  - 128 Mb standard memory
  - Max 96 cycles of waveform logs and 800 channels of historical logs

Table 4.3: Typical PowerLogic ION8650 Power and Energy Meter Ordering Configurations

Description	Catalog Number
ION8650, feature set A, 9S socket base, 5 A nominal current inputs, 10 MB memory, 127–177 Vac, 60 Hz, communications card with: 10BaseT, RS-232/485, RS-485, Optical port, 4 Digital Outputs, 3 Digital Inputs	S8650A0C0E6E1B0A
ION 8650; feature set A, 9S socket base, 5 A nominal current inputs, 128 MB memory, 120-277 VAC, 60 Hz, comms card with: 10/100BaseT, RS-232/485 port, RS-485, 56k internal modem (RJ11), Infrared Optical Port; No I/O, Password Protected, no security lock	S8650A0C0E6C7A0A
ION 8650; feature set C, 9S socket base, 5 A nominal current inputs, 32 MB memory, 120-277 VAC, 60 Hz, comms card with 10/100BaseT, RS-232/485 port, RS-485 port, Infrared Optical Port, No I/O, Password Protected, no security lock	S8650C0C0H6E1A0A

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Table 4.4: ION8650 Order Codes/Descriptions

Brand	Model	Feature Set	Form Factor	Current Inputs	Voltage Inputs	Power Supply	System Freq	Comm	I/O	Security	Special Order	AA Code
S	8650				C	0					A	-AAxxx
ION8650		**Order Code**		**Description**								
Brand		S		Schneider branded								
Model		8650		ION8650 advanced revenue meter with Class 0.1 accuracy + IRIG-B								
Feature Set		A		128MB Memory Class A power quality analysis, waveforms and transient capture with 1024 samples/cycle.								
		B		64MB memory, energy meter Class S EN50160 power quality monitoring.								
		C		32MB memory, basic tariff/energy metering (4 data recorders, 64 channels).								
Form Factor		0		Form 9/29/36S Base - 57-277 VLN (autoranging) 3-Element, 4-Wire / 2 1/2-Element, 4-Wire								
		1		Form 35S Base - 120-480 VLL (autoranging) 2-Element, 3-Wire								
		4		Form 9/29/35/36S FT21 Switchboard (meter + case) with break out panel								
		7		Form 9/29/35/36S FT21 Switchboard (meter + case) with break out cable								
Current Inputs		C		1, 2 or 5 Amp nominal, 20 Amp full scale current input (24 Amp fault capture, start at 0.001A)								
Voltage Inputs		0		Standard (see Form Factor above)								
Power Supply		E		Form 9S, 36S (socket) and Form 9,36 (FT21 switchboard): 120-277 Vac. Form 35S (socket) and Form 35 (FT21 switchboard): 120-480 Vac. Powered from the meter's voltage connections.								
		H		Auxiliary Power Pigtail: 65-120 Vac, 80-160 Vdc (power from external source), North American Plug Style								
		J		Auxiliary Power Pigtail: 160-277 Vac, 200-350 Vdc (power from external source), North American Plug Style								
System Frequency		5		50 Hz								
		6		60 Hz								
Communications*[8]*		C7		Ethernet (10/100BASE-T), 56k universal internal modem (RJ11), RS-232/485 port, RS-485 port, Infrared Optical port								
		E1		Ethernet (10/100BASE-T), RS-232/485 port, RS-485 port, Infrared Optical port								
		F1		Ethernet (100BASE-FX multi-mode) with male ST connectors, RS-232/485 port, RS-485 port, Infrared Optical port (available on socket meters only, Forms 0 & 1 above. I/O card not available if this option is ordered.)								
		S1		Ethernet (10/100-BASE-T), Verizon 4G cell modem - SIM CARD OPTION, RS 232/485 port, RS 485 port, Infrared optical port								
Input/Output Option		A		None								
		B		4 Form C Digital Outputs, 3 Digital Inputs (not available with Communications option F1)								
		C		4 Form C Digital Outputs, 1 Form A Digital Output, 1 Digital Input								
		D		Ride-Through Module for JSON outage notification message over Ethernet. (only available with comms option E1, C7 & S1)								
Security		0		Password protected, no security lock								
		1		Password protected with security lock enabled								
		7		Password protected, no security lock (available in US only)								
		8		Password protected with security lock enabled (available in US only)								
Special Order Options		A		None								

[8] In addition to Infrared Optical port Feature Set C can use any two ports (configurable).

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



PowerLogic ION7400

PowerLogic™ ION7400 Utility Feeder Meter

The PowerLogic™ ION7400 utility feeder meter is a highly accurate, extremely reliable power and energy meter with unmatched flexibility and usability. The meter combines accurate 3-phase energy and power measurements with data logging, power quality analysis, alarming and I/O capabilities not typically available in such a compact meter.

The panel or DIN mounted ION7400 meter is flexible enough to fit into a utility's existing billing or SCADA system, providing industry leading cost management (Class 0.2) and network management (Class S and A PQ data). It is compliant with stringent international standards that guarantee their metering accuracy and power quality measurements. Ideal for installations that are responsible for maintaining the operation and profitability of a facility.

Applications and benefits

- Maximize profits by providing the highest output possible with the least amount of risk to availability.
- Optimize availability and reliability of electrical systems and equipment.
- Monitor power quality (PQ) for compliance and to prevent problems.
- Meters fully supported by EcoStruxure Power Monitoring Expert and PowerSCADA Operation Software.

Main Characteristics

- Precision metering
- PQ compliance reporting and basic PQ analysis
- Used with EcoStruxure™ Power Monitoring Expert software, provides detailed PQ reporting across entire network
- Onboard data and event logging
- Alarming and control
- Excellent quality: ISO 9001 and ISO 14000 certified manufacturing.

Table 4.5: PowerLogic ION7400 Meters

Description	Catalog Number		
	Essential	Standard	Advanced
ION7400 Panel mount meter (integrated display with optical port and 2 energy pulse LEDs)	METSEION7400E METSEION7400E-US*[9]*	METSEION7400 METSEION7400-US*[9]*	METSEION7400A METSEION7400A-US *[9]*
ION7400 Panel mount meter (integrated display with optical port and 2 energy pulse LEDs), 20-60 Vdc control power	METSEION7410E METSEION7410E-US*[9]*	METSEION7410 METSEION7410-US*[9]*	METSEION7410A METSEION7410A-US *[9]*
DIN rail mount - utility meter base	METSEION7403E METSEION7403E-US*[9]*	METSEION7403 METSEION7403-US*[9]*	METSEION7403A METSEION7403A-US *[9]*
DIN rail mount - utility meter base with remote display	METSEION7404E	METSEION7404	METSEION7404A
DIN rail mount - utility meter base, 20-60 Vdc control power	METSEION7413E METSEION7413E-US*[9]*	METSEION7413 METSEION7413-US*[9]*	METSEION7413A METSEION7413A-US *[9]*

Table 4.6: PowerLogic ION7400 Accessories

Description	Catalog Number
Remote display, 3 metre cable, mounting hardware for 30 mm hole (nut and centering pin), mounting hardware for DIN96 cutout (92 x 92 mm) adapter plate	METSEPM89RD96
Digital I/O module (6 digital inputs and 2 relay outputs)	METSEPM89M2600
Analog I/O module (4 analog inputs and 2 analog outputs)	METSEPM89M0024
Display Cable, 10 m	METSECAB10
4–Wire RS 485 option module	METSEPMRS4854W
Fiber-Ethernet option module	METSEPMFIBER
Sealing kit	METSEPM8000SK

[9] Catalog numbers ending in "-US" are Buy American Act (BAA) compliant. Schneider Electric is committed to supporting growth in America. We offer thousands of American-made products and solutions for energy management and industrial automation to power smart industries and intelligent buildings, future-proof data centers, and build intuitive homes. To learn more, refer to https://www.se.com/us/en/schneider-in-america/.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



PowerLogic ION7400 showing active alarms.



PowerLogic ION7400 with harmonics display.



PowerLogic ION7400 with phasor display.

Table 4.7: PowerLogic ION7400 Features

Description		ION7400 Essential	ION7400 Standard	ION7400 Advanced
General				
Use on LV and MV systems		■	■	■
Current accuracy (5A Nominal)		0.1 % reading	0.1 % reading	0.1 % reading
Voltage accuracy (90-690 V AC L-L, 50, 60, 400 Hz)		0.1 % reading	0.1 % reading	0.1 % reading
Active energy accuracy		0.2 Class	0.2 Class	0.2 Class
Reactive energy accuracy		2%	2%	2%
Number of samples/cycle or sample frequency		256*[10]*	256	512
ION programability		■	■	■
Instantaneous rms values				
Current, voltage, frequency		■	■	■
Active, reactive, apparent power	Total and per phase	■	■	■
Power factor	Total and per phase	■	■	■
Current measurement range (autoranging)		0.05 - 10 A	0.05 - 10 A	0.05 - 10 A
Energy values				
Active, reactive, apparent energy		■	■	■
Settable accumulation modes		■	■	■
Demand values				
Current	Present and max. values	■	■	■
Active, reactive, apparent power	Present and max. values	■	■	■
Predicted active, reactive, apparent power		■	■	■
Synchronisation of the measurement window		■	■	■
Setting of calculation mode	Block, sliding	■	■	■
Power quality measurements				
Harmonic distortion	Current and voltage	■	■	■
Individual harmonics	Via front panel and web page	31	63	63
	Via EcoStruxure™ software	—	127	127
Waveform capture		■*[10]*	■	■
Detection of voltage swells and sags		■	■	■
Flicker		—	■	■
Fast acquistion	1/2 cycle data	■	■	■
IEC61000–4–30 Class A/S		—	S	A
EN 50160 compliance checking		—	■	■
IEEE 519 compliance checking		—	■	■
Disturbance Direction Detection		—	■	■
Rapid Voltage Change		—	■	■
Customizable data outputs (using logic and math functions)		■	■	■
Data recording				
Min/max of instantaneous values		■	■	■
Data logs		■	■	■
Event logs		■	■	■
Trending/forecasting		—	■	■
SER (Sequence of event recording)		■	■	■
Time stamping		■	■	■
GPS synchronization (+/- 1 ms)		■	■	■
Data Recorder		10	50	64
Memory Channels		160	800	1024
Storage (in Mbytes)		64	512	512
Display and I/O				
Front panel display 89 mm TFT		■	■	■
Wiring self-test		■	■	■
Pulse output		1	1	1
Digital or analog inputs (max)		27 digital 16 analog	27 digital 16 analog	27 digital 16 analog
Digital or analogue outputs (max, including pulse output)		1 digital 8 relay 8 analog	1 digital 8 relay 8 analog	1 digital 8 relay 8 analog
Communication				
2–Wire RS 485 port		1	1	1
10/100BASE-TX		2	2	2
Serial port (Modbus, ION, DNP3, DLMS/COSEM)		■	■	■
Ethernet port (Modbus/TCP, ION TCP, DNP3 TCP, IEC 61850, DLMS/COSEM*[11]*)		■	■	■
USB port (mini type B)		■	■	■
ANSI C12.19 Optical port		■	■	■
Option module with 4–Wire RS-485 port		■	■	■
Option module with Fiber-Ethernet port		■	■	■
Standards				
ANSI C12.20, CLC/TTR50579, EN 50160, IEC 61000–4–7, IEC 6100–4–15, IEC 61000–4–30, IEC 61010–1, IEC 61326, IEC 61557–12, IEC 61850, IEC 62052–11, IEC 62053–22, IEC 62053–23, IEC 62586, and IEEE 519				

[10] Waveform capture is limited to 128 Samples/cycle recording.
[11] All the communication ports may be used simultaneously.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



PowerLogic PM8000 Advanced Power Quality Meters

These compact meters help ensure the reliability and efficiency of your facility by making the management of power quality, availability, and reliability easy. Measure, understand, and act on insightful power and energy data gathered from your entire system.

The best choice for power management

PM8000 meters combine accurate 3-phase energy and power measurements with data logging, power quality analysis, alarming and I/O capabilities not typically available in such compact meters. Four-metered current inputs allow direct measurement of 3-phase currents and neutral current for enhanced view of harmonics. Dual Ethernet ports support daisy-chaining, removing need for an Ethernet switch inside power equipment, while redundant ring topology provides enhanced availability. Modular, field installable I/O provides expandable scalability. Patented ION technology combines convenient, pre-configured functionality with the ability to customize the meter configuration to meet unique requirements. This embedded capability can save the expense and complexity of additional equipment, both today and tomorrow. Plus, simple installation and networking make energy information quickly accessible, while integration with EcoStruxure™ software and your energy management system make it immediately actionable.

Address power issues before they cause problems

- Monitor harmonics to mitigate excessive heating and premature failure of transformers
- Use trending and alarming to detect fluctuations in current pull of critical equipment to prevent motor failure
- Utilize millisecond time stamping to analyze sequence of events
- Identify root cause by analyzing electrical faults with patented disturbance direction detection
- Identify power quality issues per EN 50160, including frequency inconsistency, voltage fluctuations and unbalance, and harmonic contribution
- Allocate costs for water, air, gas, electricity, and steam (WAGES) across departments, phases of industrial process, or cost centers
- Utilize time-of-use calendar to capture electrical consumption for specific times, including on/off peak and holidays

Table 4.8: PM8000 Power and Energy Meter Catalog Numbers—Meters

Description	Catalog Number
96 x 96 panel mount meter, AC/DC power	METSEPM8140 METSEPM8140-US*[12]*
	METSEPM8240 METSEPM8240-US*[12]*
	METSEPM8340 METSEPM8340-US*[12]*
96 x 96 panel mount meter, LV DC power	METSEPM8110 METSEPM8110-US*[12]*
	METSEPM8210 METSEPM8210-US*[12]*
	METSEPM8310 METSEPM8310-US*[12]*
DIN rail mount meter, AC/DC power	METSEPM8143 METSEPM8143-US*[12]*
	METSEPM8243 METSEPM8243-US*[12]*
	METSEPM8343 METSEPM8343-US*[12]*
DIN rail mount meter, LV DC power	METSEPM8113 METSEPM8113-US*[12]*
	METSEPM8213 METSEPM8213-US*[12]*
	METSEPM8313 METSEPM8313-US*[12]*
DIN rail mount meter with remote display, AC/DC power	METSEPM8144 METSEPM8144-US*[12]*
	METSEPM8244 METSEPM8244-US*[12]*
	METSEPM8344 METSEPM8344-US*[12]*
DIN rail mount meter with remote display, LV DC power	METSEPM8114 METSEPM8114-US*[12]*
	METSEPM8214 METSEPM8214-US*[12]*
	METSEPM8314 METSEPM8314-US*[12]*

Table 4.9: PM8000 Power and Energy Meter Catalog Numbers—Accessories

Description	Catalog Number
Remote Display, Color LCD, 96 x 96	METSEPM89RD96
I/O module, 2 relay outputs, 6 digital inputs	METSEPM89M2600
I/O module, 2 analog outputs, 4 analog inputs	METSEPM89M0024
Display Cable, 10 meters	METSECAB10
Sealing kit	METSEPM8000SK
Mounting adapter kit (ANSI 4")	METSEPMAK
Replacement hardware kit, PM8000 meter	METSEPM8HWK
Replacement hardware kit, PM8000 remote display	METSEPM8RDHWK
4-Wire RS 485 option module	METSEPMRS4854W
Fiber-Ethernet option module	METSEPMFIBER
Sealing kit	METSEPM8000SK

[12] Catalog numbers ending in "-US" are Buy American Act (BAA) compliant. Schneider Electric is committed to supporting growth in America. We offer thousands of American-made products and solutions for energy management and industrial automation to power smart industries and intelligent buildings, future-proof data centers, and build intuitive homes. To learn more, refer to https://www.se.com/us/en/schneider-in-america/.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Table 4.10: PM8000 Series Features

		PM81xx Essential	PM82xx Standard	PM83xx Advanced
General				
Use on LV, MV, and HV systems		■	■	■
Current accuracy (5A Nominal)		0.1 % reading	0.1 % reading	0.1 % reading
Voltage accuracy		0.1 % reading	0.1 % reading	0.1 % reading
Active energy accuracy		0.2 Class	0.2 Class	0.2 Class
Number of samples/cycle or sample frequency		256*[13]*	256	512
ION programability		■	■	■
Instantaneous rms values				
Current, voltage, frequency		■	■	■
Active, reactive, apparent power	Total and per phase	■	■	■
Power factor	Total and per phase	■	■	■
Current measurement range (autoranging)		0.05–10 A	0.05–10 A	0.05–10 A
Energy values				
Active, reactive, apparent energy		■	■	■
Settable accumulation modes		■	■	■
Demand values				
Current	Present and max. values	■	■	■
Active, reactive, apparent power	Present and max. values	■	■	■
Predicted active, reactive, apparent power		■	■	■
Synchronization of the measurement window		■	■	■
Setting of calculation mode	Block, sliding	■	■	■
Power quality measurements				
Harmonic distortion	Current and voltage	■	■	■
Individual harmonics	Via front panel and web page	31	63	63
	Via EcoStruxure software	—	127	127
Waveform capture		■*[13]*	■	■
Detection of voltage swells and sags		■	■	■
Fast acquisition	1/2 cycle data	■	■	■
IEC 61000–4–30 Class A/S		—	S	A
EN 50160 Interharmonic		—	—	■
EN 50160 compliance checking		—	■	■
IEEE 519 compliance checking		—	■	■
Disturbance Direction Detection		—	■	■
Rapid Voltage Change		—	■	■
Customizable data outputs (using logic and math functions)		■	■	■
Data recording				
Min/max of instantaneous values		■	■	■
Event logs		■	■	■
Trending/forecasting		—	■	■
SER (Sequence of event recording)		■	■	■
Time stamping		■	■	■
GPS synchronization (+/- 1 ms)		■	■	■
Data Recorder		10	50	64
Memory Channels		160	800	1024
Storage (in Mbytes)		64	512	512
Display and I/O				
Front panel display		■	■	■
Wiring self-test		■	■	■
Pulse output		1	1	1
Digital or analog inputs (max)		27 digital 16 analog	27 digital 16 analog	27 digital 16 analog
Digital or analog outputs (max, including pulse output)		1 digital 8 relay 8 analog	1 digital 8 relay 8 analog	1 digital 8 relay 8 analog
Communication				
2-Wire RS-485 port		1	1	1
Ethernet ports		2	2	2
Serial port (Modbus, ION, DNP3)		■	■	■
Ethernet port (Modbus/TCP, ION TCP, DNP3 TCP, DHCP, DNS, IPv4, IPv6, IEC 61850)		■	■	■
Ethernet gateway		■	■	■
Alarm notification via email		■	■	■
HTTP/HTTPs web server with waveform viewer		■	■	■
SNMP with custom MIB and traps for alarms		■	■	■
SMTP email		■	■	■
PTP and NTP time synchronization		■	■	■
FTP File transfer		■	■	■
Option module with 4-Wire RS-485 port		■	■	■
Option module with Fiber-Ethernet port		■	■	■

[13] Waveform capture is limited to 128 Samples/cycle recording.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



PM5000 Series Power Meter

Series PM5000 Power Meters

The PowerLogic™ PM5000 series power meters are the new benchmark in affordable, precision metering. It is the ideal fit for high-end cost management applications, providing measurement capabilities needed to allocate energy usage, perform tenant metering and sub-billing, pin-point energy savings, optimize equipment efficiency and utilization, and perform a high level assessment of the power quality in electrical networks.

All meters provide Modbus serial communications. PM5500 level meters are also capable of simultaneous ModBus TCP and BTL-certified BACnet IP communications over Ethernet.

- Panel instrumentation (OEMs)
- Sub-billing and cost allocation
- Remote monitoring of an electrical installation
- Harmonic monitoring (THD)

Table 4.11: Series PM5000 Power Meters

Description	Catalog No.
Power Meter, Class 0.5 Serial Port	METSEPM5110
Meter, Class 0.5 Alarms TOU Serial Port	METSEPM5330
Power Meter, Class 0.5 Alarms TOU Ethernet Port	METSEPM5340
Power Meter Class 0.2 Serial Port and Dual Ethernet	METSEPM5560
Power Meter without Display Class 0.2 Serial Port and Dual Ethernet	METSEPM5563
Power Meter Class 0.2 Serial Port and Dual Ethernet, LVDC Control Power	METSEPM5580
Power Meter Class 0.2 Serial Port and Dual Ethernet, Waveform Capture, Sag/ Swell	METSEPM5650
Remote Display for METSEPM5563	METSEPM5RD
Power Meter with Remote Display Class 0.2 Serial Port and Dual Ethernet	METSEPM5563RD*[14]*

Series PM2000 Power Meters

The PM2000 series meter is a next-generation energy and power meter that offers all the measurement capabilities required to monitor an electrical installation in a single 96 x 96 mm unit. The PM2000 series offers simplicity and reliability for basic energy cost and network management applications at a value price. PM2000 meters are available in LED and LCD display variants:

- LED display type (PM2100 series): Intuitive navigation with self- guided, three buttons, bright red color LEDs of 14.2 mm height. Two columns of LEDs indicate the parameter name chosen for display.
- LCD display type (PM2200 series): Monochrome graphical LCD of 128 x 128 resolution lets users read all three phase values simultaneously. The bright display enables easy reading even in extreme lighting conditions and viewing angles with intuitive menus, multi-language text, icons and graphics.

PM2130 and PM2230 meter models have provisions to attach one input/output expansion module. Choose from: two digital inputs, two digital outputs; two analog inputs, two analog outputs; or two digital inputs, two relay outputs.



PM2100 Series LED Display Meter



PM2200 Series LCD Display Meter

Table 4.12: PM2000 Series Power Meters and Options

Description	Catalog Number
Meters	
PM2110, THD, LED display, Energy pulse output, Class 1	METSEPM2110
PM2120, 15th Harmonic, LED display, Modbus RS485, Class 1	METSEPM2120
PM2130, 31st Harmonic, LED display, Modbus RS485, Class 0.5S	METSEPM2130
PM2110, THD, LCD display, Energy pulse, Class 1	METSEPM2210
PM2220, 15th Harmonic, LCD display, Modbus RS485, Class 1	METSEPM2220
PM2230, 31st Harmonic, LCD display, Modbus RS485, Class 0.5S	METSEPM2230
Optional Input/Output Modules	
PM2X30 I/O Module - 2 Digital In, 2 Digital Out	METSEPM2KDGTLIO22
PM2X30 I/O Module - 2 Analog In, 2 Analog Out	METSEPM2KANLGIO22
PM2X30 I/O Module - 2 Digital In, 2 Relay Out	METSEPM2K2DI2RO

[14] METSEPM5563RD includes both METSEPM5563 and METSEPM5RD.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



EM3500 Series
Energy and Power Meter

PowerLogic™ EM3500 Power and Energy Meters

The EM3500 series Energy and Power Meter combines exceptional performance and easy installation to deliver a cost-effective solution for power monitoring applications. The EM3500 series can be installed on standard DIN rail or surface mounted, and has bi-directional monitoring designed expressly for renewable energy applications.

- Pulse output and phase alarms
- Data logging capability in some models
- Modbus and BACnet output options

Table 4.13: Series EM3500 Energy and Power Meters

Description	Catalog Number
Power Meter, DIN-rail, Pulse Output Only, for LVCTs	METSEEM3502
Power Meter, DIN-rail Pulse Output Only, for METSECTR Rope CTs	METSEEM3502A
Power Meter, DIN-rail Modbus Output for LVCTs	METSEEM3550
Power Meter, DIN-rail, Modbus Output, for METSECTR Rope CTs	METSEEM3550A
Power Meter, DIN-rail Modbus Output, Bi-Directional, Logging for LVCTs	METSEEM3555
Power Meter, DIN-rail Modbus Output, Bi-Directional, Logging for METSECTR Rope CTs	METSEEM3555A
Power Meter, DIN-rail, BACnet Output, Logging for LVCTs	METSEEM3560
Power Meter, DIN-rail, BACnet Output, Logging for METSECTR Rope CTs	METSEEM3560A
Power Meter, DIN-rail, BACnet Output, for LVCTs	METSEEM3561
Power Meter, DIN-rail, BACnet Output, for METSECTR Rope CTs	METSEEM3561A

METSECTR Series Rope-Style Current Transformers

The METSECTR series works with the EM3500A, EM4236, and iEM35xx series power and energy meters. These meters have a built in power supply and integrator, so CT connection is fast and simple. The coil opens at the connector junction for fast and easy installation onto an existing cable or bus-bar. The flexible core makes it easy to fit in tight enclosure.

- Agency Approvals cURus, ANSI/IEEE 57.13, CE, RoHS
- Accuracy ±1% from 50 A to 5000 A
- Insulation up to 600 Vac

Table 4.14: METSECTR Series Rope-Style Current Transformers

Description	Catalog Number
Rogowski CT, 300 mm (12”), 600 Vac, 1 kA, U018 equivalent	METSECTR25500U
Rogowski CT, 300 mm (12”), 600 Vac, 2 kA, U018 equivalent	METSECTR30500U
Rogowski CT, 460 mm (18”), 600 Vac, 5 kA, U018 equivalent	METSECTR46500U
Rogowski CT, 600 mm (24”), 600 Vac, 5 kA, U018 equivalent	METSECTR60500U
Rogowski CT, 900 mm (35”), 600 Vac, 5 kA, U018 equivalent	METSECTR90500U

LVCT Series Current Transformers

For retrofit or greenfield, this range of current sensors includes split-core, solid-core, and Rogowski coils, with secondary output of 5 Amperes or 0.333V proportional to primary current for reliable metering.

- UL2808 compliant
- Solid core accuracy ±0.5 of reading from 5% to 120% of rated current
- Split core accuracy 1% from 10% to 100% of rated current
- Leads 22 AWG, 600 Vac, UL 1015 bonded pair, 6 ft. (1.8 m) standard length

Table 4.15: LVCT Series Current Transformers

Description	Catalog Number
Split core	
Low-Voltage CT, Split Core, 50 A, 0.333 V output, 10 mm diameter, 6 ft. lead	METSECTLV1005U
Low-Voltage CT, Split Core, 100 A, 0.333 V output, 16 mm diameter, 6 ft. lead	METSECTLV1010U
Low-Voltage CT, Split Core, 200 A, 0.333 V output, 32 mm diameter, 6 ft. lead,	METSECTLV1020U
Low-Voltage CT, Split Core, 100 A, 0.333 V output, 8 ft. lead	METSECTLV2010U
Low-Voltage CT, Split Core, 200 A, 0.333 V output, 8 ft. lead	METSECTLV2020U
Low-Voltage CT, Split Core, 300 A, 0.333 V output, 8 ft. lead	METSECTLV2030U
Low-Voltage CT, Split Core, 400 A, 0.333 V output, 8 ft. lead	METSECTLV2040U
Low-Voltage CT, Split Core, 600 A, 0.333 V output, 8 ft. lead	METSECTLV3060U
Low-Voltage CT, Split Core, 800 A, 0.333 V output, 8 ft. lead	METSECTLV3080U
Low-Voltage CT, Split Core, 800 A, 0.333 V output, 8 ft. lead	METSECTLV4080U
Low-Voltage CT, Split Core, 1000 A, 0.333 V output, 8 ft. lead	METSECTLV4100U
Low-Voltage CT, Split Core, 1200 A, 0.333 V output, 8 ft. lead	METSECTLV4120U
Low-Voltage CT, Split Core, 1600 A, 0.333 V output, 8 ft.	METSECTLV4160U
Low-Voltage CT, Split Core, 2000 A, 0.333 V output, 8 ft. lead	METSECTLV4200U
Low-Voltage CT, Split Core, 2400 A, 0.333 V output, 8 ft. lead	METSECTLV4240U
Low Voltage CT, Split Core, 200 A, 5A output, 8 ft. lead	METSECTSP5A2020U
Low Voltage CT, Split Core, 300 A, 5A output, 8 ft. lead	METSECTSP5A2030U
Low Voltage CT, Split Core, 400 A, 5A output, 8 ft. lead	METSECTSP5A2040U
Low Voltage CT, Split Core, 600 A, 5A output, 8 ft. lead	METSECTSP5A3080U
Low Voltage CT, Split Core, Size 3, 800 A, 5A output, 8 ft. lead	METSECTSP5A3080U
Low Voltage CT, Split Core, Size 4, 800 A, 5A output, 8 ft. lead	METSECTSP5A4080U
Low Voltage CT, Split Core, 1200 A, 5A output, 8 ft. lead	METSECTSP5A4120U
Low Voltage CT, Split Core, 1600 A, 5A output, 8 ft. lead	METSECTSP5A4160U
Low Voltage CT, Split Core, 2000 A, 5A output, 8 ft. lead	METSECTSP5A4200U
Low Voltage CT, Split Core, 2400 A, 5A output, 8 ft. lead	METSECTSP5A4240U
Solid core	

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Table 4.15 LVCT Series Current Transformers (cont'd.)

Description	Catalog Number
Low-Voltage CT, Solid Core, 50 A, 0.333 V output, 10 mm diameter, 6 ft. lead	METSECTLV10005U
Low-Voltage CT, Solid Core, 100 A, 0.333 V output, 10 mm diameter, 6 ft. lead	METSECTLV10010U
Low-Voltage CT, Solid Core, 200 A, 0.333 V output, 25 mm diameter, 6 ft. lead	METSECTLV25020U
Low-Voltage CT, Solid Core, 400 A, 0.333 V output, 31 mm diameter, 6 ft. lead	METSECTLV31040U

PowerLogic™ EM3570 Power and Energy Meters

The PowerLogic™ EM3570 series energy meters with Ethernet are the new benchmark for affordable and precision metering applications.

Designed for use in both energy management systems and building management systems, the PowerLogic™ EM3570 series DIN rail meters provide the measurement capabilities needed to allocate energy usage, perform sub-billing, pin-point energy savings, optimize equipment efficiency and utilization, and perform a basic assessment of the power quality of the electrical network.

Engineered on the trusted PowerLogic platform, Ethernet-enabled EM3570 DIN rail meters are designed to install easily and integrate seamlessly with existing BACnet/IP and Modbus TCP/IP networks common in today's building and power management systems. With wide range CT compatibility, high reliability, IEC 61557-12 and UL2808 compliance, as well as ASHRAE 90.1 for power and energy logging capability, EM3570 meters support the energy efficiency designs of most buildings and are ideally suited for energy cost management applications.



EM3570 Series Meter
with power supply module

Application:

Cost Management

- Energy monitoring in building automation systems
- Renewable energy
- Energy management
- Commercial sub-metering
- Industrial monitoring
- Cost allocation

Network Management

- Track real-time power conditions
- Monitor control functions
- Provide basic power quality values
- Extended data log feature support up to 3 years
- Analyze equipment and network status
- BACnet/IP and Ethernet TCP/IP protocol support

Table 4.16: EM3570 Series Features

Features	EM3570 Range			
	METSEEM3570	METSEEM3570A	METSEEM3570X	METSEEM3570AX
Current Input				
0.333V or 1.0V LVCT	•		•	
Rogowski coil		•		•
Accuracy				
Class	CL 0.5S	CL 0.5S	CL 0.5S	CL 0.5S
Display				
Backlit LCD, multilingual, 4 lines, 4 concurrent values	•	•	•	•
Power and energy metering				
3-ph voltage, current, power, demand, energy, frequency, power factor	•	•	•	•
Multi-tariff	4	4	4	4
Input\Output and Relays				
Digital inputs	2	2	2	2
Relay output	1	1	1	1
Alarms and Control				
Alarms	17	17	17	17
Set point response time, seconds	1	1	1	1
Single and multi-condition alarms	•	•	•	•
Memory for data logging	2 GB	2 GB	2 GB	2 GB
Communications				
Ethernet port with Modbus TCP protocol	•	•	•	•
BACnet/IP protocol	•	•	•	•
Onboard web server with web pages	•	•	•	•

Table 4.17: EM3570 Series Meters

Description	Catalog Number
DIN Ethernet power meter, LVCT input with external power supply module	METSEEM3570
DIN Ethernet power meter, Rogowski coil input with external power supply module	METSEEM3570A
DIN Ethernet power meter, LVCT input without external power supply module	METSEEM3570X
DIN Ethernet power meter, Rogowski coil input without external power supply module	METSEEM3570AX
24V DC power supply module for DIN Ethernet meter 600V AC input	METSEEM3570PS
NEMA enclosure accessory for DIN Ethernet meter METSEEM35x Schneider brand	METSEEM3570ENC

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



PM3000 Series Power Meter

PowerLogic™ PM3000 Power and Energy Meters

PM3000 series power meters are a cost-attractive, feature-rich range of DIN rail-mounted power meters that offers all the measurement capabilities required to monitor an electrical installation. Ideal for power metering and network monitoring applications that seek to improve the availability and reliability of your electrical distribution system, the meters are also fully capable of supporting sub billing and cost allocation applications. Four different models are available. Choose from models that provide Display Only, Display + Pulse Output, Display + Modbus, and Display + Modbus + DI/DO + Logging. All models use 1A/5A CTs.

Table 4.18: PM3000 Features

Available Features	PM3200 Range			
	PM3200	PM3210	PM3250	PM3255
Performance Standard				
IEC61557-12 PMD/Sx/K55/0.5	•	•	•	•
General				
Use on LV and HV systems	•	•	•	•
Number of samples per cycle	32	32	32	32
CT input 1A/5A	•	•	•	•
VT input	•	•	•	•
Multi-tariff	4	4	4	4
Multi-lingual backlit display	•	•	•	•
Instantaneous rms Values				
Current, voltage Per phase and average	•	•	•	•
Active, reactive, apparent power Total and per phase	•	•	•	•
Power factor Total and per phase	•	•	•	•
Energy Values				
Active, reactive and apparent energy; import and export	•	•	•	•
Demand Values				
Current, power (active, reactive, apparent) demand; present	•	•	•	•
Current, power (active, reactive, apparent) demand; peak		•	•	•
Power Quality Measurements				
THD Current and voltage		•	•	•
Data Recording				
Min/max of the instantaneous values	•	•	•	•
Power demand logs				•
Energy consumption log (day, week, month)				•
Alarms with time stamping		5	5	15
Digital inputs/digital outputs		0/1		2/2
Communication				
RS-485 port			•	•
Modbus protocol			•	•

Table 4.19: PM3000 Series Power Meters

Description	Catalog Number
PM3200 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, no communications	METSEPM3200
PM3250 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, Modbus, THD	METSEPM3250
PM3255 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, Modbus, THD, two (2) DI, two (2) DO	METSEPM3255

iEM3000 Energy Meters

The economical iEM3000 energy meters are ideal for helping facilities become more energy efficient. These feature-rich meters reduce installation and commissioning costs thanks to their efficient design and include native support for a variety of protocols, including Modbus, BACnet, LON, and M-Bus, for seamless integration into networks. Choose from models supporting a variety of current-sensing methods, including standard 1A/5A current transformers, 0.333 V low-voltage CTs, and METSECTR Rogowski coils. There are also direct connect models with internal current sensors that save installation time. The compact size is ideal for new and retrofit installations. Whether metering for energy awareness, billing, or advanced energy programs requiring full-featured, multi-tariff energy meters, there is an iEM3000 meter that fits the application.

Table 4.20: iEM3000 Features

Function	Acti 9 iEM3000 Series Three-Phase Meters						
Current Input / Accuracy							
63A Direct / Class 1	iEM3100	iEM3110	iEM3135	iEM3150	iEM3155	iEM3165	iEM3175
1A or 5A CT / Class 0.5S	iEM3200	iEM3210	iEM3235	iEM3250	iEM3255	iEM3265	iEM3275
125A Direct / Class 1	iEM3300	iEM3310	iEM3335	iEM3350	iEM3355	iEM3365	iEM3375
0.333V or 1.0V LVCT / Class 0.5S					iEM3455	iEM3465	
Rogowski coil / Class 0.5S					iEM3555	iEM3565	
Protocol							
M-Bus			•				
Modbus				•	•		
BACnet						•	
LonWorks							•
Measurement							
MID compliant		•	•		•	•	•
4 quadrant energy			•		•	•	•



iEM3000 Series Energy Meter

NOTE:

- For meter part number replace “i” in model name with “A9M”. (Example: iEM3150 = A9MEM3150)
- DIN rail housing size is 18mm x 5 width. (iEM33xx is 18mm x 7 width.)
- Digital input is selectable for Tariff control or WAGES
- Digital output is selectable for kWh pulse or kW alarm. (iEM3x10 is kWh pulse only.)

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Table 4.20 iEM3000 Features (cont'd.)

Function	Acti 9 iEM3000 Series Three-Phase Meters						
Demand					• *[15]*	• *[15]*	
Peak demand					• *[15]*	• *[15]*	
Multi Tariff							
Internal clock			4		4	4	4
External control			2		4	4	4
Digital I/O							
Number of inputs/outputs		-/1	1/1		1/1	1/1	1/1

Measurement parameters
- Total and partial kWh shows consumption behavior
- Four-quadrant metering differentiates energy consumption
- Target green technologies (delivered/received)
- Reduce utility penalties (active/reactive)
- Additional parameters (P, Q, S, 3xI, V, PF, F) to monitor network balance and overload behavior

Smart Alarm
- kW overload alarm helps prevent utility demand charges

Multiple Tariffs
- Save up to four different time slots to manage multiple tariffs (peak/off-peak, workday/weekend)
- Control tariffs via digital inputs, internal clock, or communication

Digital Inputs
- Use the meter as a pulse counter for another meter (WAGES monitoring)
- Manage double-source applications (e.g., utility main plus on-site generator)
- Monitor circuit breaker status or cabinet door opening

Digital Outputs
- Use to trip a light or sound an alarm
- Configure as a pulse output

Table 4.21: iEM3000 Series Energy Meters

Description	Catalog Number
iEM3100 3PH energy meter, DIN rail mount, direct connect 63A, Class 1	A9MEM3100
iEM3110 3PH energy meter, DIN rail mount, direct connect 63A, Class 1, pulse out, MID, one (1) DO	A9MEM3110
iEM3135 3PH energy meter, DIN rail mount, direct connect 63A, Class 1, M-Bus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3135
iEM3150 3PH energy meter, DIN rail mount, direct connect 63A, Class 1, Modbus	A9MEM3150
iEM3155 3PH energy meter, DIN rail mount, direct connect 63A, Class 1, Modbus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3155
iEM3165 3PH energy meter, DIN rail mount, direct connect 63A, Class 1, BACnet, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3165
iEM3175 3PH energy meter, DIN rail mount, direct connect 63A, Class 1, LON, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3175
iEM3200 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S	A9MEM3200
iEM3210 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, pulse out, MID one (1) DO	A9MEM3210
iEM3235 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, M-Bus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3235
iEM3250 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, Modbus	A9MEM3250
iEM3255 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, Modbus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3255
iEM3265 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, BACnet, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3265
iEM3275 3PH energy meter, DIN rail mount, 1A or 5A CT, Class 0.5S, LON, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3275
iEM3300 3PH energy meter, DIN rail mount, direct connect 125A, Class 1	A9MEM3300
iEM3310 3PH energy meter, DIN rail mount, direct connect 125A, Class 1, pulse out, MID, one (1) DO	A9MEM3310
iEM3335 3PH energy meter, DIN rail mount, direct connect 125A, Class 1, M-Bus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3335
iEM3350 3PH energy meter, DIN rail mount, direct connect 125A, Class 1, Modbus	A9MEM3350
iEM3355 3PH energy meter, DIN rail mount, direct connect 125A, Class 1, Modbus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3355
iEM3365 3PH energy meter, DIN rail mount, direct connect 125A, Class 1, BACnet, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3365
iEM3375 3PH energy meter, DIN rail mount, direct connect 125A, Class 1, LON, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3375
iEM3455 3PH energy meter, DIN rail mount, LVCT, Class 0.5S, Modbus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3455
iEM3465 3PH energy meter, DIN rail mount, LVCT, Class 0.5S, BACnet, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3465
iEM3555 3PH energy meter, DIN rail mount, Rogowski coil, Class 0.5S, Modbus, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3555
iEM3565 3PH energy meter, DIN rail mount, Rogowski coil, Class 0.5S, BACnet, MID, 4-quadrant energy, one (1) DI, one (1) DO	A9MEM3565

[15] Available on iEM3455, iEM3465, iEM3555, iEM3565 models only

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Multiple Meter Unit Enclosures for iEM3000 Energy Meters



MMU-24



MMU-8



MMU-4

Schneider Electric's Multi-Meter Unit (MMU) enclosures are the ideal complement for the iEM3000 Series of energy meters. This compact solution saves wall space and is scalable for the exact number of meters required. Factory-assembled, pre-wired, and tested enclosures can speed installation, reduce the amount of field wiring, and save time troubleshooting.

Multi-meter unit enclosures and iEM3000 meters provide the highest quality, best value hardware for tenant sub-metering, and are designed for contractor convenience and simplicity.

MMU enclosures are available in three sizes:

- Small MMU enclosures with capacity for up to 4 iEM3000 meters.
- Medium size MMU enclosures with capacity for up to 8 iEM3000 meters, plus one gateway/data logger/energy server.
- Extra-large MMU enclosures with capacity for up to 24 iEM3000 meters, plus one gateway/ data logger/energy server.

Multi meter units are configured to order as described below.

MMU	1	08	08	A	D	1

Series

MMU = Multi-meter unit

NEMA Rating

1 = NEMA Type 1

Enclosure Capacity

04 = 4 meters, 16"H x 12"W x 6"D

08 = 8 meters, 20"H x 20"W x 6"D

24 = 24 meters, 30"H x 24"W x 6"D

Number of Meters Installed

01 = 1 meter

xx = up to capacity limit

Meter Type (Sensor, Serial Protocol)

A = iEM3455 (LVCT, Modbus)

B = iEM3465 (LVCT, BACnet)

C = iEM3555 (Rogowski, Modbus)

D = iEM3565 (Rogowski, BACnet)

System Type

1 = Prewired for single-phase 208Y/120V L-L-N metering

2 = Prewired for single-phase 120V or 277V L-N metering

2 = Prewired for single-phase 120/240V L-L-N metering

2 = Prewired for three-phase 208Y/120V or 480Y/277V L-L-L-N metering

Gateway/Data Logger/Energy Server

N = None (Required if Meter Type is B or D, or Meter Capacity = 04)

L = EGX150 gateway

D = EBX210 data logger

E = EBX510 energy server

X = EGX300 energy server

B = EGX300 energy server with Tenant Bill 32 application

T = EGX300 energy server with Tenant Bill 64 application

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Power and Energy Meter Selection

Features *[16]*	PM5600	PM5500	PM5340	PM5330	PM5110	PM2x30	PM2x20	PM2x10	EM3500	PM3000	iEM3000
Inputs, outputs and control power											
3-phase / single-phase	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •
Digital in and out / analog in and out	6 / 0	6 / 0	4 / 0	4 / 0	1 / 0	option	option	option	2 or 3 / 0	up to 2/2	up to 1/1
Power supply options	AC/DC	AC/DC/ LVDC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC
Power and energy measurements											
Voltage, current, frequency, power factor	•	•	•	•	•	•	•	•	•	•	•
Power / Demand	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / -
Energy / time-of-use (energy per shift)	• / •	• / •	• / •	• / •	• / -	• / •	• / •	• / •	- / -	• / •	• / •
IEC / ANSI energy accuracy class (% of reading)	0.2	0.2	0.5	0.5	0.5	0.5	1.0	1.0	0.2	0.5	0.5
Loss compensation	-	-	-	-	-	-	-	-	-	-	-
Power quality analysis											
EN50160 compliance reporting / IEC 61000-4-30 Class A or S	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Flicker measurement	-	-	-	-	-	-	-	-	-	-	-
Transient detection duration	-	-	-	-	-	-	-	-	-	-	-
Sag and swell monitoring / disturbance direction detection	• / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Harmonic distortion: total/ individual / inter	• / • / -	• / • / -	• / • / -	• / • / -	• / • / -	• / • / -	• / • / -	• / - / -	- / - / -	• / - / -	- / - / -
Waveform capture	yes	-	-	-	-	-	-	-	-	-	-
On-board data and event logging											
Trending / forecasting / billing	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -
Minimum and maximum	•	•	•	•	•	•	-	-	-	•	-
Events and alarms with timestamps	•	•	•	•	-	•	-	-	-	•	-
Timestamp resolution (seconds)	1	1	1	1	1	1	1	1	1	1	-
Time sync: Network / GPS / IRIG-B / DCF77-B	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -
Setpoints, alarms and control											
Log alarm conditions / call out on alarm	• / •	• / •	• / •	• / -	• / -	• / -	• / -	• / -	- / -	• / -	- / -
Trigger data logging / waveform capture	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Trigger relay or digital output	•	•	•	•	-	•	•	•	-	•	•
Special features											
Custom programming	-	-	-	-	-	-	-	-	-	-	-
Downloadable firmware	•	•	•	•	•	•	•	•	•	•	•
Communications											
Ports:											
Ethernet: Copper / Fiber	2/ -	2/ -	1 / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Ethernet-to-serial gateway	•	•	-	-	-	-	-	-	-	-	-
Telephone modem	-	-	-	-	-	-	-	-	-	-	-
Modem-to-serial gateway	-	-	-	-	-	-	-	-	-	-	-
Infrared port	-	-	-	-	-	-	-	-	-	-	-
RS485/RS232	• / -	• / -	- / -	• / -	• / -	• / -	• / -	- / -	• / -	• / -	• / -
Misc: Web server / Email / SNMP / XML	• / • / • / -	• / • / • / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -	- / - / - / -
Protocols: Modbus / DNP / MV-90 / DLMS	• / - / - / -	• / - / - / -	• / - / - / -	• / - / - / -	• / - / - / -	• / - / - / -	• / - / - / -	- / - / - / -	• / - / - / -	• / - / - / -	• / - / - / -
Protocols: IEC61850 / Jbus / M-Bus / LON / BACnet	- / - / - / - / •	- / - / - / - / •	- / - / - / - / •	- / - / - / - / -	- / - / - / - / -	- / - / - / - / -	- / - / - / - / -	- / - / - / - / -	- / - / - / - / •	- / - / - / - / -	- / - / • / • / •

[16] Specifications represent maximum capabilities with all options installed. Some options are not available concurrently. This is not a complete feature list, please refer to detailed product specifications.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



EM4200 Flex Power Meter



EM4200 System Calibrated with Calibrated Rogowski Coils

PowerLogic™ EM4200 Enercept Meter

Next generation Enercept meters provide a unique solution for measuring energy data. The small form factor enables retrofit installation in existing panels to save wall space, installation time, and material cost.

Designed to simplify the ordering process, the meter is available in two major options:

- **System calibrated Enercept** offers the simplest way to order. The meter comes with pre-mounted low voltage (LVCT) or Rogowski coil current transducers, as well as pre-mounted fuse packs. Ordering one part number provides a system calibrated 1% overall accuracy metering system for 100 A, 200 A, 400 A, or 5,000 A range applications.
- **Enercept Flex** offers the flexibility required for many sites where selecting the type and size of current transducer is desired. The Enercept Flex is compatible with the current transducers on . Choose split core or solid core LCVTs from Table 4.15 LVCT Series Current Transformers, page 4-16, or rope style current transducers from Table 4.14 METSECTR Series Rope-Style Current Transformers, page 4-16.

Features

- Uni- and bi-directional metering to support to power generation application
- Data logging
- Modbus™ and BACnet serial communication with auto-protocol and baud rate detection.
- Configurable with or without power
- Compact size for easy in-panel mounting, DIN rail or screw mount options, includes mounting brackets for easy installation
- Seamless integration with EcoStruxure™ Power Management software products.
- Wide 90 to 480 Vac input range
- High reliability with ANSI C12.20 0.2% accuracy, IEC 62053-22 Class 0.2S (EM4236)

Table 4.22: EM4200 Enercept Meter

Description	Catalog Number
Enercept Flex power meter, Class 0.2S, Modbus/BACnet RS485, ANSI wire code, compatible with LVCT and Rogowski coils, order current transducers and fuse packs separately	METSEEM4236
System calibrated Enercept power meter, Modbus/BACnet RS485, ANSI wire code, includes 12-inch length Rogowski coil current transducers for up to 5,000 A and fuse packs	METSEEM4236A12
System calibrated Enercept power meter, Modbus/BACnet RS485, ANSI wire code, includes 18-inch length Rogowski coil current transducers for up to 5,000 A and fuse packs	METSEEM4236A18
System calibrated Enercept power meter, Modbus/BACnet RS485, ANSI wire code, includes LVCT current transducers for up to 100 A and fuse packs	METSEEM4236B101
System calibrated Enercept power meter, Modbus/BACnet RS485, ANSI wire code, includes LVCT current transducers for up to 200 A and fuse packs	METSEEM4236B201
System calibrated Enercept power meter, Modbus/BACnet RS485, ANSI wire code, includes LVCT current transducers for up to 400 A and fuse packs	METSEEM4236B401

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



Multi Circuit Energy Meters

The PowerLogic™ EM4800 and EM4000 multi-circuit energy meters combine accurate electricity sub-metering with advanced communications technology. They are ideal for multi-tenant or departmental metering and M&V applications within office towers, condominiums, apartment buildings, shopping centers and other multipoint environments, or small footprint retail. This meter is available separately or as part of a Square D integrated power center (IPC) for use in building retrofits or new construction.

Each compact multipoint meter provides energy measurement for up to 24 (1CT) or 12 (2CT) single-phase circuits or 8 (3CT) 3-phase circuits. Select a model to match the desired CT type. The 0.333 V output CT option does not require shorting blocks, making it the ideal choice for retrofit installations.

All meters have an accuracy of Class 0.5%, have onboard interval logging, and feature flexible communication options with an Ethernet port that supports multiple protocols: Modbus™ TCP/IP, HTTP, BACnet/IP, FTP, and SNTP. EM4800 series meters have a V.90 modem while EM4000 series meters provide Modbus RTU over RS-485.

Table 4.23: Multi Circuit Energy Meters

Description	Catalog No.
EM4800 series; Ethernet; modem; compatible with 80mA low-power CTs; 120V control power 60 Hz	METSEEM488016
EM4800 series; Ethernet; modem; compatible with 333mV low-power CTs; 120V control power 60 Hz	METSEEM483316
EM4800 series; Ethernet; modem; compatible with standard 5A CTs; 120V control power 60 Hz	METSEEM480516
EM4000 series; Ethernet; Modbus RTU over RS-485; compatible with 80mA low-power CTs; 120V control power 60 Hz	METSEEM408016
EM4000 series; Ethernet; Modbus RTU over RS-485; compatible with 80mA low-power CTs; 277V control power 60 Hz	METSEEM408036
EM4000 series; Ethernet; Modbus RTU over RS-485; compatible with 333mV low-power CTs; 120V control power 60 Hz	METSEEM403316
EM4000 series; Ethernet; Modbus RTU over RS-485; compatible with 333mV low-power CTs; 277V control power 60 Hz	METSEEM403336
200 A current transformer (CT), 80 mA secondary, solid-core (1 CT)	METSECT80200
400 A current transformer (CT), 80 mA secondary, solid-core (1 CT)	METSECT80400
600 A current transformer (CT), 80 mA secondary, solid-core (1 CT)	METSECT80600
50 A .333 V Split Core Current Transformer with 0.75 in Window Size	ECT075050SC
100 A .333 V Split Core Current Transformer with 0.75 in Window Size	ECT075100SC
150 A .333 V Split Core Current Transformer with 0.75 in Window Size	ECT075150SC
200 A .333 V Split Core Current Transformer with 0.75 in Window Size	ECT075200SC
100 A .333 V Split Core Current Transformer with 1.25 in Window Size	ECT125100SC
150 A .333 V Split Core Current Transformer with 1.25 in Window Size	ECT125150SC
200 A .333 V Split Core Current Transformer with 1.25 in Window Size	ECT125200SC
400 A .333 V Split Core Current Transformer with 1.25 in Window Size	ECT125400SC
200 A .333 V Split Core Current Transformer with 2.00 in Window Size	ECT200200SC
400 A .333 V Split Core Current Transformer with 2.00 in Window Size	ECT200400SC
600 A .333 V Split Core Current Transformer with 2.00 in Window Size	ECT200600SC
600 A .333 V Split Core Current Transformer with 3 x 5 in Window Size	ECT300600SC
800 A .333 V Split Core Current Transformer with 3 x 5 in Window Size	ECT300800SC

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

PowerLogic™ HDPM6000 High-Density Power Meters

The PowerLogic™ HDPM6000 high-density, multi-circuit busway and panelboard power meters are applicable for cost and network management in large and critical power applications.

The PowerLogic HDPM6000 high-density metering system provides the data you need to achieve energy accountability and regulatory compliance. It helps you improve power quality to avoid downtime by monitoring power problems at the circuit level, giving you visibility across your entire electrical infrastructure.

The HDPM6000 multi-circuit power metering system is modular, scalable, and adaptable to almost any situation. It is the perfect high-density metering solution for main circuits and branch circuits in any type of electrical panel or busway system.

Applications

Ideal for large building applications such as data centers, industrial facilities, infrastructure, and other similar environments.



Market Solutions

Markets that benefit from a solution with PowerLogic™ HDPM6000 include:

- Data centers
- Industrial facilities
- Healthcare facilities
- Manufacturing

Competitive advantages

- Asset management
  - Identify increased harmonics in the rack servers to detect a potential disruption
  - Total harmonics distortion
  - Waveform capture
- Display and web page visualization
  - Optional touchscreen display accesses meter data
  - User-friendly web interface allows configuration of branch circuits and commissioning of meter system
- Data logging and software monitoring
  - Data logging and on-board memory storage
  - EcoStruxure™ PME and Power Operation integration
- Busway solution
  - Modular distributed architecture meets data center requirements in an all-in-one solution

Benefits

- Modular platform approach provides scalability and minimizes integration costs, start up time, and operational expenses.
- Provides power quality metrics down to the branch circuit, allowing users to effectively monitor circuit loads, manage power consumption, allocate energy costs and maximize uptime across their facilities.
- Makes energy and power quality data immediately actionable and relevant to operational and sustainability goals.

Power management solutions

Schneider Electric provides innovative power management solutions to increase your energy efficiency and cost savings. Maximize electrical network reliability and availability, and optimize electrical asset performance.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

HDPM6000 Head Unit and Modules

Table 4.24: Technical specifications

Features		
Web interface	For configuration and live data access	
Supported protocols	Modbus TCP/IP, SNMP, BACnet IP HTTPS, IPV6 are supported	
Data storage	Min. 8 GB SD card to store log data and waveform captures provided	
Alarms	On-board user-configurable alarms and alerts	
Power quality analytics	Waveform capture (natively with Head Unit, Busway, Strip 24 Circuit modules- optional with Retrofit and Strip 21 Circuit modules), voltage THD (Head Unit only), current THD, voltage imbalance (Head Unit only), current imbalance, current Total Demand Distortion (Head Unit only)	
Electrical Characteristics		
Measurement voltage	Per UL 61010-1: up to 277 Vac L-N/480 Vac L-L	
	Per IEC 61010-1: up to 277 Vac L-N/480 Vac L-L	
	Single phase 2-wire plus ground, 3-wire plus ground or 4-wire plus ground	
Specified accuracy range	108 Vac L-N/187 Vac L-L to 332 Vac L-N/576 Vac L-L	
Maximum continuous overvoltage at voltage measurement inputs	580 Vac L-L	
Input frequencies	50/60 Hz	
24 Vdc power supply	The HDPM6000 Head Unit needs to be powered with a 24 Vdc power supply. The input voltage for the power supplies available in the HDPM catalogue are: 100...240 Vac or 264...575 Vac to 24 Vdc output. The HDPM6000 branch circuit modules receive the 24 Vdc from the Head Unit via the bus port CAT6 cable.	
Measurement category	CAT III	
CT support	UL2808, 20-4000 A with internal burden resistor and 250 mV signal (no shorting blocks required)	
CT options	Solid-core or split-core type current transformers with a maximum voltage of 480 V	
Supported Protocols		
Maximum number of concurrent Modbus TCP connections	25	
Environmental Characteristics		
Operating temperature	-20...60 °C (-4...140 °F)	
Storage temperature	-40...85 °C (-40...185 °F) - for IO and EIM Module: -20...70 °C (-4...158 °F)	
Relative humidity	5...90% non-condensing	
Maximum operating altitude	2,000 m (6,562 ft)	
Non-operating altitude	15,000 m (49,213 ft)	
Noise level	< 65 dba at 6 ft (72 in) from the HDPM6000	
Mounting location	Not suitable for wet locations, for indoor use only	
Pollution degree (Head Unit)	2	
Measurement Accuracy		
The HDPM6000 Head Unit Real Energy (kWh) meets the accuracy limits of ANSI C12.20 Class 0.5 and IEC 62053-22 Class 0.5S according to the following tests:		
Measurement type	IEC 62053-22 2021	ANSI C12.20-2015
	IEC 62053-22 2021 Class 0.5	ANSI C12.20-2015 Class 0.5
Variation of current	IEC 62052-11:2020, 9.4.12	N/A
Equality of circuits	N/A	Test 7
Variation of voltage	IEC 62052-11:2020, 9.4.3	Test 5
Variation of frequency	IEC 62052-11:2020, 9.4.6	Test 6
Variation of ambient temperature	IEC 62052-11:2020, 9.4.4	Test 19
Load performance	N/A	Test 3
Variation of PF	N/A	Test 4

Table 4.25: Waveform Capture Specifications

Modules	Frequency (Hz)	Number of samples per cycle	Number of cycles per current and voltage waveform	Portion of waveform capture that is pre-event
HDPM6000,HDPM6000R, HDPM6000S, HDPM6000S24	50	160	12.8	2/3
	60	133.3	15.3	2/3
HDPM6000B	50	160	6.4	1/2
	60	133.3	7.6	1/2

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



Panel Server Universal



Panel Server Advanced



EcoStruxure Panel Server gives you access to the information you need to help protect, maximize and optimize your power system.

EcoStruxure™ Panel Server

IoT for an intelligent power network. The EcoStruxure™ Panel Server is the next generation of gateway, providing a seamless connection of wired or unwired smart IoT devices to your edge control software or cloud-based applications and analytics. It is a foundational enabler for Schneider Electric EcoStruxure™ solutions.

Electrical safety

Panel Server is an integral part of Schneider Electric's continuous thermal monitoring application, helping reduce the risk of electrical fires, and helping to increase people and assets protection. Implement the thermal monitoring of your electrical panel by connecting thermal and heat sensors to your Panel Server.

Power availability

Electrical distribution monitoring and power event analysis help avoid unplanned downtime caused by electrical failure. Panel Server collects real-time data and alarms, presenting information through embedded web pages, making it available to edge control software or cloud-based applications and analytics for electrical system diagnostics. Use embedded web pages for first-level monitoring or monitor from your edge or cloud control system.


Optimize energy efficiency

Improve your facility's energy efficiency and reduce energy consumption with energy usage analysis and performance tracking. Panel Server collects and shares energy data to help achieve your energy conservation initiatives. It is part of an energy data management system certified for compliance with ISO 50001, 50002, 50006 requirements.

Cybersecurity

Guarding your electrical assets and systems against cyber attacks is vital. Discover the enhanced cybersecurity benefits of Panel Server and its IEC62443-4-1 compliant development lifecycle. Explore its cybersecurity features through a dedicated guide, and discover how Panel Server empowers you to retrieve security logs, providing valuable insights into system security and activity.

Architecture Overview

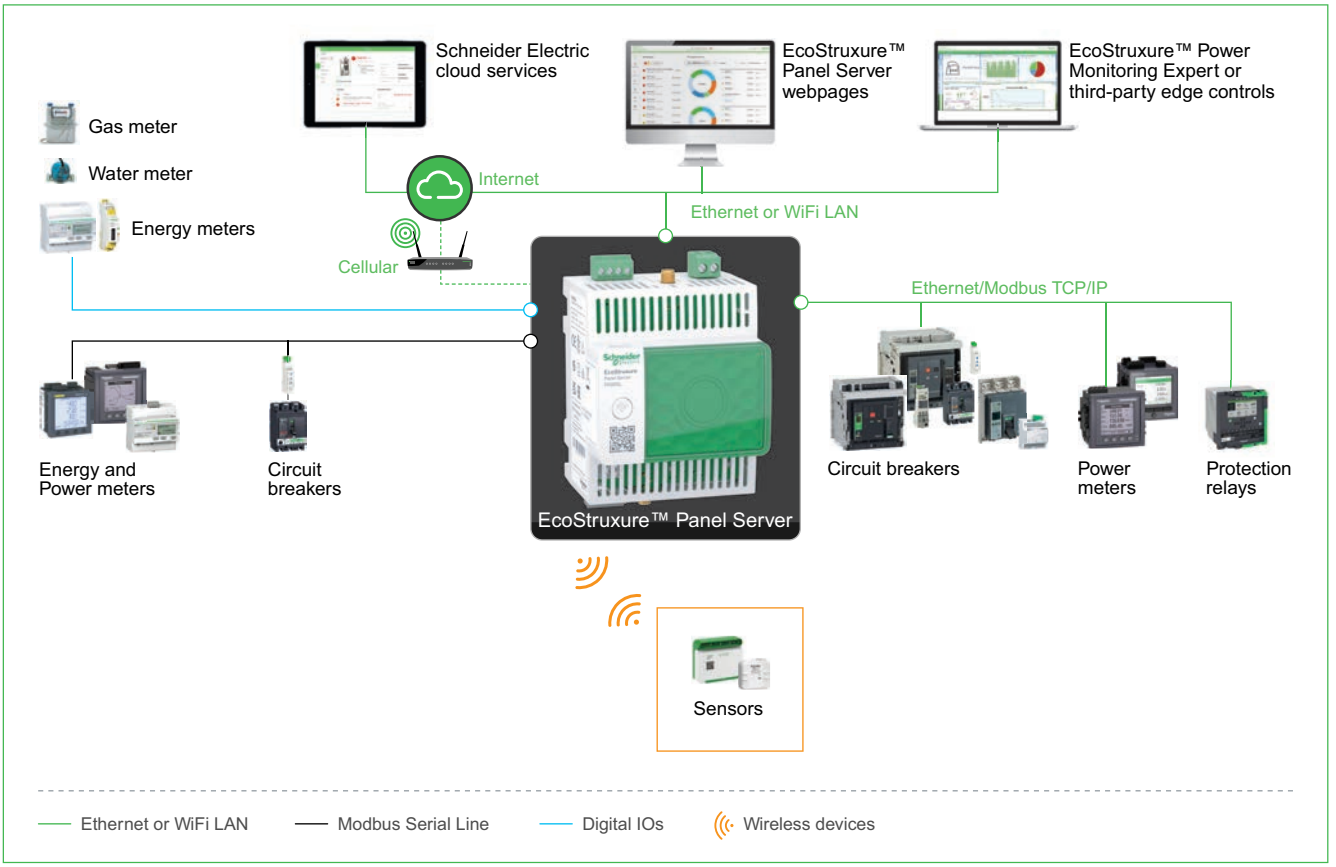

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



PS600L

Panel Server Universal

Panel Server Universal is designed to retrieve data from wired or wireless devices. For sensitive installations, the Wired-by-Design models only support wired protocols.

Functions

- Connect to your monitoring & control software such as EcoStruxure Power Monitoring Expert, EcoStruxure Power Operation, or to your Building Management System.
- Connect to Schneider Electric cloud applications such as EcoStruxure Energy Hub or Asset Advisor.
- Ease of commissioning with EcoStruxure Power Commission software or directly through the Panel Server web pages, enabling device plug-and-play and auto-discovery features.
- Ease of operation with user friendly embedded web pages, and data contextualization for more relevant analytics.

Table 4.26: EcoStruxure Panel Server Universal

Description	Catalog Number
Panel Server Universal with 110...277 V AC/ DC power supply	PAS600
Panel Server Universal with 24 V DC power supply	PAS600L
Wired by Design Panel Server Universal with 24 V DC Power	PAS600LWD
Wired by Design Panel Server Universal with PoE power supply	PAS600PWD

Refer to **EcoStruxure Panel Server** on www.se.com/us for complete information.



PS800L

Panel Server Advanced

Panel Server Advanced has Data Logger and Local Energy Server capabilities. It embodies the first step into energy monitoring. Follow, analyze and compare your loads consumption to enable energy savings.

Functions


- An all-in-one gateway to retrieve data from both your wireless IEEE 802.15.4 devices and Modbus devices.
- Monitor up to three years history data and analyze your energy consumption directly through the Panel Server Advanced embedded web pages.
- Connect to your monitoring and control software such as EcoStruxure™ Power Monitoring Expert, EcoStruxure™ Power Operation or to your Building Management System.
- Connect to Schneider Electric cloud applications such as EcoStruxure™ Energy Hub or Asset Advisor.
- Ease of commissioning with EcoStruxure™ Power Commission software or directly through the Panel Server web pages, enabling device plug-and-play and auto-discovery features.
- Ease of operation with user friendly embedded web pages, and data contextualizing for more relevant analytics.

Table 4.27: EcoStruxure Panel Server Advanced

Description	Catalog Number
Panel Server Advanced with 24 V DC power supply	PAS800L
Panel Server Advanced with PoE power supply	PAS800P
Panel Server Advanced with 110...277 V AC/DC power supply	PAS800

Refer to **EcoStruxure Panel Server** on www.se.com/us for complete information.

Panel Server Dimensions

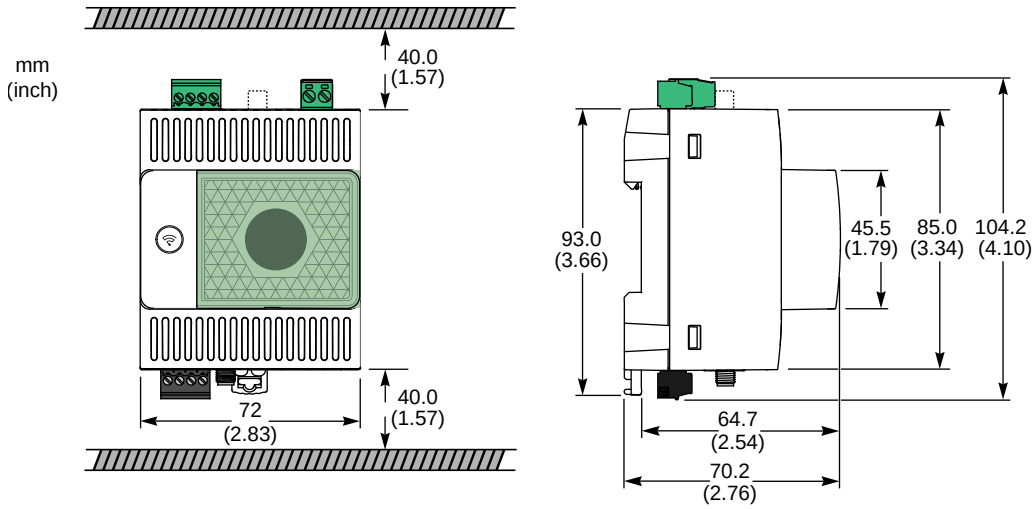

Approximate Dimensions for Universal and Advanced Panel Server

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Engineered Solutions

Schneider Electric provides an engineered solution approach to your specific power system applications. Our total solutions for power monitoring and power system controls allow greater safety, reliability, and energy efficiency of your power systems. As a long standing industry leader in Power Monitoring and Control Systems, we understand your power system requirements and needs.

All of our Engineered Solutions are tailored to your specific system requirements. Schneider Electric is your total solution provider.

The Basics of a Comprehensive Power and Energy Management System




Measure: Gather energy and power data throughout your facility. Stand-alone or embedded meters measure, collect, and deliver essential data from key distribution points across your entire electrical network.

Understand: Turn data into actionable information. Power management software brings intelligent analytics and visualization to power and energy data.

Act: Use actionable information to make intelligent decisions and operational shifts to create change or correct issues.

The Benefits of Power and Energy Management

- Reduce energy and operational costs
- Improve power and equipment reliability
- Optimize operations
- Increase system capacity
- Minimize expensive downtime
- Meet sustainability goals
- Improve productivity

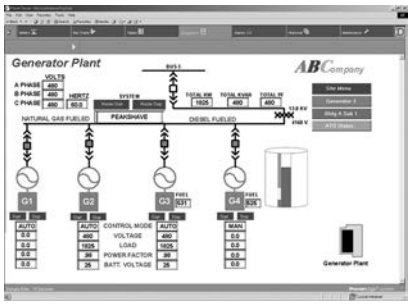

PowerLogic Engineers provide graphic solutions for realtime monitoring of power systems.


Power System Control Applications

Automated solutions for increased Reliability and Energy Efficiency: Schneider Electric engineers provide Power System Control Applications with automated solutions for addressing your system reliability and efficiency control needs. Our offer covers Automatic Throwover Schemes, Load Shedding/Peak Shaving, and Load Preservation and Mircrogrids.

- ***Automatic Throwover Systems*** – Automatic selection of available utility or generator sources to maintain service continuity to connected loads.
- ***Load Shedding/Peak Shaving*** – Control peak demand levels or ensure service continuity to critical load or operate breakers in accordance with user specified sequences and time delays such as bringing large motors online across several billing kw demand periods to avoid demand penalties.
- ***Load Preservation*** – Fast acting sophisticated control systems designed to stabilize critical power systems to the greatest extent possible by monitoring frequency and power sources from utility plus generator capacity versus total circuit load.

Power System Engineering

The Square D™ Power System Engineering team offers a wide range of engineering services to improve the safety, efficiency and reliability of your power distribution system. The team is comprised of registered professional engineers, safety trained and equipped, to perform a variety of engineering functions.

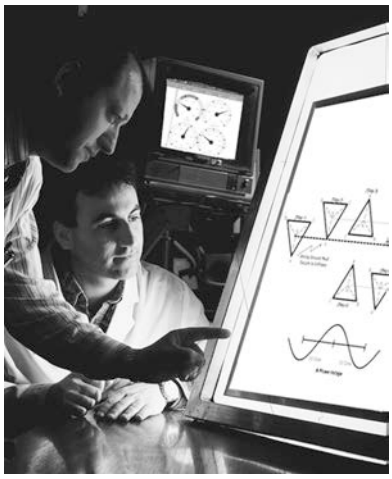

Power System Studies

The Square D Power System Engineering Team provides expertise for a variety of electrical power system studies. Some of the more common system studies include:

- Short-circuit analysis
- Time-current coordination
- Motor starting/voltage drop
- Motor starting/torque-speed
- Safe motor re-energization
- Harmonic analysis
- Transient analysis
- Power factor correction analysis
- Other system specific analysis

Arc Flash Analysis

Square D offers on-site services to perform arc flash analysis for a facility, complex, office, or campus. An Arc flash analysis is used to determine:

- Flash Protection Boundary
- Incident Energy Value
- Hazard/Risk Category
- Appropriate Personal Protective Equipment (PPE)
- Low cost arc flash reduction methods



Features of Square D arc flash analysis include:


- Time current coordination analysis showing both existing and recommended over/current device settings
- Short-circuit study to ensure adequacy of equipment
- Onsite verification and documentation of equipment
- Arc flash labels (populated with the results of the arc flash analysis)
- Arc flash label affixation
- NFPA 70E—Safe Workplace Practices Training provided by OSHA authorized outreach instructors
- Recommendations and solutions to reduce potential arc flash hazards

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Power Quality Studies

Square D offers onsite power quality engineering studies and solutions to eliminate process disruptions, power system shutdowns, and equipment damage due to electrical power system disturbances. A power quality study is used to:

- Determine compliance with the IEEE 519-Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems guidelines
- Identify most cost-effective solution to power quality problems
- Solve process disruptions due to power disturbances
- Reduce economic effects of poor power quality
- Identify disturbances originating on electric utility system and improvements to reduce the number and severity

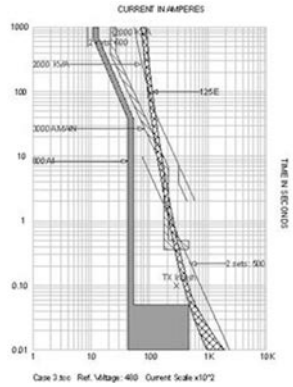

Power System Assessment

Square D offers engineering services to meet a variety of power system needs:

- Basic codes and standards compliance
- Protective coordination assessment
- Maintenance program review
- Recommendations for power system optimization
- Power quality troubleshooting and analysis
- Power factor and harmonics analysis
- Electrical safety hazards
- Short-circuit withstand overview
- Single-line documentation of power system
- Power monitoring recommendations
- Loading measurements

Power System Design Services

Schneider Electric Engineering Services offers three levels of design services based on the customer need:

- Design Assurance
- Design Assistance
- Primary Design Agent

Other areas of expertise include:

- New equipment installation
- Existing equipment modification
- Protection Control Automation
- Ground Fault Systems
- Generator Control Systems

Square D professional engineers - safety trained and equipped - will listen to your concerns and goals, define the problem or enhancement, and engineer the solution that best satisfies your needs.

For additional information on power system engineering services and pricing, contact your nearest Square D/Schneider Electric office.

Advanced Microgrid Solutions and Distributed Energy Resource Management

With our custom solutions and proven expertise, we deliver advanced microgrids that offer the advantages of grid independence – without forfeiting the benefits of being part of the central grid. Our flexible microgrid architecture features a scalable set of grid components designed to efficiently manage your entire energy infrastructure, including distributed generation, energy storage, and load demand, while giving you the ability to easily adapt the system to your changing needs. **Learn more at** www.schneider-electric.us/en/work/solutions/microgrids/



Microgrids deliver energy flexibility

Total Energy Control

Schneider Electric Certified Energy Managers (CEM's) work on-site with knowledgeable plant personnel to develop a long-term, comprehensive, "Energy Action Plan", that serves as the blueprint for energy savings. Unlike performance contracts or one-time energy audits, the Total Energy Control℠ program offers a strategic partnership for energy-intensive industrials who want to improve energy efficiency.

Total Energy Control

- **Utility Analysis:** evaluating both the commodity supply side and the demand side areas of the operation.
- **Demand Side Usage:** profiling facility loads and consumption patterns.
- **Opportunity Identification / Prioritization:** projects that make sense today and those that should be considered in the future as energy prices change.
- **Project Implementation:** Client can choose which projects to implement or Square D can provide turn-key implementation.
- **Supply Management:** forecasting and making adjustments to reflect current conditions.
- **On-Going Accountability:** accountable along with you for the ongoing success of your energy plan.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026





EcoStruxure™ Service Plans (ESP) for Power Management

EcoStruxure™ Service Plans (ESP) is a personalized service contract for your connected and non-connected assets. It provides both onsite and off-site asset management, monitoring, diagnostics, and preventive and predictive maintenance services.

ESP for Power Management is designed to provide maintenance, support, and improved services for your Schneider EPMS. Now you can easily manage your electrical system and keep your operations running smoothly without the need for extra time or the manpower to do it.


Table 4.28: ESP Plan Features

The table below identifies the three levels and what features would be included or can be added. Multi-year plans available at a discount.

Package Features	Prime			Ultra	
	PrimeLite	Prime	PrimeOS	Ultra0	Ultra1 Ultra2 Ultra3
Support					
Basic Product Support	•	•	•	•	•
Remote Access Troubleshooting	•	•	•	•	•
24/7 support	•	•	•	•	•
Direct Access to L2 Digital Service Engineers	•	•	•	•	•
Customer Success Resource	N/A	•	•	•	•
Designated Digital Service Engineer	N/A	N/A	N/A	•	•
Maintenance					
Software Assurance *License cost for service packs and new software releases[17]*	N/A	•	•	•	•
Remote Maintenance *Hours per year*	N/A	Up to 4	Up to 4	Up to 8	Up to 8
Onsite Maintenance *Days*	Available at discount	Available at discount	2 per year	Available at discount	# of days per quarter *[18]*
Optimize					
Self-Help Web Portal	•	•	•	•	•
Exclusive Access to Webinars	•	•	•	•	•
Exclusive Access to Power Monitoring & Energy Management Online School	•	•	•	•	•
Power Advisor Electrical Health & Data Quality Report with Consultation Meeting*[19]* *Frequency*	N/A	Bi-annual	Bi-annual	Quarterly	Quarterly
PMU Factory Training Discount (Visit http://www.pmutraining.com/)	N/A	10%	10%	15%	15%
Transform					
eMaintenance *Remote PME Maintenance*	Available at discount				
eService *Expert Design, Customization, and Upgrade Services*					
Cybersecurity Assessment					
Managed System Studies					

[17] Installation and SQL license not included.
[18] ULTRA1 = 1 Day, ULTRA2 = 2 Days, ULTRA3 = 3 Days
[19] Requires client assistance with metering hierarchy.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

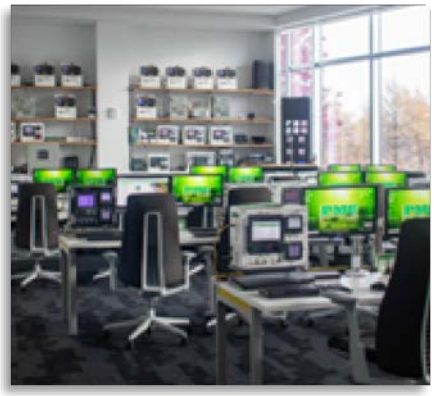



Power Management University (PMU)

PMU is the U.S.-based education team dedicated to providing best in class training on the various energy management software and related products that Schneider Electric™ has to offer. We offer a variety of courses to help our end-users make the most out of their energy management software and hardware investments. The table below identifies some of the training options available through PMU.

- Visit https://www.pmutraining.com/ to learn more or
- Email pmu@se.com with any questions.

Table 4.29: PMU Training Options

PMU Factory Training Courses

Perfect for sites that have minimal staff that need training on their EPMS. PMU Factory Training Courses are instructor-led events with pre-defined agendas and are available for registration by anyone interested. They are hosted at regular intervals throughout the year with both Classroom (CR) and Virtual Instructor-led (VILT) options available for most courses.

Below is the list of PMU Factory Training Courses available. Click on each course name to learn more.

(CR) = Classroom
(VLT) = Virtual Instructor-led

Course Name	Duration	Part Number
PowerLogic™ and ION Metering Hardware — Installation and Troubleshooting	2 Days	(CR) 3000PMU2DAY
EcoStruxure™ Power Monitoring Expert – Operator Training	3 Days	(CR) 3000PMU3DAY (VILT) 3000PMUWEB3DAY
EcoStruxure™ Power Monitoring Expert – (PME) Advanced Operator Training	3 Days	(CR) 3000PMU3DAY (VILT) 3000PMUWEB3DAY
EcoStruxure™ Power Monitoring Expert – ION Architecture Programming using Designer	4 Days	(CR) 3000PMU4DAY (VILT) 3000PMUWEB4DAY
EcoStruxure™ Power Monitoring Expert – Energy Billing Module Deployment	1 Day	(VILT) 3000PMUWEB1DAY
EcoStruxure™ Power Monitoring Expert – Vista Graphics and User Diagrams	1 Day	(VILT) 3000PMUWEB1DAY
EcoStruxure™ Power Monitoring Expert – TGML Graphics and User Diagrams	1 Day	(VILT) 3000PMUWEB1DAY


PMU Private Training Events

Perfect for sites that have complex systems or multiple staff members that need training on their Schneider Electric EPMS. PMU Private Training sessions are instructor-led events that are designed for your specific solution. With both on-site (at the customer facility) and virtual options available, PMU Private Training Events allow you to choose the date, duration, and topics that are relevant to your system and staff.

Below is the list of PMU Private Training sessions part numbers. Contact your sales representative or Email pmu@se.com to learn more.

Location	Part Number	Description
On-site	3000PMUSITE1C	1 Day On-site Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUSITE2C	2 Day On-site Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUSITE3C	3 Day On-site Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUSITE4C	4 Day On-site Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUCSITEVID	Daily Videography Service Adder for Private On-site Training Events, quantity as needed
	3000PMUCSITE	2nd Instructor for larger Private On-site Training Events, Class Size 11-20 students
Virtual	3000PMUCDVILT1DAY	1 Day Virtual Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUCDVILT2DAY	2 Day Virtual Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUCDVILT3DAY	3 Day Virtual Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUCDVILT4DAY	4 Day Virtual Private Training Event, up to 10 people, 5X8, Standard Content
	3000PMUCVILTVID	Daily Videography Service Adder for Private VILT Events, quantity as needed
N/A	3000PMUCSITEPREP	1 Day of Custom Content Creation, quantity as needed

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

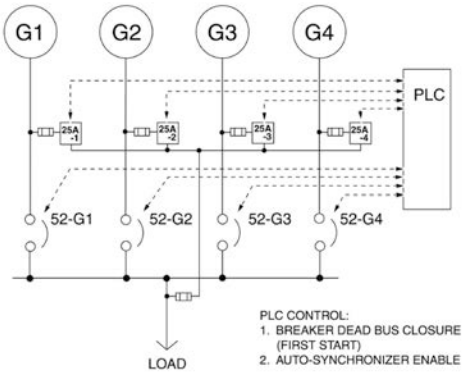

PowerLogic Engineers design power control systems that meet your operational requirements

System Integration

System Design and Engineering

Our Power Solutions specialists can work with you to design or upgrade your existing system to best achieve your energy and power management objectives and informational needs. With expertise in electrical systems, communications, and automatic control systems, we can integrate, install, and commission your system for optimal performance.

- System Design and Bill of Material Recommendations
- Power Monitoring and Control
- WAGES (Water, Air, Gas, Electric, Steam)
- Enterprise web-based monitoring
- Specification development, drawings, documentation
- Enclosure panel design and build
- Metering Connection Verification/Testing
- Power distribution automation
- On-Site Installation Assistance, Component Configuration & Startup
- Turn-key project management
- Third Party Device and communication interfaces
- Configured Workstations, User Software Interfaces
- Interactive Graphic Design to mimic facility layout, one-lines, equipment status
- Custom Software, Reports & Applications – Billing and Event Notification



PowerLogic™ Engineers specialize in the design and setup of Emergency Power Supply Systems (EPSS).

For additional information, contact your nearest Square D / Schneider Electric office.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



Factory Assembled Equipment

Square D™ PowerLogic™ Factory Assembled Equipment offers a wide range of designs for metering, communications, and control applications to simplify retrofit installations. Our equipment is designed to order as a free-standing or wallmounted system. With PowerLogic™ Factory Assembled Equipment, you'll receive professionally crafted, factory tested, pre-wired equipment that will greatly improve the speed of your system startup. All backed by the Square D™ quality standard of excellence.

- Assemblies include meters & devices wired to terminal blocks, disconnects, and shorting blocks or test switches
- Tailored to any system voltage :
  - 208/120 V, 480/277 V & 600/347 V Wye
  - 240 V, 480 V & 600 V Delta
  - Utilization of PT's required for higher voltage levels
- Wall mountable and easy to install using concealed holes in the back of the enclosure.
- Complete with necessary documentation and mounting hardware for quick and easy installation
- Carbon steel construction, with industry standard ANSI 61 gray powder coat finish
- Equipped with concealed hinged door, and universal pad-lockable latch.
- Custom engraved nameplates available for all units.



Table 4.30: Industrial Enclosure Types 12 & 4, UL & CUL 508A Listed

Available Meter Types	Digital Inputs	Digital Outputs	Analog Inputs	Analog Outputs
PM5563RD	Up to 4 / Meter	Up to 2 / Meter	N/A	N/A
PM8244	Up to 15 / Meter	Up to 5 / Meter	Up to 4 / Meter	Up to 2 / Meter

- Supports Single or Multiple Voltage Sources for Indoor (Types 1 and 12) & Outdoor (Type 4) applications
- Available with 1–4 meters per panel. Serial & Ethernet Communications are options for all units
- EGX & ION RTU Communication Enclosures with 1–4 devices per panel also available

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



Light Industrial Enclosure Type 1, UL & CUL 508A Listed

- Available for the following meter types: PM8244, PM5563RD, and ION6200
- Supports Single Voltage Source only for Indoor (Type 1) applications.
- Available with 1–12 meters per panel. Serial Communications are standard for all units.
- No Digital or Analog I/O is available for this option.

Service Entrance/Utility Socket Enclosure Type 3R, UL & CUL 508A Listed

- Available for ION8650 only, with up to 3 Digital Inputs and 4 Digital Outputs.
- Supports Single Voltage Source only for Indoor & Outdoor (Type 3R) applications.
- Units are Ring Type with removable cover.
- Available with 1 meter per panel. Serial & Ethernet Communications options available.
- Supports Form 9S, 35S, 36S, 39S and 76S configurations for ION8600 and forms 9S and 36S for E5600.
- Options available for remote mounted CTs
- Options available for integrated, bar type CTs
- Optional Test Switch.

Additional engineered to order products are available for a wide variety of design solutions.

- Switchgear Transfer Control Panels
- Generator Control Panels
- Load Shed Control Panels
- Sequence of Events Recording (SER) Panels
- Control System Mimic Panels
- Lighting Control Interface Panels
- Programmable Logic Controller (PLC) Control Panels (Hot Standby, Relay Control, Data Concentration etc. ...)
- Emergency Power Supply Systems (EPSS) Control Panels
- Water, Air, Gas, Electrical, and Steam (WAGES) Monitoring Panels
- Input Status Monitoring & Alarming Panels
- Remote Annunciator Control Panels
- Remote Operator Control Panels
- Serial, Ethernet, and Cellular Wireless Systems
- Server Rack and Network Equipment (Servers, Switches, UPS's) for Energy Management Systems.
- Industrialized PC's, Touch Screens (Magelis), and Human Machine Interfaces (HMI's) with Custom System Graphics.
- Designed to fit any environment – Indoor (Type 1 & 12) & Outdoor (Type 3R & 4) applications

For additional information and pricing please contact your local PowerLogic sales specialist or PowerLogic Inside Sales Support at 615-287-3535. Equipment pricing and literature available for download on our website at www.powerlogic.com/products/enclosures.


To better serve you please have the following information on hand when calling.

- Enclosure type (Indoor or Outdoor) and Environment details (Corrosive or Non-Corrosive)
- Power System Voltage Level and Type (Direct Current (DC) or Alternating Current (AC))
- Digital & Analog Input and Output requirements
- Device Type and Quantity per enclosure
- Ethernet and Serial Communication Requirements
- For Drawout Retrofits, need existing cradle type (i.e. GE, Westinghouse, etc.)

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Reactive Power Compensation and Harmonic Mitigation Solutions

How can reactive power compensation and harmonic mitigation solutions be part of your energy efficiency programs?

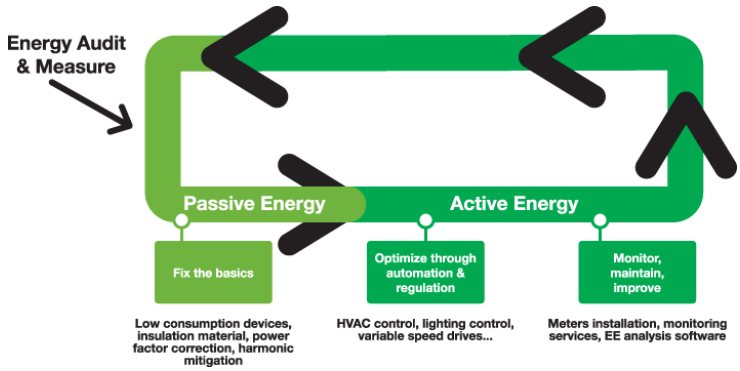

Power factor is a measure of how efficiently you are using electricity. In an electric power system, a load with low power factor draws more current than a load with a high power factor for the same amount of real power transferred. Utility customers with a low power factor could realize an increase or penalty in their electric bill. Over time, these penalties may reach into thousands of dollars, depending upon the utility's rate structure.

Harmonics may disrupt normal operation of other devices and increase operating costs. Symptoms of problematic harmonic levels include overheating of transformers, motors and cables, thermal tripping of protective devices, logic faults of digital devices and drives. Harmonics can cause vibrations and noise in electrical machines (motors, transformers, reactors). The life span of many devices can be reduced by elevated operating temperature.

As a leader in the field of power quality, Schneider Electric offers the products and services needed to ensure that the most reliable and cost effective solution is applied within your facility. We can help you select the right solution for your application, for greenfield or brownfield projects. Please visit us at https://www.se.com/us/powerandenergy.

Table 4.31: Descriptions, Applications, and Features

Product Description	Application	Product Features
PowerLogic™ PFC Capacitor Bank Detuned	Power Factor Correction	Suited for centralized power factor correction in applications containing harmonic energies that would otherwise damage standard automatic capacitor banks
PowerLogic™ PFC Capacitor Bank Fast	Power Factor Correction	Contains enhanced technology utilizing solid state switching elements that replace standard electromechanical contactors. Provides quicker response to load fluctuations with transient free capacitor switching.
EasyLogic™/PowerLogic™ PFC Capacitor Bank Hybrid	Power Factor Correction and Harmonic Filtering	Provides instantaneous and infinitely variable reactive power compensation for industrial networks containing highly transient or unstable loads, as well as system compensation for large AC motor inrush current. It integrates conventional power factor correction systems and the latest IGBT-based solutions to provide ultra rapid response and infinitely variable kVAR control.
PowerLogic™ PFV+	Power Factor Correction	Provides reactive current compensation for specific and high performance systems. It can eliminate leading or lagging power factor, reduce voltage fluctuations, enhance equipment operating life, and improve system power capacity.
PowerLogic™ PCS+ and PCSn	Power Factor Correction and Harmonic Filtering	It is a flexible, high performance, cost-effective solution to stabilize electrical networks by providing harmonic mitigation, power factor correction, and load balancing. It monitors a distorted electrical signal and determines the frequency and magnitude of harmonics in the signal. It cancels the harmonic content with the dynamic injection of opposing phase current in the distribution system or individual load.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

PowerLogic™ PFC Smart Cap Banks

Your load variation

Variable or unstable load

Automatic compensation

Network harmonic pollution level

TDDI	<20%
THD(U)	<7%

Choose
VarSet Detuned

480 V - 60 Hz
from 50 to 1000 kVAR

Load sensitive to transient switching

Automatic and transient-free compensation

TDDI	< 8%
THD(U)	<5%

Choose
VarSet Fast

480 V - 60 Hz
from 450 kvar to 1200 kvar

EcoStruxure™
Innovation At Every Level

EcoStruxure™ Power ready

- Seemless integration thanks to embedded Modbus communication
- Remote equipment follow up & control
- Remote troubleshooting
- Enable analytics & mobile benefits of EcoStruxure™ Power

© 2026 Schneider Electric
All Rights Reserved
4/6/2026





PowerLogic™ PFC Smart Cap Banks

The PowerLogic™ PFC Smart Capacitor Bank Detuned automatic capacitor banks provide power factor correction in electrical distribution networks with moderate levels of harmonic content. The series capacitor and reactor combination is tuned below the first dominant harmonic order (usually the 5th). This prevents resonance and harmonic amplification.

Table 4.32: General Characteristics

Electrical Characteristics	
Rated voltage	480 V / 60 Hz
Capacitance tolerance	-5%, +10%
Connection type	Three-phase
Power losses	< 6 W / kVAR
Maximum permissible over current	1.3 x In
Maximum permissible over voltage	1.1 x Un, 8 h every 24 h
Enclosure	
Degree of protection	NEMA 1/NEMA 1 Gasket
Color	RAL 7035
Degree of mechanical resistance	IK10
Controller	
PowerLogic™ PFC	PowerLogic™ PFC controller with embedded Modbus communication
Head circuit breaker protection	
Without incoming circuit breaker	• Lug connection • LV PFC Bank must be protected by a circuit breaker or by a fused disconnector from upstream switchboard.
With incoming circuit breaker	PowerPacT™ with rotary handle up to 200 kVAR, toggle switch above 200 kVAR
Step	
Capacitors type	• PowerLogic™ PFC Capacitor 575 V for network voltage 480 V • Maximum overcurrent: 1.8 x In • 3 ph overpressure disconnection system • Discharge resistor 50 V - 1mn
Contactors	Dedicated to capacitor switching
Detuned reactor	• PowerLogic™ PFC DR • Overheating protection by thermostat
Circuit breaker protection	PowerPacT
Temperature control	
Double control	By thermostat and by controller
Communication	
Modbus	RS-485
Installation	
Customer connection	Top Entry
Auxiliary transformer	120 V included - no need for additional supply
CT not included	• 5 VA - secondary 1 or 5 A • To be installed upstream of the load and capacitor bank
GenSet contact	Available for disconnection with generator
Alarm contact	Available for remote warning signal

Options available on request:

- Fixed stages (by controller programming)
- Custom staging ratios
- Bottom cable entry
- Icc level up to 100 kA

Environment

- Installation: Indoor
- Ambient temperature: 15°F to 114.8°F (-10°C to 46°C)
- Humidity: Up to 95%
- Maximum altitude: 6500 feet (2000 m)

Standards

- cCSAus approved
- CSA 22.2 No. 190
- UL810, UL508a

Environmental Certifications

- Produced in 14001 certified plants, product environmental profile available

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

PowerLogic™ PFC

Low Voltage Capacitor Bank – Detuned (Network 480V / 60Hz – Tuning order 4.2)

Table 4.33: Network voltage 480 V - 60 Hz

References	Power (kVAR)	Smallest Step	Resolution	Electrical Steps	Physical Steps	Breaking Capacity	Main Circuit Breaker	Enclosure Type	Enclosure Size (H x W x D) mm	Max. Weight (kg/lbs)
With incoming Circuit Breaker										
VA050B40140	050	25	2x25	2	2	65 kA	HLM36100	VAF3P	1300 x 1300 x 400 (51.2 x 51.2 x15.7) in.	265/585
VA075B40140	075	25	25 + 50	3	2		HLM36125			
VA100B40140	100	25	2x25 + 50	4	3		JLM36175			
VA125B40140	125	25	25 + 2x50	5	3		JLM36200			
VA150B40140	150	25	2x25 + 2x50	6	4		LLM36600U31X			
VA175B40140	175	25	25 + 3x50	7	4		LLM36600U31x			
VA200B40140	200	50	4x50	4	4		LLM36600U31X			
VA250B40140	250	50	50 + 2x100	5	3		LJM36600U31X	VAF1P	2200 x 1000 x 600 (86.6 x 39.4 x 23.6) in.	435 / 959
VA300B40140	300	100	3x100	3	3		LJM36600U31X			460 /1014
VA350B40140	350	50	50 + 3x100	7	4		PJF36080U31A			500 /1102
VA400B40140	400	100	4x100	4	4		PJF36100U31A			530 /1168
VA450B40140	450	50	50 + 4x100	9	5		PJF36100U31A			580 / 1278
VA500B40140	500	100	5x100	5	5		PJF36120U31A			6132200 /
VA550B40140	550	50	50 + 5x100	11	6		PJF36120U31A	VAF4P	2200 x 1800 x 600 (86.6 x 70.9 x 23.6) in.	750 / 1653
VA600B40140	600	100	6x100	6	6		PJF36120CU31A			775 / 1708
VA650B40140	650	50	50 + 6x100	13	7		PJF36120CU31A			820 / 1807
VA700B40140	700	100	7x100	7	7		RKF36160CU31A	VAF5P	2200 x 2000 x 600 (86.6 x 78.7 x 23.6) in.	845 / 1862
VA750B40140	750	50	50 + 7x100	15	8		RKF36160CU31A			892 / 1966
VA800B40140	800	100	8x100	8	8		RKF36160CU31A			920 / 2028
VA900B40140	900	100	9x100	9	9		RKF36160CU31A			990 / 2182
VAX00B40140	1000	100	10x100	10	10		RLF36200CU31A			1060 / 2336

References	Power (kVAR)	Smallest Step	Resolution	Electrical Steps	Physical Steps	Short-time Withtand Current	Recommended Upstream Protection	Enclosure Type	Enclosure Size (H x W x D) mm	Max. Weight (kg/lbs)
With Main Lug										
VA050M40140	050	25	2x25	2	2	25 kA/ 3 cycles	HML36100	VAF3P	1300 x 1300 x 400 (51.2 x 51.2 x 15.7) in.	265 / 585
VA075M40140	075	25	25 + 50	3	2		HLM36125			
VA100M40140	100	25	2x25 + 50	4	3		JLM36175			
VA125M40140	125	25	25 + 2x50	5	3		JLM36200			
VA150M40140	150	25	2x25 + 2x50	6	4		LLM36600U31X			
VA175M40140	175	25	2 + 3x505	7	4		LLM36600U31X			
VA200M40140	200	50	4x50	4	4		LLM36600U31X			
VA250M40140	250	50	50 + 2x100	5	3	65 kA/ 4 cycles	LJM36600U31X	VAF1P	2200 x 1000 x 600 (86.6 x 39.4 x 23.6) in.	400 / 882
VA300M40140	300	100	3x100	3	3		LLM36600U31X			426 / 939
VA350M40140	350	50	5 0 + 3x100	7	4		PJF36080U31A			471 / 1038
VA400M40140	400	100	4x100	4	4		PJF36100U31A			498 / 1097
VA450M40140	450	50	50 + 4x100	9	5		PJF36100U31A			543 / 1197
VA500M40140	500	100	5x100	5	5		PJF36120U31A			570 / 1256
VA550M40140	550	50	50 + 5x100	11	6		PJF36120U31A	VAF4P	2200 x 1800 x 600 (86.6 x 39.4 x 23.6) in.	710 / 1565
VA600M40140	600	100	6x100	6	6		PJF36120CU31A			740 /1631
VA650M40140	650	50	50 + 6x100	13	7		PJF36120CU31A			785 / 1730
VA700M40140	700	100	7x100	7	7		RKF36160CU31A			810 /1785
VA750M40140	750	50	50 + 7x100	15	8		RKF36160CU31A			857 / 1889
VA800M40140	800	100	8x100	8	8		RKF36160CU31			883 / 1946
VA900M40140	900	100	9x100	9	9		RKF36160CU31A			955 / 2105
VAX00M40140	1000	100	10x100	10	10		RLF36200CU31A			1026 / 2261

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



AccuSine PFV+ Electronic VAR Control

AccuSine PFV+ is a very simple and effective means to eliminate leading or lagging power factor, reduce voltage fluctuations, enhance equipment operating life, and improve system power capacity. AccuSine PFV+ offers many features in one package that others require multiple models to accomplish.

AccuSine PFV+ can help you solve:

- Power factor
- Imbalance (specifically important for motor applications)
- Voltage stability (such as localized photovoltaic networks)
- Flicker
- AccuSine PFV+ integrates with EcoStruxure™ Power's edge control power management and control software and analytics services that scale to your demands and adapt to your needs.

AccuSine PFV+ Sizing

For proper sizing of AccuSine units, contact the Schneider Electric sales office or visit us at https://www.se.com/us/powerandenergy. To expedite the product selection process, please have a single line diagram and/or details of the application including sizes of transformers, non-linear and linear loads, and any existing filters and capacitors.

Table 4.34: AccuSine PFV+ Selection

PF Correction and Load Balancing (380-480V models 50/60Hz)							
Rated Current (A)	KVAR Rating @ Voltage	Catalog Number	Enclosure			Frame	Weight lb (kg)
			Rating	Style	Cable Entry		
60[1]	39.5 @ 380 41.6 @ 400 43.1 @ 415 49.9 @ 480	EVCP060D5IP00	IP00 (chassis)	Wall Mount	Bottom	1	194 (88)
		EVCP060D5N2	UL Type 2	Floor Standing	Top or Bottom	2	611 (277)
		EVCP060D5IP31	IP31				
		EVCP060D5N12	UL Type 12				642 (291)
		EVCP060D5IP54	IP54				
120[2]	79.0 @ 380 83.1 @ 400 86.3 @ 415 99.8 @ 480	EVCP120D5IP00	IP00 (chassis)	Wall Mount	Bottom	3	249 (113)
		EVCP120D5N2	UL Type 2	Floor Standing	Top or Bottom	4	615 (279)
		EVCP120D5IP31	IP31				
		EVCP120D5N12	UL Type 12				646 (293)
		EVCP120D5IP54	IP54				
200[3]	131.6 @ 380 138.6 @ 400 143.8 @ 415 166.3 @ 480	EVCP200D5IP00	IP00 (chassis)	Wall Mount	Bottom	5	377 (171)
		EVCP200D5N1	UL Type N1	Floor Standing	Top or Bottom	11	800 (363)
		EVCP200D5N2	UL Type 2			6	846 (384)
		EVCP200D5IP31	IP31				
		EVCP200D5N12	UL Type 12				887 (402)
		EVCP200D5IP54	IP54				
300[4]	197.5 @ 380 207.8 @ 400 215.6 @ 415 249.4 @ 480	EVCP300D5IP00	IP00 (chassis)	Wall Mount	Bottom	7	463 (210)
		EVCP300D5N1	UL Type N1	Floor Standing	Top or Bottom	11	887 (402)
		EVCP300D5N2	UL Type 2			8	930 (422)
		EVCP300D5IP31	IP31				
		EVCP300D5N12	UL Type 12				961 (436)
		EVCP300D5IP54	IP54				

Table 4.35: PowerLogic™ PCS+ and AccuSine PFV + Exterior Dimensions

Frame Size	Exterior Dimensions		
	Height in (mm)	Width in (mm)	Depth in (mm)
1	51.18 (1300)	16.57 (421)	13.74 (349)
2	82.68 (2100)	31.50 (800)	19.69 (500)
3	55.12 (1400)	16.57 (421)	15.12 (384)
4	82.68 (2100)	31.50 (800)	19.69 (500)
5	52.09 (1323)	22.91 (582)	17.24 (438)
6	82.68 (2100)	35.43 (900)	23.62 (600)
7	61.42 (1560)	22.91 (582)	17.24 (438)
8	82.68 (2100)	35.43 (900)	23.62 (600)
9	82.68 (2100)	51.18 (1300)	19.69 (500)
10	82.68 (2100)	55.12 (1400)	23.62 (600)
11	78.74 (2000)	31.50 (800)	23.62 (600)

AccuSine+ Wall Mount Conversion Kit

- Converts IP00 (UL Type Open) to IP20 (UL Type 1) wall mounted enclosed assemblies.
- Includes HMI mounting plate and cable entry enclosure for mounting on the bottom of the IP00 assemblies.

Table 4.36: AccuSine+ Wall Mount Kits

Wall Mount Kit Reference	Assembled Dimensions — IP20				IP20 Assembly	Cable Entry Enclosure
	Unit Rating (A)	Height in (mm)	Width in (mm)	Depth in (mm)	Weight lb (kg)	Weight lb (kg)
PCSPWMKIT60A	60	60.24 (1530)	16.57 (421)	13.7 (349)	214.51 (97.3)	19.18 (8.7)
PCSPWMKIT120A	120	64.17 (1630)	16.57 (421)	15.12 (384)	269 (122)	20.5 (9.3)
PCSPWMKIT300A	200	64.64 (1642)	22. 64 (575)	17.13 (435)	396.83 (180)	19 (8.6)
PCSPWMKIT300A	300	74 (1882)	22.64 (575)	17.13 (435)	481.93 (218.6)	19 (8.6)

[1] 60 A IP20/UL Type 1 configuration requires ordering two items: EVCP060D5IP00 and PCSPWMKIT60A; adds 9.12 in (232 mm) to length and 19.18 lb (8.7 kg).
[2] 120 A IP20/UL Type 1 configuration requires ordering two items: EVCP120D5IP00 and PCSPWMKIT120A; adds 9.13 in (232 mm) to length and 20.5 lb (9.3 kg).
[3] 200 A IP20/UL Type 1 configuration requires ordering two items: EVCP200D5IP00 and PCSPWMKIT300A; adds 10.75 in (273 mm) to length and 19 lb (8.6 kg).
[4] 300 A IP20/UL Type 1 configuration requires ordering two items: EVCP300D5IP00 and PCSPWMKIT300A; adds 10.75 in (273 mm) to length and 19 lb 8.6 kg).

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

AccuSine Current Transformers

Split-Core Design

Construction

Directional silicon steel is used for the flexible core. Secondary windings are of copper. Unit is encapsulated in silicone rubber, which protects against moisture, dirt, oil, and corona.

Table 4.37: Specifications

Description		Specification
Insulation Level		0.72 kV BIL 10 kV Full Wave
Frequency		50-400 Hz
Thermal Factor		1.25 at 30 °C; 1.0 at 55 °C
Operating Temp Range		-45 °C to +55 °C
Altitude		Up to 4000 Meters
Accuracy (Primary rating)	200 through 300	4 %
	400 through 500	3 %
	600 through 800	2 %
	1000 through 6000	1 %
Secondary Leads		3.65 m with spade connectors
Color		Transformer (red) - Leads (yellow)
Remains flexible from -45° to +200 °C		



Twisting motion opens to CT diameter of round CT and smaller distance of rectangular CT.
NOTE: Open split-core with a twisting motion only.

Table 4.38: Round Split-Core Design

Reference Number by Secondary Current		Maximum load (A)	Inside diameter (ID) in (mm) - A	Burden Capacity (Ω)		Weight lb (kg)
5 A	1 A			5 A	1 A	
PCSPCTFCL50054	PCSPCTFCL50014	500	4 (101.6)	0.120	2.0	3.35 (1.6)
PCSPCTFCL100054	PCSPCTFCL100014	1000	4 (101.6)	0.200	10.0	3.53 (1.6)
PCSPCTFCL150054	—	1500	4 (101.6)	0.375	15.0	3.53 (1.6)
PCSPCTFCL160054	—	1600	4 (101.6)	0.375	15.0	3.53 (1.6)
PCSPCTFCL50056	—	500	6 (152.4)	0.120	2.0	4.19 (1.9)
—	PCSPCTFCL100016	1000	6 (152.4)	0.200	10.0	4.19 (1.9)
PCSPCTFCL120056	—	1200	6 (152.4)	0.200	15.0	4.19 (1.9)
PCSPCTFCL150056	PCSPCTFCL150016	1500	6 (152.4)	0.375	15.0	4.19 (1.9)
PCSPCTFCL200056	PCSPCTFCL200016	2000	6 (152.4)	1.000	18.0	4.19 (1.9)
PCSPCTFCL250056	—	2500	6 (152.4)	1.400	20.0	4.19 (1.9)
PCSPCTFCL300056	—	3000	6 (152.4)	1.800	20.0	4.19 (1.9)
—	PCSPCTFCL200018	2000	8 (203.2)	1.000	18.0	5.51 (2.5)
PCSPCTFCL250058	—	2500	8 (203.2)	1.400	20.0	5.51 (2.5)
PCSPCTFCL400058	—	4000	8 (203.2)	1.800	20.0	5.51 (2.5)
PCSPCTFCL500058	—	5000	8 (203.2)	1.800	20.0	5.51 (2.5)
PCSPCTFCL2500511	—	2500	11 (279.4)	1.400	20.0	7.5 (3.4)

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



Twisting motion opens to CT diameter of round CT and smaller distance of rectangular CT.
NOTE: Open split-core with a twisting motion only.

Table 4.39: Rectangular Split-Core Design

Reference Number by Secondary Current		Maximum load (A)	Inside diameter (ID) in (mm)		Burden Capacity (Ω)		Weight lb (kg)
5 A	1 A		A	B	5 Amp	1 Amp	
PCSPCTFCL5005R	PCSPCTFCL5001R	500	2.74 (69.8)	6.6 (168.2)	0.12	2.0	4.19 (1.9)
PCSPCTFCL10005R	PCSPCTFCL10001R	1000	2.74 (69.8)	6.6 (168.2)	0.2	10.0	4.19 (1.9)
PCSPCTFCL12005R	PCSPCTFCL12001R	1200	2.74 (69.8)	6.6 (168.2)	0.2	15.0	4.19 (1.9)
PCSPCTFCL15005R	PCSPCTFCL15001R	1500	2.74 (69.8)	6.6 (168.2)	0.375	15.0	4.19 (1.9)
PCSPCTFCL16005R	PCSPCTFCL16001R	1600	2.74 (69.8)	6.6 (168.2)	0.375	15.0	4.19 (1.9)
PCSPCTFCL20005R	—	2000	2.74 (69.8)	6.6 (168.2)	1	18.0	4.19 (1.9)
PCSPCTFCL30005R	—	3000	2.74 (69.8)	6.6 (168.2)	1.8	20.0	4.19 (1.9)
PCSPCTFCL25005R411	PCSPCTFCL25001R411	2500	4 (101.6)	11 (279.4)	1.4	20.0	6.17 (2.8)
PCSPCTFCL30005R411	—	3000	4 (101.6)	11 (279.4)	1.8	20.0	6.17 (2.8)
PCSPCTFCL40005R411	—	4000	4 (101.6)	11 (279.4)	1.8	20.0	6.17 (2.8)
PCSPCTFCL50005R411	—	5000	4 (101.6)	11 (279.4)	1.8	20.0	6.17 (2.8)

Round Solid-Core Design



Table 4.40: Specifications

Description	Specification
Frequency	50-400 Hz
Class	0.6 kV, 10 kV BIL Full Wave
Flexible Leads	UL1015, 105 °C; CSA approved; 16 AWG (1.31 mm²), 609.6 mm
Weight	Approximately 0.68 kg
Accuracy	1 %


Table 4.41: Round Solid-Core Design

Reference Number by secondary current		Maximum load (Amps)	Burden Capacity (Ω)	
5 Amps	1 Amp		5 Amp	1 Amp
—	PCSPCT7RL2011	200	0.5	5.0
PCSPCT7RL3015	PCSPCT7RL3011	300	0.5	5.0
PCSPCT7RL4015	PCSPCT7RL4011	400	0.6	7.5
PCSPCT7RL5015	PCSPCT7RL5011	500	1.0	10.0
PCSPCT7RL6015	PCSPCT7RL6011	600	1.2	12.5
PCSPCT7RL7515	PCSPCT7RL7511	750	1.2	12.5
PCSPCT7RL8015	PCSPCT7RL8011	800	1.4	20.0
PCSPCT7RL1025	PCSPCT7RL1021	1000	1.4	25.0
PCSPCT7RL1225	PCSPCT7RL1221	1200	1.4	15.0
PCSPCT7RL1525	PCSPCT7RL1521	1500	1.6	20.0
PCSPCT7RL1625	PCSPCT7RL1621	1600	2.0	25.0

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

VarSet Hybrid

Rebranded!

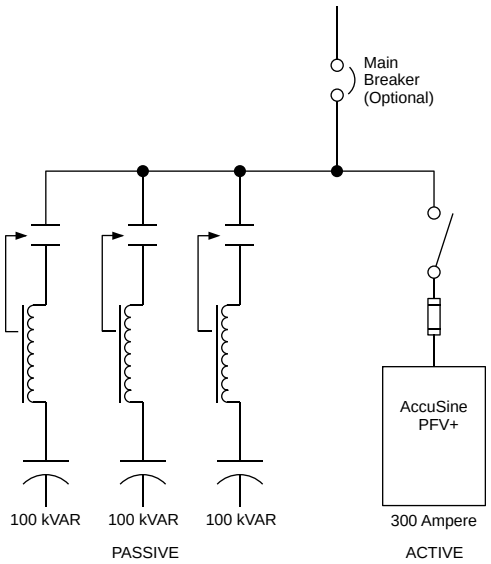

Topology (Typical)

Main Features:

- Ultra fast reactive current compensation for transient or cyclical loads
- Infinitely variable control
- Instantaneous response for inrush support
- Independently compensates each phase
- Heavy duty dry capacitors provide no risk of fluid leakage, no environmental pollution, and no need for drip pans
- Detuned iron core reactors prevent resonance
- IGBT based power electronic technology
- Stepless power factor correction
- Best-in-class harmonic cancellation up to 50th harmonic and less than 3% THDi
- Energy efficient 3-level IGBT inverter technology
- All major components from Schneider Electric

Power quality issues like harmonics and reactive power can cause problems including equipment damage and reduced reliability. In industrial networks, highly fluctuating loads like spot welders can cause voltage fluctuations and/or flicker that can lead to process malfunctions. The detrimental effects are increased operating expenses, expensive downtime, overheating equipment or poor quality on manufactured parts.

VarSet Hybrid systems provide instantaneous and infinitely variable power factor correction for industrial networks containing highly transient or unstable loads, as well as system compensation for large AC motor inrush current.

The VarSet Hybrid system integrates conventional power factor correction systems and the latest IGBT-based solutions to provide ultra rapid response and infinitely variable kVAR control never before seen in a power factor correction product. Specifically designed for the instantaneous support required by welding equipment, the VarSet Hybrid eliminates voltage sags and voltage flicker while increasing system capacity, providing energy savings and improving weld quality. It also provides current inrush support for applications such as large horsepower motor starting. The VarSet Hybrid is comprised of a Detuned Capacitor Bank with either an Active Harmonic Filter or an Electronic Var Compensator.

Active Harmonic Filters (AHF) are static power electronic products that employ digital logic and IGBT semiconductors to synthesize a current waveform that is injected into the electrical network to cancel harmonic currents caused by nonlinear loads. AHF employ current transformers to measure the load current to determine the content of harmonic current present. By injecting the synthesized current, network harmonic currents are greatly mitigated, thus reducing the heating effects of harmonic current and reducing voltage distortion.

AHF also have the ability to correct for poor displacement power factor (DPF) and provide for mains current balancing. DPF correction can be provided for either leading (capacitive) or lagging (inductive) loads. Mains current balancing is achieved by measuring the negative sequence current present and injecting the inverse negative sequence current to balance the current for the upstream network.

An Electronic Var Compensator (EVC) is a power electronic device consisting of insulated gate bipolar transistors (IGBT) that switch into the AC lines to modulate the output to correct the displaced reactive current (leading or lagging) and balance the current for the power source (also known as negative sequence current).

Detuned Capacitor Banks are automatic capacitor banks made of several capacitor steps controlled by a power factor (PF) controller. They are able to adjust PF to any value between 0.8 lagging and unity. When the PF differs from the target setting for more than 1 second, the capacitor switching modules switch stages as needed to bring the PF as close as possible to the target PF. Switching can be accomplished by electro-mechanical contactors or solid state switches.

The VarSet Hybrid is a custom solution that is engineered to order. Your local Schneider Electric representative can help you select the correct hybrid solution for your specific needs. To learn more, visit us at https://www.se.com/us/powerandenergy.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



AccuSine PCS+ Active Harmonic Filter (AHF)

AccuSine PCS+ Active Harmonic Filter (AHF) injects harmonic current to cancel harmonic current in the electrical distribution system. This reduced harmonic level results in improved electrical network reliability and reduced operating cost. AccuSine PCS+ is simple to size, install, set up and operate. In addition, AccuSine PCS+ eliminates the complex harmonic compliance limit calculations and removes nuisance harmonics from the electrical network.

The Problem: Power electronic devices that have rapid and frequent load variations have become abundant today due to their many process control related and energy saving benefits. However, they also bring a few major drawbacks to electrical distribution systems; harmonics and rapid change of reactive power requirement. Harmonics may disrupt normal operation of other devices and increase operating costs. Symptoms of problematic harmonic levels include overheating of transformers, motors, drives, cables, thermal tripping of protective devices and logic faults of digital devices. In addition, the life span of many devices can be reduced by elevated operating temperature.

The Solution: The AccuSine PCS+ AHF provides the simplest and most effective means to mitigate harmonics, to reduce process related voltage fluctuations. The AccuSine PCS+ AHF actively injects opposite harmonics current on the source side of the load. In addition, it:

- Decreases harmonic related overheating of cables, switchgear and transformers
- Reduces downtime caused by nuisance thermal tripping of protective devices
- Increases electrical network reliability and reduces operating costs
- Corrects to the 51st harmonic, reduce harmonics level to meet IEEE 519, IEC 61000 3-4, and UK G5/4-1 standards.
- Compensates entire network or specific loads depending on installation point

Standard Features:

- Real-time dynamic current injection for harmonic cancellation and VAR compensation (lead or lag power factor)
- Load balancing capability
- Parallel connection allows for easy retrofit and installation of multiple units for large networks
- Response to load fluctuations within 2 cycles for harmonics, 1/4 cycle for power factor or load balancing
- Full color touch screen HMI (Human Machine Interface)
- UL Type 1, UL Type 2, UL Type 12, IP31, and IP54 enclosures
- Seismic rated per ICC IBC and ASCE 7
- UL, CE, ABS, and CSA certified
- AccuSine PCS+ integrates with EcoStruxure™ Power's edge control power management and control software and analytics services that scale to your demands and adapt to your needs.

AccuSine PCS+ Sizing: For proper sizing of AccuSine units, contact your local Schneider Electric representative or visit us at https://www.se.com/us/powerandenergy. To expedite the product selection process, please have a single line diagram and/or details of the application including sizes of transformers, non-linear and linear loads, and any existing filters and capacitors.

Table 4.42: PCS+ Active Harmonic Filter Selection

AccuSine PCS+ (380–480 V, 50/60 Hz)							
Rated Current	KVAR Rating @ Voltage	Catalog Number	Enclosure			Frame	Weight lb (kg)
			Rating	Style	Cable Entry		
60[5]	39.5 @ 380 41.6 @ 400 43.1 @ 415 49.9 @ 480	PCSP060D5IP00	IP00 (chassis)	Wall Mount	Bottom	1	194 (88)
		PCSP060D5N2	UL Type 2	Floor Standing	Top or Bottom	2	611 (277)
		PCSP060D5IP31	IP31				
		PCSP060D5N12	UL Type 12				642 (291)
		PCSP060D5IP54	IP54				
120[6]	79.0 @ 380 83.1 @ 400 86.3 @ 415 99.8 @ 480	PCSP120D5IP00	IP00 (chassis)	Wall Mount	Bottom	3	249 (113)
		PCSP120D5N2	UL Type 2	Floor Standing	Top or Bottom	4	615 (279)
		PCSCP120D5IP31	IP31				
		PCSP120D5N12	UL Type 12				646 (293)
		PCSP120D5IP54	IP54				
200[7]	131.6 @ 380 138.6 @ 400 143.8 @ 415 166.3 @ 480	PCSP200D5IP00	IP00 (chassis)	Wall Mount	Bottom	5	377 (171)
		PCSP200D5N1	UL Type N1	Floor Standing	Top or Bottom	11	800 (363)
		PCSP200D5N2	UL Type 2			6	846 (384)
		PCSP200D5IP31	IP31				
		PCSP200D5N12	UL Type 12				887 (402)
		PCSP200D5IP54	IP54				
300[8]	197.5 @ 380 207.8 @ 400 215.6 @ 415 249.4 @ 480	PCSP300D5IP00	IP00 (chassis)	Wall Mount	Bottom	7	463 (210)
		PCSP300D5N1	UL Type N1	Floor Standing	Top or Bottom	11	887 (402)
		PCSP300D5N2	UL Type 2			8	930 (422)
		PCSP300D5IP31	IP31				
		PCSP300D5N12	UL Type 12				961 (436)
		PCSP300D5IP54	IP54				

[5] 60 A IP20/UL Type 1 configuration requires ordering two items: PCSP060D5IP00 and PCSPWMKIT60A; adds 9.13 in (232 mm) to IP00 length and 19.18 lb (8.7 kg).
[6] 120 A IP20/UL Type 1 configuration requires ordering two items: PCSP120D5IP00 and PCSPWMKIT120A; adds 9.13 in (232 mm) to IP00 length and 20.5 lb (9.3 kg).
[7] 200 A IP20/UL Type 1 configuration requires ordering two items: PCSP200D5IP00 and PCSPWMKIT300A; adds 10.75 in (273 mm) to IP00 length and 19 lb (8.6 kg).
[8] 300 A IP20/UL Type 1 configuration requires ordering two items: PCSP300D5IP00 and PCSPWMKIT300A; adds 10.75 in (273 mm) to IP00 length and 19 lb (8.6 kg).

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



New!

AccuSine PCSn Active Harmonic Filter (AHF)

Part of the AccuSine+ family, the AccuSine PCSn is the ideal solution for harmonic mitigation in commercial buildings, light industry, and other less-harsh environments. In addition to 3-phase mitigation, AccuSine PCSn can compensate for neutral harmonic currents, typically present in building and commercial environments where single-phase non-linear loads are present.

- Configurable: One solution for multiple needs, AccuSine PCSn can be configured for Harmonic Mitigation + PF Improvement + Mains Load Balancing.
- Best-in-class performance to reduce THDi < 3%: Built on award winning AccuSine+ technology, this guarantees a harmonic-free system, improving system reliability, and increasing operational efficiency and uptime.
- Power Factor (cosφ), THDi, and THDv setpoint features provide system-level visibility and control, ensuring that you comply with utility code, and that your system is running at optimal efficiency.
- Harmonic mitigation eliminates harmonic current in the neutral. In a 3-phase system, unbalanced loads introduce a current in the neutral. Applying the mains load balancing function reduces the neutral current to zero, resulting in a perfectly stable system.
- Smart commissioning: Automatic CT polarity detection and correction, intelligent paralleling algorithm saves you time through unit self-identification, system view allows commissioning of the entire system from any one unit.
- Simple Scalability: Add more AccuSine modules as your harmonic mitigation needs change with your load requirements, easily integrating new modules through intelligent paralleling capabilities.
- With conventional power quality solutions you need high capital investment, incur large operating costs and may find it difficult to comply with IEEE 519 guidelines. The PCSn is the perfect alternative to conventional solutions like Harmonic Mitigation Transformers, Isolation Transformers, Passive Filters, Dual winding transformers.
- AccuSine PCSn integrates with EcoStruxure™ Power's edge control power management and control software and analytics services that scale to your demands and adapt to your needs.
- CE and $_{C}UL_{US}$ certified.

AccuSine PCSn Sizing: For proper sizing of AccuSine units, contact your local Schneider Electric representative or visit us at https://www.se.com/us/powerandenergy. To expedite the product selection process, please have a single line diagram and/or details of the application including sizes of transformers, non-linear and linear loads, and any existing filters and capacitors.

Table 4.43: AccuSine PCSn Commercial References

AccuSine PCSn 208–415 V, 50/60 Hz, UL Type 1, Wall Mount								
Catalog Number	Rated Current (A)	Neutral Rated Current (A)	Rated kVAR @ 208 V	Unit Type	Breaker Rating Required (A)[9]	Exterior Dimensions (H x W x D)	Mass	Cable Entry
PCSN020Y4N1	20 A	60 A	7.02	Main	25 A	57 in x 17.5 in x 10.5 in	163 lb	Bottom
PCSN030Y4N1	30 A	90 A	10.8	Main	40 A		163 lb	
PCSN050Y4N1	50 A	150 A	18.0	Main	63 A		163 lb	
PCSN060Y4N1	60 A	180 A	21.6	Main	80 A		196 lb	
PCSN060Y4N1E	60 A	180 A	21.6	Expansion	80 A		196 lb	

NOTE: All dimensions are indicative. Please refer to the dimensions in the installation manual and engineering drawings for design purposes.

[9] Applicable for TN-C, TN-S, TN-C-S grounding systems. For detailed information please refer to the AccuSine PCSn installation manual.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026



New!

PowerLogic™ AccuSine™ EVC+

Unlock the potential with true energy efficiency! PowerLogic AccuSine EVC+ is fast, stepless, modular, and can be wall-mounted. It can be configured for Power Factor Correction and Harmonic Mitigation, among others uses.

Electrical networks are changing dramatically

Tomorrow's power quality problems cannot be solved with yesterday's solutions. Traditional, capacitor-based, power factor correction solutions are not designed to support our customers' ambition towards Electricity 4.0 and Net Zero with fast-changing loads, hypersensitive electronics and distributed energy resources (DER).

EVC+ provides stepless VAR compensation to achieve perfect Power Factor (within 1 kVAR) and responds to load changes within 25µs.

Not your typical power factor correction system

In addition to providing superior performance for power factor correction for leading and lagging VAR control, PowerLogic AccuSine EVC+ can mitigate harmonics currents commonly seen in commercial and industrial applications (5th, 7th, 11th, and 13th).

Multiple units can be paralleled for faster commissioning (configure entire system from one unit) and to provide more VAR compensation.

Improve energy efficiency, increase savings immediately

Onboard wizard, automatic CT calibration for simple commissioning. Modular design to help ensure uptime and equipment reliability. On-target, stepless correction that complies with utility regulations.

Thermal reliability
- Dynamic cooling for optimized efficiency
- Withstand up to +122 °F without derating
- Maximum ambient temperature +127 °F

Reliable and robust
- Connectivity-ready
- Cybersecure
- Seismically tested to 2.47g
- Built-in EMC filter
- THDv ≤ 15% withstand

Certifications and Compliance
- US and CSA
- DNV and ABS
- HCAI (OSHPD)

Table 4.44: Electronic VAR Compensator / Static VAR Generator

Network Rated Voltage	Installation	Standards	Certifications	Enclosure Mounting	Enclosure Degree of Protection	Reactive Power Ratings (50/60 Hz)	Catalog Number
208–480 Vac	Indoor	UL 508 CSA C22.2 No 14 ISO 9001 IEEE 519-2014 IEC 62477-1 IEC 61439-1	CE cULus RCM	Tray mounted	IP00	75 kvar 380 Vac 75 kvar 480 Vac 47 kvar 240 Vac 41 kvar 208 Vac	EVCP075D5CH00
						100 kvar 380 Vac 100 kvar 480 Vac 63 kvar 240 Vac 55 kvar 208 Vac	EVCP100D5CH00
				Wall Mounted	UL Type 1	75 kvar 380 Vac 75 kvar 480 Vac 47 kvar 240 Vac 41 kvar 208 Vac	EVCP075D5W01
						100 kvar 380 Vac 100 kvar 480 Vac 63 kvar 240 Vac 55 kvar 208 Vac	EVCP100D5W01
					UL Type 2	75 kvar 380 Vac 75 kvar 480 Vac 47 kvar 240 Vac 41 kvar 208 Vac	EVCP075D5W02
						100 kvar 380 Vac 100 kvar 480 Vac 63 kvar 240 Vac 55 kvar 208 Vac	EVCP100D5W02
			CE cULus RCM DNV ABS	Tray mounted	IP00	100 kvar 380 Vac 100 kvar 480 Vac 63 kvar 240 Vac 55 kvar 208 Vac	EVCM100D5CH00
				Wall Mounted	IP21		EVCM100D5W21

Visit **PowerLogic AccuSine EVC Plus** online at www.se.com/us for the most current product listings and documentation.

© 2026 Schneider Electric
All Rights Reserved
4/6/2026

Section 5

Protection, Control, and Energy Automation

Protection Relays


PowerLogic™ P7


PowerLogic™ P5


PowerLogic™ P3


A125


A3


Sepam™


MiCOM™

SAGE RTUs


2400


1410


1430


1450


4400


3030 Magnum

Easergy™ T3000 RTUs


HU250


SC150


LV150


PS50


PS25

Introduction — Energy Automation Solutions 5-2

Schneider Electric Energy Automation Solutions 5-2
Overview of System Protection Products 5-2

PowerLogic™ P Series Protection Relays 5-3

PowerLogic P Series — Introduction 5-3
PowerLogic P7 Range 5-4
PowerLogic P5 Range 5-9
PowerLogic P3 Range 5-12

PowerLogic A Series Arc Flash Protection 5-15

PowerLogic A Series Arc Flash Protection— Introduction 5-15
PowerLogic A125 Arc Flash Protection 5-15
PowerLogic A3 Arc Flash Protection 5-16

Sepam™ Protection Relays 5-17

The Sepam™ Range — Introduction 5-17
Sepam™ Protection Configurations 5-18
Sepam™ Characteristics 5-18
Sepam™ 80 Ordering Configurations 5-19
Sepam™ Substation Applications 5-20
Sepam™ Motor Applications 5-21
Sepam™ Transformer Applications 5-22
Sepam™ Generator Applications 5-23
Sepam™ Busbar Applications 5-24
Sepam™ Capacitor Applications 5-25

MiCOM Protection Relays 5-26

The MiCOM Range — Introduction 5-26
MiCOM Series Characteristics 5-26
MiCOM Self-Powered Applications 5-28
MiCOM Substation Applications 5-28
MiCOM Motor Applications 5-30
MiCOM Transformer Applications 5-31
MiCOM Generator Applications 5-32
MiCOM Busbar Applications 5-33
MiCOM Distance Applications 5-34
MiCOM Line Differential Applications 5-35
MiCOM Railway Applications 5-36

SAGE RTUs (Remote Terminal Units) 5-37

The SAGE RTU Range 5-37
SAGE 2400 RTUs 5-38
SAGE 3030 Magnum RTUs 5-39
SAGE 4400 RTUs 5-39
SAGE 1410 RTUs 5-40
SAGE 1430 RTUs 5-40
SAGE 1450 RTUs 5-41

Easergy™ T300 RTUs (Remote Terminal Units) 5-42

The Easergy T300 RTU Range 5-42
Easergy™ HU250 Communication Gateway 5-43
Easergy™ SC150 MV Switch Controller 5-43
Easergy™ LV150 LV Transformer Monitor 5-43

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Introduction — Schneider Electric Energy Automation Solutions

Schneider Electric has proven solutions for the protection, monitoring and control of any critical infrastructure power system, whether large or small. Starting with a full range of Protective Relays for Medium or Low voltage distribution systems that provide dependability and reliability, Schneider Electric fits the bill. PowerLogic, MiCOM and ECOFIT are the front line of protection. Add the V125 for Arc Flash protection and you have a robust system for equipment protection. Let Schneider Electric's Energy Automation Solutions provide the Protection, Monitoring, and Control you need!

Schneider Electric's ranges for Remote Terminal Units (RTU) includes SAGE and T300. SAGE is a rack mount solution offering IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library.

T300 is a modular form factor feeder RTU for Medium Voltage and Low Voltage public distribution network management.

System Protection Solutions

Schneider Electric's family of protective relays have been protecting power systems world wide for over 100 years. From electric utilities to commercial buildings and data centers, customers know that Schneider Electric has the right relay solution for them. Today's modern relays are much more than simple overcurrent devices. They provide power system protection as well as arc flash protection in one device all while communicating to SCADA or DCS systems seamlessly. Whether it is a new installation or a retrofit opportunity, Schneider Electric has the answer.



PowerLogic P7

PowerLogic P7

PowerLogic™ P7 Protection and Control Platform is a new high-end range that fulfills the needs of the most complex and advanced protection and control applications. It is the cornerstone for virtualization; with unparalleled flexibility and digital performance, PowerLogic P7 protection and control devices help secure your power system, improve network reliability, and provide predictive asset monitoring.

PowerLogic P7 is a comprehensive solution for medium and high voltage equipment with thermal and circuit breaker monitoring features. It offers an intuitive user experience with advanced, modular connectivity and condition monitoring capabilities.

Combined with PowerLogic™ Engineering Suite, it enables end users and system integrators to seamlessly configure, integrate, and maintain PowerLogic™ P7 devices in Schneider Electric's EcoStruxure™ Power Automation System (EPAS), EcoStruxure™ Power Operation (EPO), Power Monitoring Expert (PME), and third-party substation automation systems throughout their entire life cycle.



PowerLogic P5

PowerLogic P5

The PowerLogic P5 is a protective relay for more demanding medium voltage applications. It offers users dedicated features for industry-leading protection relay functionality to reduce risks, improve reliability, all with advanced connectivity. The P5 presents a major step forward for protection relays, bringing a number of best-in-class features together in one device.

- **Built-in arc-flash protection functions**
  Arc flash events can occur when switching or during unexpected conditions. The protection function detects if an arc-flash exists and takes action within milliseconds to isolate the connected circuit breaker.
- **Advanced cybersecurity**
  62443 SL1 compliant, the P5 has been designed with an advanced cybersecurity package. This means reduced exposure to cyber threats and improved operational security. Included by default are important security features such as password management, port hardening, and secured communication compliant to the latest international standards.
- **Intuitive withdrawable design**
  With a handle built in as part of the design, the P5 can be quickly disconnected or exchanged to speed up maintenance. Wiring, data, communication, and settings (including backup) can be stored with the panel and will be there when the relay is reconnected.
- **Improved recovery time**
  When maintenance or testing is required, the P5 helps dramatically decrease your outage recovery time. The backup memory can automatically restore settings, you can continue your operations in as little as 10 minutes.
- **Greater connectivity**
  The P5 protection relay features a wide variety of communication protocols and can support up to 3 Ethernet protocols simultaneously, including dual redundancy with PRP/HSR and RSTP protocols. All communication modules can be added at any time, including on-site, during the product life cycle to allow you to upgrade your device in line with future network evolutions.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



PowerLogic P3

PowerLogic P3

The P3 is a complete range of protective relays for medium voltage applications. The innovative package boasts more than 40 protection functions and a wide variety of communication protocols for enhanced connectivity and interoperability, including:

- Universal protection from a single box, with feeder, motor, and transformer protection functions
- Motor, transformer, generator differential protection
- Nine communication protocols in one box, including IEC 61850
- Embedded virtual injection testing system
- Built-in optical arc flash protection
- Programmable logic and protection stages

An example of Schneider Innovation at Every Level, the built-in virtual injection testing system enables a safer configuration process and gives you and your customers on-going peace of mind. Additionally, the P3 allows you to monitor your protection relay and circuit breaker, enabling full visibility of the health of your electrical installation.



A125 Arc Flash Module

PowerLogic A125 and A3 Arc Flash Protection

- **A125 Arc Flash Protection**
  Arc flash events pose serious risks to both personnel and equipment. The PowerLogic™ A125 arc flash protection offers rapid detection—within just 2 milliseconds—to help mitigate damage and enhance safety. Designed for use in low voltage (LV) and medium voltage (MV) switchgear, the A125 supports up to 4 optical point sensors, which can be strategically placed in key compartments such as cable, breaker, and bus sections. The module is set with simple DIP switches and can be set up to deliver zones of arc flash protection. Installation is easy with a DIN rail or a door mount option.
- **A3 Arc Flash Protection**
  The PowerLogic A3 is Schneider Electric's next-generation arc flash protection, engineered to protect both low-voltage (LV) and medium-voltage (MV) electrical systems. Building on the proven A125 platform, the A3 delivers ultra-fast 2 milliseconds arc detection, flexible multi-panel configurations, and scalable architecture supporting up to 50 sensors and 4 to 8 control outputs. It features light point and loop sensing, current condition monitoring, and preventive maintenance sensing—all with integrated communication capabilities. A3 arc flash provides reliable operation in harsh environments and is designed for easy installation.



Sepam Digital Relays

Sepam™ Digital Relays

Sepam relays feature outstanding modularity and are ideal for a myriad of applications, including industrial and commercial feeder, motor, transformer, generator, busbar, and capacitor applications. Built-in breaker control, automatic throwover, and zone selective interlocking logic makes Sepam easy to configure and test.



MiCOM Relays

MiCOM Relays

MiCOM relays provide utility grade protection with deep cyber security features. Large or small power systems; simple or complex applications are all covered in the MiCOM line of products.

PowerLogic protective relays are a complete range of devices for medium voltage applications, including feeder, motor, transformer, line, and protection. Built on more than 100 years of experience in medium-voltage protection relays with MiCOM, SEPAM, and Vamp, the new PowerLogic protective relays have been designed to meet the most demanding needs for electrical protection, connectivity, and safety, while taking a step forward in efficiency.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



New!

The PowerLogic P7 Range

Features and Benefits

Operational efficiency and digital experience

- Tailor and adapt to customer needs throughout device life cycle with highly flexible, modular hardware and easy-to-expand, application-oriented firmware
- Modular board design enhances device maintenance and reduces downtime
- IEC 61850 Ed. 2.1 provides more efficient delivery, engineering, operation and maintenance with seamless integration in power automation systems
- Easily interact via the large and highly intuitive 7″ color industrial touchscreen
- Process bus interface compliant with IEC 61869-13, IEC 61869-9, IEC 61850-9-2LE

Electrical safety and security

- Current transformer auto-shorting capability helps to provide enhanced safety during maintenance
- Reduce exposure to cybersecurity threats with IEC 62443-4-2 SL2 compliance
- Condition-monitoring allows targeted predictive maintenance to maximize asset life
- Increased device robustness with IP54 front face and IK7 protected impact-strength design of the 7" touch screen

Power availability and sustainability

- Avoid downtime with best-in-class, easily tailored protection applications
- Adapt to network evolutions with new flexible firmware application
- Future-ready, long-term solution

Refer to catalog NRJED323202EN for the PowerLogic P7 Series.

PowerLogic P7 Characteristics

Table 5.1: PowerLogic P7 Characteristics

Characteristics		P7 Protective Relay	P7 Merging Unit
Application	Feeder	●	—
	Motor differential	●	—
	Generator differential	●	—
	Transformer differential 2/3 windings	●	—
	Stand-alone merging unit	—	●
Case size		40 T	40 T
Flush/rack mounting		●/●	—
Wall mounting		—	SAMU
Binary inputs (max.)		40	40
Binary outputs (max.)		36	36
External modules	8 RTD Temperature sensors	0-1	0-1
	IRIG-B	●	●
Measuring inputs	Current	5-12	5-12
	Voltage	3-8	3-8
Power supply range	24–34 V dc	●	●
	48–125 V dc	●	●
	110–250 V ac/dc	●	●
HMI			
7" color touchscreen		●	—
Communication			
Rear ports	RS485, serial	1	1
	RJ45 Ethernet	1	1
	Redundant Ethernet port (SFP RJ45 or FO)	0-1	0-1
	Extension port	1	1
Front port	Mini-USB for configuration	1	—
Communication protocols	RSTP/PRP/HSR/Failover	●/●/●/●	●/●/●/●
	IEC 61850 Ed. 2.1	●	●
	Modbus Ethernet/RS485	●/●	●/●
	DNP3 Ethernet/RS485	●/●	●/●
	IEC61869-9	—	SAMU
Time synchronization	IEEE 1588 (PTP)	●	●
	SNTP	●	●
	IRIG-B	●	●
	Protocol	●	●
Other			
Hardware dimensions (W/H/D)	205/180/280 mm, 8/7/11 in.		

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

PowerLogic P7 Motor and Generator Applications

Table 5.2: Protection Functions for Motor and Generator Applications

Protection Functions	IEC 61850 Logical node	ANSI code	Motor application (stages instantiated)		Generator application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
Current protection							
Protection trip conditioning	PTRC	86	1	2	1	4	FALSE
Phase direction	PHRDIR	67	•	1	•	1	TRUE
Phase overcurrent	PHPTOC	50/51	2	2	2	4	TRUE
Ground direction	EFRDIR	67N	•	1	•	1	TRUE
Ground fault overcurrent	EFPTOC	50N/51N	2	2	2	4	TRUE
Sensitive ground fault overcurrent	VSEFPTOC	50SG/51SG	2	2	2	2	TRUE
Negative sequence overcurrent	NPSPTOC	46	2	2	2	2	TRUE
Inrush detection	IDPHAR	68ID	2	2	•	2	TRUE
Selective overcurrent logic (SOL)	SOLGAPC	N/A	1	1	1	1	FALSE
Phase undercurrent	PHPTUC	37	2	2	—	—	TRUE
Voltage dependent overcurrent	PHPVOC	51V	—	—	1	2	TRUE
Sensitive directional earthfault	PSDE	32N	•	2	•	2	TRUE
Ground admittance	EFPADM	21N	—	—	•	2	TRUE
Voltage protection							
Undervoltage	PHPTUV	27	2	2	2	2	TRUE
Overvoltage	PHPTOV	59	2	2	2	2	TRUE
Positive phase sequence undervoltage	PPSPTUV	27D	1	1	0	2	TRUE
Positive phase sequence overvoltage	PPSPTOV	N/A	•	2	•	2	TRUE
Neutral overvoltage	EFPTOV	59N	1	3	1	2	TRUE
Negative phase sequence overvoltage	NPSPTOV	47	1	1	1	1	TRUE
Inter-turn overvoltage	ITPTOV	59IT	—	—	•	1	TRUE
Overfluxing	PVPH	24	—	—	•	1	TRUE
Frequency protection							
Overfrequency	PTOF	81O	•	2	2	2	FALSE
Underfrequency	PTUF	81U	•	4	4	4	FALSE
Frequency supervised ROCOF	PFRC	81R	•	4	•	4	FALSE
Differential protection							
High impedance differential	HIZPDIF	87/64REF	•	1	•	1	TRUE
Biased differential protection	PHPDIF	87	•	1	•	1	TRUE
Low impedance differential	RGFPDIF	64REF	•	1	•	1	TRUE
Temperature protection							
Motor thermal overload	THMPTTR	49	1	1	1	1	TRUE
Overtemperature	STMP	38/49T	8	8	8	8	FALSE
Negative phase sequence thermal overload	NPSPTTR	49N	1	1	1	1	TRUE
Motor protection							
Motor monitoring	ZMOT	N/A	1	1	—	—	TRUE
Motor start-up supervision, locked rotor	PMSS	48	1	1	—	—	TRUE
Locked rotor	JAMPTOC	51LR	1	1	—	—	TRUE
Motor restart inhibition	PMRI	66	1	1	—	—	FALSE
Voltage check	VCPTUV	47	1	1	—	—	TRUE
Generator protection							
Third harmonic undervoltage	STPTUV	27TN	—	—	0	1	TRUE
Inter-turn protection based on split phase	ITPDIF	87G	—	—	•	1	TRUE
Inadvertent energization	IEPIOC	50/27	—	—	1	1	TRUE
Speed protection							
Overspeed	POVS	12	0	2	0	2	FALSE
Underspeed	PZSU	14	0	2	0	2	FALSE
Speed detection	TRTN	N/A	0	1	0	1	FALSE
Distance/Impedance protection							
Field failure	FFPDIS	40	•	1	•	1	TRUE
Underimpedance	UZPDIS	21	—	—	•	1	TRUE
Out of step	OOSPPAM	78	•	1	•	1	TRUE
Power protection							
Overpower	PPDOP	32P	—	—	2	4	FALSE
Reactive overpower	QPDOP	32Q	2	2	1	2	FALSE
Underpower	PPDUP	37P	2	2	1	1	FALSE

Table 5.3: Control Functions for Motor and Generator Applications

Control Functions	IEC 61850 Logical node	ANSI code	Motor application (stages instantiated)		Generator application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
Circuit breaker proxy	CBXCBR	N/A	1	1	1	1	TRUE
Circuit breaker control	CBCSWI	N/A	1	1	1	1	FALSE
Circuit breaker interlocking	CBCILO	N/A	1	1	1	1	FALSE
Circuit breaker failure	RBRF	50BF	1	1	1	1	TRUE
Switch proxy	SWXSWI	N/A	5	9	5	9	FALSE
Switch control	SWCSWI	N/A	5	9	5	9	FALSE
Switch interlocking	SWCILO	N/A	5	9	5	9	FALSE
Synchro-check	RSYN	25	—	—	1	1	TRUE

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 5.4: Monitoring Functions for Motor and Generator Applications

Monitoring Functions	IEC 61850 Logical node	ANSI code	Motor application (stages instantiated)		Generator application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
CT supervision	CTSSCTR	60	1	2	1	2	FALSE
VT supervision	VTSSVTR	60FL	1	1	1	2	FALSE
Circuit breaker supervision	CBSCBR	N/A	1	1	1	1	TRUE
Switch monitoring	SWSSWI	N/A	5	9	5	9	FALSE
DC battery voltage monitoring	ZBAT	N/A	1	1	1	1	FALSE
Bay dead	PDGAPC	N/A	1	1	1	1	TRUE
Voltage variation	QVVR	N/A	•	1	•	1	TRUE

Table 5.5: Logs and Records for Motor and Generator Applications

Logs and Records	IEC 61850 Logical node	ANSI code	Motor application (stages instantiated)		Generator application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
Sequence of event record	GENGLOG	N/A	1	1	1	1	FALSE
Disturbance record	DRRDRE	N/A	1	1	1	1	FALSE
Fault record	TCRGLOG	N/A	1	1	1	1	FALSE
Operation log	GENGLOG	N/A	1	1	1	1	FALSE
Power quality record	PQGLOG	N/A	•	1	•	1	FALSE

Table 5.6: Measurement Functions for Motor and Generator Applications

Measurement functions	IEC 61850 Logical node	ANSI code	Motor application (stages instantiated)		Generator application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
CT group measurement							
3ph current	VECAMMXU	N/A	1	2	1	2	FALSE
3ph RMS current	RMSAMMXU	N/A	1	2	1	2	FALSE
Sequence current	AMSQI	N/A	1	2	1	2	FALSE
1ph current	VECAXMMXU	N/A	1	2	1	2	FALSE
1ph RMS current	RMSAXMMXU	N/A	1	2	1	2	FALSE
VT group measurement							
3ph voltage	VECVMMXU	N/A	1	1	1	2	FALSE
3ph RMS voltage	RMSVMMXU	N/A	1	1	1	2	FALSE
Sequence voltage	VMSQI	N/A	1	1	1	2	FALSE
1ph voltage	VECVXMMXU	N/A	•	2	1	2	FALSE
1ph RMS voltage	RMSVXMMXU	N/A	•	2	1	2	FALSE
Bay measurement							
Fundamental frequency active, reactive and apparent power values, power factor	BAYMMXU	N/A	1	1	1	1	FALSE
RMS active, reactive and apparent power	BAYMMXU	N/A	1	1	1	1	FALSE
Minimum and maximum demand values: RMS phase currents	DVALMMXU	N/A	1	1	1	1	FALSE
Minimum and maximum demand values: active, reactive, apparent power and power factor	DVALMMXU	N/A	1	1	1	1	FALSE
Active and reactive of energy values	EMMTR	N/A	1	1	1	1	FALSE
Bay Fourier current	BAYMMXU	N/A	1	1	1	1	FALSE
Bay RMS current	BAYMMXU	N/A	1	1	1	1	FALSE
Bay sequence current	BAYMMXU	N/A	1	1	1	1	FALSE
Bay Fourier voltage	BAYMMXU	N/A	1	1	1	1	FALSE
Bay RMS voltage	BAYMMXU	N/A	1	1	1	1	FALSE
Bay sequence voltage	BAYMMXU	N/A	1	1	1	1	FALSE
Bay harmonics current and voltage	MHAI	N/A	•	1	•	1	FALSE

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

PowerLogic P7 Feeder and Transformer Applications

Table 5.7: Protection Functions for Feeder and Transformer Applications

Protection Functions	IEC 61850 Logical node	ANSI code	Feeder application (stages instantiated)		Transformer application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
Current protection							
Protection trip conditioning	PTRC	86	1	4	2	6	FALSE
Phase direction	PHRDIR	67	1	2	•	3	TRUE
Phase overcurrent	PHPTOC	50/51	4	8	2	6	TRUE
Ground direction	EFRDIR	67N	1	2	•	3	TRUE
Ground fault overcurrent	EFPTOC	50N/51N	4	8	2	6	TRUE
Sensitive ground fault overcurrent	VSEFPTOC	50SG/51SG	4	8	2	3	TRUE
Negative sequence overcurrent	NPSPTOC	46	4	8	2	3	TRUE
Inrush detection	IDPHAR	68ID	2	2	2	3	TRUE
Selective overcurrent logic (SOL)	SOLGAPC	N/A	1	1	1	1	FALSE
Voltage dependent overcurrent	PHPVOC	51V	1	2	•	2	TRUE
Sensitive directional earthfault	PSDE	32N	1	2	1	3	TRUE
Ground admittance	EFPADM	21N	•	2	•	2	TRUE
Voltage protection							
Undervoltage	PHPTUV	27	4	4	2	2	TRUE
Overvoltage	PHPTOV	59	4	4	2	2	TRUE
Positive phase sequence undervoltage	PPSPTUV	27D	2	2	—	—	TRUE
Positive phase sequence overvoltage	PPSPTOV	N/A	2	2	—	—	TRUE
Neutral overvoltage	EFPTOV	59N	4	4	2	2	TRUE
Negative phase sequence overvoltage	NPSPTOV	47	2	2	—	—	TRUE
Overfluxing	PVPH	24	—	—	1	2	TRUE
Frequency protection							
Overfrequency	PTOF	81O	2	2	2	2	FALSE
Underfrequency	PTUF	81U	4	4	4	4	FALSE
Frequency supervised ROCOF	PFRC	81R	4	10	4	10	FALSE
Differential protection							
High impedance differential	HIZPDIF	87/64REF	•	1	•	1	TRUE
Low impedance differential	RGFPDIF	64REF	•	1	2	3	TRUE
Basic transformer differential	TR2PDIF	87T	—	—	1	—	TRUE
Advanced transformer differential	TR3PDIF	87T	—	—	—	1	TRUE
Temperature protection							
Thermal overload	THFPTTR	49F	1	1	•	1	TRUE
Overtemperature	STMP	38/49T	•	8	•	8	FALSE
Distance/Impedance protection							
Underimpedance	UZPDIS	21	—	—	•	1	TRUE
Power protection							
Overpower	PPDOP	32P	2	2	•	2	FALSE
Reactive overpower	QPDOP	32Q	2	2	•	2	FALSE
Underpower	PPDUP	37P	2	2	•	2	FALSE

Table 5.8: Control Functions for Feeder and Transformer Applications

Control Functions	IEC 61850 Logical node	ANSI code	Feeder application (stages instantiated)		Transformer application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
Circuit breaker proxy	CBXCBR	N/A	1	2	1	3	TRUE
Circuit breaker control	CBCSWI	N/A	1	2	1	3	FALSE
Circuit breaker interlocking	CBCILO	N/A	1	2	1	3	FALSE
Circuit breaker failure	RBRF	50BF	1	2	1	3	TRUE
Switch proxy	SWXSWI	N/A	5	9	5	9	FALSE
Switch control	SWCSWI	N/A	5	9	5	9	FALSE
Switch interlocking	SWCILO	N/A	5	9	5	9	FALSE
Synchro-check	RSYN	25	1	2	•	2	TRUE
Auto-recloser	TRIRREC	79	1	2	—	—	FALSE

Table 5.9: Monitoring Functions for Feeder and Transformer Applications

Monitoring Functions	IEC 61850 Logical node	ANSI code	Feeder application (stages instantiated)		Transformer application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
CT supervision	CTSSCTR	60	1	3	2	3	FALSE
VT supervision	VTSSVTR	60FL	1	2	1	2	FALSE
Circuit breaker supervision	CBSCBR	N/A	1	2	1	3	TRUE
Switch monitoring	SWSSWI	N/A	5	9	5	9	FALSE
DC battery voltage monitoring	ZBAT	N/A	1	1	1	1	FALSE
Bay dead	PDGAPC	N/A	1	1	1	1	TRUE
Voltage variation	QVVR	N/A	•	1	•	1	TRUE

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 5.10: Logs and Records for Feeder and Transformer Applications

Logs and Records	IEC 61850 Logical node	ANSI code	Feeder application (stages instantiated)		Transformer application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
Sequence of event record	GENGLOG	N/A	1	1	1	1	FALSE
Disturbance record	DRRDRE	N/A	1	1	1	1	FALSE
Fault record	TCRGLOG	N/A	1	1	1	1	FALSE
Operation log	GENGLOG	N/A	1	1	1	1	FALSE
Power quality record	PQGLOG	N/A	•	1	•	1	FALSE

Table 5.11: Measurement Functions for Feeder and Transformer Applications

Measurement functions	IEC 61850 Logical node	ANSI code	Feeder application (stages instantiated)		Transformer application (stages instantiated)		Functional routing support
			Level 0	Level 1	Level 0	Level 1	
CT group measurement							
3ph current	VECAMMXU	N/A	1	3	2	3	FALSE
3ph RMS current	RMSAMMXU	N/A	1	3	2	3	FALSE
Sequence current	AMSQI	N/A	1	3	2	3	FALSE
1ph current	VECAXMMXU	N/A	1	3	2	3	FALSE
1ph RMS current	VECAXMMXU	N/A	1	3	2	3	FALSE
VT group measurement							
3ph voltage	VECVMMXU	N/A	1	2	1	2	FALSE
3ph RMS voltage	RMSVMMXU	N/A	1	2	1	2	FALSE
Sequence voltage	VMSQI	N/A	1	2	1	2	FALSE
1ph voltage	VECVXMMXU	N/A	1	2	1	2	FALSE
1ph RMS voltage	VECVXMMXU	N/A	1	2	1	2	FALSE
Bay measurement							
Fundamental frequency active, reactive and apparent power values, power factor	BAYMMXU	N/A	1	1	1	1	FALSE
RMS active, reactive and apparent power	BAYMMXU	N/A	1	1	1	1	FALSE
Minimum and maximum demand values: RMS phase currents	DVALMMXU	N/A	1	1	1	1	FALSE
Minimum and maximum demand values: active, reactive, apparent power and power factor	DVALMMXU	N/A	1	1	1	1	FALSE
Active and reactive of energy values	EMMTR	N/A	1	1	1	1	FALSE
Bay Fourier current	BAYMMXU	N/A	1	1	1	1	FALSE
Bay RMS current	BAYMMXU	N/A	1	1	1	1	FALSE
Bay sequence current	BAYMMXU	N/A	1	1	1	1	FALSE
Bay Fourier voltage	BAYMMXU	N/A	1	1	1	1	FALSE
Bay RMS voltage	BAYMMXU	N/A	1	1	1	1	FALSE
Bay sequence voltage	BAYMMXU	N/A	1	1	1	1	FALSE
Bay harmonics current and voltage	MHAI	N/A	•	1	•	1	FALSE

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



The PowerLogic P5 Range

Features and Benefits

- Built-in Arc flash protection
- Increased number of inputs and outputs for more possibilities
- Compliance to IEC62443 SL1 cybersecurity standard
- Nearby control via mobile app and embedded web-server
- Withdrawable design with secured CT connections while drawn-out
- Nine communication protocols out of the box
- Natively compliant to IEC61850 standard
- Modular design for communication port options and back-up memory
- Low Power Current Transformer (LPCT) / Voltage Transformer (LPVT) compatible
- Powerful logic configuration
- Built-in virtual injection testing

Refer to catalog NRJED313567EN for the PowerLogic P5 Series.

PowerLogic P5 Characteristics

Characteristics		P5F30	P5L30	P5M30	P5T30
Application	Feeder	•	—	—	—
	Motor	—	—	•	—
	Transformer	—	—	—	•
	Line Differential	—	•	—	—
Measuring inputs	Phase current	1/5A CT (x3) or LPCT (x3)			1/5A CT (x6)
	Residual current	1/5A CT & 1A CT or CSH core balance CT			1/5A CT (x2)
	Voltage	VT (x4) or LPVT (x4)			VT (x1)
Arc-flash sensor inputs		0 to 6 point sensors			
Digital	Inputs	4 to 40			
	Outputs	3 to 18 + Watchdog (WD)			
Temperature sensor inputs		0 to 16 (external modules)			
Front ports		1 USB for configuration 1 USB for USB key			
Nominal power supply		24–48 Vdc or 48–250 Vdc ; 100–230 Vac			
Ambient temperature, in service		-40 to 70°C (-40 to 158°F)			
Communication					
Hardware modules	Extension + Backup memory	•			
	Serial	•			
	Ethernet	•			
	2nd Ethernet	•			
Protocols	IEC61850 Ed1 & Ed2	•			
	IEC 60870-5-101 & 103	•			
	DNP3 over Ethernet	•			
	DNP3 serial	•			
	Modbus over Ethernet	•			
	Modbus serial	•			
	EtherNet IP	•			
Redundancy protocols	RSTP	•			
	PRP / HSR	•			
Time synchronization	Pulse, IRIG-B*[1]*	•			
	SNTP, PTP IEEE 1588 v2*[2]*	•			
Others					
Control		6 controlled + 2 monitored objects Mimic			
Logic (Matrix + Logic Equations)		•			
Optional Advanced Logic Engine (order option)		•			
Cybersecurity		Basic or Advanced			
Draw-out device (withdrawability)		•			
Hardware dimensions (W/H/D)		6.0 / 6.93 / 8.62 in. (152 / 176 / 219 mm)			

[1] IRIG-B module is a separate accessory
[2] PTP IEEE 1588 v2 is availaible with HSR/PRP communication board

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

PowerLogic P5 Applications

Table 5.12: Protection Functions

Protection Functions	ANSI code	P5F30	P5L30	P5M30	P5T30
Current protection					
Phase overcurrent	50/51	6	—	6	6
Earth/ground fault overcurrent[3]	50N/51N	6	—	6	6
Directional phase overcurrent	67	6	6	6	6
Directional earth/ground fault overcurrent	67N	6	6	3	6
Transient intermittent/ground fault	67NI	1	1	—	—
Neutral admittance	21YN	2	2	2	—
Negative sequence overcurrent	46 (I2/I1)	2	2	2	2
Current unbalance, Broken conductor	46BC (I2)	2	2	—	2
Breaker failure	50BF	1	1	1	2
Phase undercurrent	37	1	1	1	—
Switch on to fault (SOTF)	50HS	1	1	1	—
Cold load pickup (CLP or CLPU)	—	1	1	1	—
Voltage protection					
Undervoltage	27	3	3	3	—
Overvoltage	59	3	3	3	—
Earth/ground fault overvoltage	59N	3	3	3	3
Negative sequence overvoltage	47	2	2	2	—
Frequency protection					
Over and/or underfrequency	81	2	2	2	—
Underfrequency	81U	8	8	8	—
Rate of change of frequency	81R	9	9	—	—
Thermal protection					
Thermal overload	49	1	1	1	1
Temperature monitoring	38	16	16	16	16
Power protection					
Wattmetric earth/ground fault	32N	2	2	2	—
Directional active underpower	32/37N	2	2	2	—
Rotating machine protection					
Frequent start inhibition	66	—	—	1	—
Motor start-up supervision, locked rotor	48/51LR	—	—	1	—
Positive sequence undervoltage	27P	—	—	2	—
Underspeed[4]	14	—	—	2	—
Overspeed[4]	12	—	—	2	—
Anti-backspin[4]	ABS	—	—	1	—
Line protection					
Fault locator	21FL	1	1	—	—
Auto-Recloser	79	1	1	—	—
Transformer protection					
Magnetizing inrush detection	68H2	1	1	1	2
Fifth harmonic detection	68H5	1	1	1	—
2-winding transformer differential	87T	—	—	—	1
Thermostat / Buchholz	26/63	2	—	—	2
Capacitor protection					
Capacitor bank unbalance	51C	2	—	—	—
Capacitor overvoltage	59C	1	1	—	—
Other protection					
Arc-flash detection	50ARC	8	8	8	8
Programmable stages	99	8	8	8	8
Programmable curves	—	3	3	3	3
Control, monitoring, supervision					
Synchronization check	25	1	1	—	—
Lockout relay	86	1	1	1	1
CT supervision	60	1	1	1	2
VT supervision	60	1	1	1	—
Setting groups	—	4	4	4	4

Table 5.13: Control Functions

Control Functions	P5F30	P5L30	P5M30	P5T30
Control with Mobile application	•	•	•	•
Switchgear control and monitoring	6	6	6	6
Switchgear monitoring only	2	2	2	2
Programmable switchgear interlocking	•	•	•	•
Local control on single-line diagram	•	•	•	•
Local switchgear control with OPEN/CLOSE keys	•	•	•	•
Local/remote function	•	•	•	•
Function keys	7	7	7	7
Custom logic (equations)	•	•	•	•

Table 5.14: Measurement Functions

Measurement functions	P5F30	P5L30	P5M30	P5T30
RMS current values	•	•	•	•
RMS voltage values[5]	•	•	•	•
RMS active, reactive and apparent power	•	•	•	

[3] Number of stages depends on the number of residual current inputs.
[4] Function available if 12 DI / 4 DO board is present.
[5] For one voltage channel.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 5.14 Measurement Functions (cont'd.)

Measurement functions	P5F30	P5L30	P5M30	P5T30
Frequency	•	•	•	•
Fundamental frequency current values	•	•	•	•
Fundamental frequency voltage values[6]	•	•	•	•
Fundamental frequency active, reactive and apparent power values	•	•	•	
Power factor	•	•	•	
Motor speed detection[7]	•		•	
Energy values: active and reactive	•	•	•	
Demand values: phase currents	•	•	•	•
Demand values: active, reactive, apparent power and power factor	•	•	•	
Maximum demand values: phase currents	•	•	•	•
Minimum and maximum demand values: RMS phase currents	•	•	•	•
Minimum and maximum demand values: active, reactive, apparent power and power factor	•	•	•	
Maximum demand values over the last 31 days and 12 months: active, reactive, apparent power	•	•	•	
Minimum demand values over the last 31 days and 12 months: active, reactive power	•	•	•	
Maximum and minimum values: currents	•	•	•	•
Maximum and minimum values: voltages[6]	•	•	•	•
Maximum and minimum: frequency	•	•	•	

Table 5.15: Logs and Records

Logs and records	P5F30	P5L30	P5M30	P5T30
Sequence of event record	•	•	•	•
Disturbance record	•	•	•	•
Tripping context record	•	•	•	•
Relay maintenance data log	•	•	•	•
Security data log	•	•	•	•

Table 5.16: Monitoring Functions

Monitoring functions	ANSI code	P5F30	P5L30	P5M30	P5T30
Trip circuit supervision	74	1	1	1	2
Circuit breaker monitoring	—	1	1	1	1
Relay monitoring	—	•	•	•	•

[6] For one voltage channel.
[7] Function available if 12 DI / 4 DO board is present.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025


PowerLogic P3 Standard


PowerLogic P3 Advanced

The PowerLogic P3 Range

Features and Benefits

- Simplified configuration with the new eSetup Pro setting tool
- Faster delivery with on-the-shelf availability of standard configurations
- Simpler operation and maintenance with the Schneider Electric Power Device App
- Native support for a wide range of communication protocols: IEC 61850, Modbus TCP/IP, Modbus RTU, DNP 3.0, SPA-bus, IEC 60870-5-101, IEC 60870-5-103, ProfibusDP, and DeviceNet
- Embedded arc protection
- Built-in virtual injection testing
- Compliant with international standards

Refer to catalog NRJCAT17764EN for the PowerLogic P3 Series.

PowerLogic P3 Characteristics

Table 5.17: PowerLogic P3 Characteristics

Characteristics		PowerLogic P3 Standard	PowerLogic P3 Advanced					
		P3U30	P3F30	P3M30	P3G30	P3T32	P3M32	P3G32
Application	Feeder	•	•	—	—	—	—	—
	Transformer	•	—	—	—	•	—	—
	Motor	•	—	•	—	—	•	—
	Generator	•	—	—	•	—	—	•
Measuring inputs	Phase current	1/5A CT (x3)*[8]*	1/5A CT (x3)*[8]*			1/5A CT (x6)		
	Residual current	1/5A CT or 0.2/1A CT	(1/5A+0.2/1A) CT			2 x (1/5A+0.2/1A) CT		
	Voltage	VT (x4)	VT (x4)			VT (x4)		
Arc-flash sensor inputs		—	Up to 6 point sensors*[9]*			Up to 6 point sensors*[9]*		
Digital	Inputs	14/16	6 to 36			6 to 16		
	Outputs	11/8 + SF	10 to 21 + SF			10 to 13 + SF		
Analogue	Inputs	0 or 4*[9]*	0 or 4*[9]*			0 or 4*[9]*		
	Outputs	0 or 4*[9]*	0 or 4*[9]*			0 or 4*[9]*		
Temperature sensor inputs		0 or 8 or 12*[9]*	0 or 8 or 12*[9]*			0 or 8 or 12*[9]*		
Front port		USB type B	USB type B			USB type B		
Nominal power supply		24V dc or 24–48V dc or 48-230V ac/dc*[10]*	24 to 48V dc or 110-240V ac/dc			24 to 48V dc or 110-240V ac/dc		
Ambient temperature, in service		-40 to 60°C (-40 to 140°F)	-40 to 60°C (-40 to 140°F)			-40 to 60°C (-40 to 140°F)		
Communication								
Rear Ports RS232, IRIG/B, RS485, Ethernet		•	•			•		
Protocols	IEC61850 Ed1 & Ed2	•	•			•		
	IEC 60870-5-101 & 103	•	•			•		
	DNP3 over Ethernet	•	•			•		
	DNP3 serial	•	•			•		
	Modbus serial	•	•			•		
	Modbus over Ethernet	•	•			•		
	EtherNet IP*[11]*	•	•			•		
	DeviceNet	•	•			•		
	Profibus DP	•	•			•		
	SPAbus	•	•			•		
Redundancy protocols (RSTP/PRP)		•	•			•		
Control		4 objects 8 display	5–6 objects 3–8 display			5–6 objects 3–8 display		
Others								
Logic (Matrix + Logic equation)		•	•			•		
Withdrawable CT connector with shorting		•	—			—		
Hardware dimensions (W/H/D)		171 x 176 x 214 *[12]* mm / 6.73 x 6.93 x 8.43 in	264 x 177 x 208 mm / 10.39 x 6.97 x 8.19 in			264 x 177 x 208 mm / 10.39 x 6.97 x 8.19 in		

[8] P3U30 and P3F30 relays only. Consult us for other models
[9] Depends on optional module
[10] Check the available power supply range from the device's serial number label
[11] Consult us for availability
[12] 226 mm (8.90 in) with ring-lug connectors

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

PowerLogic P3 Applications

Table 5.18: Protection Functions

Protection functions	ANSI code	Standard (P3U)	Advanced (P3x)					
		P3U30	P3F30	P3M30	P3M32	P3G30	P3G32	P3T32
Distance	21	—	—	—	—	—	—	—
Under-impedance	21G	—	—	—	—	2	2	—
Fault locator	21FL	1	1	—	—	—	—	—
Overfluxing	24	—	—	—	—	1	1	1
Synchro-check	25	2	2	2	2	2	2	2
Undervoltage	27	3	3	3	3	3	3	3
Positive sequence undervoltage	27P	—	—	—	—	2	2	—
Stator ground-fault detection	27TN/64G	—	—	—	—	1	1	—
Directional active underpower	32	2	2	2	2	2	2	2
Phase undercurrent	37	1	—	1	1	—	—	—
Temperature monitoring	38/49T	12 *[13]*	12 *[13]*	12 *[13]*	12 *[13]*	12 *[13]*	12 *[13]*	12 *[13]*
Loss of field	40	—	—	—	—	1	1	—
Under-reactance	21/40	—	—	—	—	2	2	—
Negative sequence overcurrent (motor, generator)	46	2	—	2	2	2	2	2
Current unbalance, broken conductor	46BC	—	1	—	—	—	—	—
Incorrect phase sequence	47	1	—	1	1	—	—	—
Excessive start time, locked rotor	48/51LR	1	—	1	1	—	—	—
Thermal overload	49	1	1	1	1	1	1	1
Phase overcurrent	50/51	3	3	3	3	3	3	3
Ground fault overcurrent	50N/51N	5	5	5	5	5	5	5
Breaker failure	50BF	1	1	1	1	1	1	1
Switch On To Fault (SOTF)	50HS	1	1	1	1	1	1	1
Capacitor bank unbalance	51C	2	2	2	2	2	2	2
Voltage dependant overcurrent	51V	1	1	—	—	1	1	—
Overvoltage	59	3	3	3	3	3	3	3
Capacitor overvoltage	59C	—	1	—	—	—	—	—
Neutral voltage displacement	59N	3	2	2	2	2	2	2
CT supervision	60	1	1	1	1	1	2	2
VT supervision	60FL	1	1	1	1	1	1	1
Stator ground fault	64S	—	—	—	—	1	1	—
Frequent start inhibition	66	1	—	1	1	—	—	—
Directional phase overcurrent	67	4	4	4	4	4	4	4
Directional ground-fault o/c	67N	3	3	3	3	3	3	3
Transient intermittent	67NI	—	1	—	—	—	—	—
Magnetizing inrush detection	68F2	1	1	1	1	1	1	1
Fifth harmonic detection	68H5	1	1	1	1	1	1	1
Pole slip	78PS	—	—	—	—	1	1	—
Auto-recloser	79	—	5	—	—	—	—	—
Over or under frequency	81	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Rate of change of frequency	81R	1	1	1	1	1	1	1
Under frequency	81U	2	2	2	2	2	2	2
Lockout	86	1	1	1	1	1	1	1
Line differential	87L	—	—	—	—	—	—	—
Machine differential	87M	—	—	—	2	—	2	—
Transformer differential	87T	—	—	—	—	—	—	2
Programmable stages	99	8	8	8	8	8	8	8
Arc-flash detection stages	—	—	8	8	8	8	8	8
Cold load pick-up	—	1	1	1	1	1	1	1
Programmable curves	—	3	3	3	3	3	3	3
Setting groups *[14]*	—	4	4	4	4	4	4	4

Table 5.19: Control Functions

Control functions	Standard (P3U)	Advanced (P3x)					
	P3U30	P3F30	P3M30	P3M32	P3G30	P3G32	P3T32
Switchgear control and monitoring	6	6	6	6	6	6	6
Switchgear monitoring only	2	2	2	2	2	2	2
Programmable switchgear interlocking	•	•	•	•	•	•	•
Local control on single-line diagram	•	•	•	•	•	•	•
Local control with O/I keys	•	•	•	•	•	•	•
Local/remote function	•	•	•	•	•	•	•
Function keys	2	2	2	2	2	2	2
Custom logic (logic equations)	•	•	•	•	•	•	•
Control with Smart application	•	•	•	•	•	•	•

[13] Using external RTD module
[14] Not all protection functions have 4 setting groups. See details in the manual.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 5.20: Measurement

Measurement	Standard (P3U)	Advanced (P3x)					
	P3U30	P3F30	P3M30	P3M32	P3G30	P3G32	P3T32
RMS current values	•	•	•	•*[15]*	•	•*[15]*	•*[15]*
RMS voltage values	•	•	•	•	•	•	•
RMS active, reactive and apparent power	•	•	•	•	•	•	•
Frequency	•	•	•	•	•	•	•
Fundamental frequency current values	•	•	•	•*[15]*	•	•*[15]*	•*[15]*
Fundamental frequency voltage values	•	•	•	•	•	•	•
Fundamental frequency active, reactive and apparent power values	•	•	•	•	•	•	•
Power factor	•	•	•	•	•	•	•
Energy values active and reactive	•	•	•	•	•	•	•
Energy transmitted with pulse outputs	•	•	•	•	•	•	•
Demand values: phase currents	•	•	•	•	•	•	•
Demand values: active, reactive, apparent power and power factor	•	•	•	•	•	•	•
Minimum and maximum demand values: phase currents	•	•	•	•	•	•	•
Minimum and maximum demand values: RMS phase currents	•	•	•	•	•	•	•
Minimum and maximum demand values: active, reactive, apparent power and power factor	•	•	•	•	•	•	•
Maximum demand values over the last 31 days and 12 months: active, reactive, apparent power	•	•	•	•	•	•	•
Minimum demand values over the last 31 days and 12 months: active, reactive power	•	•	•	•	•	•	•
Maximum and minimum values: currents	•	•	•	•	•	•	•
Maximum and minimum values: voltages	•	•	•	•	•	•	•
Maximum and minimum values: frequency	•	•	•	•	•	•	•
Maximum and minimum values: active, reactive, apparent power and power factor	•	•	•	•	•	•	•
Harmonic values of phase current and THD	•	•	•	•*[15]*	•	•*[15]*	•*[15]*
Harmonic values of voltage and THD	•	•	•	•	•	•	•
Voltage sags and swells	•	•	•	•	•	•	•

Table 5.21: Logs and Records

Logs and Records	Standard (P3U)	Advanced (P3x)					
	P3U30	P3F30	P3M30	P3M32	P3G30	P3G32	P3T32
Sequence of event record	•	•	•	•	•	•	•
Disturbance record	•	•	•	•	•	•	•
Tripping context record	•	•	•	•	•	•	•

Table 5.22: Monitoring Functions

Monitoring functions	Standard (P3U)	Advanced (P3x)					
	P3U30	P3F30	P3M30	P3M32	P3G30	P3G32	P3T32
Trip circuit supervision (ANSI 74)	1	1	1	1	1	1	1
Circuit breaker monitoring	1	1	1	1	1	1	1
Relay monitoring	•	•	•	•	•	•	•

[15] Function available on both sets of CT inputs

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Critical infrastructure depends heavily on an uninterrupted supply of electric power. The PowerLogic™ A125 and A3 arc flash protection devices help accomplish this and are used to improve safety and mitigate equipment damage. Schneider Electric is the pioneer in the field of arc flash protection with close to 50,000 arc flash systems and 600,000 sensors in service worldwide.

The A125 arc flash protection device offers rapid detection, within 2 milliseconds, to help mitigate damage and enhance safety. It supports up to 4 optical point sensors that can be strategically placed in key compartments.

The A3 arc flash protection device delivers ultra-fast 2 milliseconds arc detection, flexible multi-panel configurations, and scalable architecture supporting up to 50 sensors and 4 to 8 control outputs.

A125 and A3 arc flash protection devices are designed for use in low voltage (LV) and medium voltage (MV) switchgear. For more information, see A125 Arc Flash Protection , page 5-15 and A3 Arc Flash Protection, page 5-16.



A125 Arc Flash Protection Unit

New!

A125 Arc Flash Protection

Arc flash events pose serious risks to both personnel and equipment. The PowerLogic™ A125 arc flash protection offers rapid detection—within just 2 milliseconds—to help mitigate damage and enhance safety. Designed for use in low voltage (LV) and medium voltage (MV) switchgear, the A125 supports up to 4 optical point sensors, which can be strategically placed in key compartments such as cable, breaker, and bus sections.

Configuration is straightforward using DIP switches, allowing users to define protection zones with ease. With flexible DIN rail or door-mount installation options, the A125 delivers reliable, compact, and cost effective arc flash protection for critical electrical infrastructure.


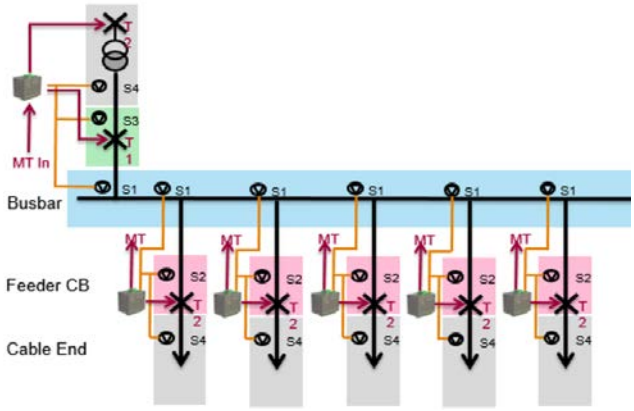


Table 5.23: A125 Arc Flash Protection Units

Description	Cortec Type	Note	Catalog Number
Arc flash protection unit	A125		REL52900
Arc Sensor — Shielded	VA1DA-6S	Cable length 6 m	REL52806
Arc Sensor — Shielded	VA1DA-20S	Cable length 20 m	REL52803
Door mount bracket		For A125 and A3	REL52903
Surface Mounting Plate for Sensors	VYX001	Z-shaped	REL52828
Surface Mounting Plate for Sensors	VYX002	L-shaped	REL52829
I/O unit 3 phase current 1 trip contact, ring lug connections	VAM4CSE	For A125 and A3	REL52916

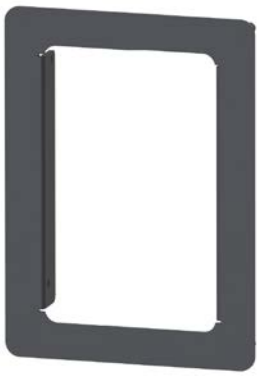

REL52903 Door Mount Bracket for A125 and A3


© 2025 Schneider Electric
All Rights Reserved
12/17/2025




VAM4CSERL
current module



Arc Flash point sensor
Type VA 1D

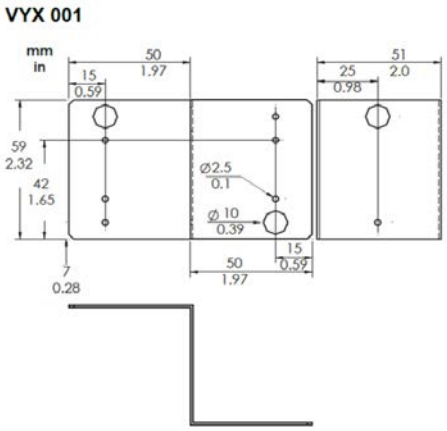

VYX 001
Surface Mounting Plate for sensors

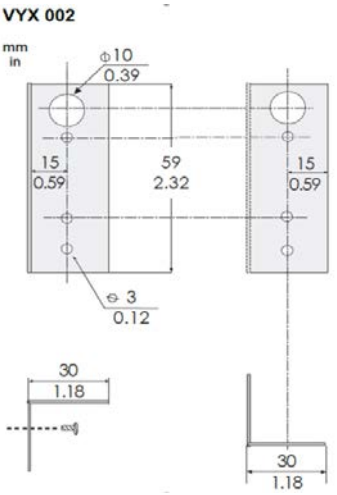

VYX 002
Surface Mounting Plate for sensors



A3 Arc Flash Protection Unit

New!

A3 Arc Flash Protection

The PowerLogic A3 is Schneider Electric's next-generation arc flash protection, engineered to protect both low-voltage (LV) and medium-voltage (MV) electrical systems. Building on the proven A125 platform, the A3 delivers ultra-fast 2 milliseconds arc detection, flexible multi-panel configurations, and scalable architecture supporting up to 50 sensors and 4 to 8 control outputs.

The A3 features light point and loop sensing, current condition monitoring, and preventive maintenance sensing—all with integrated communication capabilities. Designed for ease of installation and reliable operation in harsh environments, the A3 is ideal for applications such as:

- Switchgear
- Control panels
- Data centers
- Substations
- Renewable energy systems

It protects multiple panels by detecting light and current anomalies and isolating faults quickly, making it suitable for distribution systems, LV/MV PnB, and SI/EPC projects.

Table 5.24: PowerLogic A3 Selection Guide

PowerLogic A3	A3 Range			
	A3F6P	A3F12P	A3S6P	A3S12P
Number of channels of input sensor	6	12	6	12
Type of input sensors	Light Point Sensor			
Protection schemes	Non-selective, Incomer, Feeder	Non-selective, Incomer, Feeder	Non-selective, Feeder	Non-selective
Output relays	T1 / T2 / T3	T1 / T2	T3	N/A
Watchdog outputs	T4	N/A	T4	N/A
External power supply	Yes		N/A	
Size (Width x Height x Depth)	70.6 x 134.4 x 126.2 mm / 2.78 x 5.29 x 4.97 in		34 x 134.4 x 125.1 mm / 1.34 x 5.29 x 4.92 in	
Note: T1 and T3 are HSO contacts. T2 is conventional contact. T4 is used for WD.				

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Sepam™ Series 80

Sepam Series 80 protection relays are time-tested, high-performance devices that ensure dependability. These products are designed with a simple idea in mind: All users should be able to find a solution corresponding exactly to their needs with the right balance between performance, simplicity and cost. Sepam 80 offers a solution for every application need, specifically targeting industrial installations. These multi-functional protection devices allow an easy and hassle-free startup with simple-to-use programming software. Sepam relays also comply with the latest communication protocols on the market, including IEC61850, DNP3 and Modbus. In addition, all relays within this range come with a standard 10-year warranty and conformal coating for protection against harsh environments.

Features and Benefits

- Compact devices with clearly defined connection terminals for easy installation
- Predefined control logic for circuit breaker control or contactor control
- Predefined control logic for Zone Selective Interlocking applications
- Predefined control logic for Automatic Transfer applications
- User-friendly software (SFT2841) with built-in manuals for every relay
- Support for offline programming
- Application-specific design ensuring appropriate protection for any given application
- Low power CT options for the use of relays on new installations where the load is low
- Field-upgradable technology to stay up-to-date on the latest hardware and software



Sepam Series 80

Sepam Series 80

The Series 80 relays are for custom applications requiring enhanced protection of electrical distribution networks.

Applications Covered:

- Substation (feeder)
- Transformer
- Motor
- Generator
- Busbar
- Capacitor

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Sepam Protection Configurations

Three relay series with increasing protection capabilities for six types of applications to provide all possible protection configurations

Table 5.25: Sepam 80 Protection Functions

ANSI Device Number	Description	Sepam 80 Relay Models								
		S84	M87	M88	T87	G87	G88	C86	B80	B83
12/14	Speed Switch		•	•		•	•			
21B	Underimpedance					•	•			
24	Volts/Hertz				•	•	•			
25	Synch Check	•			•	•	•		•	•
26	Thermostat		•	•	•		•			
27	Phase-to-phase Undervoltage	•	•	•	•	•	•	•	•	•
27D	Positive sequence Undervoltage	•	•	•	•	•	•	•	•	•
27R	Remnant Undervoltage	•	•	•	•	•	•	•	•	•
27S	Phase-to-neutral Undervoltage	•	•	•	•	•	•	•	•	•
27TN	Third Harmonic Neutral Undervoltage					•	•			
32P	Directional Power	•	•	•	•	•	•			
32Q/40/55	Directional Reactive Power		•	•		•	•			
37	Phase Undercurrent	•	•	•						
38	Bearing Temperature		•	•	•	•	•	•		
40	Loss of Excitation		•	•		•	•			
46	Negative Sequence Current/Unbalance	•	•	•	•	•	•	•	•	•
47	Negative Sequence Undervoltage	•	•	•	•	•	•	•	•	•
48	Excessive Starting Time		•	•						
49	Thermal Overload	•	•	•	•	•	•	•		
49T	RTD Monitoring		•	•	•	•	•	•		
50BF	Breaker Failure	•	•	•	•	•	•	•	•	•
50/27	Inadvertent Energization					•	•			
50	Instantaneous Phase Overcurrent	•	•	•	•	•	•	•	•	•
50G	Instantaneous Ground Overcurrent (Measured)	•	•	•	•	•	•	•	•	•
50N	Instantaneous Ground Overcurrent (Calculated)	•	•	•	•	•	•	•	•	•
50V	Voltage Restrained Instantaneous Overcurrent				•	•	•			
51	Time Phase Overcurrent	•	•	•	•	•	•	•	•	•
51C	Capacitor Bank Unbalance							•		
51G	Time Ground Overcurrent (Measured)	•	•	•	•	•	•	•	•	•
51N	Time Ground Overcurrent (Calculated)	•	•	•	•	•	•	•	•	•
51LR	Locked Rotor		•	•						
50V	Voltage Restrained Instantaneous Overcurrent									
51V	Voltage Restrained Time Overcurrent					•	•			
59	Phase-to-phase Overvoltage	•	•	•	•	•	•	•	•	•
59N	Neutral Voltage Displacement	•	•	•	•	•	•	•	•	•
63	Buchholz Pressure				•					
64G	100% Stator Ground Fault					•	•			
64REF	Restricted Ground Fault				•					
66	Starts per hour		•	•						
67	Directional Phase Overcurrent	•			•	•	•			
67N	Directional Ground Overcurrent	•	•	•		•	•			
78	Pole Slip		•	•		•	•			
79	Reclosing	•								
81H	Overfrequency	•	•	•	•	•	•	•	•	•
81L	Underfrequency	•	•	•	•	•	•	•	•	•
81R	Rate of Change of Frequency	•								
87M	Machine Differential		•			•				
87T	2 Winding Transformer Differential			•	•		•			

Sepam™ 80 Characteristics

Table 5.26: Protection Configurations

Characteristics	Series 80
Logic inputs	0-42
Logic outputs	5-23
Temperature sensors	0-16
Channels	Current 2 x 3I + 2 x I0
	Voltage 2 x 3V + V0
	LPCT *[1]*
Communication Ports	2-4
	ModBus, IEC 103, DNP3, IEC 61850
	Redundancy
	Goose Messaging
Control	Matrix *[2]*
	Logic equation editor
	Logipam *[3]*
Other	Front memory cartridge with settings
	Backup lithium battery *[4]*

[1] LPCT: low-power current transducer complying with standard IEC 60044-8.
[2] Control matrix for simple assignment of information from the protection, control and monitoring functions.
[3] Logipam ladder language (PC programming environment) to make full use of Sepam series 80 functions.
[4] Standard lithium battery 1/2 AA format 3.6 V front face exchangeable.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 5.27: Metering Measurements (Advanced — Sepam Series 80)

Metering	Measurement Range	Accuracy
Phase Current	0.02 to 40 In	±0.5%
Residual Current (Calculated)	0.005 to 40 In	±1%
Residual Current (Measured)	0.005 to 20 In0	±1%
Demand Current / Peak Demand Current	0.02 to 40 In	±0.5%
Phase-to-Phase Voltage / Phase-to-Neutral Voltage	0.05 to 1.2 Vnp	±0.5%
Residual Voltage / Neutral Point Voltage	0.015 to 3 Vnp	±1%
Positive Sequence Voltage / Negative Sequence Voltage	0.05 to 1.2 Vnp	±2%
Frequency	50 ± 5 Hz or 60 ± 5 Hz	±0.01 Hz
Active Power	0.008 Sn to 999 MW	±1%
Reactive Power	0.008 Sn to 999 MVar	±1%
Apparent Power	0.008 Sn to 999 MVA	±1%
Peak Demand Active Power	0.008 Sn to 999 MW	±1%
Peak Demand Reactive Power	0.008 Sn to 999 MVar	±1%
Power Factor	-1 to +1 (CAP/IND)	±1%
Calculated Active Energy	0 to 2.1x108 MWH	±1% ±1 digit
Calculated Reactive Energy	0 to 2.1x108 MVARH	±1% ±1 digit
Temperature	-22 to +392 °F (-30 to +200 °C)	±1 °C from -20 to +140 °C
Rotation Speed	0 to 7200 RPM	±1 RPM

Sepam 80 Configuration

Table 5.28: Sepam Series 80 Configuration

Model	Description	Relay Base Model	_ Display	_ Current	_ Coms	_ I/O	_ RTD's	_ Analog Out	_ Logipam	_ Synch Check
S84	S84 - Substation Relay	SQ1S84								
B80	B80 - Busbar Relay	SQ1B80								
B83	B83 - Busbar Relay	SQ1B83								
G87	G87 - Generator Relay	SQ1G87								
G88	G88 - Generator Relay	SQ1G88								
M87	M87 - Motor Relay	SQ1M87								
M88	M88 - Motor Relay	SQ1M88								
T87	T87 - Transformer Relay	SQ1T87								
C86	C86 - Capacitor Bank Relay	SQ1C86								
	Advanced Display		A							
MimicBus	MimicBus Display		P							
DSM303	Remote Advanced Display		C							
CCA634	1A/5A CT inputs			1						
CCA630	Alt. 1A/5A CT inputs (requires CSH120, 200 or 30)			2						
CCA671(80)	Low Power CT (LPCT)			3						
MES120	14In/6Out, 24-48Vdc				D					
2 x MES120	28In/12Out, 24-48Vdc				E					
3 x MES120	42In/18Out, 24-48Vdc				F					
MES120G	14In/6Out, 220-250Vdc				G					
2 x MES120G	28In/12Out, 220-250Vdc				H					
3 x MES120G	42In/18Out, 220-250Vdc				I					
MES120H	14In/6Out, 110-125Vdc				J					
2 x MES120H	28In/12Out, 110-125Vdc				K					
3 x MES120H	42In/18Out, 110-125Vdc				L					
ACE959	1 x RS485					1				
ACE969TP2	2 x RS485					2				
ACE969FO2	1 x RS485/ 1 x Fiber Optic					3				
ACE850TP	2 x Ethernet Ports (Copper, IEC61850/ModbusTCP)					5				
ACE850FO	2 x Ethernet Ports (Fiber, IEC61850/ModbusTCP)					6				
	without						A			
MET1482	8 Temp sensor inputs (One Module)						B			
2 x MET1482	16 Temp sensor inputs (Two Modules)						C			
	without							0		
MSA141	1 x Analog 0-1mA, 0-10mA, 0-20mA, 4-20mA output							1		
	without								A	
SFT080	Logipam Firmware								B	
	without									0
MCS025	Sync-Check Module (required for ANSI-25)									1

Table 5.29: Sepam Series 80 Typical Catalog Numbers

Catalog Numbers	Description
SQ1S84P1J5A0B0	Series 80 - Substation/Feeder Protection S84 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).
SQ1B83P1J5A0B1	Series 80 - Busbar Protection B83 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base), Synchro-check
SQ1G87P1J5A0B0	Series 80 - Generator Differential Protection G87 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).
SQ1M87P1J5B0B0	Series 80 - Motor Differential Protection M87 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 8 RTD's, 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).
SQ1T87P1J5A0B0	Series 80 - Transformer Differential Protection T87 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Also refer to Sepam Series 80 on www.se.us.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



S84

Sepam Substation / Feeder Applications

Substation/Feeder advanced protection is covered with the Sepam S84 and covers current, voltage, frequency, and synchro check protection functions.

Advanced Protection Relay S84

Typical Catalog Number: **SQ1S84P1J5A0B0** Series 80 - Substation/Feeder Protection S84 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Table 5.30: Features

Feature		Advanced Protection Relay S84 Sepam 80 Series
Current Protection		•
Built in CB Control		•
Native Zone Selective Interlocking		•
Waveform Captures		•
Event Records		•
Voltage Protection		•
Frequency Protection		•
Field Expandable Communications		•
Synchro-check Protection (optional)		•
Native Automatic Throw over Scheme		•
Field expandable I/O		•
Ladder Logic PLC custom programming (optional)		•
Mimic-bus graphical display (optional)		•
Onboard data logging		•
Communications options	Modbus RTU	•
	DPN	•
	Modbus TCP/IP	•
	IEC61850–MMS	•
	IEC61850–MMS + GOOSE	•

Table 5.31: Functions

ANSI Device Number	Description	Advanced Protection Relay S84 Sepam 80 Series
25	Synch Check	•
27	Phase-to-phase undervoltage	•
27D	Positive sequence undervoltage	•
27R	Remnant undervoltage	•
27S	Phase-to-neutral undervoltage	•
32P	Directional Power	•
37	Phase Undercurrent	•
46	Negative Sequence Current/Unbalance	•
47	Negative Sequence undervoltage	•
49	Thermal Overload	•
50	Instantaneous Phase Overcurrent	•
50BF	Breaker Failure	•
50G	Instantaneous Ground Overcurrent (Measured)	•
50N	Instantaneous Ground Overcurrent (Calculated)	•
51	Time Phase Overcurrent	•
51G	Time Ground Overcurrent(Measured)	•
51N	Time Ground Overcurrent(Calculated)	•
59	Phase-to-phase overvoltage	•
59N	Neutral Voltage Displacement	•
67	Directional Phase Overcurrent	•
67N	Directional Ground Overcurrent	•
79	Reclosing	•
81H	Overfrequency	•
81L	Underfrequency	•
81R	Rate of Change of Frequency	•

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



M87/M88

Sepam Motor Applications

Advanced motor protection is covered with the Sepam M87/M88 and covers current, voltage, frequency, and differential protection functions.

Advanced Protection Relay (M87/M88 – Sepam 80 Series)

Typical Part Number: **SQ1M87P1J5A0B0** Series 80 - Motor Protection S84 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/ mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Table 5.32: Features

Feature		M87/M88
Current Protection		•
Built in CB Control		•
Native Zone Selective Interlocking		•
Waveform Captures		•
Event Records		•
Voltage Protection		•
Frequency Protection		•
Field Expandable Communications		•
Synchro-check Protection (optional)		•
Native Automatic Throw over Scheme		•
Field expandable I/O		•
Ladder Logic PLC custom programming (optional)		•
Mimic-bus graphical display (optional)		•
Onboard data logging		•
Native Load Shedding and Motor Restart		•
Ability to incorporate a transformer into the same zone of protection (M88 only)		•
Built in Motor start and trending reports		•
Communications options	Modbus RTU	•
	DPN	•
	Modbus TCP/IP	•
	IEC61850–MMS	•
	IEC61850–MMS + GOOSE	•

Table 5.33: Functions

ANSI Device Number	Description	M87	M88
12/14	Speed Switch	•	•
26	Thermostat	•	•
27	Phase-to-phase undervoltage	•	•
27D	Positive sequence undervoltage	•	•
27R	Remnant Undervoltage	•	•
27S	Phase-to-neutral undervoltage	•	•
32P	Directional Power	•	•
32Q/40/55	Directional Reactive Power	•	•
37	Phase Undercurrent	•	•
38	Bearing Temperature	•	•
40	Loss of Excitation	•	•
46	Negative Sequence Current/Unbalance	•	•
47	Negative Sequence undervoltage	•	•
48	Excessive Starting Time	•	•
49	Thermal Overload	•	•
49T	RTD Monitoring	•	•
50BF	Breaker Failure	•	•
50	Instantaneous Phase Overcurrent	•	•
50G	Instantaneous Ground Overcurrent(Measured)	•	•
50N	Instantaneous Ground Overcurrent(Calculated)	•	•
51	Time Phase Overcurrent	•	•
51G	Time Ground Overcurrent(Measured)	•	•
51N	Time Ground Overcurrent(Calculated)	•	•
51LR	Locked Rotor	•	•
59	Phase-to-phase overvoltage	•	•
59N	Neutral Voltage Displacement	•	•
66	Starts per hour	•	•
67N	Directional Ground Overcurrent	•	•
78	Pole Slip	•	•
81H	Overfrequency	•	•
81L	Underfrequency	•	•
87M	Machine Differential	•	
87T	2 Winding Transformer Differential		•

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



T87

Sepam Transformer Applications

Advanced transformer protection is covered with the Sepam T87 and covers current, voltage, frequency, differential, and synchro check protection functions.

Advanced Protection Relay (T87 – Sepam 80 Series)

Typical Part Number: **SQ1T87P1J5A0B0** Series 80 - Transformer Protection S84 (24-250 Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125 Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Table 5.34: Features

Feature		T87
Current Protection		•
Built in CB Control		•
Native Zone Selective Interlocking		•
Waveform Captures		•
Event Records		•
Voltage Protection		•
Frequency Protection		•
Field Expandable Communications		•
Synchro-check Protection (optional)		•
Native Automatic Throw over Scheme		•
Field expandable I/O		•
Ladder Logic PLC custom programming (optional)		•
Mimic-bus graphical display (optional)		•
Onboard data logging		•
Communications options	Modbus RTU	•
	DPN	•
	Modbus TCP/IP	•
	IEC61850–MMS	•
	IEC61850–MMS + GOOSE	•

Table 5.35: Functions

ANSI Device Number	Description	T87
24	Volts/Hertz	•
25	Synch Check	•
26	Thermostat	•
27	Phase-to-phase undervoltage	•
27D	Positive sequence undervoltage	•
27R	Remnant Undervoltage	•
27S	Phase-to-neutral undervoltage	•
32P	Directional Power	•
38	Bearing Temperature	•
46	Negative Sequence Current/Unbalance	•
47	Negative Sequence undervoltage	•
49	Thermal Overload	•
49T	RTD Monitoring	•
50BF	Breaker Failure	•
50	Instantaneous Phase Overcurrent	•
50G	Instantaneous Ground Overcurrent (Measured)	•
50N	Instantaneous Ground Overcurrent (Calculated)	•
50V	Voltage Restrained Instantaneous overcurrent	•
51	Time Phase Overcurrent	•
51G	Time Ground Overcurrent (Measured)	•
51N	Time Ground Overcurrent (Calculated)	•
59	Phase-to-phase overvoltage	•
59N	Neutral Voltage Displacement	•
63	Buchholz Pressure	•
64REF	Restricted Ground Fault	•
67N	Directional Ground Overcurrent	
67	Directional Phase Overcurrent	•
81H	Overfrequency	•
81L	Underfrequency	•
87T	2 Winding Transformer Differential	•

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



G87/G88

Sepam Generator Applications

Advanced generator protection is covered with the Sepam G87/G88 and covers current, voltage, frequency, differential, and synchro check protection functions.

Advanced Protection Relay (G87/G88 – Sepam 80 Series)

Typical Part Number: **SQ1G87P1J5A0B0** Series 80 – Generator Protection G87 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Table 5.36: Features

Feature		G87	G88
Current Protection		•	•
Built in CB Control		•	•
Native Zone Selective Interlocking		•	•
Waveform Captures		•	•
Event Records		•	•
Voltage Protection		•	•
Frequency Protection		•	•
Field Expandable Communications		•	•
Synchro-check Protection (optional)		•	•
Native Automatic Throw over Scheme		•	•
Field expandable I/O		•	•
Ladder Logic PLC custom programming (optional)		•	•
Mimic-bus graphical display (optional)		•	•
Onboard data logging		•	•
Native Load Shedding and Motor Restart		•	•
Ability to incorporate a transformer into the same zone of protection (M88 only)		•	•
Built in Motor start and trending reports		•	•
Communications options	Modbus RTU	•	•
	DPN	•	•
	Modbus TCP/IP	•	•
	IEC61850–MMS	•	•
	IEC61850–MMS + GOOSE	•	•

Table 5.37: Functions

ANSI Device Number	Description	G87	G88
12/14	Speed Switch	•	•
21B	Underimpedance	•	•
24	Volts/Hertz	•	•
25	Synch Check	•	•
27	Phase-to-phase undervoltage	•	•
27D	Positive sequence undervoltage	•	•
27R	Remnant Undervoltage	•	•
27S	Phase-to-neutral undervoltage	•	•
27TN	Third Harmonic Neutral Undervoltage	•	•
32P	Directional Power	•	•
32Q/40/55	Directional Reactive Power	•	•
38	Bearing Temperature	•	•
40	Loss of Excitation	•	•
46	Negative Sequence Current/Unbalance	•	•
47	Negative Sequence undervoltage	•	•
49	Thermal Overload	•	•
49T	RTD Monitoring	•	•
50/27	Inadvertent energization	•	•
50BF	Breaker Failure	•	•
50	Instantaneous Phase Overcurrent	•	•
50G	Instantaneous Ground Overcurrent(Measured)	•	•
50N	Instantaneous Ground Overcurrent(Calculated)	•	•
50V	Voltage Restrained Instantaneous overcurrent	•	•
51	Time Phase Overcurrent	•	•
51G	Time Ground Overcurrent(Measured)	•	•
51N	Time Ground Overcurrent(Calculated)	•	•
51V	Voltage Restrained Time Overcurrent	•	•
59	Phase-to-phase overvoltage	•	•
59N	Neutral Voltage Displacement	•	•
66	Starts per hour		
64G	100% Stator Ground Fault	•	•
67	Directional Phase Overcurrent	•	•
67N	Directional Ground Overcurrent	•	•
78	Pole Slip	•	•
81H	Overfrequency	•	•
81L	Underfrequency	•	•
87M	Machine Differential	•	
87T	2 Winding Transformer Differential		•

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



B80/B83

Sepam Busbar Applications

Advanced busbar protection is covered with the Sepam B80/B83 and covers current, voltage, frequency, and synchro check protection functions.

Advanced Protection Relay (B80/B83 – Sepam 80 Series)

Typical Part Number: **SQ1B83P1J5A0B0** Series 80 - Busbar Protection S84 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Table 5.38: Features

Feature		B80	B83
Current Protection		•	•
Built in CB Control		•	•
Native Zone Selective Interlocking		•	•
Waveform Captures		•	•
Event Records		•	•
Voltage Protection (2 sets of VTs on B83)		•	•
Frequency Protection		•	•
Field Expandable Communications		•	•
Synchro-check Protection (optional)		•	•
Native Automatic Throw over Scheme		•	•
Field expandable I/O		•	•
Ladder Logic PLC custom programming (optional)		•	•
Mimic-bus graphical display (optional)		•	•
Onboard data logging		•	•
Communications options	Modbus RTU	•	•
	DPN	•	•
	Modbus TCP/IP	•	•
	IEC61850–MMS + GOOSE	•	•

Table 5.39: Functions

ANSI Device Number	Description	B80	B83
25	Synch Check	•	•
27	Phase-to-phase undervoltage	•	•
27D	Positive sequence undervoltage	•	•
27R	Remnant Undervoltage	•	•
27S	Phase-to-neutral undervoltage	•	•
46	Negative Sequence Current/Unbalance	•	•
47	Negative Sequence undervoltage	•	•
50BF	Breaker Failure	•	•
50	Instantaneous Phase Overcurrent	•	•
50G	Instantaneous Ground Overcurrent(Measured)	•	•
50N	Instantaneous Ground Overcurrent(Calculated)	•	•
51	Time Phase Overcurrent	•	•
51G	Time Ground Overcurrent(Measured)	•	•
51N	Time Ground Overcurrent(Calculated)	•	•
59	Phase-to-phase overvoltage	•	•
59N	Neutral Voltage Displacement	•	•
81H	Overfrequency	•	•
81L	Underfrequency	•	•
81R	Rate of Change of Frequency		

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



C86

Sepam Capacitor Applications

Busbar protection is broken into two sections Basic and Advanced. The Basic protection is covered with our Sepam B22 protection relay and handles voltage and frequency protectoin. The Advanced protection is covered with the Sepam B80/B83 and covers current, voltage, frequency, and synchro check protection functions. .

Advanced Protection Relay (C86 – Sepam 80 Series)

Typical Part Number: **SQ1C86P1J5A0B0** Series 80 - Transformer Protection S84 (24-250Vdc), mimicBus Graphical Display, 1/5A CT inputs, 14In/11Out Digital Module (110-125Vdc/mid p.u.), 2 x RJ-45 ports (Modbus or IEC61850 with GOOSE), ladder logic firmware (PLC base).

Table 5.40: Features

Feature		C86
Current Protection		•
Built in CB Control		•
Built in protection and control for Capacitors, up to 4 steps		•
Native Zone Selective Interlocking		•
Waveform Captures		•
Event Records		•
Voltage Protection		•
Frequency Protection		•
Field Expandable Communications		•
Native Automatic Throw over Scheme		•
Field expandable I/O		•
Ladder Logic PLC custom programming (optional)		•
Mimic-bus graphical display (optional)		•
Onboard data logging		•
Communications options	Modbus RTU	•
	DPN	•
	Modbus TCP/IP	•
	IEC61850–MMS + GOOSE	•

ANSI Device Number	Description	C86
27	Phase-to-phase undervoltage	•
27D	Positive sequence undervoltage	•
27R	Remnant Undervoltage	•
27S	Phase-to-neutral undervoltage	•
38	Bearing Temperature	•
46	Negative Sequence Current/Unbalance	•
47	Negative Sequence undervoltage	•
49	Thermal Overload	•
49T	RTD Monitoring	•
50BF	Breaker Failure	•
50	Instantaneous Phase Overcurrent	•
50G	Instantaneous Ground Overcurrent (Measured)	•
50N	Instantaneous Ground Overcurrent (Calculated)	•
51	Time Phase Overcurrent	•
51C	Capacitor Bank Unbalance	•
51G	Time Ground Overcurrent (Measured)	•
51N	Time Ground Overcurrent (Calculated)	•
59	Phase-to-phase overvoltage	•
59N	Neutral Voltage Displacement	•
81H	Overfrequency	•
81L	Underfrequency	•

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

The MiCOM Range

The MiCOM protection relay range provides capability for a wide variety of protection, control, measurement, monitoring, and communication. MiCOM protection relays offer scalable levels of functionality and hardware options to best suit your protection requirements and allows you to choose the most cost-effective solution for your application. The versatile hardware and common relay management software (Easergy Studio) allows simple configuration and installation in different applications.

Features and Benefits

- Advanced communications capabilities including IEC61850 with PRP and HSR
- Native cyber security including IEEE 1686 and NERC-CIP
- Wide range of frequency protections including 16.5, 16.67, 25, 50, and 60Hz
- User-friendly programmable scheme logic for custom programming
- Application-specific design ensuring appropriate protection for any given application

MiCOM Characteristics

Table 5.41: MiCOM Series Characteristics

Series	MiCOM 30 Series	MiCOM 40 Series
		
Description	The MiCOM 30 series provides for a full range of protection features and is focused on Utility and Railway applications.	The MiCOM 40 series fulfils the protection requirements for a wide range of Utility and industrial applications.
Applications Covered		
Substation (Feeder)	•	•
Motor	•	•
Transformer	•	•
Distance	•	•
Line Differential	•	•
Railway	•	
Busbar		•
Mesh breaker arrangements		•
Generator		•
Characteristics		
Frequency 50/60 Hz	•	•
Logic inputs	max 82	max 64
Opto inputs	max 82	max 64
Output contacts	max 48	max 60
Logic outputs	max 48	max 60
Continuous carry	5 A / 8 A / 10 A	10 A
Short duration current	30 A for 0.5 (3s)	30 A for 3s
LED indication (programmable)	23 (19)	22 (18)
Settings groups	4	4
High break contacts	max 16	max 8
Function keys / hot keys	6	10 / 2
Fault records	8	15
Event records	1000	250–512
Disturbance records	16.4s (max 8 rec.)	75s (max 10. s/rec.)
Programmable logic	Fully programmable	Graphical / Fully programmable
IRIG-B	Optional	Optional
LCD display	Alphanumeric / Graphical	Alphanumeric
Front port	EIA(RS) 232	EIA(RS) 232
Rear port	Yes / Optional	Yes / Optional
Counter	EIA(RS)485 or fiber	K-Bus / EIA(RS)485 or fiber
Modbus	EIA(RS)485 or fiber	EIA(RS)485 or fiber
IEC 60870–5–103	EIA(RS)485 or fiber	EIA(RS)485 or fiber
IEC 60870–5–101	EIA(RS)485 or fiber	EIA(RS)485 or fiber
DNP3.0	EIA(RS)485 or fiber	EIA(RS)485 or Ethernet (RJ45, fiber)
IEC 61850	Wire RJ45 or fiber	Wire RJ45 or fiber
Terminals	Pin or Ring	Ring
Analog I/O	1/2	4/4
Temperature sensors	max 10	max 10
Communication Ports	1-4	1-4
	ModBus, IEC 103, DNP3, IEC 61850	ModBus, IEC 103, DNP3, IEC 61850
	Redundancy	Redundancy
	Goose Messaging	Goose Messaging

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 5.42: Feeder Management and Overcurrent Relays

Easergy MiCOM series	30		40			
model	P132	P139	P141	P142	P143	P145
Case size	24, 40 or 84TE	40 or 84TE	40TE	40TE	60 or 80TE	60TE
CT Inputs	4	4	5	5	5	5
VT Inputs	4 or 5	4 or 5	3	3	3 or 4	3 or 4
Opto Inputs (max)	70	70	8	16	32	32
Output Contacts (max)	32	28	8	15	30	32
High Break Contacts (max)	16	16		4	8	8
RTDs (max)	10	10				
Analogue Input / Output (max)	1/2	1/2				
Function Keys / Hotkeys	•	•	•	•	•	•
Bay Control and Monitoring	Mimic	Graphical				
Interlocking Logic	•	•				

Table 5.43: Transformer Protection Relays

Easergy MiCOM series / model	30 / P631	30 / P632	30 / P633	30 / P634	40 / P642	40 / P643	40 / P645
Case size	24 or 40TE	40 or 84TE	40 or 84TE	40 or 84TE	40TE	60TE	80TE
CT Inputs	6	8	12	15	8	12	18
VT Inputs		1	1	1	1 or 2	1 or 4	1 or 4
Opto Inputs (max)	4	34	40	34	12	24	24
Output Contacts (max)	14	22	30	22	12	24	24
Analogue Input / Output (max)		1/2	1/2	1/2	4/4	4/4	4/4
High Break Contacts	4	4	4	4	4	4	8
RTDs (option)		1	1	1	10	10	10
Function keys / Hotkeys	•	•	•	•		•	•
Bay Control & Monitoring		Mimic	Mimic				
Interlocking Logic		•	•				

Table 5.44: Generator Management Relays

Easergy MiCOM series / model	40 / P342	40 / P343	40 / P344	40 / P345
Case size	40 or 60TE	60 or 80TE	80TE	80TE
CT Inputs	5	8	8	9
VT Inputs	4	4	5	6
Opto Inputs (max) / Output Contacts (max)	24	32	32	32
High Break Contacts	4	8	8	8
RTDs (option)	10	10	10	10
Analogue Input / Output (max)	4/4	4/4	4/4	4/4
Function keys / Hotkeys	•	•	•	•
Interlocking Logic	•	•	•	•

Table 5.45: Busbar Protection Relays

Easergy MiCOM series / model	40 / P741* (CU)	40 / P742* (PU)	40 / P743* (PU)	40 / P746
Case size	80TE	40TE	60TE	80TE
CT Inputs		4	4	18/21
VT Inputs				3/0
Opto Inputs (max)	8	16	24	40
Output Contacts (max)	8	8	21	32
Function keys / Hotkeys	•		•	•

Table 5.46: Rail Protection Relays

Easergy MiCOM series / model	30 / P138	30 / P436	30 / P438	30 / P638
Case size	40 or 84TE	40 or 84TE	40 or 84TE	84TE
CT Inputs	2	3	3	5
VT Inputs	1	2	2	1
Opto Inputs (max)	22	34	28	38
Output Contacts (max)	48	46	46	64
RTDs (option)	1	1	1	1
Analogue Input / Output (max)	1/2	1/2	1/2	1/2
Function keys / Hotkeys	•	•	•	•

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



MiCOM 10 Series
P11x Self-Powered or Dual Powered
P115 and P116

MiCOM Self-Powered Applications

Self-powered applications are special and require specific hardware to handle the necessary protection of equipment. Schneider Electric offers the MiCOM P116 relay for this application. The P116 provides a number of advantages including dual power options, communications, withdrawable case, and electromagnetic flag indicators.

- Current Protection
- Electromagnetic flag indicators
- Withdrawable case
- Waveform captures
- Event records
- Communications options:
  - Modbus RTU
  - Event records

Table 5.47: Functions

ANSI Device Number	Description	P116
37	Undercurrent	•
46	Negative Sequence Current/Unbalance	•
46BC	Broken conductor detection	•
50BF	Breaker Failure	•
50	Instantaneous Phase Overcurrent	•
50N	Instantaneous Ground Overcurrent(Calculated)	•
51	Time Phase Overcurrent	•
51N	Time Ground Overcurrent(Calculated)	•
50HS	Switch on to fault	•
79	Reclosing	•

Table 5.48: Typical Catalog Number

Catalog Number	Description
P116A1N6N25115111W	Series 10 - Substation/Feeder Protection, Dual powered P116 (CT powered and 60-250Vdc & 60-240Vac), 5A CT inputs, 6In/7Out (24-250 Vdc, 24-240Vac), RS485, 5 electromagnetic flags, withdrawable case

MiCOM Substation / Feeder Applications

The MiCOM range of relays offers varying levels of functionality and hardware options to best suit the protection requirements and allows the customer to choose the most cost effective solution for their application.

The versatile hardware allows for application in many installations and a common relay management software (MiCOM S1 Studio) makes for easy configuration and application.



MiCOM P11x

Basic Feeder Protection Relays — MiCOM 10 Series

The 10 series hardware platforms are the building blocks of the MiCOM protection relay range providing the capability for a wide variety of protection, control, measurement, monitoring and communication functions.

The MiCOM P11x relays are suitable for all the applications where overcurrent and/or ground fault protection are required. P11x can be applied to medium and low voltage electrical systems as an optimized and cost-efficient solution tailored to user's needs.

Standard and Advanced Feeder Protection Relays — MiCOM 30 and 40 Series

- Easergy MiCOM P132 offers a flexible and powerful feeder management device housed in a 4U case in 24TE, 40TE or 84TE widths. Easergy MiCOM P132 offers bay control for up to 3 devices and a library of 80 pre-engineered templates to reduce engineering time.
- Easergy MiCOM P139 one-box solution is the most advanced in the range. It's available in 40TE or 84TE width, 4U case sizes. It offers bay control for up to 10 devices. It uses a pre-engineered library of up to 300 templates for efficient engineering and commissioning.
- Easergy MiCOM P14x Feeder Management and Overcurrent Protective Relays are especially suitable where a complete or advanced power system protection scheme solution is required.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

The following models are available:

- Easergy MiCOM P141 – Feeder management relay
- Easergy MiCOM P142 – Feeder management with integrated Autoreclose
- Easergy MiCOM P143 – Feeder management, integrated Autoreclose and Check Synchronism
- Easergy MiCOM P145 – Feeder management, Autoreclose, Check Synchronism and Enhanced operator control functions

Table 5.49: Functions of Feeder Management Relays

ANSI	Protection Function	P111	P115	P116	P132	P139	P141	P142	P143	P145
25	Check synchronizing				•	•			•	•
32	Directional power				•	•	•	•	•	•
32V	Voltage controlled direct. reactive power				•	•				
34	Master sequence device					•				
37	Undercurrent			•	•	•	•	•	•	•
46	Negative sequence overcurrent			•	•	•	•	•	•	•
46BC	Broken conductor			•	•	•	•	•	•	•
47	Negative sequence over voltage				•	•	•	•	•	•
48	Incomplete sequence relay				•	•				
49	Thermal overload	•		•	•	•	•	•	•	•
50/51N	Ground fault	•	•	•	•	•	•	•	•	•
50/51P	3 Phase overcurrent	•	•	•	•	•	•	•	•	•
50/51P/N	1 Phase or ground overcurrent				•	•				
50BF	Circuit breaker failure	•	•	•	•	•	•	•	•	•
51LR	Motor				•	•				
51V	Voltage controlled overcurrent				•	•	•	•	•	•
59/27	Over / Under voltage				•	•	•	•	•	•
59N	Residual over voltage				•	•	•	•	•	•
64	Restricted ground fault				•	•	•	•	•	•
66	Startup monitoring				•	•				
67N	Ground fault directional				•	•	•	•	•	•
67N	Transient ground fault detection				•	•				
67N	Sensitive directional ground fault				•	•	•	•	•	•
67P	Phase directional				•	•	•	•	•	•
67W	Wattmetric ground fault				•	•	•	•	•	•
79	Autoreclose			•	•	•		•	•	•
81	Under / Over frequency				•	•	•	•	•	•
81P	Under frequency load shedding				•	•				
81R	Rate of change of frequency				•	•	•	•	•	•
85	Protective signaling				•	•				
86	Lock-out	•	•	•	•	•	•	•	•	•
CTS	Current transformer supervision				•	•	•	•	•	•
SOTF	Switch on to fault	•		•	•	•	•	•	•	•
TCS	Trip circuit supervision	•		•	•	•	•	•	•	•
VTS	Voltage transformer supervision				•	•	•	•	•	•
YN	Neutral admittance				•	•	•	•	•	•
	Circuit breaker monitoring	•		•	•	•	•	•	•	•
	Cold load pick-up	•		•	•	•	•	•	•	•
	Inrush blocking	•		•	•	•	•	•	•	•
	InterMiCOM				•	•	•	•	•	•
	Limit value monitoring				•	•				

Table 5.50: Typical Catalog Numbers

Catalog Numbers		Description
Standard	P14121RABM0B48L	Series 40 - Substation/Feeder Protection, P141 (48-110Vdc), 1/5A CT inputs, 8In/7Out (user configurable voltage thresholds), 3xRJ-45, IEC61850, DNP3
Advanced	P14521RHBM0B48M	Series 40 - Substation/Feeder Protection, P141 (48-110Vdc), 1/5A CT inputs, 16In/20Out (user configurable voltage thresholds), 4 high break outputs, 3xRJ-45, IEC61850, DNP3

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P241 / P242 / P243

MiCOM Motor Applications

The MiCOM 30 and 40 series protection relays are designed for various motor protection applications.

Advanced Motor Protection Relay (MiCOM P 30 and 40 Series Relays)

Easergy™ MiCOM P24x relays offer advanced protection, control and monitoring of motors and rotating machines. Models available: MiCOM P241, MiCOM P242, MiCOM P243

Easergy™ MiCOM P24x comprehensive protection package includes 87 differential protection and optimization of thermal image monitoring for machines.

These relays not only improve monitoring conditions, but they also facilitate machine maintenance and save on wiring costs.

Table 5.51: Functions available for the different models of the Motor protection MiCOM range of relays

ANSI	Protection Function	P130C	P132	P139	P241	P242	P243
14	Speed switch input		•	•	•	•	•
25	Check synchronizing		•	•			
27LV	Reacceleration	•	•	•	•	•	•
30/46/86	Unbalance / Lock out	•	•	•	•	•	•
32L/O/R	Directional power	•	•	•			
32R	Reverse power	•	•	•	•	•	•
37	Loss of load	•	•	•	•	•	•
37	Undercurrent	•	•	•	•	•	•
38/49	Thermal overload	•	•	•	•	•	•
40	Loss of field				•	•	•
46	negative sequence overcurrent	•	•	•	•	•	•
47	Negative sequence over voltage	•	•	•	•	•	•
47N	Neutral over voltage	•	•	•			
50/51P	Phase overcurrent	•	•	•	•	•	•
50BF	Circuit breaker failure	•	•	•	•	•	•
50N/51N	Ground fault	•	•	•	•	•	•
50S/51LR/51S	Locked rotor	•	•	•	•	•	•
55	Out of step				•	•	•
59/27	Under / Over voltage	•	•	•	•	•	•
59N	Residual over voltage	•	•	•	•	•	•
64N/32N	Wattmetric ground fault	•	•	•	•	•	•
66/48/51	Startup monitoring	•	•	•	•	•	•
67N	Ground fault directional	•	•	•			
67N	Sensitive directional ground fault	•	•	•	•	•	•
67P	Phase directional	•	•	•			
81O	Over frequency	•	•	•			
81U	Under frequency	•	•	•	•	•	•
81R	Rate of change frequency	•	•	•			
87M	Motor differential						•
CTS	Current transformer supervision	•	•	•	•	•	•
TCS	Trip current supervision	•	•	•	•	•	•
VTS	Voltage transformer supervision	•	•	•	•	•	•
	anti backspin				•	•	•
	Circuit breaker monitoring		•	•	•	•	•

Table 5.52: Typical Catalog Numbers

Catalog Number		Description
Standard	P24121RB6M0D18L	Series 40 - Motor Protection, P241 (48-110Vdc), 1/5A CT inputs, 8In/7Out (user configurable voltage thresholds), 10 RTD's, 3xRJ-45, IEC61850
Advanced	P24321RB6M0D08M	Series 40 - Differential Motor Protection, P243 (48-110Vdc), 1/5A CT inputs, 16In/16Out (user configurable voltage thresholds), 10 RTD's, 3xRJ-45, IEC61850

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P631 / P632 / P633 / P634 / P642 / P643 / P645

MiCOM Transformer Applications

Easergy™ MiCOM P63x and P64x Transformer Differential Protection and Control Devices are designed for fast, selective, short-circuit protection of transformers, motors, generators and other installations.

Models available:

- Easergy MiCOM P631
- Easergy MiCOM P632
- Easergy MiCOM P633
- Easergy MiCOM P634
- Easergy MiCOM P642
- Easergy MiCOM P643
- Easergy MiCOM P645

These devices also incorporate many supplementary protective backup functions.

Table 5.53: Functions available for the different models of the Transformer protection MiCOM range of relays

ANSI	Protection Function	P631	P632	P633	P634	P642	P643	P645
24	Overexcitation		•	•	•	•	•	•
46	Negative sequence overcurrent	•	•	•	•	•	•	•
47	Negative sequence over voltage					•	•	•
49	Thermal overload	•	•	•	•	•	•	•
50/51N	Ground fault	•	•	•	•	•	•	•
50/51P	Phase overcurrent	•	•	•	•	•	•	•
50BF	Circuit breaker failure	•	•	•	•	•	•	•
59/27	Under / Over voltage		•	•	•	•	•	•
67N	Ground fault directional					•	•	•
67P	Phase directional					•	•	•
81	Under / over frequency		•	•	•	•	•	•
87G/64	Restricted ground fault		2	3	3	2	3	3
87T	Transformer differential (windings)	2	2	3	4	2	3	3
CTS	Current transformer (CT) supervision	•	•	•	•	•	•	•
TCS	Trip current supervision	•	•	•	•	•	•	•
VTS	Voltage Transformer (VT) supervision					•	•	•
	2nd harmonic restraint	•	•	•	•	•	•	•
	Overfluxing / 5th harmonic	•	•	•	•	•	•	•

Table 5.54: Typical Catalog Numbers

Catalog Number		Description
Basic	P64221RABM0B48L	Series 40 - Transformer differential (2 sets of CT's) Protection, P642 (48-110Vdc), 1/5A CT inputs, 8In/8Out (user configurable voltage thresholds), 3xRJ-45, IEC61850, DNP3
Standard	P64321RABM0B48M	Series 40 - Transformer differential (3 sets of CT's) Protection, P643 (48-110Vdc), 1/5A CT inputs, 16In/16Out (user configurable voltage thresholds), 3xRJ-45, IEC61850, DNP3
Advanced	P64521RABM0B48M	Series 40 - Transformer differential (5 sets of CT's) Protection, P645 (48-110Vdc), 1/5A CT inputs, 16In/16Out (user configurable voltage thresholds), 3xRJ-45, IEC61850, DNP3

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P342 / P343 / P344 / P345

MiCOM Generator Applications

The Easergy™ MiCOM P34x generator protection relays provide flexible and reliable integration of protection, control, monitoring and measurement functions for small, medium and large generators.

Models available:

- MiCOM P342
- MiCOM P343
- MiCOM P344
- MiCOM P345

P34x range covers small generators with all necessary industry standard protection and increasing through larger or more important generators with 100% stator ground fault protection via a 3rd harmonic measuring technique, pole slipping and unintentional energization at standstill protection.

Advanced models in the range offer leading techniques for large generators including second neutral voltage inputs for ground fault/inter-turn protection and 100% stator ground fault protection via a low frequency injection technique.

Table 5.55: Functions available for the different models of the Generator protection MiCOM range of relays

ANSI	Protection Function	P342	P343	P344	P345
21	Under-impedance	•	•	•	•
24	Overexcitation		•	•	•
25	Check synchronizing	•	•	•	•
27TN/59TN	100% stator ground fault (3rd)	•	•	•	•
32L/O/R	Directional power	•	•	•	•
37N/37P	Sensitive phase and ground fault undercurrent	•	•	•	•
38/49	Thermal overload	•	•	•	•
40	Loss of field	•	•	•	•
460C	Negative sequence overcurrent	•	•	•	•
46T	Negative sequence thermal	•	•	•	•
47	Negative sequence over voltage	•	•	•	•
49T	Thermal overload	•	•	•	•
50/27	Unintentional energization		•	•	•
50/51P	Phase overcurrent	•	•	•	•
50BF	Circuit breaker failure	•	•	•	•
50N/51N	Ground fault	•	•	•	•
50DT	Interturn / split phase		•	•	•
51V	Voltage dependent O/C	•	•	•	•
59/27	Under / over voltage	•	•	•	•
59N	Residual over voltage	•	•	•	•
64	Restricted ground fault	•	•	•	•
64N/32N	Wattmetric ground fault	•	•	•	•
64R	Rotor ground fault (MiCOM P391 option)	•	•	•	•
64S	100% stator ground fault (low frequency)				•
67N	Sensitive directional ground fault	•	•	•	•
67P	Phase directional	•	•	•	•
67W	Wattmetric sensitive ground fault	•	•	•	•
78	Pole slipping		•	•	•
81AB	Turbine abnormal frequency	•	•	•	•
81	Under / over frequency	•	•	•	•
87G/87GT	Generator differential		•	•	•
CTS	Current transformer supervision	•	•	•	•
TCS	Trip circuit supervision	•	•	•	•
VTS	Voltage transformer supervision	•	•	•	•
	Circuit breaker monitoring	•	•	•	•

Table 5.56: Typical Catalog Numbers

Catalog Number		Description
Basic	P34221RBBM0B38L	Series 40 - Generator Protection, P342 (48-110Vdc), 1/5A CT inputs, 8In/7Out (user configurable voltage thresholds), 10 RTD's, 3xRJ-45, IEC61850, DNP3
Standard	P34321RBBM0B38M	Series 40 - Generator Protection, P342 (48-110Vdc), 1/5A CT inputs, 16In/14Out (user configurable voltage thresholds), 10 RTD's, 3xRJ-45, IEC61850, DNP3
Advanced	P34521RBBM0B38M	Series 40 - Generator Protection, P345 (48-110Vdc), 1/5A CT inputs, 24In/24Out (user configurable voltage thresholds), 10 RTD's, 3xRJ-45, IEC61850, DNP3

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P741 / P742 / P743 / P746

MiCOM Busbar Differential Applications

Numerical Busbar Protection Relay Scheme (Centralized)

Easergy™ MiCOM P746 numerical busbar protection provides centralized complete protection for all voltages level up to extra high voltage busbar configurations.

Models available:

- MiCOM P746

Simple configuration for centralized architecture. The Easergy MiCOM P746 differential busbar protection provides a centralized one box or three boxes architecture and is very simple to use.

It does not need to be deeply engineered and supports easy operation and maintenance of the busbar.

Numerical Busbar Protection Relay Scheme (Distributed)

The Easergy MiCOM P740 numerical busbar protection scheme provides scalable and complete protection for all voltage levels, from low to extra or ultra high-voltage busbar configurations.

Models available:

- MiCOM 741
- MiCOM 742
- MiCOM 743

Easergy MiCOM P740 is one of the fastest and complete in its class, providing secure and sensitive protection for all types of voltage busbar configurations. It is easily adapted to any configuration and can operate with different types of CT.

Table 5.57: Functions available for the different models of the Busbar protection MiCOM range of relays

ANSI	Protection Function	P741	P742	P743	P746
50N/51N	Ground fault		•	•	•
50/51P	Phase overcurrent		•	•	•
50BF	Circuit breaker failure	•	•	•	•
87BB	Busbar	•	•	•	•
87CZ	Check Zones	•			•
87P	Phase segregated differential	8 zones			4 zones
87P	Sensitive ground fault differential	8 zones			
CTS	Current transformer supervision	•	•	•	•
TCS	Trip circuit supervision	•	•	•	•
VTS	Voltage transformer supervision		•	•	•
	Phase comparison				•
	CT saturation detection		•	•	
	CT supervision		•	•	•

Table 5.58: Typical Catalog Numbers

Catalog Number		Description
Advanced — Low impedance Busbar Differential (1 or 3 box mode)	P74622RABM0C48M	Series 40 - Low Impedance bus differential (7 sets of CT's) Protection, P746 (48-110Vdc), 1/5A CT inputs, 16In/16Out (user configurable voltage thresholds), 3xRJ-45, IEC61850, DNP3

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P433 / P435 / P437 / P439 / P430C

MiCOM Distance Applications

Easergy™ MiCOM P43x distance protection and One-Box devices

Applied for selective short circuit, ground fault and overload protection in all kinds of medium, high and extra-high voltage systems.

Easergy MiCOM P43x offers a comprehensive range of protection functions as standard with optional hardware and software features available to satisfy customer needs.

Easergy MiCOM P439 One-Box solution includes Bay Control up to 10 devices, including a library of more than 300 pre-engineered bay templates, to reduce engineering time.

Table 5.59: Easergy™ MiCOM P43x Models Available:

Easergy MiCOM P433	MiCOM P439
Easergy MiCOM P435	MiCOM P430C
Easergy MiCOM P437	



P441 / P442 / P443 / P444 / P445 / P446

Easergy MiCOM P44x - High Performance Relay Distance Protection

Easergy MiCOM P44x provides high speed and high performance distance protection for all overhead lines and cable applications and offers a comprehensive range of protection functions as standard.

Easergy MiCOM P44x is complemented by various serial and Ethernet communication protocols including IEC61850. Protection is further enhanced by the use of Programmable Scheme Logic within the device.

The range offers quadrilateral (polygon) or mho characteristics with a long history of high performance, load blinding areas, comprehensive range of teleprotection schemes, Power swing alarm and blocking and Multishot autoreclosure with check synchronism.

Table 5.60: Easergy MiCOM P44x Models Available:

MiCOM P441	MiCOM P444
MiCOM P442	MiCOM P445
MiCOM P443	MiCOM P446

Table 5.61: Functions available for the different models of the Distance protection MiCOM range of relays

ANSI	Protection Function	P433	P435	P437	P439	P441	P442	P443	P444	P445	P446
21/21N	Distance	•	•	•	•	•	•	•	•	•	•
25	Check synchronising	•	•	•	•	•	•	•	•	•	•
32	Directional power	•	•	•	•						
32V	Voltage controlled directional reactive power	•	•		•						
46	Negative sequence overcurrent	•	•	•	•	•	•	•	•	•	•
46/67	Directional negative sequence			•		•	•	•	•	•	•
46BC	Broken conductor	•	•	•	•	•	•	•	•	•	•
49	Thermal overload	•	•	•	•	•	•	•	•	•	•
50/27	Switch on-to fault	•	•	•	•	•	•	•	•	•	•
50/51N	Ground fault	•	•	•	•	•	•	•	•	•	•
50/51P	Phase overcurrent	•	•	•	•	•	•	•	•	•	•
50ST	Stub bus protection	•	•	•	•	•	•	•	•	•	•
59/27	Over / under voltage	•	•	•	•	•	•	•	•	•	•
59N	Residual over voltage	•	•	•	•	•	•	•	•	•	•
62/50BF	Circuit breaker failure	•	•	•	•	•	•	•	•	•	•
67N	Ground fault directional	•	•	•	•	•	•	•	•	•	•
67N	Transient ground fault detection	•	•		•						
67P	Phase directional					•	•	•	•	•	•
67W	Wattmetric ground fault	•	•		•						
68	Out of step tripping	•	•	•	•			•			•
78	Power swing blocking	•	•	•	•	•	•	•	•	•	•
79	Auto-reclose	3 pole	1/3 p	1/3 p	3 pole	3 pole	1/3 p	1/3 p	1/3 p	3 pole	1/3 p
81	Over / under frequency	•	•	•	•	•	•	•	•	•	•
81R	Rate of change of frequency	•	•	•	•			•		•	•
81P	Under-frequency load shedding	•	•		•						
85	Channel aided scheme logic	•	•	•	•	•	•	•	•	•	•
CVTS	Capacitive voltage transformer supervision					•	•		•		
TCS	Trip circuit supervision	•	•	•	•	•	•	•	•	•	•
VTS/CTS	Voltage / current transformer supervision	•	•	•	•	•	•	•	•	•	•
ΔI/ΔV	Delta directional comparison							•			•
YN	Neutral admittance	•	•		•						
	Process Bus interface for SV						•	•		•	•
	Mutual compensation			•		•	•	•	•		•

Table 5.62: Typical Catalog Numbers

Catalog Numbers		Description
Standard Version	P44321RMBM0H98M	Series 40 - Distance Protection, P443 (48-110Vdc), 1/5A CT inputs, 16In/24Out (user configurable voltage thresholds), 1300nm single-mode dual channel, 3xRJ-45, IEC61850, DNP3
Advanced Version	P44521ROBM0J98L	Series 40 - Distance Protection, P445 (48-110Vdc), 1/5A CT inputs, 16In/16Out (user configurable voltage thresholds), 1300nm single-mode dual channel, 3xRJ-45, IEC61850, DNP3

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P532



P541 / P542 / P543 / P544 / P545 / P546

MiCOM Line Differential Applications

Easergy™ MiCOM P532 - Line Differential Protection and Bay Control Device

Easergy MiCOM P532 provides a two-ended line differential protection function with all of the necessary protection communication interfaces.

Easergy MiCOM P532 is an inexpensive line differential protection device that features optional control functions for rapid and selective short-circuit and overload protection of cables and power lines.

It provides a rapid three-stage differential protection system using a tripping characteristic with multiple knee points amongst the numerous supplementary functions. The optional control functions enable Easergy MiCOM P532 to control up to six switchgear units fitted to a bay panel, and to monitor their contact positions.

Easergy MiCOM P54x - Line Differential Protection Relays

Easergy MiCOM P54x is designed for high performance overhead line and cable applications, it interfaces readily with the longitudinal (end to end) communications channels and has optional distance backup protection.

Models available:

- MiCOM P541, P542, P543, P544, P545, P546

Easergy MiCOM P541-P546 series provides high-speed current differential unit protection. The P54x is designed for all overhead line and cable applications, as it interfaces readily with the longitudinal (end to end) communications channel between line terminals.

A full range of back-up protection is integrated. This enhances the dependability of the protection, as hot-standby elements (such as distance zones and overcurrent) can be brought into service whenever a signaling channel outage may occur.

Table 5.63: Functions available for the different models of the Line Differential protection MiCOM range of relays

ANSI	Protection Function	P530C	P532	P541	P542	P543	P544	P545	P546	P547
21	Distance					•	•	•	•	•
25	Check synchronizing		•			•	•	•	•	•
37	Loss of load / undercurrent									
46	Negative sequence overcurrent		•			•	•	•	•	•
49	Thermal overload	•	•	•	•	•	•	•	•	•
50/51N	Ground fault	•	•	•	•	•	•	•	•	•
50/51P	Phase overcurrent	•	•	•	•	•	•	•	•	•
50BF	Circuit breaker failure	•	•	•	•	•	•	•	•	•
59/27	Over / under voltage	•	•			•	•	•	•	•
64W	Wattmetric ground fault	•	•			•	•	•	•	•
67N	Ground fault directional	•	•			•	•	•	•	•
67N	Sensitive directional ground fault		•			•	•	•	•	•
67P	Phase directional	•	•			•	•	•	•	•
78	Power swing blocking					•	•	•	•	•
79	Auto-reclose	3 pole	3 pole		3 pole	1/3 pole	1/3 pole	1/3 pole	1/3 pole	1/3 pole
81	Under / over frequency		•			•	•	•	•	•
87L	Line differential (terminal)	2	2	2/3	2/3	2/3	2/3	2/3	2/3	
87L	Phase comparison									•
CTS	CT supervision					•	•	•	•	•
TCS	Trip circuit supervision	•	•	•	•	•	•	•	•	•
	2 breaker configuration						•		•	
	2nd harmonic restraint	•	•	•	•	•	•	•	•	
	Copper wire signaling	•	•							
	Direct / permissive inter tripping	•	•	•	•	•	•	•	•	
	FO signaling	•	•	•	•	•	•	•	•	
	In Zone transformer			•	•	•	•	•	•	
	PLC signaling									•
	SDH / Sonet networks					•	•	•	•	
	Vector compensation			•	•	•	•	•	•	

Table 5.64: Typical Catalog Numbers

Catalog Number		Description
Basic Version	P521A0GZ412DG0	Series 20 - Line differential Protection, P521 (24-250Vdc & 48-240Vac), 1/5A CT inputs, 5In/8Out (24-250 Vdc, 24-240Vac), 1300nm single-mode single channel, RS485, DNP
Standard Version	P54321RCBM0H98M	Series 40 - Line differential Protection, P543 (48-110Vdc), 1/5A CT inputs, 16In/14Out (user configurable voltage thresholds), 1300nm single-mode dual channel, 3xRJ-45, IEC61850, DNP3
Advanced Version	P54521RCBM0H98M	Series 40 - Line differential Protection, P545 (48-110Vdc), 1/5A CT inputs, 24In/32Out (user configurable voltage thresholds), 1300nm single-mode dual channel, 3xRJ-45, IEC61850, DNP3

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



P138 / P436 / P438

MiCOM Railway Applications

Easergy™ MiCOM P138 - Overcurrent Protection Device for Rail Applications

The Easergy MiCOM 30 series rail devices are dedicated to railway catenary protection. The Easergy MiCOM P138 specifically provides directional overcurrent protection for rail applications

The Easergy MiCOM P138 enables a wide range of applications to protect supplies and catenaries in classic and autotransformer-fed (AT) systems. With easy connection to virtually all substation and catenary network management systems, it is enhanced by a complete range of backup protection and automation functions

Easergy MiCOM P638 - Transformer Protection Device for Rail Applications

Easergy MiCOM Px30 rail devices are dedicated to railway catenary protection. The Easergy MiCOM P638 provides transformer differential protection

Easergy MiCOM P638 enables a wide range of applications to protect supplies and catenaries in classic and autotransformer-fed (AT) systems. With easy connection to virtually all substation and catenary network management systems, Easergy MiCOM P638 is enhanced by a complete range of backup protection and automation functions

Easergy MiCOM P436 and P438 - Distance Protection Devices for Rail Applications

Easergy MiCOM 30 series rail devices are dedicated to railway catenary protection. The Easergy MiCOM P436 provides catenary protection for classic and two-phase AT feeders.

Easergy MiCOM P436 and Easergy MiCOM P438 enable a wide range of applications to protect supplies and catenaries in classic and autotransformer-fed (AT) systems. With easy connection to virtually all substation and catenary network management systems, the two models are enhanced by a complete range of backup protection and automation functions.

Table 5.65: Functions available for the different models of the Railway protection MiCOM range of relays

ANSI	Protection Function	P138	P436	P438	P638
21/21N	Distance		•	•	
27/59	Over / under voltage	•	•	•	•
49	Thermal overload	•	•	•	•
50/27	Switch on-to fault	•	•	•	
50H	High current supervision	•	•	•	
50/51N	High current ground fault (tank protection)	•			•
50/51P	Phase overcurrent	•	•	•	•
62/50BF	Circuit breaker failure	•	•	•	•
67P	Phase directional	•	•	•	•
81	Under / over frequency	•	•	•	•
86	Lock-out	•	•	•	•
87T	Transformer differential (windings)				2
di/dt,dv/dt, dΦ /dt	Train startup detection		•	•	
Hz	Rail catenary protection		16 2/3	25/50/60	
TCS	Trip circuit supervision	•	•	•	•
CTS	Current transformer supervision		•	•	
VTS	Voltage transformer supervision	•	•	•	
	2nd harmonic restraint	•	•	•	•
	3rd, 5th, 7th harmonic blocking	•	•	•	
	Defrost protection	•	•	•	
	High impedance fault detection	•	•	•	
	InterMiCOM	•	•	•	

Table 5.66: Typical Catalog Numbers

Catalog Numbers	Descriptions
P138849011M0303409612947	Series 30, Feeder relay, 60-250 Vdc/100-230 Vac with 4 high break contact plus 10 inputs and 16 outputs , 61850
P438849020M0308417616947	Series 30, Distance relay, 60-250 Vdc/100-230 Vac with 4 high break contact plus 10 inputs and 16 outputs , 61850
P638849011M0303406612947	Series 30, Transformer Relay, 60-250 Vdc/100-230 Vac with 4 high break contact plus 10 inputs and 16 outputs , 61850

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

SAGE RTUs — Introduction



A variety of SAGE RTU models allow you to choose the right solution for your application. You can deploy the hardware that meets the requirements of each installation. Important distinctions such as physical size, physical I/O quantities, and communications port medium allow you to choose the RTU meeting each application's requirements — no more and no less. Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library. Each RTU uses the same CPU, firmware, and configuration files, which simplifies spare parts stocking and engineering effort, saving time and money.

Schneider Electric has many years of experience offering custom designed retrofit solutions that provide improved functionality over obsolete RTUs while minimizing the field installation and commissioning time required for the change out of equipment. Each retrofit RTU is specifically designed to make use of as much of the existing equipment as possible. Special interface cards are delivered to connect to the existing termination boards. Terminations are left in place, eliminating the need for field personnel to buzz-out field wiring. Retrofits for Westinghouse Redac, GE GEtac, CDC 44-500, CDC 44-550, Harris 5000, L&G 8000/9000, and Tasnet are already available *[1]*

Features and Benefits

- Time Saving
- Easy Upgrade
- Scalable I/O
- Excellent Support
- Made in America
- Cyber-Secure
- Intuitive Configuration
- All Protocols & Apps Included
- Extensive Protocol Suite
- Math and Logic Apps
- Alarming & Annunciation
- SEL Relay Integration
- Grid Automation Apps
- Custom Retrofit Solutions
- Common CPU and Firmware


Table 5.67: SAGE Product Matrix

Model	2400	4400	3030M	1410	1430	1450
	 2400	 4400	 3030M	 1410	 1430	 1450
Applications Covered						
Substation Data Concentrator		•	•	•		
Substation RTU	Large Substation	Large Substation	•			
Automation Controller	•	•	•	•	•	•
Protocol Converter	•	•	•	•	•	•
NERC CIP Cybersecure IED Gateway	•	•	•			
Sectionalizer	•					•
Cap Bank Controller	•					•
Feeder RTU					Built in Status and Control	Built in AC Analog Inputs
Flexible Communications Interfaces				•	•	
Characteristics						
Physical Size	12" x 15"	19" x 7" x 10.5"	19" x 5.25" x 10.5"	8" x 5"	12" x 8"	11" x 11"
RS-232	4 / 12	16	16	2 / 10	2 / 10	4 / 12
Serial Fiber	0	0	0	1	0	0
RS-485	0	0	0	1	2	0
Ethernet	2 / 6	2 / 5	2 / 5	2 / 6	2 / 6	2 / 6
Digital Input	16 / 240	224	224	0	16	8
Analog Input	8 / 232	256	0 / 256	0	0 / 256	6 (AC)
Digital Output	128	128 SBO / 256 DO	64	0	4	4
1 ms SOE	0 / 512	256 / 512	0 / 512	0 / 512	0 / 512	0
Analog Output	12	0	0	0	0	0
Mount	Panel	Rack	Rack	Panel / Din	Panel	Panel

- First # indicates built-in capacity, second # indicates maximum expansion capacity
- All units have the same software functionality (Protocols, Applications, User Interface)
- SAGE 1450 Analogs are AC Input type and allow 3 Current and 3 Voltage Inputs. All other models represent milliamp transducer DC Analog Input
- SAGE 4400 has capacity for 128 SBO type Trip / Close pairs and up to 256 Digital Output Points, all on scalable XT Boards
- All Inputs and Outputs in this table are Hardware wired points. Does not include points from IED's.

[1] Visit our website at www.sage-rtu.com for more details.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

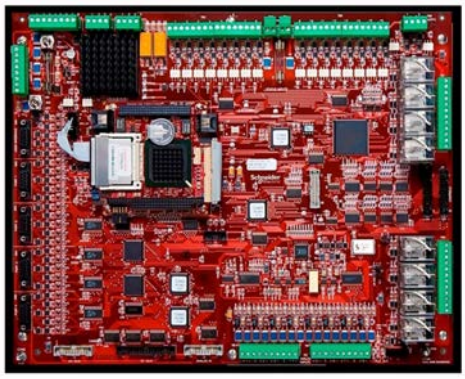

SAGE 2400

SAGE 2400 RTU

In the SAGE RTU family, the SAGE 2400 RTU offers the most comprehensive physical I/O capabilities and versatile application. Designed for traditional RTU applications, it can accommodate hundreds of analog, digital, and control I/Os along with the easy configuration, protocols, and applications from all SAGE RTUs.

Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each RTU offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library. *[2]*

Applications	
• Large Substation RTU • Automation Controller	• Protocol Converter • NERC CIP Cybersecure IED Gateway
Features Onboard	
• Size: 12 x 15 Inches • AMD LX-800 500 MHz CPU with 1 GB flash memory (Common to all SAGE RTU) • 4x RS232 Serial Ports: Options up to 8 additional RS-232 Serial Ports *[3]* (12 total serial ports) • 2x 10/100 Fast Ethernet: Optional 4 Port Switch Available *[3]* • 10-33 VDC Power Input • LEDs for visual indications of communications, digital ins & outs, and other functions	• -40 C to +85 C operating temperature range for reliability in the harshest environments. • All field connections designed to pass: – ANSI C37.90-1979 (R1982) – ANSI C37.90.1-1989 – IEEE 472-1974 • Removable I/O terminal blocks • Full three-year warranty standard
Baseboard I/O	
• 16 Digital Input / Accumulator Points • 8 DC Analog Inputs (±5 VDC, 0-5 VDC, 1-5 VDC, ±1 mA, 0-1 mA, 4-20 mA, 10-50 mA)	• 4x SBO or 8x DO Control points (Configurable) • 2x Alarm Contact points
I/O Expansion Capabilities	
• Up to 240 Digital Input Points (5 ms) • Up to 232 DC Analog Input Points (Several Variances Available) • Up to 128 SBO Trip Close Pairs / 256 Digital Output Points • Up to 512 1ms SOE Digital Input Points *[3]* • Up to 12 Analog Output Points *[4]*	• A combination of Special Function Bus Cards – ACI *[4]* – 1MS SOE *[4]* – Digital Output • IRIG-B *[3]* • GPS *[3]*
Same Firmware Capabilities in all SAGE RTUs	
• Intuitive config@WEB Browser Based User Interface: No proprietary Software Required • Extensive Protocol Suite included with every unit • Configurable Math, Logic, and Automation Applications • IEC 61131 Compliant IsaGRAF Programming Interface • NERC CIP Cybersecurity • Advanced Logging with Syslog Client • Force Point Data	• SEL IED Management (AutoConfig, EVE File Storing, Config Change Management) • Detailed Comm Diagnostics and Counters: PCAP, Protocol Captures • Secure Ethernet Protocols – IPSec / IKE – HTTPS – SSL / SSH – SFTP – Embedded Firewall

[2] See our website for a full catalog of I/O Expansion Options.
[3] On PC/104 Expansion Cards
[4] On Discontinued Cards

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



SAGE 3030

Designed for Substation Gateway applications, the SAGE 3030 Magnum can accommodate many vendor agnostic IED's via Serial and Ethernet communications. The SAGE 3030M RTU offers the most communications ports while allowing traditional hardwire I/O options from other SAGE models.

Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each RTU offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library. *[5]*

SAGE 3030 Magnum RTU

Applications

- Substation Data Concentrator
- Substation RTU
- Automation Controller
- Protocol Converter
- NERC CIP Cybersecure IED Gateway

Features Onboard

- Size: 19 x 5.25 x 10.5 Inches
- Serial Ports: 16 x RS-232
- 40° to +80° C Operating Temperature
- Ethernet Ports: 2 x 10/100 Mbps (Optional 3 port Ethernet switch)
- AMD LX-800 500 MHz CPU with 1 GB flash memory (Common to all SAGE RTU)
- Non Windows® OS (VxWorks)
- PC/104™ bus architecture
- Time Synching
  - Continuous IRIG-B output with built-in bus to all communication ports for IRIG-B In, GPS, RTC, or protocol time synchronization
  - GPS *[6]*
  - Protocols
  - Arbiter
- 2x Alarm Contacts
- Wide range Power Input Options
- 85-254 VAC, 85-350 VDC
- Designed for Electric Utility applications
- Meet IEEE 472, ANSI C37.90 SWC
- Meet C37.90.1 standards
- Full 3 Year Warranty Standard
- Rugged relay-style metal enclosure for easy rack mounting
- Over 100 LEDs for positive visual Indications
  - Serial Communications (TX, RX, DCD/ +5V, CTS, RTS) x 18 Power, Run, Reset, Local, Time Source Fail, IED Failed, User Logged In, Config Changed, RLL Running, Ethernet Lik, and Alarm 1 & 2

Hardware I/O Options

- Up to 224 Status / Acc Inputs (5 ms)
- Up to 64 SBO Trip Close Pairs (momentary and latching)
- Up to 256 DC Analog Input points *[6]*
- Up to 512 1ms SOE Status inputs *[6]*

Same Firmware Capabilities in all SAGE RTUs

- Intuitive config@WEB Browser Based User Interface
- No proprietary Software Required
- Extensive Protocol Suite included with every unit
- Configurable Math, Logic, and Automation Applications
- IEC 61131 Compliant IsaGRAF Programming Interface
- NERC CIP Cybersecurity
- Advanced Logging with Syslog Client
- SEL IED Management (AutoConfig, EVE File Storing, Config Change Management)
- Force Point Data
- Detailed Comm Diagnostics and Counters
- PCAP, Protocol Captures
- Secure Ethernet Protocols
- IPSec / IKE
  - HTTPS
  - SSL / SSH
  - SFTP
  - Embedded Firewall



SAGE 4400

The SAGE 4400 combines the best features of the SAGE 3030M and the SAGE 2400. The 4400 is a rack mounted RTU with all the communications capabilities of the 3030M and the I/O flexibility of the SAGE 2400. The 4400 uses the same I/O cards as the other SAGE products for maximum retrofit capability and is designed for applications that require a significant capability for discrete I/O. It includes enough processor power for integration of many IED's as well as intelligent embedded applications and logic functions.

Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each RTU offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library. *[5]*

SAGE 4400 RTU

Applications

- Substation Data Concentrator
- Large Substation RTU
- Automation Controller
- Protocol Converter
- NERC CIP Cybersecure IED Gateway

Features Onboard

- Size: 19 x 7 x 10.5 Inches
- -40° to +80° C Operating Temperature
- AMD LX-800 500 MHz CPU with 1 GB flash memory (Common to all SAGE RTU)
- Serial Ports: 16 x RS232 with Comm Status LED's on Front Panel
  - RTU status LED's on Front Panel
  - 5VDC available on each port (up to 5W total)
  - 300-115,000 bps available
- Ethernet Ports: 2 x 10/100 Mbps (Optional 3 port switch *[6]*)
- 2x Alarm Contacts Onboard
- Remote/Local Switch with available Dry Contacts
- Time Synching
  - IRIG-B In -> Distributed to all 16 Serial ports
  - GPS *[6]*
  - Protocols
  - Arbiter
- Power Input Options
  - 10-33 VDC
  - With Input Fusing and power switch
  - Grounding Bar

Hardware I/O Options

- Options with more user friendly cable interface (See attached brochure for I/O details)
- Up to 224 Status Inputs (5 ms)
- Up to 256 - 1 ms SOE Status Inputs
- Up to 128 SBO Trip Close Pairs
- Up to 256 DC Analog Input points
- Up to 256 DO Digital Output Points

Same Firmware Capabilities in all SAGE RTUs

- Intuitive config@WEB Browser Based User Interface. No proprietary Software Required
- Extensive Protocol Suite included with every unit
- Configurable Math, Logic, and Automation Applications
- IEC 61131 Compliant IsaGRAF Programming Interface
- NERC CIP Cybersecurity
- Advanced Logging with Syslog Client
- SEL IED Management (AutoConfig, EVE File Storing, Config Change Management)
- Force Point Data
- Detailed Comm Diagnostics and Counters
- PCAP, Protocol Captures
- Secure Ethernet Protocols
  - IPSec / IKE
  - HTTPS
  - SSL / SSH
  - SFTP
  - Embedded Firewall

[5] See our website for a full catalog of I/O Expansion Options.
[6] Available with PC/104 Expansion Cards

© 2025 Schneider Electric
All Rights Reserved
12/17/2025




SAGE 1410

Smart and compact data concentrator / protocol converter / gateway solution.

Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each RTU offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library.

SAGE 1410 RTU

Applications	
• Substation Data Concentrator • Automation Controller	• Protocol Converter • Flexible Communications Interfaces
Features	
• Compact Footprint 8 x 5 x 2 (W x L x H) Inches • 40° to +85° C Operating Temperature • Two — Built-in 10/100 Mbps Ethernet® ports (independent IPs) : Optional four port Ethernet switch *[7]* • Two RS232 w/LEDs for DCD, RX, RTS, CTS and TX (Expands to 10 *[7]*) • One RS485 w/LEDs for RX and TX (2 wire operation) • One Fiber Optic communications w/LEDs for RX and TX • AMD LX-800 500 MHz CPU with 1 GB flash memory (Common to all SAGE RTU) • PC/104™ bus architecture for easy future upgrades • Optional 125 VDC/20-60 VDC/120 VAC power supply	• Separate PPP port for serial dial-up • Non-Windows® OS (VxWorks) • Designed for Electric Utility applications – Meet IEEE 472, ANSI C37.90 SWC – Meet C37.90.1 standards • Optional on board GPS Receiver • Optional IRIG-B Input/Output • On board LEDs show operational status: Power / Full Comm Status indications • Full three Year Warranty Standard • Accepts 12-33VDC Input Power directly
Same Firmware Capabilities in all SAGE RTUs	
• Intuitive config@WEB Browser Based User Interface. No proprietary Software Required • Extensive Protocol Suite included with every unit • Configurable Math, Logic, and Automation Applications • IEC 61131 Compliant IsaGRAF Programming Interface • NERC CIP Cybersecurity • Advanced Logging with Syslog Client • SEL IED Management (AutoConfig, EVE File Storing, Config Change Management)	• Force Point Data • Detailed Comm Diagnostics and Counters • PCAP, Protocol Captures • Secure Ethernet Protocols – IPSec / IKE – HTTPS – SSL / SSH – SFTP – Embedded Firewall

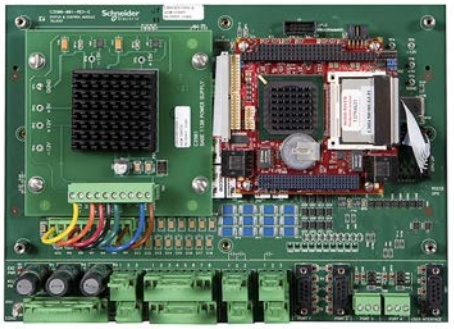

SAGE 1430

Compact status and control module with powerful IED integration capabilities.


Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each RTU offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library.

SAGE 1430 RTU

Applications	
• Feeder RTU with built in Status and Control • Automation Controller	• Protocol Converter • Flexible Communications Interfaces
Features	
• Compact Footprint: 8 x 12.5 x 4 (W x L x H) Inches • 40° to +85° C Operating Temperature • 2 - Built-in 10/100 Mbps Ethernet® ports (independent IPs) • Optional – 4 port Ethernet switch • 2 RS232 w/LEDs for DCD, RX, RTS, CTS and TX (Expandable to 10)	• 2 RS485 w/LEDs for RX and TX (2 wire operation) • Separate PPP port for serial dial-up • AMD LX-800 500 MHz CPU with 1 GB flash memory (Common to all SAGE RTU) • Non Windows® OS (VxWorks) • PC/104™ bus architecture
Hardware I/O	
• 16 Digital Inputs (Status/Accumulator/SOE) • 4 T/C Momentary Controls (8 relays) • Easy to connect removable Phoenix® type terminal blocks • Designed for Electric Utility applications – Meet IEEE 472, ANSI C37.90 SWC – Meet C37.90.1 standards	• Optional on board GPS Receiver • Optional IRIG-B Input/Output • Optional DC Analog Input Module • On board LEDs show operational status (Power / Full Comm Status indications) • Full 3 Year Warranty Standard • Built-in 125 VDC/20-60 VDC/120 VAC power supply
Same Firmware Capabilities in all SAGE RTUs	
• Intuitive config@WEB Browser Based User Interface. No proprietary Software Required • Extensive Protocol Suite included with every unit • Configurable Math, Logic, and Automation Applications • IEC 61131 Compliant IsaGRAF Programming Interface • NERC CIP Cybersecurity • Advanced Logging with Syslog Client • Force Point Data	• SEL IED Management (AutoConfig, EVE File Storing, Config Change Management) • Detailed Comm Diagnostics and Counters • PCAP, Protocol Captures • Secure Ethernet Protocols – IPSec / IKE – HTTPS – SSL / SSH – SFTP – Embedded Firewall

[7] With PC/104 Expansion Cards

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

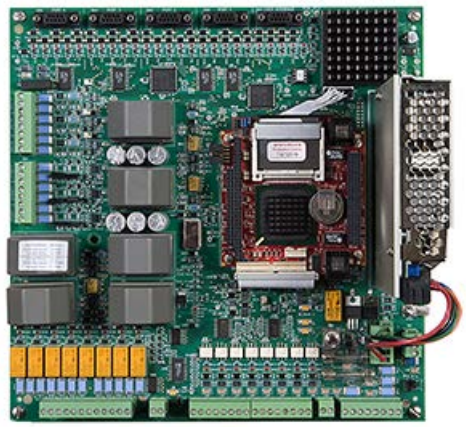

SAGE 1450

SAGE 1450 RTU

A powerful pole-top distribution automation platform with all the functionality of a gateway. AC Input (ACI) option provides an advanced transducer-less AC analog input capability. The SAGE 1450 can be used for interfacing to conventional PTs and CTs as well as standard current/voltage linepost sensors such as the Square D LSCV Line Post Sensors or Lindsey CVMI linepost sensors. These terminations include custom instrument-grade transformers, designed for high linearity and ultra low phase shift, which provide the high impedance inputs required for the linepost sensor resistor divider voltage outputs.

Each SAGE RTU provides the same browser-based user interface for easy configuration and setup. Each RTU offers IED integration, NERC CIP security, IEC 61131-based logic functions, communications protocols, and a custom applications library.

Applications

- Feeder RTU with built in AC Analog Inputs
- Automation Controller
- Protocol Converter
- Sectionalizer
- Cap Bank Controller

Features

- Compact Footprint: 11 x 11 x 4 Inches
- 40° to +85° C Operating Temperature
- Two Built-in independent Ethernet Ports
- Optional 4 Port Ethernet switch *[8]*
- Four Built-in serial ports (expands to 12 *[8]*)
- Separate PPP port for serial dial-up
- AMD LX800 500 Mhz CPU w/ 1 GB Flash Memory
- Built-in Battery Charger w/low voltage disconnect
- On Board I/O with removable terminal blocks
  - 8 Digital Inputs (Sts/Accum/SOE)
  - 4 T/C Mom Pairs (8 relays - 2A@30VDC)
  - 6 Transducerless AIs (3 current & 3 voltage)
  - 2 DC Analog Inputs (Input Voltage and Battery Voltage)
- On board LEDs show operational status
  - Power, status, control indications
  - Full Comm Status indications
- Accepts 9-33 VDC Input Power directly
- Optional 125 VDC/20-60 VDC/120 VAC on-board power supply
- Designed for Electric Utility applications
  - Meet IEEE 472, ANSI C37.90 SWC
  - Meet C37.90.1 standards
- Optional On-Board GPS Receiver *[8]*
- Optional IRIG-B Input/Output *[8]*
- Full 3 Year Warranty Standard

Same Firmware Capabilities in all SAGE RTUs

- Intuitive config@WEB Browser Based User Interface. No proprietary Software Required
- Extensive Protocol Suite included with every unit
- Configurable Math, Logic, and Automation Applications
- IEC 61131 Compliant IsaGRAF Programming Interface
- NERC CIP Cybersecurity
- Advanced Logging with Syslog Client
- SEL IED Management (AutoConfig, EVE File Storing, Config Change Management)
- Force Point Data
- Detailed Comm Diagnostics and Counters
- PCAP, Protocol Captures
- Secure Ethernet Protocols
  - IPSec / IKE
  - HTTPS
  - SSL / SSH
  - SFTP
  - Embedded Firewall

SAGE Sales and Support

New RTU Sales	
Email:	USUtilityQuotes@se.com
Tips:	Tips: Power Input Requirements, Hard wired I/O Requirements, Communications Ports Needed, Mounting, Other options needed will expedite the quotation process.

Spares and Upgrades	
Phone:	(713) 920-6897
Email:	USUtilityQuotes@se.com
Tips:	Having the Part Number from the Baseboard or CPU will help choose the right spare for your application.

Technical Support	
Phone:	(713) 920-6832
Email:	sagertu_support@se.com
Tips:	Generally a copy of the configuration, data traps, and the firmware version will help us diagnose any problems.

Repairs	
Email:	USUtilityQuotes@se.com
Tips:	Have the Tag numbers from the affected products, and the Serial Number. Remove known good parts to minimize any repair costs.

[8] With PC/104 Expansion Cards

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

New!

Easergy™ T300 RTUs — Introduction

The Easergy T300 is a single, powerful feeder RTU designed to prepare your business for the future. It helps you evolve with the grid, improve downtime tolerance, and manage increasing energy demand. It also helps you meet increased quality and performance requirements, optimize costs, and improve the efficiency of your electrical distribution network. Easergy T300 Remote Terminal Unit (RTU) is a modular platform of hardware and firmware, and an application building block for Medium Voltage and Low Voltage public distribution network management. It offers a single solution for control and monitoring from a simple pole-top device to a large MV/MV or MV/LV substation. *[1]*

Features and Benefits

- Reduce MV and LV outage durations (SAIDI)
- Centralized and decentralized MV and LV distribution network management: fault location, isolation, and service restoration
- Private network management (MV loops): Self-healing network management – Automatic Transfer Switch
- Volt/VAR optimization support for distributed generation integration
- MV and LV power and quality measurement according to standard EN 50160
- Synchronize voltage measurements on the feeder in order to facilitate distributed generation integration
- Asset management efficiency. Reduce CAPEX with a single, multi-application, modular offer
- Strong Cybersecurity Management

Table 5.68: Easergy T300 RTUs — Overview

HU250 Head Unit and Communication Gateway	SC150 MV Switchgear Controller	LV150 Transformer an LV Switchboard Monitoring
 HU250	 SC150	 LV150
Applications covered:	**Applications covered:**	**Applications covered:**
• Communication Gateway • Automation Controller • Sectionalizer • Cap Bank Controller & Volt Var Optimization • Distributed energy resources control and monitoring • Cybersecurity Gateway – Compliant with IEC 62351 and IEEE P1686 – SCADA communication security (IEC 62351-5) – Local and remote access security based on RBAC (IEC 62351-8) – Connection security for maintenance (local and remote): HTTPS, SSH – Protocol security for file transfer: SFTP – Authentication by centralized Radius client	• MV Network Management. Modular up to 24 Load Break Switches • Non-Directional and Directional Fault Detection • Sectionalizer and Auto Transfer Source Automation • Power measurement (IEC 61557-12) • Power Quality (IEC 61000-4-30 Class S) • Underground MV/MV and MV/LV substation control and monitoring • Overhead load break switch (LBS) control	• LV network distribution monitoring • LV Power measurement according to IEC 61557-12 • LV Power quality according IEC 61000-4-30 Class S • Pad-mounted and Overhead Transformer temperature monitoring • LV Broken conductor detection (fuse detection)

Table 5.69: Easergy T300 Power Supplies

PS50 and PS25 Power Supplies	
 PS50	 PS25
Wide range of smart power supplies. The Easergy T300 back-up power supplies are designed for power supply interruptions in order to maintain control and monitoring of the MV substation during the outage.	

[1] Refer to catalog (document number NRJED314621EN) or the Easergy T300 product range for more information.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025


HU250

Easergy HU250 Communication Gateway

Easergy™ HU250 is a powerful and flexible communication gateway for all Easergy T300 configurations. *[2]*

- Easergy HU250 can also be used as a standalone gateway for third-party IEDs
- Open to any communication system and protocol
- Compliant with cyber security standards
- Advanced configuration tools
- Open to IEC 61131 applications
- Web server for easy commissioning and maintenance
- Easy remote and local firmware updates
- Secure Wi-Fi connectivity

Table 5.70: Easergy HU250

Description	Catalog Number
Easergy HU250: head unit communication gateway with cyber security management	EMS59000


SC150

Easergy SC150 Medium Voltage Switch Controller

All advanced functions for MV line and switchgear management in a compact box. *[2]*

- Switchgear control and monitor
- Advanced fault detection
- Power measurement
- Power quality
- Sectionalizer automation
- Embedded operator HMI
- Automation systems
  - Automatic Transfer Source (ATS), self healing, etc., are hosted in HU250 and are designed in a IEC 61131-3 PLC workbench.
  - The sectionalizer automation (SEC) concerning one switchgear is managed by the SC150 module. This automation is factory predefined but configurable on site. This automation provides the autonomous ability to open the MV switch following detection of a number of fault currents.

Table 5.71: Easergy SC150

Description	Catalog Number
SC150 Medium Voltage Switch Controller CT-LPVT/VT, 1/5 A - LPVT/VT sensors	EMS59201
SC150 Medium Voltage Switch Controller CT-CAPA, 1/5 A - VPIS/VDS/PPACS sensors	EMS59202


LV150

Easergy LV150 Low Voltage Transformer Monitor

The Easergy LV150 is an unmatched low voltage monitoring module designed for the public MV/LV substation. It combines accurate 3-phase energy and power measurements with data logging, power quality analysis, alarming and temperature capabilities not typically available in such a compact RTU. The Easergy LV150 is compliant with stringent international standards that enhance its metering accuracy and power quality measurements, as specified by the safety standard requirement for the MV/LV substation. Easergy LV150 gives you the energy intelligence and control needed to track performance, stay informed in real time of critical conditions and empower you to make strategic decisions. It will help you increase reliability, maximize the use of resources and improve service. *[2]*

Applications

- Transformer temperature monitoring
- LV incomer power monitoring
- LV incomer power quality monitoring
- LV network voltage fault detection (loss of neutral at transformer level)

Table 5.72: Easergy LV150

Description	Catalog Number
Low Voltage Transformer Monitor	EMS59300

[2] Refer to catalog (document number NRJED314621EN) or the Easergy T300 product range for more information.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



PS50 PS25

Easergy PS50 and PS25 Backup Power Supplies

The Easergy T300 PS50 and PS25 backup power supplies are designed for long power supply interruption and to maintain control and monitoring of the entire MV substation during outages. Designed to supply all components in the substation including switchgear mechanics and motors. The Easergy PS50 is ideal for isolated sites that are regularly struck by lightning. *[3]*

- 10 kV insulation and 20 kV surge
- Protected against neutral cutout
- High temperature range: -40° C to 70° C and easy maintenance
- Only a unique battery (PS50 and PS25-12) for easy maintenance and robust lifespan (> 10 years)
- Battery end-of-life monitoring for preventive maintenance

Applications

- Designed for severe environments with a high level of insulation
- Designed for very long outage times
- Easy maintenance with only one battery

Table 5.73: Easergy T300 PS50 and PS25 Backup Power Supplies

Description	Catalog Numbers
Easergy PS25-12V: Power supply and battery charger single 12V 48W output	EMS58585
Easergy PS25-24V: Power supply and battery charger single 24V 48W output	EMS58586
Easergy PS50-24V: Power supply and battery charger 12V and 24V outputs	EMS58587
Easergy PS50-48V: Power supply and battery charger 12V and 48V outputs	EMS58588

[3] Refer to catalog (document number NRJED314621EN) or the Easergy T300 product range for more information.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Section 6

Surge Protective Devices (SPDs) and Easy UPS 3S



Square D™ QO / HOM PoN SPDs



HEPD Series



Surgelogic™ Type IMA



Surgelogic™ Type EMA



Surgelogic™ Type EMB



Surgelogic™ Type SDSA

Residential SPDs 6-2

Whole Home Surge Protective Devices 6-2
Plug-on Neutral QO and Homeline Load Center Surge Protective Devices 6-2
QO, NQ, and Homeline Load Center Surge Protective Devices 6-2

Internally Mounted SPDs 6-3

Overview 6-3
Internally Mounted—New Construction/Factory Assembled 6-3
OEM/Assembler Kits 6-3
Internally Mounted SPDs—Field Installable 6-4
Surgelogic Surgeloc for NQ Panelboards 6-4

Stand Alone Enclosed SPDs 6-5

External Mount Surge Protective Devices 6-5
SDSA1175, SDSA 3–Phase, and SPDE SPDs 6-6

Specialty SPDs 6-7

Industrial Control Panel SPD and Series Filters 6-7
IESE Series Filter 6-7

Square D™ Easy UPS 3S 6-8

Square D Easy UPS 3S (UL 208 V) 6-8

© 2025 Schneider Electric
All Rights Reserved
12/30/2025


HEPD25


HEPD50


HEPD80

Whole Home Surge Protection

HEPD Whole House devices are designed to deliver superior AC surge protection for the entire AC power system in a home. HEPDs are compact in size and are designed to protect AC wires in the home from surges that could affect home electronics and appliances not connected to surge strips.

cULus Listed to the latest UL 1449 standard, UL Type 1 SPD, CSA C22.2 No.-M1986, C233.1-87. Meets NEC2023 Section 215, 225, and 230 requirements.

- 120/240 Vac
- Max surge current ratings available: 25, 50, and 80 kA
- NEMA 4X rate for indoor or outdoor applications
- LED status indicators
- Compatible with all brands of load centers
- Flush Mount Kit sold separately - see table below
- UL Nominal Discharge Current rating of 10kA or higher

Table 6.1: HEPD Whole House Surge Protective Devices

Description	Surge Current Rating	Cat. No.
25 kA Home Electronic Protective Device	25 kA	HEPD25
Flush Mount Kit for HEPD25	—	HEPD25MKF
50 kA Home Electronic Protective Device	50 kA	HEPD50
80 kA Home Electronic Protective Device	80 kA	HEPD80
Flush Mount Kit for HEPD50 / HEPD80	—	HEPD58MKF

Plug-on Neutral QO and Homeline Load Center Surge Protective Devices

The industry's first exclusive Plug on Neutral (PoN) Surge Protective Device (SPD). Square D load center PoN SPDs are a simple and quick installation. It's as easy as snap, click, done. PoN SPDs are easier to install than a standard circuit breaker. No wires are needed for installation. The PoN SPD simply plugs on to the bus and neutral bar. The surge suppressors use two-pole spaces in a QO or Homeline load center.

US and Canadian UL Listed as Type 1 SPD to the UL 1449 standard. Complies with requirements of NEC Article 285 (2017), CSA C233.1-87, and CSA C22.2 No. 8-M1986 as appropriate. Meets NEC2023 Section 215, 225 and 230 requirements.


QO250PSPD


HOM250PSPD

- Industry First: No wires or tools required for installation
- Installation Flexibility: Works on Plug-on Neutral design QO or HOM load centers
- Requires two pole spaces
- LED indicates operational status
- 50 kA per phase surge current rating
- UL Nominal Discharge Current rating of 20 kA

Table 6.2: QO, NQ, and Homeline Load Center Surge Protective Device

Description	Cat. No.
Plug on Neutral QO Surgebreaker	QO250PSPD
Plug on Neutral Homeline Surgebreaker	HOM250PSPD

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.

QO, NQ, and Homeline Load Center Surge Protective Devices

Square D load center surge protective devices are easy to install plug-in units that install as quickly as a standard circuit breaker. The surge suppressors use two pole spaces in a QO or Homeline load center, or NQ panelboard.

US and Canadian UL Listed as Type 1 SPD to the UL 1449 standard. Complies with requirements of NEC Article 285 (2017), CSA C233.1-87, and CSA C22.2 No. 8-M1986 as appropriate. Meets NEC2023 Section 215, 225 and 230 requirements.


QO217SB


HOM2175SB

- QO2175SB for QO load centers, combination devices, and NQ panelboards
- HOM2175SB for Homeline load centers and combination devices
- Requires two pole spaces
- LED indicates operational status
- Whole House Protection: 25 kA surge current capacity per phase
- UL Nominal Discharge Current rating of 10 kA

Table 6.3: QO, NQ, and Homeline Load Center Surge Protective Devices

Description	Cat. No.
QO Surgebreaker for QO and NQ	QO2175SB
Homeline Surgebreaker	HOM2175SB

© 2025 Schneider Electric
All Rights Reserved
12/30/2025

Internally Mounted Surge Protective Devices

Surgelogic Type IMA

Internally mounted surge protective devices are installed integrally to systems for service entrance and branch panel surge suppression. Internally mounted SPDs installed next to the supply bus provide maximum performance inside Square D systems. Built-in performance is the way to achieve cost effective power quality and continuous operation (especially important for critical power facilities).

US and Canadian UL Recognized as a Type 2 (or 1 with optional suffix in catalog number) SPD Component Assembly to UL 1449 and UL 1283 standards. Complies with requirements of NEC Article 285 (2017) and CSA C22.2 No. 8-M1986 as appropriate. Complies with UL 96A Master Label requirements for Lightning Protection Systems.

Internally Mounted—New Construction / Factory Assembled

Factory installed integral/internal Surgelogic SPD products make adding surge suppression to new construction projects easy. Refer to the sections listed below to identify the correct product for your application or contact Surgelogic TAG at 1-800-577-7353 for assistance.

Panelboards
Refer to Section 9


NF


NQ

Switchboards and Switchgear
Refer to Section 11


PZ4


QED

Integrated Power and Control Centers
Refer to Section 10


IPAC2

OEM/Assembler Kits

Surgelogic OEM/assembler kits allow manufacturers to add industry-leading surge suppression directly to customized equipment. Manufacturers benefit from shorter wire lengths that optimize the clamping voltage of the SPD. Products come with a backplane-mounted SPD, mounting hardware and diagnostic display with 36-inch cables. Audible alarm, silence switch, remote monitoring contacts, and surge counter are standard. Available as UL 1449 Type 1 with fused UL 1283 components.

US and Canadian UL Recognized to UL 1449. Complies with requirements of NEC Article 285 (2017) and CSA C22.2 No. 8-M1986, as appropriate. Complies with UL 96A Master Label requirements for Lightning Protection Systems.


Single Module OEM Kit


Multi-Module OEM Kit

Table 6.4: OEM/Assembler Kits

Service Voltage	Peak Surge Current Rating per Phase (kA)	Cat. No.
120/240 V, 1-phase, 3-wire + ground	200 kA Multi-Module	IMA12
	300 kA Single Module	IMB13 IMB13F
208Y/120 V, 3-phase, 4-wire + ground *[1] [2]* Wye	200 kA Multi-Module	IMA22
	300 kA Single Module	IMB23 IMB23F
240/120 V, 3-phase, 4-wire + ground High-leg Delta	200 kA Multi-Module	IMA32
	300 kA Single Module	IMB33
240 V, 3-phase, 3-wire + ground *[1] [3]* Delta	200 kA Multi-Module	IMA62
	300 kA Single Module	IMB63
480Y/277 V, 3-phase, 4-wire + ground *[1] [3]* Wye	200 kA Multi-Module	IMA42
	300 kA Single Module	IMB43 IMB43F
480 V, 3-phase, 3-wire + ground *[4]* Delta	200 kA Multi-Module	IMA52
	300 kA Single Module	IMB53
600Y/347 V, 3-phase, 4-wire + ground *[1]* Wye	200 kA Multi-Module	IMA82
	300 kA Single Module	IMB83F
600 V, 3-phase, 3-wire + ground *[5]* Delta	200 kA Multi-Module	IMA92
	300 kA Single Module	IMB93

[1] Can be used on 4-wire or 3-wire grounded wye systems with or without neutral.
[2] 208Y/120 series also applies to the following voltage 220Y/127.
[3] 480Y/277 series applies to the following voltages 380Y/220, 400Y/230, and 415Y/240.
[4] 480 V Delta series also applies to the following voltage: 480Y/277V HRG.
[5] 600 V Delta series also applies to the following voltage: 600Y/347V HRG.

© 2025 Schneider Electric
All Rights Reserved
12/30/2025



I-Line™ Surgelogic SPD Unit

Internally Mounted—Field Installable

For high-performance surge suppression at critical power locations, a variety of Surgelogic products have been designed specifically for retrofitting into commonly used Square D systems. The I-Line plug-on units and the SurgeLoc for the NQ panelboards come ready to install. Retrofitting SPD units into I-Line, and NQ Panelboard applications is simple.

- Audible alarm with enable/disable switch, dry contacts and surge counter standard
- 200 kA SCCR withstand
- Indicator LEDs
- EMI/RFI filtering
- Catalog numbers with a "1" suffix are UL Type 1 devices, and without the "1" suffix are UL Type 2 devices

Table 6.5: Internally Mounted—Retrofit / Ready To Install

Voltage	Surge Current Rating	I-Line Branch Units *[6]*	
		Cat. No.	Cat. No.
208Y/120 V, 3-phase, 4-wire + ground *[7] [8]* Wye	120 kA	HL2IMA12C HL2IMA12C1	—
	160 kA	HL2IMA16C HL2IMA16C1	—
	240 kA	HL2IMA24C HL2IMA24C1	HR2IMA24C
240 V, 3-phase, 3-wire + ground, Delta	240 kA	HL6IMA24C	—
480Y/277 V, 3-phase, 4-wire + ground *[7] [9]* Wye	120 kA	HL4IMA12C HL4IMA12C1	HR4IMA12C
	160 kA	HL4IMA16C HL4IMA16C1	—
	240 kA	HL4IMA24C HL4IMA24C1	HR4IMA24C
480 V, 3-phase, 3-wire + ground, Delta *[10]*	240 kA	HL5IMA24C HL5IMA24C1	HR5IMA24C
600Y/347 V, 3-phase, 4-wire + ground *[7]* Wye	160 kA	—	HR8IMA16C HR8IMA16C1
	240 kA	—	HR8IMA24C HR8IMA24C1



Surgelogic SurgeLoc

Surgelogic SurgeLoc for NQ Panelboards

Surgelogic SurgeLoc is the industry's first field installed internally mounted SPD in NQ panelboards - fully installed in approximately 2 minutes. Surgelogic SurgeLoc can be ordered as factory assembled in NQ Panelboards or can be ordered from your local Schneider Electric distributor for retrofit opportunities for NQ panelboards.

US and Canadian UL Recognized to UL 1449 and UL 1283 standards. Complies with requirements of NEC Article 285 (2017) and CSA C22.2 No. 8-M1986 as appropriate. Complies with UL 96A Master Label requirements for Lightning Protection Systems.

- Retrofit into existing NQ Panelboards
- Ten modes of protection
- 200 kA SCCR withstand
- Audible alarm with enable/disable switch, dry contacts and surge counter standard
- Indicator LEDs; normal (green) and fault condition (red) for each phase

Table 6.6: Internally Mounted—Retrofit / Ready to Install

Voltage	Surge Current Rating	NQ Panelboard Units—SurgLoc *[11]*
		Cat. No.
120/240 V, 1-phase, 3-wire + ground	100 kA	SSP01SBA10D
	200 kA	SSP01SBA20D
	240 kA	SSP01SBA24D
208Y/120 V, 3-phase, 4-wire + ground *[12] [8]* Wye	100 kA	SSP02SBA10D
	200 kA	SSP02SBA20D
	240 kA	SSP02SBA24D
240Y/120 V, 3-phase, 4-wire + ground High-leg Delta	240 kA	SSP03SBA24D

[6] Requires 13.5-inch mounting height. HL circuit breakers are 125kAIC SCCR (240 V and below), 100kAIC SCCR (480 V), 50kAIC SCCR (600 V)
[7] Can be used on 4-wire or 3-wire grounded wye systems with or without neutral.
[8] 208Y/120 series also applies to the following voltage 220Y/127.
[9] 480Y/277 series applies to the following voltages 380Y/220, 400Y/230, and 415Y/240. HR circuit breakers are 200kAIC SCCR (480 V and below), 100kAIC SCCR (600 V)
[10] 480 V Delta series also applies to the following voltage: 480Y/277V HRG.
[11] Requires 12 circuit positions (6 adjacent mounting spaces per side).
[12] Can be used on 4-wire or 3-wire grounded neutral system.

© 2025 Schneider Electric
All Rights Reserved
12/30/2025



New!

External Mount SPDs

Surgelogic surge protective devices feature a compact design that allow surge suppression to be externally installed adjacent to electrical distribution equipment. Surgelogic systems are designed to provide high-quality surge suppression for a wide variety of commercial, industrial or institutional applications.

US and Canadian UL Listed to the UL 1449 standard. Complies with requirements of NEC Article 285 (2017) and CSA C22.2 No. 269.1 and 269.2, as appropriate. Complies with UL 96A Master Label requirements for Lightning Protection Systems.

Features of Surgelogic surge protective devices:

- LED light indicates operation status, audible alarm, dry contacts
- 200 kA SCCR withstand
- Surgelogic HWA UL Type 2 surge protective devices are designed and listed for indoor or outdoor installation and surge suppression for single-phase and three-phase electrical services up to 600 Vac.
- EMA units are UL Type 1, indoor rated and comes with a surge counter and fused UL 1283 components
- EMB units are UL Type 1, suitable for indoor and outdoor applications (UL / NEMA Type 4X rated) UL Type 2 with UL 1283 dual listing available with some configurations with "F" suffix indicated below
- HWC units are UL Type 2, suitable for indoor and outdoor applications (UL / NEMA Type 4X rated), includes a surge counter and are UL 1283 listed
- EMD units are UL Type 1, suitable for indoor and outdoor applications (UL / NEMA 4 rated) and come with a disconnect switch, surge counter UL Type 2 with UL 1283 dual listing available with some configurations with "F" suffix indicated below
- HWL and EML units are UL Type 1 and feature 10 discrete modes of protection
- Optional flush mount kits:
  - HWA = HWAFM
  - HWB = HWBFM
  - EMA = EMAFM
  - EMB = EMBFM
  - HWC = HWCFM
- Remote Monitor = TVS12RMU

Table 6.7: Enclosed SPDs

Service Voltage	Indoor / Outdoor		Indoor Only Surge Counter		Indoor / Outdoor	Indoor / Outdoor Surge Counter	Indoor / Outdoor Surge Counter, Disconnect Switch	
	HWA (UL Type 2, UL 1283)	HWB (UL Type 1)	EMA 100 kA	EMA 200 kA	EMB 200 kA	HWC 300 kA	EMD 300 kA	EMD 500 kA
120 / 240 V, one-phase, three-wire + ground [2]	HWA11	HWB11	EMA11	EMA12	EMB12 EMB12F	HWC13	EMD13 EMD13F	—
208Y / 120 V, three-phase, four-wire + ground [3] [4] [2] Wye	HWA21	HWB21	EMA21	EMA22	EMB22 EMB22F	HWC23	EMD23 EMD23F	EMD25
240 / 120 V, three-phase, four-wire + ground [2] High-leg Delta	HWA31	HWB31	EMA31	EMA32	EMB32	HWC33	EMD33	—
480Y / 277 V, three-phase, four-wire + ground [4] [5] [2] Wye	HWA41	HWB41	EMA41	EMA42	EMB42 EMB42F	HWC43	EMD43 EMD43F	EMD45
480 V, three-phase, three-wire + ground [6] Delta	HWA51	HWB51	EMA51	EMA52	EMB52	HWC53	EMD53	EMD55
240 V, three-phase, three-wire + ground Delta	HWA61	HWB61	EMA61	EMA62	EMB62	HWC63	EMD63	—
600Y / 347 V, three-phase, four-wire + ground, [2] [4] WYE	HWA81	HWB81	EMA81	EMA82	EMB82F	HWC83	EMD83F	—
600 V, three-phase, three-wire + ground [7]	HWA91	HWB91	EMA91	EMA92	—	—	EMD93F	—

Table 6.8: Enclosed 10 Discrete Mode SPDs

Service Voltage	Indoor / Outdoor Surge Counter	Indoor / Outdoor Surge Counter, Disconnect Switch
	HWL 300 kA	EML 300 kA
120 / 240 V, one-phase, three-wire + ground	HWL13	—
208Y / 120 V, three-phase, four-wire + ground Wye	HWL23	EML23
480Y / 277 V, three-phase, four-wire + ground Wye	HWL43	EML43

© 2025 Schneider Electric
All Rights Reserved
12/30/2025



SDSA1175



SDSA Three-Phase



SPDE

New!

SDSA1175, SDSA Three-Phase, and SPDE Surge Protective Devices

Surgelogic SDSA1175 surge protective devices are designed and listed for indoor or outdoor installation and surge suppression for single-phase three-wire 120/240 Vac or two-wire 120 Vac 60 Hz electrical services. This product is ideal for panel builders as well as manufacturers and integrators of instrumentation cabinets for industrial and commercial applications for single-phase power systems.

Surgelogic SDSA three-phase surge protective devices are designed and listed for indoor or outdoor installation and surge suppression for three-phase electrical services up to 600 Vac. The SDSA three-phase series is used extensively in service entrance panels to provide an efficient and economical means of surge suppression and also ideal for point of use applications for that added level of protection.

Surgelogic SPDE surge protective devices add neutral to ground (N-G) protection and optional dry contacts (DC) and audible alarm (AA). The SPDE can also be mounted on a DIN Rail with the included mounting bracket.

US and Canadian UL Listed as Type 1 SPD to the UL 1449 standard. Complies with requirements of NEC Article 285 (2017), CSA C233.1–87, and CSA C22.2 No. 8–M1986 as appropriate.

Table 6.9: SDSA1175 and SDSA Three-Phase Surge Protective Devices

System Voltage	Surge Current Rating per Phase (kA)	L-N Only Cat. No.	L-N & N-G Cat. No.	L-N & N-G) with DC & AA Cat. No.
120 V, one-phase, two-wire	36	SDSA1175T	—	—
	50	—	SPDE0	SPDE0A
120 / 240 V, one-phase, three-wire	36	SDSA1175	—	—
	50	—	SPDE1	SPDE1A
208Y / 120 V three-phase, four-wire	50	SDSA2040	SPDE2	SPDE2A
240 V Delta, three-phase, three-wire	50	SDSA2040D	—	SPDE6A
480Y / 277 V, three-phase, four–wire	50	SDSA4040	SPDE4	SPDE4A
480 V Delta, three-phase, three-wire	50	SDSA4040D	—	SPDE5A
600Y / 347 V, three-phase, four-wire	50	SDSA3650	—	SPDE8A
600 V Delta, three-phase, three-wire	50	SDSA3650D	—	SPDE9A

© 2025 Schneider Electric
All Rights Reserved
12/30/2025







IESE Series Filter

Multi 9 DIN Rail Mounted SPD

Surgelogic Multi 9 surge protective devices are 75 kA per mode devices provide compact surge protection for OEM installations. These units feature a tab to indicate device status and have dry contact lugs for remote indication. The Multi 9 SPD is UL Type 1 recognized. There are 1, 2, 3 and 4 pole options to meet application specific requirements.

US and Canadian UL recognized to UL 1449 Type 1. Complies with requirements of NEC Article 285 (2017) and CSA C22.2 No. 8-M1986 as appropriate. Complies with UL 96 A Master Label requirements for Lightning Protection Systems.

Voltage	Poles	Cat. No.
120 V Single Phase	1	M9L11120
240 V, 277 V Single Phase	1	M9L31277
120 / 240 V Split phase	2	M9L12240
208Y / 120 V Wye, 240 V Delta	3	M9L23240
480 V Delta 3W + Ground	3	M9L53480
480Y / 277 V 480 V Delta, Wye, 4W	3	M9L33480
208Y / 120 V Wye, 4W + Ground	4	M9L17208
480Y / 277 V Wye, 4W + Ground	4	M9L37480

IESE Series Filter

Surgelogic Type IESE with ActiveTracking™ Filter technology offers high frequency noise filter capabilities with surge protection for loads up to 5 or 20 A of continuous current. These are DIN mounted devices for 120 V or 240 V applications.

US and Canadian UL Recognized to UL 1449 Type 2 / UL 1283. Complies with requirements of NEC Article 285 (2017) and CSA C22.2 No. 8-13, CSA Electrical Notice 516.

Description	Cat. No.
120 V 5 A Series Filter	HFNF120IESE005
120 V 20 A Series Filter	HFNF120IESE020
240 V 5 A Series Filter	HFNF240IESE005
240 V 20 A Series Filter	HFNF240IESE020

© 2025 Schneider Electric
All Rights Reserved
12/30/2025



UPS



Battery String



Modular Battery Cabinet

Square D Easy UPS 3S (UL 208 V)

The **Square D Easy UPS 3S** is an easy-to-install, easy-to-use and easy-to-service **10-40 kVA** 3-phase 208 V UPS ideal for non-IT applications. Easy UPS 3S combines power stability with robust electrical specifications and long-lasting performance to ensure your business continuity.

- **US listed to the UL 1778 standard**
- **Complies with the requirements of CSA C22.2 No. 107.3-14 + GI1**
- **IP20 rated**
- **Optimize efficiency**
  - Double Conversion Mode (up to 94%)
  - ECO Mode (98% efficiency)
- **1.0 power factor kVA = kW**
- **Parallel up to 4 units for 10-30 kVA. Parallel 3 units for 40 kVA.**
- **Robustness against harsh environment**
  - Conformal coating on PCBA
  - Replaceable dust filter
  - 60s @ 150% overload, 10 min. @ 125% overload.
  - Operating temperature: 32 - 104°F
- **Flexibility for wider application**
  - Modular battery cabinet for longer runtime
  - SNMP / Modbus TCP/IP / dry contact for connectivity
  - 5 years lifespan battery module
- **Connectivity**
  - Startup service included with every UPS
  - EcoStruxture™ ready
  - Network management card to remotely monitor and control

Please Note: Batteries are not included with the UPS. Use the selection tables below to determine number of batteries.

Using the selection table, choose what percentage of the total kVA will be backed up. Then, choose the runtime.

Example: A 20 kVA UPS backing up 75% of its kVA for a runtime of 1 hour will require (1) **E3SUPS20KFBS**, (1**) E3SXR7, and** (12) **E3SFBTH2**. Then, choose accessories if needed.

The maximum number of battery strings that can be installed in a modular battery cabinet (E3SXR7) is 12.

SE Advantage
POWERING PERFORMANCE

Square D Easy UPS 3S is configurable in SE Advantage. Access via the **SE Advantage** home page. www.se.com/us/en/partners/local/channels/pem-program/se-advantage/

Table 6.10: Selection Table for 10 kVA UPS

Part Number	Measurement	% Load			Battery Strings E3SBSK02
		50%	75%	100%	
E3SUPS10KFBS + (#) of battery strings needed E3SFBTH2	KW	5	7.5	10	—
	kVA	5	7.5	10	—
	Runtime (Minutes)	10.5	5.8	—	1
		26.5	15.5	10.5	2
		44.5	26.5	18	3
E3SUPS10KFBS + 1 modular battery cabinet E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	5	7.5	10	—
	kVA	5	7.5	10	—
	Runtime (Minutes)	63.5	38.5	26.5	4
		83.5	51	35	5
		100	63.5	44	6
		125	77	53.5	7
		145	90.5	63	8
		170	100	73	9
		190	115	83	10
		215	130	93	11
		240	145	100	12
		265	160	110	13
		285	175	120	14
		300	190	135	15

© 2025 Schneider Electric
All Rights Reserved
12/30/2025

Table 6.11: Selection Table for 15 kVA UPS

Part Number	Measurement	% Load			Battery Strings E3SFBTH2
		50%	75%	100%	
E3SUPS15KFBS + (#) of battery strings needed E3SFBTH2	KW	7.5	11.25	15	—
	kVA	7.5	11.25	15	—
	Runtime (Minutes)	5.8		—	1
		15.5	8.9	5.7	2
		26.5	15.5	10.5	3
E3SUPS15KFBS + 1 modular battery cabinet E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	7.5	11.25	15	—
	kVA	7.5	11.25	15	—
	Runtime (Minutes)	38.5	23	15.5	4
		51	30.5	21	5
		63.5	38.5	26.5	6
		77	46.5	32.5	7
		90.5	55	38	8
		100	63.5	44.5	9
		115	72	50.5	10
		130	81	57	11
		145	90	63.5	12
		160	99.5	70	13
		175	105	76.5	14
		190	115	83	15
E3SUPS15KFBS + 2 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	7.5	11.25	15	—
	kVA	7.5	11.25	15	—
	Runtime (Minutes)	205	125	90	16
		225	135	97	17
		240	145	100	18
		255	155	110	19
		270	165	115	20
		285	175	125	21
		300	185	130	22
		300	195	135	23
		300	205	145	24
		300	215	150	25
		300	225	160	26
		300	235	165	27

Table 6.12: Selection Table for 20 kVA UPS

Part Number	Measure-ment	% Load			Battery Strings E3SFBTH2
		50%	75%	100%	
E3SUPS20KFBS + (#) of battery strings needed E3SFBTH2	KW	10	15	20	—
	kVA	10	15	20	—
	Runtime (Minutes)			—	1
		10.5	5.8	—	2
		18.5	10.5	6.9	3
E3SUPS20KFBS + 1 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	10	15	20	—
	kVA	10	15	20	—
	Runtime (Minutes)	27	15.5	10.5	4
		36	21	14	5
		45	26.5	18	6
		54.5	32.5	22.5	7
		64.5	38.5	26.5	8
		74.5	44.5	31	9
		84.5	51	35.5	10
		95	57.5	40	11
		105	63.5	44.5	12
		115	70.5	49	13
		125	77	53.5	14
		135	83.5	58.5	15
E3SUPS20KFBS + 2 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	10	15	20	—
	kVA	10	15	20	—
	Runtime (Minutes)	145	90.5	63.5	16
		160	97.5	68.5	17
		170	100	73	18
		180	110	78	19
		195	115	83.5	20
		205	125	88.5	21
		215	130	93.5	22
		230	140	98.5	23
		240	145	100	24
		255	155	105	25
		265	160	110	26
		280	170	120	27

© 2025 Schneider Electric
All Rights Reserved
12/30/2025

Table 6.13: Selection Table for 30 kVA UPS

Part Number	Measure-ment	% Load			Battery Strings E3SFBTH2
		50%	75%	100%	
E3SUPS30KFBS + (#) of battery strings needed E3SFBTH2	KW	15	22.5	30	—
	kVA	15	22.5	30	—
	Runtime (Minutes)	—	—	—	1
		5.9	—	—	2
		10.5	5.9	—	3
		16	9.1	5.8	4
		21.5	12.5	8.2	5
		27.5	16	10.5	6
E3SUPS30KFBS + 1 of E3SXR7 + (#) of E3SFBTH2 below	KW	15	22.5	30	—
	kVA	15	22.5	30	—
	Runtime (Minutes)	33.5	19.5	13	7
		39.5	23.5	16	8
		45.5	27	18.5	9
		52	31	21	10
		58.5	35	24	11
		65	39	27	12
		72	43	30	13
		79	47.5	33	14
		85.5	51.5	36	15
		92.5	56	39	16
		100	60.5	42	17
		105	64.5	45	18
E3SUPS30KFBS + 2 of E3SXR7 + (#) of E3SFBTH2 below	KW	15	22.5	30	—
	kVA	15	22.5	30	—
	Runtime (Minutes)	110	69	48	19
		120	73.5	51.5	20
		125	78	54.5	21
		135	82.5	57.5	22
		140	87.5	61	23
		150	92	64	24
		155	96.5	67.5	25
		165	100	71	26
		170	105	74	27
		180	110	77.5	28
		190	115	81	29
		195	120	84.5	30
E3SUPS30KFBS + 3 of E3SXR7 + (#) of E3SFBTH2 below	KW	15	22.5	30	—
	kVA	15	22.5	30	—
	Runtime (Minutes)	205	125	88	31
		210	130	91.5	32
		220	135	95	33
		230	140	98.5	34
		235	145	100	35
		245	150	105	36
		250	155	105	37
		260	160	110	38
		270	165	115	39
		275	170	115	40
		285	175	120	41
		295	180	125	42



Maint Bypass Panel



Modular Battery Cabinet



Battery String

Table 6.14: Selection Table for 40 kVA UPS

Part Number	Measure-ment	% Load			Battery Strings E3SFBTH2
		50%	75%	100%	
E3SUPS40KFBS + (#) of battery strings needed E3SFBTH2	KW	20	30	40	—
	kVA	20	30	40	—
	Runtime (Minutes)	—	—	—	1
		—	—	—	2
		7.2	—	—	3
		11	5.9	—	4
		15	8.4	5.3	5
		19	10.5	7.1	6
E3SUPS40KFBS + 1 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	20	30	40	—
	kVA	20	30	40	—
	Runtime (Minutes)	23	13.5	8.9	7
		27.5	16	10.5	8
		32	19	12.5	9
		36.5	21.5	14.5	10
		41	24.5	16.5	11
		46	27.5	18.5	12
		51	30.5	20.5	13
		55.5	33.5	23	14
		60.5	36.5	25	15
		65.5	39.5	27	16
		70.5	42.5	29.5	17
		76	45.5	31.5	18
E3SUPS40KFBS + 2 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	20	30	40	—
	kVA	20	30	40	—
	Runtime (Minutes)	81	49	34	19
		86	52	36	20
		91.5	55.5	38.5	21
		97	58.5	40.5	22
		100	62	43	23
		105	65	45.5	24
		110	68.5	48	25
		115	72	50	26
		120	75.5	52.5	27
		125	79	55	28
		135	82	57.5	29
		140	85.5	60	30

© 2025 Schneider Electric
All Rights Reserved
12/30/2025

Table 6.14 Selection Table for 40 kVA UPS (cont'd.)

Part Number	Measure-ment	% Load			Battery Strings E3SFBTH2
		50%	75%	100%	
E3SUPS40KFBS + 3 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	20	30	40	—
	kVA	20	30	40	—
	Runtime (Minutes)	145	89	62.5	31
		150	92.5	65	32
		155	96	67.5	33
		160	100	70	34
		165	100	72.5	35
		175	105	75	36
		180	110	77.5	37
		185	110	80	38
		190	115	82.5	39
		195	120	85	40
		205	125	88	41
		210	125	90.5	42
E3SUPS40KFBS + 4 of E3SXR7 + (#) of battery strings needed E3SFBTH2	KW	20	30	40	—
	kVA	20	30	40	—
	Runtime (Minutes)	215	130	93	43
		220	135	95.5	44
		225	140	98.5	45
		235	140	100	46
		240	145	100	47
		245	150	105	48
		250	155	105	49
		260	155	110	50
		265	160	110	51
		270	165	115	52
		275	170	120	53
		285	170	120	54

Table 6.15: Accessories for Easy UPS 3S

Part Number	Description
E3SUPS10KFBS	10 kVA 208V 3:3 UPS for internal batteries, Start-up 5x8
E3SUPS15KFBS	15 kVA 208V 3:3 UPS for internal batteries, Start-up 5x8
E3SUPS20KFBS	20 kVA 208V 3:3 UPS for internal batteries, Start-up 5x8
E3SUPS30KFBS	30 kVA 208V 3:3 UPS for internal batteries, Start-up 5x8
E3SUPS40KFBS	40 kVA 208V 3:3 UPS for internal batteries, Start-up 5x8
E3SBPSU10K20F	Maintenance Bypass Panel, single unit, 10–20kVA 208 V
E3SBPSU30K40F	Maintenance Bypass Panel, single unit, 30-40kVA 208 V
E3SBPAR10K40F	Parallel Maintenance Bypass Panel for 3 UPSs, 10-40kVA 208 V
E3SXR7	Modular Battery Cabinet 208 V
E3SFBTH2	High Capacity Battery String 208 V
E3SOPT010	Dry Contact Card
E3SOPT014	Cold Start Kit 15-40 kVA 208 V
E3SOPT015	Kirk Key Kit
E3SOPT001	Series Network Card
E3SOPT002	Parallel Kit



Dry Contact Card



Cold Start Kit



Kirk Key Kit



Series Network Card



Parallel Kit

© 2025 Schneider Electric
All Rights Reserved
12/30/2025

Section 7

Miniature and Molded Case Circuit Breakers



B-Frame



H-Frame



J-Frame



L-Frame



M-Frame



P-Frame



R-Frame

Selection Information	7-1
QO™ and QOU Miniature Circuit Breakers	7-11
Homeline™ Miniature Circuit Breakers	7-21
Multi9™ Miniature Circuit Breakers	7-24
PowerPacT™ Molded Case Circuit Breakers	7-30
Mission Critical Circuit Breakers	7-46
500 Vdc Circuit Breakers	7-47
Automatic Switches	7-48
Motor Circuit Protectors	7-49
PowerPacT™ Circuit Breaker Accessories	7-55
MicroLogic™ Electronic Trip Units	7-65
MasterPacT™ Power Circuit Breakers	7-70
Enerlin'X Digital Solutions	7-79
Ground-Fault Protection	7-84
Dimensions and Shipping Weights	7-85
Circuit Breaker Enclosures	7-87

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

QO Miniature Circuit Breakers

QO™ Circuit Breakers






Circuit Breaker Type	Plug-on	QO			QO-H	QO-VH					QH		QOT	QO-AF	QO-VHAF	QO-AFGF	QOVH-AFGF
	Bolt-on	QOB			QOB-H	—	—	—	QOB-VH		QHB		—	QOB-CAFI	QOB-VHAF	QOB-DF	QOB-VHDF
	Unit Mount	—			—	—	—	—	—	—	—	—	—	—	—	—	—
Number of Poles		1	2	3	2	1	2	3	1	2, 3 [1]	1,2	3	1	1, 2	1, 2	1	1
Current Range (A)		10–70	10–200 [2]	10–100	15–100	15–70	15–125	15–100	15–70	15–150	15–30	15–30	15–30	15–20	15–20	15–20	15–20
Interrupting Ratings																	
UL/CSA Rating (kA) (50/60 Hz)	120 Vac	10	10	10	10	22	22	22	22	22	65	65	10	10	22	10	22
	120/240 Vac	10	10	10	10	22	22	22	22	22	65	65	10	10	22	—	—
	208Y/120	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	240 Vac [3]	—	—	10	10	—	—	22	—	22 [4]	—	65	—	—	—	—	—
	277 Vac	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	480Y/277 Vac	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
DC Ratings	48 Vdc	—	5 [5]	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	60 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	65 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	125 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	250 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	500 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
IEC 60947-2 (50/60 Hz) [6]	IEC	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	(Icu)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Special Ratings																	
CCC		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fed. Specs W-C-375B/GEN		X	—	—	—	X	—	—	—	—	X	—	X	X	—	X	X
Other Standard		HACR [7] NOM			HACR [7]						—	—	—	HACR [7]	—	HACR [7]	HACR [7]
Accessories and Modifications																	
Shunt Trip [8]		X	X	X	X	X	X	X	X	X [9]	X	X	X	—	—	—	—
Undervoltage Trip		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Auxiliary Switches [8]		X	X	X	X	X	X	X	X	X [9]	X	X	X	—	X	—	—
Alarm Switch [8]		X	X	X	X	X	X	X	X	X [9]	X	X	X	—	X	—	—
Handle Operators		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Handle Padlock Attachment		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Trip System Type																	
Thermal-magnetic		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Molded Case Switch		X	X	X	—	—	—	—	—	—	—	—	—	—	—	—	—
Dimensions (1P Unit Mount)																	
Dimensions (1P Unit Mount) in. (mm)	Height	3.5 (89) [1]												4.75 (121)			
	Width	0.75 (19) [1]															
	Depth	2.92 (74) [1]															
Pages		page 7-11															

[1] For dimensions for QOB2150VH, QOB3110VH, QOB3125VH and QOB3150VH, see page 7-85
[2] 2P 150–200 A requires 4P width.
[3] See the Supplemental Digest, Section 3 for 3Ø corner grounded systems.
[4] 22 kA @ 240 Vac for 3P only.
[5] 2P, 10–60 A only, suffix 5272.
[6] See the Supplemental Digest Section 10 for circuit breakers with IEC ratings.
[7] HACR on QO, QOB 1P 10–70 A, 2P 15–100 A, 3P 10–100 A; QOB-VH 1P 15–70 A, 2P 15–125 A, 3P 15–100 A.
[8] Factory-installed option only.
[9] Factory-installed accessories are not available on QOB-VH 2P150 A and 3P 110–150 A.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

QO-GFI, QO-EPD, QOU, QOM Miniature Circuit Breakers

The following table provides specifications and ratings information for Schneider Electric's QO-GFI, QO-EPD, QOU, and QOM miniature circuit breakers. The breakers come in plug-on, bolt-on, unit-mount, and main breaker designs. They are available in 1-, 2-, and 3-pole configurations. The rating apply to current ratings from 10 A to 125 A for branch circuits and 50 A to 225 A for main breakers, and are rated for 120 Vac, 120/240 Vac, and 208Y/120 Vac systems. Interrupting ratings are up to 22 kA RMS. Select QOU models support DC applications up to 60 Vdc. All breakers are UL Listed and CSA Certified.

		QO Circuit Breakers							QOU Circuit Breakers			QOM1 and QOM2 Main Circuit Breakers	
													
Circuit Breaker Type	Plug-on	QO-GFI			QO-VHGFI	QO-EPD QO-EPE			—			—	—
	Bolt-on	QOB-GFI			QOB-VHGFI	QOB-EPD QOB-EPE			—			QOM1-VH	QOM2-VH
	Unit Mount	—	—	—	—	—	—	—	QOU			—	—
Number of Poles		1	2	3	1	1	2	3	1	2	3	2	2
Current Range (A)		15–30	15–60	15–50	15–30	15–30	15–60	15–50	10–100	10–125	10–100	50–125	100–225
Interrupting Ratings													
UL/CSA Rating (kA RMS) (60 Hz)	120 Vac	10	10	—	22	10	10	—	10	10	10	22	22
	120/240 Vac	—	10	—	—	—	10	—	10	10	10	22	22
	208Y/120	—	—	10	—	—	—	—					
	240 Vac *[10]*	—	—	—	—	—	—	10	—	—	10	—	—
	277 Vac	—	—	—	—	—	—	—	—	—	—	—	—
	480Y/277 Vac	—	—	—	—	—	—	—	—	—	—	—	—
DC Ratings	48 Vdc	—	—	—	—	—	—	—	—	—	—	—	—
	60 Vdc	—	—	—	—	—	—	—	5 *[11]*	5 *[11]*	5 *[11]*	—	—
	65 Vdc	—	—	—	—	—	—	—	—	—	—	—	—
	125 Vdc	—	—	—	—	—	—	—	—	—	—	—	—
	250 Vdc	—	—	—	—	—	—	—	—	—	—	—	—
	500 Vdc	—	—	—	—	—	—	—	—	—	—	—	—
IEC 60947-2 (50/60 Hz) Icu	240 Vac	—	—	—	—	—	—	—	—	—	—	—	—
	415 Vac	—	—	—	—	—	—	—	—	—	—	—	—
Special Ratings													
CCC		—	—	—	—	—	—	—	X *[12]*	X *[12]*	X *[12]*	—	—
Fed. Specs W-C-375B/GEN		X	—		—	X	—		X	X	X	X	X
Other Standard		NOM			—	NOM			HACR *[13]*			—	—
Accessories and Modifications													
Shunt Trip		—	—	—	—	—	—	—	X *[14]*	X *[14]*	X *[14]*	—	X *[14]*
Undervoltage Trip		—	—	—	—	—	—	—	—	—	—	—	—
Auxiliary Switches		X	X	X	X	X	X	X	X *[14]*	X *[14]*	X *[14]*	—	—
Alarm Switch		X	X	X	X	X	X	X	X *[14]*	X *[14]*	X *[14]*	—	—
Handle Operators		—	—	—	—	—	—	—	—	—	—	—	—
Handle Padlock Attachment		X	X	X	X	X	X	X	X	X	X	X	X
Trip System Type													
Thermal-magnetic		X	X	X	X	X	X	X	X	X	X	X	X
Molded Case Switch		—	—	—	—	—	—	—	—	X	X	—	—
Dimensions (1P Unit Mount)													
Dimensions (1P Unit Mount) in. (mm)	Height	4.12 (103)							4.05 (103)			5.09 (129) *[15]*	5.60 (142) *[15]*
	Width	0.75 (19)							0.75 (19)			5.00 (127) *[15]*	5.07 (129) *[15]*
	Depth	2.92 (74)							2.92 (74)			3.47 (88) *[15]*	3.60 (91) *[15]*
Pages		page 7-11							page 7-18			See Section 1	

NOTE: All circuit breakers on this chart are UL Listed and CSA Certified unless otherwise noted.

[10] For information regarding 3Ø corner grounded systems see the Supplemental Digest, Section 3.
[11] QOU is UL Listed for 60 Vdc per pole 80–100 A, 1P; 80–125 A, 2P; and 70–100 A, 3P.
[12] 15–70 A 1P and 2P, 15–60 A 3P
[13] HACR on QOU 1P and 3P 15–100 A, 2P 15–125 A;
[14] Factory-installed option only.
[15] QOM1 and QOM2 dimensions are for 2-pole unit.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

HOM Circuit Breakers

HOM Circuit Breakers





Circuit Breaker Type	Plug-on	HOM		HOM-CAFI	HOM-DF	HOM-GFI		HOM-EPD		HOMT
	Bolt-on	—	—	—	—	—	—	—	—	—
	Unit Mount	—	—	—	—	—	—	—	—	—
Number of Poles		1	2	1, 2	1	1	2	1	2	1
Current Range (A)		15–50	15–200 *[16]*	15–20	15–20	15–20	15–50	15–20	15–50	15–50 *[17]*
Interrupting Ratings										
UL/CSA Rating (kA) (50/60 Hz)	120 Vac	10	10	10	10	10	10	10	10	10
	120/240 Vac	10	10	10	—	—	10	—	10	10
	208Y/120	—	—	—	—	—	—	—	—	—
	240 Vac *[18]*	—	—	—	—	—	—	—	—	—
	277 Vac	—	—	—	—	—	—	—	—	—
	480Y/277 Vac	—	—	—	—	—	—	—	—	—
DC Ratings	48 Vdc	—	—	—	—	—	—	—	—	—
	60 Vdc	—	—	—	—	—	—	—	—	—
	65 Vdc	—	—	—	—	—	—	—	—	—
	125 Vdc	—	—	—	—	—	—	—	—	—
	250 Vdc	—	—	—	—	—	—	—	—	—
IEC 60947-2 (50/60 Hz) *[19]*	IEC	—	—	—	—	—	—	—	—	—
	(Icu)	—	—	—	—	—	—	—	—	—
Special Ratings										
CCC		—	—	—	—	—	—	—	—	—
Fed. Specs W-C-375B/GEN		X	X	X	X	X	X	X	X	X
Other Standard		HACR *[20]* NOM		HACR *[20]*						
Accessories and Modifications										
Shunt Trip *[21]*		—	—	—	—	—	—	—	—	—
Undervoltage Trip		—	—	—	—	—	—	—	—	—
Auxiliary Switches *[21]*		—	—	—	—	—	—	—	—	—
Alarm Switch *[21]*		—	—	—	—	—	—	—	—	—
Handle Operators		—	—	—	—	—	—	—	—	—
Handle Padlock Attachment		X	X	X	X	—	—	—	—	X *[22]*
Trip System Type										
Thermal-magnetic		X	X	X	X	X	X	X	X	X
Molded Case Switch		—	—	—	—	—	—	—	—	—
Dimensions (1P Unit Mount)										
Dimensions (1P Unit Mount) in. (mm)	Height	3.13 (79)								
	Width	1.00 (25)								
	Depth	2.98 (76)								
Pages		page 7-21								

[16] 2P 150–200 A requires 4P width.
[17] HOMT tandem is 30 A maximum. HOMT quad tandem has 20 A maximum on outside poles, and 50 A maximum on the inside poles.
[18] See the Supplemental Digest, Section 3 for 3Ø corner grounded systems.
[19] See the Supplemental Digest Section 10 for circuit breakers with IEC ratings.
[20] HACR on HOM 1P 15–50 A and 2P 15–100 A.
[21] Factory-installed option only.
[22] Handle padlock attachment available for HOMT quad tandem only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Multi9, EDB Miniature Circuit Breakers

		Multi9™ Circuit Breakers and Supplementary Protectors								EDB Circuit Breakers					
															
Circuit Breaker Type	Plug-on	—			—					—		—		—	
	Bolt-on	—			—					EDB		EGB		EJB	
	Unit Mount	UL 489 $C60_{BP}$			UL1077 $C60_{SP}$ *[23]*			C60H-DC		—		—		—	
Number of Poles		1	2	3	1	2	3,4	1	2	1	2, 3	1	2, 3	1	2, 3
Current Range (A)		0.5–63	0.5–63	0.5–63	0.5–63	1–63	1–63	0.5–63	0.5–63	15–70	15–125	15–70	15–125	15–70	15–125
Interrupting Ratings															
UL/CSA Rating (kA RMS) (50/60 Hz)	120 Vac	14 *[24]*	14 *[24]*	14 *[24]*	14 *[25]*	14 *[25]*	14 *[25]*	—	—	25	25	65	65	100	100
	120/240 Vac	14 *[24]*	14 *[24]*	14 *[24]*	14 *[25]*	14 *[25]*	14 *[25]*	—	—	18	25	35	65	65	100
	240 Vac *[26]*	14 *[24]*	14 *[24]*	14 *[24]*	14 *[25]*	14 *[25]*	14 *[25]*	—	—	18	25	35	65	65	100
	277 Vac	—	—	—	10 *[27]*	10 *[27]*	10 *[27]*	—	—	18	18	35	35	65	65
	480Y/277 Vac	10 *[28]*	10 *[29]*	10 *[29]*	—	10 *[27]*	10 *[27]*	—	—	—	18	—	35	—	65
DC Ratings	48 Vdc	—	—	—	—	10	—	5	5	—	—	—	—	—	—
	60 Vdc	10	10	—	20	—	—	5	5	—	—	—	—	—	—
	65 Vdc	—	—	—	—	—	—	5	5	—	—	—	—	—	—
	125 Vdc	—	10	—	—	—	—	5	5	—	—	—	—	—	—
	250 Vdc	—	—	—	—	—	—	5	5	—	—	—	—	—	—
	500 Vdc	—	—	—	—	—	—	—	5 *[30]*	—	—	—	—	—	—
IEC 60947-2 (50/60 Hz) Icu	240 Vac	10	20	20	10	20	20	—	—	20	—	—	—	—	—
	415 Vac	—	10	10	—	5	5	—	—	10	—	—	—	—	—
Special Ratings															
CCC		X	X	X	X	X	X	X	X	—	—	—	—	—	—
Other Standard		IEC								HACR					
Accessories and Modifications															
Shunt Trip		X	X	X	X	X	X	X	X	X *[31]*	X *[31]*	X *[31]*	X *[31]*	X *[31]*	X *[31]*
Undervoltage Trip		X	X	X	X	X	X	X	X	—	—	—	—	—	—
Auxiliary Switches		X	X	X	X	X	X	X	X	X *[31]*	X *[31]*	X *[31]*	X *[31]*	X *[31]*	X *[31]*
Alarm Switch		X	X	X	X	X	X	X	X	X *[31]*	X *[31]*	X *[31]*	X *[31]*	X *[31]*	X *[31]*
Handle Operators		X	X	X	X	X	X	X	X	—	—	—	—	—	—
Handle Padlock Attachment		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Trip System Type															
Thermal-magnetic		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Molded Case Switch		—	—	—	—	—	—	—	—	—	—	—	—	—	—
Dimensions (1P Unit Mount)															
Dimensions (1P Unit Mount) in. (mm)	Height	4.05 (103)			3.19 (81)			3.19 (81)		5.66 (144)					
	Width	0.71 (18)			0.71 (18)			0.71 (18)	1.42 (36)	0.98 (25)					
	Depth	2.76 (70)			2.76 (70)			2.56 (65)		4.05 (103)					
Pages		page 7-24								See Section 9					

NOTE: All circuit breakers on this chart are UL Listed and CSA Certified unless otherwise noted.

[23] C60 are recognized components per UL 1077.
[24] 14 kA up to 35 A, 10 kA from 40 to 63 A.
[25] 14 kA up to 32 A, 10 kA from 40 to 63 A.
[26] For information regarding 3Ø corner grounded systems see the Supplemental Digest, Section 3.
[27] 10 kA up to 32 A, 5 kA from 40 to 63 A.
[28] Up to 35 A.
[29] 10 kA up to 35 A.
[30] 2 poles must be wired in series for 500 Vdc.
[31] Factory-installed option only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

B-, H-, J-Frame Molded Case Circuit Breakers

		PowerPacT™ 125 A B-Frame				PowerPacT 150 A H-Frame					PowerPacT 250 A J-Frame				
						Electronic Trip Version					Electronic Trip Version				
															
Circuit Breaker Type		BD	BG	BJ	BK	HD	HG	HJ	HL	HR	JD	JG	JJ	JL	JR
Number of Poles		1, 2, 3, 4	1, 2, 3, 4	1, 2, 3, 4	1, 2	2, 3	2, 3	2, 3 *[32]*	2, 3 *[32]*	3	2, 3 *[32]*	2, 3 *[32]*	2, 3 *[32]*	2, 3 *[32]*	3
Current Range (A)		15–125	15–125	15–125	15–30	15–150	15–150	15–150	15–150	15–150	70–250 *[33]*	70–250 *[33]*	70–250 *[33]*	70–250 *[33]*	70–250 *[33]*
Interrupting Ratings															
UL/CSA/ NOM AC Rating (kA RMS) (50/60 Hz)	240 Vac	25	65	100	100	25	65	100	125	200	25	65	100	125	200
	480Y/277 Vac	18 *[34]*	35	65	65	18	35	65	100	200	18	35	65	100	200
	480 Vac	18 *[35]*	35*[34]*	65	65	18	35	65	100	200	18	35	65	100	200
	600Y/347 Vac	14	18*[34]*	25	65	14	18	25	50	100	14	18	25	50	100
	600 Vac	—	—	—	—	14	18	25	50	100	14	18	25	50	100
UL/CSA/ NOM DC Ratings	250 Vdc *[36]* *[37]*	10	20	50	—	20	20	20	20	—	20	20	20	20	—
	500 Vdc *[36]*	—	—	—	—	—	20	—	50	—	—	20	—	50	—
IEC AC Rating (kA RMS) (50/60 Hz) Icu/Ics *[38]*	220/240 Vac	25	65	100	100	25	65	100	125	150	25	65	100	125	150
	380/415 Vac	18	35	65	65	18	35	65	100	125	18	35	65	100	125
	440/480 Vac	18	35	65	65	18	35	65	100	125	18	18	25	50	125
	500/525 Vac	14	18	25	25	14	18	25	50	75	14	20	20	20	75
	690 Vac	—	—	—	—	—	—	—	—	20	—	—	—	—	20
IEC DC Ratings	250 Vdc	—	—	—	—	—	—	—	—	—	20	20	20	20	—
	500 Vdc	—	—	—	—	—	—	—	—	—	20	20	20	20	—
Special Ratings															
CCC		X	X	X	X	X	X	X	X	X	X	X	X	X	X
HACR		X	X	X	X	X	X	X	X	X	X	X	X	X	X
FCC		X	X	X	X	X	X	X	X	X	X	X	X	X	X
CE		X	X	X	X	X	X	X	X	X	X	X	X	X	X
UKCA		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Connections/Terminations															
Unit Mount		X	X	X	X	X	X	X	X	X	X	X	X	X	X
I-Line™		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Rear Connection		—	—	—	—	X *[39]*	X *[39]*	X	X	X	X	X	X	X	X
Drawout		—	—	—	—	X *[39]*	X *[39]*	X	X	X	X	X	X	X	X
Optional Lugs		X	X	X	X	X *[39]*	X *[39]*	X	X	X	X	X	X	X	X
Accessories and Modifications															
Shunt Trip		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Undervoltage Trip		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Auxiliary Switches		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Alarm Switch		X	X	X	X	X	X	X	X	X	X	X	X	X	X
Motor Operator		—	—	—	—	X *[39]*	X *[39]*	X	X	X	X	X	X	X	X
Handle Operators		X	X	X	X	X *[39]*	X *[39]*	X	X	X	X	X	X	X	X
Mechanical Interlocks (3P)		X	X	X	—	X	X	X	X	X	X	X	X	X	X
Handle Padlock Attachment		X	X	X	X	X *[39]*	X *[39]*	X	X	X	X	X	X	X	X
Cylinder Lock (3P)		—	—	—	—	—	—	—	—	—	—	—	—	—	—
Optional GF Protection		—	—	—	—	X	X	X	X	X	X	X	X	X	X
Trip System Type															
Thermal-magnetic		X	X	X	X	X	X	X	X	—	X	X	X	X	X
Instantaneous-only (MCP)		—	—	—	—	—	X	X *[40]*	X *[40]*	X *[40]*	—	X *[40]*	X *[40]*	X	X
Molded Case Switch (Automatic)		X	X	X	X	—	X	—	X	—	—	X	—	X	X
Electronic		—	—	—	—	X *[40]*	X *[40]*	X *[40]*	X *[40]*	X *[40]*	X *[40]*	X *[40]*	X *[40]*	X *[40]*	X *[40]*
Product Dimensions															
Dimensions (3P Unit Mount) in. (mm)	Height	5.4 (137)				6.4 (163)					7.5 (191)				
	Width	3.2 (81)				4.1 (104)					4.1 (104)				
	Depth	3.5 (89)				3.4 (86)					3.4 (86)				
Enclosures (page 7-85–page 7-87)															
General Purpose (NEMA 1)		—	—	—	—	X	X	X	X	—	X	X	X	X	—
Raintight (NEMA 3R)		—	—	—	—	X	X	X	X	—	X	X	X	X	—
Dust-tight (NEMA 12)		—	—	—	—	X	X	X	X	—	X	X	X	X	—
Watertight (NEMA 4, 4X, 5)		—	—	—	—	X	X	X	X	—	X	X	X	X	—
Explosion Proof (NEMA 7, 9)		—	—	—	—	—	—	—	—	—	X *[41]*	X *[41]*	—	—	—
Pages (Unit Mount) / (I-Line)		page 7-32 / Section 9				page 7-34 / Section 9					page 7-34 / Section 9				

NOTE: All circuit breakers on this chart are certified to UL and CSA standards unless otherwise noted.

[32] 2P in a 3P module.
[33] 70–250 A with electronic trip system
[34] Only two pole circuit breaker.
[35] Only two, three and four pole.
[36] Not available with electronic trip units
[37] 1P Available at 125 Vdc
[38] Dual UL and IEC ratings and CE markings on circuit breakers. For additional IEC ratings, see the Supplemental Digest, Section 10.
[39] Not available in HD and HG 2P rating (2P module).
[40] 3P only.
[41] Not UL Listed due to wire bending space.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT™ Q-Frame, Q4, LA, LH, L-Frame Molded Case Circuit Breakers

		PowerPacT 250 A Q-Frame			400 A LA/LH		PowerPacT 600 A L-Frame			
										
Circuit Breaker Type		QB	QD	QG	LA	LH	LG	LJ	LL	LR
Number of Poles		2, 3	2, 3	2, 3	2, 3	2, 3	3, 4	3, 4	3, 4	3, 4
Current Range (A)		70–250 *[42]*	70–250 *[42]*	70–250 *[42]*	125–400	125–400	70–600	70–600	70–600	70–600
Interrupting Ratings										
UL/CSA/NOM AC Rating (kA RMS) (50/60 Hz)	240 Vac	10	25	65	42	65	65	100	125	200
	480Y/277 Vac	—	—	—	30	35	35	65	100	200
	480 Vac	—	—	—	30	35	35	65	100	200
	600Y/347 Vac	—	—	—	22	25	18	25	50	100
	600 Vac	—	—	—	22	25	18	25	50	100
UL/CSA/NOM DC Ratings	250 Vdc *[43]*	—	—	—	10	50	—	—	—	—
	500 Vdc *[44][43]*	—	—	—	—	20	20	—	50	—
IEC AC Rating (kA RMS) (50/60 Hz) Icu/Ics *[45]*	220/240 Vac	10/5	10/5	10/5	—	—	65	100	125	150
	380/415 Vac	10/5	10/5	10/5	20/5*[46]*	20/5*[46]*	18	65	100	125
	440/480 Vac	—	—	—	—	—	18	65	100	125
	500/525 Vac	—	—	—	—	—	14	25	50	75
	690 Vac	—	—	—	—	—	—	—	—	20
IEC DC Ratings	250 Vdc	—	—	—	—	—	—	—	—	—
	500 Vdc	—	—	—	—	—	—	—	—	—
Special Ratings										
CCC		—	—	—	—	—	X	X	X	X
HACR (2P, 3P)		X	X	X	X	X	X	X	X	X
FCC		—	—	—	—	—	X	X	X	X
CE		—	—	—	—	—	X	X	X	X
UKCA		—	—	—	—	—	X	X	X	X
Connections/Terminations										
Unit Mount		X	X	X	X	X	X	X	X	X
I-Line™		X	X	X	X	X	X	X	X	X
Rear Connection		—	—	—	X	X	X	X	X	X
Drawout		—	—	—	—	—	X	X	X	X
Optional Lugs		—	—	—	X	X	X	X	X	X
Accessories and Modifications										
Shunt Trip		—	—	—	X	X	X	X	X	X
Undervoltage Trip		—	—	—	X	X	X	X	X	X
Auxiliary Switches		—	—	—	X	X	X	X	X	X
Alarm Switch		—	—	—	X	X	X	X	X	X
Motor Operator		—	—	—	X	X	X	X	X	X
Handle Operators		—	—	—	X	X	X	X	X	X
Mechanical Interlocks (3P)		X	X	X	X *[47]*	X *[47]*	X	X	X	X
Handle Padlock Attachment		X	X	X	X	X	X	X	X	X
Cylinder Lock (3P*[48]*)		—	—	—	X	X	—	—	—	—
Optional GF Protection*[49]*		—	—	—	—	—	X	X	X	X
Trip System Type										
Thermal-magnetic		X	X	X	X	X	—	—	—	—
Instantaneous-only (MCP)		—	—	—	X	X	X	X	X	X
Molded Case Switch (Automatic)		X	—	—	—	X	X	—	X	X
Electronic		—	—	—	—	—	X	X	X	X
Product Dimensions										
Dimensions (3P Unit Mount) in. (mm)	Height	6.47 (164)			11 (279)		13.38 (340)			
	Width	4.5 (114)			6 (152)		5.51 (140)			
	Depth	3.93 (100)			5.84 (148)		4.33 (110)			
Enclosures (page 7-85–page 7-87)										
General Purpose (NEMA 1)		X	X	X	X	X	—	—	—	—
Raintight (NEMA 3R)		X	X	X	X	X	—	—	—	—
Dust-tight (NEMA 12)		—	—	—	X	X	X *[50]*	X *[50]*	X *[50]*	X *[50]*
Watertight (NEMA 4, 4X, 5)		—	—	—	X	X	—	—	—	—
Explosion Proof (NEMA 7, 9)		—	—	—	—	—	—	—	—	—
Pages (Unit Mount) / (I-Line)		page 7-38 / Supplemental Section 9			LA/LH-Frame Molded Case Circuit Breaker (600 A), page 7-39 / Supplemental Section 9		page 7-40 / Supplemental Section 9			

NOTE: All circuit breakers on this chart are certified to UL and CSA standards unless otherwise noted.

[42] I-Line Q-frame circuit breakers are available 70–225 A only. 250 A Q-frame unit-mount circuit breakers are limited to Cu conductors only.
[43] Not available with electronic trip units
[44] Ungrounded UPS systems only. See page 7-47. Special DC J-Frame only.
[45] Dual UL and IEC ratings and CE markings on circuit breakers. For additional IEC ratings, see the Supplemental Digest, Section 10.
[46] For additional IEC ratings, see the Supplemental Digest Section 10.
[47] Requires circuit breaker with WB suffix .
[48] Factory-installed option only.
[49] Requires factory-installed “G” shunt trip and 3P module.
[50] Enclosure rating 1, 3R, 5 and 12.,

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

M-, P-, and R-Frame Molded Case Circuit Breakers



		PowerPacT 800 A M-Frame		PowerPacT 1200 A P-Frame				PowerPacT 2500 A R-Frame			
											
Circuit Breaker Type		MG	MJ	PG	PJ	PK	PL	RG	RJ	RK	RL
Number of Poles		2, 3	2, 3	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4
Current Range (A)		300–800	300–800	100–1200	100–1200	100–1200	100–1200	240–2500	240–2500	240–2500	240–2500
Interrupting Ratings											
UL/CSA/NOM Rating (kA RMS) (50/60 Hz)	240 Vac	65	100	65	100	65	125	65	100	65	125
	480Y/277 Vac	35	65	35	65	50	100	35	65	65	100
	480 Vac	35	65	35	65	50	100	35	65	65	100
	600Y/347 Vac	18	25	18	25	50	—	18	25	65	50
	600 Vac	18	25	18	25	50	—	18	25	65	50
DC Ratings	250 Vdc	—	—	—	—	—	—	—	—	—	—
	500 Vdc *[51]*	—	—	—	—	—	—	—	—	—	—
IEC (kA RMS) (50/60 Hz) Icu/Ics *[52]*	240 Vac	50/25	65/35	50/25	65/35	50/25	125/65	50/25	65/35	85/65	125/65
	415 Vac	35/20	50/25	35/20	50/25	50/25	85/45	35/20	50/25	70/55	85/45
Special Ratings											
CCC		X	X	X	X	X	X	X	X	X	X
HACR (2P, 3P)		X	X	X	X	X	X	X	X	X	X
FCC		X	X	X	X	X	X	X	X	X	X
CE		X	X	X	X	X	X	X	X	X	X
UKCA		X	X	X	X	X	X	X	X	X	X
Connections/Terminations											
Unit Mount		X	X	X	X	X	X	X	X	X	X
I-Line™		X	X	X	X	X	X	X *[53]*	X *[53]*	X *[53]*	X *[53]*
Rear Connection		—	—	—	—	—	—	—	—	—	—
Drawout		—	—	X *[54]*	X *[54]*	X *[54]*	X *[54]*	—	—	—	—
Optional Lugs		X	X	X	X	X	X	X	X	X	X
Accessories and Modifications											
Shunt Trip		X	X	X	X	X	X	X	X	X	X
Undervoltage Trip		X	X	X	X	X	X	X	X	X	X
Auxiliary Switches		X	X	X	X	X	X	X	X	X	X
Alarm Switch		X	X	X	X	X	X	X	X	X	X
Motor Operator		—	—	X *[54]*	X *[54]*	X *[54]*	X *[54]*	—	—	—	—
Handle Operators		—	—	X *[54]*	X *[54]*	X *[54]*	X *[54]*	—	—	—	—
Mechanical Interlocks (3P)		—	—	X	X	X	X	—	—	—	—
Handle Padlock Attachment		X	X	X	X	X	X	X	X	X	X
Cylinder Lock (3P)		—	—	—	—	—	—	—	—	—	—
Optional GF Protection		—	—	X	X	X	X	X	X	X	X
Trip System Type											
Thermal-magnetic		—	—	—	—	—	—	—	—	—	—
Instantaneous-only (MCP)		—	—	—	X	X	—	—	—	—	—
Molded Case Switch (Automatic)		X	X	X	X	X	X	X	X	X	X
Electronic		X	X	X	X	X	X	X	X	X	X
Product Dimensions											
Dimensions (3P Unit Mount)	Height–in. (mm)	12.80 (325)		16.20 (413)				15 (381)			
	Width—in. (mm)	8.30 (210)		8.30 (210)				16.50 (420)			
	Depth—in. (mm)	8.10 (205)		8.10 (205)				14.40 (366)			
Enclosures (page 7-85–page 7-87)											
General Purpose (NEMA 1)		X	X	X	X	X	X	—	—	—	—
Raintight (NEMA 3R)		X	X	X	X	X	X	—	—	—	—
Dust-tight (NEMA 12)		X	X	X	X	X	X	—	—	—	—
Watertight (NEMA 4, 4X, 5)		X	X	—	—	—	—	—	—	—	—
Explosion Proof (NEMA 7, 9)		—	—	—	—	—	—	—	—	—	—
Pages (Unit Mount) / (I-Line)		page 7-42 / Section 9		page 7-43, page 7-48 / Section 9				page 7-44, page 7-48 / Section 9			

NOTE: All circuit breakers on this chart are certified to UL and CSA standards unless otherwise noted.

[51] Ungrounded UPS systems only. See page 7-47.
[52] Dual UL and IEC ratings and CE markings on circuit breakers. For additional IEC ratings, see the Supplemental Digest, Section 10.
[53] 1000 A and 1200 A only.
[54] 65/50 kA Icu/Ics for 450–600 A ratings.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

MasterPacT MTZ Molded Case Circuit Breakers

		MasterPacT MTZ1 800–1600 A					MasterPacT MTZ2 800–6000 A				MasterPacT MTZ3 4000–6000 A			
														
Circuit Breaker Type		MTZ1-N	MTZ1-H	MTZ1-L1	MTZ1-L	MTZ1-LF *[55]*	MTZ2-N	MTZ2-H	MTZ2-L	MTZ2-LF *[55]*	MTZ2-H	MTZ2-L	MTZ3-H	MTZ3-L
Number of Poles		3 , 4	3, 4	3	3	3	3 , 4	3, 4	3	3	3 , 4	3	3 , 4	3
Current Range		400–1200	400–1200	400–1200	400–1200	400–1200	400–2000	400–2000	400–2000	400–2000	1200–3000	1200–3000	2000–6000	2000–6000
Interrupting Ratings														
UL/CSA Rating (kA RMS) (50/60 Hz)	240 Vac	50	65	100	200	200	65	100	200	200	100	200	100	200
	480Y/277 Vac	50	50	65	100	100	65	100	150	150	100	150	100	150
	480 Vac	50	50	65	100	100	65	100	150	150	100	150	100	150
	600Y/347 Vac	35	50	—	—	—	50	85	100	100	85	100	85	100
	600 Vac	35	50	—	—	—	50	85	100	100	85	100	85	100
DC Ratings	250 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—
	500 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—
IEC *[56]* (kA RMS) Icu/ Ics	240 Vac	—	—	—	—	—	—	—	—	—	—	—	—	—
	415 Vac	—	—	—	—	—	—	—	—	—	—	—	—	—
Special Ratings														
CCC		—	—	—	—	—	—	—	—	—	—	—	—	—
Fed. Specs W-C-375B/GEN		—	—	—	—	—	—	—	—	—	—	—	—	—
HACR (2P, 3P)		—	—	—	—	—	—	—	—	—	—	—	—	—
Connections/Terminations														
Unit Mount		X	X	X	X	X	X	X	X	X	X	X	X	X
I-Line™		—	—	—	—	—	—	—	—	—	—	—	—	—
Rear Connection		X	X	X	X	X	X	X	X	X	X	X	X	X
Drawout		X	X	X	X	X	X	X	X	X	X	X	X	X
Optional Lugs		—	—	—	—	—	—	—	—	—	—	—	—	—
Accessories and Modifications														
Shunt Trip		X	X	X	X	X	X	X	X	X	X	X	X	X
Undervoltage Trip		X	X	X	X	X	X	X	X	X	X	X	X	X
Auxiliary Switches		X	X	X	X	X	X	X	X	X	X	X	X	X
Alarm Switch		X	X	X	X	X	X	X	X	X	X	X	X	X
Motor Operator		X	X	X	X	X	X	X	X	X	X	X	X	X
Handle Operators		—	—	—	—	—	—	—	—	—	—	—	—	—
Mechanical Interlocks		X	X	X	X	X	X	X	X	X	X	X	X	X
Padlock Attachment		X	X	X	X	X	X	X	X	X	X	X	X	X
Optional GF Protection		X	X	X	X	X	X	X	X	X	X	X	X	X
Trip System Type														
Thermal-magnetic		—	—	—	—	—	—	—	—	—	—	—	—	—
Instantaneous-only (MCP)		—	—	—	—	—	—	—	—	—	—	—	—	—
Electronic		X	X	X	X	X	X	X	X	X	X	X	X	X
Product Dimensions														
Dimensions (3P Drawout) in. (mm)	Height	12.67 (322)					17.28 (439)				17.28 (439)		17.28 (439)	
	Width	11.25 (286)					17.74 (450)				17.74 (450)		30.94 (786)	
	Depth	13.54 (344)					18.50 (470)				18.50 (470)		18.50 (470)	
Enclosures														
General Purpose (NEMA 1)		—	—	—	—	—	—	—	—	—	—	—	—	—
Raintight (NEMA 3R)		—	—	—	—	—	—	—	—	—	—	—	—	—
Dust-tight (NEMA 12)		—	—	—	—	—	—	—	—	—	—	—	—	—
Watertight (NEMA 4, 4X, 5)		—	—	—	—	—	—	—	—	—	—	—	—	—
Explosion Proof (NEMA 7, 9)		—	—	—	—	—	—	—	—	—	—	—	—	—
Pages		MasterPacT™ Power Circuit Breakers, page 7-70 and Catalog 0614CT1701												

NOTE: All circuit breakers on this chart are certified to UL and CSA standards unless otherwise noted.

[55] Tested to show arc flash hazard risk category as reference by NFPA70E.
[56] See Catalog 0614CT1701 for additional ratings and other information.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

MasterPacT NT, NW Molded Case Circuit Breakers

		MasterPacT 1200 A					MasterPacT 6000 A							
														
Circuit Breaker Type		NT-N	NT-H	NT-L1	NT-L	NT-LF [57]	NW-N	NW-H	NW-L	NW-LF [57]	NW-H	NW-L	NW-H	NW-L
Number of Poles		3 , 4	3, 4	3	3	3	3 , 4	3, 4	3	3	3 , 4	3	3 , 4	3
Current Range		100–1200	100–1200	100–1200	100–1200	100–1200	100–2000	100–2000	100–2000	100–2000	640–3000	640–3000	1200–6000	1200–6000
Interrupting Ratings														
UL/CSA/NOM Rating (kA RMS) (50/60 Hz)	240 Vac	50	65	100	200	200	65	100	200	200	100	200	100	200
	480Y/277 Vac	50	50	65	100	100	65	100	150	150	100	150	100	150
	480 Vac	50	50	65	100	100	65	100	150	150	100	150	100	150
	600Y/347 Vac	35	50	—	—	—	50	85	100	100	85	100	85	100
	600 Vac	35	50	—	—	—	50	85	100	100	85	100	85	100
DC Ratings	250 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—
	500 Vdc	—	—	—	—	—	—	—	—	—	—	—	—	—
IEC [58] (kA RMS) Icu/ Ics	240 Vac	—	—	—	—	—	—	—	—	—	—	—	—	—
	415 Vac	—	—	—	—	—	—	—	—	—	—	—	—	—
Special Ratings														
CCC		—	—	—	—	—	—	—	—	—	—	—	—	—
Fed. Specs W-C-375B/GEN		—	—	—	—	—	—	—	—	—	—	—	—	—
HACR (2P, 3P)		—	—	—	—	—	—	—	—	—	—	—	—	—
Connections/Terminations														
Unit Mount		X	X	X	X	X	X	X	X	X	X	X	X	X
I-Line™		—	—	—	—	—	—	—	—	—	—	—	—	—
Rear Connection		X	X	X	X	X	X	X	X	X	X	X	X	X
Drawout		X	X	X	X	X	X	X	X	X	X	X	X	X
Optional Lugs		—	—	—	—	—	—	—	—	—	—	—	—	—
Accessories and Modifications														
Shunt Trip		X	X	X	X	X	X	X	X	X	X	X	X	X
Undervoltage Trip		X	X	X	X	X	X	X	X	X	X	X	X	X
Auxiliary Switches		X	X	X	X	X	X	X	X	X	X	X	X	X
Alarm Switch		X	X	X	X	X	X	X	X	X	X	X	X	X
Motor Operator		X	X	X	X	X	X	X	X	X	X	X	X	X
Handle Operators		—	—	—	—	—	—	—	—	—	—	—	—	—
Mechanical Interlocks		X	X	X	X	X	X	X	X	X	X	X	X	X
Padlock Attachment		X	X	X	X	X	X	X	X	X	X	X	X	X
Cylinder Lock		—	—	—	—	—	—	—	—	—	—	—	—	—
Optional GF Protection		X	X	X	X	X	X	X	X	X	X	X	X	X
Trip System Type														
Thermal-magnetic		—	—	—	—	—	—	—	—	—	—	—	—	—
Instantaneous-only (MCP)		—	—	—	—	—	—	—	—	—	—	—	—	—
Molded Case Switch (Automatic)		X	X	X	X	X	X	X	X	X	X	X	X	X
Electronic		X	X	X	X	X	X	X	X	X	X	X	X	X
Product Dimensions														
Dimensions (3P Drawout) in. (mm)	Height	12.67 (322)					17.28 (439)				17.28 (439)		17.28 (439)	
	Width	11.25 (286)					17.74 (450)				17.74 (450)		30.94 (786)	
	Depth	13.00 (331)					18.38 (467)				18.38 (467)		18.38 (467)	
Enclosures														
General Purpose (NEMA 1)		—	—	—	—	—	—	—	—	—	—	—	—	—
Raintight (NEMA 3R)		—	—	—	—	—	—	—	—	—	—	—	—	—
Dust-tight (NEMA 12)		—	—	—	—	—	—	—	—	—	—	—	—	—
Watertight (NEMA 4, 4X, 5)		—	—	—	—	—	—	—	—	—	—	—	—	—
Explosion Proof (NEMA 7, 9)		—	—	—	—	—	—	—	—	—	—	—	—	—
Pages		page 7-77 and Catalog 0613CT0001					page 7-77 and Catalog 0613CT0001							

NOTE: All circuit breakers on this chart are certified to UL and CSA standards unless otherwise noted.

[57] Tested to show arc flash hazard risk category as reference by NFPA70E.
[58] See Catalog 0613CT0001 for additional ratings and other information.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



QO 1P
1 Space
Required



QO 2P
2 Spaces
Required



QO 3P
3 Spaces
Required



QO2200 2P 200 A
4 Spaces Required

QO Standard Plug-On Circuit Breakers

Square D brand QO miniature circuit breakers are plug-on products for use in QO and QON load centers, NQ panelboards, NQ OEM interiors or Speed-D™ switchboard distribution panels. Bolt-on QOB circuit breakers are for use in NQOB and NQ panelboards or interiors. *[1]*

The Square D exclusive Qwik-Open™ mechanism, with a trip reaction within 1/60th of a second, is standard on all 1P 15 and 20 A QO circuit breakers.

Table 7.1: Standard QO Plug-On Circuit Breakers

Amperes Rating *[2]*	1P—120/240 Vac	2P—120/240 Vac Common Trip	2P—240 Vac *[3]* Common Trip	3P—240 Vac Common Trip
10 k AIR				
10 A	QO110	QO210	—	QO310
15 A	QO115 *[4] [5]*	QO215 *[4]*	QO215H	QO315 *[4]*
20 A	QO120 *[4] [5]*	QO220 *[4]*	QO220H	QO320 *[4]*
25 A	QO125 *[4]*	QO225 *[4]*	QO225H OBS	QO325 *[4]*
30 A	QO130 *[4]*	QO230 *[4]*	QO230H	QO330 *[4]*
35 A	QO135 *[4]*	QO235 *[4]*	—	QO335 *[4]*
40 A	QO140 *[4]*	QO240 *[4]*	QO240H	QO340 *[4]*
45 A	QO145 OBS	QO245 *[4]*	—	QO345 *[4]*
50 A	QO150 *[4]*	QO250 *[4]*	QO250H OBS	QO350 *[4]*
60 A	QO160 *[4]*	QO260 *[4]*	QO260H OBS	QO360 *[4]*
70 A	QO170 *[4]*	QO270 *[4]*	QO270H OBS	QO370 *[4]*
80 A	—	QO280 *[4]*	QO280H OBS	QO380 *[4]*
90 A	—	QO290 *[4]*	QO290H OBS	QO390 *[4]*
100 A	—	QO2100 *[4]*	QO2100H	QO3100 *[4]*
110 A	—	QO2110 *[4]*	—	—
125 A	—	QO2125 *[4]*	—	—
150 A	—	QO2150 *[4] [6][7]*	—	—
175 A	—	QO2175 *[4] [6] [7]*	—	—
200 A	—	QO2200 *[4] [6] [7]*	—	—
Molded Case Switch 60 A max.–240 Vac		—	QO200	QO300 OBS
22 k AIR *[4]*				
15 A	QO115VH *[5]*	QO215VH *[8]*	—	QO315VH *[8]*
20 A	QO120VH *[5]*	QO220VH *[8]*	—	QO320VH *[8]*
25 A	—	QO225VH *[8]*	—	QO325VH *[8]*
30 A	QO130VH	QO230VH *[8]*	—	QO330VH *[8]*
40 A	QO140VH	QO240VH *[8]*	—	QO340VH *[8]*
50 A	—	QO250VH *[8]*	—	QO350VH *[8]*
60 A	QO160VH	QO260VH *[8]*	—	QO360VH *[8]*
70 A	—	QO270VH *[8]*	—	QO370VH *[8]*
80 A	—	QO280VH *[8]*	—	QO380VH *[8]*
90 A	—	QO290VH *[8]*	—	QO390VH *[8]*
100 A	—	QO2100VH *[8] [9]*	—	QO3100VH *[8]*
110 A	—	QO2110VH *[8] [9]*	—	—
125 A	—	QO2125VH *[8] [9]*	—	—
150 A	—	QO2150VH *[6] [8] [7]*	—	—
175 A	—	QO2175VH OBS	—	—
200 A	—	QO2200VH *[6] [8] [7]*	—	—
42 k AIR *[4]*				
40 A	—	QOH240 OBS	—	—
45 A	—	QOH245 OBS	—	—
50 A	—	QOH250 OBS	—	—
60 A	—	QOH260 *[10]*	—	—
70 A	—	QOH270	—	—
80 A	—	QOH280	—	—
90 A	—	QOH290	—	—
100 A	—	QOH2100	—	—
110 A	—	QOH2110 *[10]*	—	—
125 A	—	QOH2125	—	—
65 k AIR *[4]*				
15 A	QH115 OBS	QH215 OBS	—	QH315 OBS
20 A	QH120 *[5]*	QH220	—	QH320 OBS
25 A	QH125 OBS	QH225 OBS	—	QH325 *[10]*
30 A	QH130 OBS	QH230	—	QH330 OBS

OBS This product is obsolete.

Refer to Digest Section 7, QO Miniature Circuit Breakers, for interrupting ratings, accessories, and dimensions.

For warranty information, see Schneider Home System Warranty Data Bulletin, 0102DB2301.

[1] See Digest Section 1 for load centers and Section 9 for panelboards and interiors.
[2] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.
[3] UL Listed 5 k AIR on corner grounded Delta systems.
[4] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[5] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.
[6] Requires four spaces (1 AWG–300 kcmil Al/Cu.) Suitable for switching 120 Vac fluorescent lighting loads.
[7] Not suitable for use in 3Ø panels. Use only in 1Ø panel rated 150 A or greater.
[8] UL Listed for use ahead of QO, QO-GFI, QO-EPD, QOT, QO-AFI, and QO-PL 10 k AIR circuit breakers to permit their application at 22 kA fault level.
[9] 100 A maximum branch mounted opposite.
[10] Order only. Contact your local Field Office.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.2: QO/QOB 48 Vdc 5 kA

Ampere Rating	Poles	Suffix
10–60 A	2	5272

QO/QOB Ring Terminal

Table 7.3: QO/QOB Ring Terminal—Factory-Installed Only

Ampere Rating	Poles	Suffix
10–30 A	1, 2, 3	5237
35–60 A	1,2	5238
35–50 A	3	
70–110 A	2	5273
60–100 A	3	

Wire Sizes for QO/QOB Circuit Breakers

Table 7.4: Wire Sizes for QO/QOB Circuit Breakers

Circuit Breaker Type	Ampere Rating *[11]*	Wire Size (AWG/kcmil)
QO 1P	10–30 A	14–8 Al/Cu
	10–30 A	(2) 14–10 Cu
	35–70 A	8–2 Al/Cu
QO 2P	10–30 A	14–8 Al/Cu
	10–30 A	(2) 14–10 Cu
	35–70 A	8–2 Al/Cu
	80–125 A	4–2/0 Al/Cu
	150–200 A	4–300 Al/Cu
QO 3P	10–30 A	14–8 Al/Cu, (2) 14-10 Cu
	35–70 A	8–2 Al/Cu
	80–125 A	4–2/0 Al/Cu
QOB-VH	110–150 A	4–300 Al/Cu
QOT	15–20 A	12–8 Al 14–8 Cu
QO-AFI, QO-GFI or QO-EPD	15–30 A	12–8 Al 14–8 Cu
	40, 50, 60 A	12–4 Al 14–6 Cu
QO-PL	10–60 A	12–2 Al 14–2 Cu

QOT and QO Tandem Circuit Breakers

QOT tandem circuit breakers have a mounting cam as shown. Installation into a QO load center can only be made in those positions having a mounting pan rail slot. Meets Paragraph 408.54 of the NEC®. UL Listed as Class CTL.



QOT 1P Tandem
1 Space Required




Table 7.5: QOT Tandem Circuit Breakers (CTL)—Not Compatible with Plug-on Neutral Systems

Ampere Rating *[11]*	Cat. No. *[12]*
1P—120/240 Vac	
15 A and 15 A	QOT1515
15 A and 20 A	QOT1520
20 A and 20 A	QOT2020
2P—120/240 Vac Common Trip	
Order two QOT1515 or QOT2020 circuit breakers and handle tie QOTHT for common switching of center two poles.	

Table 7.6: QO Tandem Circuit Breakers (non-CTL)—Compatible with Plug-on Neutral Systems

Ampere Rating *[11]*	Cat. No. *[12]*
1P—120/240 Vac—1 Space Required	
15 A and 15 A	QO1515
15 A and 20 A	QO1520
20 A and 20 A	QO2020
20 A and 30 A	QO2030
30 A and 20 A	QO3020
Two 1P Individual Trip—120/240 Vac—2 Spaces Required	
15 A and 15 A	Order two QO1515 or QO2020 circuit breakers and handle tie QOTHT
15 A and 20 A	
20 A and 20 A	—
20 A and 30 A	QO20303020 *[13]*
30 A and 20 A	—

NOTE: The torque values for these products can be found at www.se.com

[11] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.
[12] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[13] Includes two circuit breakers (one QO2030 and one QO3020) and handle tie QOTHT.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



1P
QO-CAFI
Plug-On Neutral



1P
QO-CAFI
Pigtail

QO Arc-Fault Circuit Breaker (QO-CAFI)

QO arc-fault circuit breakers provide protection for Series and Parallel Type Arcing as required by the NEC and local code adoption, and comply with UL1699.

Table 7.7: QO-CAFI Circuit Breakers

Circuit Breaker Type *[14]*	Ampere Rating	One–Pole 120 Vac		Two–Pole 120/240 Vac
		10 k AIR 1 Space Required	22 k AIR 1 Space Required	10 k AIR 2 Space Required
Combination Arc-fault Interrupter (Pigtail Neutral)	15 20	QO115CAFI QO120CAFI	QO115VHCAFI QO120VHCAFI	QO215CAFI*[15]* QO220CAFI *[15]*
Plug-On Neutral Combination Arc-fault Interrupter	15 20	QO115PAF QO120PAF	QO115VHPAF QO120VHPAF	—



1P QO-DF
Plug-on Neutral



1P QO-DF
Pigtail

QO Dual Function Circuit Breaker

QO Combination Arc Fault and Ground Fault Circuit Interrupters (Dual Function) provide overload and short circuit protection, plus arc fault and ground fault protection in accordance with the NEC, UL1699 and UL943.

Table 7.8: QO-DF Circuit Breakers

Circuit Breaker Type *[14]*	Ampere Rating	1P 120 Vac 10 k AIR 1 Space Required	1P 120 Vac 22 k AIR 1 Space Required
Combination Arc-fault and Ground Fault Circuit Interrupter (Pigtail Neutral)	15 20	QO115DF QO120DF	— QO120VHDF
Plug-On Neutral Combination Arc-fault and Ground Fault Circuit Interrupter	15 20	QO115PAFGF QO120PAFGF	QO115VHPAFGF QO120VHPAFGF



1P
QO-GFI



2P
QO-GFI

QO Ground-Fault Circuit Breakers (GFI)

Qwik-Gard™ circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 mA or more, for people protection. Do not connect to more than 250 feet of load conductor for the total one-way run to prevent nuisance tripping.

Table 7.9: QO-GFI Circuit Breakers

Circuit Breaker Type	Ampere Rating *[16]*	Qwik-Gard Circuit Breakers With Ground Fault Circuit Interrupter			
		1P 120 Vac		2P Common Trip 120/240 Vac	3P Common Trip 208Y/120 Vac
		10 k AIR 1 Space Required	22 k AIR 1 Space Required	10 k AIR 2 Spaces Required	10 k AIR 3 Spaces Required
Ground-Fault Circuit Interrupter (Pigtail Neutral)	15	QO115GFI	QO115VHGFI	QO215GFI	QO315GFI
	20	QO120GFI	QO120VHGFI	QO220GFI	QO320GFI
	25	—	—	QO225GFI	—
	30	QO130GFI	—	QO230GFI	QO330GFI
	35	—	—	QO235GFI	—
	40	—	—	QO240GFI	QO340GFI
	45	—	—	QO245GFI	—
	50	—	—	QO250GFI	QO350GFI
	60	—	—	QO260GFI *[17]*	—
Plug-On Neutral Ground-Fault Circuit Interrupter	15	QO115PGFI*[18]*	—	—	—
	20	QO120PGFI*[18]*	—	—	—

[14] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[15] For 120/240 V only, not for 208Y/120 V.
[16] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.
[17] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.
[18] New Plug-On Neutral

© 2026 Schneider Electric
All Rights Reserved
4/29/2026


QO220EPD

QO-EPD/EPE Circuit Breakers

QO-EPD/EPE circuit breakers provide overload and short circuit protection combined with Class B ground fault protection. They are designed to provide ground fault protection of equipment at a 30 mA level (EPD) or 100 mA level (EPE). They are not designed to protect people from electrical shock.

Table 7.10: QO-EPD Circuit Breakers

Ampere Rating *[19]*	1P 120 Vac 10 k AIR 1 Space Required	2P Common Trip 120/240 Vac 10 k AIR 2 Spaces Required	
15	QO115EPD	QO215EPD	QO315EPE*[20]*
20	QO120EPD	QO220EPD	QO320EPE *[20]*
25	QO125EPD OBS	QO225EPD	—
30	QO130EPD	QO230EPD	QO330EPE *[20]*
40	—	QO240EPD	QO340EPE *[20]*
50	—	QO250EPD	QO350EPE *[20]*
60	—	QO260EPD *[21]*	—

OBS This product is obsolete.

QO Switch Neutral Common Trip Circuit Breakers (QO-SWN)

Switch Neutral Common Trip 2008 NEC® 514.11

Table 7.11: QO-SWN Circuit Breakers

Ampere Rating *[19]*	2 Wire 120 Vac 10 k AIR 2 Spaces Required
15	QO215SWN
20	QO220SWN


QO320HID

QO High Intensity Discharge Circuit Breakers (QO-HID)

HID circuit breakers are for use on circuits feeding fluorescent and high intensity discharge (HID) lighting systems such as mercury vapor, metal halide, or high pressure sodium. These circuit breakers are physically interchangeable with QO circuit breakers.

Table 7.12: QO-HID Circuit Breakers

Ampere Rating *[19]*	1P 120/240 Vac 10 k AIR	2P Common Trip 120/240 Vac 10 k AIR	3P Common Trip 240 Vac 10 k AIR
20	—	QO220HID	QO320HID

[19] 10–30 A circuit breakers are suitable for use with 60ºC or 75ºC conductors. 35–125 A circuit breakers are suitable for use with 75ºC conductors.
[20] See note in Instruction Bulletin when using in an enclosure with a QO403 or QON prefix.
[21] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

QO High Magnetic Trip Circuit Breakers (QO-HM)

High magnetic trip circuit breakers are recommended for applications where high initial inrush may occur and for individual dimmer applications.

Table 7.13: QO-HM Circuit Breakers

120 Vac—10 k AIR	
Ampere Rating *[22]*	**1P**
15 A	QO115HM *[23] [24]*
20 A	QO120HM *[23] [24]*

Non-Automatic (Standard) Miniature Switches

Miniature non-automatic switches have the same physical packaging as miniature circuit breakers, but open only when the handle is switched to the OFF position.

Non-automatic switches provide no overcurrent protection or short circuit protection. They must not be used on systems that have an available fault current greater than the values listed in the table. Non-automatic switches are UL Listed per UL 1087 and are CSA certified.

Table 7.14: QO Non-Automatic Miniature Switches, 240 Vac 10 kA

Ampere Rating	2P	3P
60	QO200	QO300 OBS

OBS This product is obsolete.

[22] 10–30 A circuit breakers are suitable for use with 60ºC or 75ºC conductors. 35–125 A circuit breakers are suitable for use with 75ºC conductors.
[23] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[24] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Accessories for QO/QOB Circuit Breakers

Table 7.15: Accessories for use with QO and QOB Miniature Circuit Breakers

Description		Cat. No.	Schedule
Handle Attachments			
Handle Tie	Converts any two adjacent 120/240 Vac 1P QO circuit breakers to independent trip 2P Converts any two adjacent 120/240 Vac1P side-by-side QOT circuit breakers to independent trip 2P	QO1HT QOTHT QO3HT	DE2E DE2E
Handle Clamp	Clamp for holding QO 1P handle in ON or OFF position Clamp for holding QO or Q1 either 1P, 2P or 3P circuit breaker handles in ON or OFF position	QO1LO HLO1	DE2E DE2E
Handle Padlock Attachment for Padlocking in ON or OFF position	For padlocking 1P QO circuit breaker in ON or OFF position Loose attachment Fixed attachment	QOHPL QO1PA	DE2E DE2E
	For padlocking 1P side-by-side QOT circuit breaker in ON or OFF position	QOTHPA OBS	DE2E
	For padlocking 2P QO-GFI circuit breakers in either ON or OFF position, fixed attachment.	GFI2PA	DE2A
	For 2P and 3P QO and Q1 standard circuit breakers which require padlocking in either ON or OFF position. Loose attachment Fixed attachment	QO1HPL QO1PL	DE2E DE2E
Handle Padlock Attachment for Padlocking in OFF position	For padlocking 2P and 3P QO circuit breakers in OFF position only, fixed attachment.	QO2PAF	DE2E
	For padlocking 1P QO, QO-GFI, QO-CAFI, QO-DF and QO-EPD circuit breakers in OFF position only, fixed attachment.	QOADV1PAF	DE2E
	For padlocking 2P QO-GFI, QO-CAFI and QO-EPD circuit breakers in OFF position only, fixed attachment.	QOGFI2PAF	DE2E
Ring Terminal	Ring terminals are available as a factory-installed option.	See Section 7	DE2A
Sub-feed Lugs	60 A 2P plug-on – 2 spaces required (6–2 Al/Cu) 125 A 2P plug-on – 2 spaces required (12–2/0 Al/Cu) 225 A 2P plug-on – 4 spaces required (4–300 Al/Cu) 125 A 3P plug-on – 3 spaces required (12–2/0 Al/Cu)	QO60SL OBS QO2125SL QO2225SL *[25]* QO3125SL	DE2A DE2A DE2A DE3
Mechanical Interlock Attachment	For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be ON at a time (Not QOU)	QO2DTI	DE2E
With Retaining Kit	QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2Ps or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers.	QO2DTIM	DE2E

OBS This product is obsolete.



QO1PA



QO1PL



QO1HT



HLO1



QO1PAF



QO2DTI



QO1HPL



QOTHPA




QO1LO



QOHPL



QO2PAF



QOADV1PAF

Factory-Installed Accessories for QO and QOB Miniature Circuit Breakers

Factory-installed electrical accessories take up an additional pole space on QO, QO-GFI, QO-EPD, QO-SWN and QOU circuit breakers. All AC electrical accessories shown below are rated for 50/60 Hz. Accessories are not available for QOB-VH (2P 150 A and 3P 110–150 A) circuit breakers or QO, QOU molded case switches. QO circuit breakers will accept only one accessory per circuit breaker. Undervoltage trip is not available on miniature circuit breakers. Factory-installed accessories are not available for QO-AFI or

[25] Not suitable for use in 3Ø panels. Use only in 1Ø panel rated 150 A or greater.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

QO-CAFI Arc Fault Circuit Breakers, QO-CAFI, QO-DF, or QO-PDF circuit breakers, or on QO2150, QO2175, or QO2200 circuit breakers.


Table 7.16: Factory-Installed Accessories for QO/QOB Circuit Breakers *[26]*

Accessory	Description	Rated Voltage	Coil Burden	Cat. No. Suffix	Accessory	Description	Contact Comb.	Max. Voltage	Max.	Cat. No. Suffix
Shunt Trip	Trips the circuit breaker from a remote location by means of a trip coil energized from a separate circuit. A 120 Vac shunt trip will operate at 55% or more of rated voltage. All other shunt trips will operate at 75% or more of rated voltage. **Application** • For use with momentary or maintained push button. • Not available on QO-GFI, QO-EPD. QO-AFI, QO-CAFI, QO-DF, or QO-PDF. • Shunt trip terminals accept (2) 14–12 AWG Cu.	12 Vac/Vdc 24 Vac/Vdc	60 VA 168 VA	-1042	Auxiliary Switches	Monitors circuit breaker contact status and provides a remote signal indicating the circuit breaker contacts are OPEN or CLOSED. **Application** • Auxiliary switch terminals accept (2) 14–12 AWG Cu leads. • Leads (EH): Yellow for "A", Blue for "B", Striped common 18 AWG Cu.	1A 1B	120 Vac 120 Vac	5 A 5 A	-1200 -1201
		120 Vac 208 Vac 240 Vax	72 VA 228 VA 288 VA	-1021	Alarm Switches	Used with control circuits and is actuated only when the circuit breaker has tripped. Standard construction includes a normally-open contact. **Application** • Leads: Alarm switch terminals accept (2) 14–12 AWG Cu leads.	1A	120 Vac	5 A	-2100

QO Mounting Bases



SN12125

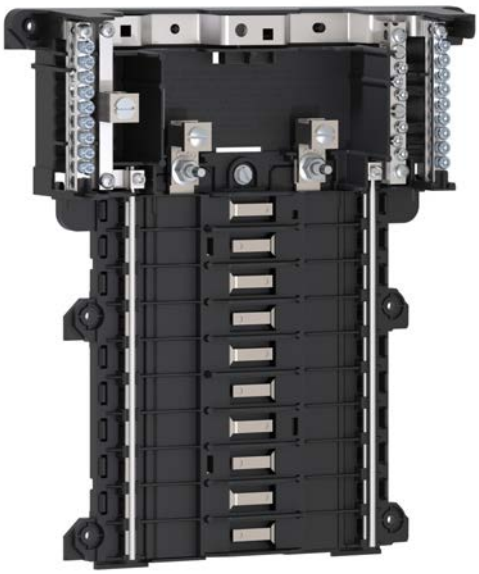

QON120L125P1



QON3B

Table 7.17: QO OEM Mounting Bases—UL Recognized Components

Voltage System	Main Lug Rating	Spaces	Max. No. 1P Circuits	Mounting Bases Cat. No.	Main Wire Size AWG/kcmil
QO Plug-On Mounting Bases—Accepts Only QO Plug-On Circuit Breakers - Not Compatible With QO Plug-On Neutral Circuit Breakers					
1Ø2W 240 Vac Max. 10 k AIC (Without Neutral Assembly)	70 A	2	2	QON2L70	14–4 Cu, 12–3 Al
	125 A	4	4	SK9948BW	12–1/0 Cu/Al
	125 A	6	6	SK9795	12–1/0 Cu/Al
QO Plug-On Mounting Bases—Accepts Only QO Plug-On Circuit Breakers - Not Compatible With QO Plug-On Neutral Circuit Breakers					
1Ø3W 240 Vac Max. 10 k AIC	40 A	2	2	QON2L40	14–6 Cu, 12–6 Al
	70 A	2	4	QON24L70	14–4 Cu, 12–3 Al
	100 A	6	12	QON612L100	8–1/0 Cu/Al
	100 A	8	16	QON816L100	8–1/0 Cu/Al
QO Plug-On Neutral Mounting Bases - Compatible with QO Plug-On Circuit Breakers and QO Plug-On Neutral Circuit Breakers					
1Ø3W 240 Vac Max. 10 k AIC	125 A	12	24	QON112L125PI	4–2/0 Cu/Al
	125 A	20	24	QON120L125PI	4–2/0 Cu/Al
	200 A	12	24	QON112L200PI	4–250 Cu/Al
	200 A	24	36	QON124L200PI	4–250 Cu/Al
	200 A	24	36	QON124L200PDL	(2) 4–300 Cu/Al
	200 A	30	40	QON130L200PI	4–250 Cu/Al
	225 A	42	52	QON142L225PI	4–300 Cu/Al
	225 A	52	72	QON154L225P	4–300 Cu/Al
	225 A	60	72	QON160L225P	4–300 Cu/Al
QO Plug-On Mounting Bases—Accepts Only QO Plug-On Circuit Breakers - Not Compatible With QO Plug-On Neutral Circuit Breakers					
3Ø3W 240 Vac Max. 10 k AIC (Without Neutral Assy.)	125 A	12	12	QON312L125	4–2/0 Cu/Al
	125 A	20	20	QON320L125	4–2/0 Cu/Al
	125 A	24	24	QON324L125	4–2/0 Cu/Al
	200 A	18	18	QON318L200	4–300 Cu/Al
	200 A	24	24	QON324L200	4–300 Cu/Al
	200 A	30	30	QON330L200	4–300 Cu/Al
	225 A	42	42	QON342L225	4–300 Cu/Al
QO Plug-On Mounting Bases—Accepts Only QO Plug-On Circuit Breakers - Not Compatible With QO Plug-On Neutral Circuit Breakers					
3Ø4W 240 Vac Max. 10 k AIC	60 A	3	3	QON403L60N	12–6 Cu/Al
	125 A	12	12	QON312L125I	4–2/0 Cu/Al
	125 A	20	20	QON320L125I *[27]*	4–2/0 Cu/Al
	125 A	24	24	QON324L125I	4–2/0 Cu/Al
	200 A	30	30	QON330L200I*[27]*	4–300 Cu/Al
	225 A	42	42	QON342L225I	4–300 Cu/Al
QO Plug-On Mounting Bases—Accepts Only QO Plug-On Circuit Breakers - Not Compatible With QO Plug-On Neutral Circuit Breakers					
1Ø2W 240 Vac Max. 10 k AIC (Without Neutral Assembly)	70 A 70 A 70 A	1 2 3	1 2 3	QOMB1 QOMB2 QOMB3	14–4 Cu 12–2 Al 14–4 Cu 12–2 Al 14–4 Cu 12–2 Al
QOB Bolt-On Mounting Bases—Accepts only QOB Bolt-On Circuit Breakers					
3Ø3W 240 Vac Max.10 k AIC (Without Neutral Assembly)	100 A	3	3	QON3B	12–1 Cu/Al


Table 7.18: Solid Neutral Assemblies

Main Lug Rating	Number of Branch Neutral Terminals	Cat. No.	Main Neutral Lug Wire Size Cu/Al	Branch Neutral Terminal Wire Size	
				Cu	Al
125 A	12	SN12125	4–2/0 AWG	14–4 AWG	12–4 AWG
125 A	20	SN20	4–2/0 AWG	14–4 AWG	12–4 AWG
200 A	12	SN12200	4 AWG–300 kcmil	14–4 AWG	12–4 AWG
200 A	30	SN30	4 AWG–300 kcmil	14–4 AWG	12–4 AWG
225 A	42	SN42	4 AWG–300 kcmil	14–4 AWG	12–4 AWG

[26] QOB circuit breakers with shunt trip, auxiliary switches, and/or alarm switches, which are no longer active commercial references, may be available Factory Assembled into NQ Panelboards.

[27] Also IEC rated and CE marked for IEC 60439-1. Use only Square D brand Type QOXC, QOXD, QOHX and QOE circuit breakers for 415Y/240 Vac max. systems.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



Low Ampere QOU

Low Ampere QOU Miniature Circuit Breakers

QOU unit mount miniature circuit breakers (cable-in/cable-out) are ideal for OEM applications. They have the Square D™ circuit breaker's unique Visi-Trip™ feature and can be DIN rail-mounted or surface- or flush-mounted using mounting feet. Mounting feet not provided *[28]*.

General Specifications Common to All Low Ampere QOU Circuit Breakers

- For convenient flush mount, surface mount or DIN mount (symmetrical rail 35 x 7.5 DIN/EN 50 022)
- Single handle with internal common trip
- Terminal lug wire size (1) 14–2 AWG Cu or Al
- Reversible line and load lugs
- Field-installable quick connectors
- UL Listed 48 Vdc (5 k AIR)
- UL Listed as HACR Type: 10–70 A
- High magnetic trip circuit breakers (QOU-HM) are recommended for applications where high initial inrush may occur and for individual dimmer applications.
- For DIN mounting rails, see IEC Starters and Relays, Section 18.

Table 7.19: QOU Low Ampere Miniature Circuit Breakers

Ampere Rating	Cat. No.			
	1P 120/240 Vac	2P 120/240 Vac	2P 240 Vac *[29]*	3P 240 Vac
10 k AIR				
10 A	QOU110	QOU210	—	QOU310
15 A	QOU115	QOU215	QOU215H	QOU315
20 A	QOU120	QOU220	QOU220H	QOU320
25 A	QOU125	QOU225	QOU225H OBS	QOU325
30 A	QOU130	QOU230	QOU230H	QOU330
35 A	QOU135	QOU235	—	QOU335
40 A	QOU140	QOU240	—	QOU340
45 A	QOU145 OBS	QOU245	—	QOU345
50 A	QOU150	QOU250	—	QOU350
60 A	QOU160	QOU260	—	QOU360
70 A	QOU170	QOU270	—	QOU370
22 k AIR				
15 A	QOU115VH	QOU215VH	—	QOU315VH OBS
20 A	QOU120VH	QOU220VH	—	QOU320VH
30 A	QOU130VH	QOU230VH	—	QOU330VH
50 A	QOU150VH OBS	QOU250VH	—	—
60 A	QOU160VH	QOU260VH	—	—

OBS This product is obsolete.

Table 7.20: QOU-HM Miniature Circuit Breakers (10 k AIR)

Ampere Rating	Cat. No.			
	1P 120/240 Vac	2P 120/240 Vac	2P 240 Vac	3P 240 Vac
15 A	QOU115HM	—	—	—
20 A	QOU120HM	—	—	—

[28] See QOU Accessories, page 7-20.
[29] QOU-H interrupting rating is 10 kA at 240 Vac.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



High Ampere QOU

High Ampere QOU Circuit Breakers

General Specifications Common to All High Ampere QOU Circuit Breakers

- Flush mount, surface mount, and DIN rail mount.
- Internal common trip.
- Non-reversible line and load lugs.
- Terminal lug wire size (1) 12– 2/0 AWG Cu or Al.
- UL Listed 60 Vdc per pole (5 k AIR). (**Note:** except switches)
- UL Listed as HACR type, 80–125 A.
- Non-automatic switches have the same physical packaging as miniature circuit breakers, but provide no overcurrent or short circuit protection. They are UL Listed per UL1087 and are CSA certified.

Table 7.21: QOU High Ampere Miniature Circuit Breakers (10 k AIR)

Ampere Rating	Cat. No.			
	1P 120/240 Vac	2P 120/240 Vac	2P 240 Vac	3P 240 Vac
80 A	QOU180	QOU280	—	QOU380
90 A	QOU190 OBS	QOU290	—	QOU390
100 A	QOU1100	QOU2100	—	QOU3100
125 A	—	QOU2125	—	—

OBS This product is obsolete.

Table 7.22: QOU Non-Automatic Switches

Ampere Rating		
	2P 240 Vac	3P 240 Vac
60 A	QOU200	QOU300
100 A	QOU2000 OBS	QOU3000 OBS
125 A	QOU20001	QOU30001 OBS


OBS This product is obsolete.


Interrupting ratings see page 7-3
Accessories see page 7-20
Dimensions see page 7-85

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



QOU14100JBAF

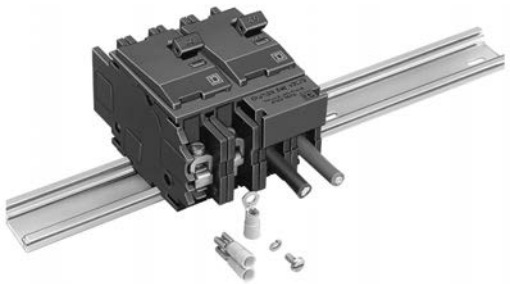
2P DIN-Mounted QOU Circuit Breaker

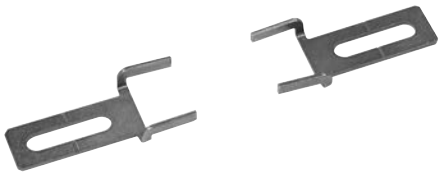
Mounting Foot
QOUMF1

QOU Accessories

Table 7.23: Accessories for QOU Low Ampere Circuit Breakers (Except as Noted)

Description	Order Qty.	Cat. No.
Factory-installed ring tongue terminal, 10–32 screw, for 1P, 2P, 3P QOU, 10–60 A	—	Suffix -5283
Hex drive 5/32 in. wire binding screw for QOU	—	Suffix -5280
For padlocking 1P low ampere QOU circuit breaker in OFF or ON position	—	QOU1PA OBS
For padlocking 2P and 3P low ampere QOU circuit breaker in OFF or ON position	—	QOU1PL
For padlocking 1P low ampere QOU circuit breaker in OFF position only	—	QOU1PAFLA
For padlocking 2P and 3P low ampere QOU circuit breaker in OFF position only	—	QOU2PAFLA
For padlocking 2P and 3P high ampere QOU circuit breaker in OFF position only	—	Suffix -7100
Handle lock-out, ON or OFF position	—	HLO1
4P 100 A Jumper bar assy. w/front wiring with base, cover and screw	1	QOU14100JBAF
4P 100 A Jumper bar assy. w/right side wiring with base, cover and screw	1	QOU14100JBAR OBS
4P 100 A Jumper bar assy. w/left side wiring with base, cover and screw	1	QOU14100JBAL
1Ø, 4P, 100 A Jumper bar base with front wiring	40	QOU14100BAFB
1Ø, 4P, 100 A Jumper bar base with left side wiring	40	QOU14100BALB
1Ø, 4P, 100 A Jumper bar base with right side wiring	40	QOU14100BARB
4P Jumper bar cover	40	QOU14100CAB
Mounting screw for jumper bar cover	40	QOU1CMSB OBS
6P 150 A Jumper bar assy. w/front wiring with base, cover and screw	1	QOU16150JBAF
1Ø, 6P, 150 A Jumper bar base with front wiring	40	QOU16150BAFB
1Ø, 6P, 150 A Jumper bar base with left side wiring	40	QOU16150BALB OBS
1Ø, 6P, 150 A Jumper bar base with right side wiring	40	QOU16150BARB OBS
6P jumper bar cover	40	QOU16150CAB OBS
Vertical rainproof cover 2P and 3P QO, QOU, FA and KA	1 10	BCV *[30]* BCVB OBS
Horizontal rainproof cover 2P QO, QOU, and 3P Q2, EH	1 10	BCH *[30]* BCHB *[30]*
1P Fingersafe™ cover for high ampere QOU circuit breaker	1 40	QOUHFSC1 QOUHFSC1B OBS
1P Fingersafe cover for low ampere QOU circuit breaker	1 40	QOULFSC1 QOULFSC1B
Cover plate for one 2P QOU circuit breaker	1 40	QOUCP2 OBS QOUCP2B
Cover plate for one 3P QOU circuit breaker	1 40	QOUCP3 OBS QOUCP3B
Cover plate for two 2P QOU circuit breakers	1 40	QOUCP4 OBS QOUCP4B
Cover plate for three 2P QOU circuit breakers	1 40	QOUCP6 OBS QOUCP6B
Field-installable ring tongue terminal adaptor	1 80	QOURT QOURTB
Quick connector end connection wiring	1 40	QOUEC QOUECB
Quick connector forward or reverse wiring	1 40	QOUFR OBS QOUFRB
1P QOU mounting foot	1 80	QOUMF1 *[30]* QOUMF1B *[30]*
2P QOU mounting foot	1 40	QOUMF2 *[30]* QOUMF2B *[30]*
3P QOU mounting foot	1 24	QOUMF3 OBS QOUMF3B *[30]*
Tapped mounting foot for QOU, 1P and 2P 10–70 A, 3P 10–60 A		
Packaged with circuit breaker		Suffix -3100
Individually packaged	1	QOUMFS1
Bulk packed	80	QOUMFS1B OBS
Mechanical interlock attachment: Used to interlock two circuit breakers mounted side-by-side so that only one circuit breaker can be ON at a time. A 1P or 2P circuit breaker can be mounted on the left and interlocked with a 2P or 3P circuit breaker on the right.	1	QOU2DTILA *[31]*

OBS This product is obsolete.

QOUQ Low Ampere Circuit Breakers

QOUQ low ampere circuit breakers with four-point quick-connect terminals are provided with permanent factory-installed terminals which are affixed to the Load or OFF end of the circuit breaker. This special terminal will accommodate up to four 1/4-inch insulated female quick connect wire terminations. Total ampacity of these connections must not exceed the rating of the circuit breaker.

Table 7.24: QOUQ Four-Point Quick-Connect Terminals

	Poles	Order Qty.	Cat. No.
Four-Point Quick-Connect Terminals	1	1	Change QOU to QOUQ
	2	1	
	3	1	

The QOU uses the same electrical accessories as the QO. See the QO information for available electrical accessories.

[30] For use on low and high ampere QOU.
[31] 10–70 A 1P and 2P, 10–60 A 3P.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026





HOM 1P and 2P



HOM2200BB Branch Circuit Breaker
4 Spaces Required

Homeline Standard Plug-On Circuit Breakers

The Square D Homeline circuit breakers are in a 1 in. wide format for 1-pole circuit breakers. They are designed to plug into Homeline load centers.

Table 7.25: Standard HOM Plug-on Circuit Breakers

Ampere Rating	AIR	1P—120 Vac, 1 Space Required	2P—120/240 Vac Common Trip 2 Spaces Required.
15 A	10 kA	HOM115 *[1][2]*	HOM215 *[2]*
20 A	10 kA	HOM120 *[1][2]*	HOM220 *[2]*
25 A	10 kA	HOM125 *[2]*	HOM225 *[2]*
30 A	10 kA	HOM130 *[2]*	HOM230 *[2]*
35 A	10 kA	—	HOM235 *[2]*
40 A	10 kA	HOM140 *[2]*	HOM240 *[2]*
45 A	10 kA	—	HOM245 *[2]*
50 A	10 kA	HOM150 *[2]*	HOM250 *[2]*
60 A	10 kA	—	HOM260 *[2]*
70 A	10 kA	—	HOM270 *[2]*
80 A	10 kA	—	HOM280 *[2]*
90 A	10 kA	—	HOM290 *[2]*
100 A	10 kA	—	HOM2100 *[2]*
110 A	10 kA	—	HOM2110 *[2]*
125 A	10 kA	—	HOM2125 *[2]*
150 A	10 kA	—	HOM2150BB *[2][3]*
175 A	10 kA	—	HOM2175BB *[2][3]*
200 A	10 kA	—	HOM2200BB *[2][3]*

Homeline High Magnetic Circuit Breakers (HOM-HM)

High magnetic trip circuit breakers are recommended for applications where high initial inrush current may occur.

Table 7.26: HOM-HM Circuit Breakers

Amperes	1P—120/240 Vac	2Ps
20 A	HOM120HM *[2]*	—

Homeline Combination Arc Fault Circuit Interrupters (HOM-CAFI)

Homeline Combination Arc Fault Circuit Interrupters—Provide overload and short circuit protection, plus arc fault protection in accordance with the NEC and UL1699.



HOM 1P CAFI
Plug-on Neutral



HOM 1P CAFI
Pigtail

Table 7.27: HOM-CAFI Circuit Breakers

Circuit Breaker Type	Ampere Rating	Poles 120 Vac	Cat. No.
One-Pole			
Combination Arc-Fault Circuit Interrupter with Pigtail Neutral	15 A	1	HOM115CAFI *[2]*
	20 A	1	HOM120CAFI *[2]*
Plug-On Neutral Combination Arc-Fault Interrupter	15 A	1	HOM115PCAFI *[2]*
	20 A	1	HOM120PCAFI *[2]*
Two-Pole			
Combination Arc-Fault Circuit Interrupter with Pigtail Neutral	15 A	2	HOM215CAFI *[2] [4]*
	20 A	2	HOM220CAFI *[2] [4]*

Homeline Dual Function Circuit Breaker (HOM-DF)

Homeline Combination Arc Fault and Ground Fault Circuit Interrupters (Dual Function)—Provide overload and short circuit protection, plus arc fault and ground fault protection in a single device in accordance with the NEC, UL1699 and UL943.



HOM 1P DF
Plug-on Neutral



HOM 1P DF
Pigtail

Table 7.28: HOM-DF Circuit Breakers

Circuit Breaker Type	Ampere Rating	Poles 120 Vac	Cat. No.
Combination Arc-Fault and Ground Fault Circuit Interrupter with Pigtail Neutral	15 A	1	HOM115DF *[2]*
	20 A	1	HOM120DF *[2]*
Plug-On Neutral Combination Arc-Fault and Ground Fault Circuit Interrupter	15 A	1	HOM115PDF *[2]*
	20 A	1	HOM120PDF *[2]*

[1] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.
[2] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[3] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.
[4] For 120/240 V only, not for 208Y/120 V.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Homeline Ground-Fault Circuit Breaker (HOM-GFI)

HOM-GFI circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 milliamperes or more.



HOM 1P GFI
(With Ground Fault Circuit Interrupter)
1 Space Required



HOM 2P GFI
(With Ground Fault Circuit Interrupter)
2 Spaces Required

Table 7.29: HOM-GFI Circuit Breakers

Circuit Breaker Type	Ampere Rating	AIR	1P—120 Vac 1 Space Required	2P—120/240 Vac Common Trip 2 Spaces Required
Ground-Fault Circuit Interrupter(Pigtail Neutral)	15 A	10 kA	HOM115GFI	HOM215GFI
	20 A	10 kA	HOM120GFI	HOM220GFI
	25 A	10 kA	—	HOM225GFI
	30 A	10 kA	—	HOM230GFI
	35 A	10 kA	—	HOM235GFI
	40 A	10 kA	—	HOM240GFI
	45 A	10 kA	—	HOM245GFI
	50 A	10 kA	—	HOM250GFI
Plug-On Neutral Ground-Fault Circuit Interrupter	15 A	10 kA	HOM115PGFI	—
	20 A	10 kA	HOM120PGFI	—

Homeline Equipment Protection Device (HOM-EPD)

Homeline Equipment Protection Device—Circuit Breakers with 30 mA Equipment Ground Fault Protection (UL Listed).

Table 7.30: HOM-EPD Circuit Breakers

Amperes	1P—120 Vac	2P—120/240 Vac Common Trip
20 A	HOM120EPD	HOM220EPD
30 A	—	HOM230EPD
40 A	—	HOM240EPD
50 A	—	HOM250EPD

Homeline Tandem and Quad Tandem Circuit Breakers (HOMT)

Table 7.31: HOMT Tandem Circuit Breakers

Ampere Rating *[5]*	AIR	1P Tandem—120/240 Vac (One Space Required)
15 and 15 A	10 kA	HOMT1515 *[6]*
15 and 20 A	10 kA	HOMT1520 *[6]*
20 and 20 A	10 kA	HOMT2020 *[6]*
30 and 15 A	10 kA	HOMT3015 *[6]*
30 and 20 A	10 kA	HOMT3020 *[6]*



HOMT Tandem
Circuit Breaker



HOMT1515215
2 Spaces Required

Table 7.32: HOMT Quad Tandem 1P Circuit Breakers

Ampere Rating *[5]*		AIR	2P Tandem—120/240 Vac (Two Spaces Required)
1P	2P		
(2) 15 A	15 A	10 kA	HOMT1515215
(2) 15 A	20 A	10 kA	HOMT1515220
(2) 15 A	30 A	10 kA	HOMT1515230
(2) 15 A	40 A	10 kA	HOMT1515240
(2) 15 A	50 A	10 kA	HOMT1515250
(2) 20 A	20 A	10 kA	HOMT2020220
(2) 20 A	25 A	10 kA	HOMT2020225
(2) 20 A	30 A	10 kA	HOMT2020230
(2) 20 A	40 A	10 kA	HOMT2020240
(2) 20 A	50 A	10 kA	HOMT2020250

NOTE: Typical catalog no. (e.g. HOMT 1515230) represents two 1P, outer poles (two 15 A 1P CBs) and one 2P inner circuit breaker with common trip (one 30 A 2P CB).



HOMT225225
2 Spaces Required

Table 7.33: HOMT Quad Tandem 2P Circuit Breakers

Ampere Rating *[5]*		AIR	(2) 2P Tandem—120/240 Vac (Two Spaces Required)
2P	2P		
15 A	15 A	10 kA	HOMT215215
15 A	20 A	10 kA	HOMT215220
15 A	25 A	10 kA	HOMT215225
15 A	30 A	10 kA	HOMT215230
15 A	40 A	10 kA	HOMT215240
15 A	50 A	10 kA	HOMT215250
20 A	20 A	10 kA	HOMT220220
20 A	25 A	10 kA	HOMT220225
20 A	30 A	10 kA	HOMT220230
20 A	40 A	10 kA	HOMT220240
20 A	50 A	10 kA	HOMT220250
25 A	25A	10 kA	HOMT225225
25 A	30 A	10 kA	HOMT225230
25 A	40 A	10 kA	HOMT225240

[5] 15–20 A tandem or quad tandem circuit breakers are suitable for use with 60°C or 75°C conductors. 25–50 A tandem or quad tandem circuit breakers are suitable for use with 75°C conductors only.

[6] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.33 HOMT Quad Tandem 2P Circuit Breakers (cont'd.)

Ampere Rating *[7]*		AIR	(2) 2P Tandem—120/240 Vac (Two Spaces Required)
2P	2P		
25 A	50 A	10 kA	HOMT225250
30 A	30 A	10 kA	HOMT230230
30 A	40 A	10 kA	HOMT230240
30 A	50 A	10 kA	HOMT230250

NOTE: Typical catalog no. (i.e. HOMT215230) represents two 2P; outer poles (one 15 A 2P with common trip) and inner poles (one 30 A 2P with common trip).

Homeline Circuit Breaker Wire Sizes

Table 7.34: Wire Sizes for Homeline Circuit Breakers

Breaker Type	Ampere Rating	Wire Size (AWG/kcmil) *[8]*	
		Aluminum	Copper
HOM 1P	15–30 A	14–8 AWG	14–8 AWG or (2) 14–10 AWG
	40–50 A	8–2 AWG	8–2 AWG
HOM 2P	15–30 A	14–8 AWG	14–8 AWG or (2) 14–10 AWG
	35–70 A	8–2 AWG	8–2 AWG
	80–125 A	4–2/0 AWG	4–2/0 AWG
	150–200 A	4 AWG–300 kcmil	4 AWG–300 kcmil
HOMT and Quad	15–30 A	14–8 AWG	14–8 AWG
Quad Only	40–50 A	6–12 AWG	6–14 AWG
HOM-GFI - 1P	15–20 A	14–10 AWG	14–10 AWG
HOM-GFI - 2P	15–50 A	12–4 AWG	14–6 AWG

Accessories for Homeline Circuit Breakers

Table 7.35: Accessories for Use with Homeline Circuit Breakers

Description		Cat. No.
Handle Attachments		
Handle Tie: Converts any two adjacent 120/240 Vac single HOM circuit breakers to independent trip 2P		HOM1HT
Handle Tie: Converts any two adjacent 120/240 Vac 1P side-by-side HOMT circuit breakers to independent trip 2P		HOMTHT
Handle Clamp: Clamp for holding HOM 1P handle in the ON or OFF position		QO1LO
Handle Blocking Device: Attaches to standard HOM 2P circuit breakers for holding the handle in the OFF position		HOM2HBD
Handle Padlock Attachment: For padlocking 1P Standard HOM breakers in the ON or OFF position		HOM1PA
Handle Padlock Attachment: For padlocking 2P Standard HOM circuit breakers in ON or OFF position	15–70 A	HOM2PALA
	80–125 A	HOM2PAHA
Handle Padlock Attachment: For padlocking 1P CAFI, DF, GFI, and EPD HOM breakers in ON or OFF position		HOMELEC1PA
Handle Padlock Attachment: For padlocking 2P CAFI, GFI, and EPD HOM breakers in ON or OFF position		HOMELEC2PALA
Handle Padlock Attachment: For padlocking center poles of Homeline Quad breakers in the OFF position		HOMQPA
Handle Padlock Attachment: For padlocking main circuit breakers in convertible load center in OFF position	50–125 A	QOM1PA *[9]*
	100–225 A	QOM2PA *[9]*
Sub-Feed Lugs		
125 A 2P plug-on—2 spaces required		HOML2125
225 A 2P plug-on—4 spaces required		HOML2225 *[10]*

OBS This product is obsolete.

[7] 15–20 A tandem or quad tandem circuit breakers are suitable for use with 60°C or 75°C conductors. 25–50 A tandem or quad tandem circuit breakers are suitable for use with 75°C conductors only.
[8] 15–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 40–125 A circuit breakers are suitable for use with 75°C conductors.
[9] 50–125 A QOM1 frame size; 100–225 A QOM2 frame size.
[10] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

UL489 / CSA C22.2 No 5 / IEC/EN 60947-2 / GB14048-2
Miniature Circuit Breakers

Multi9 $C60_{BP}$ and $C60_{BPR}$ Miniature Circuit Breakers

$C60_{BP}$ and $C60_{BPR}$ are multi-standard miniature circuit breakers and branch circuit protection as defined by UL489. They combine the following functions:

- circuit protection against short-circuit curves
- circuit protection against overload currents
- tripping and fault indication by the addition of auxiliary accessories

Number of 18 mm (0.71 in.) Poles	Rating (A) 25°C/77°F	Breaking Capacity (kA rms)							
		AIR UL 489 / CSA C22.2 No 5				Icu IEC 60947-2			
	Voltage (Ue)	277 Vac	240 Vac	120 Vac	60 Vdc	440 Vac	415 Vac	240 Vac	60 Vdc
1P	0.5 to 35	10	14	14	10	—	3	10	20
	40 to 63	—	10	10	10	—	3	10	20
	Voltage (Ue)	480Y/277 Vac		240 Vac	125 Vdc	440 Vac	415 Vac	240 Vac	125 Vdc
2P	1 to 25	10		14	10	6	10	20	—
	30 to 35	10		14	—	6	10	20	—
3P	1 to 35	10		14	—	6	10	20	—
2P/3P	40 to 63	—		10	—	6	10	20	—


$C60_{BP}$ 1P


$C60_{BP}$ 2P


$C60_{BP}$ 3P


$C60_{BPR}$ 1P


$C60_{BPR}$ 2P


$C60_{BPR}$ 3P

Table 7.36: $C60_{BP}$ and $C60_{BPR}$ Catalog Numbers

Type Rating (In)	UL489 and CSA Voltages	1P Curve			2P Curve		3P Curve	
		Z	C	D (= K)	C	D (= K)	C	D (= K)
$C60_{BP}$ (Tunnel Terminal Connection)								
0.5	480Y/277 V and 240 V	M9F44170	M9F42170	M9F43170	—	—	—	—
1		M9F44101	M9F42101	M9F43101	M9F42201	M9F43201	M9F42301	M9F43301
2		M9F44102	M9F42102	M9F43102	M9F42202	M9F43202	M9F42302	M9F43302
3		M9F44103	M9F42103	M9F43103	M9F42203	M9F43203	M9F42303	M9F43303
4		M9F44104	M9F42104	M9F43104	M9F42204	M9F43204	M9F42304	M9F43304
5		M9F44105	M9F42105	M9F43105	M9F42205	M9F43205	M9F42305	M9F43305
6		M9F44106	M9F42106	M9F43106	M9F42206	M9F43206	M9F42306	M9F43306
8		M9F44108	M9F42108	M9F43108	M9F42208	M9F43208	M9F42308	M9F43308
10		M9F44110	M9F42110	M9F43110	M9F42210	M9F43210	M9F42310	M9F43310
15		M9F44115	M9F42115	M9F43115	M9F42215	M9F43215	M9F42315	M9F43315
20		M9F44120	M9F42120	M9F43120	M9F42220	M9F43220	M9F42320	M9F43320
25		M9F44125	M9F42125	M9F43125	M9F42225	M9F43225	M9F42325	M9F43325
30		M9F44130	M9F42130	M9F43130	M9F42230	M9F43230	M9F42330	M9F43330
35		M9F44135	M9F42135	M9F43135	M9F42235	M9F43235	M9F42335	M9F43335
40	240 V only	M9F44140	M9F42140	M9F43140	M9F42240	M9F43240	M9F42340	M9F43340
45		M9F44145	M9F42145	M9F43145	M9F42245	M9F43245	M9F43245	M9F43345
50		M9F44150	M9F42150	M9F43150	M9F42250	M9F43250	M9F42350	M9F43350
63		M9F44163	M9F42163	M9F43163	M9F42263	M9F43263	M9F42363	M9F43363
$C60_{BPR}$ (Ring Tongue Terminal Connection)								
1	480Y/277 V and 240 V	M9F54101	M9F52101	M9F53101	M9F52201	M9F53201	M9F52301	M9F53301
2		M9F54102	M9F52102	M9F53102	M9F52202	M9F53202	M9F52302	M9F53302
4		M9F54104	M9F52104	M9F53104	M9F52204	M9F53204	M9F52304	M9F53304
6		M9F54106	M9F52106	M9F53106	M9F52206	M9F53206	M9F52306	M9F53306
8		M9F54108	M9F52108	M9F53108	M9F52208	M9F53208	M9F52308	M9F53308
10		M9F54110	M9F52110	M9F53110	M9F52210	M9F53210	M9F52310	M9F53310
15		M9F54115	M9F52115	M9F53115	M9F52215	M9F53215	M9F52315	M9F53315
20		M9F54120	M9F52120	M9F53120	M9F52220	M9F53220	M9F52320	M9F53320
25		M9F54125	M9F52125	M9F53125	M9F52225	M9F53225	M9F52325	M9F53325
30		M9F54130	M9F52130	M9F53130	M9F52230	M9F53230	M9F52330	M9F53330
35		M9F54135	M9F52135	M9F53135	M9F52235	M9F53235	M9F52335	M9F53335
40	240 V only	M9F54140	M9F52140	M9F53140	M9F52240	M9F53240	M9F52340	M9F53340
45		M9F54145	M9F52145	M9F53145	M9F52245	M9F53245	M9F52345	M9F53345
50		M9F54150	M9F52150	M9F53150	M9F52250	M9F53250	M9F52350	M9F53350
63		M9F54163	M9F52163	M9F53163	M9F52263	M9F53263	M9F52363	M9F53363

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

UL1077 / CSA C22.2 No 235 / IEC/EN 60947-2 / GB14048-2
Multi9 Miniature Circuit Breaker

Multi9 C60SP Miniature Circuit Breakers

C60SP circuit breakers are multi-standard miniature circuit beakers and supplementary protection as defined by UL1077. They combine the following functions:

- circuit protection against short-circuit curves
- circuit protection against overload currents
- tripping and fault indication by the addition of auxiliary accessories

Number of 18 mm (0.71 in.) Poles	Rating (A) 25°C/77°F	Breaking capacity (kA rms)							
		AIR UL 489 / CSA C22.2 No 235				Icu IEC 60947-2			
	Voltage (Ue)	277 Vac	240 ac	120 Vac	65 Vdc	440 Vac	415 Vac	240 Vac	60 Vdc
1P	0.5 to 32	10	14	14	10	—	3	10	20
	40 to 63	5	10	10	10	—	3	10	20
	Voltage (Ue)	480Y/277 Vac		240 Vac	125 Vdc	440 Vac	415 Vac	240 Vac	125 Vdc
2P	1 to 25	10		14	10	6	10	20	—
	32	10		14	—	6	10	20	—
3P/4P	2 to 32	10		14	—	6	10	20	—
2P/3P /4P	40 to 63	5		10	—	6	10	20	—



C60SP 1P



C60SP 2P



C60SP 3P



C60SP 4P

Table 7.37: C60SP Catalog Numbers

Tunnel Terminal Connection						
Rating (In)	Curve			Curve		
	B	C	D (= K)	B	C	D (= K)
	1P			2P		
0.5	M9F21170	M9F22170	M9F23170	—	—	—
1	M9F21101	M9F22101	M9F23101	M9F21201	M9F22201	M9F23201
2	M9F21102	M9F22102	M9F23102	M9F21202	M9F22202	M9F23202
3	M9F21103	M9F22103	M9F23103	M9F21203	M9F22203	M9F23203
4	M9F21104	M9F22104	M9F23104	M9F21204	M9F22204	M9F23204
5	M9F21105	M9F22105	M9F23105	M9F21205	M9F22205	M9F23205
6	M9F21106	M9F22106	M9F23106	M9F21206	M9F22206	M9F23206
8	M9F21108	M9F22108	M9F23108	M9F21208	M9F22208	M9F23208
10	M9F21110	M9F22110	M9F23110	M9F21210	M9F22210	M9F23210
13	M9F21113	M9F22113	M9F23113	M9F21213	M9F22213	M9F23213
16	M9F21116	M9F22116	M9F23116	M9F21216	M9F22216	M9F23216
20	M9F21120	M9F22120	M9F23120	M9F21220	M9F22220	M9F23220
25	M9F21125	M9F22125	M9F23125	M9F21225	M9F22225	M9F23225
32	M9F21132	M9F22132	M9F23132	M9F21232	M9F22232	M9F23232
40	M9F21140	M9F22140	M9F23140	M9F21240	M9F22240	M9F23240
45	M9F21145	M9F22145	M9F23145	M9F21245	M9F22245	M9F23245
50	M9F21150	M9F22150	M9F23150	M9F21250	M9F22250	M9F23250
63	M9F21163	M9F22163	M9F23163	M9F21263	M9F22263	M9F23263
	3P			4P		
0.5	—	—	—	—	—	—
1	—	—	—	—	—	—
2	M9F21302	M9F22302	M9F23302	M9F21402	M9F22402	M9F23402
3	—	—	—	—	—	—
4	—	—	—	—	—	—
5	—	—	—	—	—	—
6	M9F21306	M9F22306	M9F23306	M9F21406	M9F22406	M9F23406
8	M9F21308	M9F22308	M9F23308	M9F21408	M9F22408	M9F23408
10	M9F21310	M9F22310	M9F23310	M9F21410	M9F22410	M9F23410
13	M9F21313	M9F22313	M9F23313	M9F21413	M9F22413	M9F23413
16	M9F21316	M9F22316	M9F23316	M9F21416	M9F22416	M9F23416
20	M9F21320	M9F22320	M9F23320	M9F21420	M9F22420	M9F23420
25	M9F21325	M9F22325	M9F23325	M9F21425	M9F22425	M9F23425
32	M9F21332	M9F22332	M9F23332	M9F21432	M9F22432	M9F23432
40	M9F21340	M9F22340	M9F23340	M9F21440	M9F22440	M9F23440
45	M9F21345	M9F22345	M9F23345	M9F21445	M9F22445	M9F23445
50	M9F21350	M9F22350	M9F23350	M9F21450	M9F22450	M9F23450
63	M9F21363	M9F22363	M9F23363	M9F21463	M9F22463	M9F23463

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

UL1077, IEC/EN 60947-2, GB14048.2
Multi9 Miniature Circuit Breakers

Multi9 $C60_{H-DC}$ Miniature Circuit Breakers for DC Circuits

$C60_{H-DC}$ circuit breakers are multi–standard miniature circuit beakers and supplementary protection as defined by UL1077, dedicated to direct current applications. They combine the following functions:

- circuit protection against short-circuit curves
- circuit protection against overload currents
- tripping and fault indication by the addition of auxiliary accessories

Number of 18 mm (0.71 in.) Poles	Rating (A) 25°C/77°F	Breaking capacity (kA rms)				
		AIR UL 1077SA C22.2 No 5	Icu IEC 60947-2			
Voltage (Ue)		12–250 Vdc	110 Vdc	220 Vdc	250 Vdc	
1P	0.5 to 63	5	20	10	6	
Voltage (Ue)		12–250 Vdc		220 Vdc	440 Vdc	500 Vdc
2	0.5 to 63	5	—	20	10	6



$C60_{H-DC}$ 1P



$C60_{H-DC}$ 2P

Table 7.38: $C60_{H-DC}$ Catalog Numbers

Rating (In)	Curve			Curve		
	B	C	K (= D)	B	C	K (= D)
	1P			2P		
0.5	—	M9U21170	—	—	M9U21270	—
1	—	M9U21101	M9U31101	—	M9U31201	M9U31201
2	—	M9U21102	M9U31102	—	M9U21202	M9U31202
3	—	M9U21103	M9U31103	—	M9U21203	M9U31203
4	—	M9U21104	M9U31104	—	M9U21204	M9U31204
6	M9U11106	M9U21106	M9U31106	M9U11206	M9U21206	M9U31206
10	M9U11110	M9U21110	M9U31110	M9U11210	M9U21210	M9U31210
13	M9U11113	M9U21113	M9U31113	M9U11213	M9U21213	M9U31213
16	M9U11116	M9U21116	M9U31116	M9U11216	M9U21216	M9U31216
20	M9U11120	M9U21120	M9U31120	M9U11220	M9U21220	M9U31220
25	M9U11125	M9U21125	M9U31125	M9U11225	M9U21225	M9U31225
32	M9U11132	M9U21132	M9U31132	M9U11232	M9U21232	M9U31232
40	M9U11140	M9U21140	M9U31140	M9U11240	M9U21240	M9U31240
50	M9U11150	M9U21150	M9U31150	M9U11250	M9U21250	M9U31250
63	M9U11163	M9U21163	M9U31163	M9U11263	M9U21263	M9U31263

UL1053, IEC/EN 61008
Multi9 Ground Fault Protectors

Multi9 GFP Ground Fault Protectors

UL 1053 residual current circuit breakers already protected upstream by a short circuit and overload protection device are used for:

- control and disconnection of electric circuits
- protection of people against electric shock by direct and indirect contacts
- protection of installations against insulation faults
- enhanced continuity of supply, during a series of close lightning strokes, IT earthing system, equipment including interference suppression filters, variable speed controllers, frequency converters, electronic ballasts for lighting
- enhanced earth leakage protection: in presence of harmonics or high frequency ejections.

A-SI type GFPs are ideal for operation in environments with a humid atmosphere and/or polluted by aggressive agents: swimming pools, marinas, agri-food industries, water treatment stations, industrial sites, etc.





Multi9 GFP 2P



Multi9 GFP 4P

Table 7.39: GFP UL 1053 Type A-SI

A-S1 Type	Rating (A)	Sensitivity (mA)		Catalog No		Width in modules of 9 mm (0.354 in.)
		UL 1053	IEC/ EN 61008	120 or 240 V 230 or 240 V	240 V 480Y/277 V 230/400 or 240/415 V	
2P						
	25	26	30	M9R81225	M9R41225	4
		86	100	M9R12225	M9R44225	
		260	300	M9R84225	—	
	40	26	30	M9R81240	M9R41240	
		260	300	M9R84240	—	
	63	26	30	M9R81263	—	
4P						
	25	26	30	—	M9R81425	8
		86	100	—	M9R12425	
		260	300	—	M9R84425	
	40	26	30	—	M9R81440	
		260	300	—	M9R84440	
	63	26	30	—	M9R81463	
		86	100	—	M9R12463	
	100	86	100	—	M9R12491	
		260	300	—	M9R84491	

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

$C60_{BP}$ (UL489) Comb Busbars

These comb busbars are aimed to be used only with $C60_{BP}$ circuit-breakers.

They perform distribution and subdistribution of the electric power supply and allow rapid assembly and disassembly of equipment.

IEC

Table 7.40: $C60_{BP}$ Comb Busbars

Connection Accessories	Comb Busbars						Insulated Connectors	Tooth Covers	End-Piece
Function									
	• The comb busbars make it easier to install $C60_{BP}$ UL489 circuit breakers. • They must not be cut.						• Comb busbar power supply • Vertical incoming feeder	• Insulation of teeth remaining free	• Ensures the correct comb busbar insulation
Use									
	Power supply by insulated connector • Use with rigid and flexible copper cable • 6 to 35 mm^2 (AWG #10 to #2):						Tightening torque: 3.5 N•m (31 lb.in.)		
Standard Comb Busbars									
									
Number of poles	1P			2P		3P		All	All	—
Catalogue numbers	M9XUP106	M9XUP112		M9XUP206	M9XUP212	M9XUP306	M9XU-P312	M9XUPC04	M9XUTC15	—
Number of 18 mm modules	6	12		6	12	6	12	—	—	—
Set of	1			1		1		4	5 x 3	—
Cuttable Comb Busbars										
										
Number of poles x	1P	2P	3P	1P+Aux		3P+Aux		All	All	—
Catalogue numbers	M9XCP157	M9XCP256	M9XCP357	M9XCA137		M9XCA348		M9XCPC04	M9XCTC15	M9XCEC10
Number of 18 mm modules	57	56	57	37		48		—	—	—
Set of	1	1	1	1		1		4	5 x 3	—
Technical Specifications										
Acceptable current at 40°C (Ie)	Standard comb busbars: 115 A Cuttable comb busbars: 80 A									
Resistance to short-circuit currents	Compatible with the breaking capacity of Schneider Electric modular circuit breakers									
Voltage rating (Ue)	480Y/277 V									
Insulation voltage (Ui)	1000 V AC									
Pollution degree	3									
Fire resistance	Self-extinguishability 960°C 30 s/30 s									
Colour	RAL 7035									
Standards	UL508									

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



C60SP (UL1077) Comb Busbars

The comb busbars are used only for C60SP circuit breakers UL 1077 supplementary protection in conformity with standards:

- UL 1077 / CSA C22.2 No. 235 / IEC 60947-2 / GB 14048-2.

They perform distribution and subdistribution of the electric power supply and allow rapid assembly and disassembly of equipment.

Table 7.41: C60SP Comb Busbars

Connection Accessories	Comb Busbars			Tooth Cover End-Piece
				
Function				
	• The comb busbars make it easier to install Schneider Electric circuit breakers UL1077 supplementary protection. • Power supply directly in the cage of the circuit breaker.			• The Tooth Caps are insulated protectors which may be slipped onto the unused teeth of the comb busbar. • They come in strips with 1-pole spacing, but can be snapped apart to be used individually.
Number of poles	1P	2P	3P	All
Voltage rating (Ue)	480Y/277 Vac	480Y/277 Vac	480Y/277 Vac	—
Catalogue numbers	10285	10286	10287	60488
Number of 18 mm modules	12 (8.5 in./216 mm)	12 (8.5 in./216 mm)	12 (8.5 i./216 mm)	—
Set of	1	1	1	20
Technical Specifications				
Insulation voltage (Ui)	690 Vac			—
Impulse withstand voltage (Uimp)	12 kV under 240 V 5 kV under 480Y/277 V or 277 V			—
Acceptable current at 40°C (Ie)	63 A with 1 central power supply point	100 A with 2 power supply points		—
				—
	Power supply via cable directly in the cage of the device: • cross section max: 3 AWG (25 mm²) • cross section min: 10 AWG (5.27 mm²)			—


© 2026 Schneider Electric
All Rights Reserved
4/29/2026


Ring Tongue Terminal Kit


Spacer


C60 Padlock Attachment



Heavy-Duty Padlock Attachment


Rotary Handle


Front Mounting Kit for C60
1P, 2P, 3P, 4P
(1 per circuit breaker)


MGN26380 Locking Device Left Side Mount


MGN26380 Locking Device Right Side Mount


Multi-Pole Front Mounting Kit

Multi9 C60 Accessories

Electrical Accessories for C60 Circuit Breakers and Supplementary Protectors

Possible Combinations
Mounted to the left of the circuit breaker with a maximum width of 54 mm.

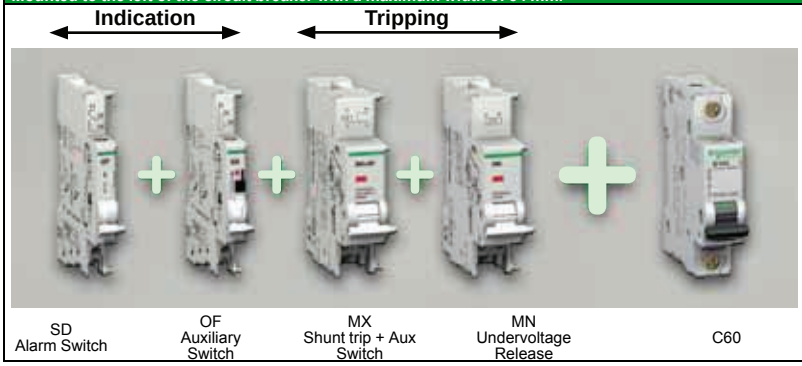


Table 7.42: Multi9 C60 Electrical Accessories

Descriptions	Control Voltage		Width in 9 mm Modules	C60 UL/IEC Cat. No.
	Vac	Vdc		
OF Auxiliary Switch (1a1b)	12–277	12–125	1	M9A26924
SD Alarm Switch (1a1b)	12–277	12–125	1	M9A26927
MX Shunt Trip + OF Auxiliary Switch (1a1b)	24	24	2	M9A26948
	48	48	2	M9A26947
	110–240–277	125	2	M9A26946
MN Undervoltage Release	24	24	2	M9A27108
	48	48	2	M9A26961
	120	—	2	M9A27107
	240	—	2	M9A26960
Multi9 GFP UL 1053 Listed Ground Fault Protectors	120 to 480Y/277 Vac; 30, 100, and 300 mA; 2P and 4Ps. See Multi 9 GFP Ground Fault Protectors, page 7-26 or Catalog LVCATM9OEM_EN			

Table 7.43: Multi9 C60 Mechanical Accessories

Descriptions		C60 Cat. No.
Ring tongue terminal kit for UL1077 C60	For one pole	M9A17400
Spacer for DIN rail, Not UL Recognized	9 mm wide	27062
Padlock Attachment (1 per for 1P, 2P, 3P or 4P)	2 per pack	26970
Heavy-duty Padlock Attachment for C60, Locks OFF only	2 per pack	M9PAF
Padlocking Device Left Side Mount, Locks OFF only *[1]*	1 per pack	MGN26380
Padlocking Device Right Side Mount, Locks OFF only *[2]*		MGN26381
Front Mounting Kit	1P	MG26983
	2P	MG26984
	3P	MG26985
	4P	MG26989
Terminal Screw Shield (Not UL Recognized)	Bag of two 4P shields	26981
Terminal cover (Not UL Recognized)	1P	26975
	2P	26976
	3P	26975 + 26976
	4P	26978
Rotary Handle for C60 (Non UL Recognized)		
Operating Subassembly	2P/3P/4P	27046
Door Interlock Handle		27047
Fixed Handle (Front or Lateral)		27048
Multi-pole Front Mounting Kit		
Rail Support (20 of 9 mm modules)		14211
Hinged Transparent Cover		14210

[1] Left-side mounted padlocking device cannot be used in conjunction with accessories SD, OF, MX or MN. Use right-side mounted padlocking device when accessories are required.
[2] Right-side mounted padlocking device cannot be used in conjunction with VIGI module. Use left-side mounted padlocking device when VIGI Module is required.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

The PowerPacT Advantage

- **Proven Performance:** Industry-leading circuit breaker innovation and protection for heavy-duty commercial and industrial applications.
- **Smart**: Integrated metering options provide a cost-effective solution to reduce energy consumption, optimize energy costs, and improve energy availability for your facilities.
- **Flexible:** Full range of thermal-magnetic and electronic trip molded case circuit breakers from 15 to 2500 A, delivering the ratings, configurations, and operators for your unique applications.
- **Simple:** Common catalog numbers, standardized ratings, and a full range of field-installable accessories make product selection, installation and maintenance easier than ever.
- **Common Design Features:** Mounting holes, door trim, and handle accessories

B-Frame 125 A	H-Frame 150 A	J-Frame 250 A	Q-Frame 250 A	L-Frame 600 A	M-Frame 800 A	P-Frame 1200 A	R-Frame 2500 A
	 Electronic Trip Version	 Electronic Trip Version					

Table 7.44: PowerPacT Interrupting Ratings

Voltage	Interrupting Rating						
	B	D	G	J	K	L	R
240 Vac	10 kA	25 kA	65 kA	100 kA	65 kA *[1]*	125 kA	200 kA
480 Vac	—	18 kA	35 kA	65 kA	65 kA *[2]*	100 kA	200 kA
600 Vac	—	14 kA	18 kA	25 kA	65 kA *[2]*	50 kA *[3]*	100 kA

[1] B-frame K interrupting rating is 100 kA at 240 Vac
[2] P-frame K interrupting is 50 kA at 480 and 600 Vac.
[3] P-frame L interrupting is 25 kA at 600 Vac.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.45: Common Catalog Numbering System

Frame	Rating	Termination	Poles	Voltage	Amperage*[4]*			Suffix Code		Suffix Code	
H	G	L	3	6	1	5	0	A	B	S	A

1=1Pole
2=2Pole
3=3Pole
4=4Pole

4=480 V
6=600 V

2A/2B Auxiliary Switch

110 Vac Shunt Trip

Frame Designation

B	125 A Frame
H	150 A Frame
J	250 A Frame
Q	250 A Frame
L	600 A Frame
M	800 A Frame
P	1200 A Frame
R	2500 A Frame

Interrupting Rating

	240 Vac	480 Vac	600Vac
B	10 kA	—	—
D	25 kA	18 kA	14 kA
G	65 kA	35 kA	18 kA
J	100 kA	65 kA	25 kA
K	100 kA	65 kA	65 kA
L	125 kA	100 kA	50 kA
R	200 kA	200 kA	100 kA

Terminations

A	I-Line
L	Lugs on Both Ends
F	Bus Bar (No Lugs)
M	Lugs Line Side Only
P	Lugs Load End Only
N	Plug-in
D	Drawout
S	Rear Connected Studs

For more information:

B-Frame Circuit Breakers, page 7-32
H- and J-Frame Circuit Breakers, page 7-34
Q-Frame Circuit Breakers, page 7-38
L-Frame Circuit Breakers, page 7-40
P-Frame Circuit Breakers , page 7-43
R-Frame Circuit Breakers, page 7-44
H, J, and L-Frame Motor Protectors, page 7-52
Motor Circuit Protectors and Motor Protector Circuit Breakers , page 7-52
Automatic Switches, page 7-48
500 Vdc Circuit Breakers, page 7-47
Mission Critical Circuit Breakers, page 7-46
Electrical Accessories for Circuit Breakers, page 7-55
Motor Operators, page 7-56 and Rotary Handles, page 7-57
Locks, Installation Accessories, and Rear Connectors, page 7-58
Mechanical Lugs, page 7-60
Compression Lugs, page 7-61 and Power Distribution Connectors, page 7-62
Terminal Nuts, Terminal Pads, Terminal Shields, and Accessories, page 7-63
Plug-In and Drawout Mountings, page 7-64
MicroLogic Electronic Trip Units, page 7-65
Trip Unit Accessories, page 7-68

[4] For amperage of M,-, P- or R-frame circuit breakers, add a zero to the three amperage digits; for example, 120 = 1200 A.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



B-Frame Circuit Breaker with Thermal-Magnetic Trip Unit

Scan this QR code to access the video of EverLink Lug Technology or go to https://www.youtube.com/watch?v=QrVXaTJHo5Y.

PowerPacT B-Frame Molded Case Circuit Breakers (125 A)

PowerPacT B-frame circuit breakers provides economical thermal-magnetic circuit protection in a compact size.

- Fixed 15-125 A thermal-magnetic protection up to 600Y/347 Vac and 250 Vdc
- 1- to 4-pole unit mount construction; 1- to 3-pole I-Line construction
- UL listed interrupting ratings from 18 kA to 65 kA at 480 Vac
- EverLink lugs, a cable connection method that helps maintain low resistance connections
- UL, CSA, NOM, IEC, CCC certified and UKCA and CE marked for global acceptance

Table 7.46: PowerPacT B-Frame 125 A Thermal-Magnetic Circuit Breakers (600Y/347 Vac) with EverLink Lugs

Current Rating @ 40° C	Interrupting Rating													
	D				G				J				K	
	1 Pole 347 Vac 125 Vdc	2 Pole 600Y/347 Vac 250 Vdc	3 Pole 600Y/347 Vac 250 Vdc	4 Pole 600Y/347 Vac 250 Vdc	1 Pole 347 Vac 125 Vdc	2 Pole 600Y/347 Vac 250 Vdc	3 Pole 600Y/347 Vac 250 Vdc	4 Pole 600Y/347 Vac 250 Vdc	1 Pole 347 Vac 125 Vdc	2 Pole 600Y/347 Vac 250 Vdc	3 Pole 600Y/347 Vac 250 Vdc	4 Pole 600Y/347 Vac 250 Vdc	1 Pole 347 Vac	2 Pole 600Y/347 Vac
15 A	BDL16015	BDL26015	BDL36015	BDL46015	BGL16015	BGL26015	BGL36015	BGL46015	BJL16015	BJL26015	BJL36015	BJL46015	BKL16015	BKL26015
20 A	BDL16020	BDL26020	BDL36020	BDL46020	BGL16020	BGL26020	BGL36020	BGL46020	BJL16020	BJL26020	BJL36020	BJL46020	BKL16020	BKL26020
25 A	BDL16025	BDL26025	BDL36025	BDL46025	BGL16025	BGL26025	BGL36025	BGL46025	BJL16025	BJL26025	BJL36025	BJL46025	BKL16025	BKL26025
30 A	BDL16030	BDL26030	BDL36030	BDL46030	BGL16030	BGL26030	BGL36030	BGL46030	BJL16030	BJL26030	BJL36030	BJL46030	BKL16030	BKL26030
35 A	BDL16035	BDL26035	BDL36035	BDL46035	BGL16035	BGL26035	BGL36035	BGL46035	BJL16035	BJL26035	BJL36035	BJL46035	—	—
40 A	BDL16040	BDL26040	BDL36040	BDL46040	BGL16040	BGL26040	BGL36040	BGL46040	BJL16040	BJL26040	BJL36040	BJL46040	—	—
45 A	BDL16045	BDL26045	BDL36045	BDL46045	BGL16045	BGL26045	BGL36045	BGL46045	BJL16045	BJL26045	BJL36045	BJL46045	—	—
50 A	BDL16050	BDL26050	BDL36050	BDL46050	BGL16050	BGL26050	BGL36050	BGL46050	BJL16050	BJL26050	BJL36050	BJL46050	—	—
60 A	BDL16060	BDL26060	BDL36060	BDL46060	BGL16060	BGL26060	BGL36060	BGL46060	BJL16060	BJL26060	BJL36060	BJL46060	—	—
70 A	BDL16070	BDL26070	BDL36070	BDL46070	BGL16070	BGL26070	BGL36070	BGL46070	BJL16070	BJL26070	BJL36070	BJL46070	—	—
80 A	BDL16080	BDL26080	BDL36080	BDL46080	BGL16080	BGL26080	BGL36080	BGL46080	BJL16080	BJL26080	BJL36080	BJL46080	—	—
90 A	BDL16090	BDL26090	BDL36090	BDL46090	BGL16090	BGL26090	BGL36090	BGL46090	BJL16090	BJL26090	BJL36090	BJL46090	—	—
100 A	BDL16100	BDL26100	BDL36100	BDL46100	BGL16100	BGL26100	BGL36100	BGL46100	BJL16100	BJL26100	BJL36100	BJL46100	—	—
110 A	BDL16110	BDL26110	BDL36110	BDL46110	BGL16110	BGL26110	BGL36110	BGL46110	BJL16110	BJL26110	BJL36110	BJL46110	—	—
125 A	BDL16125	BDL26125	BDL36125	BDL46125	BGL16125	BGL26125	BGL36125	BGL46125	BJL16125	BJL26125	BJL36125	BJL46125	—	—

Table 7.47: B-Frame Interrupting Ratings (kA)

Voltage	BD				BG				BJ				BK	
	1P	2P	3P	4P	1P	2P	3P	4P	1P	2P	3P	4P	1P	2P
	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A-125 A	15 A- 30 A	15 A- 30 A
240 Vac	25	25	25	25	65	65	65	65	100	100	100	100	100	100
480Y/277 Vac *[5]*		18				35								
277 Vac	18				35				65				65	
480 Vac		18	18	18		35	35	35		65	65	65		65
600Y/347 Vac		14	14	14		18	18	18		25	25	25		65
347 Vac	14				18				25				65	
240 1Ø - 3Ø		18				35				65				65
125 Vdc	10				20				50					
250 Vdc		10	10	10		20	20	20		50	50	50		

[5] Only available with 480 V rated I-line catalogs.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.48: B-Frame Termination Options

Termination Letter and Description		Example
A	I-Line (See Digest Section 9, Panelboards)	B D **L** 3 6 1 0 0 For factory-installed termination, place termination letter in the **third** block of the circuit breaker catalog number. In this example "L" indicates EverLink Lugs for both ON and OFF ends.
F	No Lugs (includes terminal nut kit on both ends)	
L	ON end: EverLink Lugs OFF end: EverLink Lugs	
M	ON end: EverLink Lugs OFF end: Terminal Nut Kit	
P	ON end: Terminal Nut Kit OFF end: EverLink Lugs	

Table 7.49: B-Frame Lug Options

Lug Option Suffix	Example
No Suffix = EverLink Lugs both ends	B D **L** 3 6 1 0 0 **LU** For factory-installed lug option, place suffix after the amperage in the circuit breaker catalog number.
LU = EverLink Lug with Control Wire Terminal ON end; EverLink Lug OFF end	
LV = EverLink Lug ON end; EverLink Lug with Control Wire Terminal OFF end	
LW = EverLink Lug with Control Wire Terminal both ends	
LC = Copper Mechanical Lugs both ends	
LH = Aluminum Mechanical Lugs both ends	

Table 7.50: PowerPacT B-Frame 125 A Magnetic Trip Values

Current Rating @ 40° C	Fixed AC Magnetic Trip	
	Hold	Trip
15 A	400 A	600 A
20 A	400 A	600 A
25 A	480 A	720 A
30 A	480 A	720 A
35 A	480 A	720 A
40 A	480 A	720 A
45 A	480 A	720 A
50 A	480 A	720 A
60 A	640 A	960 A
70 A	800 A	1200 A
80 A	800 A	1200 A
90 A	1000 A	1500 A
100 A	1000 A	1500 A
110 A	1000 A	1500 A
125 A	1000 A	1500 A

Accessories see page 7-55
Optional Lugs see page 7-60
Dimensions see page 7-86

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



J-Frame Circuit Breaker with MicroLogic™ Trip Unit



J-Frame 3–Pole Circuit Breaker with Thermal-Magnetic Trip Unit

Table 7.51: Lug Kit Wire Ranges

Sensor Rating	Standard Lug Kit	Terminal Wire Range
60–150 A	AL150HD	14–3/0 AWG Al or Cu
250 A	AL250JD.	3/0 AWG–350 kcmil Al or Cu

PowerPacT H- and J-Frame Molded-Case Circuit Breakers (150 A and 250 A)

A flexible, high performance offer certified to global standards.

- Thermal magnetic or MicroLogic™ trip protection from 15–250 A up to 600 Vac and 250 Vdc
- 2 and 3-pole unit mount and I-Line constructions*[6]*
- High performance UL listed interrupting ratings from 18 to 200 kA at 480 Vac
- H- and J-Frame have common mounting holes, handle locations and trim dimensions with many shared accessories and auxiliaries.
- UL, CSA, NOM, IEC, CCC certified, and UKCA and CE marked for global acceptance.

Table 7.52: H- and J-Frame Interrupting Ratings

Voltage	Interrupting Rating				
	D	G	J	L	R
240 Vac	25 kA	65 kA	100 kA	125 kA	200 kA
480 Vac	18 kA	35 kA	65 kA	100 kA	200 kA
600 Vac	14 kA	18 kA	25 kA	50 kA	100 kA
250 Vdc*[7]*	20 kA	20 kA	20 kA	20 kA	—

Table 7.53: H- and J-Frame Termination Options

Termination Letter	
A - I-Line (See Section 9—Panelboards)	H D **L** 3 6 0 1 5 For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.
F = No Lugs (includes terminal nut kit on both ends)	
L = Lugs both ends	
M = Lugs ON end Terminal Nut Kit OFF end	
P = Lugs OFF end Terminal Nut Kit ON end	
N = Plug-in	
D = Drawout	
S = Rear Connected	

Accessories see page 7-55
Optional Lugs see page 7-60
Dimensions see page 7-86
Enclosures see page 7-87

[6] H- and J- frame circuit breakers can be used as a main or sub-feed circuit breaker in an NQ or NF panelboard.
[7] Not available with electronic trip units.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT H-Frame Thermal-Magnetic Circuit Breakers

Schneider Electric's PowerPacT™ H-Frame thermal-magnetic circuit breakers provide robust protection for commercial and industrial applications, supporting voltages up to 600 Vac and 250 Vdc. They are available in amperage range from 15 A to 150 A, in both 2-pole and 3-pole versions. These circuit breakers help protect your equipment by automatically shutting off power when they detect overloads or short circuits. They offer high performance and a wide range of interchangeable trip units to protect most applications. See the table below for more ratings details.

Table 7.54: PowerPacT H-Frame 150 A Thermal-Magnetic UL Current-Limiting *[8]* Circuit Breakers (600 Vac, 250 Vdc) *[9]* With Factory Sealed Trip Unit Suitable for Reverse Connection *[10]*

Current Rating @ 40° C	Fixed AC Magnetic Trip		Interrupting Rating							
			D		G		J *[9]*		L *[9]*	
	Hold	Trip	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated
H-Frame, 150A 2P, 600 Vac 50/60 Hz, 250 Vdc *[11]*										
15 A	350 A	750 A	HDL26015	HDL26015C	HGL26015	HGL26015C	HJL26015	HJL26015C	HLL26015	HLL26015C
20 A	350 A	750 A	HDL26020	HDL26020C	HGL26020	HGL26020C	HJL26020	HJL26020C	HLL26020	HLL26020C
25 A	350 A	750 A	HDL26025	HDL26025C	HGL26025	HGL26025C	HJL26025	HJL26025C	HLL26025	HLL26025C
30 A	350 A	750 A	HDL26030	HDL26030C	HGL26030	HGL26030C	HJL26030	HJL26030C	HLL26030	HLL26030C
35 A	400 A	850 A	HDL26035	HDL26035C	HGL26035	HGL26035C	HJL26035	HJL26035C	HLL26035	HLL26035C
40 A	400 A	850 A	HDL26040	HDL26040C	HGL26040	HGL26040C	HJL26040	HJL26040C	HLL26040	HLL26040C
45 A	400 A	850 A	HDL26045	HDL26045C	HGL26045	HGL26045C	HJL26045	HJL26045C	HLL26045	HLL26045C
50 A	400 A	850 A	HDL26050	HDL26050C	HGL26050	HGL26050C	HJL26050	HJL26050C	HLL26050	HLL26050C
60 A	800 A	1450 A	HDL26060	HDL26060C	HGL26060	HGL26060C	HJL26060	HJL26060C	HLL26060	HLL26060C
70 A	800 A	1450 A	HDL26070	HDL26070C	HGL26070	HGL26070C	HJL26070	HJL26070C	HLL26070	HLL26070C
80 A	800 A	1450 A	HDL26080	HDL26080C	HGL26080	HGL26080C	HJL26080	HJL26080C	HLL26080	HLL26080C
90 A	800 A	1450 A	HDL26090	HDL26090C	HGL26090	HGL26090C	HJL26090	HJL26090C	HLL26090	HLL26090C
100 A	800 A	1700 A	HDL26100	HDL26100C	HGL26100	HGL26100C	HJL26100	HJL26100C	HLL26100	HLL26100C
110 A	900 A	1700 A	HDL26110	HDL26110C	HGL26110	HGL26110C	HJL26110	HJL26110C	HLL26110	HLL26110C
125 A	900 A	1700 A	HDL26125	HDL26125C	HGL26125	HGL26125C	HJL26125	HJL26125C	HLL26125	HLL26125C
150 A	900 A	1700 A	HDL26150	HDL26150C	HGL26150	HGL26150C	HJL26150	HJL26150C	HLL26150	HLL26150C
H-Frame 150A 3P, 600 Vac 50/60 Hz, 250 Vdc										
15 A	350 A	750 A	HDL36015	HDL36015C	HGL36015	HGL36015C	HJL36015	HJL36015C	HLL36015	HLL36015C
20 A	350 A	750 A	HDL36020	HDL36020C	HGL36020	HGL36020C	HJL36020	HJL36020C	HLL36020	HLL36020C
25 A	350 A	750 A	HDL36025	HDL36025C	HGL36025	HGL36025C	HJL36025	HJL36025C	HLL36025	HLL36025C
30 A	350 A	750 A	HDL36030	HDL36030C	HGL36030	HGL36030C	HJL36030	HJL36030C	HLL36030	HLL36030C
35 A	400 A	850 A	HDL36035	HDL36035C	HGL36035	HGL36035C	HJL36035	HJL36035C	HLL36035	HLL36035C
40 A	400 A	850 A	HDL36040	HDL36040C	HGL36040	HGL36040C	HJL36040	HJL36040C	HLL36040	HLL36040C
45 A	400 A	850 A	HDL36045	HDL36045C	HGL36045	HGL36045C	HJL36045	HJL36045C	HLL36045	HLL36045C
50 A	400 A	850 A	HDL36050	HDL36050C	HGL36050	HGL36050C	HJL36050	HJL36050C	HLL36050	HLL36050C
60 A	800 A	1450 A	HDL36060	HDL36060C	HGL36060	HGL36060C	HJL36060	HJL36060C	HLL36060	HLL36060C
70 A	800 A	1450 A	HDL36070	HDL36070C	HGL36070	HGL36070C	HJL36070	HJL36070C	HLL36070	HLL36070C
80 A	800 A	1450 A	HDL36080	HDL36080C	HGL36080	HGL36080C	HJL36080	HJL36080C	HLL36080	HLL36080C
90 A	800 A	1450 A	HDL36090	HDL36090C	HGL36090	HGL36090C	HJL36090	HJL36090C	HLL36090	HLL36090C
100 A	800 A	1700 A	HDL36100	HDL36100C	HGL36100	HGL36100C	HJL36100	HJL36100C	HLL36100	HLL36100C
110 A	900 A	1700 A	HDL36110	HDL36110C	HGL36110	HGL36110C	HJL36110	HJL36110C	HLL36110	HLL36110C
125 A	900 A	1700 A	HDL36125	HDL36125C	HGL36125	HGL36125C	HJL36125	HJL36125C	HLL36125	HLL36125C
150 A	900 A	1700 A	HDL36150	HDL36150C	HGL36150	HGL36150C	HJL36150	HJL36150C	HLL36150	HLL36150C

HJ and HL are UL certified as current limiting circuit breakers.

PowerPacT J-Frame Thermal-Magnetic Circuit Breakers

The PowerPacT™ J-Frame thermal-magnetic circuit breakers are designed to provide protection for commercial, industrial, and infrastructure applications. These breakers automatically shuts off power when dangerous overloads or short-circuit conditions occur, keeping your equipment and facility safe. They offer high performance and a wide range of interchangeable trip units to protect most applications. The trip units provide highly accurate protection with wide setting ranges.

Table 7.55: J-Frame 250 A Thermal-Magnetic UL Current-Limiting *[12]*Circuit Breakers (600 Vac, 250 Vdc) With Factory Sealed Trip Unit Suitable for Reverse Connection *[10]*

Current Rating @ 40°C	Adjustable AC Magnetic Trip		Interrupting Rating									
			D		G		J *[12]*		L *[12]*		R *[12]*	
	Low	High	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated	Standard (80% Rated)	100% Rated
J-Frame 250 A 2P, 600 Vac 50/60 Hz, 250 Vdc *[13]*												
150 A	750 A	1500 A	JDL26150	JDL26150C	JGL26150	JGL26150C	JJL26150	JJL26150C	JLL26150	JLL26150C	—	—
175 A	875 A	1750 A	JDL26175	JDL26175C	JGL26175	JGL26175C	JJL26175	JJL26175C	JLL26175	JLL26175C	—	—
200 A	1000 A	2000 A	JDL26200	JDL26200C	JGL26200	JGL26200C	JJL26200	JJL26200C	JLL26200	JLL26200C	—	—
225 A	1125 A	2250 A	JDL26225	JDL26225C	JGL26225	JGL26225C	JJL26225	JJL26225C	JLL26225	JLL26225C	—	—
250 A	1250 A	2500 A	JDL26250	JDL26250C	JGL26250	JGL26250C	JJL26250	JJL26250C	JLL26250	JLL26250C	—	—
J-Frame 250 A 3P, 600 Vac 50/60 Hz, 250 Vdc												
150 A	750 A	1500 A	JDL36150	JDL36150C	JGL36150	JGL36150C	JJL36150	JJL36150C	JLL36150	JLL36150C	JRL36150	JRL36150C
175 A	875 A	1750 A	JDL36175	JDL36175C	JGL36175	JGL36175C	JJL36175	JJL36175C	JLL36175	JLL36175C	JRL36175	JRL36175C
200 A	1000 A	2000 A	JDL36200	JDL36200C	JGL36200	JGL36200C	JJL36200	JJL36200C	JLL36200	JLL36200C	JRL36200	JRL36200C
225 A	1125 A	2250 A	JDL36225	JDL36225C	JGL36225	JGL36225C	JJL36225	JJL36225C	JLL36225	JLL36225C	JRL36225	JRL36225C
250 A	1250 A	2500 A	JDL36250	JDL36250C	JGL36250	JGL36250C	JJL36250	JJL36250C	JLL36250	JLL36250C	JRL36250	JRL36250C

JJ, JL and JR are UL certified as current limiting circuit breakers.

[8] Circuit breakers with J and L interrupting ratings are UL certified as current limiting.
[9] Standard lug kit: AL150HD. Terminal wire range: 14–3/0 AWG Al or Cu.
[10] See Supplemental Digest Section 3 for circuit breakers with field interchangeable trip units.
[11] HD and HG circuit breakers are true two-pole construction.
[12] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[13] 2P in a 3P module

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT H- and J-Frame Electronic Trip Current Limiting Circuit Breakers (150 A and 250 A)


PowerPacT™ H-and J-Frame electronic trip current-limiting circuit breakers delivers reliable protection, high performance, and advanced monitoring for electrical distribution systems. These breakers use MicroLogic™ electronic trip units to provide precise control, energy metering, and enhanced system safety. With certified current limiting performance, these breakers help safeguard equipment by dramatically reducing fault energy, keeping operations running smoothly and reliably.



H-Frame Circuit Breaker
with MicroLogic™ Trip Unit



J-Frame Circuit Breaker
with MicroLogic Trip Unit

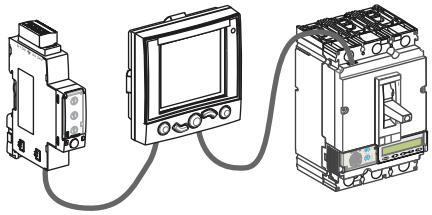

H-Frame Circuit Breaker
Optional FDM and IFM Module

Table 7.56: H-Frame 150 A and J-Frame 250 A Electronic Trip UL Current-Limiting *[14]* Standard (80% Rated) Circuit Breakers (600 Vac) With Factory Sealed Trip Unit *[15]* Suitable for Reverse Connection *[16]*

Electronic Trip Unit			Sensor Rating	Interrupting Rating (80% Rated)				
Type	Function	Trip Unit		D	G	J *[14]*	L *[14]*	R *[14]*
600 Vac, 50/60 Hz, 3P								
MicroLogic Standard	LI	3.2 *[17]*	60 A	HDL36060U31X	HGL36060U31X	HJL36060U31X	HLL36060U31X	HRL36060U31X
			100 A	HDL36100U31X	HGL36100U31X	HJL36100U31X	HLL36100U31X	HRL36100U31X
			150 A	HDL36150U31X	HGL36150U31X	HJL36150U31X	HLL36150U31X	HRL36150U31X
			250 A	JDL36250U31X	JGL36250U31X	JJL36250U31X	JLL36250U31X	JRL36250U31X
MicroLogic Standard	LSI	3.2S *[17]* *[18]*	60 A	HDL36060U33X	HGL36060U33X	HJL36060U33X	HLL36060U33X	HRL36060U33X
			100 A	HDL36100U33X	HGL36100U33X	HJL36100U33X	HLL36100U33X	HRL36100U33X
			150 A	HDL36150U33X	HGL36150U33X	HJL36150U33X	HLL36150U33X	HRL36150U33X
			250 A	JDL36250U33X	JGL36250U33X	JJL36250U33X	JLL36250U33X	JRL36250U33X
MicroLogic Ammeter	LSI	5.2A	60 A	HDL36060U43X	HGL36060U43X	HJL36060U43X	HLL36060U43X	HRL36060U43X
			100 A	HDL36100U43X	HGL36100U43X	HJL36100U43X	HLL36100U43X	HRL36100U43X
			150 A	HDL36150U43X	HGL36150U43X	HJL36150U43X	HLL36150U43X	HRL36150U43X
			250 A	JDL36250U43X	JGL36250U43X	JJL36250U43X	JLL36250U43X	JRL36250U43X
MicroLogic Energy	LSI	5.2E	60 A	HDL36060U53X	HGL36060U53X	HJL36060U53X	HLL36060U53X	HRL36060U53X
			100 A	HDL36100U53X	HGL36100U53X	HJL36100U53X	HLL36100U53X	HRL36100U53X
			150 A	HDL36150U53X	HGL36150U53X	HJL36150U53X	HLL36150U53X	HRL36150U53X
			250 A	JDL36250U53X	JGL36250U53X	JJL36250U53X	JLL36250U53X	JRL36250U53X
MicroLogic Ammeter	LSIG	6.2A *[19]*	60 A	HDL36060U44X	HGL36060U44X	HJL36060U44X	HLL36060U44X	HRL36060U44X
			100 A	HDL36100U44X	HGL36100U44X	HJL36100U44X	HLL36100U44X	HRL36100U44X
			150 A	HDL36150U44X	HGL36150U44X	HJL36150U44X	HLL36150U44X	HRL36150U44X
			250 A	JDL36250U44X	JGL36250U44X	JJL36250U44X	JLL36250U44X	JRL36250U44X
MicroLogic Energy	LSIG	6.2E	60 A	HDL36060U54X	HGL36060U54X	HJL36060U54X	HLL36060U54X	HRL36060U54X
			100 A	HDL36100U54X	HGL36100U54X	HJL36100U54X	HLL36100U54X	HRL36100U54X
			150 A	HDL36150U54X	HGL36150U54X	HJL36150U54X	HLL36150U54X	HRL36150U54X
			250 A	JDL36250U54X	JGL36250U54X	JJL36250U54X	JLL36250U54X	JRL36250U54X

[14] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[15] See Supplemental Digest Section 3 for circuit breakers with field interchangeable trip units.
[16] For applications requiring communications see page 7-68.
[17] 3P circuit breakers with this trip unit can be used for 2P applications.
[18] Fixed ST and LT delays.
[19] 3P circuit breakers with this trip unit can be used for 2P applications requiring ground fault protection. Additional metering capabilities will not work properly on the unconnected phase.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.57: H-Frame 150 A and J-Frame 250 A Electronic Trip UL Current-Limiting *[20]* 100% Rated Circuit Breakers (600 Vac) With Factory Sealed Trip Unit *[21]* Suitable for Reverse Connection *[22]*

Electronic Trip Unit			Sensor Rating	Interrupting Rating (100% Rated)				
Type	Function	Trip Unit		D	G	J *[20]*	L *[20]*	R *[20]*
600 Vac, 50/60 Hz, 3P*[23]*								
MicroLogic Standard	LI	3.2 *[24]*	60 A	HDL36060CU31X	HGL36060CU31X	HJL36060CU31X	HLL36060CU31X	HRL36060CU31X
			100 A	HDL36100CU31X	HGL36100CU31X	HJL36100CU31X	HLL36100CU31X	HRL36100CU31X
			150 A	HDL36150CU31X	HGL36150CU31X	HJL36150CU31X	HLL36150CU31X	HRL36150CU31X
			250 A	JDL36250CU31X	JGL36250CU31X	JJL36250CU31X	JLL36250CU31X	JRL36250CU31X
MicroLogic Standard	LSI	3.2S *[24]* *[25]*	60 A	HDL36060CU33X	HGL36060CU33X	HJL36060CU33X	HLL36060CU33X	HRL36060CU33X
			100 A	HDL36100CU33X	HGL36100CU33X	HJL36100CU33X	HLL36100CU33X	HRL36100CU33X
			150 A	HDL36150CU33X	HGL36150CU33X	HJL36150CU33X	HLL36150CU33X	HRL36150CU33X
			250 A	JDL36250CU33X	JGL36250CU33X	JJL36250CU33X	JLL36250CU33X	JRL36250CU33X
MicroLogic Ammeter	LSI	5.2A	60 A	HDL36060CU43X	HGL36060CU43X	HJL36060CU43X	HLL36060CU43X	HRL36060CU43X
			100 A	HDL36100CU43X	HGL36100CU43X	HJL36100CU43X	HLL36100CU43X	HRL36100CU43X
			150 A	HDL36150CU43X	HGL36150CU43X	HJL36150CU43X	HLL36150CU43X	HRL36150CU43X
			250 A	JDL36250CU43X	JGL36250CU43X	JJL36250CU43X	JLL36250CU43X	JRL36250CU43X
MicroLogic Energy	LSI	5.2E	60 A	HDL36060CU53X	HGL36060CU53X	HJL36060CU53X	HLL36060CU53X	HRL36060CU53X
			100 A	HDL36100CU53X	HGL36100CU53X	HJL36100CU53X	HLL36100CU53X	HRL36100CU53X
			150 A	HDL36150CU53X	HGL36150CU53X	HJL36150CU53X	HLL36150CU53X	HRL36150CU53X
			250 A	JDL36250CU53X	JGL36250CU53X	JJL36250CU53X	JLL36250CU53X	JRL36250CU53X
MicroLogic Ammeter	LSIG	6.2A *[26]*	60 A	HDL36060CU44X	HGL36060CU44X	HJL36060CU44X	HLL36060CU44X	HRL36060CU44X
			100 A	HDL36100CU44X	HGL36100CU44X	HJL36100CU44X	HLL36100CU44X	HRL36100CU44X
			150 A	HDL36150CU44X	HGL36150CU44X	HJL36150CU44X	HLL36150CU44X	HRL36150CU44X
			250 A	JDL36250CU44X	JGL36250CU44X	JJL36250CU44X	JLL36250CU44X	JRL36250CU44X
MicroLogic Energy	LSIG	6.2E	60 A	HDL36060CU54X	HGL36060CU54X	HJL36060CU54X	HLL36060CU54X	HRL36060CU54X
			100 A	HDL36100CU54X	HGL36100CU54X	HJL36100CU54X	HLL36100CU54X	HRL36100CU54X
			150 A	HDL36150CU54X	HGL36150CU54X	HJL36150CU54X	HLL36150CU54X	HRL36150CU54X
			250 A	JDL36250CU54X	JGL36250CU54X	JJL36250CU54X	JLL36250CU54X	JRL36250CU54X

Accessories see page 7-55
Optional Lugs see page 7-60
Dimensions see page 7-86
Enclosures see page 7-87

[20] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[21] See Supplemental Digest Section 3 for circuit breakers with field interchangeable trip units.
[22] For applications requiring communications see page 7-68.
[23] 3-pole PowerPacT H- and J-frame circuit breakers can be used for 2-pole applications. (For such instances, MicroLogic 6.2 Ammeter and Energy trip units can be used for ground fault protection. Additional metering capabilities are not guaranteed when using MicroLogic Ammeter and Energy trip units for this type of application.
[24] 3P circuit breakers with this trip unit can be used for 2P applications.
[25] Fixed ST and LT delays.
[26] 3P circuit breakers with this trip unit can be used for 2P applications requiring ground fault protection. Additional metering capabilities will not work properly on the unconnected phase.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



2–Pole Q-Frame Circuit Breaker with Thermal-Magnetic Trip Unit 70–250



3–Pole Q-Frame Circuit Breaker with Thermal-Magnetic Trip Unit 70–250 A

Q-Frame Molded Case Circuit Breakers (250 A)

PowerPacT Q-frame circuit breakers are used for overcurrent protection and switching on 240 Vac applications.*[27]*

- Fixed thermal magnetic protection from 70–250 A at 240 Vac
- 2- and 3-pole unit mount and I-Line constructions*[28]*
- UL listed interruption ratings from 10 kA to 100 kA at 240 Vac
- Available in standard (80%) rating only
- cULus and NOM certified

Table 7.58: PowerPacT Q-Frame 250 A Thermal-Magnetic Circuit Breaker (240 Vac)

Ampere Rating	Fixed AC Magnetic Trip		Interrupting Rating				Terminal Wire Range
	Hold	Trip	B	D	G	J	
2P, 240 Vac							
70 A	1000 A	1800 A	QBL22070	QDL22070	QGL22070	QJL22070	#4 AWG - 300 kcmil Al/Cu
80 A	1000 A	1800 A	QBL22080	QDL22080	QGL22080	QJL22080	
90 A	1000 A	1800 A	QBL22090	QDL22090	QGL22090	QJL22090	
100 A	1200 A	2400 A	QBL22100	QDL22100	QGL22100	QJL22100	
110 A	1200 A	2400 A	QBL22110	QDL22110	QGL22110	QJL22110	
125 A	1200 A	2400 A	QBL22125	QDL22125	QGL22125	QJL22125	
150 A	1200 A	2400 A	QBL22150	QDL22150	QGL22150	QJL22150	
175 A	1200 A	2400 A	QBL22175	QDL22175	QGL22175	QJL22175	
200 A	1200 A	2400 A	QBL22200	QDL22200	QGL22200	QJL22200	
225 A	1200 A	2400 A	QBL22225	QDL22225	QGL22225	QJL22225	
250 A *[29]*	1200 A	2400 A	QBL22250	QDL22250	QGL22250	QJL22250	
3P, 240 Vac							
70 A	1000 A	1800 A	QBL32070	QDL32070	QGL32070	QJL32070	#4 AWG - 300 kcmil Al/Cu
80 A	1000 A	1800 A	QBL32080	QDL32080	QGL32080	QJL32080	
90 A	1000 A	1800 A	QBL32090	QDL32090	QGL32090	QJL32090	
100 A	1200 A	2400 A	QBL32100	QDL32100	QGL32100	QJL32100	
110 A	1200 A	2400 A	QBL32110	QDL32110	QGL32110	QJL32110	
125 A	1200 A	2400 A	QBL32125	QDL32125	QGL32125	QJL32125	
150 A	1200 A	2400 A	QBL32150	QDL32150	QGL32150	QJL32150	
175 A	1200 A	2400 A	QBL32175	QDL32175	QGL32175	QJL32175	
200 A	1200 A	2400 A	QBL32200	QDL32200	QGL32200	QJL32200	
225 A	1200 A	2400 A	QBL32225	QDL32225	QGL32225	QJL32225	
250 A *[30]*	1200 A	2400 A	QBL32250	QDL32250	QGL32250	QJL32250	

Table 7.59: Q-Frame Interrupting Ratings

Voltage	Interrupting Rating			
	B	D	G	J
240 Vac	10 kA	25 kA	65 kA	100 kA *[31]*

Table 7.60: Q-Frame Termination Options

Termination Letter	
A = I-Line (See Section 9—Panelboards)	Q G **L** 3 2 2 0 0 For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.
E = Bolt-on I-Line (See Section 9)	
F = No lugs	
L = Lugs both ends	
M = Lugs ON end, studs on OFF end	
P = Lugs OFF end, studs on ON end	

Dimension see page 7-86

Enclosures see page 7-87

[27] Replacement lugs and electrical accessories are not available for PowerPacT Q-frame circuit breakers.
[28] Q- frame can be used as main or sub-feed circuit breaker in a NQ panelboard.
[29] 250 A lugs are suitable for copper conductors only.
[30] 250 A circuit breakers are suitable for copper conductors only.
[31] 3P QJ circuit breakers are rated at 208Y/120 Vac only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Class **0734** / Refer to Catalog: **0734CT0201**



LA/LHL-Frame Circuit Breaker
2–Pole and 3–Pole 125–400 A

LA/LH-Frame Molded Case Circuit Breaker (600 A)

- Thermal magnetic protection from 125-400 A up to 600 Vac and 250 Vdc
- 2- and 3-pole unit mount and I-Line constructions
- UL listed interrupting ratings from 30 kA to 35 kA at 480 Vac
- UL and CSA certified

NOTE: Consider using PowerPacT™ circuit breakers for situations requiring circuit breaker accessories. See PowerPact Accessories, page 7-55 for more information.

Table 7.61: LA/LH-Frame, 600 A, Thermal-Magnetic, Individually-Mounted Circuit Breakers, 600 Vac

Ampere Rating	Adjustable AC Magnetic Trip		Cat. No.		Terminal Wire Range
	Low	High	Standard Interrupting	High Interrupting	
2P, 600 Vac, 250 Vdc					
125 A	625 A	1250 A	LAL26125	LHL26125	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
150 A	750 A	1500 A	LAL26150	LHL26150	
175 A	875 A	1750 A	LAL26175	LHL26175	
200 A	1000 A	2000 A	LAL26200	LHL26200	
225 A	1125 A	2250 A	LAL26225	LHL26225	
250 A	1250 A	2500 A	LAL26250	LHL26250	
300 A	1500 A	3000 A	LAL26300	LHL26300	
350 A	1750 A	3500 A	LAL26350	LHL26350	
400 A	2000 A	4000 A	LAL26400	LHL26400	
3P, 600 Vac, 250 Vdc					
125 A	625 A	1250 A	LAL36125	LHL36125	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
150 A	750 A	1500 A	LAL36150	LHL36150	
175 A	875 A	1750 A	LAL36175	LHL36175	
200 A	1000 A	2000 A	LAL36200	LHL36200	
225 A	1125 A	2250 A	LAL36225	LHL36225	
250 A	1250 A	2500 A	LAL36250	LHL36250	
300 A	1500 A	3000 A	LAL36300	LHL36300	
350 A	1750 A	3500 A	LAL36350	LHL36350	
400 A	2000 A	4000 A	LAL36400	LHL36400	

Table 7.62: Interrupting Ratings

Voltage	LAL	LHL
240 Vac	42 kA	65 kA
480 Vac	30 kA	35 kA
600 Vac	22 kA	25 kA

Accessories see PowerPact Accessories, page 7-55 through Plug-In and Drawout Mountings, page 7-64

Optional Lugs see Mechanical Lug Information, page , Supplemental Digest Section 3.

Dimensions see Dimensions and Shipping Weights, page 7-85

Enclosures see Circuit Breaker Enclosures, page 7-87

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT L-Frame Molded Case Circuit Breakers (600 A)

A flexible, high performance offer certified to global standards.

- Basic Electronic and MicroLogic trip protection from 250–600 Vac
- 2-, 3- and 4-pole design; wide range of trip units to protect most applications
- High performance UL listed interrupting ratings from 35 kA to 200 kA at 480 Vac
- Standard (80%) or 100% rating
- UL, CSA, NOM, IEC, CCC certified, and UKCA and CE marked for global acceptance



PowerPacT L-Frame Circuit Breaker with MicroLogic™ Trip Unit

Table 7.63: L-Frame 600 A Standard (80% Rated) UL Current-Limiting *[32]* Circuit Breakers (600 Vac) with Lugs and Factory-Sealed Electronic Trip Units Suitable for Reverse Connection *[33][34]*

Electronic Trip Unit			Sensor Rating	Interrupting Rating (80% Rated)				
Type	Function	Trip Unit		G	J *[32]*	L *[32]*	R *[32]*	Terminal
600 Vac, 50/60 Hz, 3P								
MicroLogic Standard	LI	3.3 *[35]*	250 A	LGL36250U31X	LJL36250U31X	LLL36250U31X	LRL36250U31X	AL400L61K3 *[36]*
			400 A	LGL36400U31X	LJL36400U31X	LLL36400U31X	LRL36400U31X	AL600LS52K3
			600 A	LGL36600U31X	LJL36600U31X	LLL36600U31X	LRL36600U31X	
MicroLogic Standard	LSI	3.3S *[35]* *[37]*	250 A	LGL36250U33X	LJL36250U33X	LLL36250U33X	LRL36250U33X	AL400L61K3 *[38]*
			400 A	LGL36400U33X	LJL36400U33X	LLL36400U33X	LRL36400U33X	AL600LS52K3
			600 A	LGL36600U33X	LJL36600U33X	LLL36600U33X	LRL36600U33X	
MicroLogic Ammeter	LSI	5.3A	400 A	LGL36400U43X	LJL36400U43X	LLL36400U43X	LRL36400U43X	AL600LS52K3
			600 A	LGL36600U43X	LJL36600U43X	LLL36600U43X	LRL36600U43X	
MicroLogic Energy	LSI	5.3E	400 A	LGL36400U53X	LJL36400U53X	LLL36400U53X	LRL36400U53X	
			600 A	LGL36600U53X	LJL36600U53X	LLL36600U53X	LRL36600U53X	
MicroLogic Ammeter	LSIG	6.3A	400 A	LGL36400U44X	LJL36400U44X	LLL36400U44X	LRL36400U44X	
			600 A	LGL36600U44X	LJL36600U44X	LLL36600U44X	LRL36600U44X	
MicroLogic Energy	LSIG	6.3E *[39]*	400 A	LGL36400U54X	LJL36400U54X	LLL36400U54X	LRL36400U54X	
			600 A	LGL36600U54X	LJL36600U54X	LLL36600U54X	LRL36600U54X	
600 Vac, 50/60 Hz, 4P								
MicroLogic Standard	LI	3.3	250 A	LGL46250U31X	LJL46250U31X	LLL46250U31X	LRL46250U31X	AL400L61K4
			400 A	LGL46400U31X	LJL46400U31X	LLL46400U31X	LRL46400U31X	AL600LS52K4
			600 A	LGL46600U31X	LJL46600U31X	LLL46600U31X	LRL46600U31X	
MicroLogic Standard	LSI	3.3S*[37]*	250 A	LGL46250U33X	LJL46250U33X	LLL46250U33X	LRL46250U33X	AL400L61K4
			400 A	LGL46400U33X	LJL46400U33X	LLL46400U33X	LRL46400U33X	AL600LS52K4
			600 A	LGL46600U33X	LJL46600U33X	LLL46600U33X	LRL46600U33X	
MicroLogic Ammeter	LSI	5.3A	400 A	LGL46400U43X	LJL46400U43X	LLL46400U43X	LRL46400U43X	AL600LS52K4
			600 A	LGL46600U43X	LJL46600U43X	LLL46600U43X	LRL46600U43X	
MicroLogic Energy	LSI	5.3E	400 A	LGL46400U53X	LJL46400U53X	LLL46400U53X	LRL46400U53X	
			600 A	LGL46600U53X	LJL46600U53X	LLL46600U53X	LRL46600U53X	
MicroLogic Ammeter	LSIG	6.3A	400 A	LGL46400U44X	LJL46400U44X	LLL46400U44X	LRL46400U44X	
			600 A	LGL46600U44X	LJL46600U44X	LLL46600U44X	LRL46600U44X	
MicroLogic Energy	LSIG	6.3E	400 A	LGL46400U54X	LJL46400U54X	LLL46400U54X	LRL46400U54X	
			600 A	LGL46600U54X	LJL46600U54X	LLL46600U54X	LRL46600U54X	

[32] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[33] See Supplemental Digest Section 3 for circuit breakers with field interchangeable trip units.
[34] For applications requiring communications see page 7-68.
[35] 3P circuit breakers with this trip unit can be used for 2P applications.
[36] AL600LS52K3 terminal wire range is (2) 2/0 AWG 500 kcmil Al/Cu
[37] Fixed ST and LT delays.
[38] AL400L61K3 terminal wire ranges are (1) 2 AWG–600 kcmil Cu or 1) 2 AWG–500 kcmil Al.
[39] 3-pole circuit breakers can be used for 2-pole applications. (For such instances, MicroLogic 6.2 Ammeter and Energy trip units can be used for ground fault protection. Additional metering capabilities are not guaranteed when using MicroLogic Ammeter and Energy trip units for this type of application.)

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.64: L-Frame 600 A 100% Rated UL Current-Limiting *[40]* Circuit Breakers with Lugs and Factory-Sealed Electronic Trip Units Suitable for Reverse Connection *[41][42]*

Electronic Trip Unit			Sensor Rating	Interrupting Rating (100% Rated)					Terminal
Type	Function	Trip Unit		D	G	J *[40]*	L *[40]*	R *[40]*	
600 Vac, 50/60 Hz, 3P									
MicroLogic Standard	LI	3.3 *[43]*	250 A	LDL36250CU31X	LGL36250CU31X	LJL36250CU31X	LLL36250CU31X	LRL36250CU31X	AL400L61K3
			400 A	LDL36400CU31X	LGL36400CU31X	LJL36400CU31X	LLL36400CU31X	LRL36400CU31X	AL600LS52K3
MicroLogic Standard	LSI	3.3S *[43]* *[44]*	250 A	LDL36250CU33X	LGL36250CU33X	LJL36250CU33X	LLL36250CU33X	LRL36250CU33X	AL400L61K3
			400 A	LDL36400CU33X	LGL36400CU33X	LJL36400CU33X	LLL36400CU33X	LRL36400CU33X	AL600LS52K3
MicroLogic Ammeter	LSI	5.3A	400 A	LDL36400CU43X	LGL36400CU43X	LJL36400CU43X	LLL36400CU43X	LRL36400CU43X	AL600LS52K3
MicroLogic Energy	LSI	5.3E	400 A	LDL36400CU53X	LGL36400CU53X	LJL36400CU53X	LLL36400CU53X	LRL36400CU53X	
MicroLogic Ammeter	LSIG	6.3A	400 A	LDL36400CU44X	LGL36400CU44X	LJL36400CU44X	LLL36400CU44X	LRL36400CU44X	
MicroLogic Energy	LSIG	6.3E *[45]*	400 A	LDL36400CU54X	LGL36400CU54X	LJL36400CU54X	LLL36400CU54X	LRL36400CU54X	
600 Vac, 50/60 Hz, 4P									
MicroLogic Standard	LI	3.3	250 A	LDL46250CU31X	LGL46250CU31X	LJL46250CU31X	LLL46250CU31X	LRL46250CU31X	AL400L61K4
			400 A	LDL46400CU31X	LGL46400CU31X	LJL46400CU31X	LLL46400CU31X	LRL46400CU31X	AL600LS52K4
MicroLogic Standard	LSI	3.3S	250 A	LDL46250CU33X	LGL46250CU33X	LJL46250CU33X	LLL46250CU33X	LRL46250CU33X	AL400L61K4
			400 A	LDL46400CU33X	LGL46400CU33X	LJL46400CU33X	LLL46400CU33X	LRL46400CU33X	AL600LS52K4
MicroLogic Ammeter	LSI	5.3A	400 A	LDL46400CU43X	LGL46400CU43X	LJL46400CU43X	LLL46400CU43X	LRL46400CU43X	AL600LS52K4
MicroLogic Energy	LSI	5.3E	400 A	LDL46400CU53X	LGL46400CU53X	LJL46400CU53X	LLL46400CU53X	LRL46400CU53X	
MicroLogic Ammeter	LSIG	6.3A	400 A	LDL46400CU44X	LGL46400CU44X	LJL46400CU44X	LLL46400CU44X	LRL46400CU44X	
MicroLogic Energy	LSIG	6.3E	400 A	LDL46400CU54X	LGL46400CU54X	LJL46400CU54X	LLL46400CU54X	LRL46400CU54X	

Table 7.65: PowerPacT L-Frame Terminal Wire Ranges

Terminal	Wire Range
AL400L61K3	(1) 2 AWG–600 kcmil Cu or 1) 2 AWG–500 kcmil Al.
AL600LS52K3	(2) 2/0 AWG–500 kcmil Al/Cu.

Table 7.66: PowerPacT L-FrameTermination Options

Termination Letter	Termination Option	
A	I-Line (See Section 9—Panelboards)	For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number. Termination Letter L G **L** 3 6 6 0 0 U 4 4 X
F	No lugs	
L	Lugs both ends	
M	Lugs ON end, terminal nut kit OFF end	
P	Lugs OFF end, terminal nut kit ON end	
N	Plug In	
D	Drawout	
S	Rear Connected	

Table 7.67: PowerPacT L-Frame Interrupting Ratings

Voltage	Interrupting Rating				
	D	G	J	L	R
240 Vac	25 kA	65 kA	100 kA	125 kA	200 kA
480 Vac	18 kA	35 kA	65 kA	100 kA	200 kA
600 Vac	14 kA	18 kA	25 kA	50 kA	100 kA

Accessories see page 7-55
Optional Lugs see page 7-60
Dimensions see page 7-86
Enclosures see page 7-87

[40] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[41] See Supplemental Digest Section 3 for circuit breakers with field interchangeable trip units.
[42] For applications requiring communications see page 7-68.
[43] 3P circuit breakers with this trip unit can be used for 2P applications.
[44] Fixed ST and LT delays.
[45] 3-pole circuit breakers can be used for 2-pole applications. (For such instances, MicroLogic 6.2 Ammeter and Energy trip units can be used for ground fault protection. Additional metering capabilities are not guaranteed when using MicroLogic Ammeter and Energy trip units for this type of application.)

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



PowerPacT M-Frame Circuit Breaker with Basic Electronic Trip Unit

PowerPacT M-Frame Molded Case Circuit Breakers (800 A)

PowerPacT M-frame circuit breakers use an electronic trip system with the simplicity of a thermal magnetic breaker.

- Basic electronic trip protection from 300 to 800 A up to 600 Vac
- 2- and 3-pole unit mount and I-line construction
- UL listed interrupting ratings from 35 to 65 kA at 480 Vac
- Common mounting holes, handle locations and trim dimensions with shared auxiliaries and accessories with P-frame devices
- Available in standard (80%) rating only
- UL, CSA, NOM, IEC, CCC certified, and UKCA and CE marked for global acceptance

Table 7.68: M-Frame 800 A, Basic Electronic Trip System Type ET 1.0 *[46]* **Factory-Sealed Trip Unit**

Electronic Trip Unit		Ampere Rating	Adjustable Instantaneous Trip Range		Interrupting Rating	
Type	Function		Low	High	G	J
2P, 600 Vac 50/60 Hz						
Basic	Fixed Long-time, Adjustable Instantaneous Trip	400 A	800	4000	MGL26400	MJL26400
		800 A	1200	6000	MGL26800	MJL26800
3P, 600 Vac 50/60 Hz						
Basic	Fixed Long-time, Adjustable Instantaneous Trip	400 A	800	4000	MGL36400	MJL36400
		800 A	1200	6000	MGL36800	MJL36800

Table 7.69: M-Frame 800 A, Adjustable Amperage Electronic Trip Unit

Electronic Trip Unit		Adjustable Long-Time Settings	Adjustable Instantaneous		Interrupting Rating	
Type	Function		Low	High	G	J
2P, 600 Vac 50/60 Hz						
Basic	Adjustable Long-Time Adjustable Instantaneous Trip	300–800	2x	10x	MGL26800E10	MJL26800E10
3P, 600 Vac 50/60 Hz						
Basic	Adjustable Long-Time Adjustable Instantaneous Trip	300–800	2x	10x	MGL36800E10	MJL36800E10

Table 7.70: M-Frame Termination Options

Termination Letter	Termination Option
A	I-Line (See Section 9—Panelboards)
F	No lugs
L	Lugs both ends
M	Lugs ON end, terminal nut kit OFF end
P	Lugs OFF end, terminal nut kit ON end
M G **L** 3 6 4 0 0 For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.	

Table 7.71: PowerPacT M-Frame Interrupting Ratings

Voltage	Interrupting Rating	
	G	J
240 Vac	65 kA	100 kA
480 Vac	35 kA	65 kA
600 Vac	18 kA	25 kA

Accessories see page 7-55
Optional Lugs see page 7-60
Dimensions see page 7-86
Enclosures see page 7-87

[46] The ET 1.0 trip unit cannot be field replaced or have the long-time trip point setting adjusted. It is considered an electronic equivalent of a thermal-magnetic circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



P-Frame 1200 A Unit-Mount



Electrically Operated P-Frame 800 A Unit-Mount

Table 7.72: P-Frame Interrupting Ratings

Voltage	P-Frame Interrupting Rating			
	G	J	K	L
240 Vac	65 kA	100 kA	65 kA	125 kA
480 Vac	35 kA	65 kA	50 kA	100 kA
600 Vac	18 kA	25 kA	50 kA	—

Table 7.73: P-Frame Termination Options

Termination Letter
A = I-Line (See Section 9—Panelboards)
D = Drawout
F = No Lugs (Includes terminal nut kit on both ends)
L = Lugs both ends
M = Lugs ON end, terminal nut kit OFF end
P = Lugs OFF end, terminal nut kit ON end
P G **L** 3 6 0 4 0 U 4 1 A For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

Dimensions see page 7-86
Trip Unit Options see page 7-66
Optional Lugs see page 7-60
Alternate Rating Plugs see page 7-68
Enclosures see page 7-87
Accessories see page 7-55

PowerPacT P-Frame Molded Case Circuit Breakers (1200 A)

- MicroLogic trip protection from 250 to 1200 A up to 600 Vac
- 2-, 3- and 4-pole unit-mount construction
- UL listed interrupting ratings from 35 kA to 100 kA at 480 Vac
- Same dimensions, common mounting, bussing, cabling and door cut-out as PowerPacT M-frame circuit breakers
- Standard (80%) and 100% rating
- UL, CSA, NOM, IEC, CCC certified, and UKCA and CE marked for global acceptance

Table 7.74: P-Frame 1200 A (600 Vac, 50/60 Hz) 3P *[47]* Circuit Breaker with Electronic Trip Unit

Electronic Trip Unit			Sensor Rating	Cat. No.*[48]*	Terminal Wire Range
Type	Function	Trip Unit			
Basic Electronic Trip Unit (Not Interchangeable)	Fixed long-time, Adjustable Instantaneous	ET1.01	600 A	P■L36060	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			800 A	P■L36080	
			1000 A	P■L36100	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120	
MicroLogic Interchangeable Standard Trip Unit	LI	3.0	250 A	P■L36025(C)U31A	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U31A	
			600 A	P■L36060(C)U31A	
			800 A	P■L36080(C)U31A	
			1000 A	P■L36100(C)U31A	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U31A	
	LSI	5.0	250 A	P■L36025(C)U33A	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U33A	
			600 A	P■L36060(C)U33A	
			800 A	P■L36080(C)U33A	
			1000 A	P■L36100(C)U33A	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U33A	
MicroLogic Interchangeable Ammeter Trip Unit	LI	3.0A	250 A	P■L36025(C)U41A	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U41A	
			600 A	P■L36060(C)U41A	
			800 A	P■L36080(C)U41A	
			1000 A	P■L36100(C)U41A	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U41A	
	LSI	5.0A	250 A	P■L36025(C)U43A	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U43A	
			600 A	P■L36060(C)U43A	
			800 A	P■L36080(C)U43A	
			1000 A	P■L36100(C)U43A	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U43A	
	LSIG	6.0A	250 A	P■L36025(C)U44A	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U44A	
			600 A	P■L36060(C)U44A	
			800 A	P■L36080(C)U44A	
			1000 A	P■L36100(C)U44A	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U44A	
MicroLogic Interchangeable Power Trip Unit	LSI	5.0P	250 A	P■L36025(C)U63AE1	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U63AE1	
			600 A	P■L36060(C)U63AE1	
			800 A	P■L36080(C)U63AE1	
			1000 A	P■L36100(C)U63AE1	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U63AE1	
	LSIG	6.0P	250 A	P■L36025(C)U64AE1	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U64AE1	
			600 A	P■L36060(C)U64AE1	
			800 A	P■L36080(C)U64AE1	
			1000 A	P■L36100(C)U64AE1	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U64AE1	
MicroLogic Interchangeable Harmonic Trip Unit	LSI	5.0H	250 A	P■L36025(C)U73AE1	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U73AE1	
			600 A	P■L36060(C)U73AE1	
			800 A	P■L36080(C)U73AE1	
			1000 A	P■L36100(C)U73AE1	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U73AE1	
	LSIG	6.0H	250 A	P■L36025(C)U74AE1	AL800M23K (3) 3/0 AWG–500 kcmil Al or Cu
			400 A	P■L36040(C)U74AE1	
			600 A	P■L36060(C)U74AE1	
			800 A	P■L36080(C)U74AE1	
			1000 A	P■L36100(C)U74AE1	AL1200P25K (4) 3/0 AWG–500 kcmil Al or Cu
			1200 A	P■L36120(C)U74AE1	

[47] For 2P and 4P information see Catalog 0612CT0101.

[48] To complete the catalog number:
Replace the ■ with the appropriate interrupting rating (G, J, K or L).
For all L interrupting ratings, change the 5th character (voltage rating) from a 6 (600 V) to a 4 (480V). The 480 V AIR is standard 100 kA.
For 100% rated circuit breakers, add a "C" in the 9th character place. For example, the catalog number for a 100% rated trip unit with LI trip functions at 250 A would be PBL36025CU31A.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



R-Frame Unit-Mount

PowerPacT R-Frame Molded Case Circuit Breakers (2500 A)

- MicroLogic electronic trip protection from 600–2500A up to 600 Vac
- 2-, 3- and 4-pole construction
- UL listed interrupting ratings from 35 to 100 kA at 480Vac
- Built-in Modbus protocol
- Standard (80%) and 100% rating
- UL, CSA, NOM, IEC, CCC certified, and UKCA and CE marked for global acceptance

Table 7.75: R-Frame Interrupting Ratings

Voltage	R-Frame Interrupting Rating			
	G	J	K	L
240 Vac	65 kA	100 kA	65 kA	125 kA
480 Vac	35 kA	65 kA	65 kA	100 kA
600 Vac	18 kA	25 kA	65 kA	50 kA

Table 7.76: R-Frame Termination Options

Termination Letter
A = I-Line (See Section 9—Panelboards)
F = No Lugs (Includes terminal nut kit on both ends)
RJ **F** 3 6 3 0 0 U 4 1 A For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

Dimensions see page 7-86
Trip Unit Options see page 7-66
Optional Lugs see page 7-60
Alternate Rating Plugs see page 7-68
Enclosures see page 7-87
Accessories see page 7-55

Table 7.77: R-Frame 2500 A (600 Vac, 50/60 Hz) 3P Circuit Breaker with Electronic Trip Unit

Electronic Trip Unit *[49]*			Sensor Rating	Cat. No. *[50]*
Type	Function	Trip Unit		
Basic Electronic Trip Unit (Not Interchangeable)	Fixed long-time, Adjustable Instantaneous	ET1.0I	1200 A	R■F36120
			1600 A	R■F36160
			2000 A	R■F36200
			2500 A	R■F36250
MicroLogic Interchangeable Standard Trip Unit	LI	3.0	600 A	R■F36060(C)U31A
			800 A	R■F36080(C)U31A
			1000 A	R■F36100(C)U31A
			1200 A	R■F36120(C)U31A
			1600 A	R■F36160(C)U31A
			2000 A	R■F36200(C)U31A
			2500 A	R■F36250(C)U31A
	LSI	5.0	600 A	R■F36060(C)U33A
			800 A	R■F36080(C)U33A
			1000 A	R■F36100(C)U33A
			1200 A	R■F36120(C)U33A
			1600 A	R■F36160(C)U33A
			2000 A	R■F36200(C)U33A
			2500 A	R■F36250(C)U33A
MicroLogic Interchangeable Ammeter Trip Unit	LI	3.0A	600 A	R■F36060(C)U41A
			800 A	R■F36080(C)U41A
			1000 A	R■F36100(C)U41A
			1200 A	R■F36120(C)U41A
			1600 A	R■F36160(C)U41A
			2000 A	R■F36200(C)U41A
			2500 A	R■F36250(C)U41A
	LSI	5.0A	600 A	R■F36060(C)U43A
			800 A	R■F36080(C)U43A
			1000 A	R■F36100(C)U43A
			1200 A	R■F36120(C)U43A
			1600 A	R■F36160(C)U43A
			2000 A	R■F36200(C)U43A
			2500 A	R■F36250(C)U43A
	LSIG	6.0A	600 A	R■F36060(C)U44A
			800 A	R■F36080(C)U44A
			1000 A	R■F36100(C)U44A
			1200 A	R■F36120(C)U44A
			1600 A	R■F36160(C)U44A
			2000 A	R■F36200(C)U44A
			2500 A	R■F36250(C)U44A
MicroLogic Interchangeable Power Trip Unit	LSI	5.0P	600 A	R■F36060(C)U63AE1
			800 A	R■F36080(C)U63AE1
			1000 A	R■F36100(C)U63AE1
			1200 A	R■F36120(C)U63AE1
			1600 A	R■F36160(C)U63AE1
			2000 A	R■F36200(C)U63AE1
			2500 A	R■F36250(C)U63AE1
	LSIG	6.0P	600 A	R■F36060(C)U64AE1
			800 A	R■F36080(C)U64AE1
			1000 A	R■F36100(C)U64AE1
			1200 A	R■F36120(C)U64AE1
			1600 A	R■F36160(C)U64AE1
			2000 A	R■F36200(C)U64AE1
			2500 A	R■F36250(C)U64AE1


[49] For 2P and 4P information see Catalog **0612CT0101**.

[50] To complete the catalog number: Replace the ■ with the appropriate interrupting rating (G, J, K or L).; For 100% rated circuit breakers, add a “C” in the 9th character place. For example, the catalog number for a 100% rated trip unit with LI trip functions at 2500 A would be RGF36025CU31A.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.77 R-Frame 2500 A (600 Vac, 50/60 Hz) 3P Circuit Breaker with Electronic Trip Unit (cont'd.)

Electronic Trip Unit *[51]*			Sensor Rating	Cat. No. *[52]*
Type	Function	Trip Unit		
MicroLogic Interchangeable Harmonic Trip Unit	LSI	5.0H	600 A	R■F36060(C)U73AE1
			800 A	R■F36080(C)U73AE1
			1000 A	R■F36100(C)U73AE1
			1200 A	R■F36120(C)U73AE1
			1600 A	R■F36160(C)U73AE1
			2000 A	R■F36200(C)U73AE1
			2500 A	R■F36250(C)U73AE1
	LSIG	6.0H	600 A	R■F36060(C)U74AE1
			800 A	R■F36080(C)U74AE1
			1000 A	R■F36100(C)U74AE1
			1200 A	R■F36120(C)U74AE1
			1600 A	R■F36160(C)U74AE1
			2000 A	R■F36200(C)U74AE1
			2500 A	R■F36250(C)U74AE1

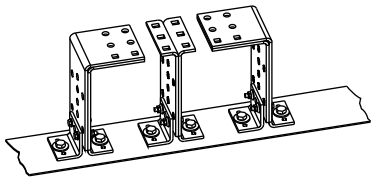

RTLB Terminal Pad Kit

Unit-Mount R-Frame Standard Bus Connection

R-frame circuit breakers can be bus- or cable-connected.

- For cable connections, an optional terminal pad kit RLTB or equivalent bus structure is required.
- RLTB kits comes standard with bus bar connections.

RTLB / RT3B Kits

- RLTB kits are included with 2500 A 100% rated circuit breakers.
- Each kit contains terminal pads for one end of the circuit breaker only
- Has provisions for mounting a maximum of 8 lugs per phase.

R-Frame I-Line circuit breakers come with lugs on the load side. (See Panelboards in Section 9 of the Digest).

For other circuit breakers, order terminal pad kit (RLTB) and optional lugs separately. See Terminal Nuts, Terminal Pads, Terminal Shields and Accessories, page 7-63 and Mechanical Lugs, page 7-60.

[51] For 2P and 4P information see Catalog **0612CT0101**.

[52] To complete the catalog number: Replace the ■ with the appropriate interrupting rating (G, J, K or L).; For 100% rated circuit breakers, add a “C” in the 9th character place. For example, the catalog number for a 100% rated trip unit with LI trip functions at 2500 A would be RGF36025CU31A.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



PowerPacT J-Frame Circuit Breaker

PowerPacT Mission Critical Circuit Breakers

Delivering high levels of selective coordination in a flexible design that can be easily configured for a variety of applications.

- Adjustable long-time settings in three sensor sizes provide coverage from 70-600 A on 120-240, 208Y/120, 240, and 480Y/277 Vac systems
- Undergone rigorous testing procedures to certify the coordination with downstream circuit breakers
- Available in J-Frame (250A) and L-Frame (600A)
- UL 489 listed, CSA Certified Voltage: 480Y/277V

Table 7.78: J-Frame 250 A Electronic Trip Mission Critical 80% Rated Circuit Breakers (480/277 Vac) with Factory Sealed Trip Units Suitable for Reverse Connection

Electronic Trip Unit Type	Trip Function	Trip Unit	Continuous Current	Cat. No.				Terminal
				D Interrupting	G Interrupting	J Interrupting	L Interrupting	
Standard	LI	3.2 W	250 A	JDL34250WU31X	JGL34250WU31X	JJL34250WU31X	JLL34250WU31X	AL250JD *[1]*
Standard	LSI	3.2S-W	250 A	JDL34250WU33X	JGL34250WU33X	JJL34250WU33X	JLL34250WU33X	AL250JD *[1]*
High Perf. Ammeter	LSI	5.2A-W	250 A	JDL34250WU43X	JGL34250WU43X	JJL34250WU43X	JLL34250WU43X	AL250JD *[1]*
High Perf. Energy	LSI	5.2E-W	250 A	JDL34250WU53X	JGL34250WU53X	JJL34250WU53X	JLL34250WU53X	AL250JD *[1]*
High Perf. Ammeter	LSIG	6.2A-W	250 A	JDL34250WU44X	JGL34250WU44X	JJL34250WU44X	JLL34250WU44X	AL250JD *[1]*
High Perf. Energy	LSIG	6.2E-W	250 A	JDL34250WU54X	JGL34250WU54X	JJL34250WU54X	JLL34250WU54X	AL250JD *[1]*

Table 7.79: L-Frame 600 A Electronic Trip Mission Critical Circuit Breakers (480/277 Vac) with Factory Sealed Trip Units Suitable for Reverse Connection *[2]*

Electronic Trip Unit Type	Trip Function	Trip Unit	Continuous Current	Cat. No.				Terminal
				D Interrupting	G Interrupting	J Interrupting	L Interrupting.	
480/277 Vac, 50/60 Hz, 3P								
Standard	LI	3.3 W	250 A	LDL34250WU31X	LGL34250WU31X	LJL34250WU31X	LLL34250WU31X	AL400L61K3 *[3]*
			400 A	LDL34400WU31X	LGL34400WU31X	LJL34400WU31X	LLL34400WU31X	AL600LS52K3 *[4]*
			600 A	LDL34600WU31X	LGL34600WU31X	LJL34600WU31X	LLL34300WU31X	
Standard	LSI	3.3S-W	250 A	LDL34250WU33X	LGL34250WU33X	LJL34250WU33X	LLL34250WU33X	AL400L61K3 *[3]*
			400 A	LDL34400WU33X	LGL34400WU33X	LJL34400WU33X	LLL34400WU33X	AL600LS52K3 *[4]*
			600 A	LDL34600WU33X	LGL34600WU33X	LJL34600WU33X	LLL34300WU33X	
High Perf. Ammeter	LSI	5.3A-W	400 A	LDL34400WU43X	LGL34400WU43X	LJL34400WU43X	LLL34400WU43X	AL600LS52K3 *[4]*
			600 A	LDL34600WU43X	LGL34600WU43X	LJL34600WU43X	LLL34300WU43X	
High Perf. Energy	LSI	5.3E-W	400 A	LDL34400WU53X	LGL34400WU53X	LJL34400WU53X	LLL34400WU53X	AL600LS52K3 *[4]*
			600 A	LDL34600WU53X	LGL34600WU53X	LJL34600WU53X	LLL34300WU53X	
High Perf. Ammeter	LSIG	6.3A-W	400 A	LDL34400WU44X	LGL34400WU44X	LJL34400WU44X	LLL34400WU44X	AL600LS52K3 *[4]*
			600 A	LDL34600WU44X	LGL34600WU44X	LJL34600WU44X	LLL34300WU44X	
High Perf. Energy	LSIG	6.3E-W	400 A	LDL34400WU54X	LGL34400WU54X	LJL34400WU54X	LLL34400WU54X	AL600LS52K3 *[4]*
			600 A	LDL34600WU54X	LGL34600WU54X	LJL34600WU54X	LLL34300WU54X	
480/277 Vac, 50/60 Hz, 4P								
Standard	LI	3.3 W	250 A	LDL44250WU31X	LGL44250WU31X	LJL44250WU31X	LLL44250WU31X	AL400L61K4 *[3]*
			400 A	LDL44400WU31X	LGL44400WU31X	LJL44400WU31X	LLL44400WU31X	AL600LS52K4 *[4]*
			600 A	LDL44600WU31X	LGL44600WU31X	LJL44600WU31X	LLL44300WU31X	
Standard	LSI	3.3S-W	250 A	LDL44250WU33X	LGL44250WU33X	LJL44250WU33X	LLL44250WU33X	AL400L61K4 *[3]*
			400 A	LDL44400WU33X	LGL44400WU33X	LJL44400WU33X	LLL44400WU33X	AL600LS52K4 *[4]*
			600 A	LDL44600WU33X	LGL44600WU33X	LJL44600WU33X	LLL44300WU33X	
High Perf. Ammeter	LSI	5.3A-W	400 A	LDL44400WU43X	LGL44400WU43X	LJL44400WU43X	LLL44400WU43X	AL600LS52K4 *[4]*
			600 A	LDL44600WU43X	LGL44600WU43X	LJL44600WU43X	LLL44300WU43X	
High Perf. Energy	LSI	5.3E-W	400 A	LDL44400WU53X	LGL44400WU53X	LJL44400WU53X	LLL44400WU53X	AL600LS52K3 *[4]*
			600 A	LDL44600WU53X	LGL44600WU53X	LJL44600WU53X	LLL44300WU53X	
High Perf. Ammeter	LSIG	6.3A-W	400 A	LDL44400WU44X	LGL44400WU44X	LJL44400WU44X	LLL44400WU44X	AL600LS52K4 *[4]*
			600 A	LDL44600WU44X	LGL44600WU44X	LJL44600WU44X	LLL44300WU44X	
High Perf. Energy	LSIG	6.3E-W	400 A	LDL44400WU54X	LGL44400WU54X	LJL44400WU54X	LLL44400WU54X	AL600LS52K4 *[4]*
			600 A	LDL44600WU54X	LGL44600WU54X	LJL44600WU54X	LLL44300WU54X	

Table 7.80: Terminal Wire Ranges

Terminal	Wire Range
AL250JD	(1) 3/0 AWG 350 kcmil AL or Cu
AL400L61K3	(1) #2 AWG–500 kcmil Al or (1) #2 AWG–600 kcmil Cu.
AL600LS52K3	(2) 2/0 AWG–500 kcmil Al or Cu.

Accessories see page 7-55
Optional Lugs see page 7-60
Compression and PDC Lugs see Supplemental Digest, Section 3
Dimensions see page 7-86
Enclosures see page 7-87

Table 7.81: J- and L-Frame Termination Options

Termination Letter	
A = I-Line (See Section 9)	J G **L** 3 6 1 0 0 For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number. Termination Letter
F = No Lugs (includes terminal nut kit on both ends) *[5]*	
L = Lugs both ends	
M = Lugs ON end Terminal Nut Kit OFF end	
P = Lugs OFF end Terminal Nut Kit ON end	
N = Plug-in	
D = Drawout	
S = Rear Connected	

Table 7.82: J- and L-Frame Interrupting Ratings

Voltage	Interrupting Rating			
	D	G	J	L
240 Vac	25 kA	65 kA	100 kA	125 kA
480 Vac	18 kA	35 kA	65 kA	100 kA

[1] AL250JD terminal wire range is (1) 3/0 AWG–350 kcmil Al or Cu.
[2] 100% rated for 250 A and 400 A. 80% rated for 600 A.
[3] AL400L61K3 terminal wire ranges are (1) #2 AWG–500 kcmil Al or (1) #2 AWG–600 kcmil Cu.
[4] AL600LS52K3 terminal wire ranges are (2) 2/0 AWG–500 kcmil Al or Cu.
[5] Add TS suffix for circuit breaker without terminal nut kit.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



Connection Diagram

Table 7.83: 500 Vdc Termination Options

Termination Letter	Termination Option
F	No Lugs (bus bar connection)
L	Lugs Both Ends
S	Rear Connection
JGL37125D81–Place termination letter in third block of circuit breaker catalog number.	

PowerPacT 500 Vdc Circuit Breakers

Designed for use on ungrounded dc systems having a maximum short-circuit voltage of 500 Vdc or a maximum floating (unloaded) voltage of 600 Vdc. Suitable for use only with UPS (ungrounded uninterruptable power supplies systems).

This two-level voltage rating allows these circuit breakers to be applied to battery sources having a short-circuit availability of 20,000 amperes or 50,000 amperes for PowerPacT H-, J-, and L-frame DC circuit breakers at 500 Vdc. IEC 500 Vdc rating is available on PowerPacT J-frame circuit breakers.

PowerPacT H-frame DC circuit breakers have a fixed magnetic trip system. PowerPacT J- and L-frame DC circuit breakers are provided with an adjustable magnetic trip that is readily accessible by means of a single adjustment on the face of the circuit breaker.

PowerPacT H- and J-frame circuit breakers are UL Listed for the interrupting ratings shown only if applied with three poles connected in series (series connection is external to circuit breaker). (See figure for example of diagram.)

PowerPacT L-frame circuit breakers are UL Listed for the interrupting ratings shown with two or three poles connected in series (series connection is external to circuit breaker).

NOTE: Due to external series connection, I-Line™ circuit breakers are not available for this application.

Table 7.84: 500 Vdc Molded Case Circuit Breakers

Ampere Rating	Circuit Breaker Cat. No.	Fixed Magnetic Trip —DC Amperes	Adjustable Magnetic Trip Range—DC Amperes *[1]*		Interrupting Rating @ 500 Vdc
			Low	High	
30 A	HGL37030D87	450	—	—	20 k AIR
50 A	HGL37050D87	450	—	—	
70 A	HGL37070D87	450	—	—	
100 A	JGL37100D81	—	400	600	20 k AIR
125 A	JGL37125D81	—	400	600	
150 A	JGL37150D81	—	400	600	
175 A	JGL37175D81	—	400	600	
200 A	JGL37200D82	—	500	850	
225 A	JGL37225D82	—	500	850	
250 A	JGL37250D82	—	500	850	20 k AIR
300 A	LGL37030D27	—	750	1500	20 k AIR
350 A	LGL37035D29	—	875	1750	
400 A	LGL37040D30	—	1000	2000	
450 A	LGL37045D31	—	1125	2250	
500 A	LGL37050D32	—	1250	2500	
600 A	LGL37060D33	—	1500	3000	
700 A	LGL47070D35	—	1750	3500	
800 A	LGL47080D36	—	2000	4000	
900 A	LGL47090D86	—	2250	4500	
1000 A	LGL47100D40	—	2500	5000	
1200 A	LGL47120D42	—	3000	6000	
30A	HLL37030D87	450	—	—	50 k AIR
50A	HLL37050D87	450	—	—	
70A	HLL37070D87	450	—	—	
100A	JLL37100D81	—	400	600	50 k AIR
125A	JLL37125D81	—	400	600	
150A	JLL37150D81	—	400	600	
175A	JLL37175D81	—	400	600	
200A	JLL37200D82	—	500	850	
225A	JLL37225D82	—	500	850	
250A	JLL37250D82	—	500	850	
300A	LLL37030D27	—	750	1500	50 k AIR
350A	LLL37035D29	—	875	1750	
400A	LLL37040D30	—	1000	200	
450 A	LLL36045D31	—	1125	2250	
500 A	LLL37050D32	—	1250	2500	
600 A	LLL37060D33	—	1500	3000	
700 A	LLL47070D35	—	1750	3500	
800 A	LLL47080D36	—	2000	4000	
900 A	LLL47090D86	—	2250	4500	
1000 A	LLL47100D40	—	2500	5000	
1200 A	LLL47120D42	—	3000	6000	

Accessories see page 7-55 and Supplemental Digest Section 3
Optional Lugs see page 7-60 and Supplemental Digest Section 3
Dimensions see page 7-86 and Supplemental Digest Section 3
Enclosures see page 7-90

[1] Magnetic trip tolerances are -20%/+30% from the nominal values shown.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



J-Frame Switch



L-Frame Switch

PowerPacT Automatic Switches

Automatic molded case switches open instantaneously at a factory preset magnetic trip point. Calibrated to protect only the molded case switch itself, when it is subjected to high fault currents. The trip point is nonadjustable and provides no overload or low level fault protection.

- PowerPacT™ H-, J-, and L-frame automatic switches are available in unit mount, I-Line™, plug-in and drawout versions.
- Accept the same lugs and accessories as equivalent thermal-magnetic circuit breakers *[1]*.
- May be interlocked with another switch or circuit breaker to form a source-changeover system
- UL Listed per UL 489 and CSA Certified.

Table 7.85: PowerPacT™ B-Frame Automatic Molded Case Switches, 600 Vac

Circuit Breaker	Poles	Ampere Rating	D Withstand		G Withstand		J Withstand		Terminal	Wire Range
			Cat. No.	Trip Point	Cat. No.	Trip Point	Cat. No.	Trip Point		
B-Frame	2 *[2]*	125 A	BDL26000S12	1625 A	BGL26000S12	1625 A	BJL26000S12	1625 A	LV426973	14–2/0 AWG Cu
	3	125 A	BDL36000S12	1625 A	BGL36000S12	1625 A	BJL36000S12	1625 A	LV426974	14–2/0 AWG Cu

Table 7.86: H-, J-, and L-Frame PowerPacT™ Automatic Molded Case Switches, 600 Vac

Circuit Breaker	Poles	Ampere Rating	G Withstand		L Withstand		R Withstand		Terminal	Wire Range
			Cat. No.	Trip Point	Cat. No.	Trip Point	Cat. No.	Trip Point		
H-Frame J-Frame	2	150 A	HGL26000S15 *[2]*	2250 A	HLL26000S15	2250 A	—	—	AL150HD	14 AWG–3/0 AWG Al/Cu
		175 A	JGL26000S17	3125 A	JLL26000S17	3125 A	—	—	AL175JD	4–4/0 AWG Al/Cu
		250 A	JGL26000S25	3125 A	JLL26000S25	3125 A	—	—	AL250JD	3/0 AWG–350 kcmil Al/Cu
	3	150 A	HGL36000S15	2250 A	HLL36000S15	2250 A	—	—	AL150HD	14 AWG–3/0 AWG Al/Cu
		175 A	JGL36000S17	3125 A	JLL36000S17	3125 A	JRL36000S17	3125 A	AL175JD	4–4/0 AWG Al/Cu
		250 A	JGL36000S25	3125 A	JLL36000S25	3125 A	JRL36000S25	3125 A	AL250JD	3/0 AWG–350 kcmil Al/Cu
L-Frame	3	400 A	LGL36000S40X	4800 A	LLL36000S40X	4800 A	LRL36000S40X	4800 A	AL150HD	AL600LS52K3 (2) 2/0 AWG–500 kcmil Al/Cu
		600 A	LGL36000S60X	6600A	LLL36000S60X	6600 A	LRL36000S60X	6600 A	AL250JD	
	4	400 A	LGL46000S40X	4800 A	LLL46000S40X	4800 A	LRL46000S40X	4800 A	AL150HD	AL600LS52K4 (2) 2/0 AWG–500 kcmil Al/Cu
		600 A	LGL46000S60X	6600A	LLL46000S60X	6600 A	LRL46000S60X	6600 A	AL250JD	

Table 7.87: P-Frame and R-Frame PowerPacT™ Automatic Molded Case Switches *[3]*, 600 Vac

Frame	Poles	Ampere Rating	J Withstand		K Withstand		L Withstand		Terminal	Wire Range
			Cat. No.	Trip Point	Cat. No.	Trip Point	Cat. No.	Trip Point		
M	2	800 A	MJL26000S80	10 kA	—	—	—	—	AL800M23K	(3) 3/0 AWG–500 kcmil Al or Cu
	3	800 A	MJL36000S80	10 kA	—	—	—	—	AL800M23K	(3) 3/0 AWG–500 kcmil Al or Cu
P	2	600 A	PJL26000S60	10 kA	PKL26000S60	24 kA	PLL24000S60 *[4]*	10 kA	AL800M23K	(3) 3/0 AWG–500 kcmil Al or Cu
		800 A	PJL26000S80	10 kA	PKL26000S80	24 kA	PLL24000S80 *[4]*	10 kA		
		1000 A	PJL26000S10	10 kA	PKL26000S10	24 kA	PLL24000S10 *[4]*	10 kA	AL1200P25K	(4) 3/0 AWG–500 kcmil Al or Cu
		1200 A	PJL26000S12	10 kA	PKL26000S12	24 kA	PLL24000S12 *[4]*	10 kA		
	3	600 A	PJL36000S60	10 kA	PKL36000S60	24 kA	PLL34000S60 *[4]*	10 kA	AL800M23K	(3) 3/0 AWG–500 kcmil Al or Cu
		800 A	PJL36000S80	10 kA	PKL36000S80	24 kA	PLL34000S80 *[4]*	10 kA		
		1000 A	PJL36000S10	10 kA	PKL36000S10	24 kA	PLL34000S10 *[4]*	10 kA	AL1200P25K	(4) 3/0 AWG–500 kcmil Al or Cu
		1200 A	PJL36000S12	10 kA	PKL36000S12	24 kA	PLL34000S12 *[4]*	10 kA		
R	2	1200 A	—	—	RKF26000S12	57 kA	RLF26000S12	48 kA	R-frame circuit breakers can be bus-connected or cable-connected. For cable connections, RLTB kit or equivalent bus structure is required. For all others, see page 7-63.	
		1600 A	—	—	RKF26000S16	57 kA	RLF26000S16	48 kA		
		2000 A	—	—	RKF26000S20	57 kA	RLF26000S20	48 kA		
		2500 A	—	—	RKF26000S25	57 kA	RLF26000S25	48 kA		
	3	1200 A	—	—	RKF36000S12	57 kA	RLF36000S12	48 kA		
		1600 A	—	—	RKF36000S16	57 kA	RLF36000S16	48 kA		
		2000 A	—	—	RKF36000S20	57 kA	RLF36000S20	48 kA		
		2500 A	—	—	RKF36000S25	57 kA	RLF36000S25	48 kA		

Accessories see page 7-55 and Supplemental Digest Section 3
Optional Lugs see page 7-60 and Supplemental Digest Section 3
Dimensions see page 7-85 and page 7-86
Enclosures see page 7-87

Table 7.88: Q-Frame (240 Vac) PowerPacT™ Automatic Molded Case Switches

Circuit Breaker	Poles	Ampere Rating	J Withstand		Wire Range
			Cat. No.	Trip Point	
Q-Frame *[5]*	2	225 A	QBL22000S22	4500 A	4 AWG–300 kcmil
	3	225 A	QBL32000S22	4500 A	

Table 7.89: B-, H-, J-, L- P-, and R-Frame Withstand Ratings *[6]*

Voltage	Withstand					
	D	G	J	K	L	R
240 Vac	25 kA	65 kA	100 kA	65 kA	125 kA	200 kA
480 Vac	18 kA	35 kA	65 kA	50 kA *[7]*	100 kA	200 kA
600 Vac	14 kA	18 kA	25 kA	50 kA *[7]*	50 kA	100 kA

[1] Q-frame switches do not have electrical accessories available.
[2] True 2P device. Others are a 2P in a 3P module.
[3] UL magnetic trip tolerances are -20% / +30% from the nominal values shown.
[4] P-frame L-interrupting is available in 480 Vac only.
[5] Withstand rating of 10 kA at 240 Vac.
[6] The withstand rating is the fault current at rated voltage that the molded case switch will withstand without damage when protected by a circuit breaker with an equal continuous current rating.
[7] B- and R-frame withstand is 65 kA.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



Instantaneous Trip Circuit Breakers for Motor Protection Applications

Adjustable instantaneous-trip circuit breakers are intended for use in combination with motor starters with overload relays for the protection of motor circuits from short circuits.

Other specific applications include rectifiers and resistance welders. These circuit breakers contain a magnetic trip element in each pole with the trip point adjustable from the front. Interrupting ratings are determined by testing the instantaneous-trip circuit breakers in combination with a contactor and overload relay.

Select instantaneous-trip circuit breakers as follows:

This selection table is suitable for motors, other than NEMA Design E, with locked-rotor indicating code letters per NEC® Table 430.7 (b) as follows:

Table 7.90: Locked-Rotor Indicating Codes

Horsepower	Motor Code Letter
1/2 or less	A–L
3/4 to 1-1/2	A–K
2 to 3	A–J
5 to 25	A–H
30 to 125	A–G
150 or more	A–F

- For other motors order a special thermal-magnetic circuit breaker with magnetic trip settings for the specific motor— specify motor horsepower, voltage, frequency, full-load current and code letter or locked rotor current.
- Determine motor hp rating from the motor nameplate.
- Refer to the tables and select an instantaneous-trip circuit breaker with an ampere rating recommended for the hp and voltage involved.
- Select an adjustable trip setting of at least 800%, not to exceed 1300%, of the motor full-load amperes (FLA) for other than Design E motors. For Design E motors, select an adjustable trip setting of at least 1100% not to exceed 1700% of FLA.
- The NEC 1300% maximum setting may be inadequate for instantaneous-trip circuit breakers to withstand current surges typical of the magnetization current of autotransformer type reduced voltage starters, or open transition wye-delta starters during transfer from “start” to “run,” constant hp multi-speed motors, and motors labeled “high efficiency.” Select thermal-magnetic circuit breakers for those applications.
- Part-winding motors, per NEC 430.4, should have two circuit breakers selected from the above at not more than one half the allowable trip setting for the horsepower rating. The two circuit breakers should operate simultaneously as a disconnecting means per NEC 430.103.
- Based on NEC 430.52 and NEC Table 430.250.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Motor Circuit Protection Selection

The selection tables below provide detailed information for motor circuit protection components to help you choose the correct conductors, safety switches, and thermal magnetic circuit breakers for motor applications in accordance with the 2017 National Electrical Code (NEC). The selection tables provide guidance to simplify and standardize the selection of conductor sizes (AWG/kcmil), metallic conduit sizes, thermal-magnetic inverse time circuit breakers.

The selections are based on motor horsepower, full-load amperage (FLA), and voltage ratings, ensuring compliance with NEC Articles 430.22, 430.52, and related tables.

Table 7.91: Selection Tables for Conductors, Safety Switches and Thermal-Magnetic Circuit Breakers — Based on 2017 NEC® Tables 430.247, 430.248 and 430.250

Horsepower Ratings									Full Load Amperage *[1]*	Amperage of Thermal-Magnetic *[2]* Inverse Time Circuit Breaker			QMB and Heavy Duty Switch with Time Delay Fuses *[3]*	Minimum Size metallic Conduit 75° C, C Wire Field-Installed Sized for 125% FLA *[4]*		
Squirrel-Cage and Wound-Rotor Motors with Norm. Torque Characteristics Operating at Usual Speeds 3Ø 60 Hz				1Ø 10 Hz ac			Average Direct Current Motors Operating at Base Speed			For Motor Code Letter B to E		For Motor Code Letter F to V *[5]*		AWG kcmil	Conduit 3 W	
200 Vac *[8]*	230 Vac	460 Vac	575 Vac	115 Vac	200 Vac *[8]*	230 Vac	120 Vdc	240 Vdc		Ordinary Service *[6]*	Heavy Service and Energy Efficient *[7]*				THHN THWN XHHW	THW
						3/4			6.9 A	15 A	15 A	20 A	30 A	14	1/2 in.	N/A
				1/3					7.2 A							
		5					3.4		7.6 A		20 A					
2									7.8 A							
					3/4				7.9 A							
						1			8.0 A							
								2	8.5 A							
			7-1/2						9.0 A			25 A				
					1				9.2 A							
							1		9.5 A							
	3								9.6 A							
				1/2					9.8 A							
						1-1/2			10.0 A	20 A						
3		7-1/2	10						11.0 A		25 A	30 A				
					1-1/2				11.5 A							
						2			12.0 A							
								3	12.2 A	25 A		35 A				
							1-1/2		13.2 A							
				3/4	2				13.8 A							
		10							14.0 A							
	5								15.2 A	30 A	35 A	40 A				
				1					16.0 A							
			15			3	2		17.0 A			45 A		12	1/2 in.	N/A
5									17.5 A	35 A						
					3				19.6 A		40 A	50 A				
				1-1/2				5	20.0 A	40 A						
		15							21.0 A		45 A	60 A				
	7-1/2								22.0 A							
				2					24.0 A	45 A	50 A		60 A	10	1/2 in.	N/A
							3		25.0 A	50 A		70 A				
7-1/2									25.3 A		60 A					
		20	25						27.0 A							
	10				5				28.0 A							
								7-1/2	29.0 A	60 A		80 A				
			30						32.0 A		70 A					
10									32.2 A			90 A	60 A	8	1/2 in. *[9]*	N/A
		25		3					34.0 A							
								10	38.0 A	80 A	80 A	100 A				
						7-1/2	5		40.0 A							
									41.0 A		90 A	110 A				
	15								42.0 A							
					7–1/2				46.0 A	90 A	110 A	125 A		6	3/4 in.	1 in.
15									48.3 A							
						10			50.0 A							
		40	50						52.0 A			150 A	100 A			
	20								54.0 A							
								15	55.0 A					4	1 in.	1 in.
				5					56.0 A		125 A					

[1] Motor full load currents thru 200 hp are taken from NEC Tables 430.247, 248 and 250. Above 200 hp from UL 98. Select wire size, circuit breakers, or fuses on basis of hp rather than nameplate full load current per NEC 430.6. Do not use these values to select overload relay thermal units. See Digest pages 16-129—16152 for selection of thermal units when actual full load current is not known. Voltages listed are rated motor voltages. Corresponding nominal system voltages are 110–120 V, 200–208 V, 220–240 V, 440–480 V and 550–600 V

[2] Thermal-magnetic circuit breaker ampere ratings recommended are approximate for average conditions, based on trip characteristics of Square D circuit breakers and NEC Table 430.52. Under some conditions, the next size larger switch or circuit breaker rating may be necessary to accommodate the motor starting current and is permitted by NEC 430.52(C)(1) Exception 2. High starting currents are anticipated with Design E and other energy efficient motors. For explanation of Code letter markings, see NEC 430.7(B). For Busway Plug-in units, see page 9-7.

[3] Switch size only is shown in table. Selected fuses should not exceed maximum percent of full-load current as given in NEC Table 430.52. Above 50 hp dc switches are not hp rated by UL as Motor Circuit Switches, but as General Use Switches only and are not necessarily capable of interrupting the max. operating overload current of a motor. See NEC 100 for definition of General Use Switch. When protecting a 3Ø, Design E energy efficient motor, the switch is required by NEC 430.109 to have a hp rating of not less than 1.4 times that of a motor rated 3–100 hp, or not less than 1.3 times that of a motor rated over 100 hp. Switches shown in this table do not necessarily comply with that requirement.

[4] NEC 430.22 for Single Motor, Smaller conductors may be permitted for light duty-cycle service per 430.22 (B) Exception No. 1. DC motors operating from rectified 1Ø power supply will require larger conductors per 430.22 (A) Exception No. 1. For motor-generator arc welders, see 630.11

[5] Thermal-magnetic breaker ampere ratings recommended are approximate for average conditions and based on trip characteristics of Square D circuit breakers and NEC Tables 430.7(B) and 430.52.

[6] Ordinary service for normal starting duty only, acceleration time of 10 sec. or less.

[7] Heavy service is jogging or plugging duty or cycling load with over 25 starts per hour or over 5 starts per minute. Energy efficient motors are polyphase motors defined in NEMA Standard MG1 and exhibit high starting current.

[8] 200 V motors are commonly used on 208 V services.

[9] 8 XHHW requires 3/4 in. conduit for 3W.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.91 Selection Tables for Conductors, Safety Switches and Thermal-Magnetic Circuit Breakers — Based on 2017 NEC® Tables 430.247, 430.248 and 430.250 (cont'd.)

Horsepower Ratings									Full Load Amperage *[10]*	Amperage of Thermal-Magnetic *[11]* Inverse Time Circuit Breaker			QMB and Heavy Duty Switch with Time Delay Fuses *[12]*	Minimum Size metallic Conduit 75° C, C Wire Field-Installed Sized for 125% FLA *[13]*		
Squirrel-Cage and Wound-Rotor Motors with Norm. Torque Characteristics Operating at Usual Speeds 3Ø 60 Hz				1Ø 10 Hz ac			Average Direct Current Motors Operating at Base Speed			For Motor Code Letter B to E		For Motor Code Letter F to V *[14]*		AWG kcmil	Conduit 3 W	
200 Vac *[17]*	230 Vac	460 Vac	575 Vac	115 Vac	200 Vac *[17]*	230 Vac	120 Vdc	240 Vdc		Ordinary Service *[15]*	Heavy Service and Energy Efficient *[16]*				THHN THWN XHHW	THW
					10				57.5 A							
							7-1/2		58.0 A							
			60						62.0 A							
20									62.1 A	100 A		175 A				
		50							65.0 A							
	25								68.0 A		150 A					
								20	72.0 A	110 A						
							10		76.0 A	125 A						
		60	75						77.0 A							
25									78.2 A	110 A	175 A	200 A		3	1 in.	1-1/4 in.
	30			7-1/2					80.0 A							
								25	89.0 A	125 A		225 A		2	1 in.	1-1/4 in.
30									92.0 A		200 A					
		75							96.0 A			250 A				
			100						99.0 A	150 A				1	1-1/4 in.	1-1/2 in.
				10					100.0 A							
	40								104.0 A		225 A	300 A				
								30	106.0 A	175 A				1/0	1-1/4 in.	1-1/2 in.
40									120.0 A		250 A		200 A			
		100							124.0 A							
			125						125.0 A		250 A	350 A		2/0	1-1/2 in.	1-1/2 in.
	50								130.0 A	200 A						
								40	140.0 A		300 A					
			150						144.0 A			400 A				
50									150.0 A					3/0	1-1/2 in.	2 in.
	60								154.0 A	225 A	350 A					
		125							156.0 A							
								50	173.0 A	250 A						
60									177.0 A		400 A	500 A		4/0	2 in.	2 in.
		150							180.0 A							
	75		200						192.0 A					250	2 in.	2 in.
75									221.0 A	300 A	450 A	600 A		300	2 in.	2-1/2 in.
		200							240.0 A							
			250						242.0 A	350 A	500 A	700 A	400 A	350	2-1/2 in.	2-1/2 in.
	100								248.0 A							
100									285.0 A		600 A					
			300						289.0 A	400 A		800 A		500	3 in.	3 in.
		250							302.0 A		700 A					
	125								312.0 A	450 A				(2) 3/0	(2) 2-1/2 in.	(2) 2 in.
			350						336.0 A	500 A		900 A				
125									359.0 A					(2) 4/0	(2) 2 in.	(2) 2 in.
	150								360.0 A	600 A	800 A	1000 A				
		300							361.0 A							
			400						382.0 A				600 A	(2)300	(2) 2 in.	(2) 2-1/2 in.
150		350							414.0 A		900 A	1200 A				
				500					472.0 A							
			400						477.0 A	800 A	1000 A			(2) 350	(2) 2-1/2 in.	(2) 2-1/2 in.
		200							480.0 A							
200									552.0 A		1200 A					
		500							590.0 A	900 A		1600 A	—	(3) 300	(3) 2 in.	(3) 2-1/2 in.
	250								602.0 A							

Contact your local Field Office for circuit breaker selection on constant horsepower multi-speed motors.

[10] Motor full load currents thru 200 hp are taken from NEC Tables 430.247, 248 and 250. Above 200 hp from UL 98. Select wire size, circuit breakers, or fuses on basis of hp rather than nameplate full load current per NEC 430.6. Do not use these values to select overload relay thermal units. See Digest pages 16-129—16152 for selection of thermal units when actual full load current is not known. Voltages listed are rated motor voltages. Corresponding nominal system voltages are 110–120 V, 200–208 V, 220–240 V, 440–480 V and 550–600 V

[11] Thermal-magnetic circuit breaker ampere ratings recommended are approximate for average conditions, based on trip characteristics of Square D circuit breakers and NEC Table 430.52. Under some conditions, the next size larger switch or circuit breaker rating may be necessary to accommodate the motor starting current and is permitted by NEC 430.52(C)(1) Exception 2. High starting currents are anticipated with Design E and other energy efficient motors. For explanation of Code letter markings, see NEC 430.7(B). For Busway Plug-in units, see page 9-7.

[12] Switch size only is shown in table. Selected fuses should not exceed maximum percent of full-load current as given in NEC Table 430.52. Above 50 hp dc switches are not hp rated by UL as Motor Circuit Switches, but as General Use Switches only and are not necessarily capable of interrupting the max. operating overload current of a motor. See NEC 100 for definition of General Use Switch. When protecting a 3Ø, Design E energy efficient motor, the switch is required by NEC 430.109 to have a hp rating of not less than 1.4 times that of a motor rated 3–100 hp, or not less than 1.3 times that of a motor rated over 100 hp. Switches shown in this table do not necessarily comply with that requirement.

[13] NEC 430.22 for Single Motor, Smaller conductors may be permitted for light duty-cycle service per 430.22 (B) Exception No. 1. DC motors operating from rectified 1Ø power supply will require larger conductors per 430.22 (A) Exception No. 1. For motor-generator arc welders, see 630.11

[14] Thermal-magnetic breaker ampere ratings recommended are approximate for average conditions and based on trip characteristics of Square D circuit breakers and NEC Tables 430.7(B) and 430.52.

[15] Ordinary service for normal starting duty only, acceleration time of 10 sec. or less.

[16] Heavy service is jogging or plugging duty or cycling load with over 25 starts per hour or over 5 starts per minute. Energy efficient motors are polyphase motors defined in NEMA Standard MG1 and exhibit high starting current.

[17] 200 V motors are commonly used on 208 V services.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Accessories see page 7-55 and Supplemental Digest Section 3
Optional Lugs see page 7-60 and Supplemental Digest Section 3
Dimensions see page 7-86
Enclosures see page 7-87

PowerPacT Motor Protector Circuit Breakers—Two Device Solutions

MicroLogic 2.2M and 2.3M trip units provide built-in thermal and magnetic protections. Use PowerPacT Motor Protect Circuit Breakers in two-device motor feeder solutions to provide protection against short-circuits, overloads, and phase unbalance.

- Protection settings are made using a rotary switch.
- Accept the same accessories and terminals as equivalent PowerPacT circuit breakers.
- UL, CSA, NOM, IEC, CCC certified, and UKCA and CE marked for global acceptance.

Table 7.92: H-Frame (150 A), J-Frame (250 A) and L-Frame (600 A) Electronic Motor Protector Circuit Breakers (UL Ratings)—Two Device Solutions *[10]*

Electronic Trip Unit Type	Frame	Sensor Rating	Trip Unit	Full Load Amperes Range (FLA)	Isd (x FLA)	Interrupting Rating			
						G	J	L	R
Standard *[11]*	H-Frame	30	2.2 M	14–25	5-13 x FLA	HGL36030M38X	HJL36030M38X	HLL36030M38X	HRL36030M38X
		50		14–42	5-13 x FLA	HGL36050M38X	HJL36050M38X	HLL36050M38X	HRL36050M38X
		100		30–80	5-13 x FLA	HGL36100M38X	HJL36100M38X	HLL36100M38X	HRL36100M38X
		150		58–130	5-13 x FLA	HGL36150M38X	HJL36150M38X	HLL36150M38X	HRL36150M38X
	J-Frame	250		114–217	5-13 x FLA	JGL36250M38X	JJL36250M38X	JLL36250M38X	JRL36250M38X
	L-Frame	400	2.3 M	190–348	5-13 x FLA	LGL36400M38X	LJL36400M38X	LLL36400M38X	LRL36400M38X
		600		312–520	5-13 x FLA	LGL36600M38X	LJL36600M38X	LLL36600M38X	LRL36600M38X

To select combination starters and motor controllers using MCP's meeting NEC Article 430, refer to Section 16.


PowerPacT H, J, and L-Frame Motor Protectors

Table 7.93: Application of PowerPacT H- and L-Frame Motor Protector Circuit Breaker

Hp Ratings of Induction Type Squirrel-Cage and Wound Rotor Motors 3Ø 60 Hz				Full Load Amperes *[12]*	PowerPacT Family Motor Protector Circuit Breaker Cat. No. *[13]*	Magnetic Trip Settings *[14]*	
200 Vac	230 Vac	460 Vac	575 Vac			MIN	MAX
		10		14	H( )L36030M38X	500%	1300%
	5			15.2	H( )L36030M38X		
			15	17	H( )L36030M38X		
5				17.5	H( )L36030M38X		
		15		21	H( )L36030M38X	500%	1300%
	7-1/2		20	22	H( )L36030M38X		
7-1/2				25.3	H( )L36030M38X		
		20	25	27	H( )L36050M38X		
	10			28	H( )L36050M38X	500%	1300%
			30	32	H( )L36050M38X		
10				32.2	H( )L36050M38X		
		25		34	H( )L36050M38X		
		30		40	H( )L36050M38X	500%	1300%
			40	41	H( )L36050M38X		
	15			42	H( )L36050M38X		
15				48.3	H( )L36100M38X		
		40	50	52	H( )L36100M38X	500%	1300%
	20			54	H( )L36100M38X		
20			60	62	H( )L36100M38X		
		50		65	H( )L36100M38X		
					J( )L36250M38X		
75				221	L( )L36400M38X	500%	1300%
		200		240	L( )L36400M38X		
			250	242	L( )L36400M38X		
	100			248	L( )L36400M38X		
100				285	L( )L36400M38X	500%	1300%
			300	289	L( )L36400M38X		
		250		302	L( )L36400M38X		
	125			312	L( )L36400M38X		
			350	336	L( )L36400M38X	500%	1300%
125				359	L( )L36600M38X		
	150			360	L( )L36600M38X		
		300		361	L( )L36600M38X		
			400	382	L( )L36600M38X	500%	1300%
150		350		414	L( )L36600M38X		
			500	472	L( )L36600M38X		
		400		477	L( )L36600M38X		
	200			480	L( )L36600M38X		




HJL36100M38X
Motor Circuit Protector

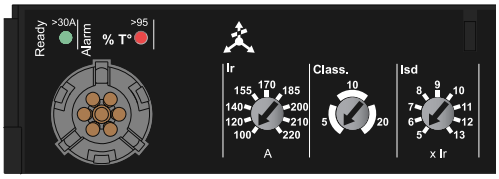

MicroLogic 2.2M and 2.3M Trip Units

Ii=4800A



[10] Two-device solutions (these electronic motor protector circuit breakers include short circuit and overload protection)
- 1 electronic motor circuit protector with a MicroLogic 2.2 M plus
- 1 contactor


[11] The standard trip unit offers Class 5, 10 and 20 and phase unbalance or phase loss protection.

[12] Motor full-load currents are taken from NEC Table 430.250. Select wire and circuit breakers on basis of horsepower rather than nameplate full-load current per NEC 430.6 (A) for general motor applications. Do not use these values to select overload relay thermal units. See Digest Section 14 for selection of thermal units when actual full load current is not known. The voltages listed are rated motor voltages. Corresponding nominal system voltages are 200–208, 220–240, 440–480 and 550–600 V.

[13] To complete catalog number, replace the blank with the appropriate rating (G, J, L or R).

[14] Only MIN and MAX settings are shown, intermediate settings are available on all circuit breakers.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

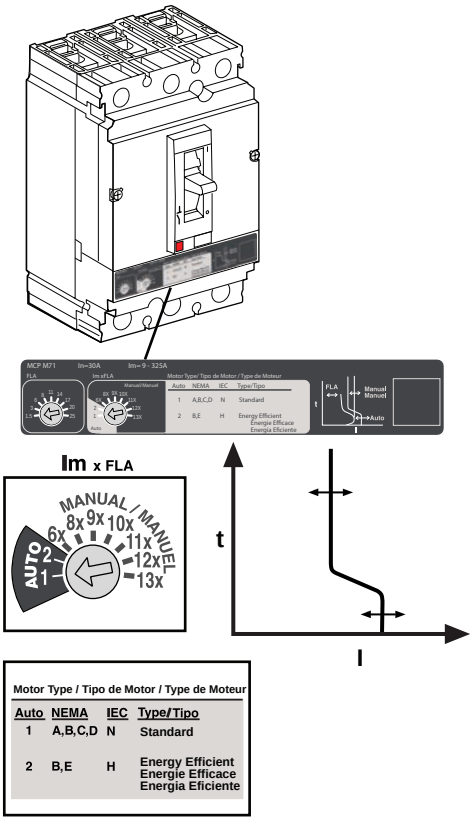

Motor Circuit Protection Selection

PowerPacT H- and J-frame electronic Motor Circuit Protectors (MCP) are magnetic-only instantaneous-trip circuit breakers. They are designed to offer short circuit protection and are National Electrical Code (NEC) compliant when installed as part of a combination controller having motor overload protection. MCP circuit breakers accept the same accessories and terminals as the equivalent thermal-magnetic circuit breakers.

Determine the hp rating from the nameplate of the motor. Select a MCP with an ampere rating recommended for the hp and voltage involved. When using the automatic settings the MCP microprocessor automatically adjusts the trip settings for both current and time to align with the start-up characteristic for the motor type, whether it is a standard or energy-efficient motor. This includes a dampening means to accommodate a transient motor in-rush current without nuisance tripping of the circuit breaker.

Table 7.94: H- and J-Frame Electronic Motor Circuit Protectors (MCP)

Frame	Sensor Rating	Full Load Amperes Range	Adjustable Instantaneous Trip Range	Suffix	J (See SCCR Cat. No. Table Below)	L (See SCCR Cat. No. Table Below)	R (See SCCR Cat. No. Table Below)
H-Frame	30 A	1.5–25 A	9–325 A	M71	HJL36030-M71	HLL36030-M71	HRL36030M71
	50 A	14–42 A	84–546 A	M72	HJL36050-M72	HLL36050-M72	HRL36050M72
	100 A	30–80 A	180–1040 A	M73	HJL36100-M73	HJL36100-M73	HRL36100M73
	150 A	58–130 A	348–1690 A	M74	HJL36150-M74	HLL36150-M74	HRL36150M74
J-Frame	250 A	114–217 A	684–2500 A	M75	JJL36250-M75	JLL36250-M75	JRL36250M75

Table 7.95: Maximum Rating or Setting of Motor Protective Devices *[15]*

Type of Motor		Percentage of Full-load Current	
		Setting	Not to Exceed*[16]*
A, B, C, D	Standard	800%	1300%
B, E	Energy Efficient	1100%	1700%

Table 7.96: MCP Selection by HP Ratings*[17]* **of Induction-type Squirrel-Cage and Wound-Rotor Motors***[18]*

3Ø60 Hz Voltages*[19]*				Full-Load Amperes	Suffix
200 Vac	230 Vac	460 Vac	575 Vac		
.5–5	.5–7.5	.75–15	1–20	1.5–25	M71
5–10	5–15	10–30	15–40	14–42	M72
10–25	15–30	25–60	30–75	30–80	M73
20–40	25–50	50–100	60–125	58–130	M74
40–60	50–75	100–150	125–200	114–217	M75

Short Circuit Current Rating (SCCR)

Tested to meet NEC and UL508A requirements for short circuit current ratings as part of an approved combination controller.

Table 7.97: Short Circuit Current Ratings (SCCR)

Contactor/Starter	Interrupting Rating					
	J			L		
	200–240 Vac	480 Vac	600 Vac	200–240 Vac	480 Vac	600 Vac
Tesys D-line and F-line	100 kA	65 kA	25 kA	125 kA	100 kA	50 kA
NEMA Type S	100 kA	65 kA	25 kA	125 kA	100 kA	50 kA

See www.us.schneider-electric.us for specific ratings and combination ID numbers.

To select combination starters and motor controllers using MCP's Meeting NEC Article 430, refer to Section 16.

Accessories see page 7-55
Lugs see page 7-60
Dimensions see page 7-86
Enclosures see page 7-87

[15] Based on 2015 NEC Table 430.52.
[16] See NEC Exception No. 1 to Table 430.52. The NEC 1300% maximum setting may be inadequate for instantaneous trip circuit breakers to withstand current surges typical of the magnetization current of autotransformer type reduced voltage starters, or open transition wye-delta starters during transfer from "start" to "run," constant hp multi-speed motors, and motors labeled "high efficiency."
[17] Based on 2005 NEC Table 430.250.
[18] Per NEC 430.3, part-winding motors should select two circuit breakers, each at not more than one-half the allowable trip setting for the horsepower rating. The two circuit breakers should operate simultaneously as a disconnecting means per NEC 430.103.
[19] Listed voltages are rated motor voltages. Corresponding system voltages are 200 Vac, 220–240 Vac, 440–480 Vac and 550–600 Vac. Select wire and circuit breakers based on horsepower rather than nameplate full-load current per NEC 430.6 (A) for general motor applications.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

H-, J-Frame Motor Circuit Protectors

Table 7.98: Application of PowerPacT™ H-Frame and J-Frame Electronic Motor Circuit Protectors (MCP)

Horsepower Rating of Induction-Type Squirrel-Cage and Wound-Rotor Motors 3Ø 60 Hz					NEC Full Load Amperes	PowerPacT H-Frame and J-Frame Electronic MCP	
Starter Size	200 Vac	230 Vac	480 Vac	575 Vac			
				1/2	0.9 A	HJL36030M71 and HLL36030M71 1/2–10 hp	
			1/2		1.1 A		
				3/4	1.3 A		
			3/4	1	1.7 A		
			1		2.1 A		
		1/2			2.2 A		
				1-1/2	2.4 A		
	1/2				2.5 A		
				2	2.7 A		
			1-1/2		3 A		
00		3/4			3.2 A		
			2		3.4 A		
	3/4				3.7 A		
				3	3.9 A		
		1			4.2 A		
	1				4.8 A		
			3		4.8 A		
		1-1/2			6 A		
				5	6.1 A		
		2			6.8 A		
	1-1/2				6.9 A		
			5		7.6 A		
	2				7.8 A		
0				7-1/2	9 A		
		3			9.6 A		
	3		7-1/2	10	11 A		
			10		14 A		HJL36050M72 and HLL36050M72 10–25 hp
		5			15.2 A		
				15	17 A		
1	5				17.5 A		
			15		21 A		
		7-1/2		20	22 A		
	7-1/2				25.3 A		
			20	25	27 A		
2		10			28 A		
				30	32 A	HJL36100M73 and HLL36100M73 15–50 hp	
	10				32.2 A		
			25		34 A		
			30		40 A		
				40	41 A		
		15			42 A		
	15				48.3 A		HJL36150M74 and HLL36150M74 30–100 hp
3			40	50	52 A		
		20			54 A		
	20			60	62 A		
			50		65 A		
		25			68 A		
			60	75	77 A		
	25				78.2 A		
		30			80 A		
	30				92 A		
4			75		96 A		
				100	99 A		
		40			104 A		
	40				120 A	JJL36250M75 and JLL36250M75 50–150 hp	
			100		124 A		
				125	125 A		
		50			130 A		
				150	144 A		
	50				150 A		
5		60			154 A		
			125		156 A		
	60				177.1 A		
			150		180 A		
		75		200	192 A		
	75				221 A		
			200		240 A		
		100			248 A		

*Shaded area is not covered by J-frame electronic motor circuit protector.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT Accessories

Table 7.99: Electrical Accessories

Accessory	Description		Rated Voltage		B-, H-, J-, and L-Frame					M-, P-, and R-Frame	
					Factory Installed Cat. Suffix	B-Frame		H- and J-Frame	L-Frame	Factory Installed Cat. Suffix	Field-Installable Cat. No.
						Field-Installable Cat. No.	Field-Installable Pre-Wired Cat. No.	Field-Installable Cat. No.	Field-Installable Cat. No.		
Auxiliary and Alarm Switches (OF, SD, SDE)  B-Frame  H-, J-, L-, M-, P, and R-Frame	Provides circuit breaker contact status. Note: The location of the accessory in the circuit breaker determines its function.	Standard Min Load = 10mA with 24V	1 auxiliary switch (OF) 1a1b		AA	LV426950	LV426951	1x S29450	1x S29450	AA	1x S29450
			2 auxiliary switch (OF) 2a2b		AB	—	—	2x S29450	2x S29450	AB	2x S29450
			3 auxiliary switch (OF) 3a3b		AC	—	—	—	3x S29450	AC	3x S29450
			Alarm Switch (SD) 1a1b		BC	LV426950	LV426952	S29450	S29450	BC	S29450
			Overcurrent trip switch (SDE) 1a1b		BD	—	—	—	S29450	BD	S29450
			Consisting of:	OF Switch	—	—	—	S29450	—	—	—
				SDE Adapter	—	—	—	S29451	—	—	—
			Alarm switch and Overcurrent trip switch		BE	—	—	—	2x S29450	BE	2x S29450
			Consisting of:	OF Switch	—	—	—	2x S29450	—	—	—
				SDE Adapter	—	—	—	S29451	—	—	—
			Auxiliary Switch/Alarm Switch/ Adapter (OF/SD/SDE) Kit		—	—	—	—	—	—	S33801 *[1]*
		Low Level Min Load = 1mA with 24V	One auxiliary switch (OF) 1a1b		AE	—	—	S29452	S29452	AE	S29452
			Two auxiliary switches (OF) 2a2b		AF	—	—	2x S29452	2x S29452	AF	2x S29452
			3 auxiliary switches (OF) 3a3b		AG	—	—	—	3x S29452	AG	3x S29452
			Alarm Switch (SD) 1a1b		BH	—	—	S29452	S29452	BH	S29452
			Overcurrent trip switch (SDE) 1a1b		BJ	—	—	—	S29452	BJ *[2]*	S29452
			Consisting of:	OF Switch	—	—	—	S29452	—	—	—
				SDE Adapter	—	—	—	S29451	—	—	—
			Alarm switch and Overcurrent trip switch		BK	—	—	—	2x S29452	BK *[2]*	2x S29452
			Consisting of:	OF Switch	—	—	—	2x S29452	—	—	—
				SDE Adapter *[3]*	—	—	—	S29451	—	—	—
Shunt Trip (MX)  B-Frame  H-, J-, and L-Frame	Trips the circuit breaker from a remote location by means of a trip coil energized from a separate supply voltage circuit.		AC	24	SK	LV426841	LV426861	P29384	P29384	SK	S33659
				48	SL	LV426842	LV426862	P29385	P29385	SL	S33660
				110–130	SA	LV426843	LV426863	P29386	P29386	SA	S33661
				220–240	SD, SF	—	—	—	—	SC	S33662
				208–277	SD	LV426844	LV426864	P29387	P29387	SD	S33663
				380–480	SH	LV426846	LV426866	P29388	P29388	SH	S33664
				525–600	SJ	—	—	P29389	P29389	—	—
			DC	12	SN	LV426850	—	P29382	P29382	SN	—
				24	SO	LV426841	LV426861	P29390	P29390	SK	S33659
				30	SU	—	—	P29391	P29391	SK	S33659
				48	SP	LV426842	LV426862	P29392	P29392	SL	S33660
				60	SV	—	—	P29383	P29383	SL	S33660
				125	SR	LV426843	LV426863	P29393	P29393	SA	S33661
				250	SS	LV426844	LV426864	P29394	P29394	SC	S33662
 Undervoltage Trip (MN) H-, J-, and L-Frame	Instantaneously opens the circuit breaker when the under-voltage trip supply voltage drops to a value between 35% and 70% of its rated voltage. Closing is allowed when the supply voltage of the undervoltage trip reaches 85% of rated voltage.		AC	24	UK	LV426801	LV426821	P29404	P29404	UK	S33668
				48	UL	LV426802	LV426822	P29405	P29405	UL	S33669
				110–130	UA	LV426803	LV426823	P29406	P29406	UA	S33670
				220–240	UC	LV426804	LV426824	—	—	UC	S33671
				208–277	UD	LV426805	LV426825	P29407	P29407	—	—
				380–415	UF	LV426806	LV426826	—	—	—	—
				380–480	UH	LV426807	LV426827	P29408	P29408	UH	S33673
				525–600	UJ	—	—	P29409	P29409	—	—
			DC	12	UN	—	—	P29402	P29402	—	—
				24	UO	LV426801	LV426821	P29410	P29410	UK	S33668
				30	UU	—	—	P29411	P29411	UK	S33668
				48	UP	LV426802	LV426822	P29412	P29412	UL	S33669
				60	UV	—	—	P29403	P29403	UL	S33669
				125	UR	LV426803	LV426823	P29413	P29413	UA	S33670
				250	US	LV426815	LV426835	P29414	P29414	UC	S33671
Time Delay Unit 	Undervoltage trip with externally mounted adjustable time delay unit for UVR of 0.5, 0.9, 1.5, 3.0 seconds before circuit breaker trips		AC/DC	48	—	S33680 *[4]*	—	S33680 *[4]*	S33680 *[4]*	—	S33680 *[4]*
				100–130	—	S33681 *[4]*	—	S33681 *[4]*	S33681 *[4]*	—	S33681 *[4]*
				220–250	—	S33682 *[4]*	—	S33682 *[4]*	S33682 *[4]*	—	S33682 *[4]*
				380–480	—	—	—	—	—	—	S33683 *[4]*
	Undervoltage trip with externally mounted non-adjustable time delay unit of 0.25 sec before circuit breaker trips.		AC/DC	48	—	S29426 *[4]*	—	S29426 *[4]*	S29426 *[4]*	—	—
				100–130	—	—	—	—	—	—	S33684 *[4]*
				200–250	—	—	—	—	—	—	S33685 *[4]*
				220–240	—	S29427 *[4]*	—	S29427 *[4]*	S29427 *[4]*	—	—

[1] P-frame drawout circuit breaker only.
[2] Not available on electrically operated P-frame.
[3] SDE Adapter used for H- and J-frame only.
[4] Field-installable kit includes time delay module only. Order undervoltage trip separately.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Motor Operators


Motor Operators for H-, J-, and L-Frame Circuit Breakers

- Circuit-breaker indications and information remain visible and accessible, including trip-unit settings and indications
- Suitability for isolation is maintained and padlocking remains possible
- All termination connection (fixed, plug-in/withdrawable) possibilities are maintained
- Double insulation of the front face

Description		Rated Voltage		Factory Installed Cat. No. Suffix	Field-Installable Kit		
					H-Frame *[5]* Cat. No.	J-Frame Cat. No.	L-Frame 600 A Cat. No.
 Motor Operator	Standard motor for electrically-operated circuit breakers *[6]*	AC	48–60	ML	S29440	S31548	S432639
			110–130	MA	S29433	S31540	S432640
			208–277 220–240	MD	S29434	S31541	S432641
			380–415	MF	—	—	S432642
			440–480	MH	S29435	S31542	S432647
		DC	24–30	MO	S29436	S31543	S432643
			48–60	MV	S29437	S31544	S432644
			110–130	MR	S29438	S31545	S432645
			250	MS	S29439	S31546	S432646
	Communicating motor for electrically-operated circuit breakers *[7]*	AC	220–240	NC	S429441	S431549	S432652
	Locking device	Mounting hardware		—	—	—	S32649
		Ronis lock		—	S41940	S41940	S41940
		Profalux lock		—	S42888	S42888	S42888
		Mounting hardware plus Ronis lock		—	S429449	S429449	—
	Operations counter			—	—	—	S32648
	Adapter for I-Line circuit breaker			—	S37420	S37420	—

Spring-Charging Motors for Electrically-Operated P-Frame Circuit Breakers


Automatically charges the spring mechanism for closing the P-frame circuit breaker and also recharges the spring mechanism when the circuit breaker is in the ON position. Instantaneous reclosing of the circuit breaker is thus possible following circuit breaker opening.

Description		Rated Voltage		Factory Installed Cat. No. Suffix	P-Frame (For Field Replacement Only) Spring Charging Motor Cat. No.	Replacement Coils Opening/Closing Coil Cat. No.
 Spring-Charging Motor	Standard motor for electrically-operated circuit breakers. Factory-installed includes motor and opening/closing coils.	AC	48	ML	S47391	S33660
			100–130	MA	S47395	S33661
			220–240	MC	S47396	S33662
			380–415	MF	S47398	S33664
		DC	24–30	MO	S47390	S33659
			48–60	MV	S47391	S33660
			110–130	MR	S47392	S33661
			200–250	MS	S47393	S33662
	Communicating motor mechanism for electrically operated circuit breakers. Factory-installed includes motor and opening/closing coils.	AC	48	NL	S47391	S33034
			100–130	NA	S47395	S33035
			220–240	NC	S47396	S33036
			380–415	NF	S47398	S33038
		DC	24–30	NO	S47390	S33033
			48–60	NV	S47391	S33034
			110–130	NR	S47392	S33035
			200–250	NS	S47393	S33036


[5] Not available in H-frame 2P modules.
[6] Factory and field-installed standard motor operators for H- and J-frame circuit breakers require the SDE switch and SDE adapter (both included).
Factory and field-installed standard motor operators for L-frame circuit breakers require the SDE switch (included).
[7] Installation requires BSCM Modbus SL/ULP with NSX Cord. For ordering information see page 7-68 .

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Rotary Handles



Direct-Mounted Rotary Handle



Door-Mounted Rotary Handle


Device		Description	B-Frame		H- and J-Frame *[8]*		L-Frame		P-Frame
			Factory Installed Cat. No. Suffix	Field-Installable Cat. No.	Factory Installed Cat. No. Suffix	Field-Installable Cat. No.	Factory Installed Cat. No. Suffix	Field-Installable Cat. No.	Factory Installed Cat. No. Suffix
Direct Mounted	Standard black handle	Operating mechanism kit	RD10	LV426930	RD10	S29337	RD10	S32597	RD10
	Standard black handle with	Two early-break and two early make switches	—	—	—	—	—	—	RD16
		One early-break switch	—	—	RD12	S29337 + S29345	RD12	S32597 + S32605	—
		Two early-make switches	—	—	RD13	S29337 + S29346	RD13	S32597 + S29346	—
	Red handle on yellow bezel	Operating mechanism kit	RD20	LV426931	RD20	S29339	RD20	S32599	—
		One early-break switch	—	—	RD22	S29339 + S29345	RD22	S32599 + S32605	—
		Two early-make switches	—	—	RD23	S29339 + S29346	RD23	S32599 + S29346	—
	MCC conversion accessory		—	—	—	S429341	—	S32606	—
	CNOMO conversion accessory		—	—	—	29342	—	S32602	—
Door Mounted	Standard black handle	Operating mechanism kit	—	LV426932	RE10	S29338	RE10	S32598	RE10
	Standard black handle with:	Two early-break and two early make switches	—	—	—	—	—	—	RE16
		Two early make switches	—	—	RE13	S29338 + S29346	RE13	S32598 + S29346	—
	Red handle on yellow bezel	Operating mechanism kit	—	LV426933	RE20	S29340	RE20	S32600	—
Rotary Handle Replacement Kit			—	—	—	—	—	—	S33875
Telescoping			—	—	RT10	S29343	RT10	S32603	—
Accessories	Key lock adapter		—	—	—	S429344	—	S32604	—
	Key locks	Ronis 1351.500	—	—	—	S41940	—	S41940	—
		Profalux KS5 B24 D4Z	—	—	—	S42888	—	S42888	—
		2 Ronis keylocks with 1 key	—	—	—	S41950	—	S41950	—
		2 Profalux keylocks with 1 key	—	—	—	S42878	—	S42878	—
	Indication Auxiliary Switch	One early-break switch	—	—	—	S29445	—	S32605	—
		Two early-make switches	—	—	—	S29346	—	S29346	—


Refer to Digest Section 8—Operating Mechanisms for additional operating mechanism options.

[8] Not available in H-frame 2P modules.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Locks, Installation Accessories, and Rear Connectors


Removable Padlock Attachment


Fixed Padlock Attachment



Interlocking with Toggle Control


Table 7.100: Locks, Interlocking


Device	Description		B- Frame		H- and J- Frame		Q- Frame		L- Frame	M- and P- Frame		R- Frame	
			Factory-Installed Cat. No. Suffix	Field-Installable Cat. No.	Factory-Installed Cat. No. Suffix	Field-Installable Cat. No.	Factory-Installed Cat. No. Suffix	Field-Installed Cat. No.	Field-Installable Cat. No.	Factory-Installed Cat. No. Suffix	Field-Installable Cat. No. *[9]*	Factory-Installed Cat. No. Suffix	Field-Installable Cat. No.
Handle Padlocking Device	Removable (lock OFF only)		—	S29370	—	S29370	—		S29370	—	S44936	—	S33996
	Fixed (lock OFF or ON)		YP	LV426905 LV426907 (I-Line)	YP	HJPA	YP	QBPA	S32631	YP	S32631	YP	S32631
	Fixed (lock OFF only)*[10]*		YQ	LV426906 LV426908 (I-Line)	YQ	HJPAF	YQ	QBPAF	NJPAF	YQ	MPRPAF	YQ	MPRPAF
	Fixed (lock OFF only)–2P		—	—	YQ	H2PHLA	YQ	—	—	—	—	—	—
Interlocking (Not UL listed)	Mechanical for circuit breakers with rotary handles *[11]*		—	—	—	S29369	—	—	S32621	—	S33890	—	—
	Mechanical for circuit breakers with toggles *[11]*		—	LV426909	—	S29354	—	QBMIK	S32614	—	—	—	—
Key Locking	Provision only, vertical mount, 1 or 2 locks	Kirk	—	—	—	—	—	—	—	JA	—		—
	Provisions only, vertical mounting one key interlock including padlock provision, open position only.	Kirk	—	—	—	—	—	—	—	JE *[12]* *[13]*	—	JE *[13]*	—
	Provision only, horizontal mount 1 lock, M- and P-frame 1 or 2 locks, R-frame	Kirk	—	—	—	—	—	—	—	JK	—	JK	—
		Ronis	—	—	—	—	—	—	—	—	—	JB	—
		Profalux	—	—	—	—	—	—	—	—	—	JD	—
	Provision and 1 lock, vertical mount	Kirk	—	—	—	—	—	—	—	JG	—	—	—
	Provision and 1 lock, horizontal mount	Kirk	—	—	—	—	—	—	—	JL	—	JL	—
		Ronis	—	—	—	—	—	—	—	—	—	JC	—
		Profalux	—	—	—	—	—	—	—	—	—	JF	—
	Provision and 2 locks keyed alike	Kirk	—	—	—	—	—	—	—	JN	—	JN	—
	Provision and 2 locks keyed differently	Kirk	—	—	—	—	—	—	—	JP	—	JP	—

[9] For Drawout breakers use only horizontal keylock. Not available for PowerPacT P with motor operator.
[10] Not available on HD and HG 2P modules.
[11] Not available in M frame or HD and HG 2P modules.
[12] Not available on M-frame.
[13] Not available on I-Line.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026


Phase Barriers



Handle Rubber Boot


Front Panel Escutcheons


DIN Rail Mounting Kit


Visi-Trip H-, J- Frame


Visi-Trip L- Frame


Door Escutcheon



Terminal Covers


Table 7.101: Installation Accessories for B-, H-, J-, and L- Frame Circuit Breakers

Description	Field-Installable Cat. No.		
	B-Frame	H- and J- Frame	L- Frame
Front Panel Escutcheon for Toggle Breakers	—	S29315	32556
Front Panel Escutcheon for Rotary Handle, Motor Operator, or extended escutcheon	—	S29317	S32558
Phase Barriers (set of 6)	LV426920	S29329	32570
Handle Rubber Boot *[14]*	—	S29319	S32560
Sealing Accessories (for front cover screws)	S29375	S29375	S29375
DIN rail mounting kit (requires 15 mm depth on a 35 mm DIN rail) *[14]*	Standard	S29305	—
DIN rail adapter	Standard	—	—
Handle Extensions (set of 5)	—	S29313	S432553
Rear Insulation Kit (2P)	LV426921	—	—
Rear Insulation Kit (3P)	LV426922	—	—
Rear Insulation Kit (4P)	LV426923	—	—
Terminal Extensions-Spreaders (3P)	LV426940	—	—
Terminal Extensions-Spreaders (4P)	LV426941	—	—
5 N-m Torque Limiting Bit, Set of 6	LV426992	—	—
5 N-m Torque Limiting Bit, Set of 8	LV426993	—	—
9 N-m Torque Limiting Bit, Set of 6	LV426990	—	—
9 N-m Torque Limiting Bit, Set of 8	LV426991	—	—
Visi-Trip qty 1		VTRIPHJ	VTRIPL
Visi-Trip qty 5		VTRIPHJ05	VTRIPL05
Visi-Trip qty 10		VTRIPHJ10	VTRIPL10

Table 7.102: Installation Accessories for M-, P-, and R-Frame Circuit Breakers

Description		Frame	Field-Installable Cat. No.
Door Escutcheon	Accessory Cover	M-, P-Frame	S33718
		R-Frame	S33929
	Toggle Handle	M-, P-Frame	S33717
	Drawout	P-Frame	S33857
Terminal Covers	Short lug cover 3P	P-Frame	S33932
	Short lug cover 4P		S33933
	Long lug cover 3P		S33934
	Long lug cover 4P		S33935
Replacement Handle	Standard	R-Frame	S33997
	Standard Short	M-, P-Frame	S46998
	Long	M-, P-Frame	S46996

Table 7.103: H-, J-, and L-Frame Rear Connections

Device		Description	H-Frame				J-Frame				L-Frame			
			Poles	Factory-Installed Termination No.		Field-Installable Cat. No.	Poles	Factory-Installed Termination No.		Field-Installable Cat. No.	Poles	Factory-Installed Termination No.		Field-Installable Cat. No.
 Rear Connection	Mixed Rear Connection Kit *[15]*		2	S		—	2	S		—	3	S		S32477
			3	S		S37432	3	S		S37437	4	S		S32478
	Consisting of:	Short rear connections (set of 2)	2 or 3	—	2x	S37433	2 or 3	—	2x	S37438	3	—	2x	S432475
		Long rear connections (set of 2)		—		S37434		—		S37439 *[16]*		—	2x	S432476
		Short terminal cover (3P)	3	—		S37436	3	—		S37440	3	—	2x	S32562
		Short terminal cover (4P)	4	—		—	—	—		—	4	—	2x	S32563

[14] Not available in HD and HG 2P modules.
[15] Kit contains 4 short rear connections, 2 long rear connections (4 long rear connections for 4P), hardware, and 2 terminal covers.
[16] For use with 3P circuit breakers only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026


Mechanical Lugs

Table 7.104: Mechanical Lug Kits for B-Frame Circuit Breakers *[17]*

Description	Circuit Breaker Application			Ampere Rating	Number of Wires Per Lug and Wire Range	Factory-Installed Cat. Suffix	Field-Installable Cat. No.	Qty Per Kit
	Standard	Ampere Rating	Optional					
Al Lugs for Use with Al or Cu Wire			BD BG BJ	15-125 A	(1) 14-2/0 AWG Al or Cu	LH	LV426966	2
			BD BG BJ	15-125 A	(1) 14-2/0 AWG Al or Cu	LH	LV426967	3
Cu Lugs for Use with Cu Wire Only			BD BG BJ	15-125 A	(1) 14-1/0 AWG Cu	LC	LV426964	2
			BD BG BJ	15-125 A	(1) 14-1/0 AWG Cu	LC	LV426965	3
EverLink Lug	BD BG BJ (1P)	15 - 125 A			(1) 14-3/0 AWG Cu	—	—	—
	BD BG BJ (2P)	15 - 125 A			(1) 14-3/0 AWG Cu	—	—	—
	BD BG BJ (3P)	15 - 125 A			(1) 14-3/0 AWG Cu	—	—	—
	BD BG BJ (4P)	15 - 125 A			(1) 14-3/0 AWG Cu	—	—	—
EverLink Lug with Control Wire Terminal		15 - 125 A	BD BG BJ (2P)		(1) 14-3/0 AWG Cu	LU, LV, or LW *[18]*	LV426973	1
		15 - 125 A	BD BG BJ (3P)		(1) 14-3/0 AWG Cu	LU, LV, or LW *[18]*	LV426974	1
		15 - 125 A	BD BG BJ (4P)		(1) 14-3/0 AWG Cu	LU, LV, or LW *[18]*	LV426975	1

Table 7.105: Mechanical Lug Kits for H- and J-Frame Circuit Breakers *[17]*


Description	Circuit Breaker Application			Ampere Rating	Number of Wires Per Lug and Wire Range	Kit Cat. No.	Qty Per Kit
	Standard	Ampere Rating	Optional				
Al Lugs for Use with Al or Cu Wire	HD, HG, HJ, HL	15–150 A			(1) 14–3/0 AWG Al or Cu	AL150HD	3
	JD, JG, JJ, JL	150–175 A			(1) 4-4/0 AWG Al or Cu	AL175JD	3
	JD, JG, JJ, JL	200–250 A	JD,JG,JJ,JL	150–175 A	(1) 3/0–350 kcmil Al or Cu	AL250JD	3
Cu Lugs for Use with Cu Wire Only			HD,HG,HJ,HL	15–150 A	(1) 14–2/0 AWG Cu	CU150HD	3
			JD,JG,JJ,JL	150–250 A	(1) 1/0–300 kcmil Cu	CU250JD	3
Control Wire Terminal for H-frame lug kit						S37423	2
Control Wire Terminal for J-frame lug kit						S37424	2



AL250JD
J-Frame Lug



AL400L6IK3




AL600LS52K3


L-Frame Lug

Table 7.106: Mechanical Lug Kits for L-Frame Circuit Breakers *[19]*

Description	Circuit Breaker Application				Number of Wires Per Lug and Wire Range	Kit Cat. No.	Qty Per Kit
	Ampere Rating	Poles	Unit Mount	I-Line			
Al Lugs for Use with Al or Cu Wire	250	3	X	X	(1) 2 AWG–500 kcmil Al (1) 2 AWG–600 kcmil Cu	AL400L61K3	3
		4	X	—		AL400L61K4	4
	400/600	3	X	—	(2) 2/0 AWG–500 kcmil Al or Cu	AL600LS52K3	3
		4	X	—		AL600LS52K4	4
	400/600	3	X	X	(2) 3/0 AWG–500 kcmil Al or Cu	AL600LF52K3	3
Cu Lugs for Use with Cu Wire Only	250	3	X	X	(1) 2 AWG–600 kcmil Cu	CU400L61K3	3
		4	X	—		CU400L61K4	4
	400/600	3	X	—	(2) 2/0 AWG–500 kcmil Cu	CU600LS52K3	3
		4	X	—		CU600LS52K4	4
	400/600	3	X	X	(2) 3/0 AWG–500 kcmil Cu	CU600LF52K3	3




AL800M23K




AL800P6K


M- and P-Frame Lugs
(800 A and below)



AL800P6K



AL1200P6KU



AL1200P25K
P-Frame Lugs (Above 800 A)


Table 7.107: Mechanical Lug Kits for M-, P- and R-Frame Circuit Breakers *[20]*


Description	Circuit Breaker Application				Wires per Lug and Wire Range	Cat. No.	Lugs Per Kit
	Standard	Rating	Optional	Rating			
Al Lugs for AL or Cu Wire	M-Frame, P-Frame	800 A	—	800 A	(3) 3/0 AWG-500 kcmil	AL800M23K	3
						AL800M23K4	4
		1200 A	MG, MJ, PG, PJ, PK, PL	800 A	(4) 3/0 AWG-500 kcmil	AL1200P24K *[21]*	1
		—	MG, MJ, PG, PJ, PK, PL	800 A	(2) 3/0 AWG-600 kcmil	AL800P6K *[21]*	3
						AL800P6K4 *[21]*	4
		—	MG, MJ, PG, PJ, PK, PL	800 A	(2) 3/0 AWG-750 kcmil 750 kcmil: compact AL only	AL800P7K *[21]*	3
						AL800P7K4 *[21]*	4
	P-Frame	1200 A	PG, PJ, PK, PL	800 A	(4) 3/0 AWG-500 kcmil	AL1200P25K *[22]*	3
						AL1200P25K4 *[22]*	4
		—	PG, PJ, PK, PL	800–1200 A	(3) 350-600 kcmil	AL1200P6KU *[22]*	3
						AL1200P6KU4 *[22]*	4
	PG,PJ,PL	—	PG, PJ, PK, PL	1200 A	(3) 3/0 AWG-750 kcmil 750 kcmil: compact AL only	AL1200P7KU *[22]*	3
						AL1200P7KU4 *[22]*	4
	R-Frame	1200 A	I-Line	—	(4) 3/0 AWG-600 kcmil	AL1200R53K	1
		2500 A	Unit Mount	—	(1) 3/0 AWG-750 kcmil	AL2500RK *[23]*	2
Cu Lugs for Cu Wire Only *[24]*	M-Frame, P-Frame	—	PJ	100–150 A	(1) 1-1/0 AWG	CU250P1K *[25]*	3
		800 A	MG, MJ, PG, PJ, PK, PL	—	(3) 3/0 AWG-500 kcmil	CU800M23K	3
						CU800M23K4	4
		1200 A	MG, MJ, PG, PJ, PK, PL	800–1200 A	(4) 3/0 AWG-500 kcmil	CU1200P24K *[21]*	1
	P-Frame	1200 A	PG, PJ, PK, PL	800–1200 A	(4) 3/0 AWG-500 kcmil	CU1200P25K *[22]*	3
						CU1200P25K4	4
	R-Frame	1200 A	I-Line	—	(4) 3/0 AWG-500 kcmil	CU1200R53K	1


[17] For terminal nuts/bus bar connections see page 7-63.
[18] LU = ON end only, LV = OFF end only, LW = BOTH ends
[19] Lug kits for Legacy L-frame circuit breakers can be found in Supplemental Digest Section 11 (i.e. LA, LH circuit breakers).
[20] For lug with a tapped hole for control wire, add a "T" before the "K" in the catalog number (for example, AL800P6TK).
[21] Does not fit onto ON end of unit-mount P-frame circuit breakers.
[22] For unit-mount circuit breaker only.
[23] All unit-mount R-frame circuit breakers require terminal pads for mounting lugs of any type.
[24] Not available with tapped hole for control wire.
[25] This lug can only be used on low amp PJ frame breakers where the Instantaneous setting must not be turned OFF. The cables must be laced with rope per lug instructions.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Compression Lugs


J-Frame Compression Lug


P-Frame Compression Lug Kit


R-Frame Compression Lug Kit

A = Crimp lugs or PDC connectors extension past end of circuit breaker




Table 7.108: Compression Lug Kits for PowerPacT™ Circuit Breakers

Description	Circuit Breaker Type	Ampere Rating	System Range	Mounting Type	Dimension A (in)	Max. Lugs per Terminal	Cat. No.	Qty. Per Kit
Compression Lug Kits for B-Frame Circuit Breakers								
Aluminum Compression Lug Kits	B-frame	125 A	8-1/0 AWG Al or Cu	Unit/I-line *[26]*	1.3	1	LV426988	2
		125 A	8-1/0 AWG Al or Cu		1.3	1	LV426989	3
Copper Compression Lug Kits	B-frame	125 A	6-1/0 AWG Cu		1.4	1	LV426986	2
		125 A	6-1/0 AWG Cu		1.4	1	LV426987	3
Compression Lug Kits for H-Frame and J-Frame Circuit Breakers								
Aluminum Compression Lug Kits	H-frame	60 A	6–2 AWG Al or Cu	Unit/I-line *[26]*	1.2	1	YA060HD	3
		150 A	1/0–4/0 AWG Al or Cu		2.5	1	YA150HD	3
	J-frame	150 A	1–3/0 AWG Al or Cu		1.2	1	YA150JD	3
		250 A	3/0–350 kcmil Al or Cu		2.5	1	YA250J35	3
Copper Compression Lug Kits	H-frame	60 A	6–1/0 AWG Cu		1.0	1	CYA060HD	3
		150 A	4–2/0 AWG Cu		1.2	1	CYA150HD	3
	J-frame	150 A	6–1/0 AWG Cu		0.7	1	CYA150JD	3
		250 A	2/0–300 kcmil Cu		1.1	1	CYA250J3	3
Compression Lug Kits for L-Frame Circuit Breakers								
Aluminum Compression Lug Kits	L-frame	250 A	4-300 kcmil Al/Cu	Unit/I-line *[26]*	1.2	1	YA400L31K3	3
		400 A	4-300 kcmil Al/Cu		2.5	2	YA600L32K3	6
		250 A	2/0-500 kcmil Al/Cu			1	YA400L51K3	3
		600 A	2/0-500 kcmil Al/Cu			2	YA600L52K3	6
		400 A	500-750 kcmil Al 500 kcmil Cu			1	YA400L71K3	3
		250 A	4-300 kcmil Al/Cu			1	YA400L31K4	4
		400 A	4-300 kcmil Al/Cu			2	YA600L32K4	8
		250 A	2/0-500 kcmil Al/Cu			1	YA400L51K4	4
		600 A	2/0-500 kcmil Al/Cu		1.2	2	YA600L52K4	8
		400 A	500-750 kcmil Al 500 kcmil Cu		2.5	1	YA400L71K4	4
Copper Compression Lug Kits	L-frame	250 A	2/0-300 kcmil Cu	Unit/I-line *[26]*	1.2	1	CYA400L31K3	3
		400 A	2/0-300 kcmil Cu		2.5	2	CYA600L32K3	6
		250 A	250-500 kcmil Cu			1	CYA400L51K3	3
		600 A	250-500 kcmil Cu			2	CYA600L52K3	6
		250 A	2/0-300 kcmil Cu			1	CYA400L31K4	4
		400 A	2/0-300 kcmil Cu			2	CYA600L32K4	8
		250 A	250-500 kcmil Cu			1	CYA400L51K4	4
		600 A	250-500 kcmil Cu			2	CYA600L52K4	8
Compression Lug Kits for M-Frame, P-Frame, and R-Frame Circuit Breakers								
Aluminum Compression Lug Kits	M-, P-frame	250 A	2/0-300 kcmil	Unit/I-line *[26]*	3.7	2	YA250P3	1
		300 A	4/0-500 kcmil		3.9	2	YA300P5	1
		400 A	2/0-300 kcmil		4.3	2	YA400P3	2
		400 A	500-750 kcmil Al, 500 kcmil Cu		3.7	2	YA400P7	1
		600 A	4/0-500 kcmil		3.9	2	YA600P5	2
		800 A	500-750 kcmil Al, 500 kcmil Cu		4.3	2	YA800P7	2
	R-frame *[27]*	1200 A	2/0-300 kcmil	I-line *[26]*	3.8	4	YA1200R3	4
		1200 A	4/0-500 kcmil		4.0	4	YA1200R5	4
		1200 A	500-750 kcmil Al, 500 kcmil Cu		4.4	4	YA1200R7	4
		2000 A	2/0-300 kcmil	Unit *[26]*	— *[27]*	8	YA2000R3	2
		2000 A	4/0-500 kcmil		— *[27]*	8	YA2000R5	2
		2500 A	500-750 kcmil		— *[27]*	8	YA2500R7	2
Copper Compression Lug Kits	M-, P-frame	400 A	4/0-500 kcmil	Unit *[26]*	3.3	2	CYA400P5	1
		600 A	4/0-500 kcmil		3.3	2	CYA600P5	2
		800 A	500-750 kcmil		3.6	2	CYA800P7	2
	R-frame	1200 A	4/0-500 kcmil	I-Line *[26]*	3.5	4	CYA1200R5	4
		1200 A	500-750 kcmil		3.8	4	CYA1200R7	4

[26] Not for use on I-Line™ circuit breakers unless wire bending space is adequate.
[27] All unit-mount R-frame circuit breakers require terminal pads for mounting lugs of any type.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



PDC6HD6



PDC6JD4



PDC3HD2


PDC3JD20

Crimp lugs or PDC connectors extension "A" past end of circuit breaker




PDC12P4


PDC6P20

Power Distribution Connectors

Power distribution connectors (PDCs) can be used for multiple load wire connections on one circuit breaker in place of standard distribution block to save space and time.

The connectors are attached to circuit breaker terminals equipped with separately provided terminal nut connectors. *[28]*

Applications:

- For use on load end of circuit breaker only
- For use in UL 508 Industrial Control applications
- For use in UL 1995/CSA C22.2 No. 236 heating and cooling equipment
- For copper wire only

Table 7.109: Power Distribution Connectors for B-Frame, H-Frame, J-Frame and L-Frame Circuit Breakers *[29]*

Use with Circuit Breaker Type	Ampere Rating	(Wires Per Terminal) Wire Range	Dimension A (in.)	Cat. No.	Qty. Per Kit	Kit Contents
BD, BG, BJ	125 A	(3) 14 - 2 AWG	1.2	PDC3BD2	3	Mounting hardware, lugs
	125 A	(6) 14 - 6 AWG	1	PDC6BD6	3	
HD, HG, HJ, HL *[30]*	15–150 A	(6) 14–6 AWG Cu	1.0	PDC6HD6	3	Mounting hardware, lugs, special purpose label and instructions
	15–150 A	(3) 14–2 AWG Cu	1.2	PDC3HD2	3	
JD, JG, JJ, JL *[30]*	150–250 A	(6) 14–4 AWG Cu	1.0	PDC6JD4	3	
	150–250 A	(2) 14–1 AWG and (1) 3–2/0 AWG Cu	1.5	PDC3JD20	3	
LD, LG, LJ, LL *[31]*	150–600 A	(3) 14–1 AWG and (2) 3–2/0 AWG	1.28	PDC5DG20L3	3	Mounting hardware, lugs, special purpose label, Medium Terminal Shield and instructions
	150–600 A	(12) 14–4 AWG	1.31	PDC12DG4L3	3	Mounting hardware, lugs, special purpose label, Long Terminal Shield and instructions

Table 7.110: Power Distribution Connectors for M-Frame and P-Frame Circuit Breakers *[29]*


	Ampere Rating	(Wires Per Terminal) Wire Range	Cat. No.	Qty Per Kit	Kit Contents
Use for multiple load connections on one circuit breaker in place of standard distribution block to save space and time. • Use on load end of circuit breaker only • Use in UL508 Industrial Control applications only. • Use in UL1995/CSA C22.2 No. 236 heating and cooling equipment. • For Cu wire only.	250–1200 A	(6) 12–2/0 AWG Cu	PDC6P20	3	Mounting hardware, lugs, special purpose label and instructions
		(6) 12–2/0 AWG Cu	PDC6P204	4	Mounting hardware, lugs, special purpose label and instructions
	250–1200 A	(12) 10–4 AWG Cu	PDC12P4	3	Mounting hardware, lugs, special purpose label and instructions
			PDC12P44	4	Mounting hardware, lugs, special purpose label and instructions

[28] Refer to Terminal Shields and Phase Barriers.
[29] Not for use with I-Line™ circuit breakers.
[30] Special Purpose—Not for General Use. Use on ON end of the circuit breaker only when ON end is used as Load end. Use on OFF end of the circuit breaker only when OFF end is used as Load end.
[31] Kit includes long terminal shield and cover, which adds 1.65 inches to standard lug with short terminal shield.


© 2026 Schneider Electric
All Rights Reserved
4/29/2026




H-Frame Lug with Terminal Nut Insert




Control Wire Terminal for J-Frame Terminal Nut




Terminal Nut Insert

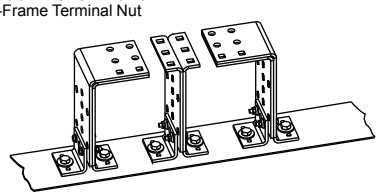


RLTB Terminal Pad Kit




H-Frame Short Lug Shield



J-Frame Short Lug Shield



Phase barrier or terminal shield extension past end of circuit breaker



R-Frame Phase Barrier

Terminal Accessories

Table 7.111: Terminal Nuts for Bus Bar Connection of B-, H- and J-Frame Circuit Breakers

Description	Frame	Tap	Cat. No.	Qty Per Kit
B-Frame Terminal Nut Insert-Metric	BD/BG/BJ (2P)	M6	LV426962	2
B-Frame Terminal Nut Insert-Metric	BD/BG/BJ (3P)	M6	LV426963	3
H-Frame Terminal Nut Insert–English	HD/HG/HJ/HL	1/4-20	S37425	2
H-Frame Terminal Nut Insert–English	HD/HG/HJ/HL	1/4-20	S37444	3
H-Frame Terminal Nut Insert–Metric	HD/HG/HJ/HL	M6	S37426	2
J-Frame Terminal Nut Insert–English	JD/JG/JJ/JL	1/4-20	S37427	2
J-Frame Terminal Nut Insert–English	JD/JG/JJ/JL	1/4-20	S37445	3
J-Frame Terminal Nut Insert–Metric	JD/JG/JJ/JL	M8	S37428	2
Control Wire Terminal for H-Frame Terminal Nut	HD/HG/HJ/HL	—	S37429	2
Control Wire Terminal for J-Frame Terminal Nut	JD/JG/JJ/JL	—	S37430	2

Table 7.112: Bus Bar Connections Hardware for L-, M-, and P-Frame Circuit Breakers

Frame	Description	Term. No.	Poles	Cat. No.
L-Frame	Set of 4 terminal screws and washers for one side	F	4	S36967
M- and P-Frame	Bus Connector Kit for one pole, one end	—	1	S33928

Table 7.113: Terminal Pad Kits for R-Frame Circuit Breakers

R-Frame Circuit Breaker	Terminal Pad Kit		Field-Installable Kits	
	Usage	Lugs per Phase	3P Kit (One End Only) Cat. No.	4P Kit (One End Only) Cat. No.
2500 A, 100% Rated*[32]*	Required for cable or bus	8	RLTB	RLTB4
2500 A, Standard (80% Rated)	Required for cable, optional for bus			
All Other R-Frame Circuit Breakers	Required for cable, optional for bus			
For cable connection to RLTB, use AL2500RK lug. See page 7-61.				

Table 7.114: Terminal Shields and Phase Barriers

Used With	Description				Dimension B (in.)	Cat. No.	Qty Per Kit
H- and J-Frame Mechanical Lugs	Short Lug Shield *[33]*	Frame	Max. Wire Size				
		H-Frame 60 A	3 AWG		0.50	S37446	1
		H-Frame 150 A	3/0 AWG		0.50	S37447	1
		J-Frame	350 kcmil		0.24	S37448	1
B-, H- and J-Frame Power Distribution Connectors and Compression Lugs		Compatible with:					
		PDC	Compression Lugs				
			Aluminum	Copper			
	B-Frame Long Lug Shield	PDC3BD2	L-V426988	LV426986	1.9	LV426911 (2P) LV426912 (3P) LV426913 (4P)	1
		PDC6BD6	L-V426989	LV426987			
	H-Frame Long Lug Shield	PDC6HD6	YA060HD	CYA060HD	2.24	S37449	1
		PDC3HD2	YA150HD	CYA150HD			
	J-Frame Long Lug Shield	PDC6JD4	YA150JD	CYA150JD	1.68	S37450	1
		PDC3JD2	*[34]*	CYA250J3			
L-Frame	3P Short Terminal Shield					LTSS3P	1
	3P Medium Terminal Shield					LTSM3P	1
	3P Long Terminal Shield					LTSL3P	1
	4P Medium Terminal Shield					LTSM4P	1
	4P Long Terminal Shield					LTSL4P	1
M-, P-Frame	Phase Barriers					S33646	3
R-Frame						S33998	

Table 7.115: Miscellaneous H-, J-, and L-Frame Circuit Breaker Accessories

Accessory	Description	Field-Installable Cat. No.
Spare Parts	Bag of screws for accessory cover, L-frame	S432552
	1 spare toggle extension, L-frame	32595
	Set of 10 identification labels	LV429226

[32] 2500 A 80% and 100% rated RLTB (3P) and RLTB4 (4P) ship with 2 kits.
[33] Short lug shields provide IP20 protection for mechanical lugs and are compatible with control wire terminals.
[34] J-frame terminal shield is not compatible with the YA250J35 compression terminal.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



H- and J-Frame
Plug-In Mounting




H- and J-Frame
Drawout Mounting




L-Frame
Plug-In Mounting



L-Frame
Drawout Mounting



L-Frame Disconnecting Blocks



L-Frame Locking Device

Mountings

Table 7.116: Plug-In and Drawout Mountings for H- and J-Frame Circuit Breakers (3P or 2P in a 3P module)

Description			Factory Installed Cat. No.	Field-Installable Cat. No.
Complete Factory-Assembled Circuit Breakers	Plug-in base shipped with circuit breaker		N	—
	Drawout cradle shipped with circuit breaker		D	—
Special Order Options for Plug-In and Drawout Circuit Breakers	Plug-In Base	Circuit breaker Only	HJ00	—
		Plug-in base kit	—	S29278
	Drawout Cradle	Circuit breaker only	HJ00	—
		Plug-in base kit	—	S29278
		Cradle side plates (fixed part of chassis)	—	S29282
		Circuit breaker side plates (moving part of chassis)	—	S29283
Accessories for Plug-In and Drawout	H-Frame Shutter Kit (set of two)		—	S37442
	J-Frame Shutter Kit (set of two)		—	S37443
	Secondary Disconnect Blocks	Fixed part 9-wire connector (mounted on base)	—	S29273
		Moving part 9-wire connector (mounted on circuit breaker)	—	S29274
		Support for 2-moving connectors	—	S29275
	Extended escutcheon with extended toggle handle		—	S29284
	Two position indicating switches (connected/disconnected)		—	S29287
	H-Frame Short Terminal Cover (3P		—	S37436
	J-Frame Short Terminal Cover (3P)		—	S37440

Table 7.117: Plug-In and Drawout Mountings for L-Frame Circuit Breakers


Description		Poles	Plug-in Mounting		Drawout Mounting	
			Factory-Installed Cat. No.	Field-Installed Cat. No.	Factory-Installed Cat. No.	Field-Installable Cat. No.
Kit (stationary and moving parts)		3	N	—	D	—
		4	N	—	D	—
Stationary Part	Plug-in base	3	—	S32514	—	S32514
		4	—	S32515	—	S32515
	Fixed part of chassis		—	—	—	S32532
Moving Part	Circuit breaker only		HJ00	—	HJ00	—
	Moving part of chassis		—	—	—	S32533
	Short terminal covers	3	—	2x S32562	—	2x S32562
		4	—	2x S32563	—	2x S32563


Table 7.118: Plug-In and Drawout Accessories for L-Frame Circuit Breakers

Description			Field-Installable Cat. No.
Secondary Disconnecting Blocks	Fixed Part	9-wire connector	S29273
	Moving Part	9-wire connector	S32523
		Support for 3 moving connectors	S32525
	Fixed + Moving	9-wire manual auxiliary connector	S29272
Shutters	Two shutters for plug-in base		32521
Chassis Accessories	Extended escutcheon for toggle		S32534
	Locking device (key lock is not included)		S29286
	Two position indicating switches (connected/disconnected)		S29287

Table 7.119: Termination Options

Termination Letter	Termination No.
N = Plug-in	L G L 3 6 4 0 0 U 3 1 X For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.
D = Drawout	





P-Frame Drawout Cradle Connections

Table 7.120: Drawout Cradle and Accessories for P-Frame Circuit Breakers

Description		Cat. No.
Drawout Cradle		Product Selector
Cradle Connectors	Front Connected Flat (FCF)	SFCF12 *[35]*
	Rear Connected T Horizontal/Vertical (RCTH/RCTV)	SRCTV12 *[35]*
Cradle Accessories	Modbus™ cradle communication module	S33852
	Safety shutters	S48933
	Secondary disconnects terminal shield	S33763
	Cradle position switch 1a/1b Form C— Connected/test/disconnected	S33170
	Low level cradle position switch 1a/1b Form C—Connected/test/disconnected	S33171
	Cell keying kit	S33767
	Disconnected position key locking—provision for Kirk or Federal Pioneer Lock	S33772
	Door interlock kit	S33786
	Racking interior kit	S33788
	Door escutcheon (for replacement only, included with circuit breaker)	S33857
	Transparent cover	S33859
	Push-in terminal kit (3 wires)	S33098
	Push-in terminal kit (6 wires)	S33099
	Finger cluster	S33166
	Cluster grease (12 oz. tube)	S48899

[35] Needs 2 kits per cradle.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT H-, J-, and L-Frame MicroLogic Trip Units



MicroLogic Standard Trip Unit



MicroLogic Ammeter and Energy Trip Unit

MicroLogic Trip Units *[1]*

MicroLogic Standard 3.2/3.3 Trip Units

PowerPacT™ H-, J-, and L-frame molded case circuit breakers may be specified with any of the following MicroLogic Electronic Trip Units.

- True RMS sensing
- LI, LSI trip configurations
- Field-interchangeable trip units
- LED long-time pickup and trip indication
- Test kits available
- Thermal imaging

MicroLogic Ammeter 5.2A/5.3A/6.2A/6.3A Trip Units

Includes all features listed for MicroLogic standard trip unit, as well as:

- Advanced user interface
- Neutral protection
- Incremental fine tuning of settings
- Up to 12 alarms
- Digital ammeter—phase and neutral (4-pole only)
- Phase loading bar graph
- Maintenance indicators including contact wear, number of operations, operating hours, and load profiles
- Cause of trip information for troubleshooting assistance
- LCD Display
- Zone-selective interlocking (ZSI) (short-time & ground-fault)
- Optional Modbus™ communications—PowerLogic™ compatible

MicroLogic Energy 5.2E/5.3E/6.2E/6.3E Trip Units

Includes all features listed for MicroLogic ammeter trip unit, as well as:

- Ground-fault trip with programmable ground fault alarm (available on 6.2E/6.3E only)
- Power and energy measurement
- Power quality measurements
- Current demand and power demand measurements

PowerPacT H, J and L-Frame MicroLogic Trip Units

Table 7.121: MicroLogic Trip Unit Settings for H-, J-, and L-Frame

Model	Trip Function	Trip Unit	Ampere Setting
MicroLogic Trip Unit Settings for H- and J-Frame Circuit Breakers			
Standard	LI	3.2	15-20-25-30-35-40-45-50-60
			35-40-45-50-60-70-80-90-100
			50-60-70-80-90-100-110-125-150
			70-80-100-125-150-175-200-225-250
	LSI	3.2S	15-20-25-30-35-40-45-50-60
			35-40-45-50-60-70-80-90-100
			50-60-70-80-90-100-110-125-150
			70-80-100-125-150-175-200-225-250
Ammeter	LSI	5.2A	15–60
			35–100
			50–150
			70–250
	LSIG	6.2A	15–60
			35–100
			50–150
			70–250
Energy	LSI	5.2E	15–60
			35–100
			50–150
			70–250
	LSIG	6.2E	15–60
			35–100
			50–150
			70–250
MicroLogic Trip Unit Settings for L-Frame Circuit Breakers			
Standard	LI	3.3	70-80-100-125-150-175-200-225-250
			125-150-175-200-225-250-300-350-400
			200-225-250-300-350-400-450-500-600
	LSI	3.3S	70-80-100-125-150-175-200-225-250
			125-150-175-200-225-250-300-350-400
			200-225-250-300-350-400-450-500-600
Ammeter	LSI	5.3A	125–400
			200–600
	LSIG	6.3A	125–400
			200–600
Energy	LSI	5.3E	125–400
			200–600
	LSIG	6.3E	125–400
			200–600

[1] See Supplemental Digest Section 3 for circuit breakers with field-interchangeable trip units.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT P- and R-Frame MicroLogic Trip Units



Standard Trip Unit | Ammeter Trip Unit | Power Trip Unit | Harmonic Trip Unit | Adjustable Rating Plug

PowerPacT P- and R-Frame MicroLogic Trip Units

MicroLogic (Standard) 3.0 and 5.0 Trip Units

PowerPacT™ P- and R-frame molded case circuit breakers may be specified with any of the following MicroLogic Electronic Trip Units.

- True RMS sensing
- LI, LSI trip configurations
- Field-interchangeable long-time rating plugs
- LED long-time pickup indication
- Test kits available
- Thermal imaging

MicroLogic (Ammeter) 3.0A, 5.0A and 6.0A Trip Units

Includes all features listed for MicroLogic standard trip unit, as well as:

- LSIG trip configurations
- Digital ammeter—phase and neutral (4-pole only)
- Phase loading bar graph
- LED trip indication
- Zone-selective interlocking (ZSI) (short-time & ground-fault)
- Optional Modbus™ communications—PowerLogic™ compatible

MicroLogic (Power) 5.0P and 6.0P Trip Units

Power measurement and advanced protection features includes all features listed for MicroLogic ammeter trip unit, as well as:

- LSI trip configuration with programmable ground fault alarm
- LSIG (Ground-fault trip) with programmable ground fault alarm
- Incremental “fine tuning” of L, S, I, and G pickup and delay settings
- LCD dot matrix display and LED trip indication
- Advanced user interface
- Advanced protection IDMTL—selectable long-time delay bands
- Neutral protection
- Power measurement
- Contact wear indication
- Modbus communications—PowerLogic compatible
- Local and remote settings

MicroLogic (Harmonic) 5.0H and 6.0H Trip Units

Power quality measurement and advanced protection features. Includes all features listed for the MicroLogic power trip unit, as well as:

- Enhanced power measurements functions
- Power quality measurements

Adjustable Rating Plugs for PowerPacT™ P-Frame and R-Frame and MasterPacT™ NT and NW Circuit Breakers—Selection

To provide maximum design flexibility, system protection, and field upgradeability, each MicroLogic™ trip unit is equipped with an interchangeable long-time rating plug. Each trip unit requires an adjustable rating plug to determine the long-time pickup range of the circuit breaker. These plugs are factory installed on new trip units, or can be ordered separately for field-installable upgrades.

Adjustable rating plugs are offered in eight different ranges of long-time pickup adjustments. The following chart show the ranges of adjustments. Each adjustment times the sensor rating (Ir x In) of the circuit breaker sets the long-time pickup value of the circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.122: PowerPacT P- and R-Frame MicroLogic Trip Unit and Options

Model	Protection	Additional Features	Field-Installable Cat. No. *[2]*
2.0 (IEC only)	LSO	None	S132R
3.0 (UL/ANSI only)	LI		S131A
5.0	LSI		S133A
2.0A (IEC only)	LSO	Ammeter	S142R *[3]*
3.0A (UL/ANSI only)	LI		S141A *[3]*
5.0A	LSI		S143A *[3]*
6.0A	LSIG		S144A *[3]*
5.0P	LSI	Metering, Adv. Protection	S163A *[3][4]*
6.0P	LSIG		S164A *[3][4]*
5.0H	LSI	Metering, Adv. Protection & Harmonic Analysis	S173A *[3][4]*
6.0H	LSIG		S174A *[3][4]*

Table 7.123: PowerPacT P- and R-Frame MicroLogic Trip Units

x– Standard Feature o – Available Option

Features	Standard		Ammeter			Power		Harmonic	
	3.0	5.0	3.0A	5.0A	6.0A	5.0P	6.0P	5.0H	6.0H
LI	X	—	X	—	—	—	—	—	—
LSI (Instantaneous can be turned off)	—	X	—	X	X	X	X	X	X
LSIG / Ground-Fault Trip *[5]*	—	—	—	—	X	—	X	—	X
Ground-Fault Alarm (No Trip) *[5][6]*	—	—	—	—	—	X	—	X	—
Ground-Fault Alarm and Trip *[5][6]*	—	—	—	—	—	—	X	—	X
Adjustable Rating Plugs	X	X	X	X	X	X	X	X	X
True RMS Sensing	X	X	X	X	X	X	X	X	X
UL Listed	X	X	X	X	X	X	X	X	X
Thermal Imaging	X	X	X	X	X	X	X	X	X
Phase Loading Bar Graph	—	—	X	X	X	X	X	X	X
LED for Long-time Pickup	X	X	X	X	X	X	X	X	X
LED for Trip Indication	—	—	X	X	X	X	X	X	X
Digital Ammeter	—	—	X	X	X	X	X	X	X
Zone-selective Interlocking	—	—	X	X	X	X	X	X	X
Communications	—	—	X	X	X	X	X	X	X
LCD Dot Matrix Display	—	—	—	—	—	X	X	X	X
Advanced User Interface	—	—	—	—	—	X	X	X	X
Protective Relay Functions	—	—	—	—	—	X	X	X	X
Neutral Protection	—	—	—	—	—	X	X	X	X
Contact Wear Indication	—	—	—	—	—	X	X	X	X
Incremental Fine Tuning of Settings	—	—	—	—	—	X	X	X	X
Selectable Long-time Delay Bands	—	—	—	—	—	X	X	X	X
Power Measurement	—	—	—	—	—	X	X	X	X
Power Quality Measurements	—	—	—	—	—	—	—	X	X
Waveform Capture	—	—	—	—	—	—	—	X	X

Table 7.124: PowerPacT P- and R-Frame Long-Time Pickup Settings

Rating Plug	Long-time Pickup Settings								
A	.40	.45	.50	.60	.63	.70	.80	.90	1.0
B	.40	.44	.50	.56	.63	.75	.88	.95	1.0
C	.42	.50	.53	.58	.67	.75	.83	.95	1.0
D	.40	.48	.64	.70	.80	.90	.93	.95	1.0
E	.60	.70	.75	.80	.85	.90	.93	.95	1.0
F	.84	.86	.88	.90	.92	.94	.96	.98	1.0
G	.66	.68	.70	.72	.74	.76	.78	.80	.82
H	.48	.50	.52	.54	.56	.58	.60	.62	.64

Table 7.125: Special Options

Description	Factory-Installed Suffix	Field-Installable Cat. No.
Ship circuit breaker in closed position	YK	N/A
Alternate Maintenance Setting (AMS) kit (use with 5.0/6.0 A, P or H and 5.3/6.3 A or E MicroLogic trip units)	—	84957
Energy Reduction Maintenance Setting (ERMS) kit (use with 5.0/6.0 P or H MicroLogic trip units)	—	84956
Maintenance Mode Setting Switch kit	120 Vac	LV429659
	24 Vdc	LV429658

[2] The standard rating plug supplied with a trip unit will be the “A” rating plug. To specify an alternative adjustable rating plug, please add the letter designation to the end of the catalog number. Please refer to page 7-68 for a complete listing of adjustable settings available with each plug. (Example: S143B would specify a “B” rating plug instead of the standard "A" plug.) Use suffix “N” if no rating plug is required, deduct.


[3] When replacing a standard trip unit with Type A (Ammeter), P (Power metering) or H (Harmonic analysis) trip unit, order the 12-pin connector kit S33101 for the MasterPacT NW and NT and the PowerPacT P-frame drawout circuit breakers or kit S33100 for PowerPacT P-frame and R-frame unit-mount and I-Line circuit breakers.

[4] Requires Circuit Breaker Communications Module.

[5] Requires neutral current transformer in 3Ø4W systems.

[6] Alarm history is available through the trip unit display and communications. Local indication of an alarm requires an M2C Programmable Contact Module.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



Trip Unit Seal



Sensor Plug

Trip Unit Accessories

Adjustable rating plug "A" is installed as standard on all MicroLogic trip unit orders. However, an alternative selection may be specified from the "Assembled" table below, and factory installed with your trip unit order at no additional charge. To order, please attach the appropriate catalog suffix to the end of the trip unit Cat. No. (after specifying trip unit options). Adjustable rating plugs may also be purchased as field-installable components from the table below.

For Enerlin'X accessory information, see Enerlin'X Digital Solutions, page 7-79

Table 7.126: Rating Plugs

Rating Plug *[7]*	Factory Installed Cat. Suffix	Field-Installable Cat. No.
A	A (standard)	S48818
B	B	S48819
C	C	S48820
D	D	S48836
E	E	S48837
F	F	S48838
G	G	S48839
H	H	S48840

Table 7.127: Neutral Current Transformers

Use With	Cat. No.	Sensor
H- Frame	S429521	60–100
	S430562	150
J- Frame	S430563	250
L- Frame	S432575	400–600
P- Frame	S33575*[8]*	250
	S33576*[8]*	400–1600
R- Frame	S48916*[8]*	250
	S34036*[8]*	400–1600
	S48896*[8]*	2000
All	NCTWIRING	All

Table 7.128: Zone-Selective Interlocking

Description	Factory-Installed Cat. Suffix	Field-Installable Cat. No.
ZSI Interface Module	—	S434212
24 Vdc Terminal Block	EN	S434210
ZSI Wire Harness, H/J Frame	YH3	S434300
ZSI Wire Harness, L- Frame	YH3	S434301
ENCT & ZSI Wire Harness	YH4	—

Table 7.129: Trip Unit Accessories


Device		Frame	Cat. No.
Pocket Tester		H/J/L	S434206
MicroLogic 5/6 Cover, Transparent		H/J	S429478
MicroLogic 2/3 Cover, Transparent			S429481
MicroLogic 5/6 Cover, Transparent		L	S432459
MicroLogic 2/3 Cover, Transparent			S432461
LCD Display for MicroLogic 5		H/J/L	S429483
LCD Display for MicroLogic 6			S429484
Service Interface Kit*[9]*		H/J/L/P/R	LV485500
Trip Unit Battery for Trip Indicator Lights		P/R	S33593
Power supply with:	24–30 Vdc input		LV454440
	48/60 Vdc input		LV454441
	125 Vdc input		LV454442
	110–130 Vac input		LV454443
	200–240 Vac input		LV454444
MicroLogic A Trip Unit Cover, clear		P/R	S33592
MicroLogic P/H Trip Unit Cover, opaque gray			S47067
Trip Unit Seal (6 pieces) for compliance with NEC 240.6(c)		H/J/L/P/R	MICROTUSEAL
12-pin Trip Unit Connector for NT/NW MasterPacT Circuit Breakers		P/R	S33101
12-pin Trip Unit Connector for P- and R- Frame Circuit Breakers			S33100
Battery Back-up (12 Hours)			685831


Table 7.130: Sensor Plugs for P- and R- Frame Circuit Breakers *[10]*

Description	Sensor Plug Range	Sensor Plug Cat. No.	Circuit Breaker Frames Accepting Sensor Plug								
P- Frame Circuit Breaker			250 A	400 A	600 A	630 A *[11]*	800 A	1000 A	1200 A	1250 A *[11]*	1600 A
UL	250 A	S47052	X	—	—	—	—	—	—	—	—
	400 A	S47053	—	X	X	—	X	—	—	—	—
	600 A	S48823	—	—	X	—	X	X	X	—	—
	800 A	S33092	—	—	—	—	X	X	X	—	—
	1000 A	S33093	—	—	—	—	—	X	X	—	—
	1200 A	S48824	—	—	—	—	—	—	X	—	—
IEC	630 A	S33091	—	—	—	X	X	X	—	X	X
	800 A	S33092	—	—	—	—	X	X	—	X	X
	1000 A	S33093	—	—	—	—	—	X	—	X	X
	1250 A	S33094	—	—	—	—	—	—	—	X	X
	1600 A	S33095	—	—	—	—	—	—	—	—	X
R- Frame Circuit Breaker			600 A	800 A	1000 A	1200 A	1600 A	2000 A	2500 A	3200 A	
UL	600 A	S48823	X	X	X	X	—	—	—	—	
	800 A	S33092	—	X	X	X	X	—	—	—	
	1000 A	S33093	—	—	X	X	X	X	—	—	
	1200 A	S48824	—	—	—	X	X	X	X	—	
	1600 A	S33095	—	—	—	—	X	X	X	—	
	2000 A	S33982	—	—	—	—	—	X	X	—	
	2500 A	S33983	—	—	—	—	—	—	X	—	
IEC	1600 A	S33095	—	—	—	—	X	X	X	X	
	2000 A	S33982	—	—	—	—	—	X	X	X	
	2500 A	S33983	—	—	—	—	—	—	X	X	
	3200 A	S33984	—	—	—	—	—	—	—	X	

[7] Long-time pickup amperes (Ir) = Sensor Rating (In) X Setting of rating plug. "Fine adjustment tuning" is included on MicroLogic Power and Harmonic trip units, allowing for incremental settings of 1 A between the plug setting and. 40 X Sensor Rating.
[8] Includes NCTWIRING kit.
[9] Service Interface Test Kit can be ordered through SE Services only. Service Interface Test kit replaces obsoleted UTA, Hand-Held and Full Function Test Kit.
[10] For use only with circuit breakers with date codes later than 07011. For long-time pickup range, See rating plug information at page 7-65.
[11] IEC Only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



NSX Cord for ULP Communications


Breaker Status and Control Module (BSCM)


Modbus SL Hub


Modbus SL Cord


SDTAM Module (Remote indication relay for motor applications)


ZSI Interface Module


BCM ULP Communication Module


M2C programmable contacts: circuit breaker internal relay with two contacts

Table 7.131: Electronic Trip Unit Accessories, Wire Harness *[12]* and ULP Cords for H-, J-, and L- Frame Circuit Breakers *[13]*

Description		Factory-Installed Cat. No. Suffix	Field-Installable Kit Cat. No.
NSX Cord*[14]* (for ULP Communication)	L = 1.3 m (4.27 ft)	EA	S434201
	L = 3 m (9.84 ft)	EB	S434202
BSCM (Breaker Status and Control Module) with NSX ULP Cord V,<= 480 Vac*[14]*	L = 1.3 m (4.27 ft)	EG *[15]*	S434201BX
	L = 3 m (9.84 ft)	EH *[15]*	S434202BX
Replacement BSCM for Modbus SL or ULP		—	S434220
BSCM with NSX ULP Cord for V > 480 Vac *[14]*	L = 1.3 m (4.27 ft)	EK *[15]*	S434204BX
	L = 3 m (9.84 ft)	EL *[15]*	S434303BX
BSCM with MB SL Cord for V <= 480 Vac *[16]*	L = 3.0 m (9.84 ft)	EP	S434223BX
	L = 1.3 m (4.27 ft)	ER	S434222BX
	L = 0.35 m (1.15 ft)	ES	S434221BX
Modbus SL Hub for Daisy chain, 3x RJ45 connections, DIN rail mount, stacking connector compatible*[16]*		—	S434224
SDTAM 24/415 Vac/dc Module *[17]*		V	S429424
SDX Module 24/415 Vac/dc *[18]*		V	S429532
ZSI Wire Harness, H/J Frame		YH3	S434300
ZSI Wire Harness, L- Frame		YH3	S434301
ENCT Wire Harness		YH2	S434302
OF Wire Harness		YH1	S434500
SD/SDE Wire Harness		YH1	S434501
SDx/SDTAM Wire Harness		YH1	S434502
MN Wire Harness		YH1	P434503
MX Wire Harness		YH1	P434504
24 Vdc Terminal Block Wire Harness *[19]*		YH1	S434505
Motor Operator Wire Harness		YH1	S434506
Communicating Motor Operator Wire Harness		YH1	S434507
NSX Wire Harness *[19]*		YH1	S434508

Table 7.132: Trip Unit Field-Installable Accessories for P- and R-Frame Circuit Breakers

Description	Factory-Installed Cat. No. Suffix	Field-Installable Kit Cat. No.						
		P- Frame					R- Frame	
		Unit Mount	I-Line	Motor Operated	Drawout	With Rotary Handle	Unit Mount	I-Line
Breaker Communication Module (BCM ULP)	E1	S64205	S64205	S64207	S64206	S64205	S64205	S64205
Replacement BCM ULP	—	33106	33106	33106	33106	33106	33106	33106
Two Programmable Contacts Module (M2C)*[20]*	V	S64273	S64273	S64273	S64273	S64273	S64273	S64273
External Voltage Sensing (EVS)	YV	S64203	S64203	S64210	S64209	S64210	S64208	S64208

Table 7.133: Trip Unit Field-Installable Accessories for MasterPacT NT/NW Circuit Breakers

Description	Factory-Installed Cat. No. Suffix	Field-Installable Kit Cat. No.			
		MasterPacT NT		MasterPacT NW	
		Fixed	Drawout	Fixed	Drawout
Breaker Communication Module (BCM ULP)	—	S48188	S47485	S47405	S48384
Replacement BCM ULP	—	33106	33106	33106	33106
Two Programmable Contacts Module (M2C)*[20]*	—	S47403	S47485	S47403	S48382
External Voltage Sensing (EVS)	—	S47506	S47507	S47506	S48533

[12] Wire harness is required for I-Line applications, optional for unit-mount applications
YH1 = all installed accessories but ZSI and ENCT
YH2 = ENCT and all installed accessories
YH3 = ZSI and all installed accessories
YH4 = ZSI, ENCT and all installed accessories
[13] For proper selection, see catalog 0611CT1001.
[14] Installation requires IFM (LV434000) for Modbus communication and/or FDM (STRV00121) for external display.
[15] If using with motor operator requires communicating motor operator (suffix NC).
[16] Modbus serial only <= 480Vac. Use only with matching Modbus serial components.
[17] Remote indication relay for motor applications
[18] Remote indication relay
[19] I-Line wire harness is included for communication network accessories.
[20] Compatible with MicroLogic P and H only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



MasterPacT MTZ2
800–4000 A

New!

MasterPacT MTZ Circuit Breakers

MasterPacT MTZ continues the performance and reliability of the MasterPacT line.

MasterPacT MTZ circuit breakers bring innovation and upgradability throughout the entire lifecycle, for improved power uptime, business performance, and cost control.

- Customize MicroLogic X control unit anytime
- Purchase optional Digital Modules for additional protection, measurement and maintenance & diagnostic
- Easy installation using established architectures
- Demonstrated compliance with standards
- Smartphone connectivity for wireless alerts and maintenance
- Built in power meter with Class 1 precision for smart energy metering

Table 7.134: MasterPacT MTZ1 Circuit Breaker Ratings


Standard Frame Rating Interrupting Code		ANSI C37 Certified/ UL 1066 Listed	UL 489 Listed													
		800 A	800 A					1200 A					1600 A *[1]*			
		N1	N	H	L1	L	LF *[2]*	N	H	L1	L	LF *[2]*	N	H	L1	L
Interrupting Current (kA RMS) 50/60 Hz	240 Vac	42	50	65	100	200	200	50	65	100	200	200	50	65	100	200
	480 Vac	42	50	50	65	100	100	50	50	65	100	100	50	50	65	100
	600 Vac	—	35	50	—	—	—	35	50	—	—	—	35	50	N/A	N/A
Short-time Withstand Current (kA RMS)		42	35	35	10	10	10	35	35	10	10	10	35	35	10	10
Built-in Instantaneous Override (kA RMS ±10%)		—	40	40	10	10	10	40	40	10	10	10	40	40	10	10
Close and latch rating (kA RMS)		40	25	25	10	10	10	25	25	10	10	10	25	25	10	10
Tested to show the arc flash hazard risk category as referenced by NFPA70E		—	—	—	—	—	Yes	—	—	—	—	Yes	—	—	—	—
Breaking time		25–30 ms with no intentional delay	25–30 ms with no intentional delay (9 ms for L and LF)													
Closing time		< 50 ms														
Sensor Rating		—	—					600–1200 A					800–1600 A			
		400–800 A	400–800 A					—								
Endurance Rating (C/O Cycles) With No Maintenance	Mechanical	12,500	12,500					12,500					12,500			
	Electrical	2800	2800					2800					2800			

Table 7.135: MasterPacT MTZ2 and MTZ3 Circuit Breaker Ratings

Standard Frame Rating Interrupting Code		ANSI C37 Certified/UL 1066 Listed																		UL 489 Listed							
		800–1600 A						2000 A					3200/4000 A *[3]*				4000/5000 A			800/1200/1600/2000 A				2500/3000 A		4000/5000/ 6000 A	
		N1	H1	H2	H3	L1 *[2]*	L1F *[2]*	H1	H2	H3	L1 *[2]*	L1F *[2]*	H1	H2	H3	L1 *[2]*	H2	H3	L1 *[2]*	N	H	L *[2]*	LF *[2]*	H	L *[2]*	H	L *[2]*
Interrupting Current (kA RMS) 50/60 Hz	240 Vac	42	65	85	10-0	200	200	65	85	100	200	200	65	85	100	200	85	100	200	65	100	200	200	100	200	100	200
	480 Vac	42	65	85	10-0	200	200	65	85	100	200	200	65	85	100	200	85	100	200	65	100	150	150	100	150	100	150
	600 Vac	42	65	85	85	130	130	65	85	85	130	130	65	85	85	130	85	85	130	50	85	100	100	85	100	85	100
Short-time Withstand Current (kA RMS)		42	65	85	85	30	22	65	85	85	30	22	65	85	85	100	85	85	100	42	65	30 *[4]*	22	65	65	85	100
Built-in Instantaneous Override (kA RMS ±10%)		35	35	35	85	35	24	—	—	85	35	24	—	—	85	117	—	—	117	40	40	35 *[4]*	24	65	65	75	75
Close and latch rating (kA RMS)		42	65	40	40	25	22	65	40	40	25	22	65	40	40	40	85	75	40	40	40	25 *[5]*	22	40	40	40	40
Tested to show arc flash hazard risk category as referenced by NFPA70E		—	—	—	—	—	Yes	—	—	—	—	Yes	—	—	—	—	—	—	—	—	—	—	Yes	—	—	—	—
Breaking time		25–30 ms with no intentional delay (9 ms for L1, L1F, L and LF)																									
Closing time		70 ms																									
Sensor Rating (A)		400–800 800–1600						1000–2000					1600–3200				2000–4000 2500–5000			400–800 600–1200 800–1600 1000–2000				1200–2500 1600–3000		2000–4000 2500–5000 3000–6000	
Endurance Rating (C/O Cycles) With No Maintenance	Mech.	12,500						10,000					10,000			5k	5,000			12,500 *[6]*				10,000		5,000	
	Elec.	2800						1,000					1,000			1k	1,000			2800 *[6]*				1,000		1,000	

[1] Fixed mounted only.
[2] Drawout mounted only.
[3] 4000 A standard width circuit breaker is not available in L1 interrupting rating code or drawout construction (fixed mounting only).
[4] 65 kA RMS for 2000 A.
[5] 40 kA RMS for 2000 A.
[6] For 2000 A N/H/L/LF devices, the endurance rating is 10,000 for mechanical and 1000 for electric.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

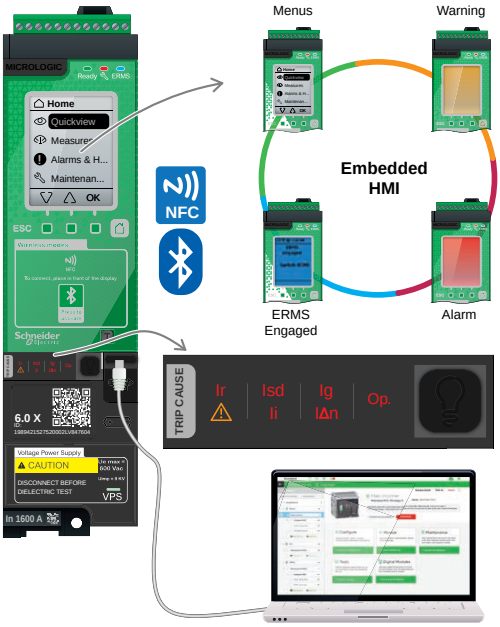

New!

MicroLogic X Control Unit for MasterPacT MTZ Circuit Breakers

The MicroLogic X control unit protection functions include overcurrent, short-circuit, and ground-fault protection. Along with the standard protection functions LI, LSI, and LSIG, new features enhance the overall performance of a system: dual settings, fine settings, fast tripping.

MicroLogic X measures electrical parameters of a power system: currents, voltages, frequency, power, energy, power factor, current and power demand. Min/Max and average values are calculated for most of the parameters.

MicroLogic X capability for maintenance & diagnostics simplifies circuit breaker service and operations. Relevant indicators and messages are powerful tools that can help the user scheduling both preventive and predictive maintenance, and device replacement.

MasterPacT MTZ Digital Modules Options for Advanced Functions

Optional Digital Modules can be purchased and downloaded to enhance the performance of MicroLogic X control units. They are dedicated to advanced protection, measurement, and maintenance &diagnostics, and are available through Go Digital on the Schneider Electric website.

Module (Available on the Schneider Electric GoDigital Website)		Part Number
Protection		
ANSI 27/59—Under/Over Voltage Protection	Monitors the circuit breaker voltages and trips when the voltage exceeds the settings.	LV850012
ANSI 32P—Reverse Active Power Protection	Monitors the active power.	LV850011
ANSI 51N/51G—Ground-Fault Alarm	Provides an integrated ground fault alarm.	LV850007
ERMS—Energy Reducing Maintenance Settings	Used to lower the protection settings in order for the MasterPacT MTZ circuit breaker to trip faster, reducing arc energy.	LV850009
Metering		
Energy per Phase Digital Module	Calculates and displays the active, reactive and apparent energy per phase of the power system and provides total active, reactive and apparent energy per phase.	LV850002
Individual Harmonics Analysis	Provide harmonics of voltage and current to the 40th harmonic.	LV850006
Maintenance & Diagnostic		
Power Restoration Assistant,	Displays available circuit breaker information to help determine potential causes of an event and also provides guidance for potential solutions to restore power.	LV850004
MasterPacT Operation Assistant	Assists in closing or opening the circuit breaker remotely with Bluetooth by delivering applicable instructions. Requires Comm & Diag accessories.	LV850005
Waveform Capture on Trip Event	Automatically logs five cycles of phase and neutral currents.	LV850003
Modbus Legacy Dataset	Allows easy integration in existing Modbus installations where modification of supervision software for MTZ circuit breakers is not desired.	LV850045

New generation MicroLogic X control units incorporate wireless technology (Bluetooth and NFC) that allows the transfer of a wide selection of critical information (protection, measurements, maintenance & diagnostics) to your mobile device, by means of the EcoStruxure Power Device App.

Alternatively, MasterPacT MTZ can be equipped with ETHERNET communication through either the IFE module or the new embedded EIFE that includes webpages. Modbus SL communication is available through the IFM interface module.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

MicroLogic X Sensor Plugs

Table 7.136: Sensor Plug

In (A)	Sensor Plug :	MTZ1-08 MTZ2-08	MTZ2-16	MTZ2-16	MTZ2-32	MTZ2-40	MTZ3–32	MTZ3–40	MTZ3–50	MTZ3–60	MTZ3–63
400	LV847053SP	X	—	—	—	—	—	—	—	—	—
600	LV848823SP	X	—	—	—	—	—	—	—	—	—
630	LV833091SP	X	X	—	—	—	—	—	—	—	—
800	LV833092SP	X	X	—	—	—	—	—	—	—	—
1000	LV833093SP	—	X	X	—	—	—	—	—	—	—
1200	LV848824SP	—	X	X	—	—	—	—	—	—	—
1250	LV833094SP	—	X	X	—	—	—	—	—	—	—
1600	LV833095SP	—	X	X	X	—	—	—	—	—	—
2000	LV833982SP	—	—	X	X	X	X	X	X	X	X
2500	LV833983SP	—	—	—	X	X	X	X	X	X	X
3000	LV848825SP	—	—	—	X	X	X	X	X	X	X
3200	LV833984SP	—	—	—	X	X	X	X	X	X	X
3600	LV836390SP	—	—	—	—	X	X	X	X	X	X
4000	LV836391SP	—	—	—	—	X	X	X	X	X	X
2000	LV847821SP	—	—	—	—	—	X	X	—	—	—
2500	LV847822SP	—	—	—	—	—	X	X	X	—	—
3000	LV848826SP	—	—	—	—	—	X	X	X	X	—
3200	LV847823SP	—	—	—	—	—	X	X	X	X	X
3600	LV836391SP	—	—	—	—	—	—	X	X	X	X
4000	LV847824SP	—	—	—	—	—	—	X	X	X	X
5000	LV847825SP	—	—	—	—	—	—	—	X	X	X
6000	LV848827SP	—	—	—	—	—	—	—	—	X	X
6300	LV847826SP	—	—	—	—	—	—	—	—	—	X

Table 7.137: Replacement Parts for MicroLogic X Control Units

Replacement Part	Part Number
MicroLogic X Embedded Display & Wireless Card	LV850054SP
Internal Battery	LV833593SP
Transparent Cover with No Access Holes to MicroLogic X Control Unit	LV839454SP
Transparent Cover with Access Holes to MicroLogic X Control Unit	LV839453SP
USB Cable (miniUSB/USB) for MicroLogic X Control Unit	LV850067SP

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

New!

MasterPacT MTZ Accessories



Microswitch Type ON/OFF Indication Contacts (OF) (MTZ1)



Rotary Type ON/OFF Indication Contacts (OF) (MTZ2 and MTZ3)



Additional Overcurrent Trip Indication Contacts (SDE)




Combined Connected/Closed Contacts



Connected / Disconnected / Test Position Cradle Switches (CE, CD and CT)



M2C programmable contacts: circuit breaker internal relay with two contacts



ERMS switch module (ESM)




Ready-to-close contacts (PF)




Pushbutton locking (VBP) with padlock



Grounding Kit (KMT)



Transparent Cover for Escutcheon. (CCP)



Cover for Escutcheon. (CCP)

Table 7.138: MasterPacT MTZ Circuit Breaker Accessories

Accessory	Circuit Breaker	Version	
		Fixed	Drawout
Connection			
Horizontal and vertical rear connection	MTZ1/2/3	X	X
Front connection	MTZ1/2/3	X	X
Vertical-connection adapters	MTZ1	X	X
Cable-lug adapters	MTZ1	X	X
Spreaders	MTZ1	X	X
Disconnectable front connection adapter	MTZ2/3	X	—
Lugs for 240 mm² or 300 mm² cables	MTZ1	X	X
Interphase barriers	MTZ1/2/3	X	X
Arc chute cover (CC)	MTZ1	X	—
Brackets for mounting	MTZ2/3	X	—
Signalling			
ON/OFF indication contacts (OF)	MTZ1/2/3	X	X
Fault-trip indication contact (SDE)	MTZ1/2/3	X	X
Combined connected/closed contacts (EF)	MTZ2/3	—	X
Cradle switches (CE, CD, CT)	MTZ1/2/3	—	X
Ready-to-close contact (PF)	MTZ1/2/3	X	X
ERMS switch module (ESM)	MTZ1/2/3	X	X
Mechanical operation counter (CDM)	MTZ1/2/3	X	X
Controlling			
Diagnostic and communicating shunt close (XF diag&com)	MTZ1/2/3	X	X
Shunt close (XF)	MTZ1/2/3	X	X
Diagnostic and communicating shunt trip (MX diag&com)	MTZ1/2/3	X	X
Shunt trip (MX)	MTZ1/2/3	X	X
Diagnostic undervoltage release (MN diag)	MTZ1/2/3	X	X
Undervoltage release (MN)	MTZ1/2/3	X	X
Non-adjustable delay unit (R)	MTZ1/2/3	X	X
Adjustable delay unit (Rr)	MTZ1/2/3	X	X
Isolation module	MTZ1/2/3	X	X
Spring charging motor (MCH)	MTZ1/2/3	X	X
Electrical reset option (RES)	MTZ1/2/3	X	X
Automatic reset option (RAR)	MTZ1/2/3	X	X
Electrical closing pushbutton (BPFE)	MTZ1/2/3	X	X
Locking and Interlocking			
ON/OFF pushbutton locking (VBP)	MTZ1/2/3	X	X
OFF position locking (VSPO-VCPO)	MTZ1/2/3	X	X
Cradle locking in disconnected position by padlock	MTZ1/2/3	—	X
Cradle locking in disconnected position: by keylock (VSPD)	MTZ1/2/3	—	X
Optional connected/disconnected/test position locking	MTZ1/2/3	—	X
Safety shutters (VO)	MTZ1/2/3	—	X
Shutter position indication and locking (VIVC)	MTZ2/3	—	X
Cable-type door interlock (IPA)	MTZ1/2/3	X	X
Door interlock (VPEC)	MTZ1/2/3	—	X
Racking interlock (VPOC)	MTZ1/2/3	—	X
Racking interlock between crank and OFF pushbutton (IBPO)	MTZ2/3	—	X
Cradle rejection kit	MTZ1/2/3	—	X
Circuit Protection			
External sensor for ground-fault protection (ENCT)	MTZ1/2/3	X	X
External sensor for source ground-return (SGR) protection	MTZ1/2/3	X	X
Operation Protection			
Automatic spring discharge before circuit breaker removal (DAE)	MTZ2/3	—	X
Grounding kit (KMT)	MTZ2/3	X	X
Mechanical Protection			
Terminal cover (CB)	MTZ1/2/3	—	X
Escutcheon (CDP)	MTZ1/2/3	X	X
Blanking plate for escutcheon (OP)	MTZ1/2/3	X	X
Transparent cover for escutcheon (CP)	MTZ1/2/3	—	X
Power Supplies			
Voltage power supply (VPS)	MTZ1/2/3	X	X
External 24 Vdc power supply module (AD)	MTZ1/2/3	X	X
Battery module (BAT)	MTZ1/2/3	X	X
Mobile Power Pack by APC	MTZ1/2/3	X	X
Spare internal battery	MTZ1/2/3	X	X


© 2026 Schneider Electric
All Rights Reserved
4/29/2026


EIFE Embedded Ethernet Interface


IO Application Module


IFE Interface


IFE Switchboard Server


ZSI Interface Module

Communication Accessories

Table 7.139: Monitoring and Control

Description		Catalog Number
Enerlin'X modules	EIFE Embedded Ethernet module full kit includes EIFE and EIFE cable; for MTZ1-drawout	LV851100SP
	EIFE Embedded Ethernet module full kit includes EIFE actuators and EIFE cable; for MTZ2/3-drawout	LV851200SP
	EIFE Embedded Ethernet stand-alone module; for MTZ1/2/3-drawout	LV851001SP
	Ethernet interface LV breaker	LV434001
	Ethernet interface for LV breakers and gateway	LV434002
	I/O application module	LV434063
	EIFE Cable; for MTZ1-drawout	LV851120SP
	EIFE Cable; for MTZ2/3-drawout	LV851220SP
ULP port modules	ULP port - for MasterPacT MTZ1 - fixed	LV850063SP
	ULP port - for MasterPacT MTZ1 - drawout	LV850064SP
	ULP port - for MasterPacT MTZ2/3 - fixed	LV850061SP
	ULP port - for MasterPacT MTZ2/3 - drawout	LV850062SP
Ethernet display module	Front display module FDM128	LV434128
ULP Wiring Accessories	5 RJ45 connectors female/female	TRV00870
	10 ULP line terminators	TRV00880
	10 RJ45/RJ45 male cord L = 0.3 m	TRV00803
	10 RJ45/RJ45 male cord L = 0.6 m	TRV00806
	5 RJ45/RJ45 male cord L = 1 m	TRV00810
	5 RJ45/RJ45 male cord L = 2 m	TRV00820
	5 RJ45/RJ45 male cord L = 3 m	TRV00830
	1 RJ45/RJ45 male cord L = 5 m	TRV00850
ZSI Interface Module	Connects up to 15 PowerPacT H/J/L/P/R or MasterPacT MTZ/NT/NW Circuit Breakers or for applications requiring compliance with IEC and CENELEC HD 60364–4–41 or those requiring double insulation.	LV848892SP

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Auxiliary, Alarm Contacts and Power Supply Catalog Numbers



Combined Contacts



Additional Overcurrent Trip Indication Contacts (SDE)



Microswitch Type ON/OFF Indication Contacts (OF) (MTZ1)



MasterPacT Electrical Closing Pushbutton (BPFE)

Table 7.140: Auxiliary and Alarm Contacts, Programmable Contact Module, Electrical Close Pushbutton

Accessory	Catalog Number	
	MTZ1	MTZ2/MTZ3
1a/1b Form C Auxiliary Switch	LV847076SP	—
Low Level 1a/1b Form C Auxiliary Switch	LV847077SP	—
4a/4b Form C Auxiliary Switch (OF)	—	LV864922SP
1a/1b Form C Connected/Closed Switch (EF)	—	LV848477SP
Low Level 1a/1b Form C Connected/Closed Switch (EF)	—	LV848478SP
1a/1b Form C Second Trip Alarm Switch (SDE2)	LV847915SP	LV847915SP
Low Level 1a/1b Form C Second Trip Alarm Switch	LV847916SP	LV847916SP
1a/1b Form C Ready-to-Close Switch (PF)	LV847080SP	LV847080SP
Low Level 1a/1b Form C Ready-to-Close Switch	LV847081SP	LV847081SP
Electrical Close Pushbutton (BPFE)	LV864917SP	LV848534SP

Table 7.141: Cradle Position Switches (Cell Switches)

Description	Catalog Number
1a/1b Form C Connected/Test/Disconnected Switch	LV833170SP
Low Level 1a/1b Form C Connected/Test/Disconnected Switch	LV833171SP
1a Connected/Test/Disconnected Switch MTZ2-3 (Ring Tongue)	LV839289SP
1b Connected/Test/Disconnected Switch MTZ2-3 (Ring Tongue)	LV839290SP
Set of 3 Cell Switch Actuating Arms	LV848560SP

NOTE: Auxiliary, alarm and status switches' terminal blocks need to be ordered separately, see Secondary Terminal Block Kits, below.

Table 7.142: Secondary Terminal Block Kits

Description	Fixed MTZ1/2/3	Drawout MTZ1	Drawout Drawout MTZ2/3
Push-in Terminal kit (3 Wires)	LV847074SP	LV833098SP	LV847849SP
Push-in Terminal kit (6 Wires)	LV847075SP	LV833099SP	LV847850SP
Ring Tongue Kit 1a MTZ2-3	—	—	LV839296SP
Ring Tongue Kit 1b MTZ2-3	—	—	LV839297SP
Ring Tongue Kit 1a & 1b MTZ2-3	—	—	LV839298SP

Table 7.143: Accessories for MicroLogic X Control Units

Description	Voltage	Catalog Number
External power supply module (AD)	24–30 Vdc	LV454440
	48–60 Vdc	LV454441
	100–125 Vdc	LV454442
	110–130 Vdc	LV454443
	200–240 Vdc	LV454444

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Vigirex™ Ground-Fault Relay System

The Vigirex ground-fault relays, with associated sensors (current transformers), measure the residual current in an electrical installation to detect levels which may be damaging. When used for protection, they cause an associated circuit breaker or switch to interrupt the supply of power to the protected system. They may also be used for monitoring only, with output to an alarm. The product line includes fixed sensitivities from 30 mA to 1 A and adjustable sensitivities up to 30 A.

The Vigirex relays may be easily mounted on DIN rail or may be panel mounted in a meter cutout. Sensors for conductors range from a little more than an inch diameter toroids, to large rectangular sensors measuring 6 x 18 inches. The compact size of the relay and its sensor make it ideal for protection of OEM equipment as well as branch circuits.



RH99M



RH99P

Table 7.144: Vigirex Ground-Fault Relays (UL 1053 Listed)

Model	Delay	Reset	Control Voltage	Sensitivity	Cat. No.
DIN Rail Mounted					
RH10M	Instantaneous	Manual	12–24 Vac/12–48 Vdc	30 mA	56300
				100 mA	56302
				300 mA	56305
				500 mA	56306
				1 A	56307
			110–130 Vac	30 mA	56320
				100 mA	56322
				300 mA	56325
				500 mA	56326
				1 A	56327
			220–240 Vac	30 mA	56330
				100 mA	56332
				300 mA	56335
				500 mA	56336
				1 A	56337
RH21M	Instantaneous or 60 msec (2 settings)	Manual	12–24 Vac/12–48 Vdc	30 mA *[7]* or 300 mA (2 settings)	56360
			110–130 Vac		56362
			220–240 Vac		56363
RH99M	Adjustable (9 settings): 0, 0.06, 0.15, 0.23, 0.31, 0.5, 0.8, 1.0, 4.5 sec	Manual	12–24 Vac/12–48 Vdc	Adjustable, (9 settings): 0.03 *[7]*, 0.1, 0.3, 0.5, 1, 3, 5, 10, 30 A	56370TD
			110–130 Vac		56372TD
			220–240 Vac		56373TD
		Automatic	12–24 Vac/12–48 Vdc		56390TD
			110–130 Vac		56392TD
			220–240 Vac		56393TD
Panel Mounted					
RH10P	Instantaneous	Manual	12–24 Vac/12–48 Vdc	30 mA	56400
				100 mA	56402
				300 mA	56405
				500 mA	56406
				1 Amp	56407
			110–130 Vac	30 mA	56420
				100 mA	56422
				300 mA	56425
				500 mA	56426
				1 Amp	56427
			220–240 Vac	30 mA	56430
				100 mA	56432
				300 mA	56435
				500 mA	56436
				1 A	56437
RH21P	Instantaneous or 60 msec (2 settings)	Manual	12–24 Vac/12–48 Vdc	30 mA *[7]* or 300 mA (2 settings)	56460
			110–130 Vac		56462
			220–240 Vac		56463
RH99P	Adjustable (9 settings): 0, 0.06, 0.15, 0.23, 0.31, 0.5, 0.8, 1.0, 4.5 sec	Manual	12–24 Vac/12–48 Vdc	Adjustable (9 settings): 0.03 *[7]*, 0.1, 0.3, 0.5, 1, 3, 5, 10, 30 A	56470TD
			110–130 Vac		56472TD
			220–240 Vac		56473TD
		Automatic	12–24 Vac/12–48 Vdc		56490TD
			110–130 Vac		56492TD
			220–240 Vac		56493TD



PA50



SA200

Table 7.145: Sensors for Vigirex Ground-Fault Relays

Sensors	Type	Maximum Current *[8]*	Inside Diameter		Cat. No.
			in.	mm	
Closed Toroids, Type A	TA30	65 A	1.18	30	50437
	PA50	85 A	1.97	50	50438
	IA80	160 A	3.15	80	50439
	MA120	250 A	4.72	120	50440
	SA200	400 A	7.87	200	50441
	GA300	630 A	11.81	300	50442
Vigirex Sensor Iron Rings (Optional)	TA30	65 A	0.79	20	56055
	PA50	85 A	1.58	40	56056
	IA80	160 A	2.76	70	56057
	MA120	250 A	4.33	110	56058
Split toroids, Type TOA	TOA80	160 A	3.15	80	50420
	TOA120	250 A	4.73	120	50421
Rectangular Sensors	280 x 115	1600 A	11.02 x 4.53	280 x 115	56053
	470 x 160	3200 A	18.50 x 6.30	470 x 160	56054

[7] 30 mA is instantaneous only, except for RH99M and RH99P models. Their suffix TD indicates time delay at 30 mA. For models with no time delay (IEC compliant) consult catalog 0972CT0401.

[8] Use as a guideline for sizing wire through sensor.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026


MasterPacT NT


MasterPacT NW

MasterPacT NT and NW Circuit Breakers

The MasterPacT NT and NW universal power circuit breakers offer a family of circuit protection products meeting the most common world standards, ANSI, UL and IEC. The basic design platform for each is common. The final result is UL, ANSI and IEC circuit breakers with the same basic external dimensions, features and accessories.

- Complete product offering up to 200 k AIR without fuses
- Circuit breakers tested to show arc flash hazard risk category as referenced by NFPA70E
- 800 A to 6000 A frames, fixed and draw-out
- Rated for AC voltage systems through 600 V (635 V ANSI)
- Short-time withstand ratings up to 100 kA
- Cradle position indicator: connected, test and disconnected
- Simple, visual contact wear indicators
- Full complement of field-installable accessories common to all standards
- Four interchangeable MicroLogic trip units to choose from
- Available PowerLogic™ based power metering and monitoring capabilities
- Available protective relay functions as defined by ANSI C37.2 and C37.90

The following charts show the MasterPacT NW and NT ratings for ANSI and UL 489. See the Catalog **0613CT0001**.

Table 7.146: MasterPacT NW Circuit Breaker Ratings

Standard Frame Rating Interrupting Code		ANSI C37 Certified/UL 1066 Listed																		UL 489 Listed							
		800–1600 A						2000 A					3200/4000 A *[9]*				4000/5000 A			800/1200/1600/2000 A				2500/ 3000 A		4000/ 5000/ 6000 A	
		N1	H1	H2	H3	L1 *[10]*	L1F *[10]*	H1	H2	H3	L1 *[10]*	L1F *[10]*	H1	H2	H3	L1 *[10]*	H2	H3	L1 *[10]*	N	H	L *[10]*	LF *[10]*	H	L *[10]*	H	L *[10]*
Interrupting Current (kA RMS) 50/60 Hz	240 Vac	42	65	85	100	200	200	65	85	100	200	200	65	85	100	200	85	100	200	65	100	200	200	100	200	100	200
	480 Vac	42	65	85	100	200	200	65	85	100	200	200	65	85	100	200	85	100	200	65	100	150	150	100	150	100	150
	600 Vac	42	65	85	85	130	130	65	85	85	130	130	65	85	85	130	85	85	130	50	85	100	100	85	100	85	100
Short-time Withstand Current (kA RMS)		42	65	85	85	30	22	65	85	85	30	22	65	85	85	100	85	85	100	42 *[11]*	65 *[11]*	30 *[11] [12]*	22	65	65	85	100
Built-in Instantaneous Override (kA RMS ±10%)		35 *[13]*	35 *[13]*	35 *[13]*	85	35 *[13]*	24	—	—	85	35	24	—	—	85	117	—	—	117	40	40	35 *[11] [12]*	24	65	65	75	75
Close and latch rating (kA RMS)		42	65	40	40	25	22	65	40	40	25	22	65	40	40	40	85	75	40	40	40	25 *[14]*	22	40	40	40	40
Tested to show arc flash hazard risk category as referenced by NFPA70E		—	—	—	—	—	Yes	—	—	—	—	Yes	—	—	—	—	—	—	—	—	—	—	Yes	—	—	—	—
Breaking time		25–30 ms with no intentional delay (9 ms for L1, L1F, L and LF)																									
Closing time		70 ms																									
Sensor Rating		100–250 A 400–800 A 800–1600 A						1000–2000 A					1600–3200 A				2000–4000 A 2500–5000 A			100–250 A 400–800 A 600–1200 A 800–1600 A 1000–2000 A				1200–2500 A 1600–3000 A		2000–4000 A 2500–5000 A 3000–6000 A	
Endurance Rating (C/O Cycles) With No Maintenance	Mechanical	12,500						10,000					10,000			5k	5,000			12,500 *[15]*				10,000		5,000	
	Electrical	2800						1,000					1,000			1k	1,000			2800 *[15]*				1,000		1,000	

[9] 4000 A standard width circuit breaker is not available in L1 interrupting rating code or drawout construction (fixed mounting only).
[10] Drawout mounted only.
[11] 24 kA RMS for 800 A circuit breaker frame with 100 A or 250 A sensor.
[12] 65 kA RMS for 2000 A.
[13] None except 24 kA RMS for 800 A circuit breaker frame with 100 A or 250 A sensor.
[14] 40 kA RMS for 2000 A.
[15] The endurance rating for 2000 A, N/H/L/LF is 10,000 for mechanical and 1000 for electrical.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Table 7.147: MasterPacT NT Circuit Breaker Ratings

Standard Frame Rating Interrupting Code		ANSI C37 Certified/ UL 1066 Listed	UL 489 Listed												
		800 A	800 A					1200 A					1600 A *[16]*			
		N1	N	H	L1	L	LF *[17]*	N	H	L1	L	LF *[17]*	N	H	L1	L
Interrupting Current (kA RMS) 50/60 Hz	240 Vac	42	50	65	100	200	200	50	65	100	200	200	50	65	100	200
	480 Vac	42	50	50	65	100	100	50	50	65	100	100	50	50	65	100
	600 Vac	—	35	50	—	—	—	35	50	—	—	—	35	50	N/A	N/A
Short-time Withstand Current (kA RMS)		42	35	35	10	10	10	35	35	10	10	10	35	35	10	10
Built-in Instantaneous Override (kA RMS ±10%)		—	40	40	10	10	10	40	40	10	10	10	40	40	10	10
Close and latch rating (kA RMS)		40	25	25	10	10	10	25	25	10	10	10	25	25	10	10
Tested to show the arc flash hazard risk category as referenced by NFPA70E		—	—	—	—	—	Yes	—	—	—	—	Yes	—	—	—	—
Breaking time		25–30 ms with no intentional delay	25–30 ms with no intentional delay (9 ms for L and LF)													
Closing time		< 50 ms														
Sensor Rating		100–250 A	100–250 A					600–1200 A					800–1600 A			
		400–800 A	400–800 A					—								
Endurance Rating (C/O Cycles) With No Maintenance	Mechanical	12,500	12,500					12,500					12,500			
	Electrical	2800	2800					2800					2800			




NWMPRR

Table 7.148: MasterPacT NW/NT Circuit Breaker Remote Racking

Description	Cat. No.
MasterPacT NW/NT/MTZ1/2/3 Remote Racking Devices *[18]*	LV839291SP
MasterPacT NW/MTZ2/3 Remote Racking Device *[18]*	LV839292SP
MasterPacT NT/MTZ1 Remote Racking Device *[18]*	LV839293SP
Mounting Bracket Kit for NW/MTZ2/3 Remote Racking (contains 10 mounting brackets) *[19]*	LV839294SP
Mounting Bracket Kit for NT/MTZ1 Remove Racking (contains 10 mounting brackets) *[19]*	LV839295SP
Control Unit for NW/NT/MTZ1/2/3 Remote Racking *[19]*	S47101
30 ft Control Cable for NW/NT/MTZ1/2/3 Remote Racking *[19]*	S47102
Drive Shaft for NW/MTZ2/3 Remote Racking *[19]*	S47103
Drive Shaft for NT/MTZ1 Remote Racking *[19]*	S47105

[16] Fixed mounted only.
[17] Drawout mounted only.
[18] Unit comes with 10 mounting brackets included.
[19] For replacement only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

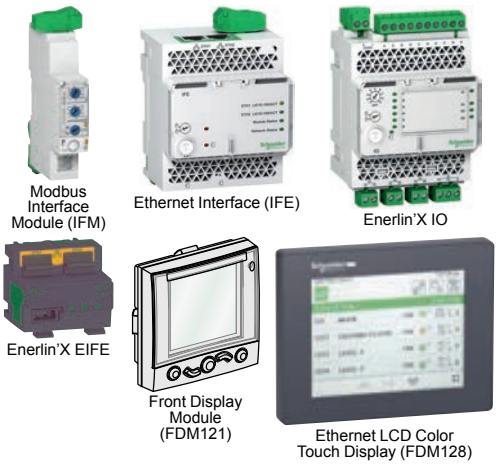

Enerlin'X System for MicroLogic Trip Units

Enerlin'X Systems enable network connectivity for MasterPacT and PowerPacT circuit breakers to provide remote monitoring, control & alarming features which is central to the Smart Systems Architecture with Square D low voltage distribution equipment.

Enerlin'X interface modules support Smart System Applications by facilitating access to circuit breaker data that provides performance information, circuit breaker status, metering measurements and various maintenance alert indicators such as contact wear, operation counters, load profile etc.

Table 7.149: Communications and IO Interface Modules and Front Display Screens for MasterPacT MTZ/NT/NW and PowerPacT H/J/L/P/R Circuit Breakers


Description	Part Number
IFM Modbus-SL Interface for LV Circuit Breaker	LV434000
IFE Interface (Ethernet Module)	LV434001
IFE Interface + Gateway (Ethernet and ModbuGateway)	LV434002
EIFE embedded Ethernet interface for drawout MasterPacT MTZ	LV851001SP
EIFE Spare part kit for one MasterPacT MTZ1 drawout circuit breaker	LV851100SP
EIFE Spare part kit for one MasterPacT MTZ2/MTZ3 drawout circuit breaker	LV851200SP
IO Module (Input/Output Programmable Module)	LV434063
FDM121 (1 Circuit Breaker to 1 Front Display over ULP)*[1]*	STRV00121
FDM128 (8 Circuit Breakers to 1 Front Display over Ethernet)	LV434128

[1] The FDM121 is not compatible with MasterPacT MTZ circuit breakers.


© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Enerlin'X System Accessories


Accessories for Enerlin'X Modules



NSX Cord for ULP Communications



Breaker Status and Control Module (BSCM)



Modbus SL Hub



Modbus SL Cord



AD External Power Supply Module 24 Vdc



ABL8RPS24030



ABL8RPS24100

Table 7.150: Accessories for Interfacing Enerlin'X Modules with MasterPacT MTZ/NT/NW and PowerPacT H/J/L/P/R Circuit Breakers

Description		Part Number
Circuit Breaker ULP Cord—BCM to Enerlin'X Interface Module	L = 0.35 m (1.15 ft.)	LV434195
	L = 1.3 m (4.27 ft.)	LV434196
	L = 3 m (9.24 ft.)	LV434197
	L = 5 m (16.40 ft.)	LV434198
NSX ULP Cord for V ≤ 480 V for PowePacT H/J/L	L = 1.3 m (4.27 ft.)	S434201
	L = 3 m (9.24 ft.)	S434202
NSX ULP Cord for V > 480 V for PowePacT H/J/L	L = 1.3 m (4.27 ft.)	S434204
	L = 3 m (9.24 ft.)	S434203
BSCM (Breaker Status and Control Module) with NSX ULP Cord For PowerPacT H/J/L	L = 1.3 m (4.27 ft.)	S434201BX
	L = 3 m (9.24 ft.)	S434202BX
Replacement BSCM for Modbus SL or ULP for PowerPacT H/J/L	—	S434220
BSCM with NSX ULP Cord for V > 480 Vac for PowerPacT H/J/L	L = 1.3 m (4.27 ft.)	S434204BX
	L = 3 m (9.24 ft.)	S434303BX
BSCM with MB SL Cord for V <= 480Vac *[2]*	L = 3.0 m (9.84 ft)	S434223BX
	L = 1.3 m (4.27 ft)	S434222BX
	L = 0.35 m (1.15 ft)	S434221BX
Modbus SL Cord for V <= 480Vac *[2]*	L = 3.0 m (9.84 ft)	S434223
	L = 1.3 m (4.27 ft)	S434222
	L = 0.35 m (1.15 ft)	S434221
Modbus SL Hub for Daisy chain, 3x RJ45 connectors, DIN rail mount, stacking connector compatible *[2]*	—	S434224
ULP Cable, 10 Cables (Male to Male RJ45)	L = 0.3 m (0.98 ft.)	TRV00803
	L = 0.6 m (1.97 ft.)	TRV00806
ULP Cable, 5 Cables (Male to Male RJ45)	L = 1 m (3.28 ft.)	TRV00810
	L = 2 m (6.56 ft.)	TRV00820
	L = 3 m (9.84 ft.)	TRV00830
ULP Cable, 1 Cable (Male to Male RJ45)	L = 5 m (16.40 ft.)	TRV00850
RJ45 Female/Female Connector, 10 Connectors		TRV00870
ULP Line Terminator, 10 Terminators		TRV00880
Insulated ULP Module and Circuit Breaker Cord (for system voltage > 480 Vac) (Cord with female socket)	L = 1 m (3.28 ft.)	S434204
	L = 3 m (9.84 ft.)	S434203
Stacking Accessory (10 stacking accessories for IFM)		TRV00217
Adaptor Cable (for IFM V2 Modbus daisy chaining)		LV434211
Modbus Line Terminator for Screw Terminal, 2 Terminators		VW3A8306DRC
Modbus Line Terminator for RJ45 Terminal, 2 Terminators		VW3A8306RC
Surface-Mounting Accessory for FDM121		TRV00128
ULP Port Modules for:		
MasterPacT MTZ1 Fixed Circuit Breaker		LV850063SP
MasterPacT MTZ2/MTZ3 Fixed Circuit Breaker		LV850061SP
MasterPacT MTZ1 Drawout Circuit Breaker		LV850064SP
MasterPacT MTZ2/MTZ3 Drawout Circuit Breaker		LV850062
EIFE Cable for Drawout MasterPacT MTZ1 Circuit Breaker		LV851120SP
EIFE Cable for Drawout MasterPacT MTZ2/MTZ3 Circuit Breaker		LV851220SP

Recommended 24 Vdc Power Supplies

Available 24 Vdc power supplies include the range of Phaseo ABL8 modules and the AD modules:

- Schneider Electric Phaseo ABL8 power supplies (3 to 10 A, overvoltage category II) are recommended for large installations.
- Schneider Electric AD power supplies (1 A, overvoltage category IV) are recommended in the following cases:
  – For installations limited to a few IMUs.
  – As a power supply of MicroLogic trip units in MasterPacT NT/NW or PowerPacT P- and R-frame circuit breakers.

Table 7.151: Power Supply Modules for MicroLogic Trip Units and Enerlin'X Modules

Power Supply	Rating	Input-Output Voltage	Catalog No.
Schneider Electric AD Power Supply Primary overvoltage category IV Temperature: –25°C tp +70°C (-13°F to +158°F)	1A	24/30 Vac, 24 Vdc	LV454440
		48/60 Vac, 24 Vdc	LV454441
		100/125 Vac, 24 Vdc	LV454442
		110/130 Vac, 24 Vdc	LV454443
		200/240 Vac, 24 Vdc	LV454444
Schneider Electric Phaseo ABL8 Power Supply Primary overvoltage category II Temperature: 0°C tp +60°C (32°F to +140°F) (derated to 80% of the current above 50°C [122°F])	3 A	100/500 Vac, 24 Vdc	ABL8RPS24030
	5 A	100/500 Vac, 24 Vdc	ABL8RPS24050
	10 A	100/500 Vac, 24 Vdc	ABL8RPS24100

[2] Modbus serial only <= 480Vac. Use only with matching Modbus serial components.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

New!

Communication Architecture - Modbus Direct MCCBs

NOTE: Refer the Smart System Data Acquisition user guide (https://www.schneider-electric.us/en/download/document/0614DB1801/) to aid in component selection for Smart Systems.

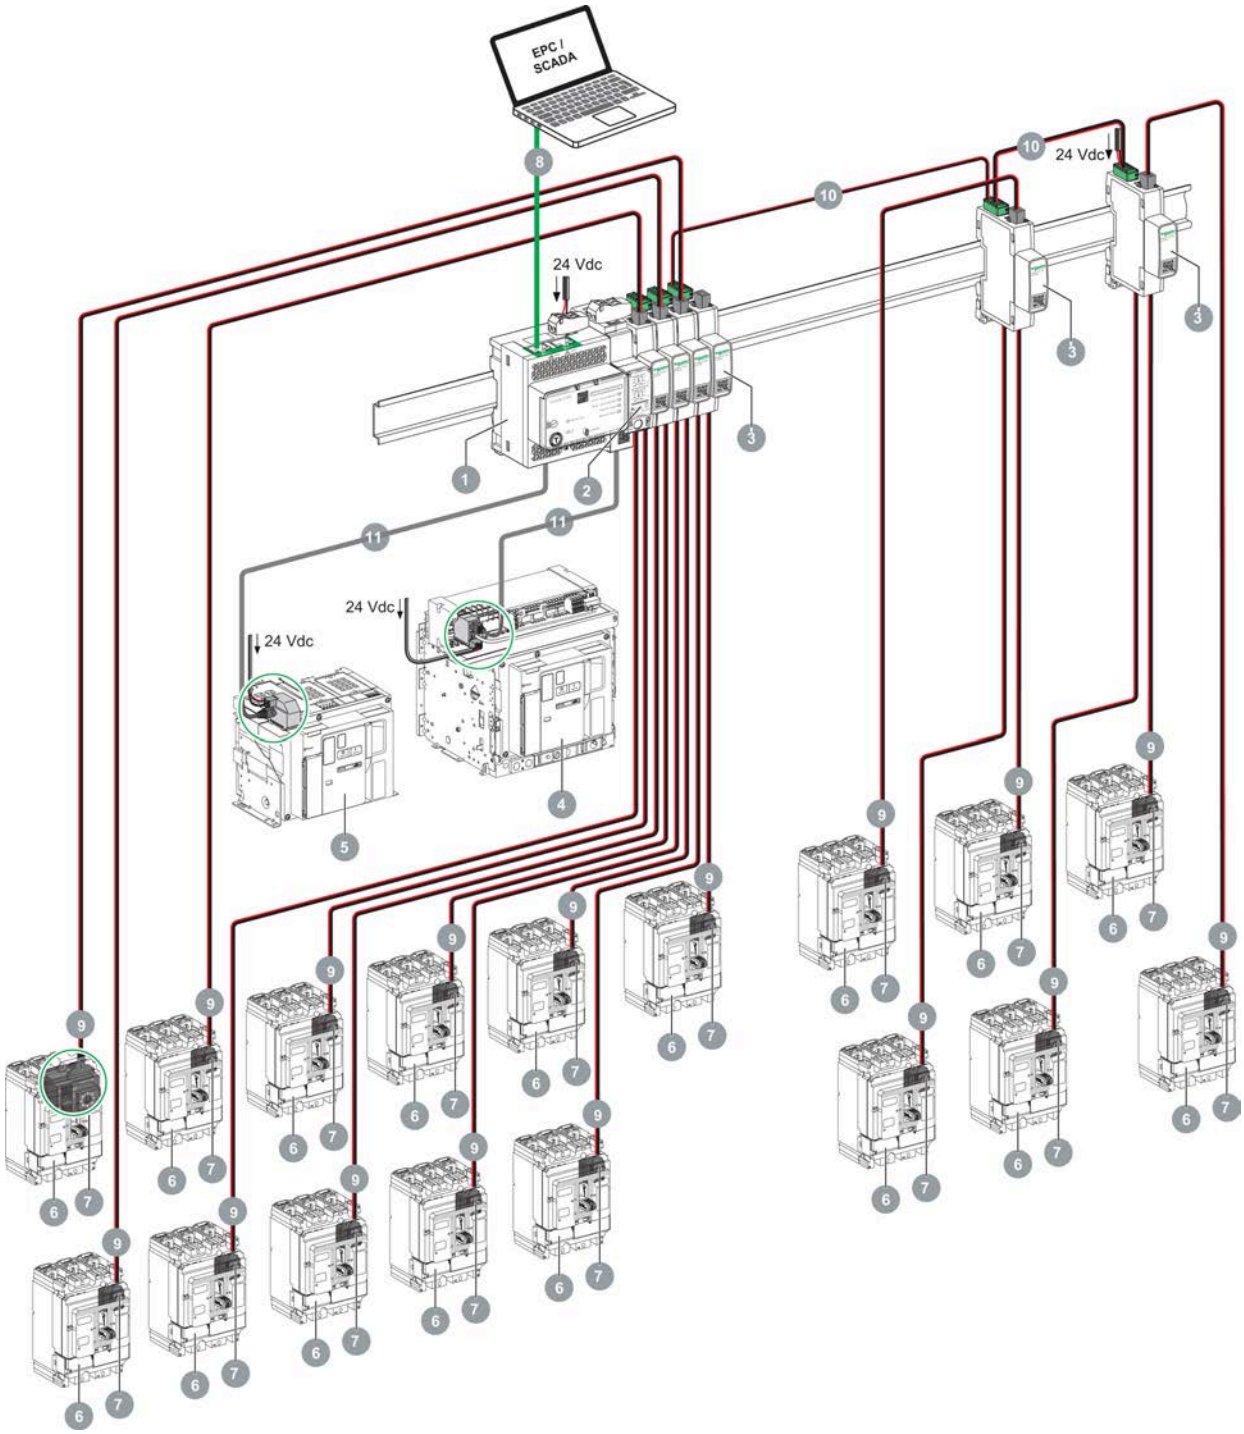



Table 7.152: Legend

1	IFE (LV434001/LV434002)	7	BSCM MBSL/ULP (S434220)
2	IFM (LV434000)	8	Ethernet
3	Modbus SL hub (S434224)	9	BSCM MBSL cord (S434221/S434222/S434223)
4	Drawout MasterPacT™ MTZ1/MTZ2/MTZ3	10	Modbus cord
5	Fixed MasterPacT MTZ1/MTZ2/MTZ3	11	ULP cord
6	ComPacT NSX/PowerPacT H-, J-, L-Frame		

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Hybrid Communication—Ethernet and Modbus

NOTE: Refer the Smart System Data Acquisition user guide (https://www.schneider-electric.us/en/download/document/0614DB1801/) to aid in component selection for Smart Systems.

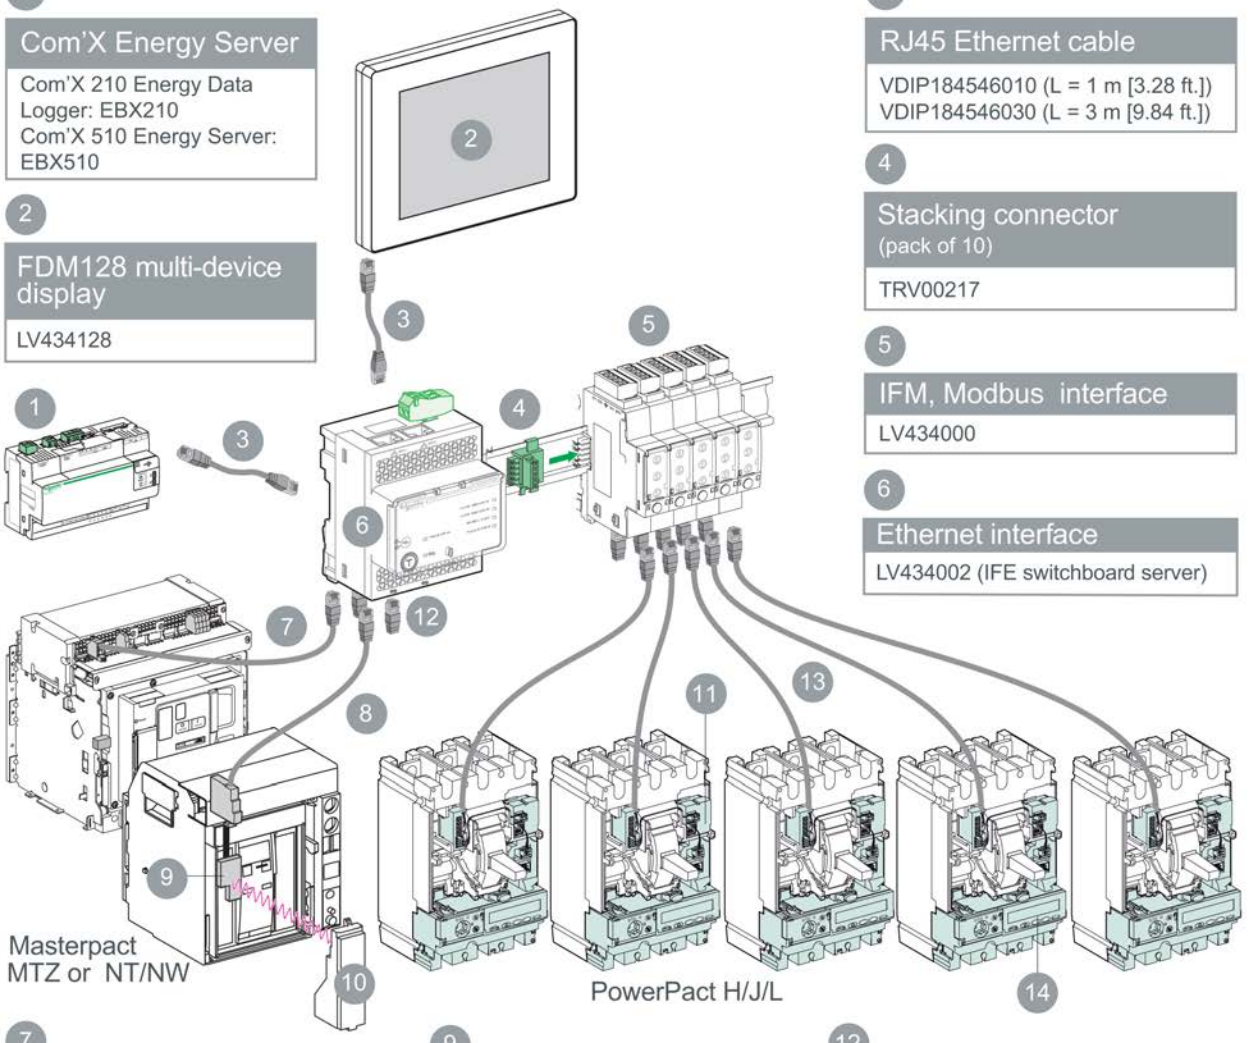

1
Com'X Energy Server
Com'X 210 Energy Data Logger: EBX210
Com'X 510 Energy Server: EBX510

2
FDM128 multi-device display
LV434128

3
RJ45 Ethernet cable
VDIP184546010 (L = 1 m [3.28 ft.])
VDIP184546030 (L = 3 m [9.84 ft.])

4
Stacking connector (pack of 10)
TRV00217

5
IFM, Modbus interface
LV434000

6
Ethernet interface
LV434002 (IFE switchboard server)

7
ULP Cable (RJ45)
TRV00803 (L = 0.3 m [0.98 ft.], Qty. 10)
TRV00806 (L = 0.6 m [1.97 ft.], Qty. 10)
TRV00810 (L = 1 m [3.28 ft.], Qty. 5)
TRV00820 (L = 2 m [6.56 ft.], Qty. 5)
TRV00830 (L = 3 m [9.84 ft.], Qty. 5)
TRV00850 (L = 5 m [16.40 ft.], Qty. 1)

8
PowerPact P/R and Masterpact NT/NW ULP cord
LV434195 (L = 0.35 m [1.15 ft.])
LV434196 (L = 1.3 m [4.2 ft.])
LV434197 (L = 3 m [9.8 ft.])
LV434198 (L = 5 m [16.40 ft.])

9
Communication option
BCM ULP for Masterpact NT, NW
ULP port for Masterpact MTZ

10
Circuit breaker control unit
Micrologic A, P or H for Masterpact NT/NW, PowerPact P,R
Micrologic X for Masterpact MTZ

11
BSCM Modbus SL/ULP
S434220

IP addresses of Ethernet Interface (IFE) can be configured in Static or DHCP mode.

12
ULP line terminations (pack of 10)
TRV00880

13
NSX cable
S434201 (L = 1.3 m [4.27 ft.], V ≤ 480 V)
S434202 (L = 3 m [9.84 ft.], V ≤ 480 V)


Isolated NSX cable
S434204 (L = 1.3 m [4.27 ft.], V > 480 V)
S434303 (L = 3 m [9.84 ft.], V > 480 V)
S434305 (L = 4.5 m [14.7 ft.], V > 480 V)

14
Micrologic E circuit breaker control unit for PowerPact H, J, L

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Communications—Direct Ethernet

NOTE: Refer the Smart System Data Acquisition user guide (https://www.schneider-electric.us/en/download/document/0614DB1801/) to aid in component selection for Smart Systems.

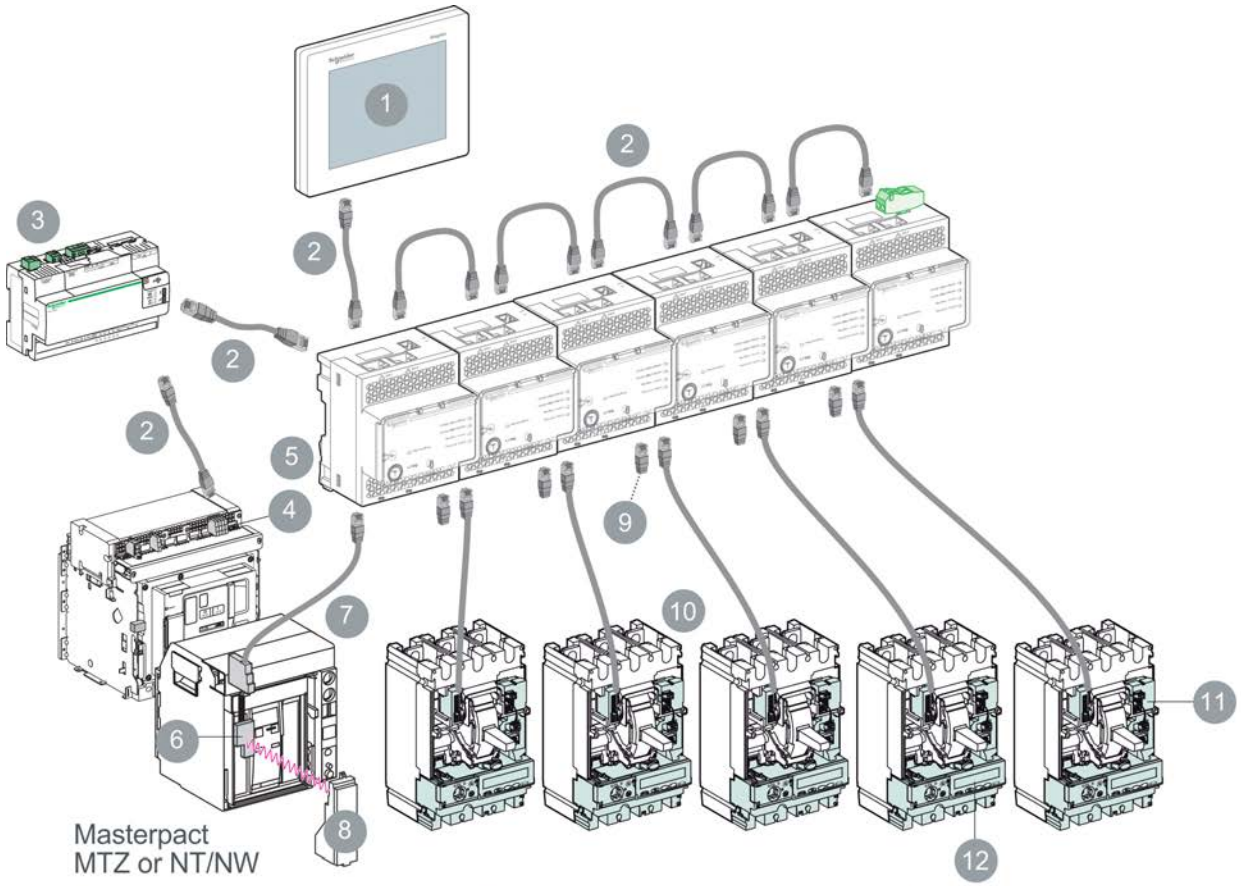

1

FDM128 Mulit-Device Display

LV434128

2

RJ45 Ethernet Cable

VDIP184546010 (L = 1 m [3.28 ft.])
VDIP184546030 (L = 3 m [9.84 ft.])

3

Com'X Energy Server

Com'X 210 Energy Data Logger: EBX210
Com'X 510 Energy Server: EBX510

4

EIFE Embedded Ethernet Interface

LV851120SP

IP addresses of Ethernet Interface (IFE) can be configured in Static or DHCP mode.

5

IFE Ethernet Interface

LV434001

6

Communication Option

BCM ULP for Masterpact NT, NW
ULP port for Masterpact MTZ

7

PowerPact P/R and Masterpact NT/NW ULP Cord

LV434195 (L = 0.35 m [1.15 ft.])
LV434196 (L = 1.3 m [4.27 ft.])
LV434197 (L = 3 m [9.24 ft.])
LV434198 (L = 5 m [16.40 ft.])

8

Circuit breaker control unit

Micrologic A, P or H for Masterpact NT/NW, PowerPact P,R
Micrologic X for Masterpact MTZ

9

ULP line terminations (pack of 10)

TRV00880

10

NSX cable

S434201 (L = 1.3 m [4.27 ft.], V ≤ 480 V)
S434202 (L = 3 m [9.84 ft.], V ≤ 480 V)

Isolated NSX cable

S434204 (L = 1.3 m [4.27 ft.], V > 480 V)
S434303 (L = 3 m [9.84 ft.], V > 480 V)
S434305 (L = 4.5 m [14.7 ft.], V > 480 V)

11

BSCM Modbus SL/ULP

S434220

12

Micrologic E circuit breaker control unit for PowerPact H, J, L

© 2026 Schneider Electric
All Rights Reserved
4/29/2026



GFM250 with Optional GFM25CT

MicroLogic™ Add-on Ground-Fault Module (GFM)

The MicroLogic Ground-Fault Module (GFM) is a UL Listed/CSA Certified circuit breaker accessory which protects equipment from damage caused by ground faults. It is an add-on module which, when connected to a PowerPacT H- or J-frame thermal-magnetic circuit breaker only, provides ground-fault sensing and ground-fault relay functions.

HD/JD ground-fault modules feature:

- Adjustable ground-fault pickup levels
- Adjustable ground-fault time delays
- Integral ground fault push-to-test feature
- Ground-fault indicator (mechanical for local, contacts for remote)
- All GFMs are supplied for I-Line™ mounting as standard, easily convertible to unit mount by removing the I-Line bracket
- Fault-powered (through the sensing current transformer) for electronics, shunt trip, and integral test feature. Meets NEC 230.95(C)
- A 12 Vdc shunt trip module (Catalog No. P29382) is required in the circuit breaker. This may be field installed or factory installed when the circuit breaker is ordered with an -SN suffix.
- UL 1053 — Ground-fault Sensing and Relaying Equipment

The GFM system requires the following:

- H-frame (15–150 A) or J-frame (150–250 A) molded case circuit breaker
- Shunt trip is required for the function of the GFM (may be factory-installed or field-installed)
- Bus bar connection (terminal nut inserts) for OFF end of circuit breaker
- Optional neutral current transformer, catalog number GFM25CT (must be ordered for 4-wire applications). NOTE: Ground-fault modules cannot be used for alarming only.

Table 7.153: Module/Enclosure Selection Chart *[1]*

Companion Circuit Breaker Prefix	Cat. No. *[2]*	I-Line Switchboard	Ground-fault Pickup Adjustment Range
HD, HG, HJ, HL	GFM150HD	LA	20–100 A
JD, JG, JJ, JL	GFM250JD	LA	40–200 A
Accessories			
H & J	GFM25CT	Optional Neutral Current Transformer (required for 4-wire loads)	



J-Frame Unit Mount with ELM Installed

Earth Leakage Module (ELM) for PowerPacT H- and J-Frame MCCBs

The Earth Leakage Module (ELM) is an add-on module which, when connected to a PowerPacT H- or J-frame MCCB, provides low-level ground-fault sensing and ground-fault relay functions.

Because these ELMs are highly sensitive (30 mA to 3 A), they provide much greater protection than GFMs (20 to 200 A sensitivity). The ELMs provide greater protection of control circuits and other sensitive equipment. The associated circuit breaker must have a 48 Vdc shunt trip, which may be field-installed (kit P29392) or factory-installed (suffix –SP) in the H- or J-Frame circuit breaker.

Add-on Earth Leakage Module (ELM) Features:

- Adjustable ground-fault pickup levels as low as 30 mA
- Adjustable ground-fault time delays from instantaneous to 500 msec (Time delay can be applied to the 30 mA setting)
- Integral ground fault push-to-test feature
- Ground-fault indicator; pop-up button for local status and contacts for remote indication (to be used only with the tripping option)
- All ELMs are supplied for I-Line™ mounting and are easily convertible to unit-mount by removing the I-Line brackets
- Three poles; 240 to 600 Vac maximum: 3-wire applications only (no neutral)
- Line-power obtained through internal bus to provide power for electronics, shunt trip, and integral test feature.
- A shunt trip is required in the circuit breaker; it may be field-installed or factory-installed in the PowerPacT H and J circuit breakers.
- UL 1053 – Ground-fault Sensing and Relaying Equipment

Table 7.154: ELM Selection Chart *[3]*

Companion Circuit Breaker *[4]*		Enclosure Space Required I-Line Switchboard	Pick-Up Adjustment Range	Catalog Number
Prefix	Size			
HD, HG, HJ, HL	15–150 A	LA	30 mA–3 A	ELM150HD
JD, JG, JJ, JL	150–250 A	LA	30 mA–3 A	ELM250JD

[1] At 250 A, the GFM250JD can be used with 80% rated circuit breakers only.
[2] See Supplemental Digest Section 3 for additional GFMs.
[3] At 250 A, the ELM250JD can be used with 80% rated circuit breakers only.
[4] For Factory Installation of ELM Module: For termination designation (3rd letter of catalog number) use ONLY “M”. Add factory installed 48 Vdc shunt trip (suffix SP) to breaker plus suffix VL or VM.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Miniature and Molded Case Circuit Breaker Dimensions

Table 7.155: QO™, QOU, Multi9™ Circuit Breakers

Circuit Breaker Cat. No. Prefix	Poles	Fig. No.	Dimensions—Inches						
			A	B	C	D	E	F	G
QO, QOB	1	1	0.75	3.00 *[1]*	2.31	2.91	2.25	—	0.59
	2	2	1.50	3.00 *[1]*	2.31	2.91	2.25	—	1.34
	3	3	2.25	3.00 *[1]*	2.31	2.91	2.25	—	2.09
QOB-VH 150 A QOB-VH 110–150 A	2	2	3.0	5.72	2.53	4.90	3.78	—	2.85
	3	3	4.50	5.72	2.53	4.90	3.78	—	4.35
QO-PL QO-GFI QO-EPD	1	4	0.75	4.12 *[2]*	2.31	2.91	2.25	—	0.59
	2	5	1.50	4.12 *[2]*	2.31	2.91	2.25	—	1.34
	3	5	2.25	4.12 *[2]*	2.31	2.91	2.25	—	2.09
QOU QYU Low Ampere	1	6	0.75	4.05 *[3]*	2.38	2.98	2.25	5.00 *[4]*	0.62
	2	7	1.50	4.05 *[3]*	2.38	2.98	2.25	5.00 *[4]*	1.37
	3	8	2.25	4.05 *[3]*	2.38	2.98	2.25	5.00 *[5]*	2.12
QOU High Ampere	1	10	0.75	4.45	2.37	2.96	2.25	6.78	—
	2	11	1.50	4.45	2.37	2.96	2.25	6.78	—
	3	12	2.25	4.45	2.37	2.96	2.25	6.78	—
Multi9™ C60	1	13	0.71	3.19	1.73	2.76	1.77	—	—
	2	14	1.42	3.19	1.73	2.76	1.77	—	—
	3	15	2.13	3.19	1.73	2.76	1.77	—	—
	4	16	2.84	3.19	1.73	2.76	1.77	—	—
QO-PLPS Power Supply	2	9	1.45	4.35	2.42	3.11	—	—	—

Table 7.156: QB, QD, QG, QJ, Q4, FA, LA, Circuit Breakers

Circuit Breaker Cat. No. Prefix	Poles	Fig. No.	Dimensions—Inches							
			A	B	C	D	E	F	G	H
QB, QD, QG, QJ	2	22	6.47	3.00	3.02	3.93	*[6]*	4.25	—	—
	3	23	6.47	4.50	3.02	3.93	*[6]*	4.25	1.50	0.75
FAL, FHL	1	21	6.00	1.50	3.16	4.13	0.44	5.13	1.50	—
	2	22	6.00	3.00	3.16	4.13	0.44	5.13	—	—
	3	23	6.00	4.50	3.16	4.13	0.44	5.13	1.50	0.75
Q4L, LAL, LHL	2 & 3	23	11.00	6.00	4.06	5.84	0.88	9.25	2.00	1.00

Table 7.157: Shipping Weights*[7]*

Frame Size	Approx. Shipping Weight (Lbs.)	Frame Size	Approx. Shipping Weight (Lbs.)
FAL, FHL 1P	2	QB, QD, QG, QJ	4
FAL, FHL 2P	3	LAL, LHL	15
FAL, FHL 3P	5	Q4L	15


Figure 1




Figure 2


Figure 3



QO, QOB





Figure 4


Figure 5


QO-GFI, QO-PL
QO-EPD



QOU, QYU
Low Ampere



Figure 6



Figure 7



Figure 8



Figure 9
QO-PLPS



Figure 10




Figure 11


Figure 12



QOU
High Ampere



Figure 13



Figure 14




Figure 15


Figure 16



C60



Figure 21




Figure 22


Figure 23


[1] 35–70 A is 3.12 in; 80–100 A 2P and 70–100 A 3P are 3.50 in.
[2] QO-PL is 4.55 in.
[3] 80–100 A 1P and 80–125 A 2P are 4.45 in.
[4] 80–100 A 1P and 80–125 A 2P are 6.78 in.
[5] 70–100 A is 6.78 in.
[6] Dimensions E are 1.59 in at ON end and 0.63 in at OFF end.
[7] All weights are for 3P circuit breakers unless otherwise noted.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Molded Case Circuit Breaker Dimensions

Table 7.158: PowerPacT B-, H-, J-, and L-Frame Circuit Breakers

Circuit Breaker Frame	No. of Poles	Fig. No.	Dimensions — Inches							
			A	B	C	D	E	F	G	H
B-Frame	1	35	6.79	1.06	3.15	4.01	0.20	6.33	—	5.39
	2	36	6.22	2.12	3.15	4.01	0.86	4.48	—	5.39
	3	37	6.22	3.19	3.15	4.01	0.86	4.48	1.06	5.39
	4	38	6.22	4.25	3.15	4.01	0.86	4.48	2.12	5.39
H-Frame	2 *[8]*	25	6.40	2.74	2.87	4.36	0.74	4.92	—	—
	3	26	6.40	4.12	2.87	4.36	0.74	4.92	1.38	—
J-Frame	3	27	7.52	4.12	2.87	5.00	1.30	4.92	1.38	—
L-Frame	3	28	13.38	5.51	3.75	6.61	2.22	7.87	1.77	—

Table 7.159: ED, EG, EJ, and GJ Circuit Breakers

Circuit Breaker Cat. No. Prefix	No. of Poles	Fig. No.	Dimensions — Inches				
			A	B	C	D	E
ED, EG, EJ	1	29	0.98	5.66	3.09	4.05	3.32
ED, EG, EJ	2	30	1.96	5.66	3.09	4.05	3.32
ED, EG, EJ	3	31	2.94	5.66	3.09	4.05	3.32
GJ	3	32	3.54	4.72	2.76	3.94	2.20

Table 7.160: PowerPacT M-, P-, and R-Frame Circuit Breakers

Circuit Breaker Frame	No. of Poles	Fig. No.	Dimensions — Inches						
			A	B	C	D	E	F	G
M-Frame (800 A and below)	2, 3	33	12.86	8.27	5.77	8.05	2.49	7.87	7.83
P-Frame (1000–1200 A)	2, 3	33	16.16	8.27	5.77	8.05	4.19	7.87	7.83
R-Frame	2, 3	34	16.24	16.54	6.63	14.49	8.73	14.25	15.35

Table 7.161: Shipping Weights *[9]*

Frame Size	Approx. Shipping Weight (Lbs.)	Frame Size	Approx. Shipping Weight (Lbs.)
B-Frame 1P	1	H-Frame 2P	4
B-Frame 2P	2	H-Frame 3P	5
B-Frame 3P	3	J-Frame	5
B-Frame 4P	4	L-Frame	14
EDB 1P	2	M-Frame	29
EDB 2P	3	P-Frame	32
EDB 3P	4	R-Frame (Without RLTB)	52

Figure 25




Figure 26




Figure 27

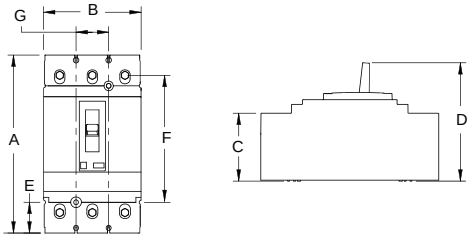


Figure 28




Figure 29




Figure 30




Figure 31





Figure 32






Figure 33




Figure 34

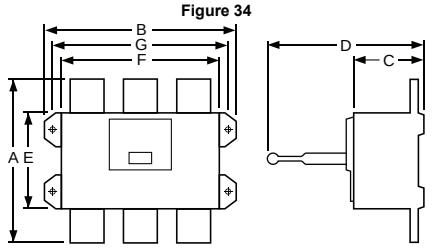


Figure 35

Figure 36


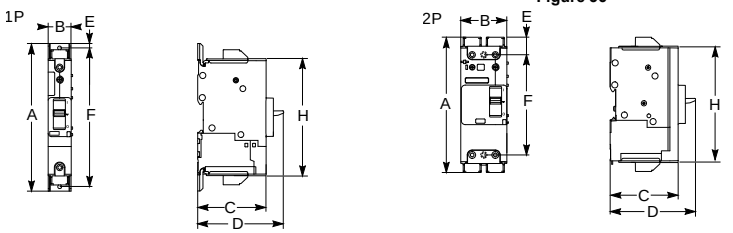


Figure 37

Figure 38

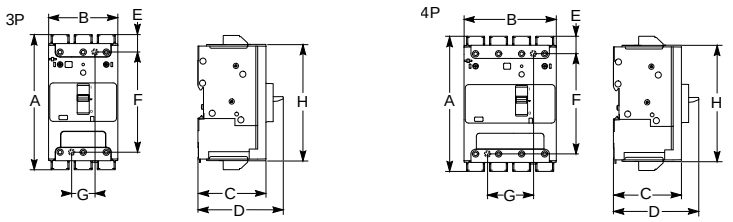

[8] Only HD and HG are in 2P module, HJ, HL and HR 2P are in 3P module.
[9] All weights are for 3P circuit breakers unless otherwise noted.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT Circuit Breaker Enclosures

- The enclosures for the family of PowerPacT circuit breakers B- through Q-frame are cULus listed unless otherwise noted.
- The enclosures are suitable for service entrance equipment when neutral assembly is installed.
- The short circuit current rating of the enclosed circuit breakers is equal to the rating of the circuit breaker installed unless otherwise noted.
- All enclosures will accept 100% rated circuit breakers unless otherwise noted.

PowerPacT B-Frame Circuit Breaker Enclosures

- The enclosures' maximum short circuit ratings are 65 kA at 600Y, 65 kA at 480 Vac, 100 kA at 240 Vac and 50 kA at 250 Vdc unless otherwise noted.
- Enclosures accept 100% rated circuit breakers.

Table 7.162: PowerPacT B-Frame Circuit Breaker Enclosures

Circuit Breaker			Enclosure Catalog Number			Accessory Catalog Number	
Cat. No. Prefix	Rating	Poles				Neutral Assembly Kit	Service Ground Kit
			NEMA 1 Flush	NEMA 1 Surface	NEMA 3R		
BDL, BGL, BJL	15–100 A	2, 3	B125F	B125S	B125RB	SN100FA	PKOGTA2
BDL, BGL, BJL	110–125 A	2, 3				SN225KA	
BKL	15–30 A	2				SN100FA	
			NEMA 4, 4X, 5 Type 304 Stainless Steel	NEMA 12 With Knockouts	NEMA 12 Without Knockouts		
BDL, BGL, BJL	15–100 A	2, 3	B125DS	B125A	B125AWK*[1]*	SN100FA	PKOGTA2
BDL, BGL, BJL	110–125 A	2, 3				SN225KA	
BKL	15–30 A	2				SN100FA	

PowerPacT™ H- and J-Frame Circuit Breaker Enclosures

The enclosures' maximum short circuit ratings are 25 kAIR at 600 Vac, 65 kAIR at 480 Vac, 125 kAIR at 240 Vac and 20 kA at 250 Vdc unless otherwise noted. Enclosures accept 100% rated circuit breakers *[2]*. The enclosures are not compatible with earth-leakage or ground-fault modules.

H- and J-frame circuit breakers with MicroLogic trip units can be used with these enclosures, but have the following limitations:

- No communication accessories can be mounted in the enclosure (no IFM or Front Display Module, IFE, etc).
- The trip unit will not be accessible or visible without the removal of the cover (except J250F and J250S).
- For LSIG, there is no room for the NCT to mount in the enclosure.

Table 7.163: PowerPacT H- and J-Frame Circuit Breaker Enclosures

Circuit Breaker			Enclosure Cat. No.			Neutral Assembly Kit Cat. No.	Service Ground Kit Cat. No.
Cat. No. Prefix	Rating	Poles					
			NEMA 1 Flush	NEMA 1 Surface	NEMA 3R		
HDL	15–100 A	3	—	HD100S *[3][4][5]*	—	SN100FA	PKOGTA2
HDL, JDL	125–225 A	3	—	JD250S *[6][4][5]*	—	SN225KA	PKOGTA2
	125–250					SN400LA	
HDL, HGL	15–100 A	2	H150F	H150S	H150R *[7]*	SN100FA	PKOGTH150
	125–150 A	2				SN400LA	
HJL, HLL	15–100 A	2	J250F	J250S *[8]*	J250R *[7][9]*	SN100FA	PKOGTH150
HDL, HGL, HJL, HLL	15–100 A	3					
	125–150 A	3				SN400LA*[10]*	
JDL, JGL, JJL, JLL	150–250 A	2, 3					PKOGTJ250
			NEMA 4, 4X, 5 *[11]* Type 304 Stainless Steel *[12]*	NEMA 4, 4x, 5 *[11]* Type 316 Stainless Steel *[12]*	NEMA 12/3R Without Knockouts *[12]*		
HDL, HGL, HJL, HLL	15–100 A	2, 3	J250DS *[13]*	J250SS *[13]*	J250AWK *[13]*	SN100FA	PKOGTH150
	125–150 A	2, 3				SN400LA*[10]*	
JDL, JGL, JJL, JLL	150–250 A	2, 3					PKOGTJ250

[1] For NEMA 3R applications, remove drain scerw from bottom end well.
[2] Use only 90°C (minimum) rated wire sized per ampacity of 75°C rated conductors for 100% rated circuit breakers.
[3] Rated for 240 Vac maximum. Short circuit current rating is 25 kAIR at 240 Vac.
[4] Accepts standard 80% rated circuit breakers only. Not rated for 100% rated circuit breakers.
[5] Use copper conductors only.
[6] Rated 480 Vac maximum. Short circuit current rating is 18 kAIR at 480 V.
[7] For conduit entry through the top end wall use one of the following Square D conduit hubs: A200L for 2.00 in., A250L for 2.50 in., A300L for 3.00 in., A350L for 3.50 in. or A400L for 4.00 in.
[8] Add suffix BE if no knockouts are required on the end walls.
[9] For access to the circuit breaker's standard, ammeter or energy trip unit panel/LCD, add suffix T.
[10] For 200% neutral use copper wire only.
[11] Complete rating is NEMA 3, 3R, 4, 4X, 5, and 12.
[12] For NEMA 3R applications, remove drain screw from bottom endwall.
[13] Add suffix VW for visibility to the standard, ammeter or energy trip unit of the PowerPact circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

PowerPacT L-Frame Circuit Breaker and Molded Case Switch Enclosures

All enclosures accept 80% rated circuit breakers. The enclosures will also accept 100% rated circuit breakers to 400 amps. The enclosures have a blank top end wall and require field-cut openings. For details and hub catalog numbers see page 3–10.

Table 7.164: PowerPacT L-Frame Circuit Breaker Enclosures

Circuit Breaker			Cat. No.			
Cat. No. Prefix	Rating	Poles	NEMA 12/3R Enclosures Without Knockouts	Neutral Assembly Kit	Copper Only Neutral Assembly Kit	Service Ground Kit
LDL, LGL, LJL, LLL, LRL	250–400 A	3	L600AWK *[14][15][16]*	SN400LA	SNC400LX	PKOGTA4
	400–600 A			SN1000MA	SNC800LX	
LGL, LLL, LRL	250–400 A	3	L600AWKMC *[17][15]*	SN400LA	SNC400LX	PKOGTA4
	400–600 A			SN1000MA	SNC800LX	

PowerPacT Q-Frame Circuit Breaker Enclosures

The enclosures for the PowerPacT Q Frame Circuit Breaker are UL listed. The short circuit ratings of these enclosed circuit breakers are equal to the interrupter ratings, at the supply voltage marked on the circuit breaker installed, unless otherwise noted.

Table 7.165: PowerPacT Q-Frame Circuit Breaker Enclosures

Circuit Breaker			Enclosure Cat. No.			Neutral Assembly Kit Cat. No.	Service Ground Kit Cat. No.
Cat. No. Prefix	Rating	Poles	NEMA 1 Flush	NEMA 1Surface	NEMA 3R		
QBL, QDL, QGL, QJL *[18]*	70–225 A	2	—	Q22200NS *[19]*	Q22200NRB *[19]*	—	PKOGTA2
		2, 3	Q23225NF	Q23225NS	Q23225NRB		

PowerPacT M- and P-Frame Circuit Breaker Enclosures

All enclosures will accept 80% rated circuit breakers. The P1200 enclosures will accept 100% rated circuit breakers to 800 A. If a CT neutral is required, the enclosure will no longer accept a 200% neutral. The M800R and the P1200R enclosures have a blank top end wall and require field-cut openings. For details and hub catalog numbers see page 3-10.

Table 7.166: PowerPacT M- and P-Frame Circuit Breaker Enclosures

Circuit Breaker			Cat. No.						
Cat. No. Prefix	Rating	Poles	Enclosure			Neutral Assembly Kit	200% Neutral Kit	CT Neutral Kit *[20][21]*	Service Ground Kit
			NEMA 1 Flush	NEMA 1 Surface	NEMA 3R				
MGL, MJL. PGL, PJL, PKL, PLL	300–800 A	2, 3	—	M800S	M800R	AL800SN	SN800SNI and 2 each SN1200	S33576MK	PKOGTA4
PGL, PJL, PKL, PLL	250–1200 A	2, 3	—	P1200S	P1200R	SN1200	—	S33576MK	PKOGTA4
			NEMA 4, 4X, 5 *[22]* Type 304 Stainless Steel *[15]*	NEMA 4, 4X, 5 *[22]* Type 316 Stainless Steel *[15]*	NEMA 12/3R Without Knockouts *[15]*				
MGL, MJL. PGL, PJL, PKL, PLL	300–800 A	2, 3	M800DS	M800SS	M800AWK	AL800SN	—	S33576MK	PKOGTA4
PGL, PJL, PKL, PLL	250–1200 A	2, 3	—	—	P1200AWK	SN1200	—	S33576MK	PKOGTA4

PowerPacT L-Frame 500 Vdc Circuit Breaker Enclosures

The PowerPacT L-frame circuit breaker enclosure's maximum short circuit rating is 20 kAIR at 250 Vdc and 50 kAIR at 500 Vdc.

Listed for use ONLY on UPS systems.

Table 7.167: DC Circuit Breaker Enclosures for LG and LL DC-Rated Circuit Breakers

Circuit Breaker *[23]*			Cat. No.		
Cat. No. Prefix	Ampere Rating	Poles	NEMA 1 Surface Enclosure	Replacement Ground Lugs	Service Ground Kit
LGL, LLL	300–600 A	3	L1200S	8010440301	Standard
	700–1200 A	4	L1200S		

[14] Will accept PowerPacT L-frame circuit breakers and Motor Protectors with suffixes M38X
[15] For NEMA 3R applications, remove drain screw from bottom endwall.
[16] Add suffix VW for visibility to the standard, ammeter or energy trip unit of the PowerPact circuit breaker.
[17] Will accept PowerPacT L-frame Molded Case Switches.
[18] When the QJL circuit breaker is installed in the enclosure, the enclosure is limited to Short Circuit Current ratings of 65 kAIR at 240 V and 100 kAIR at 208 V.
[19] Limited to 200 A.
[20] Order current transformer kit S33576 seperately.
[21] Current transformers applicable only on PowerPacT P circuit breakers. Current limitations are 400–800 A and 400–1200 A respectively for the M800 and P1200 family of enclosures.
[22] Complete rating is NEMA 3, 3R, 4, 4X, 5, and 12.
[23] Use 500 Vdc or 250 Vdc rated circuit breakers only.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026


LA400AWK


LA400S


LA400R

LA/LH Circuit Breaker Enclosures

LA/LH Thermal-Magnetic Circuit Breaker Enclosures

The enclosures for the LA/LH thermal-magnetic circuit breakers are UL listed and CSA certified. The enclosures are suitable for service entrance equipment when neutral assembly is installed. The short circuit ratings of these enclosed circuit breakers are equal to the interrupter rating, at the supply voltage marked on the circuit breaker installed.

The LA400R enclosure has a blank top end wall and requires field cut openings. For details and hub catalog numbers see Digest Section 3.

Table 7.168: LA/LH Thermal-Magnetic Circuit Breaker Enclosures

Circuit Breaker			Enclosure			Neutral Assembly Kit	Service Ground Kit
Cat. No. Prefix	Rating	Poles	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
			NEMA 1 Flush	NEMA 1 Surface	NEMA 3R		
LAL, LHL	125–225 A	2, 3	LA400F *[24]*	LA400S *[24]*	LA400R	SN225KA	PKOGTA2
	225–400 A					400SN	
LAL	125–400	3	—	LA400LS *[25][26][27][28]*	—	SN400LA	
			NEMA 4, 4X, 5 *[29]* Type 304 Stainless Steel *[30]*	NEMA 12K With Knockouts	NEMA 12/3R Without Knockouts *[30]*		
LAL, LHL	125–225 A	2, 3	LA400DS *[27]*	—	LA400AWK *[27]*	SN225KA	PKOGTA2
	225–400 A					SN400LA	

Enclosures for Special Applications

Hazardous Locations: NEMA 7 And NEMA 9 Circuit Breaker Enclosures

The NEMA 7 and 9 enclosures are cULus listed unless otherwise noted. They are rated for use in hazardous locations as defined in NEC Article 500. The short circuit current rating of the enclosed circuit breakers is equal to the rating of the circuit breaker installed unless otherwise noted. They are suitable for use as service entrance equipment when neutral is installed. Enclosures require the use of 75°C copper wire only. The NEMA 7 enclosures are suitable for rainproof applications when the included PKDB1 breather and drain kit is installed.

Table 7.169: NEMA 7 and NEMA 9 Circuit Breaker Enclosures; Thermal-Magnetic B-Frame and PowerPacT J-Frame Cicuit Breakers

Circuit Breaker			Enclosure Catalog Number		Neutral Assembly Kit Cat. No.	Service Ground Kit Cat. No.	Threaded Conduit Provisions, Inches
Cat. No. Prefix	Rating	Poles	NEMA 7/9 Cast Aluminum *[31][32]*	NEMA 9 Cast Aluminum *[32]*			
BKL	15–30 A	2	B100X	—	100SNA	Included	1 1//4 in.
BDL, BGL, BJL	15–100 A	2, 3					
JDL, JGL	150–225 A	2, 3	J225X *[33][34]*	J225Y *[33][34]*	225SNA	Included	2 1/2 in.

Enclosed Molded Case Switches

For information on enclosed molded case switches, see Supplemental Digest Section 3.

[24] Enclosures are provided with the Handle Padlock Attachment (HPALM) for field installation to lock the circuit breaker in the “ON” or “OFF” positions.
[25] Use copper conductors only.
[26] Maximum short circuit and voltage is 30 kAIR at 480 Vac.
[27] LAL or LHL circuit breakers with an MB or MT suffix are not compatible with these enclosures: LA400DS, LA400AWK, and LA400LS.
[28] Enclosure cover has an integral padlock provision to provide a means to lock the circuit breaker in the “ON” or “OFF” position.
[29] Complete rating is NEMA 3, 3R, 4, 4X, 5, and 12.
[30] For NEMA 3R applications, remove drain screw from bottom endwall.
[31] NEMA 7 — Indoor Hazardous Locations — Division 1 and 2, Class I, Groups C and D; Class II, Groups E, F and G; Class III
[32] NEMA 9 — Indoor Hazardous Locations — Division 1 and 2, Class ii, Groups E, F and G; Class iii
[33] Short circuit current rating: 65 kAIR at 240 Vac, 25 kAIR at 480 Vac, and 18 kAIR at 600 Vac
[34] Not cULus listed due to wire bending space.

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Enclosure Accessories


Table 7.170: Neutral Kit Terminal Data

Neutral Kit Catalog Number	Terminal Lug Data -Total Available (Line plus Load) AWG/kcmil AL/CU	All Copper Neutral Terminal Lug Data -Total Available (Line plus Load) AWG/kcmil
100SNA	(2) 14–1/0 Cu or (2) 12–1/0 Al plus (1) 14–4 Cu	—
SN100FA	(4) 14–1/0 Cu or (4) 12–1/0 Al	—
SN225KA	(2) 4–300 Al/Cu plus (2) 14–1/0 Al/Cu	—
225SNA	(4) 6–350 Al/Cu	—
400SN	(2) 1–600 or (4) 1–250 Al/Cu, plus (2) 4–300 Al/Cu	—
SN400LA	(2) 1–600 or (4) 1–250 Al/Cu, plus (2) 4–300 Al/Cu	—
SN1000MA	(6) 3/0–500 Al/Cu, plus (1) 1–4/0 Al/Cu	—
SNC400LX	—	(2) 2—600 Cu, plus (2) 6–250 Cu
SNC800LX	—	(4) 2–600 Cu, plus (1) 2–4/0 Cu
AL800SN	(6) 3/0–500 Al/Cu, plus (2) 6–250 Al/Cu	—
SN1200	(8) 3/0–750 Al/Cu, plus (2) 6–350 Al/Cu	—
S33576MK	(8) 3/0–500 Al/Cu, plus (2) 4–300 Al/Cu	—

Table 7.171: Service Ground Kit Terminal Data

Service Ground Kit Catalog Number	Terminal Data AWG/kcmil	Lugs Per Kit
PKOGTA2	10–2/0 Cu or 6–2/0 Al	2
PKOGTH150	14–2 Al/Cu	2
PKOGTJ250	6–300 Al/Cu	2
PKOGTA4	6–250 Al/Cu	4

Terminal Shields for Service Entrance Applications
– Can be applied as line side barriers in service entrance applications
– Will fit on top or bottom of the circuit breaker



J-Frame Short Lug Shield

Table 7.172: Terminal Shields


Frame	2P	3P
PowerPacT Q	QSB2	QSB3
PowerPacT H (3 AWG Max. Wire Size)	—	S37446
PowerPacT H (3/0 Max. Wire Size)	—	S37447
PowerPacT J	—	S37448
PowerPacT M	—	MGJTC
PowerPacT P	—	PA12TC
LA/LH	—	LAHTC

See Supplemental Digest Section 3 for special options for enclosures:


- Stainless steel fronts
- Pilot lights, push buttons
- Lock-on SPL0
- Key interlock systems
- Legend plates

© 2026 Schneider Electric
All Rights Reserved
4/29/2026


Enclosure Dimensions




WB enclosure uses 2 circuit breakers
NEMA Type 1



WB enclosure uses 2 circuit breakers
NEMA Type 3R
(Uses side hinge cover)



NEMA Type 7, Type 9



NEMA Type 4, 4X, 5, 12, 12K

Table 7.173: Dimensions

Cat. No.	Series	Approximate Dimension					
		H		W		D	
		in.	mm	in.	mm	in.	mm
B125F	A01	19.5	495	9.88	251	4.13	105
B125S	A01	18.13	461	8.63	219	4.13	105
B125FSS	A01	19.5	495	9.88	251	4.13	105
B125RB	A01	18.0	457	8.88	226	4.88	124
B125DS	A01	19.5	495	9.13	232	4.88	124
B125SS	A01	19.5	495	9.13	232	4.88	124
B125A	A01	19.5	495	9.13	232	4.88	124
B125AWK	A01	19.5	495	9.13	232	4.88	124
B125AWKMC	A01	19.5	495	9.13	232	4.88	124
HD100S	A01	17.00	431.8	7.90	200.7	4.75	120.7
H150F	A01	32.40	823	15.40	391	6.00	152
H150R	A01	31.05	789	14.47	368	6.28	160
H150S	A01	31.36	797	14.36	365	6.00	152
J250F	A01	32.40	823	15.40	391	6.00	152
J250R	A01	31.05	789	14.47	368	6.28	160
J250S	A01	31.36	797	14.36	365	6.00	152
J250DS	A01	32.26	819	9.72	247	7.94	202
J250SS	A01	32.26	819	9.72	247	7.94	202
J250AWK	A01	32.26	819	9.72	247	7.94	202
JD250S	A01	26.40	670.6	8.90	226.1	5.50	139.7
J225X	A01	22.70	577	10.93	278	7.70	196
J225Y	A01	22.70	577	10.93	278	7.70	196
L600AWK	A01	57.50	1461	20.38	518	8.25	210
L600AWKVW	A01	57.50	1461	20.38	518	8.25	210
L600AWKMC	A01	57.50	1461	20.38	518	8.25	210
L1200S	A01	51.88	1818	20.25	514	7.75	197
LA400AWK	E05	42.25	1073	13.75	349	7.25	184
LA400DS	E05	42.25	1073	13.75	349	7.25	184
LA400F	E03	45.63	1159	16.50	419	6.50	165
LA400R	E03	44.00	1118	15.38	391	7.88	200
LA400S	E03	44.50	1130	15.38	391	6.50	165
LA400LS	A01	27.40	696.0	15.40	391.2	6.625	168.3
M800S	A01	40-3/8	1025.52	21	533.4	9-3/4	247.65
M800R	A01	40-3/8	1025.52	21	533.4	9-3/4	247.65
M800DS	A01	40-7/8	1036.96	20-3/4	527.05	9-1/2	241.3
M800SS	A01	40-7/8	1036.96	20-3/4	527.05	9-1/2	241.3
M800AWK	A01	40-7/8	1036.96	20-3/4	527.05	9-1/2	241.3
P1200S	A01	52-1/8	1323.98	21	533.4	9-3/4	247.65
P1200R	A01	52-1/8	1323.98	21	533.4	9-3/4	247.65
P1200AWK	A01	53	1346.20	20-3/4	527.05	9-1/2	241.3
Q22200NRB	E05	23.38	594	7.63	194	4.75	121
Q22200NS	E05	23.13	588	7.63	194	4.25	108
Q23225NF	E05	26.25	667	9.88	251	4.75	121
Q23225NRB	E05	26.25	667	9.88	251	5.50	140
Q23225NS	E05	26.25	667	9.88	251	4.75	121

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

© 2026 Schneider Electric
All Rights Reserved
4/29/2026

Section 8

Operating Mechanisms and Disconnect Switches



UL508 Motor Disconnect Switch




UL98 Fusible Switch




UL508 VLS Switch



UL98 VLS Switch



UL98 Style Flange Handle Disconnect Switch




9421 Type L Circuit Breaker Mechanism



9422 Type R Circuit Breaker Mechanism



9422 Type C Circuit Breaker Cable Operator

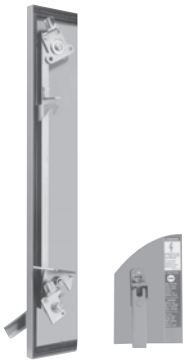

9423 Door Closing Mechanisms

Operating Mechanisms and Disconnect Switches 8-2

Selection Guide 8-2

UL 508 Motor Disconnect Switches 8-3

Mini-Vario and Vario™ Assembled and Enclosed Switches 8-3
Mini-Vario and Vario™ Accessories 8-7
MD Motor Disconnect Switches 8-8

UL 60947-4-1 and UL 98 Disconnect Switches 8-9

TeSys™ VLS Disconnect Switches 8-9
Disconnect Switches, 16–125 A 8-9
TeSys™ VLS Accessories 8-11
Fourth Pole Add-on 8-11
Add-on Blocks 8-12
Sequence and Maximum Combination of Add-on Blocks 8-13
Rotary Handles 8-16
Shaft Extensions, Terminal Covers, Fuse Holders, and Fuse Blocks 8-18
Dimensions: 16–125 A Disconnect Switches 8-19
Wiring Diagrams 8-22
Technical Specifications, VLS Range, 16–125 A 8-23

UL 98 IEC Style Disconnect Switches 8-24

LK4 Nonfusible and GS2 Fusible Disconnect Switches 8-24
LK4 Nonfusible Disconnect Switches 8-24
GS2 Fusible Disconnect Switches 8-26
Cable Operator Kits for GS2 Switches 8-27
Accessories, LK4 Nonfusible and GS2 Fusible 8-27
Accessories 8-27
Dimensions, LK4 Nonfusible and GS2 Fusible 8-28
LK4JU3N / LK4MU3N / LK4QU3N, 100–400 A Nonfusible Disconnect Switches—Dimensions 8-28
GS2QU3N, 400 A Fusible Disconnect Switches, Class J Fuses 8-32

Flange Mounted and Cable Operated 8-32

Disconnect Switches 8-33
Accessories, Disconnect Switches 8-34
Dimensions, Disconnect Switches 8-37

Operating Mechanisms for Circuit Breakers 8-39

Door Mounted 8-39
Flexible Cable Mechanisms 8-41

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Selection Guide









Class	MD	Vario	Enclosed Vario	VLS		LK4
Type	Motor disconnect switches	Manual motor control switches	Motor disconnect switch	Disconnect switches	Disconnect switches	Nonfusible IEC style disconnect switches
UL Rating	UL 508	UL 508	UL508	UL 508	UL 98	UL 98
Handle Type	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Mounting	—	Door or panel	—	DIN Rail (Rear Mounting) Door Mounting	DIN Rail (Rear Mounting) Door Mounting	—
Voltage (max.)	600 Vac	600 Vac	600 Vac	690 Vac	690 Vac	600 Vac
Current Ratings	30–60	10–115	UL-20-115A , IEC 32 - 175	16–63 A	63–125 A	100–1200
Horsepower Ratings (max.)	7.5–40	2–60	2–60	1–30	3–60	7.5–500
Enclosure Type	Non-Metallic NEMA 1, 3, 3R, 4, 4X, and 12	Metallic: NEMA 1, 12, 4, 4X Plastic: IP55, NEMA Type 4X	NEMA 1, 12, 3R 4, 4X	NEMA 1, 12, 3R, 4, and 4X; IEC IP65, IP66	NEMA 1, 12, 3R, 4, and 4X; IEC IP65, IP66	Handle ratings: NEMA 1, 3R, 4, 4X, 12
Accessories	Power poles and auxiliary contacts	Power poles and auxiliary contacts	Power poles and auxiliary contacts	Power poles and auxiliary contacts	Power poles and auxiliary contacts	Auxiliary contacts and power lugs
Approvals	UL File E164864 IEC standard 60947-3	UL File E164864 NLRV CSA File LR 81630 Class 3211 05	UL	UL File E487906 UL60947-4-1 / CSA 22.2 n° 60947-4-1-14	UL File E487907 UL98/CSA 22.2 n° 4	UL File E191098 WP2X / WP2X7 CSA 703149 Class 4652 04
Page	page 8-8	page 8-3	page 8-4	page 8-9	page 8-9	page 8-24

Class	GS2	9422	9421	9422	9423
Type	Fusible IEC style disconnect switches	NEMA style fused or non-fusible disconnect switches	Circuit breaker operating mechanisms	Circuit breaker operating mechanisms	Door closing mechanisms
UL Rating	UL 98	UL98	—	—	—
Handle Type	Rotary	Flange Adjustable rod or cable mechanism	Rotary	Flange Adjustable rod or cable mechanism	Rotary, works in conjunction with 9422 handle mechanisms
Mounting	Flange with cable mechanism panel	Panel or bracket mount	Panel	Panel	—
Load Voltage (max.)	600 Vac	600 Vac	600 Vac	600 Vac	—
Current Ratings	30–800	30–400	Circuit breaker frame sizes 100–1200	Circuit breaker frame sizes 100–1200	—
Horsepower Ratings (max.)	7.5–500	7.5–350	—	—	—
Enclosure Type	Handle ratings: NEMA 1, 3R, 4, 4X, 12	Handle ratings: NEMA 1, 3R, 4, 4X, 12	Handle ratings: NEMA 1, 3R, 4, 4X, 12	Handle ratings: NEMA 1, 3R, 4, 4X, 12	Handle ratings: NEMA 4 and 12 sheet steel or stainless
Accessories	Auxiliary contacts and power lugs	Auxiliary contacts	Auxiliary contacts	Auxiliary contacts	Right or left-hand operation
Approvals	UL File E191098 WP2X / WP2X7 CSA 703149 Class 4652 04	UL File E52639 WHTY2 CSA LR44199 Class 4652-04	UL File E62922 DIHS2 CSA LR44199 Class 3211 07	UL File E62922 DIHS2 CSA LR44199 Class 3211 07	—
Page	page 8-26	page 8-33	page 8-39	page 8-41	Refer to Supplemental Digest Section 15

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



VCFN12GE

Identification System

Mini-Vario and Vario™ rotary manual motor-control switches from 12–175 A are suitable for on-load making and breaking of resistive or mixed resistive inductive circuits where frequent operation is required. They can also be used for direct switching of motors in utilization categories AC-3 and DC-3 specific to motors. Vario manual motor-control switches are suitable for isolator applications with fully visible indication (since the handle cannot be in the open position unless all the contacts are actually open and separated by the appropriate isolating distance), and the handles are padlockable.

The Mini-Vario and Vario catalog numbers are described in Table 8.1.

Table 8.1: Identification System

					V CF N12 GE
Model (V-Vario, K-Operator)					
Operator Type/ Accessory Designation					
CD	Single hole Red & Yellow		**BD**	Single hole Black and Gray	
CF	Four hole Red & Yellow		**BF**	Four hole Black and Gray	
CCD	Single hole Red & Yellow w/ extension shaft		**VE**	Switch with Red handle installed on unit (one padlock only)	
CCF	Four hole Red & Yellow w/ extension shaft		**VD**	Switch with Black handle installed on unit (no padlock provision)	
Blank	No operator or accessory		**Z**	Accessory, power pole, neutral or ground	
Switch Type (Switches and contacts are dual rated, UL/IEC).					
Blank			**1**	Vario 20/32 A	
N12	Mini-Vario 10/12 A		**2**	Vario 25/40 A	
N20	Mini-Vario 16/20 A		**3**	Vario 45/63 A	
02	Vario 10/12 A		**4**	Vario 63/80 A	
01	Vario 16/20 A		**5**	Vario 100/125 A	
0	Vario 20/25 A		**6**	Vario 115/175 A	
Enclosure Type (if applicable)					
Blank	No Enclosure		**G30, A30, W30** Type 1/12/4/4X Metallic (Class 9421)		
GE	Mini-Vario IP55 Non-Metallic		**GU**	Vario IP55 Non-Metallic	

Mini-Vario



VN12



VN12/KCC1YZ



VBDN12



VCDN12



VCCDN20

Table 8.2: Assembled Switches—Degree of Protection IP65, Type 1 and 12

Rating (A)		Complete Switches for Door Mounting (3-Padlock)		Complete Switches for Rear Mounting, Includes Extension Shaft (3-Padlock)
		Red/Yellow (Single Hole)	Black/Gray (Single Hole)	Red/Yellow (Single Hole)
UL	IEC	Catalog No.	Catalog No.	Catalog No.
10	12	VCDN12	VBDN12	VCCDN12
16	20	VCDN20	VBDN20	VCCDN20

Table 8.3: Mini-Vario Enclosed Switches

Catalog No.	Complete Switches Mounted in IP55 Non-Metallic Enclosure
	Description
VCFN12GE	Red/Yellow Mounted In Sealable Enclosure, Non-UL Listed, Non-NEMA Rated
VCFN20GE	

Table 8.4: Component Parts

Catalog No.	Description
VN12*[1]*	10/12 A switch only
VN20*[1]*	16/20 A switch only
VZN12*[1]*	Add on power pole for 10/12 A switch
VZN20*[1]*	Add on power pole for 16/20 A switch
VZN11	Neutral Pole with early make, late break for VN12 or VN20 switch
VZN14	Grounding module for VN12 or VN20
VZN05	N.O. late make auxiliary contact *[2]*
VZN06	N.C. early break auxiliary contact *[2]*
VZN26	Single-pole shroud for auxiliary contacts
VZN08	Three-pole shroud for VN12 or VN20

Table 8.5: Operators and Accessories

Catalog No.	Description
KCC1YZ	45 x 45 mm Red & Yellow operator
KCD1PZ	60 x 60 mm Red & Yellow operator
KAD1PZ	60 x 60 mm Black & Gray operator
VZN17	300–340 mm shaft extension
VZN30	400–430 mm shaft extension
KZ32	Door interlocking plate for 45 or 60 mm operator
KZ83	Door mounting plate for 45 or 60 mm operator

[1] Switches/contacts are dual rated (UL/IEC).
[2] Auxiliary contacts are dual rated (UL/IEC 10/12 A).

© 2026 Schneider Electric
All Rights Reserved
4/21/2026







Vario

Table 8.6: NEMA Type 1 and 12 Assembled Switches for Door Mounting

Rating (A)		Complete Switches (Switch and Handle) for Door Mounting (3-padlock)			
		Red/Yellow (Four Hole)	Black/Gray (Four Hole)	Red/Yellow (Single Hole)	Black/Gray (Single Hole)
UL	IEC	Catalog No.	Catalog No.	Catalog No.	Catalog No.
10	12	VCF02	VBF02	VCD02	VBD02
16	20	VCF01	VBF01	VCD01	VBD01
20	25	VCF0	VBF0	VCD0	VBD0
20	32	VCF1	VBF1	VCD1	VBD1
25	40	VCF2	VBF2	VCD2	VBD2
45	63	VCF3	VBF3	—	—
63	80	VCF4	VBF4	—	—
100	125	VCF5	VBF5	—	—
115	175	VCF6	VBF6	—	—

Table 8.7: NEMA Type 1 and 12 Assembled Switches for Rear Mounting

Rating (A)		Complete Switches for Rear Mounting with Extension Shaft (3-Padlock)*[3]*		Switches with Handles Installed on Unit, DIN Rail Mount Only	
		Red/Yellow (Four Hole)	Red/Yellow (Single Hole)	Red/Yellow (1-Padlock)	Black/Gray (No-Padlock)
UL	IEC	Catalog No.	Catalog No.	Catalog No.	Catalog No.
10	12	VCCF02	VCCD02	—	—
16	20	VCCF01	VCCD01	—	—
20	25	VCCF0	VCCD0	VVE0	VVD0
20	32	VCCF1	VCCD1	VVE1	VVD1
25	40	VCCF2	VCCD2	VVE2	VVD2
45	63	VCCF3	—	VVE3	VVD3
63	80	VCCF4	—	VVE4	VVD4
100	125	VCCF5	—	—	—
115	175	VCCF6	—	—	—

Vario Non-Metallic Enclosed Switches

The Vario Motor Disconnect Switch is also offered as an enclosed switch. The three-pole version makes the Vario switch ideal for manual motor control applications. They are compact, easy to wire and connect, and come undrilled to allow cable entry positions.


NOTE: VC•GUN enclosures are UL approved.

Table 8.8: Non-Metallic Enclosed Switch *[4]*

Ampere Size UL/IEC	IP55-PVC 3-Pole, NEMA Type 1 & 12	NEMA 4X indoor	Hp Ratings			Catalog No.
			240 V	480 V	600 V	
20/32	X	—	5	10	10	VC1GUN
25/40	X	—	5	10	15	VC2GUN
45/63	X	—	10	20	30	VC3GUN
63/80	X	—	15	30	40	VC4GUN
100/125	X	X	25	50	50	VC5GUN
115/175	X	X	30	50	60	VC6GUN

Table 8.9: Dimensions

Type	No. of Poles	a	b	c	d	e	f
VC1GUN VC2GUN VC2GUN	3	6.5 (164)	4.8 (121)	3.4 (87)	5.6 (141)	3.9 (98)	5.2 (132)
VC3GUN VC4GUN	3	7.6 (193)	6.5 (164)	3.4 (87)	6.7 (170)	5.6 (141)	5.2 (132)
VC5GUN VC6GUN	3	11.5 (291)	9.5 (241)	5.0 (128)	10.6 (269)	8.6 (219)	7.5 (191)

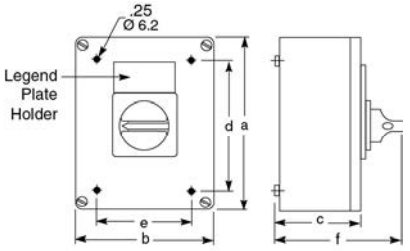

VC•GUN

[3] Complete switch includes handle operator, shaft, door interlock plate, and line terminal shroud.
[4] Assembled, includes switches mounted in enclosure with handle.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026




Vario Metallic Enclosed Switches


Vario switches meet UL508 requirements as both enclosed and open manual motor controllers. They are also marked “Suitable as Motor Disconnect” allowing installation on the load side of the motor branch circuit short-circuit and ground-fault protection. If motor branch circuit short-circuit and ground-fault protection is needed, use a GS1 or 9422 fusible switch or circuit breaker meeting NEC 430.52 requirements.

Table 8.10: Metallic Enclosed Switches *[5] [6]*

Rating (A)		Horsepower Ratings			NEMA Type 1	NEMA Type 12	NEMA Type 4/4X *[6]*
UL	IEC	240 V	480 V	600 V	Catalog No.	Catalog No.	Catalog No.
20	32	5	10	10	9421V1G30	9421V1A30	9421V1W30
25	40	5	10	15	9421V2G30	9421V2A30	9421V2W30



Class 9421 NEMA Type 1 V1G30, V2G30



Class 9421 NEMA Type 4, 4X, 12 V1W30, V2W30, V1A30, V2A30



Manual Motor Control Switch

Vario Manual Motor Control Switches

The V1 and V2 come in metallic enclosures (NEMA Type 1, 4, 4X, and 12). The NEMA 1 enclosure comes with conduit knockouts top and bottom. To factory install a VZ7 auxiliary contact in these metallic enclosures, add Form X11 to the end of the catalog number (for example, 9421V1G30X11). To factory install a VZ20 auxiliary contact in these enclosures, add Form X20 to the end of the catalog number (for example, 9421V1W30X20).

Table 8.11: Vario Manual Motor Control Switches, IEC

Rating (A) IEC	kW Rating—3-Pole Switch Body					
	230 V	240 V	400 V	415 V	500 V	690 V
12	3	3	4	4	5.5	7.5
20	4	4	5.5	5.5	7.5	11
25	5.5	5.5	7.5	7.5	11	15
32	5.5	5.5	11	11	11	15
40	7.5	7.5	15	15	18.5	15
63	15	15	22	22	30	22
80	18.5	18.5	30	30	37	30
125	22	22	37	37	45	37
175	30	30	45	45	55	45

Table 8.12: Vario Manual Motor Control Switches

Rating (A)	Horsepower Rating			Shaft Size	3-Pole Switch Body
UL	240 V	480 V	600 V	mm	Type
10	2	5	5	6	V02
16	3	7.5	7.5	6	V01
20	5	10	10	6	V0
20	5	10	10	6	V1
25	5	10	15	6	V2
45	10	20	30	8	V3
63	15	30	40	8	V4
100	25	50	50	8	V5
115	30	50	60	8	V6

Table 8.13: Switch Body

Rating (A)		Shaft Size mm	3-Pole Switch Body
UL	IEC		Type
10	12	6	V02
16	20	6	V01
20	25	6	V0
20	32	6	V1
25	40	6	V2
45	63	8	V3
63	80	8	V4
100	125	8	V5
115	175	8	V6

NOTE: Refer to Table 8.10 and Table 8.12 for horsepower ratings.

[5] Assembled, includes switches mounted in enclosure with handle.
[6] For indoor use only. The NEMA Type 4/4X enclosure is made of #304 stainless steel with 3/4 in. T&B stainless steel hubs on the top and bottom.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



Single-Hole Operator



Four-Hole Operator (All except KDF3PZ and KBF3PZ)



Four-Hole Operator KDF3PZ and KBF3PZ


Low-Profile Handle KCD1YZ


KZ67

Table 8.14: NEMA Type 1 and 12 Handle Operators: V02–V2 (6 mm Shaft), V3–V6 (8 mm Shaft) *[7]*


Operator Type		Red/Yellow Single Hole 45 x 45 mm	Red/Yellow Four Hole 45 x 45 mm	Black/Gray Single Hole 45 x 45 mm	Black/Gray Four Hole 45 x 45 mm
Switches	No. of Padlocks	Catalog No.	Catalog No.	Catalog No.	Catalog No.
V02–V2	0	KCC1LZ	KCE1LZ	KAC1BZ	KAE1BZ
V02–V2	1	KCC1YZ	KCE1YZ	—	—
Operator Type		**Red/Yellow Single Hole 60 x 60 mm**	**Red/Yellow Four Hole 60 x 60 mm**	**Black/Gray Single Hole 60 x 60 mm**	**Black/Gray Four Hole 60 x 60 mm**
V02–V2	0	KDD1PZ	KDF1PZ	KBD1PZ	KBF1PZ
V3–V4	0	—	KDF2PZ	—	KBF2PZ
V02–V2	3	KCD1PZ	KCF1PZ	KAD1PZ	KAF1PZ
V3–V4	3	—	KCF2PZ	—	KAF2PZ
Operator Type		**Red/Yellow Four Hole 90 x 90 mm**	**Black/Gray Four Hole 90 x 90 mm**		
V5–V6	0	KDF3PZ	KBF3PZ		
V5–V6	3	KCF3PZ	KAF3PZ		

Table 8.15: Low Profile Handle Operators *[7]*


Operator Type		Red/Yellow Single Hole 60 x 60 mm	Red/Yellow Four Hole 60 x 60 mm	Black/Gray Single Hole 60 x 60	Black/Gray Four Hole 60 x 60 mm
Operator Type		**Red/Yellow Single Hole 60 x 60 mm**	**Red/Yellow Four Hole 60 x 60 mm**	**Black/Gray Single Hole 60 x 60**	**Black/Gray Four Hole 60 x 60 mm**
Switches	No. of Padlocks	Catalog No.	Catalog No.	Catalog No.	Catalog No.
V02–V2	3	KCD1YZ	KCF1YZ	KAD1PZ	KAF1XZ
V3–V4	3	—	KCF2YZ	—	KAF2XZ
Operator Type		**Red/Yellow Four Hole 90 x 90 mm**	**Black/Gray Four Hole 90 x 90 mm**		
V5–V6	3	KCG2YZ	KAG2XZ		

Table 8.16: Gasket Kits


Catalog No.	Description
KZ65	45 x 45 mm gasket for V02-V2 for 4-hole type handles (order in quantities of 5)—IP65
KZ66	60 x 60 mm gasket for V02-V2 for 4-hole type handles (order in quantities of 5)—IP65
KZ62	60 x 60 mm gasket for V3-V4 for 4-hole type handles (order in quantities of 5)—IP65
KZ67	90 x 90 mm gasket for V5-V6 for 4-hole type handles (order in quantities of 5)—IP65



Single-Hole Mounting Dimensions



Four-Hole 60 x 60 Mounting Dimensions *[8]*



Four-Hole 90 x 90 Mounting Dimensions *[8]*

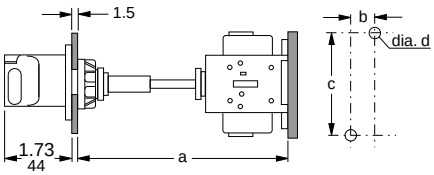



Table 8.17: Rear/Panel Mounting Switch Body Dimensions

Type	Shaft Extension	Dimensions							
		a		b		c		d	
		in.	mm	in.	mm	in.	mm	in.	mm
V02 to V2	VZ17 VZ30	5.5–13.0 5.5–16.9	140–330 140–430	0.60	15	2.4	60	0.17	4.2
V3 to V4	VZ18 VZ31	5.5–12.6 5.5–16.5	140–320 140–420	0.79	20	2.4	60	0.20	5.2
V5 to V6	VZ18 VZ31	6.5–13.8 6.5–17.7	165–350 165–450	1.20	30	3.9	100	0.28	7.0

[7] When using these handles for replacements on the non-metallic enclosed switches, the handle shaft that comes with the enclosure must be reused. See Section 15 of the Supplemental Digest.


[8] The door interlock plate included with VCC Kits has the same drilling as the handle operators.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

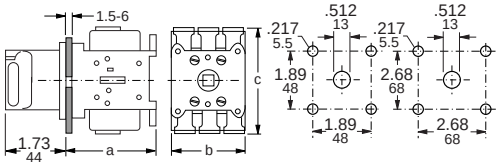



Shaft Extension Kit



Door Interlock Plate
KZ32




Add-On Contact Module



Terminal Shroud for
Main Switch VZ8



Terminal Shroud for
Auxiliary Contact VZ29



Main Pole Module

Mini-Vario and Vario™ Accessories

Table 8.18: Door Mounting Switch Body Dimensions

Switch Type	Dimensions						Weight Approx. lbs.
	a		b		c		
	in.	mm	in.	mm	in.	mm	
V02 to V2 *[9]*	2.83	72	2.17	55	2.91	74	0.44
V02 to V2	2.36	60	2.17	55	2.91	74	0.44
V3 to V4	2.56	65	2.36	60	3.27	83	1.10
V5 to V6	3.54	90	3.54	90	4.92	125	2.00

Table 8.19: Shaft Extension and Door Interlock

Switch Type	Maximum Panel Depth		Shaft Extension Kit	Door Interlock Plate	Door Mounting Plate
	in.	mm			
V02 to V2	13.0	330	VZ17	KZ32	KZ83
V3, V4	12.6	320	VZ18	KZ74	KZ81
V5, V6	13.8	351	VZ18	KZ74	KZ81
V02 to V2	16.9	429	VZ30	KZ32	KZ83
V3, V4	16.5	419	VZ31	KZ74	KZ81
V5, V6	17.7	450	VZ31	KZ74	KZ81

Table 8.20: Accessories

Switch Type	Line Side Terminal Shroud For Main Switch	Terminal Shroud for Add-on Power Pole	Terminal Shroud for Auxiliary Contact
V02 to V2	VZ8	VZ26	VZ29
V3, V4	VZ9	VZ27	VZ29
V5, V6	VZ10	VZ28	VZ29

Table 8.21: Add-On Contact Modules

Switch Type	Main Pole Module	Main Pole	Ampere Rating UL/IEC	Auxiliary Contacts Rated UL/IEC 10/12 A	
				1 N.O., 1 N.C.	2 N.O.
V02	VZ02	VZ02	10/12	VZ7 Early Break, Late Make	VZ20
V01	VZ01	VZ01	16/20		
V0	VZ0	VZ0	20/25		
V1	VZ1	VZ1	20/32		
V2	VZ2	VZ2	25/40		
V3	VZ3	VZ3	45/63		
V4	VZ4	VZ4	63/80		
V5	—	—	—		
V6	—	—	—		

Table 8.22: Add-On Contact Modules

Switch Type	Neutral Modules Early Make/Late Break	Grounding Module	Auxiliary Contacts	
	Catalog No.	Catalog No.	Catalog No.	Description
V02–V2	VZ11	VZ14	VZ7	1 Late Make, N.O. & 1 Early Break, N.C.
V3–V4	VZ12	VZ15	VZ20	2 N.O. Contacts
V5–V6	VZ13	VZ16	—	—

Table 8.23: Labeling Accessories

Nameplate Holder with Nameplate		Nameplate Holder Only	Nameplate Only	
Size	Catalog No.	Catalog No.	Use With	Catalog No.
45 x 45 mm	KZ13	KZ14	KZ14	KZ76
60 x 60 mm	KZ15	KZ16	KZ16	KZ77
90 x 90 mm	KZ103	KZ101	KZ1010	KZ100

Table 8.24: Shrouds


Switch Type	3-Pole Shroud	Single-Pole Shroud	
	Catalog No.	For Add-On Power Pole	Catalog No.
V02–V2	VZ8	VZ02–VZ2, VZ11, & VZ14	VZ26
V3–V4	VZ9	VZ23, VZ4, VZ12, & VZ15	VZ27
V5–V6	VZ10	VZ13 & VZ16	VZ28
—	—	For 2-Pole Aux. Contact	VZ29

Table 8.25: Main Pole Module Dimensions

Switch Type	Dimensions						Weight Approx. lbs.
	a		b		c		
	in.	mm	in.	mm	in.	mm	
V 02 to V Z2	0.63	16	2.9	74	1.38	35	0.10
V Z3 to V Z4	0.79	20	3.3	83	1.80	46	0.22

[9] Dimensions for single-hole mounting.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

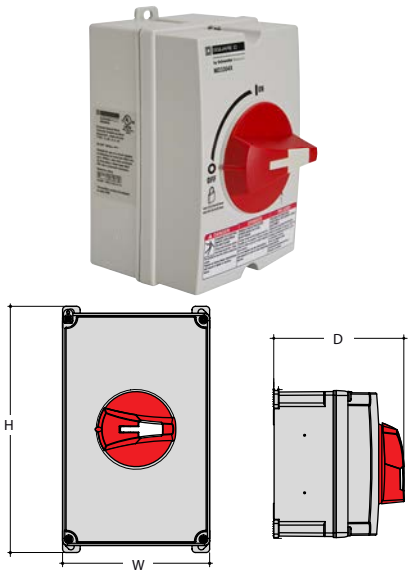

MD Motor Disconnect Switch

MD Motor Disconnect Switches

The MD motor disconnect switch is listed UL 508 Suitable for Motor Control (UL File E164864) and conforms to IEC standard 60947-3. It is in a compact NEMA 4X enclosure suitable for use in NEMA 1, 3, 3R, 4, 4X, and 12 applications. The MD's key benefits are an extremely small footprint, a more economically efficient NEMA 4X solution, and a handle interlock preventing cover removal when the switch is in the ON position.

Switch features:

- Suitable for NEMA 1, 3R, 4, 4X, and 12 enclosure applications.
- Complies with OSHA lockout/tagout requirements—accepts up to three 8 mm padlocks.
- For accessories, see Table 8.20.

Table 8.26: MD Motor Disconnect Switch—Non-Metallic NEMA 1, 3, 3R, 4, 4X, and 12 Enclosure

Amperes	Cat. No.	Maximum Horsepower Ratings Three-Phase Vac			Height (in.)	Width (in.)	Depth (in.)
		220–240	440–480	600			
30	MD3304X	7.5	20	25	6.38	3.9	4.37
60	MD3604X	20	40	40	8.27	4.94	4.37

Table 8.27: MD Motor Disconnect Accessories

Cat. No.	Description
MDSAN20	2 N.O. auxiliary contact module
MDSAN11	1 N.O. and 1 N.C. auxiliary contact module
MDS30P	30 A add on power pole

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Disconnect Switches, 16–125 A

Style	DIN Rail, Rear Mounting									Door Mounting							
Width	36 mm (1.42 in.)					70 mm (2.75 in.)				36 mm (1.42 in.)				70 mm (2.75 in.)			
• Versions: DIN rail mounting, door mounting, and rear mounting • Wide range of accessories • Changeover switches • Conforming to UL 60947-4-1 (16–63 A) or UL 98 (63–125 A) specifications																	
Ampere rating	16	25	32	40	63	63	80	100	125	16	25	32	40	63	80	100	125
Three pole	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4th pole—simultaneous closing	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4th pole—early-make closing	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Fuse holder	•	•	•														
Mechanical 6-8 pole coupling system	•	•	•	•	•	•	•	•	•								
Mechanical interlock for line switching	•	•	•	•	•	•	•	•	•								

Interpreting the Catalog Number

Some combinations are not available. Use this table only for interpreting the catalog number.

Table 8.28: Interpreting the Catalog Number

Example	VLS	3P	016		R	1
Description	Disconnect switch	1P = 1 pole 3P = 3 poles	016 = 16 A 025 = 25 A 032 = 32 A 040 = 40 A	063 = 63 A 080 = 80 A 100 = 100 A 125 = 125 A	D = Door mounting R = DIN rail mounting	1 = Small size (16–63 A), UL 508 2 = Large size (63–125 A), UL 98

Example	VLSH	2	S	5	R
Description	Rotary handle	1 = Recessed, 65 x 65 mm 2 = Protruding, 65 x 65 mm 3 = Pistol grip, 75 mm dia. 4 = Protruding, 48 x 48 mm	H = Hole fixing S = Screw mounting	5 = 5 mm shaft opening 7 = 7 mm shaft opening	B = Black BC = Black, changeover BD = Black, defeatable R = Red RD = Red, defeatable

Example	VLSS	150	5
Description	Shafts	Length: 150–500 mm	Cross-section: 5 = 5 mm 7 = 7 mm

Example	VLS	1P	040	R	1	S
Description	Additional Poles	Number of Poles: 1P = 1 Pole	Current: 016 = 16 A to 125 = 125 A	Mounting: R = DIN rail mounted D = Door mounted	Body Size: 1 = Small size (16–63 A) 2 = Large size (63–125 A)	Closing: S = Simultaneous closing E = Early Make closing

Example	VLS	1N	R	1
Description	Ground and Neutral Terminals	1G = 1 Pole Ground terminal 1N = 1 Pole Neutral terminal	R = DIN rail mounted D = Door mounted	1 = Small size (16–63 A), UL 508 2 = Large size (63–125 A), UL 98

Example	VLS	A	11	R	1	S
Description	Auxiliary contacts	A = Auxiliary contact	10 = 1 N.O. 11 = 1 N.O. + 1 N.C.	R = DIN rail mounted D = Door mounted	Blank = Size 1 and 2 1 = Size 1 2 = Size 2	S = Simultaneous closing E = Early make closing

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



VLS3P016R1–
VLS3P063R1

Product Overview

Compact Size

The three-pole 16–63 A disconnect switches are made up of a single unit body, a mere 36 mm (1.4 in.) wide, while those rated 63–125 A are only 70 mm (2.8 in.) wide.

Accessory Flexibility

Mounting and removal of the fourth pole and add-on blocks are simple and quick operations with no need for tools.

Certifications

All VLS disconnect switches are certified by cCSAus and are UL Listed for Canada and USA:

- 16–63 A types: certified according to UL 60947-4-1 / CSA 22.2 n° 60947-4-1-14 standards
- 63–125 A types: certified according to UL 98 / CSA 22.2 n° 4 standards



VLS3P063R2–
VLS3P125R2




VLS3P016D1–
VLS3P040D1



VLS3P063D2–
VLS3P125D2

Strokes of VLS switch poles

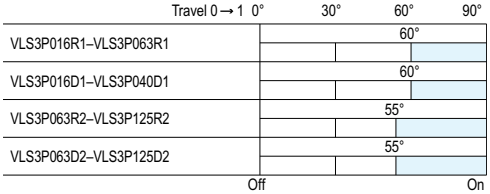

Three-Pole Disconnect Switches

Table 8.29: Certifications and Compliance (● = certification obtained)

Catalog number	cULus per UL 60947-4-1 / CSA C22.2 n° 60947-4-1-14 UL Listed (File E487906)	cULus per UL 98 / CSA C22.2 n° 4 UL Listed (File E487907)	IEC/EN 60947-1, IEC/EN 60947-3
VLS3P016R1–VLS3P040R1	●	—	Compliant
VLS3P063R1	●	—	
VLS3P016D1–VLS3P040D1	●	—	
VLS3P063R2–VLS3P125R2	—	●	
VLS3P063D2–VLS3P125D2	—	●	

Table 8.30: Selection—Three-Pole Disconnect Switches

Catalog number	IEC conventional free air thermal current (Ith), AC21A (≤690 V) (A)	IEC rated operational current (Ie) AC22A (≤690 V), AC23A (≤415 V) (A)	UL general use at 600 Vac (A)
DIN rail mounting version, complete with black handle. For rear-mounting version, separately purchase the handle and shaft extension. Refer to page 8-16 and page 8-18.			
VLS3P016R1	16	16	16
VLS3P025R1	25	25	25
VLS3P032R1	32	32	32
VLS3P040R1	40	40	40
VLS3P063R1	63	45	60
VLS3P063R2	63	63	60
VLS3P080R2	80	80	100
VLS3P100R2	100	100	100
VLS3P125R2	125	125	100
Door-mounting version (no shaft required). Separately purchase the handle. Refer to page page 8-16.			
VLS3P016D1	16	16	16
VLS3P025D1	25	25	25
VLS3P032D1	32	32	32
VLS3P040D1	40	40	40
VLS3P063D2	63	63	60
VLS3P080D2	80	80	100
VLS3P100D2	100	100	100
VLS3P125D2	125	125	100

Table 8.31: UL / CSA Ratings

Catalog number	Horsepower						General use at 600 Vac (A)	Short-circuit rating at 600 Vac (kA)	Max. fuse rating at 600 V (A)
	1 phase		3 phase						
	120 V	240 V	200–208 V	240 V	480 V	600 V			
UL 60947-4-1 and CSA 22.2 n° 60947-4-1-14 *[1]*									
VLS3P016••	1	2	5	5	10	10	16	5	30 (Type RK5)
VLS3P025••	1.5	3	7.5	7.5	15	20	25	5	30 (Type RK5)
VLS3P032••	2	5	10	10	20	20	32	5	45 (Type RK5)
VLS3P040••	2	5	10	15	20	25	40	5	45 (Type RK5)
VLS3P063R1	2	7.5	10	15	30	30	60	5	45 (Type RK5)
UL 98 and CSA C22.2 n° 4 *[2]*									
VLS3P063••	3	7.5	20 *[3]*	20	40	40	60	50	60
VLS3P080••	3	10	25 *[3]*	25	40	40	100	50	100
VLS3P100••	5	10	30 *[3]*	30	50	50	100	50	100
VLS3P125••	7.5	10	30 *[3]*	30	60	60	100	50	100

[1] Ratings are valid for VLS3P•••R• and VLS3P•••D• types, according to UL 60947-4-1 and CSA 22.2 n° 60947-4-1-14. UL Listed for USA and Canada (cULus - File E487907) as Manual Motor Controllers, while the UL designation is “General Purpose Switch. Interrupteur Usage General” and “Suitable As Motor Disconnect.”

[2] Ratings are valid for VLS3P•••R• and VLS3P•••D• types, according to UL 98 and CSA C22.2 n° 4. UL Listed for USA and Canada (cULus - File E487907) as Open Type Switches – Open type unfused switch, while UL designation is “General Purpose Switch. Interrupteur Usage General.”

[3] Voltage value is not considered in UL98 / CSA 22.2 n° 4 standards, and so is not indicated in the UL product marking.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026




VLS1P•••R•S
VLS1P•••R•E



VLS1P040D1S

Strokes of VLS poles (switch and add-on pole)

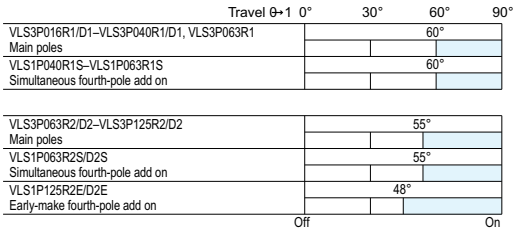

Fourth Pole Add-on

Table 8.32: General Specifications—Fourth Pole Add-on

IEC ampere ratings	16–125 A
Available versions	DIN rail mounting Door mounting Simultaneous closing with switch poles Early-make closing with respect to switch poles
Size	Compact and modular

Table 8.33: Selection—Fourth Pole Add-on

Catalog number	IEC conventional free air thermal current Ith AC21A (≤690V) (A)	IEC rated operational current Ie AC22A (≤690V), AC23A (≤415V) (A)
Simultaneous closing operation with respect to switch poles		
DIN Rail Mounting (VLS3P•••R•)		
VLS1P040R1S *[4]*	40	40
VLS1P063R1S *[5]*	63	45
VLS1P063R2S	63	63
Door Mounting (VLS3P•••D•)		
VLS1P040D1S *[6]*	40	40
VLS1P063D2S	63	63
Early-make closing operation with respect to switch poles		
DIN Rail Mounting (VLS3P•••R•)		
VLS1P125R2E *[7]*	125	125
Door Mounting (VLS3P•••D•)		
VLS1P125D2E *[8]*	125	125

NOTE: For Fourth Pole UL / CSA ratings, see page 8-10 —they are the same as the ratings for the corresponding single-phase contact switch.

Table 8.34: Certifications and Compliance for Fourth Pole Add-on Blocks (● = certification obtained)

Catalog number	Certification Standard		
	cULus per UL 60947-4-1 / CSA C22.2 n° 60947-4-1-14 / UL Listed (File E487906)	cULus per UL 98 / CSA C22.2 n° 4 / UL Listed (File E487907)	IEC/EN 60947-1, IEC/EN 60947-3
VLS1P040R1S	●	—	Compliant
VLS1P063R1S	●	—	
VLS1P040D1S	●	—	
VLS1P125R2E, VLS1P125D2E	—	●	
VLS1P063R2S	—	●	
VLS1P063D2S	—	●	

[4] For VLS3P016R1–040R1 only.
[5] For VLS3P063R1 only.
[6] For VLS3P016D1–040D1 only.
[7] For VLS3P063R2–125R2 only.
[8] For VLS3P063D2–125D2 only.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


VLSA11RS


VLSA11DS


VLSA10R1E
VLSA10R2E


VLS1NR•


VLS8C2
VLS8M•

Add-on Blocks

Table 8.35: Operational Specifications


Auxiliary contacts		
IEC conventional free air thermal current (Ith)		10 A
UL/CSA and IEC/EN 60947-5-1 designation		A600-Q600
Tightening torque		0.8 N•m (7.1 lb-in.)

Other devices		
Tightening torque	VLS1NR1	1.8–2 N•m (16–18 lb-in)
	VLS8C2, VLS8M1/M2	mounting: 0.5 N•m (4.4 lb-in) extension with handle: 0.8 N•m (7.1 lb-in)

Table 8.36: Selection—Add-on Blocks

Catalog number	Specifications
Auxiliary contacts, simultaneous operation with respect to switch poles	
VLSA11RS	1NO+1NC for VLS3P•••R• and VLS3P063R1
VLSA11DS	1NO+1NC for VLS3P•••D•
Auxiliary contacts, early-break operation with respect to switch poles	
VLSA10R1E	1EB (NO) for VLS3P016R1–VLS3P040R1, VLS3P063R1
VLSA10R2E	1EB (NO) for VLS3P063R2–VLS3P125R2
Neutral terminal	
VLS1NR1	For VLS3P016R1–VLS3P040R1, VLS3P063R1
Mechanical interlock for line changeover (I-0-II)	
VLS8C2	For VLS3P063R2–VLS3P125R2 and VLSH2S5BC: □ 5 mm (0.2 in.) *[9]*
Mechanical coupling system for 6-8 pole disconnect switches	
VLS8M1	For VLS3P016R1–VLS3P040R1 and VLS3P063R1: □ 5 mm (0.2 in.) *[9]*
VLS8M2	For VLS3P063R2–VLS3P125R2: □ 7 mm (0.3 in.) *[10]*

Strokes of VLS poles (switch with auxiliary contact blocks)

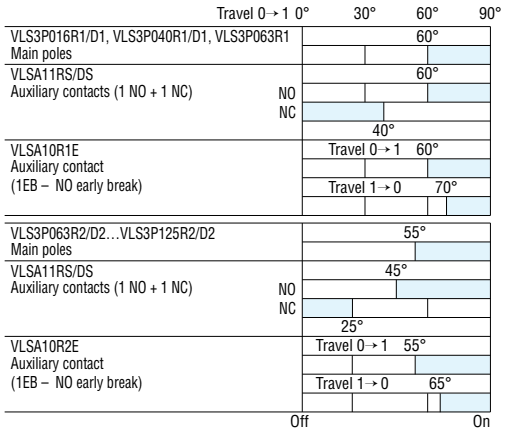


[9] Use VLSS shaft extensions.
[10] Use VLSH3S7RD handles and VLSS•••7 extensions for a rear-mounting version.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Sequence and Maximum Combination of Add-on Blocks


DIN Rail Mounting Disconnect Switches

Table 8.37: VLS3P016R1–VLS3P040R1 (DIN Rail Mounting)

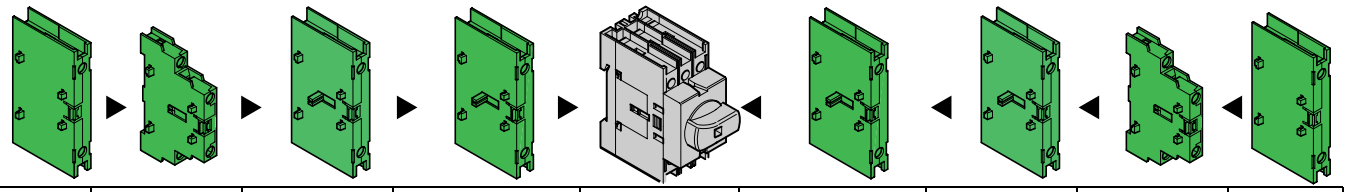


VLS1NR1	VLSA11RS	VLSA10R1E	VLS1P040R1E VLS1P040R1S	VLS3P016R1 VLS3P025R1 VLS3P032R1 VLS3P040R1	VLS1P040R1E VLS1P040R1S	VLSA10R1E	VLSA11RS	VLS1NR1
1	1	—	1		—	—	2	1
1	2	—	—		1	—	1	1
1	1	—	1		—	1	1	1
1	1	1	—		1	—	1	1
1	1	1	—		—	—	2	1
1	2	—	—		—	1	1	1
1	2	—	—		—	—	2	1
1	—	—	—		1	—	—	1
1	—	—	1		—	—	—	1
1	—	—	—		—	—	—	1

Table 8.38: VLS3P063R1 (DIN Rail Mounting)

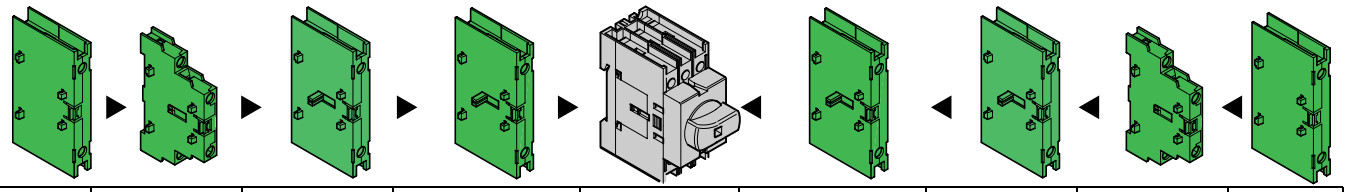

VLS1NR1	VLSA11RS	VLSA10R1E	VLS1P063R1E VLS1P063R1S	VLS3P063R1	VLS1P063R1E VLS1P063R1S	VLSA10R1E	VLSA11RS	VLS1NR1
1	1	—	1		—	—	2	1
1	2	—	—		1	—	1	1
1	1	—	1		—	1	1	1
1	1	1	—		1	—	1	1
1	1	1	—		—	—	2	1
1	2	—	—		—	1	1	1
1	2	—	—		—	—	2	1
1	—	—	—		1	—	—	1
1	—	—	1		—	—	—	1
1	—	—	—		—	—	—	1

Table 8.39: VLS3P063R2–VLS3P125R2 (DIN Rail Mounting)

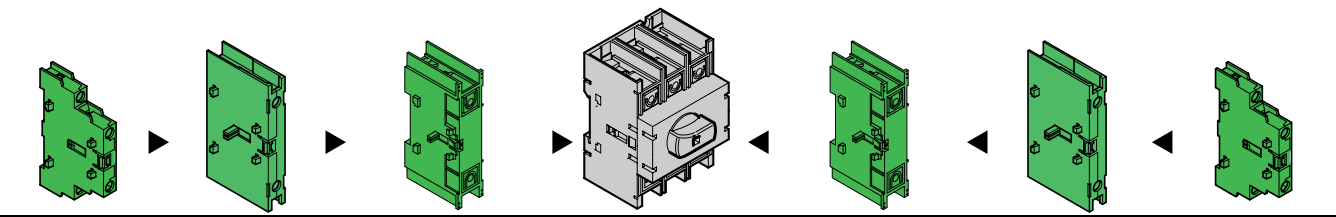


VLSA11RS	VLSA10R2E	VLS1P125R2E VLS1P•••R•S	VLS3P063R2 VLS3P080R2 VLS3P100R2 VLS3P125R2	VLS1P125R2E VLS1P•••R•S	VLSA10R2E	VLSA11RS
1	—	1		—	—	2
2	—	—		1	—	1
1	—	1		—	1	1
1	1	—		1	—	1
1	1	—		—	—	2
2	—	—		—	1	1
2	—	—		—	—	2
—	—	—		1	—	—
—	—	1		—	—	—
—	—	—		—	—	—

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Door Mounting Disconnect Switches

Table 8.40: VLS3P016D1–VLS3P040D1 (Door Mounting)

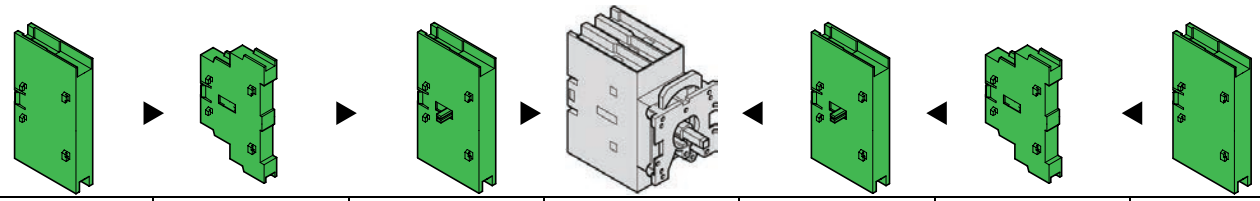

VLS1GD1	VLSA11DS	VLS1P040D1E VLS1P040D1S		VLS1P040D1E VLS1P040D1S	VLSA11DS	VLS1GD1
1	1	1	VLS3P016D1 VLS3P025D1 VLS3P032D1 VLS3P040D1	—	1	1
1	1	—		1	1	1
1	—	1		—	1	1
1	1	—		1	—	1
1	1	—		—	1	1
1	—	—		—	—	1

Table 8.41: VLS3P063D2–VLS3P125D2 (Door Mounting)

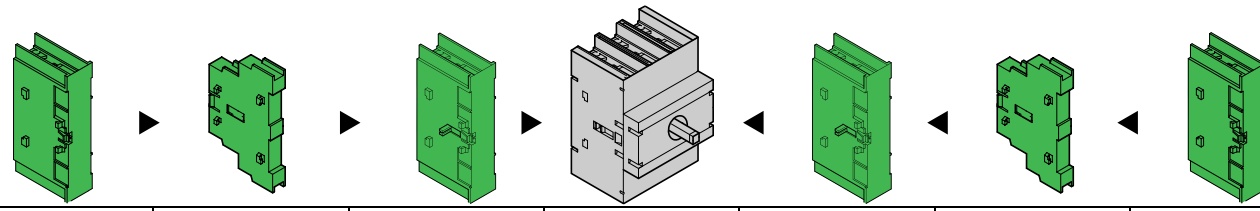


VLS1GD2	VLSA11DS	VLS1P125D2E VLS1P125D2S		VLS1P125D2E VLS1P125D2S	VLSA11DS	VLS1GD2
—	1	1	VLS3P063D2 VLS3P080D2 VLS3P100D2 VLS3P125D2	—	1	—
—	1	—		1	1	—
1	—	1		—	1	—
—	1	—		1	—	1
—	1	—		—	1	—
1	—	—		—	—	1

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Mechanical Coupling and Mechanical Interlock for Line Changeover

Table 8.42: VLS3P016R1–VLS3P040R1, VLS8C1–VLS8M1 (Rear Mounting)

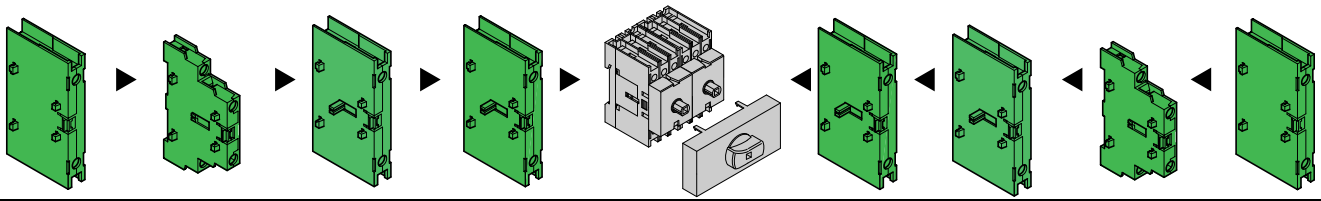


VLS1NR1	VLSA11RS	VLSA10R1E	VLS1P040R1E VLS1P040R1S	VLS8C1–VLS8M1	VLS1P040R1E VLS1P040R1S	VLSA10R1E	VLSA11RS	VLS1NR1
1	1	—	1	VLS3P016R1 + VLS3P016R1 VLS3P025R1 + VLS3P025R1 VLS3P032R1 + VLS3P032R1 VLS3P040R1 + VLS3P040R1	1	—	1	1
1	1	—	1		—	—	2	1
1	2	—	—		1	—	1	1
1	1	—	1		—	1	1	1
1	1	1	—		1	—	1	1
1	1	1	—		—	—	2	1
1	2	—	—		—	1	1	1
1	2	—	—		—	—	2	1
1	—	—	1		1	—	—	1
1	—	—	—		—	—	—	1

Table 8.43: VLS3P063R1 + VLS8C1–VLS8M1 (Rear Mounting)

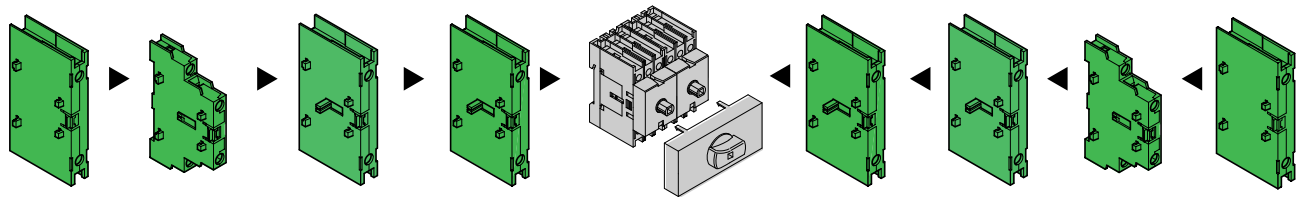

VLS1NR1	VLSA11RS	VLSA10R1E	VLS1P063R1E VLS1P063R1S	VLS8C1–VLS8M1	VLS1P063R1E VLS1P063R1S	VLSA10R1E	VLSA11RS	VLS1NR1
1	1	—	1	VLS3P063R1 + VLS3P063R1	1	—	1	1
1	1	—	1		—	—	2	1
1	2	—	—		1	—	1	1
1	1	—	1		—	1	1	1
1	1	1	—		1	—	1	1
1	1	1	—		—	—	2	1
1	2	—	—		—	1	1	1
1	2	—	—		—	—	2	1
1	—	—	1		1	—	—	1
1	—	—	—		—	—	—	1

Table 8.44: VLS3P063R2–VLS3P125R2 + VLS8C2–VLS8M2 (Rear Mounting)

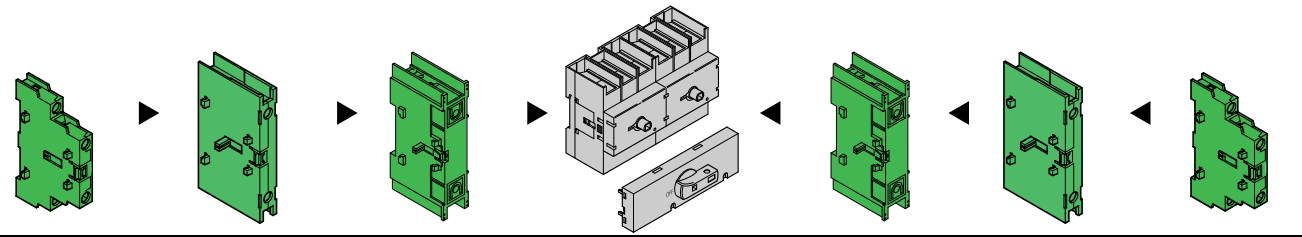

VLSA11RS	VLSA10R2E	VLS1P125R2E VLS1P•••R•S	VLS8C2 - VLS8M2	VLS1P125R2E VLS1P•••R•S	VLSA10R2E	VLSA11RS
1	—	1	VLS3P063R2 + VLS3P063R2 VLS3P080R2 + VLS3P080R2 VLS3P100R2 + VLS3P100R2 VLS3P125R2 + VLS3P125R2	1	—	1
1	—	1		—	—	2
2	—	—		1	—	1
1	—	1		—	1	1
1	1	—		1	—	1
1	1	—		—	—	2
2	—	—		—	1	1
2	—	—		—	—	2
—	—	1		1	—	—
—	—	—		—	—	—

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



VLSH1S5R (65 x 65 mm)



VLSH2S5R (65 x 65 mm)



VLSH3S7RD (75 mm dia.)



VLSH4S5R (48 x 48 mm)

Rotary Handles

Table 8.45: Selection—Rotary Handles (NEMA 1, 12, 3R, 4, and 4X. IEC IP65 unless otherwise specified)

Catalog number	Specifications
Door Mounting and Rear Mounting Handles, Padlock-ready *[11]*	
Red/yellow, rotating	
VLSH1S5R	For VLS3P•••R• and VLS3P•••D•. Screw mounting. Recessed selector. □ 5 mm (0.2 in.) *[12]*.
VLSH2S5R	For VLS3P•••R• and VLS3P•••D•. Screw mounting. Protruding selector. □ 5 mm (0.2 in.). *[12]*
VLSH2H5R	For VLS3P•••R• and VLS3P016D1–VLS3P040D1. Ring mounting. Protruding selector. □ 5 mm (0.2 in.). *[12] [13]*
VLSH2H5RD	For VLS3P•••R•. Ring mounting. Protruding selector with release, defeatable per UL60947-4-1; □ 5 mm (0.2 in.). *[12]*
VLSH2H5RL	For VLS3P•••R•, VLS3P063R1, VLS3P016D1–VLS3P040D1. Ring mounting. Low-profile protruding selector, □ 5 mm (0.2 in.).
VLSH3S7RD	For VLS3P063R2–VLS3P125R2, and VLS8M2. Screw mounting. Pistol grip with release, defeatable per 60947-4-1; □ 7 mm (0.3 in.). IEC IP66. *[14]*
VLSH4S5R	For For VLS3P•••R• and VLS3P•••D•. Screw mounting. Protruding selector. 48 mm square. □ 5 mm (0.2 in.). *[12]*
Black, rotating	
VLSH1S5B	For VLS3P•••R• and VLS3P•••D•. Screw mounting. Recessed selector. □ 5 mm (0.2 in.). *[12]*
VLSH2S5B	For VLS3P•••R• and VLS3P•••D•. Screw mounting. Protruding selector. □ 5 mm (0.2 in.). *[12]*
VLSH2H5B	For VLS3P•••R•, VLS3P063R1, VLS3P016D1–VLS3P040D1. Ring mounting. Protruding selector. □ 5 mm (0.2 in.). *[12] [13]*
VLSH2H5BD	For VLS3P•••R•. Ring mounting. Protruding selector with release, defeatable per 60947-4-1. □ 5 mm (0.2 in.). *[12]*
VLSH2H5BL	For VLS3P•••R•, VLS3P063R1, VLS3P016D1–VLS3P040D1. Ring mounting. Low profile protruding selector, □ 5 mm (0.2 in.).
VLSH2H5BPO	For VLS3P•••R•, VLS3P063R1, VLS3P016D1–VLS3P040D1. Ring mounting. Lock On protruding selector, □ 5 mm (0.2 in.).
VLSH3S7BD	For VLS3P063R2–VLS3P125R2, and VLS8M2. Screw mounting. Pistol grip with release, defeatable per UL60947-4-1; □ 7 mm (0.3 in.). *[14]*
VLSH2S5BC	For VLS8C• mechanical interlock mechanism (I-O-II). □ 5 mm (0.2 in.). *[12]*
VLSH4S5B	For For VLS3P•••R• and VLS3P•••D•. Screw mounting. Protruding selector. □ 5 mm (0.2 in.). *[12]*
Accessories for Rear Mounting Control For VLSH3S7RD and VLSH3S7BD handles.	
VLSHA7	Adapter, □ 7 mm (0.3 in.) for VLS3P063R2—VLS3P125R2.



VLSH2H5B (65 x 65 mm)



VLSH2S5BC (65 x 65 mm)



VLSH4S5B (48 x 48 mm)



VLSHA7

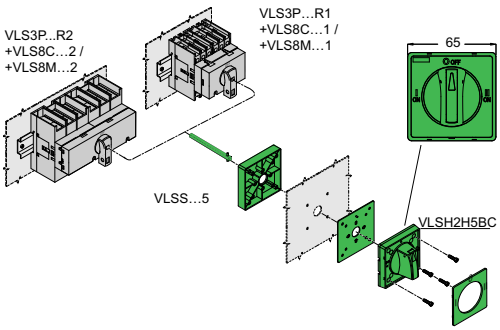


Figure 8.1: Transformation of the DIN rail mounting version into the rear mounting version

Table 8.46: Certifications and Compliance (● = certification obtained)

Catalog number	cULus per UL60947-4-1 / CSA C22.2 n° 60947-4-1-14 UL Listed (File E487906)	cULus per UL98 / CSA C22.2 n° 4 UL Listed (File E487907)
VLSA11RS VLSA11DS	UL Listed, cULus File E478582 CSA C22.2 n° 14-10	—
VLSA10R1E		—
VLSA10R2E		—
VLS1NR1	●	—
VLS1GD1	●	—
VLS8M1	●	—
VLS8C2 VLS8M2	—	●
VLSH1S5R VLSH1S5B	●	●
VLSH2S5R VLSH2S5B	●	●
VLSH2H5R VLSH2H5B	●	●
VLSH2H5RL	●	●
VLSH2H5BL	●	●
VLSH2H5BPO	●	—
VLSH4S5R VLSH4S5B	●	●
VLSH2H5RD VLSH2H5BD	●	●
VLSH3S7NRD VLSH3S7NBD	—	●

[11] Catalog numbers ending in BD or RD are for rear mounting units only.
[12] For VLS3P•••R• disconnect switches, separately purchase VLSS shaft extensions.
[13] Snap-on mounting of VLS3P016–VLS3P040D1 disconnect switches with the handle.
[14] Separately purchase the VLSS•••7 shaft extension and a VLSHA7 handle having a 7 mm (0.3 in.) square section—not required for VLS8M2.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Table 8.46 Certifications and Compliance (● = certification obtained) (cont'd.)

Catalog number	cULus per UL60947-4-1 / CSA C22.2 n° 60947-4-1-14 UL Listed (File E487906)	cULus per UL98 / CSA C22.2 n° 4 UL Listed (File E487907)
VLSH2H5BC	●	●
VLSHA7	—	●
Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-3, IEC/EN 60947-5-1, UL 60947-4-1, UL 98, CSA C22.2.		

Table 8.47: Operating Specifications

Handle mounting		ring or screw
Mounting handle interaxis (compatible with the pre-existing drillings of the most common types in the marketplace)	VLSH1S5R VLSH1S5B VLSH2S5R VLSH2S5B VLSH2S5BC	36 x 36 mm (1.4 x 1.4 in.) or 48 x 48 mm (1.9 x 1.9 in.)
	VLSH3S7NRD VLSH3S7NBD	36 x 36 mm (1.4 x1.4 in.)
Padlocks		1–3 for all handles Ø4–8 mm (Ø0.2–0.3 in.)
Tightening torque	Mounting ring types	2.3 N•m (20.4 lb-in)
	VLS8M1	0.8 N•m (7 lb-in)
	VLSH3S7NRD VLSH3S7NBD	1.5 N•m (13.3 lb-in)
	All others	1 N•m (9 lb-in)
Degree of protection		**IEC / EN**: IP65 for all except VLSH3S7RD/BD, which are IP66. **UL / CSA**: VLSH1S5R/B and VLSH3S7RD/BD are Type 1, 12, 3R, 4, and 4X outdoor use with all VLS switch models. VLSH2S5R/B, VLSH2H5R/B, VLSH2H5RD/BD and VLSH2S5BC are Types 1, 12, 3R, 4, and 4X outdoor use with VLS3P016R1/D1–VLS3P040R1/D1 and VLS3P063R1 models, otherwise Type 1 only.

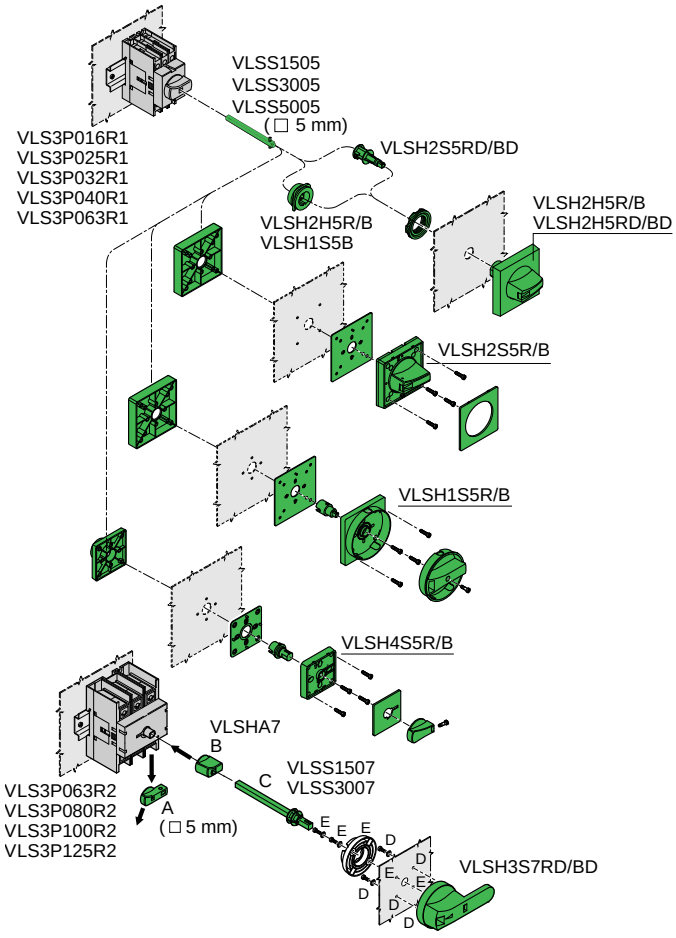


Figure 8.2: Changing the DIN rail mounting version for rear mounting

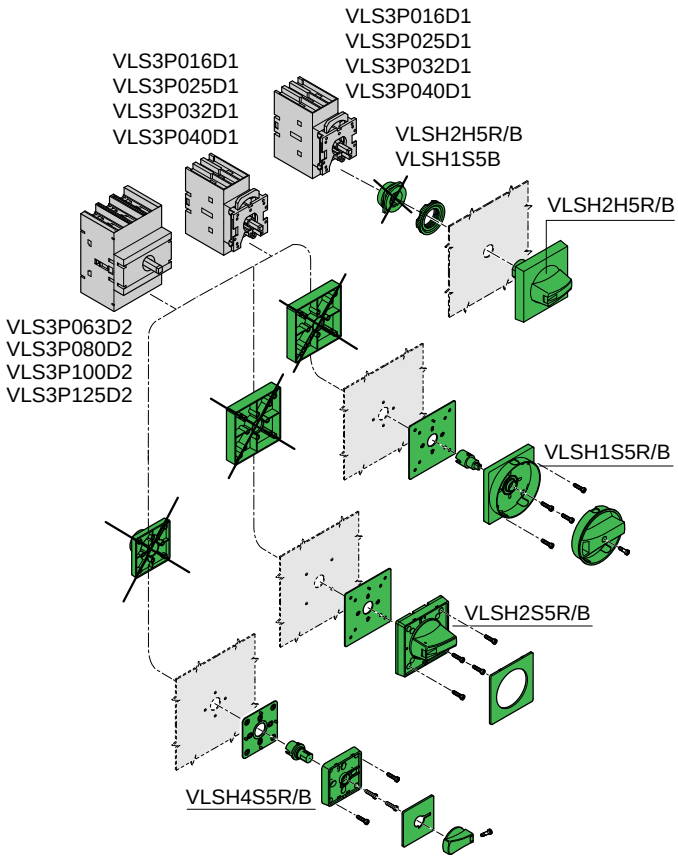


Figure 8.3: Door mounting version
Certifications and Compliance:
See Table 8.46 for details.


© 2026 Schneider Electric
All Rights Reserved
4/21/2026




VLSS•••5 (5 mm)



VLSS•••7 (7 mm)



VLSC



VLSFH1UL

Shaft Extensions, Terminal Covers, Fuse Holders, and Fuse Blocks

Table 8.48: Selection—Shaft Extensions, Terminal Covers, Fuse Holders, and Fuse Blocks

Catalog number	Specifications	Qty per package	Weight, kg (lb)
Shaft extension for rear-mounting handles VLSH1S5R–VLSH2H5RD, VLSH1S5B–VLSH2H5BD, VLSH2S5BC; interlocking changeover type VLS8C1, VLS8C2; and mechanical disconnect switch system VLS8M1			
VLSS1505	150 mm long; □ 5 mm (0.2 in.)	1	0.032 (0.07)
VLSS3005	300 mm long; □ 5 mm (0.2 in.)	1	0.068 (0.15)
VLSS5005	500 mm long; □ 5 mm (0.2 in.)	1	0.090 (0.20)
Shaft extension for rear-mounting handles VLSH3S7RD/BD, and mechanical coupling system VLS8M2			
VLSS1507	150 mm long; □ 7 mm (0.3 in.)	1	0.090 (0.20)
VLSS3007	300 mm long; □ 7 mm (0.3 in.)	1	0.160 (0.35)
VLSS5007	500 mm long; □ 7 mm (0.3 in,)	1	0.250 (0.55)
VLSSS7	Support for □ 7 mm shaft	1	0.160 (0.35)
Set of 2 three-pole terminal covers			
VLSC3P1	For VLS3P016R1–VLS3P040R1, VLS3P063R1, VLS3P016D1–VLS3P040D1	1	0.018 (0.04)
VLSC3P2	For VLS3P063R2–VLS3P125R2, VLS3P063D2–VLS3P125D2	1	0.030 (0.07)
Fuse holder/block for disconnect switches			
VLSFH1UL	For VLS3P016R1–VLS3P032R1 (suitable for Class CC fuses)	1	0.135 (0.30)

Table 8.49: Operational Specifications of Fuse Holder

IEC rated insulation voltage, Ui	1000 V
IEC rated impulse withstand voltage, Uimp	8 kV

- The fuse holder/block connects directly to the disconnect switches.
- Access to fuses only when the disconnect switches are in Off position.

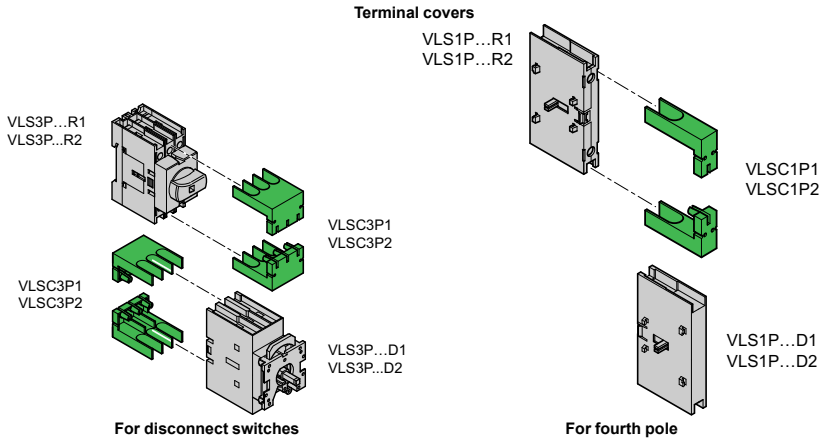



Table 8.50: Certifications and Compliance (● = certification obtained)

Catalog number	cULus per UL60947-4-1 / CSA C22.2 n° 60947-4-1-14 UL Listed (File E487906)	cULus per UL98 / CSA C22.2 n° 4 UL Listed (File E487907)
VLSS1505, VLSS3005, VLSS5005	●	—
VLSS1507, VLSS3007	●	—
VLSC3P1	—	—
VLSC3P2	—	—
VLSFH1UL	●	—
Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-3, UL60947-4-1, UL98, CSA C22.2.		


© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Table 8.51: DIN Rail Mounting Disconnect Switches

VLS3P016R1–VLS3P040R1, VLS3P063R1

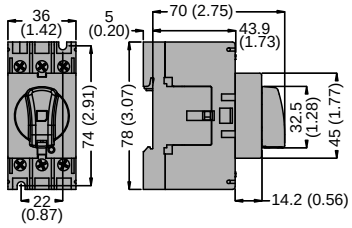


VLS3P063R2–VLS3P125R2

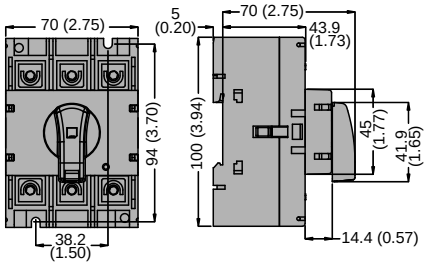


Dim. = mm (in.)

Table 8.52: Door Mounting Disconnect Switches

VLS3P016D1–VLS3P040D1

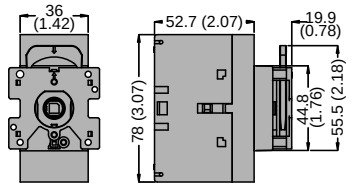


VLS3P063D2–VLS3P125D2

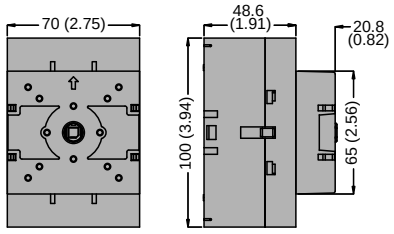


Dim. = mm (in.)

Table 8.53: Add-on Blocks and Accessories For VLS3P016R1–VLS3P040R1, VLS3P063R1

Auxiliary contacts
VLSA11RS, VLSA10R1E

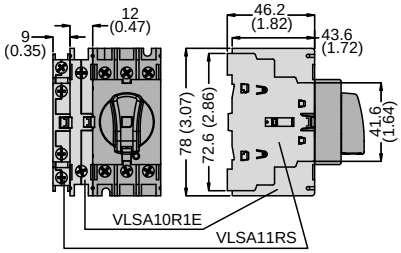

Fourth pole
VLS1P040R1S, VLS1P063R1S
VLS1NR1 neutral

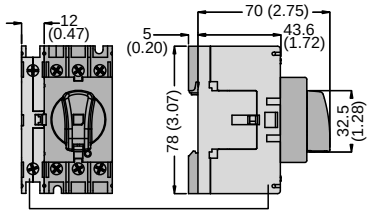


VLS3P016R1, VLS3P025R1, VLS3P032R1,
VLS3P040R1, VLS3P063R1, VLSA11RS


Dim. = mm (in.)

For VLS3P063R2–VLS3P125R2

Auxiliary contacts
VLSA11RS
VLSA10R2E

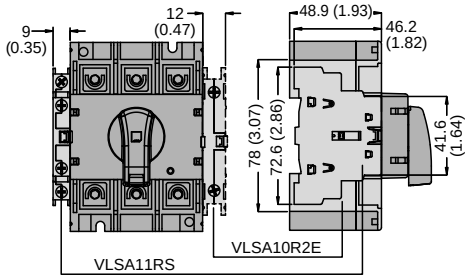


Fourth pole
VLS1P125R2E, VLS1P063R2S–VLS1P125R2S

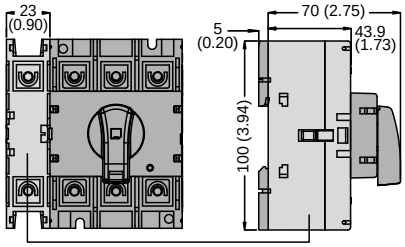


VLS3P063R2, VLS3P080R2, VLS3P100R2, VLS3P125R2,
VLSA10R1E, VLSA10R2E, VLS1P063R2S, VLS1P080R2S,
VLS1P100R2S, VLS1P125R2S, VLS1P125R2

Dim. = mm (in.)

Mechanical coupling system VLS8M1

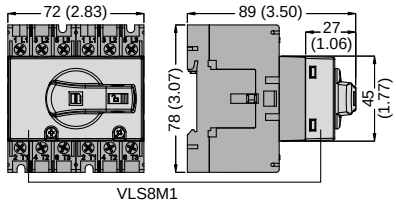

Mechanical interlock VLS8C2 and mechanical coupling system VLS8M2

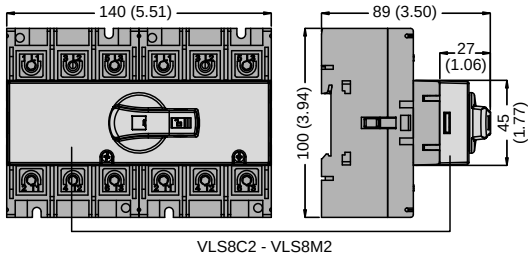


Dim. = mm (in.)


© 2026 Schneider Electric
All Rights Reserved
4/21/2026

For VLS3P016D1–VLS3P040D1

Auxiliary contacts
VLSA11DS

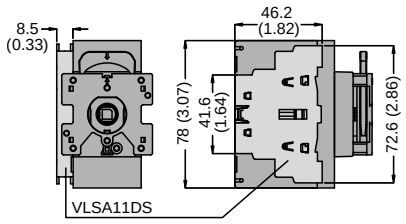

Fourth pole
VLS1P040D1E–VLS1P040D1S
VLS1GD1 ground terminals




VLS3P016D1, VLS3P025D1, VLS3P032D1, VLS3P040D1, VLS1P040D1S, VLS1P040D1E


Dim. = mm (in.)

For VLS3P063D2–VLS3P125D2

Auxiliary contacts
VLSA11DS

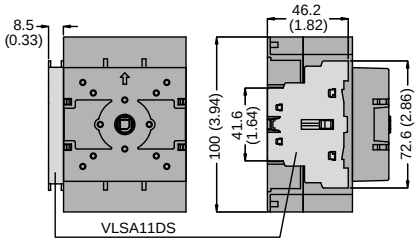

Fourth pole
VLS1P125D2E, VLS1P063D2S–125D2S

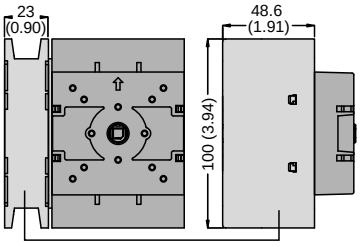


VLS1P063D2S, VLS1P080D2S, VLS1P100D2S, VLS1P125D2S, VLS1P125D2E, VLS1ND1, VLS1ND2, VLS1GD1, VLS1GD2


Dim. = mm (in.)

Table 8.54: Rotary handles


VLSH1S5R/B

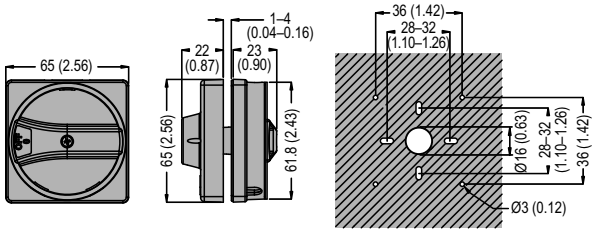


VLSH2S5R/B

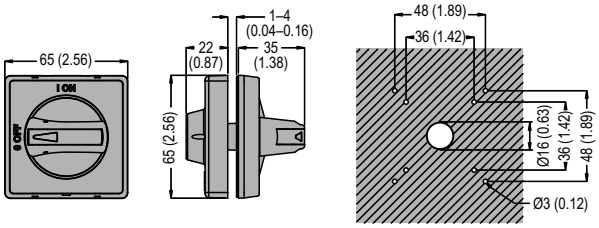

VLSH2H5R/B

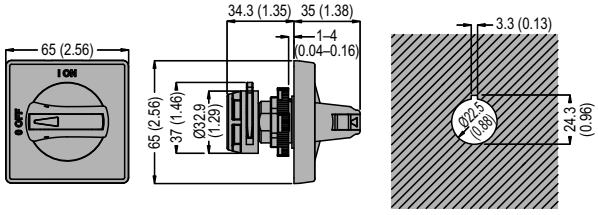


VLSH2H5RD/BD

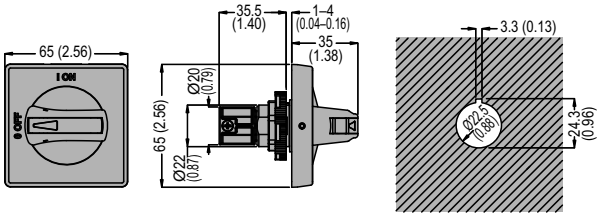


Dim. = mm (in.)

VLSH3S7RD/BD

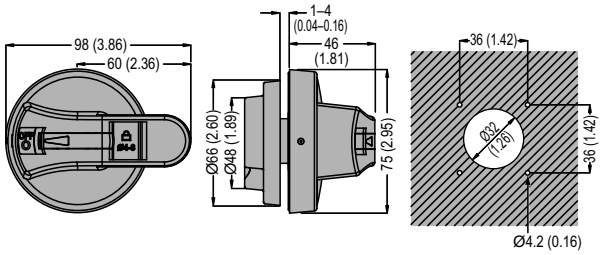


VLSH2S5BC

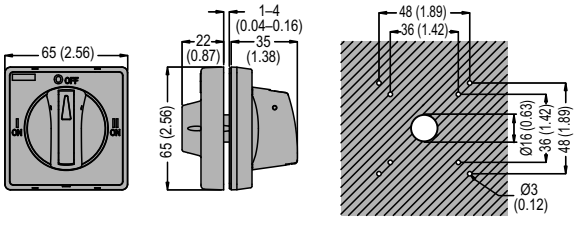

Dim. = mm (in.)

VLSH4S5R/B

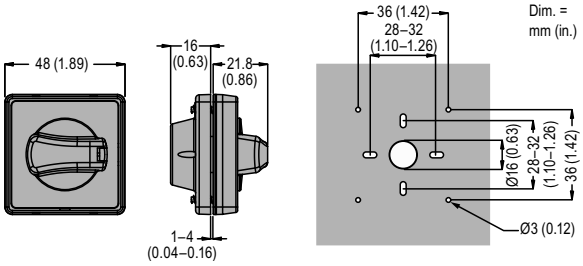



Dim. = mm (in.)

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Shaft extensions for rear-mounting handles (for Dimension A, see Table 8.55)

VLSS

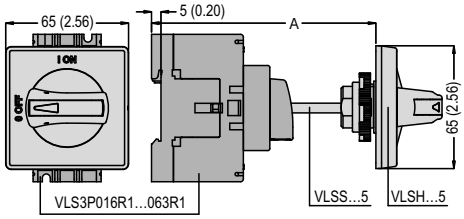

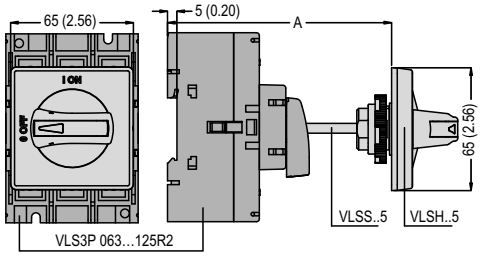



Dim. = mm (in.)

Table 8.55: Dimension A for VLSS Shaft Extensions

Dimension A for VLSS Shaft Extensions (see below)						
Extension	Length mm (in.)	Maximum Dimension A, mm (in.)				
		Type of handle				
		VLSH1S5•	VLSH2S5•	VLSH2H5R	VLSH2H5RD	VLSH2S5BC
VLSS1505	150 (5.90)	194 (7.64)	192 (7.56)	197 (7.75)	211 (8.31)	192 (7.56)
VLSS3005	300 (11.81)	344 (13.54)	342 (13.46)	347 (13.66)	361 (14.21)	342 (13.46)
VLSS5005	500 (19.68)	544 (21.42)	542 (21.34)	547 (21.53)	561 (22.09)	542 (21.34)

VLSS used with VLS8C2 and VLS8M1

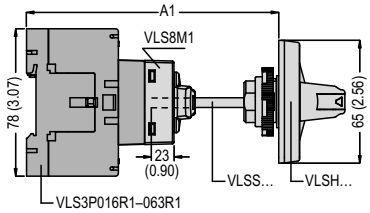

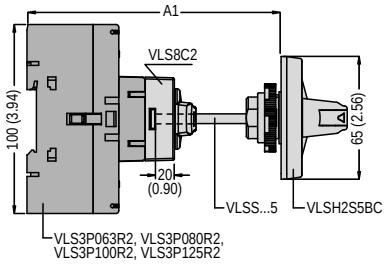


Dim. = mm (in.)


Table 8.56: Dimension A1 for VLSS used with VLS8C1, VLS8C2, and VLS8M1

Extension (5 mm)	Length mm (in.)	A1 maximum, mm (in.)				
		Used with VLS8M1				Used with VLS8C1/VLS8C2
		Type of handle				
		VLSH1S5•	VLSH2S5•	VLSH2H5R	VLSH2H5RD	VLSH2S5BC
VLSS1505	150 (5.90)	211 (8.31)	209 (8.23)	214 (8.42)	228 (8.98)	209 (8.23)
VLSS3005	300 (11.81)	361 (14.21)	359 (14.13)	364 (14.33)	378 (14.88)	359 (14.13)
VLSS5005	500 (19.68)	561(22.09)	559 (22.01)	564 (22.20)	578 (22.75)	559 (22.01)

VLSS•••7 used with VLSHA7 and VLSH3S7RD/BD

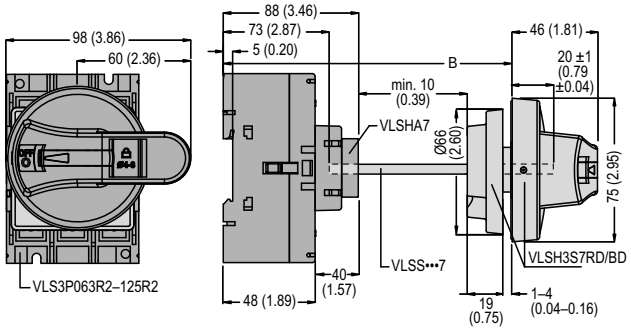

VLSS•••7 used with VLS8M2 and VLSH3S7RD/BD handle

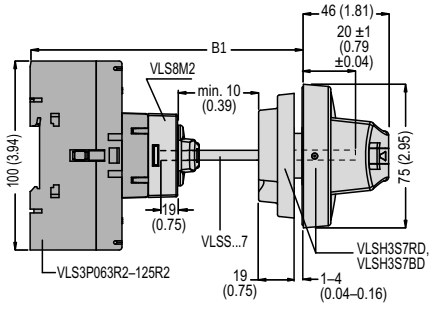

Dim. = mm (in.)


Extension (7 mm)	Length	B	B1
		with VLSH3S7RD/BD handle	
	mm (in.)	mm (in.)	mm (in.)
VLSS1507	176 (6.93)	118–229 (4.64–9.01)	119–205 (4.68–8.07)
VLSS2007	226 (8.90)	118–279 (4.64–10.99)	119–255 (4.68–10.03)
VLSS3007	326 (12.83)	118–379 (4.64–14.92)	119–355 (4.68–13.98)

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Table 8.57: Terminal Cover and Fuse Holder Dimensions

Terminal Cover Dimensions

VLSC3P1

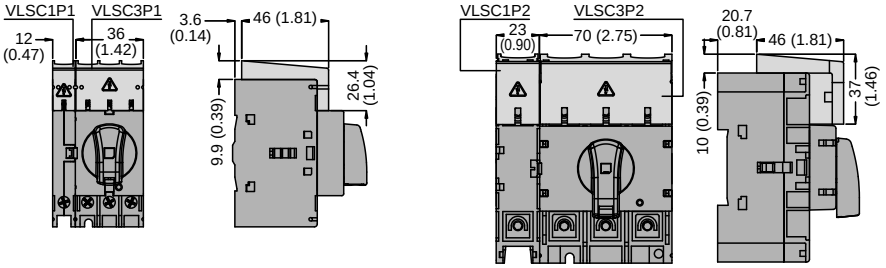


VLSC3P2

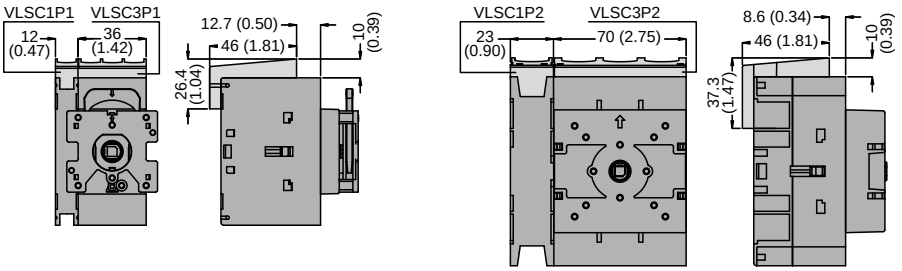

Fuse Holder Dimensions

VLSFH1UL




Dim. = mm (in.)

Table 8.58: Wiring Diagrams—VLS Disconnect Switches (16–125 A)

Three-pole disconnectors

VLS3P016•• – VLS3P125R2/D2



Fourth pole add-on

VLS1P•••••S




VLS1P•••••E



Add-on Blocks and Accessories

Auxiliary contacts

VLSA11•S



VLSA10R1E–VLSA10R2E



Neutral terminal

VLS1NR1/D1–VLS1NR2/D2


Earth/Ground terminal

VLS1GR1/D1–VLS1GR2/D2




Fuse holder

VLSFH1



© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Model	3-pole: VLS3P…		016…	025…	032…	040…	063R1	063R2	080…	100…	125…
	4th pole: VLS1P…		040…	040…	040…	040…	063R1S	063R2S	080…	100…	125…
Contact Specifications											
IEC conventional free air thernal current, Ith (≤40 °C)		A	16	25	32	40	63	63	80	100	125
IEC rated insulation voltage, Ui		V	1000								
IEC rated impulse withstand voltage, Uimp		kV	8								
IEC rated operational current, Ie											
AC21A	400 V	A	16	25	32	40	63	63	80	100	125
	500 V	A	16	25	32	40	63	63	80	100	125
	690 V	A	16	25	32	40	63	63	80	100	125
AC22A	400 V	A	16	25	32	40	45	63	80	100	125
	500 V	A	16	25	32	40	45	63	80	100	125
	690 V	A	16	25	32	40	45	63	80	100	125
AC23A	400 V	A	16	25	32	40	45	63	80	100	125
	500 V	A	16	25	25	25	25	63	63	80	100
	690 V	A	16	25	25	25	25	47	47	47	47
IEC rated operational power											
AC23A	400 V	kW	7.5	11	15	18.5	22	30	45	55	55
	690 V	kW	11	22	22	22	22	45	45	45	45
IEC reactive power for capacitor control 400 V		kvar	7.5	10	12.5	15	15	25	30	40	50
IEC protection against short-circuit											
Rated short-time withstand current (1 s), Icw		A rms	800					2500			
Rated conditional short-circuit current		kA rms	50								
With fuse class gG		A	16	25	32	40	63	63	80	100	125
IEC making capacity (AC23A 400 V)		A	400				450	1250			
IEC breaking capacity (AC23A 400 V)		A	320				360	1000			
Mechanical life (depending on the application)		cycles	100,000				100,000	30,000			
Electrical life (IEC AC21A)		cycles	100,000				15,000	30,000			
UL/CSA general use at 600 V		A	16	25	32	40	50	60	100	100	100
UL/CSA short-circuit rating at 600 V		kA	5	5	5	5	5	50	50	50	50
UL/CSA fuse class/max rating at 600 V		Type/A	RK5/20	RK5/30	RK5/35	RK5/45	RK5/45	–/100	–/100	–/100	–/100
UL/CSA Hp ratings											
Single phase	120 V	hp	1	1.5	2	2	2	3	3	5	7.5
	240 V	hp	2	3	5	5	7.5	7.5	10	10	10
Three phase	200–208 V	hp	5	7.5	10	10	10	20	25	30	25
	240 V	hp	5	7.5	10	15	15	20	30	30	30
	480 V	hp	10	15	20	20	30	40	40	50	50
	600 V	hp	10	20	20	25	30	40	40	60	40
Terminals											
	Type		Lug clamp IEC/EN 60947-1 designation: Pillar terminal.								
	A		5.6 mm (0.22 in.)					12.4 mm (0.49 in.)			
	B		6.5 mm (0.26 in.)					10.4 mm (0.41 in.)			
	Screw		M4					M8			
	Tool		Phillips 2					Metric Allen key 4			
Tightening torque		N•m	1.8–2					5–6			
		lb-in	16–18					45–54			
Conductor section (solid/stranded)		mm^2	0.75–16					4–50			
		AWG	18–6					12–1			
Ambient Conditions											
Temperature	Operating	°C	–25 to +55								
	Storage	°C	–40 to +70								
Maximum altitude		m	3000								
Mounting position	Normal		Vertical								
	Admissible		Any								
Mounting			Screw or 35 mm DIN rail (IEC/EN 60715)								

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

LK4 and GS2 Disconnect Switches

Table 8.59: Building a Complete GS or LK Switch

To build a complete GS or LK switch, order the following parts:

Choose a Switch	+	Shaft	+	Handle Assembly	+	Lugs if needed
						
600 A, LK4SU3N		**Shaft 320 mm, GS2AE6**		**Black Handle, GS2AH150**		**Lugs Kit, GS1AW503**

Example:
LK4SU3N (600 A non-fusible switch) + **GS2AE6** (320 mm Style D shaft) + **GS2AH150** (black/black, locking)
To add auxiliary contacts:
For front-mounted contacts order **LK4AD30N** (front-mounted auxiliary contact holder) + **GS2AM110**.



100–400 A

LK4 Nonfusible Disconnect Switches

Table 8.60: LK Nonfusible IEC Style Disconnect Switches

Pole	Rating (A)	Catalog No.	Maximum Horsepower Rating				Short Circuit Current Rating, 600 Vac		Shaft Style
			240 V	480 V	600 V	250 Vdc	Fuse	SCCR kA	
3	100	LK4JU3N	30	75	100	15	J	200	B
3	200	LK4MU3N	75	150	200	15	J	200	B
3	400	LK4QU3N	125	250	350	50	J	200	B
3	600	LK4SU3N	200	400	350	50	J	200	D
3	800	LK4TU3N	200	500	500	—	L	100	D
3	1000	LK4UU3N	200	500	500	—	L	100	D

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


GS2AH130


GS2AH150


GS2AH170

NOTE: Switches in the shaded area are now available as kits. See Kits for Compact Switches LK4: 30, 60 and 100 A.

Table 8.61: Handles and Shafts for LK Switches

Rating (A)	Handle			Shaft		Shaft	Guide Cone[1]	Shaft Style	Support Bracket
				12.6 in. / 320 mm	15.7 in. / 400 mm	19.6 in. / 500 mm			
	Catalog No.	Type	Color	Catalog No.	Catalog No.	Catalog No.	Catalog No.		Catalog No.
NOTE: Switches in the shaded area are now available as kits.									
100–400	GS2AH130	1, 3R, 12	Black	GS2AE2	GS2AE21	GS2AE23	GS2AEH12	B	GS2AESB
100–400	GS2AH140	1, 3R, 12	Red						
100–400	GS2AH430	4, 4X	Black						
100–400	GS2AH440	4, 4X	Red/Yellow						
600	GS2AH150	1, 3R, 4, 4X, 12	Black	GS2AE6	GS2AE61	—	GS2AEH12	D	—
600	GS2AH160	1, 3R, 4, 4X, 12	Red/Yellow						
800–1200	GS2AH170	1, 3R, 4, 4X, 12	Black						
800–1200	GS2AH180	1, 3R, 4, 4X, 12	Red/Yellow						

Table 8.62: Auxiliary Contacts for LK Switches

Switch Amperes	Catalog No.	Description
100–400	LK4AD10N	Auxiliary Contact 1 N.O. and 1 N.C.
100–400	LK4AD20N	Auxiliary Contact 2 N.O.
600–1200	LK4AD30N	Auxiliary Contact Holder
600–1200	GS2AM110	Auxiliary Contact 1 N.O.
600–1200	GS2AM101	Auxiliary Contact 1 N.C.

Table 8.63: Terminal Shrouds for LK Switches

Switch Amperes	Catalog No.	Description
100–200	LK4AP33TN	Shroud Top LK4, 3-Pole, 100/200 A
100–200	LK4AP33BN	Shroud Bottom LK4, 3-Pole, 100/200 A
400	LK4AP53TN	Shroud Top LK4, 3-Pole, 400 A
400	LK4AP53BN	Shroud Bottom LK4, 3-Pole, 400 A
600 [2]	LK4AP63N	Shroud Bottom LK4, 3-Pole, 600 A
800–1200 [2]	LK4AP83N	Shroud Bottom LK4, 3-Pole, 800–1200 A

[1] Optional on shafts for LK4DU3CN, LK4GU3CN and LK4JU3CN.
[2] 600–1200 A standard with top shroud.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



GS2GU3N



GS2AH110



GS2AH130



GS2AH150



Auxiliary Contacts
GS1AD10 + GS2AM110



Shorting Links

GS2 Fusible Disconnect Switches

Table 8.64: GS Fusible IEC Style Disconnect Switches

Pole	Rating (A)	Catalog No.	Maximum Horsepower Rating				Short Circuit Current Rating, 600 Vac		Shaft Style
			240 V	480 V	600 V	250 Vdc	Fuse	SCCR kA	
3	30	GS1DDU3	7.5	15	20	5	CC	100	AG
3	30	GS1DU3	7.5	15	20	5	J	100	AG
3	30	GS2EEU3	7.5	15	20	5	CC	100	B
3	30	GS2EU3N	7.5	15	20	5	J	100	B
3	60	GS2GU3N	15	30	50	10	J	100	B
3	100	GS2JU3N	30	60	75	20	J	200	B
3	200	GS2MU3N	60	125	150	40	J	200	B
3	400	GS2QU3N	125	250	350	50	J	200	B
3	600	GS2SU3	200	500	500	—	J	200	C
3	800	GS2TU3	200	500	500	—	L	200	C

Table 8.65: Handles and Shafts for GS Switches *[3]*

Rating (A)	Handle			Shaft: 12.6 in. (320 mm)	Shaft: 15.7 in. (400 mm)	Shaft: 19.7 in. (500 mm)	Shaft Guide	Shaft Style	Support Bracket *[4]*
	Catalog No.	Type	Color	Catalog No.	Catalog No.	Catalog No.	Catalog No.		
30–60	GS2AH110	1, 3R, 12	Black	GS2AE8	GS2AE81	—	GS2AEH12	AG	—
30–60	GS2AH120	1, 3R, 12	Red/ Yellow						
30–60	GS2AH410	4, 4X	Black						
30–60	GS2AH420	4, 4X	Red/ Yellow						
30–400	GS2AH130	1, 3R, 12	Black	GS2AE2	GS2AE21	GS2AE23	GS2AEH12	B	GS2AESB
30–400	GS2AH140	1, 3R, 12	Red/ Yellow						
30–400	GS2AH430	4, 4X	Black						
30–400	GS2AH440	4, 4X	Red/ Yellow						
600–800	GS2AH150	1, 3R, 4, 4X, 12	Black	GS2AE5	GS2AE51	GS2AE53	GS2AEH12	C	—
600–800	GS2AH160	1, 3R, 4, 4X, 12	Red/ Yellow						

NOTE: Hole adapter kit for GS1 to GS2 Handles: GS2AH100TO200.

Table 8.66: Auxiliary Contacts for GS Switches *[5]*

Switch Amperes	Catalog No.	Description
30–800	GS1AM110	Auxiliary Contact, 1 N.O.
30–800	GS1AM101	Auxiliary Contact, 1 N.C.
30	GS1AD10	Auxiliary Contact Holder

Table 8.67: Shorting Links

For use on:	Shorting Links per Kit	Catalog No.
GS2, 60 A	3	GS1AU203
GS2, 100 A	3	GS1AU303
GS2, 200 A	3	GS1AU403
GS2, 400 A	3	GS1AU503
GS2, 600–800 A	3	GS1AU803

Table 8.68: NFPA79 Kit


For Use With:	Description	Kit Part Number
GS2Q3N	NFPA 79 Internal Handle Kit 400 A Switch Shaft	GS2AD040N
GS2GU3N, GS2GLU3N, GS2JU3N, GS2JLU3N	NFPA 79 Internal Handle Kit 60–200 A Switch Shaft	GS2AD030N
GS1DDU3, GS1DU3	NFPA 79 Internal Handle Kit for 5 mm Shafts	GS1AD010

Table 8.69: Terminal Shrouds for GS Switches, Line or Load *[6]*

Switch Amperes	Catalog No.	Description
30–100	—	Standard on product
200	GS2AP43	GS2, 3-Pole, 200 A
400	GS2AP53	GS2, 3-Pole, 400 A
600–800	GS2AP73	GS2, 3-Pole, 600–800 A

[3] GS2AH100TO200–GS1 to GS2 Handle Adapter if using GS1 holes.
[4] Not for use with flange disconnects.
[5] GS1DU3 and GS1DDU3 switches allow up to 4 auxiliary contacts without adding contact holder GS1AD10. For more than 4 contacts, GS1AD10 is required.
[6] Order one terminal shroud per side. For example, order one terminal shroud for *either* the line side *or* load side; order two terminal shrouds for *both* the line side *and* load side.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



Flange Handle Cable Operator Kit

Cable Operator Kits for GS2 Switches

Table 8.70: Cable Operator Kits for GS2 Switches *[7] [8] [9]*

Catalog No.	Description
200 A and Below	
GS2AH36F	36 in. Cable Operator Kits for GS2 Switches, 200 A and Below
GS2AH60F	60 in. Cable Operator Kits for GS2 Switches, 200 A and Below
GS2AH120F	120 in. Cable Operator Kits for GS2 Switches, 200 A and Below
GS2AH144F	144 in. Cable Operator Kits for GS2 Switches, 200 A and Below
GS2AH180F	180 in. Cable Operator Kits for GS2 Switches, 200 A and Below
400 A	
GS2AH460F	60 in. Cable Operator Kits for GS2 Switches, 400 A
GS2AH4120F	120 in. Cable Operator Kits for GS2 Switches, 400 A
GS2AH4144F	144 in. Cable Operator Kits for GS2 Switches, 400 A
GS2AH4180F	180 in. Cable Operator Kits for GS2 Switches, 400 A

Table 8.71: Handles for use with Cable Operator Kits *[9]*

Catalog No.	NEMA Type Enclosure	Type of Handle
9422A1	1, 3, 3R, 4, (Sheet Steel)	6 in.
9422A2	4, 4X (Stainless)	6 in.
9422A3	1, 3, 3R, 4, (Sheet Steel)	4 in.
9422A4	4, 4X (Stainless)	4 in.

Accessories



Terminal Lugs

Table 8.72: Terminal Lugs

For Use On:	Rating	No. of Wires per Lug	No. of Lugs per Terminal	Lug Size (AWG)	Wire Type	No. of Lugs Required (6 lugs per kit)	Lug Kit Catalog Number
LK4JU3N	100	1	1	6–300 kcmil	Cu/Al	6	GS1AW403
LK4MU3N	200	1	1	6–300 kcmil	Cu/Al	6	GS1AW403
LK4QU3N	400	2	1	350 MCM—6	Cu/Al	6	GS1AW603
		1	1	600 MCM—4	Cu/Al	6	GS1AW606
		2		250 MCM—1/0			
LK4SU3N	600	2	1	2 x 2–600 kcmil	Cu/Al	6	GS1AW503
LK4TU3N	800	2	2	2 x 2–600 kcmil	Cu/Al	12 (2 lug kits)	GS1AW503
LK4UU3N	1000	2	2	2 x 2–600 kcmil	Cu/Al	12 (2 lug kits)	GS1AW503
GS1DDU3	30	1	1	#14–#10	Cu	—	Standard
GS1DU3	30	1	1	#14–#10	Cu	—	Standard
GS2EEU3	30	1	1	#14–#10	Cu	—	Standard
GS2EU3N	30	1	1	#14–#6	Cu	—	Standard
GS2GU3N	60	1	1	#10–#6	Cu	—	Standard
GS2JU3N	100	1	1	#12–#1	Cu	—	Standard
GS2MU3N	200	1	1	6–300 kcmil	Cu/Al	6	GS1AW403
GS2QU3N	400	2	1	350 MCM—6	Cu/Al	6	GS1AW603
		1	1	600 MCM—4	Cu/Al	6	GS1AW606
		2		250 MCM—1/0			
GS2SU3	600	2	1	2 x 2–600 kcmil	Cu/Al	6	GS1AW503
GS2TU3	800	2	1	2 x 2–600 kcmil	Cu/Al	6	GS1AW503


Table 8.73: Power Distribution Lugs GS1 or GS2 Only

For Use On:	Rating	No. of Wires per Lug	Lug Size (AWG)	Wire Type	Lugs per Kit	Lug Kit Catalog No.
GS1JU3	100	6	#14–#6	Cu	3	GS1AW306 *[10]*
GS2MU3N	200	12	#14–#4	Cu	3	GS1AW406
GS2QU3N	400	12	#14–#4	Cu	3	GS1AW406
GS2MU3N	200	6	#12–2/0	Cu	3	GS1AW506
GS2QU3N	400	6	#12–2/0	Cu	3	GS1AW506

[7] Does not include handle. For handle, see Table 8.71.
[8] Not compatible with GS2EEU3..
[9] A 400 A cable operator kit uses either 9422AP1 or AP2 handle.
[10] Cannot be used on GS2JU3N.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


LK4DU3CN, 30 A Compact Nonfusible Disconnect Switches

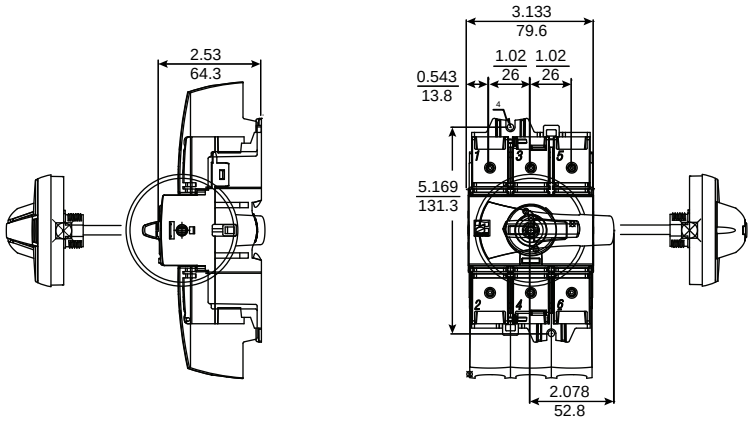


Handle for 30–100 A Compact Nonfusible Disconnect Switches

Handle Part No.

LK4AH110CN
LK4AH120CN
LK4AH410CN
LK4AH420CN

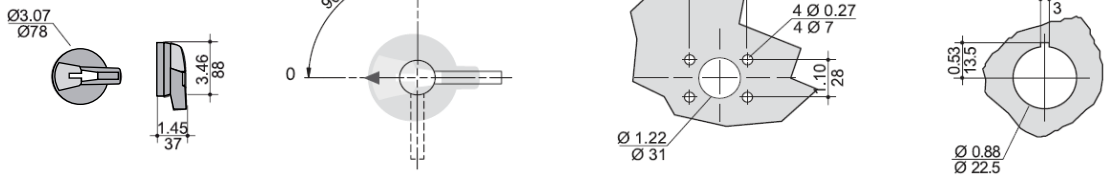


LK4JU3N / LK4MU3N / LK4QU3N, 100–400 A Nonfusible Disconnect Switches—Dimensions

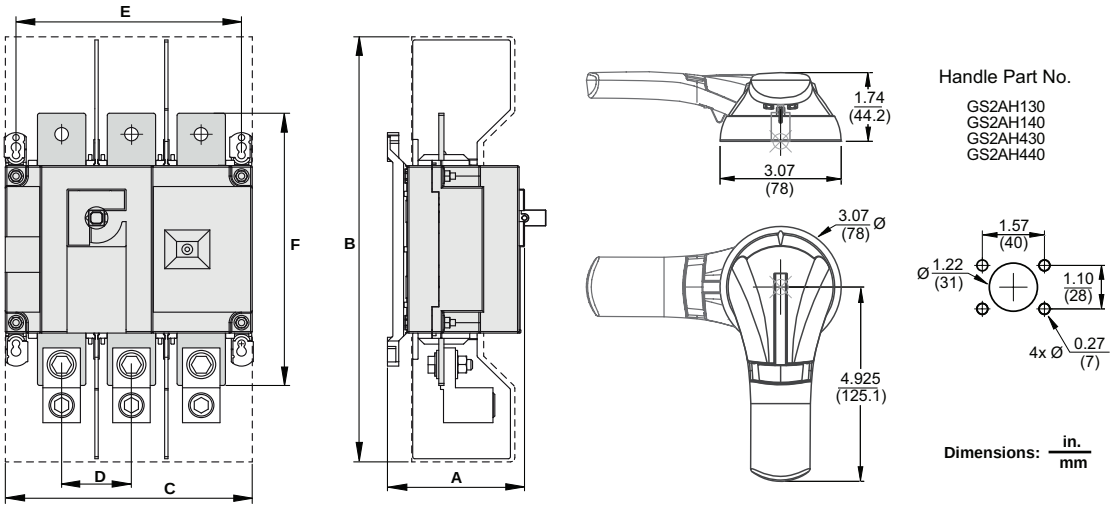

Rating (A)	Dimensions = in. (mm)					
	A	B	C	D	E	F
100–200	3.72 (94.6)	10.1 (256)	7.09 (1.80)	1.97 (50)	6.3 (160)	6.3 (160)
400	4.92 (128)	16 (406)	9.05 (230)	2.56 (65)	8.26 (210)	10.2 (260)

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

LK4SU3N, 600 A Nonfusible Disconnect Switches—Dimensions

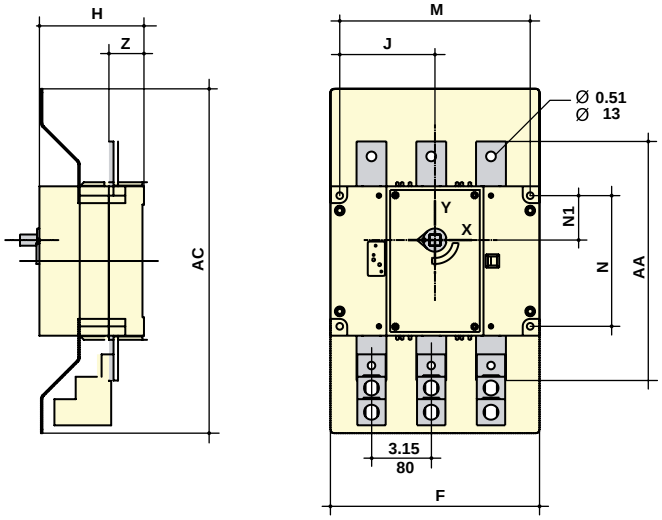

Rating (A)	Dimensions = in. (mm)								
	AC	F	H	J	M	N	N1	AA	Z
600	18.12 (460)	11 (280)	5.5 (140)	5.0 (127.5)	10.03 (255)	6.88 (175)	2.34 (59.5)	12.6 (320)	1.85 (47)


Handle for 600 and 800 A Fusible Disconnect Switches

Handle Part No.
GS2AH150
GS2AH160




Front operation


Direction of operation



Door drilling template



LK4TU3N / LK4UU3N 800–1000 A Nonfusible Disconnect Switches —Dimensions

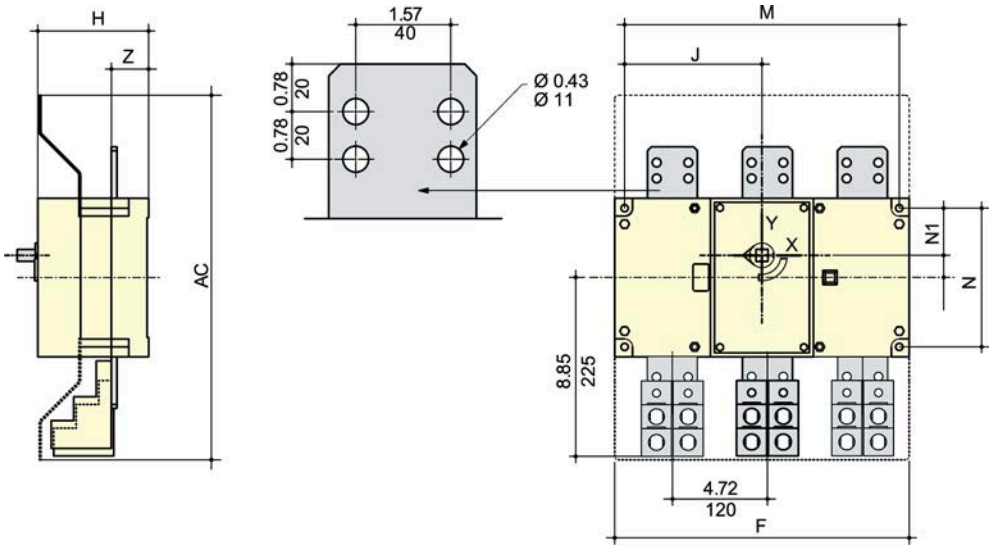


Rating (A)	Dimensions = in. (mm)							
	AC	F	H	J	M	N	N1	Z
800–1000	18.12 (460)	14.64 (372)	5.5 (140)	6.83 (173.5)	13.66 (347)	6.88 (175)	2.34 (59.5)	1.85 (47)

© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Handle for 800–1200 A Fusible Disconnect Switches

Front operation


Handle Part No.
GS2AH170
GS2AH180



Direction of operation





Door drilling template



Dimensions: in. / mm

GS1DDU3, 30 A Fusible Disconnect Switches, Class CC Fuses and GS1DU3, 30 A Fusible Disconnect Switches, Class J Fuses—Dimensions

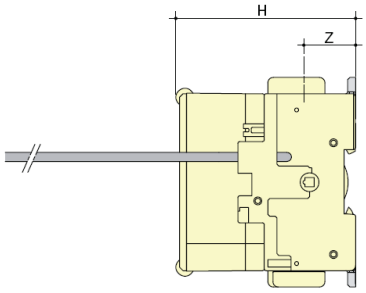





Example:
GS1DU3

Rating (A)	Dimensions = in. (mm)							
	F	H	J	J1	N	N1	AA	Z
30 / CC	3.78 (96)	3.28 (83.5)	1.47 (37.5)	0.59 (15)	3.13 (79.5)	1 (25.5)	4.56 (116)	1.12 (28.5)
30 / J	4.13 (105)	3.89 (99)	1.47 (37.5)	0.59 (15)	3.13 (79.5)	1 (25.5)	4.56 (116)	1.12 (28.5)

Handle for 30 A and 60 A Fusible Disconnect Switches




Handle Part No.
GS2AH110
GS2AH120
GS2AH410
GS2AH420



Front operation

Direction of operation

Door drilling template





Side operation

Direction of operation

Door drilling template


GS2GU3N, 60 A Fusible Disconnect Switches, Class J Fuses

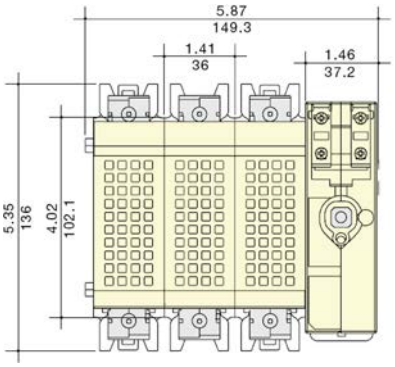




© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Handle for 100 A, 200 A, and 400 A Fusible Disconnect Switches

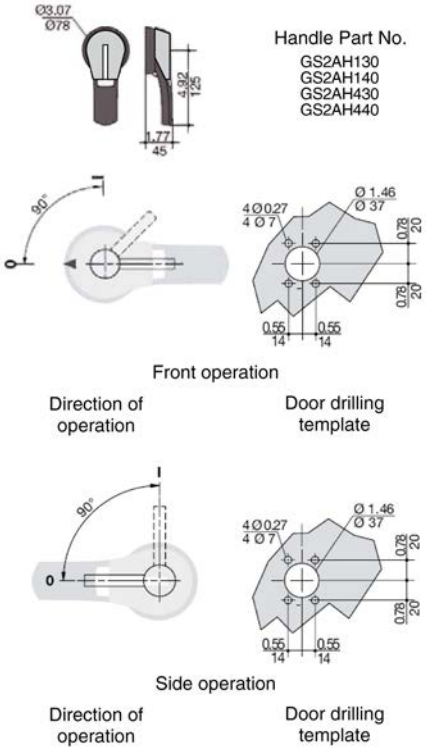

GS2JU3N, 100 A Fusible Disconnect Switches, Class J Fuses

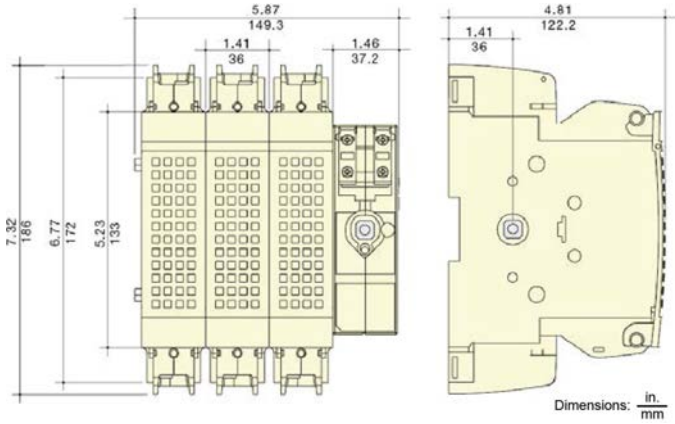



GS2MU3N, 200 A Fusible Disconnect Switches, Class J Fuses

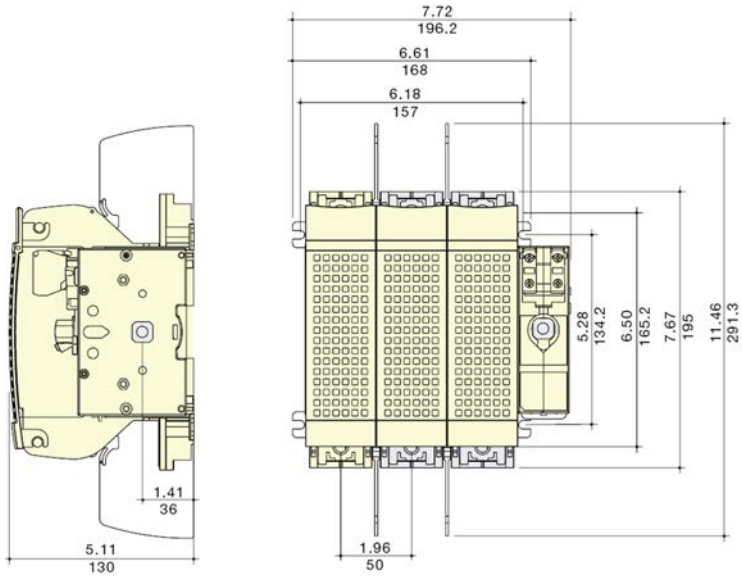


© 2026 Schneider Electric
All Rights Reserved
4/21/2026


GS2QU3N, 400 A Fusible Disconnect Switches, Class J Fuses

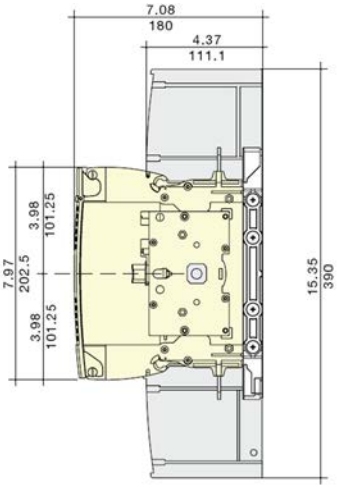

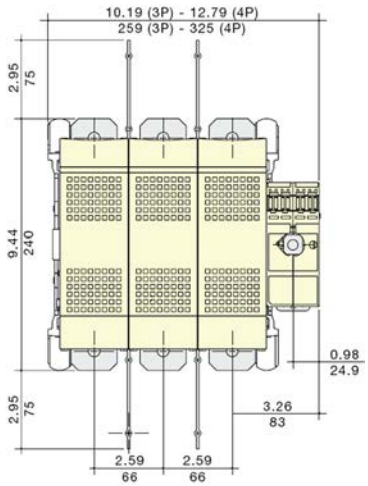


GS2SU3 600 A (Class J Fuses) and GS2TU3 800 A (Class L Fuses) Fusible Disconnect Switches

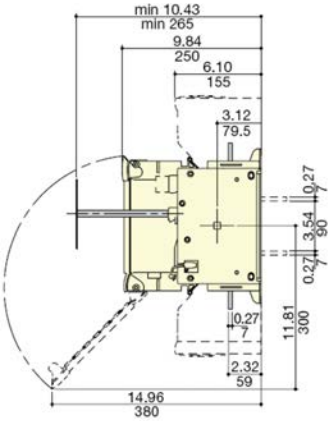

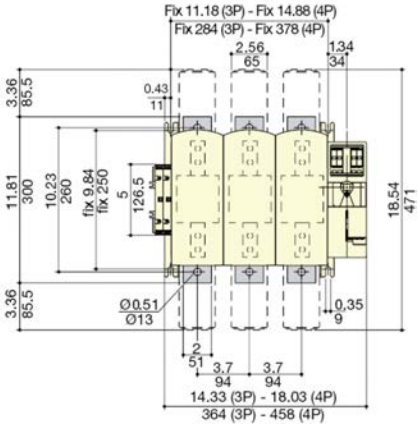

Handle for 600 A and 800 A Fusible Disconnect Switches

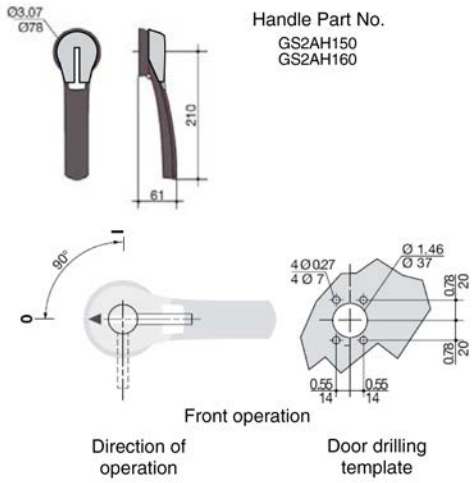

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Disconnect Switches

The 9422 disconnect switches are the ideal selections for the PV String Combiner Box internal disconnect switch and control panel applications. These switches are designed for variable depth, flange mounting, traditional side mounting and bracket mounting applications providing complete flexibility in the PV string combiner box designs. The switches are compatible with 9422A handle operators and 9423 door mechanisms and are UL 98 recognized (E52369 Vol. 1, Sec. 18) and CSA certified. See page 8-34, page 8-37, and page 8-38 for dimensional information.

Table 8.74: 9422 Disconnect Switches, Flange Mounted and Variable Depth

Disconnect Switch Size	Variable Depth (in.)	Maximum Horsepower Ratings						Fuse Type	Fuse Clip Rating (A), Non-Interchangeable Type, For Class H, J, K or R Fuses		Switch and Operating Mechanism ONLY (No Handle Mechanism)	Switch Used with Cable Operators ONLY (No Handle Mechanism or Cable Operator) *[1]*	Switch and Operating Mechanism with Handle Mechanism, Overpacked*[2]*	
		AC Systems Volts (Motor Volts)				Vdc							Type A1 Handle	Type A2 Handle
		208 (200)	240 (230)	480 (460)	600 (575)	250	600		250 V	600 V	Cat. No.	Cat. No.	Cat. No.	Cat. No.
30 A	6.625–18	7.5	7.5	15	20	5	15	None	—	—	9422TCN30	9422TCN30C	9422ATCN301	9422ATCN302
								H, J, K, R	30	—	9422TCF30	9422TCF30C	9422ATCF301	9422ATCF302
									60	30	9422TCF33	9422TCF33C	9422ATCF331	9422ATCF332
60 A	6.625–18	—	15	30	50	10	30	None	—	—	9422TDN60	9422TDN60C	9422ATDN601	9422ATDN602
								H, J, K, R	60	30	9422TDF60	9422TDF60C	9422ATDF601	9422ATDF602
									—	60	9422TDF63	9422TDF63C	9422ATDF631	9422ATDF632
100 A	6.625–18	25	30	60	75	20	50	None	—	—	9422TEN10	9422TEN10C	9422ATEN101	9422ATEN102
								H, J, K, R	100	100	9422TEF10	9422TEF10C	9422ATEF101	9422ATEF102
200 A	9.12–19.25 *[3]*	40	60	125	150	40	50	None	—	—	9422TF1	—	9422ATF11	9422ATF21
								H, J, K, R	200	200	9422TF2	—	9422ATF12	9422ATF22
									—	400	9422TF3 *[4]*	—	9422ATF13 *[4]*	9422ATF23 *[4]*
400 A Fixed Depth *[5]*	11.38 (A5 or A6 Handle)	75	125	250	350	50	50	None	—	—	9422TG1 *[6] [7]*	—	For handle selection, see page 8-34.	
400 A Variable Depth *[5]*	15.87–19 (A7 or A8 Handle) *[8]*							H, J, K, R	400	400	9422TG2 *[6] [9]*	—		



9422TCN30



Bracket Mounted Disconnect Switch


The 9422 Bracket Mount Disconnect Switch is designed for combiner boxes and control panel applications. The Bracket Mount Disconnect Switch is shipped with the switch and external handle assembled to a bracket, ready for quick installation. A protective trim plate is provided to prevent any mounting screws from being accessible from the front. The trim plate also provides an attractive installation feature. The switches are fully compatible with the 9423 closing mechanisms.

Table 8.75: 9422 Bracket Mounted Disconnect Switches


Disconnect Switch Size	Maximum Horsepower Rating						Fuse Type	Fuse Clip Rating (A), Non-Interchangeable Type for Class H, J, K, or R Fuses		Switch and Operating Mechanism Only
	AC Systems (Motor Volts)				Vdc					
	208 (200)	240 (230)	480 (460)	600 (575)	250	600		250 V	600 V	Cat. No.
30 A	7.5	7.5	15	20	5	15	None	—	—	9422BTCN30
							H, J, K, R	30	—	9422BTCF30
								60	30	9422BTCF33
							J *[10]*	60	30	9422BTCF32
60 A	15	15	30	50	10	30	None	—	—	9422BTDN60
							H, J, K, R	60	30	9422BTDF60
								—	60	9422BTDF63
							J *[10]*	—	60	9422BTDF62
100 A	25	30	60	75	20	50	None	—	—	9422BTEN10
							H, J, K, R	100	100	9422BTEF10
							J *[10]*	100	100	9422BTEF11
200 A	40	60	125	150	40	50	None	—	—	9422TFB1
							H, J, K, R	200	200	9422TFB2
							J *[10]*	—	400	9422TFB3

[1] See Table 8.80 for ordering information for the cable operator.
[2] Variable depth only — no cable operator.
[3] 9422 R2 will extend maximum mounting depth 7 inches, see Table 8.85 for information.
[4] Accommodates Class J fuses only.
[5] Switches are fixed-depth or adjustable depending on handle selection.
[6] Commercially available enclosures may not accept 9422TG1 and 2 operating mechanisms. Contact enclosure manufacturer for availability of enclosures for use with these switches.
[7] Right hand flange mounting only and requires a special enclosure.
[8] Variable in increments of 0.63 inches.
[9] Right hand flange mounting only and requires a special enclosure.
[10] Space saving design—Type J fuses mounted on the non-fused bracket.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

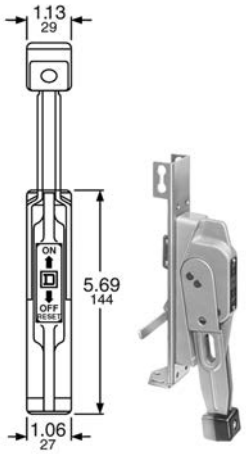

Type A1

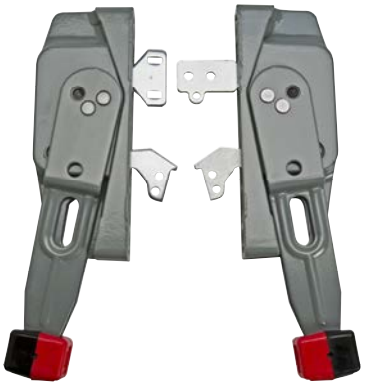


Handle Mechanisms
NOTE: Type 9422A1Y is a 6-in. yellow base with gray handle and red knob.




Handle Mechanisms

Handle Information for 9422 Disconnect Switches

The Handle Mechanism Kit contains all parts needed to mount the handle to the flange of the enclosure. Two flange mounting methods are offered. For right or left hand flange mounting use Types A1–A4 and Types A9–A10 kits. For right-hand mounting only, use Type A5–A8 handles. The type AP1 and AP2 handles are used on the PowerPacT™ M and P operating mechanisms, 9422 RM1 and 9422 CMP. The dimensions are identical to 9422 A1.



9422 A1, A2, A3, A4, A9, and A10 Handles



Rod used only on the variable-depth mechanism

Handle Mechanisms

These handle mechanism kits are used with the circuit breaker variable depth and cable operating mechanisms. The kits contain all parts necessary for mounting the handle to the flange of the enclosure. Types A1–A4, A1Y, and AP1 are suitable for right or left-hand flange mounting.

Table 8.76: 9422 Disconnect Switch and Circuit Breaker Handle Mechanisms

Handle Depth (in.)	NEMA Type 1, 3, 3R, 4, 12 Enclosures	NEMA Type 4, 4X Stainless Steel Enclosures
	Cat. No.	Cat. No.
4 *[11]*	9422A3	9422A4
6 *[11]*	9422A1	9422A2
	9422A1Y *[12]*	
6 *[13]*	9422AP1	9422AP2
10 *[14]*	9422A9	9422A10
10	9422AP9	9422AP10
12 *[15] [16]*	9422A7	9422A8

NOTE: See Handle Information, page 8-34 for dimensional information.

Accessories

Class R Fuse Kits

When installed, this kit rejects all fuses except Class R. The kits are available for field installation. With rejection kit and Class R fuses installed, the switch is UL component recognized for use on systems with fault current up to 200,000 RMS symmetrical amperes.

Table 8.77: Class R Fuse Kits

Disconnect Switch Type	Switch Type	Fuse Clip Rating		Class R Kit
		250 V	600 V	Cat No.
30 A	TCF30	30	—	RFK03
	TCF33	60	30	RFK06
60 A	TDF60	60	30	RFK06
	TDF63	—	60	RFK06H
100 A	TEF10	100	100	RFK10
200 A	TF2	200	200	9999SR4
	TF3	200	200	9999SR4
400 A	TG2	400	400	9999SR5

[11] Use with 30–200 A, 9422 switches and all circuit breaker mechanisms.
[12] Yellow base with gray handle and red knob.
[13] Use only with 9422RM1, 9422CMP, and PowerPacT M and P operating mechanisms.
[14] Use with Type D2 remote or dual adapter kit.
[15] Use only with 400 A, 9422TG1 and 9422TG2 disconnect switch.
[16] Adjustable depth.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Electrical Interlocks for Disconnect Switches

Table 8.78: Electrical Interlocks

Disconnect Switch Size	Switch Type	Electrical Interlocks Cat No.
30 A 60 A 100 A	TCF, TCN, TDF, TDN, TEF, TEN	9999TC10 *[17]*
		9999TC20 *[18]*
	BTCF, BTCN, BTDF, BTDN, BTEF, BTEN	9999TC11 *[17]*
		9999TC21 *[18]*
200 A	TF, ATF	9999R8 *[17]*
	TF, ATF	9999R9 *[18]*
400 A	TG	9999R35 *[17]*
	TG	9999R36 *[18]*

Internal Barrier Kits


Provides an additional barrier that helps prevent accidental contact with live parts. Field-installed transparent barriers do not restrict visual inspection of the switch. Barriers provide IEC529 IP2X “finger safe” protection when door of enclosed disconnect switch is open. A convenient door allows use of test probes without accessing fuses and replacement of fuses without removing barrier. Barrier must be used with the skirt kit to enclose a panel mounted 9422 disconnect.



Table 8.79: Internal Barrier Kits

Disconnect Switch Size	Barrier Cat. No.	Skirt Cat No.
30 A	SS06	SS0306SK
60 A	SS06	SS0306SK
100 A	SS10	SS10SK

Cable Operators for 9422 Disconnect Switches



9422CFT40

Table 8.80: Cable Operators for 9422 Disconnect Switches

Switch Type	Cable Mechanisms *[19]*		Cable Mechanisms with A1 Handle for NEMA Type 1, 3, 3R, 4, and 12 Enclosures
	Cable Length (in.)	Cat. No.	Cat. No.
TCN30C, TCF30C, TCF33C, TDN60C, TDF60C, TDF63C, TEN10C, TEF10C	36	9422CFT30	9422CFT31
	48	9422CFT40	—
	60	9422CFT50	9422CFT51
	120	9422CFT10	9422CFT11

Table 8.81: Class 9422 Replacement / Refrofit Fuse Clip Kits


Disconnect Switch Size	Switch Type	Fuse Type	Fuse Clip Rating (A)		Line and Load Fuse Clip Kit (includes load base and fuse pullers)
			250 V	600 V	Cat. No.
30 A	TCF30 TCN30 TCF33	H, K, J, R	30	—	9422TC30
			60	30	9422TC33
60 A	TDN60	H, K, J, R	60	30	9422TC33
			—	60	9422TD63

Table 8.82: Lug Data

Disconnect Switch Size	Wire Size (Min.–Max.)		Lug Kits, Cu	Lug Kits, Al
	Cu	Al	Cat No.	Cat No.
30–60 A	14–2 AWG	10–2 AWG	CL0306F	AL0306F
100 A	10–0 AWG	6–0 AWG	CL10F	AL10F
200 A	6 AWG – 600 kcmil	6 AWG – 600 kcmil	—	—
400 A	4 AWG – 500 kcmil	—	—	—

[17] 1 N.C. or N.O. Contact depending on wiring.
[18] 2 N.C. or N.O. or 1 N.O. or 1 N.C. Contact depending on wiring.
[19] Purchase handle mechanism separately (9422A1, A2, A3, or A4).

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

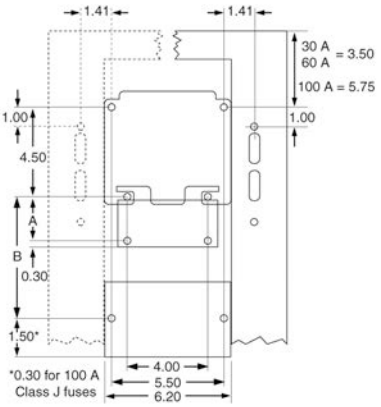

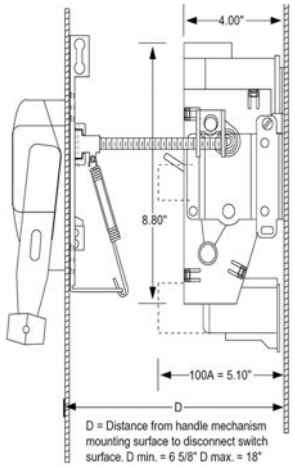



Table 8.83: Dimensions 30, 60, and 100 A Class 9422 Disconnect Switches

Switch Type	Maximum Voltage	Fuse Type	Dimension A	Dimension B
30 A	30 A, 250 V	H, K, R	1.625	—
	30 A, 600 V	H, K, R	4.25	
	30 A, 600 V	J	1.625	
60 A	60 A, 250 V	H, K, R	2.25	
	60 A, 600 V	H, K, R	4.75	
	60 A, 600 V	J	1.625	
100 A	100 A, 250 V	H, K, R	—	3.25
	100 A, 600 V	H, K, R		5.25
	100 A, 600 V	J		3.25






Table 8.84: Dimensions

Type	A in. (mm)	C in. (mm)	D in. (mm)	Min. Enclosure Depth *[20]* in. (mm)	E in. (mm) Fusible Device	F in. (mm)
BTCN, BTDN, BTEN	—	—	6.56 (167)	8.00 (203)	—	—
BTCF, BTDF, BTEF	9.50 (241)	1.88 (48)	8.56 (217)	10.00 (254)	11.88 (302)	6.38 (162)
TFB1	11.50 (292)	3.88 (99)	9.50 (241)	12.00 (305)	—	13.19 (335)

NOTE: Back panel support is recommended for Types TFB1, 2, & 3. Other devices may also require support if the flange is not sufficiently rigid.


[20] The minimum enclosure depth is greater than Dimension D since additional space is needed when mounting the mechanism.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Dimensions

Table 8.85: Dimensions (in. / mm) for 200 A Type TF Disconnect Switches

Type	Switch Size (A)	Switch Size Fuse Clips	A	B	C	D *[21]*	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
TF1	200	None	**13.33** 339	**9.38** 238	**1.64** 42	**9.12–19.25** 232–489	**2.33** 59	**8.00** 203	—	—	—	**9.44** 240	**6.50** 165	**9.53** 242	—	—	—	**3.14** 80	**1.03** 26	**0.75** 19
TF2	200	Class J 200 A 600 V	**13.33** 339	**9.38** 238	**1.64** 42	**9.12–19.25** 232–489	**2.33** 59	**8.00** 203	**0.09** 3	—	**2.77** 70	**9.44** 240	**6.50** 165	—	**14.11** 358	—	**9.63** 245	**3.14** 80	**1.03** 26	**0.75** 19
TF2	200	Class H, K, R 200 A 250 V	**13.33** 339	**9.38** 238	**1.64** 42	**9.12–19.25** 232–489	**2.33** 59	**8.00** 203	**0.09** 3	—	**4.14** 105	**9.44** 240	**6.50** 165	—	**15.48** 393	—	**9.63** 245	**3.14** 80	**1.03** 26	**0.75** 19
TF2	200	Class H, K, R 200 A 600 V	**13.33** 339	**9.38** 238	**1.64** 42	**9.12–19.25** 232–489	**2.33** 59	**8.00** 203	**0.09** 3	—	**6.64** 169	**9.44** 240	**6.50** 165	—	**17.98** 457	—	**9.63** 245	**3.14** 80	**1.03** 26	**0.75** 19
TF3	200	Class J 400 A 600 V	**13.33** 339	**9.38** 238	**1.64** 42	**9.12–19.25** 232–489	**2.33** 59	**8.00** 203	**0.09** 3	—	**2.77** 70	**9.44** 240	**6.50** 165	**9.53** 242	**18.53** 471	—	**9.63** 245	**3.14** 80	**1.03** 26	**0.75** 19

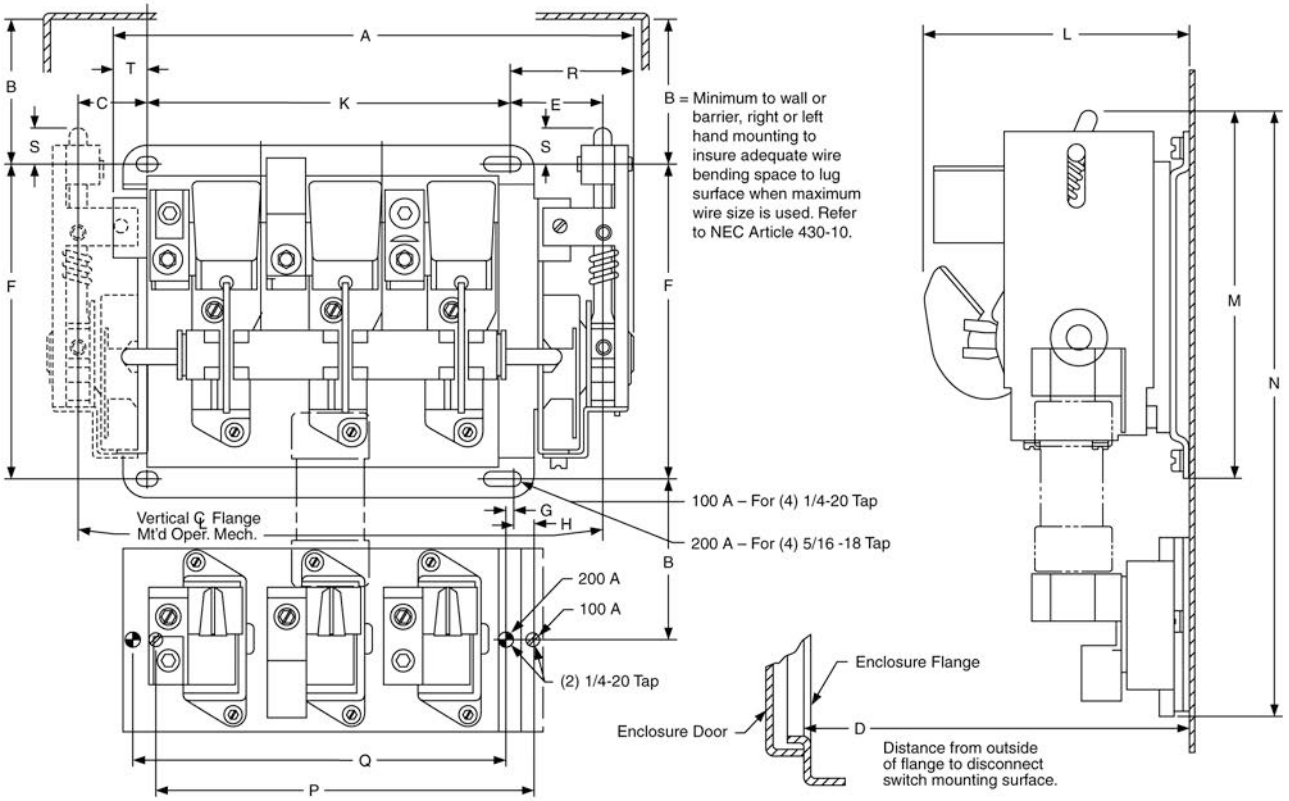

[21] The dimensions shown may be extended 7 in. by using 9422R2 (two required per switch).

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Disconnect Switches—400 A Type TG

Outline Dimensions and General Location
400 A Disconnect Switches Nonfusible and Non-Interchangeable Fuse Clip Type Fusible Switches

Table 8.86: Handle Mechanism—Types A7 and A8

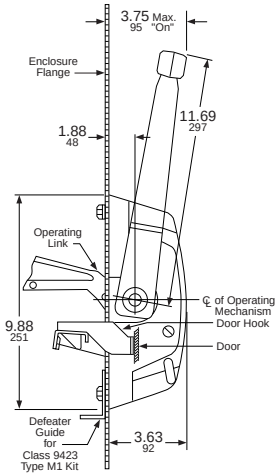


Figure 1




Figure 2

NOTE: Commercially available enclosures may not accept type TG operating mechanisms. Contact the enclosure manufacturer for availability of enclosures for use with these switches.

Switch Type	B	X
TG1, 2	**11.28** 286	**16.06** 408

NOTE: B and X = Minimum to wall or barrier to ensure adequate wire bending space to lug surface when maximum wire size is used.
Refer to NEC Article 430.10.

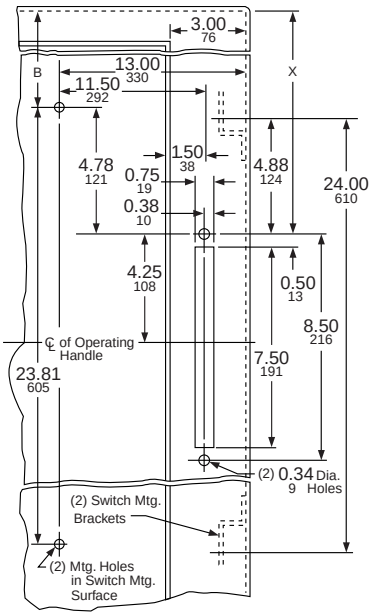



Figure 3


Table 8.87: Nonfusible and Fusible Switches

Dimension D = Distance from outside of flange to disconnect switch mounting surface.				
For Type TG1 or TG2 with:				
Type A7 or A8 adjustable depth handle mechanism	D =	**15.87** 403	to	**19** 483
	In steps of	**0.63** 16		

NOTE: Copper lugs are standard on all Type TG disconnect switches.

* D = Mounting depth measured from the switch mounting surface to the surface of flange.

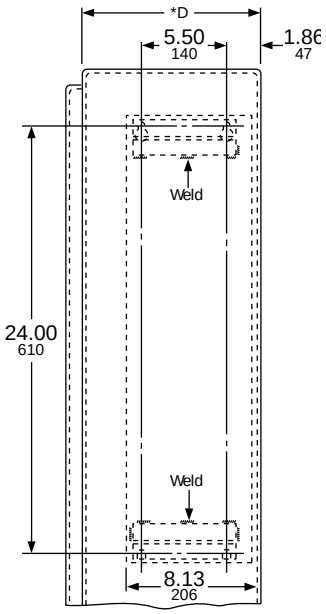

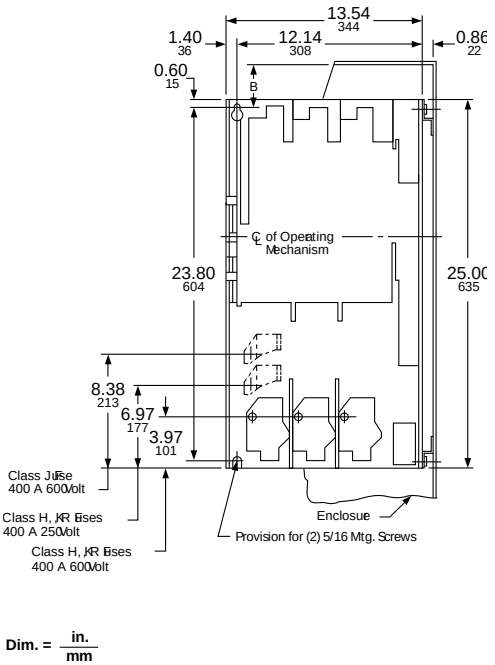

Dim. = in. / mm

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



9421 Type L
Circuit Breaker Operating Mechanism

Type L Circuit Breaker Mechanisms

Type L door-mounted, variable depth operating mechanisms feature heavy duty, all metal construction with trip indication. All mechanisms can be padlocked in the Off position when the enclosure door is open. Further, the handle assemblies can be locked Off with up to three padlocks, which also locks the enclosure when the door is closed. (The 3 in. handle accepts one padlock.) Complete kits are rated for NEMA 1, 3R, and 12 enclosures. They include a handle assembly, operating mechanism, and shaft assembly.

Table 8.88: Complete Kits

Complete Kit Does Not Include Circuit Breaker			Includes Operating Mechanism and Handle					
Use With			Standard 6 in. Handle				Short 3 in. Handle	
			Standard Shaft Kit		Long Shaft Kit		Long Shaft Kit	
Circuit Breaker or Interrupter Type	No. of Poles	Frame Size (A)	Cat. No.	Mounting Depth *[1]*	Cat. No.	Mounting Depth *[1]*	Cat. No.	Mounting Depth *[1]*
PowerPacT™ B	2–3	125	9421LB1	5.50–10.75	9421LB4	5.50–21.38	9421LB3	5.50–21.38
PowerPacT H and J	2–3	250	9421LJ1	5.50–10.75	9421LJ4	5.50–21.38	9421LJ3	5.50–21.38
PowerPacT D and L	2–3	600	9421LD1	7.25–12.06	9421LD4	7.25–22.63	3 in. handles are not recommended for use with these circuit breakers.	
	4	1200 (300 V)	9421LD14	7.25–12.06	—	—		
			—	—	9421LD44	7.25–12.06		
PowerPacT M and P *[2]*	3	1200	9421LW1 *[3]*	9.00–12.50	9421LW4 *[3]*	9.00–23.50		

Table 8.89: Component Parts

Use With			3 in. Handle Assemblies NEMA 1, 3R, 12	Standard Handle Assemblies NEMA 1, 3R, 12	Operating Mechansm Includes Lockout	Standard Shaft (Support Bracket *Not* Required)		Long Shaft (Support Bracket Required)	
Circuit Breaker or Interrupter Type	No. of Poles	Frame Size (A)	Cat. No.	Cat. No.	Cat. No.	Mounting Depth *[1]*	Cat. No.	Mounting Depth *[1]*	Cat. No.
PowerPacT B	2–3	125	9421LH3 *[4]*	9421LH6 *[4]*	9421LB7	5.50–10.75	9421LS8	5.50–21.38	9421LS13
PowerPacT H and J	2–3	250	9421LH3 *[4]*	9421LH6 *[4]*	9421LJ7	5.50–10.25	9421LS8	5.50–21.38	9421LS13
PowerPacT D and L	2–3	600	*[5]*	9421LH6 *[4]*	9421LD7	7.25–12.06	9421LS8	7.25–22.63	9421LS13
	4	1200 (300 V)	—	9421LH6 *[4]*	—	7.25–12.06	9421LS8	—	—
				9421LH6 *[4]*	—	—	—	7.25–22.63	9421LS13
				—	9421LD74	—	—	—	—
PowerPacT M and P *[2]*	3	1200	*[5]*	9421LHP8 *[4]*	9421LW7	7.19–11.63	9421LS8	7.19–22.25	9421LS10

Table 8.90: NEMA 4 and 4X Handle Assemblies

Use With			Standard Handle Assemblies		Special 3 in. Version	
Circuit Breaker or Interrupter Type	No. of Poles	Frame Size (A)	NEMA 1, 3R, 4, 12 (Painted)	NEMA 1, 3R, 4, 4X, 12 (Chrome Plated)	NEMA 1, 3R, 4, 12 (Painted)	NEMA 1, 3R, 4, 4X, 12 (Chrome Plated)
			Cat. No.	Cat. No.	Cat. No.	Cat. No.
PowerPacT B	2–3	125	9421LH46	9421LC46	9421LH43	9421LC43
PowerPacT H and J; NSF	2–3	250	9421LH46	9421LC46	9421LH43	9421LC43
PowerPacT D and L	2–3	600	9421LH46	9421LC46	3 in. handles are not recommended for use with these circuit breakers.	
PowerPacT M and P	3	1200	9421LHP48	9421LCP48		



3 in. Handle Assembly



Standard Handle Assembly



Handle Mechanisms

Table 8.91: Auxiliary and Alarm Switches for PowerPacT™ Circuit Breakers

Description	B-Frame	H- and J-Frame	D- and L-Frame	D- and L-Frame
1 Auxiliary Switch 1a 1b	LV26950	S29450	S29450	S29450
2 Auxiliary Switch 2a 2b	—	2 x S29450	2 x S29450	2 x S29450
3 Auxiliary Switch 3a 3b	—	—	3 x S29450	3 x S29450


NOTE: The location of the accessory in the circuit breaker determines its function.

[1] Mounting depth measured in inches from circuit breaker mounting surface (control panel) to outside of enclosure door.
[2] These circuit breaker operating mechanisms must use the 9421LHP•• or LCP•• handles only.
[3] Type LW1 and LW4 include an 8 in. handle (9421LHP8) rather than a 6 in. handle.
[4] For a red handle and yellow bezel, add suffix RY to catalog number, e.g., 9421LH6RY.
[5] 3 in. handles are not recommended for use with these circuit breakers.


© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Dimensions for Type L Operating Mechanisms

Panel Drilling for PowerPacT™ H and J Circuit Breaker Operating Mechanisms: 9421LJ1, 9421LJ4, and 9421LJ7

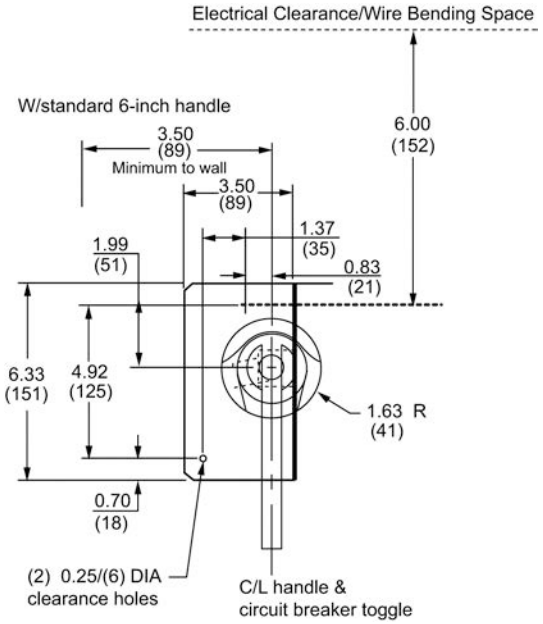


Panel Drilling for PowerPacT™ D and L Circuit Breaker Operating Mechanisms: 9421LD1, 9421LD4, and 9421LD7

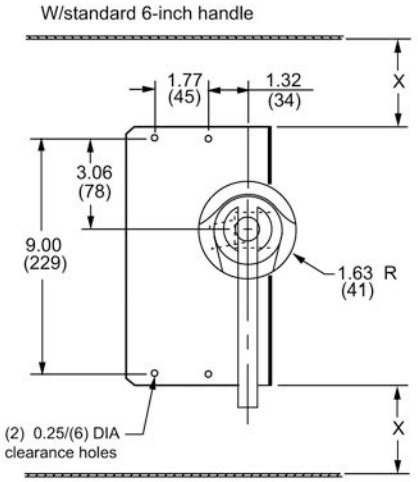



X: Minimum to wall or barrier to insure adequate wire bending space to lug surface when the maximum wire size is used. Refer to NEC 430-10.

Panel Drilling for PowerPacT™ M and P Circuit Breaker Operating Mechanisms: 9421LW1, 9421LW4, and 9421LW7



Door Drilling Dimensions

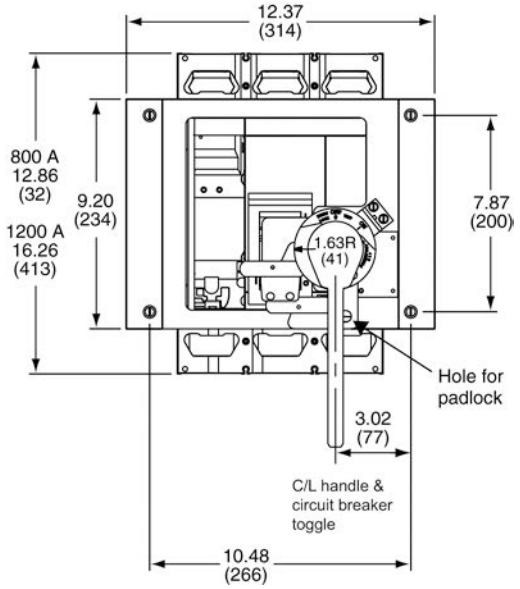

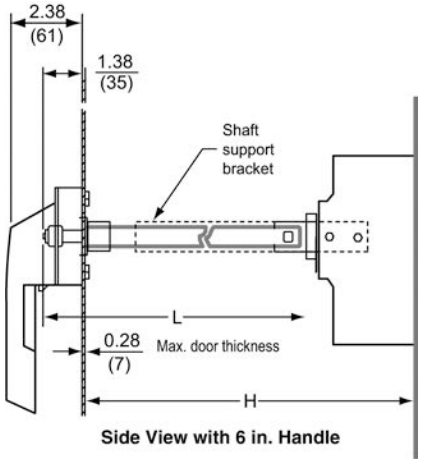


Side View with 6 in. Handle

Table 8.92: Shaft Cutting Dimensions

Class	Type	Shaft Length Formula	H = Standard Shaft		H = Long Shaft	
			Min.	Max.	Min.	Max.
9421	LJ1, LJ4, LJ7	L = H – 3.00 (76)	5.5 (138)	10.75 (273)	5.5 (138)	21.63 (543)
9421	LD1, LD4, LD7	L = H – 4.25 (108)	7.25 (184)	12.06 (306)	7.25 (184)	22.63 (575)
9421	LW1, LW4, LW7	L = H – 4.89 (124)	7.19 (183)	11.63 (295)	7.19 (183)	22.25 (565)

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

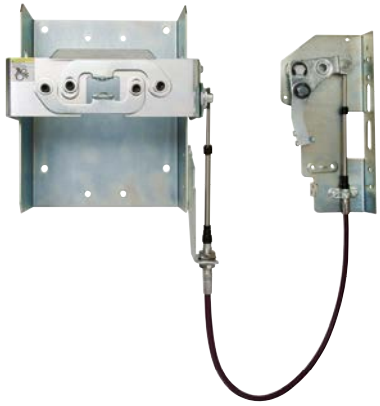

Flexible Cable Mechanism 9422CSJ30

Flexible Cable Mechanisms


- For use with Class 9422 handle operators (you must select a 9422A• handle to complete the operating mechanism)
- Specially designed for tall, deep enclosures where placement flexibility is required

Table 8.93: Flexible Cable Mechanisms for use with Schneider Electric™ (formerly Merlin Gerin™) Circuit Breakers and PowerPacT™ 3-Pole Circuit Breakers


Circuit Breaker Type	No. of Poles	Frame Size (A)	Cable Mechanism	
			Length	Catalog No.
PowerPacT B-Frame	2–3	125	36 in.	9422CSB30
			60 in.	9422CSB50
			84 in.	9422CSB70
			120 in.	9422CSB10
MG-NSF PowerPacT H- and J-Frame	2–3	250	36 in.	9422CSF30
			60 in.	9422CSF50
			84 in.	9422CSF70
			120 in.	9422CSF10
MG-NSF	4	250	36 in.	9422CSF304
			60 in.	9422CSF504
			120 in.	9422CSF104
MG-NSJ PowerPacT D- and L-Frame	3	600	36 in.	9422CSJ30
			60 in.	9422CSJ50
			120 in.	9422CSJ10
MG-NSJ PowerPacT D- and L-Frame	4	600	36 in.	9422CSJ304
			60 in.	9422CSJ504
			120 in.	9422CSJ104
PowerPacT M- and P-Frame *[6]*	3	1200	48 in.	9422CMP40
			50 in.	9422CMP50
			120 in.	9422CMP10

NOTE: Refer to NEC Article 430-10 for minimum dimension X from circuit breaker top mounting hole to wall or barrier to ensure adequate wire bending space.
NOTE: Bend radius in cable must never be less than 6 inches. Electrical clearances must be maintained between cable and live electrical parts.


9422CSF 3-Pole

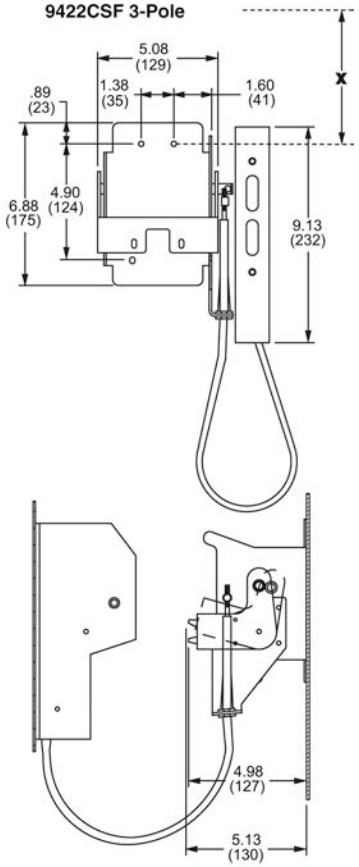

9422CMP

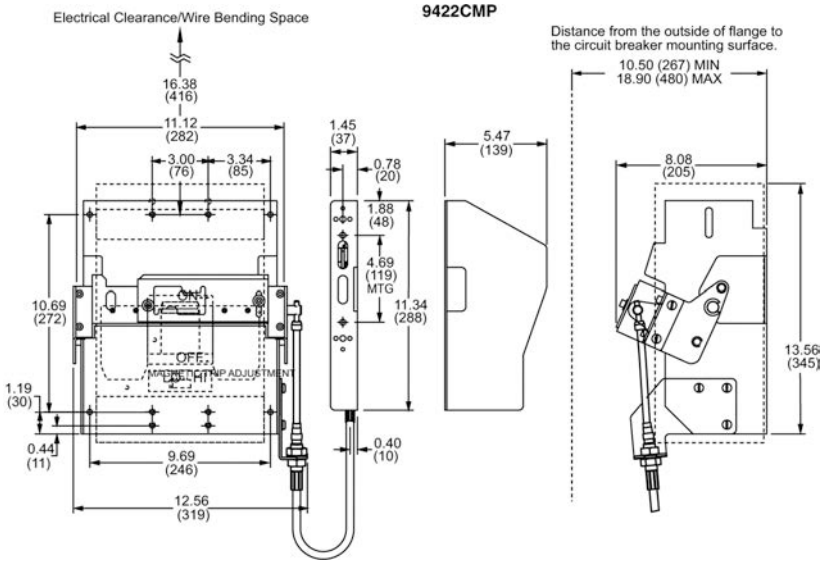

9422CSJ 3-Pole

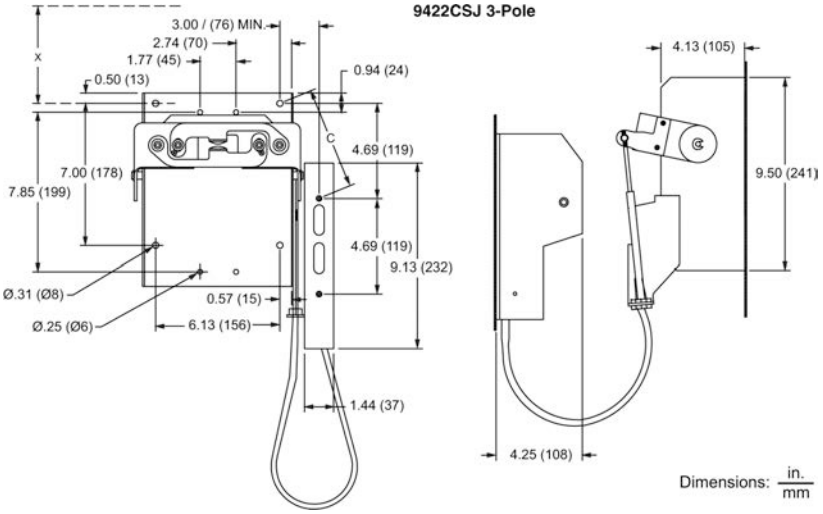

[6] Must use 9422AP1 or 9422AP2 Handle with this operating mechanism.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



9422CSFD33

Dual Cable Operating Mechanisms for Square D™ Circuit Breakers

Dual Cable Operating Mechanisms are designed for use with Square D brand PowerPacT™ B, D, H, J, and L circuit breakers through 600 A frame sizes. The cable mechanisms allow for a single handle operator, Class 9422A, to operate both circuit breakers. The cable mechanism is designed especially for tall, deep enclosures where placement flexibility is required. There are numerous cable arrangements to choose from to accommodate many applications.

Features

- Separate cables for each circuit breaker
- Rugged metal flange handle operator
- Maximized flexibility of circuit breaker placement for existing and new applications
- Control panel can be fed from two separate supply voltages (if required)
- Dual mechanism allows both separate supply voltages to be controlled by a single handle to improve security features

Table 8.94: Dual Cable Operating Mechanisms Selection

Circuit Breaker Type	Cable Length in. / mm (quantity)	Catalog Number	Frame Size (max.)
PowerPacT B	120 in. / 3048 mm (2)	9422CSBD1	125 A
	36 in. / 914 mm (1) 60 in. / 1524 mm (1)	9422CSBD35	
	60 in. / 1524 mm 60 in. / 1524 mm	9422CSBD55	
	36 in. / 914 mm (1) 120 in. / 3048 mm (1)	9422CSBD31	
	36 in. / 914 mm (2)	9422CSBD33	
	60 in. / 1524 mm (1) 120 in. / 3048 mm (1)	9422CSBD51	
PowerPacT H & J MG NSF	120 in. / 3048 mm (2)	9422CSFD1	250 A
	36 in. / 914 mm (1) 60 in. / 1524 mm (1)	9422CSFD35	
	60 in. / 1524 mm (1-CSF 3 pole) 60 in. / 1524 mm (1-CSF 4 pole)	9422CSFD345	
	36 in. / 914 mm (1) 120 in. / 3048 mm (1)	9422CSFD31	
	36 in. / 914 mm (2)	9422CSFD33	
	60 in. / 1524 mm (1) 120 in. / 3048 mm (1)	9422CSFD51	
	60 in. / 1524 mm (2)	9422CSFD55	
PowerPacT D & L MG NSJ	60 in. / 1524 mm (2-CSJ)	9422CSJD50 *[7]*	600 A
	120 in. / 3048 mm (2-CSJ)	9422CSJD10 *[7]*	
	60 in. / 1524 mm and 120 in. / 3048 mm (2-CSJ)	9422CSJD51*[7]*	
	120 in. / 3048 mm (1-CSF) and 120 in. / 3048 mm (1-CSJ)	9422CSFJD10	250 A and 600 A
	60 in. / 1524 mm (1-CSF) 60 in. / 1524 mm (1-CSJ)	9422CSFJD50	


Handle Mechanisms

These handle mechanism kits are used with the circuit breaker variable depth and cable operating mechanisms. The kits contain all parts necessary for mounting the handle to the flange of the enclosure. Types A1–A4, A1Y, and AP1 are suitable for right or left-hand flange mounting.

Table 8.95: 9422 Disconnect Switch and Circuit Breaker Handle Mechanisms

Handle Depth (in.)	NEMA Type 1, 3, 3R, 4, 12 Enclosures Cat. No.	NEMA Type 4, 4X Stainless Steel Enclosures Cat. No.
4 *[8]*	9422A3	9422A4
6 *[8]*	9422A1 9422A1Y *[9]*	9422A2
6 *[10]*	9422AP1	9422AP2
10 *[11]*	9422A9	9422A10
10	9422AP9	9422AP10
12 *[12] [13]*	9422A7	9422A8

NOTE: See Handle Information, page 8-34 for dimensional information.

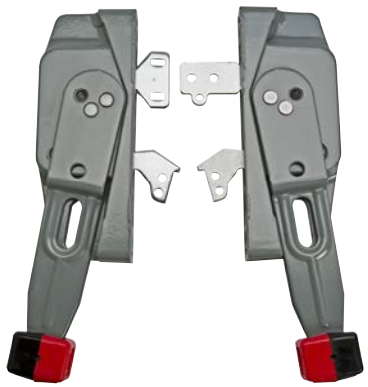

Handle Mechanisms
NOTE: Type 9422A1Y is a 6-in. yellow base with gray handle and red knob.

[7] Must use the 9422AP1 or 9422AP2 operating handle with this operating mechanism.
[8] Use with 30–200 A, 9422 switches and all circuit breaker mechanisms.
[9] Yellow base with gray handle and red knob.
[10] Use only with 9422RM1, 9422CMP, and PowerPacT M and P operating mechanisms.
[11] Use with Type D2 remote or dual adapter kit.
[12] Use only with 400 A, 9422TG1 and 9422TG2 disconnect switch.
[13] Adjustable depth.

© 2026 Schneider Electric
All Rights Reserved
4/21/2026



9422 Type R
Circuit Breaker Mechanism

Flange-Mounted, Variable-Depth Operating Mechanisms

Designed for installation in custom built control enclosures where main or branch circuit protective devices are required. All circuit breaker operating mechanisms are suitable for either right- or left-hand flange mounting, convertible on the job.

NOTE: The operating mechanisms do not include handle mechanisms. You must select a 9422A• handle to complete the installation.

Table 8.96: Variable-Depth Operating Mechanisms for Use with Schneider Electric™ Brand Circuit Breakers (Formerly Merlin Gerin™ Brand)

Use with Circuit Breaker Frame Size	No. of Poles	Frame Size A	Variable Depth Mtg. Range (in.) *[14]*	Operating Mechanism (Does Not Include Handle Mechanism) Cat. No.
Schneider Electric (formerly Merlin Gerin) Circuit Breakers and PowerPacT™ Frame 3-Pole Circuit Breakers				
PowerPacT B-Frame	2–3	125	5.88–17.75	9422RB1
MG-NSF PowerPacT H- and J-Frame	2–3	250	5.88–17.75	9422RQ1
MG-NSJ PowerPacT D-and L-Frame	3	600	9.00–17.75	9422RS1
PowerPacT M- and P-Frame *[15]*	3	1200	10.50–18.38	9422RM1

Table 8.97: Electrical Interlocks—Class 9999

Description	Cat. No.
Single Pole, Double Throw	9999R26
Double Pole, Double Throw	9999R27

[14] Class 9422 Type R2 will extend mounting depth 7 inches—not recommended for use with the 9422RM1 operating mechanism (see Table 8.95).
[15] These circuit breaker operating mechanisms must use the 9422APx handles.


© 2026 Schneider Electric
All Rights Reserved
4/21/2026


Dimensions

Minimum to wall or barrier to insure adequate wire bending space to lug surface when the maximum wire size is used with standard lugs. Refer to NEC 430-10.


Dimensions: **in.**
mm


9422RQ1



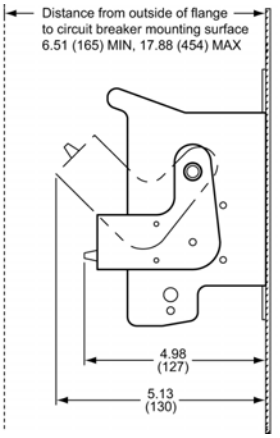



9422RS1

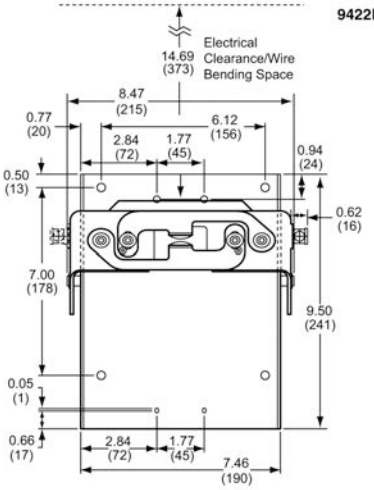

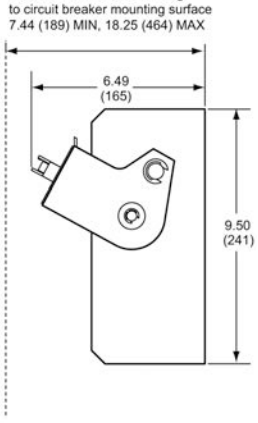

9422RM1

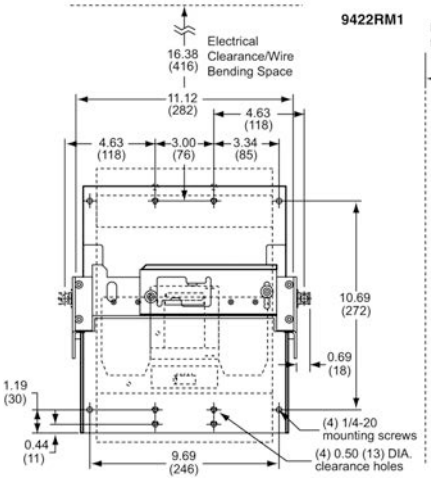

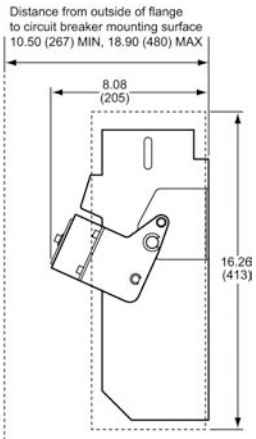

© 2026 Schneider Electric
All Rights Reserved
4/21/2026

Section 9

Panelboards



NQ Panelboards



NF Panelboards



I-Line Panelboards

Final Distribution Panelboard Series Ratings 9-2

NQ Panelboards—240 Vac, 48 Vdc 9-6

- Selection Procedure for NQ Merchandised Panelboards 9-6
- NQ Merchandised Main Lug Interiors 9-7
- NQ Merchandised Main Circuit Breaker Interiors 9-8
- QOB Circuit Breakers for NQ Panelboards 9-11
- NQ Factory Assembled Panelboards 9-14
- NQ Trim Front, Ground Bar, and SPD Options 9-17
- NQ Panelboard Accessories 9-18
- Fingersafe IP2X per IEC 60529 Barriers for NQ Panelboards 9-20
- U.S. Service Entrance Barrier Kits 9-21

NF Panelboards—600Y/347 Vac Max. 9-22

- Selection Procedure for NF Merchandised Panelboards 9-22
- NF Merchandised Main Lug Three Phase Interiors 9-23
- NF Merchandised Main Circuit Breaker Interiors 9-24
- E-Frame Circuit Breakers for NF Panelboards 9-25
- NF Factory Assembled Main Circuit Breakers 9-27
- NF Factory Assembled Panelboard Common Features 9-28
- NF Panelboard Accessories 9-31

Separated Distribution and Split Bus Panelboards 9-34

- Separated Distribution and Split Bus NF and NQ Panelboards 9-34

Single Row (Column Width) NF and NQ Panelboards 9-36

- NQ Single-Row Panelboards—240 Vac Bolt-on 9-36
- NF Single-Row Panelboards—600Y/347 Vac Bolt-on 9-37

MVP Panelboards 9-38

- NQ and NF Measurement and Verification Panelboards (MVP) 9-38

Powerlink™ Lighting Control Systems 9-39

- Powerlink Lighting Control Products 9-39
- Powerlink MVP Panelboards 9-43

I-Line™ Panelboards—600 Vac, 250 Vdc 9-44

- I-Line Merchandised Panelboards 9-44
- I-Line Merchandised Panelboard Accessories 9-49
- Molded Case Circuit Breakers for I-Line Panelboards 9-53
- I-Line Factory Assembled Panelboards 9-62

Special Features, Modifications, and Terminal Data 9-63

- Special Features 9-63
- Terminal Data for I-Line Panelboards 9-63

I-Line Enable Modules 9-64

- I-Line Panelboards Enable Modules 9-64

I-Line Series Ratings for I-Line Panelboards 9-66

- I-Line Series Connected Circuit Breaker Ratings 9-66

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

NQ Panelboards

Table 9.1: NQ Series Connected Circuit Breaker Ratings (RMS Symmetrical)

Maximum System Voltage AC *[1]*	Maximum Short Circuit Current Rating*[2]*	Square D™ Brand Integral or Remote Main Circuit Breakers and Remote Main Fuses*[3][4][5]*	Square D™ Brand Branch Circuit Breaker Catalog Designation and Allowable Ampere Ranges			
			Type*[6][7][8]*	1 Pole	2 Pole	3 Pole
120/240 1P/3W 208Y/120 3P/4W 240/120 3P/4W	18,000	LA / LH	QO (B)	15–30 A	15–30 A	—
	22,000	QO (B) VH, QOB-VH	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	25,000	QD	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		ED	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		BD, HD, JD, LD	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	42,000	LA	QO (B)	15–30 A	15–30 A	—
	65,000	QG	QO (B)	15–70 A	15–125 A	—
			QO(B) VH	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		EG	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) EPE	—	—	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		BG, HG, JG, LG	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	100,000	QJ	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		EJ	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—

[1] Series Ratings listed at higher system voltages apply to lower system voltages (Example: 240 3P/3W covers 208Y/120 3P/4W).
[2] Short Circuit tests are conducted at 100–105% of the maximum rated voltage of the panelboard.
[3] Refer to document number 80043-712-06, NQ/NQM Panelboards, for additional information, including series ratings with obsolete circuit breakers.
[4] Where LG is shown, LJ and LL can be used.
[5] Unless otherwise noted, main breakers can be applied at the maximum available amperage rating.
[6] Suffixes HID, SWD, and SWN may also be applied to the applicable branch circuit breakers shown above.
[7] Where QO(B) circuit breakers are shown above, QO(B)H, QO(B)VH, and QH(B) circuit breakers may also be used.
[8] Two-pole CAFI circuit breakers cannot be used on 208Y/120V systems.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.1 NQ Series Connected Circuit Breaker Ratings (RMS Symmetrical) (cont'd.)

Maximum System Voltage AC *[9]*	Maximum Short Circuit Current Rating*[10]*	Square D™ Brand Integral or Remote Main Circuit Breakers and Remote Main Fuses*[11][12][13]*	Square D™ Brand Branch Circuit Breaker Catalog Designation and Allowable Ampere Ranges			
			Type*[14][15][16]*	1 Pole	2 Pole	3 Pole
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		BJ, HJ, JJ	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		LJ	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) GFI	—	15–60 A	—
			QO (B) EPD	—	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	125,000	HL, JL	QO (B)	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) PL	15–30 A	15–60 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	200,000	HR, JR	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
240 1P/2W	25,000	QD, BD, HD, JD, LD	QO (B) H	—	15–100 A	—
	42,000	LA	QDL	—	70–225 A	—
	65,000	QG, BG, HG, JG, LG	QO (B) H	—	15–100 A	—
	100,000	BJ, HJ, JJ, LJ	QO (B) H	—	15–100 A	—
	125,000	HL, JL	QO (B) H	—	15–100 A	—
208Y/120 3P/4W	18,000	LA/LH	QO (B)	—	—	15–30 A
	22,000	QO (B) VH, QOB-VH	QO (B) GFI	—	—	15–50 A
	25,000	QD, ED, BD, HD, JD	QO (B) GFI	—	—	15–50 A
		LD	QO (B) GFI	—	—	15–30 A
	65,000	QG, EG, BG, HG, JG	QO (B) GFI	—	—	15–50 A
		LG	QO (B) GFI	—	—	15–30 A
	100,000	QJ	QO (B)	—	—	15–30 A
			QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110–150 A
			QO (B) PL	—	—	15–30 A
			QO (B) GFI	—	—	15–50 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		EJ, BJ, HJ, JJ	QO (B) GFI	—	—	15–50 A
240/120 3P/4W 240 3P/3W	22,000	QO (B) VH	QO (B)	—	—	15–100 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
	25,000	QD	QO (B)	—	—	15–30 A
			QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110–150 A
			QO (B) PL	—	—	15–30 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		ED	QO (B)	—	—	15–100 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		BD, HD, JD	QO (B)	—	—	15–100 A
			QO (B) VH	—	—	110–150 A
			QO (B) PL	—	—	15–30 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		LD	QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110–150 A

[9] Series Ratings listed at higher system voltages apply to lower system voltages (Example: 240 3P/3W covers 208Y/120 3P/4W).
[10] Short Circuit tests are conducted at 100–105% of the maximum rated voltage of the panelboard.
[11] Refer to document number 80043-712-06, NQ/NQM Panelboards, for additional information, including series ratings with obsolete circuit breakers.
[12] Where LG is shown, LJ and LL can be used.
[13] Unless otherwise noted, main breakers can be applied at the maximum available amperage rating.
[14] Suffixes HID, SWD, and SWN may also be applied to the applicable branch circuit breakers shown above.
[15] Where QO(B) circuit breakers are shown above, QO(B)H, QO(B)VH, and QH(B) circuit breakers may also be used.
[16] Two-pole CAFI circuit breakers cannot be used on 208Y/120V systems.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.1 NQ Series Connected Circuit Breaker Ratings (RMS Symmetrical) (cont'd.)

Maximum System Voltage AC *[9]*	Maximum Short Circuit Current Rating*[10]*	Square D™ Brand Integral or Remote Main Circuit Breakers and Remote Main Fuses*[11][12][13]*	Square D™ Brand Branch Circuit Breaker Catalog Designation and Allowable Ampere Ranges			
			Type*[14][15][16]*	1 Pole	2 Pole	3 Pole
			QO (B) EPD	—	—	15–30 A
			QO (B) EPE	—	—	15–30 A
	42,000	LA	QDL	—	—	70–225 A
			QO (B) VH	—	—	15–30 A
		MG	QOB-VH	—	—	110-150A
	65,000	QG	QO (B)	—	—	15–30 A
			QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110–150 A
			QO (B) PL	—	—	15–30 A
		EG, FG	QO (B)	—	—	15–100 A
			QOB-VH	—	—	110–125 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		BG, HG, JG	QO (B)	—	—	15–100 A
			QOB-VH	—	—	110–150 A
			QO (B) PL	—	—	15–30 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		LG	QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110–150 A
			QO (B) EPD	—	—	15–30 A
			QO (B) EPE	—	—	15–30 A
		EJ	QO (B)	—	—	15–100 A
			QOB-VH	—	—	110–125 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		BJ, HJ, JJ	QO (B)	—	—	15–100 A
			QOB-VH	—	—	110–150 A
			QO (B) PL	—	—	15–30 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		LJ	QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110-150A
	125,000	HL, JL	QO (B)	—	—	15–100 A
			QOB-VH	—	—	110-150A
			QO (B) PL	—	—	15–30 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
	200,000	HR, JR	QO (B)	—	—	15–100 A
			QOB-VH	—	—	110-150A
120/240 1P/3W 208Y/120 3P/4W 240/120 3P/4W	42,000	400 A Max. Class T3 Fuses	QO (B) VH	15–70 A	15–125 A	—
	65,000	400 A Max. Class J Fuses	QO (B) VH	15–70 A	15–125 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
		400 A Max. Class T6 Fuses	QO (B) VH	15–70 A	15–125 A	—
			QOB-VH	—	150 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	100,000	200 A Max. Class T3 Fuses	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
			QO (B) AFI	15–20 A	—	—
			QO (B) CAFI	15–20 A	15–20 A	—
			QO (B) DF	15–20 A	—	—
	200,000	200 A Max. Class T6 or J Fuses	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
		400 A Max. Class T3 Fuses	QO (B)	15–70 A	15–125 A	—
			QO (B) GFI	15–30 A	15–60 A	—
			QO (B) EPD	15–30 A	15–60 A	—
208Y/120 3P/4W	65,000	400 A Max Class J	QO (B) GFI	—	—	15–50 A
	100,000	200 A Max Class T3	QO (B) GFI	—	—	15–50 A
	200,000	200 A Max. Class T6 or J Fuses	QO (B) GFI	—	—	15–50 A
		400 A Max. Class T3 Fuses	QO (B) GFI	—	—	15–50 A
240/120 3P/4W 240 3P/3W	50,000	600 A Max. Class T3 Fuses	QO (B) VH	—	—	15–30 A
	65,000	400 A Max. Class J Fuses	QO (B) VH	—	—	15–100 A
		400 A Max. Class T6 Fuses	QO (B) VH	—	—	15–100 A
			QOB-VH	—	—	110–150 A

[9] Series Ratings listed at higher system voltages apply to lower system voltages (Example: 240 3P/3W covers 208Y/120 3P/4W).
[10] Short Circuit tests are conducted at 100–105% of the maximum rated voltage of the panelboard.
[11] Refer to document number 80043-712-06, NQ/NQM Panelboards, for additional information, including series ratings with obsolete circuit breakers.
[12] Where LG is shown, LJ and LL can be used.
[13] Unless otherwise noted, main breakers can be applied at the maximum available amperage rating.
[14] Suffixes HID, SWD, and SWN may also be applied to the applicable branch circuit breakers shown above.
[15] Where QO(B) circuit breakers are shown above, QO(B)H, QO(B)VH, and QH(B) circuit breakers may also be used.
[16] Two-pole CAFI circuit breakers cannot be used on 208Y/120V systems.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.1 NQ Series Connected Circuit Breaker Ratings (RMS Symmetrical) (cont'd.)

Maximum System Voltage AC *[9]*	Maximum Short Circuit Current Rating*[10]*	Square D™ Brand Integral or Remote Main Circuit Breakers and Remote Main Fuses*[11][12][13]*	Square D™ Brand Branch Circuit Breaker Catalog Designation and Allowable Ampere Ranges			
			Type*[14][15][16]*	1 Pole	2 Pole	3 Pole
	100,000	200 A Max. Class T3 Fuses	QO (B)	—	—	15–100 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
	200,000	200 A Max. Class T6 or J Fuses	QO (B)	—	—	15–100 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A
		400 A Max. Class T3 Fuses	QO (B)	—	—	15–100 A
			QO (B) EPD	—	—	15–50 A
			QO (B) EPE	—	—	15–50 A

NF Panelboards

Table 9.2: NF Series Connected Circuit Breaker Ratings (RMS Symmetrical)

Maximum System Voltage, AC *[9]*	Max. Short Circuit Current Rating	Square D™ Brand Integral or Remote Main Circuit Breakers and Remote Main Fuses*[10]*	Square D™ Brand Branch Circuit Breaker Catalog Designation and Allowable Ampere Ranges			
			Circuit Breaker Abbreviation*[11]*	1 Pole	2 Pole	3 Pole
120 120/240 240	65,000	EG, BG, HG, JG, LG, LH	EDB	15–70	15–125	15–125
		EG	ECB-G3	15–30	15–30	15–30
	100,000	EJ, BJ, HJ, JJ, LJ	EDB, EGB	15–70	15–125	15–125
		EJ, BJ, HJ, JJ	ECB-G3	15–30	15–30	15–30
	125,000	HL, JL	EDB, EGB, EJB	15–70	15–125	15–125
		HL, JL	ECB-G3	15–30	15–30	15–30
	200,000	HR, JR, LR	EDB, EGB, EJB	15–70	15–125	15–125
		HR, JR	ECB-G3	15–30	15–30	15–30
		Class J or T (600 V) 200 A Max Fuses	ECB-G3	15–30	15–30	15–30
277 480Y/277	35,000	EG, BG, HG, JG, LG, LH	EDB	15–70	15–125	15–125
		EG, BG, HG, JG, LG, LH	EDB-EPD	15–50	—	—
		EG, BG, HG, JG	ECB-G3	15–30	15–30	15–20
	65,000	EJ, BJ, HJ, JJ, LJ	EDB, EPD	15–70	15–125	15–125
		EJ, BJ, HJ, JJ, LJ, LL	EDB-EPD, EGB-EPD	15–50	—	—
		EJ, BJ, HJ, JJ	ECB-G3	15–30	15–30	15–20
	100,000	HL, JL, LL	EDB, EGB, EJB	15–70	15–125	15–125
		HL, JL, LL	EDB-EPD, EGB-EPD, EJB-EPD	15–50	—	—
		Class J or T (600 V) 400 A Max Fuses	EDB, EGB, EJB	15–70	15–125	15–125
		Class J or T (600 V) 400 A Max Fuses	EDB-EPD, EGB-EPD, EJB-EPD	15–50	—	—
	200,000	HR, JR, LR	EDB, EGB, EJB	15–70	15–125	15–125
		HR, JR, LR	EDB-EPD, EGB-EPD, EJB-EPD	15–50	—	—
		HR, JR	ECB-G3	15–30	15–30	15–20
		Class J or T (600 V) 200 A Max Fuses	EDB, EGB, EJB	15–70	15–125	15–125
		Class J or T (600 V) 200 A Max Fuses	EDB-EPD, EGB-EPD, EJB-EPD	15–50	—	—
		Class J or T (600 V) 200 A Max Fuses	ECB-G3	15–30	15–30	15–20
347 600Y/347	18,000	HG, BG, JG, LG	EDB	15–70	15–100	15–100
	25,000	EJ, BJ, HJ, JJ, LJ, LH	EDB, EGB	15–70	15–100	15–100
	50,000	HL, JL, LL	EDB, EGB, EJB	15–70	15–100	15–100
	65,000	HR, JR	EDB, EGB, EJB	15–70	15–100	15–100
		LR	EJB	15–70	15–100	15–100
	200,000	Class J or T (600 V) 200 A Max Fuses	EDB, EGB, EJB	15–70	15–100	15–100

[9] Series Ratings listed at higher system voltages apply to lower system voltages (Example: 240 3P/3W covers 208Y/120 3P/4W).
[10] Short Circuit tests are conducted at 100–105% of the maximum rated voltage of the panelboard.
[11] Refer to document number 80043-712-06, NQ/NQM Panelboards, for additional information, including series ratings with obsolete circuit breakers.
[12] Where LG is shown, LJ and LL can be used.
[13] Unless otherwise noted, main breakers can be applied at the maximum available amperage rating.
[14] Suffixes HID, SWD, and SWN may also be applied to the applicable branch circuit breakers shown above.
[15] Where QO(B) circuit breakers are shown above, QO(B)H, QO(B)VH, and QH(B) circuit breakers may also be used.
[16] Two-pole CAFI circuit breakers cannot be used on 208Y/120V systems.
[9] Short circuit tests are conducted at 100–105% of the maximum rated voltage of the panelboard.
[10] Please consult the NF/NFOM Panelboards Information Manual (80043-741-03) for additional information, including series ratings with obsolete circuit breakers.
[11] EDB-EPD, EGB-EPD & EJB-EPD suitable for 480Y/277Vac or 277Vac ONLY.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Selection Procedure for NQ Merchandised Panelboards

1. Review maximum electrical system voltage, ampacity, and available fault current, and determine the type of panelboard that is desired (see tables Table 9.1, and Table 9.152–Table 9.153).
2. Identify type (plug-on or bolt-on) and total quantity of branch circuit breaker poles and panel spaces required (see Digest sections 7 and 9 for catalog numbers).
3. Select proper main lug interior (from Table 9.4 Main Circuit Breaker Interiors—Will accept plug-on and bolt-on circuit breakers, page 9-8 or from Table 9.5) or:
   - Select main circuit breaker interior and main circuit breaker adapter kit (from Table 9.4 or Table 9.6), based upon the equivalent number of poles and ampere rating. **NOTE:** Interiors include solid neutral and are field convertible to top-feed.
   - If a main circuit breaker interior was selected, select a vertical main circuit breaker (or fuse) from the PowerPacT H-, J-, L- Q-, or LA/LH frame pages in Section 7 of the Digest, or a QOB or QOB-VH back-fed main circuit breaker in Section 9 of the Digest.
4. Select ground bars from tables Table 9.7 or any non-standard neutral assemblies (i.e., 200% neutral for non-linear loads) from Table 9.36.
   - Please note that an aluminum ground bar kit is included with NQ Panelboard Interiors.
5. Select any required sub-feed circuit breakers, sub-feed lugs (SFL), or feed-through lugs (FTL) kits:
   - Subfeed circuit breaker (SFB), Sub-feed lugs (SFL) or feed-through lugs (FTL) kits: Table 9.37 in the NQ Accessories sections.
   - For subfeed circuit breakers select a PowerPacT H-, J-, L-, or Q-frame circuit breaker from Section 7 of the Digest.
6. Determine the total enclosure height required by adding requirements from interior, main circuit breaker, neutrals and ground bars, SFL, FTL, or sub-feed circuit breaker.
7. Select enclosure from the tables Table 9.3–Table 9.7, Table 9.23 Table 9.25, and Table 9.36–Table 9.40.
   NEMA Type 1—select box and front (cover) catalog number corresponding to interior catalog number.
   NEMA Type 3R, 5, 12—select enclosure. Cover for Type 3R, 5, 12 is included with the enclosure.
8. Select the branch circuit breakers to be installed in the panel.
   For NQ panelboards use QO (VH) or QH circuit breakers from Section 7 of the Digest, QOB(VH), or QHB circuit breakers from Section 9 of the Digest.
9. Select options and accessories from Table 9.5–Table 9.43.
   NOTE: Additional NF and NQ options may be found in the Supplemental and Obsolescence Digest, Section 4.

NQ Merchandised Selection Example
208Y/120 Vac, 3Ø4W, 10 kA SCCR, 225 A, MLO, NEMA Type-1, surface-mount, bolt-on, branch circuit breakers, main sub-feed lugs

Branches	Table No.	Catalog Number	Spaces
(20) 20/1	Table 9.9	(20) QOB120	20
two 40/2	Table 9.9	two QOB240	4
two 30/3	Table 9.9	two QOB330	6
			Total 30 spaces

Branches	Table No.	Catalog Number	Min. Box Height
225 A MLO Interior	Table 9.3	NQ430L2	32 inches
Enclosure (Box)	Table 9.3	MH38	—
Front (Cover)	Table 9.3	NC382S	—
Sub-feed Lugs	Table 9.37 and Table 9.38	NQSFL2	6 inches
			Total 38 inches

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

NQ Main Lug Interiors—240 Vac, 48 Vdc[1]

Table 9.3: Main Lug Interiors—Accepts plug-on and bolt-on circuit breakers

Circuit Breaker Pole Spaces [2]	Mains Rating (Amps)	Interior Only (Order Branch Circuit Breakers Separately) [3][4]	NEMA Type 1 Enclosure[5]					Water, Dirt, & Dust Resistant Enclosure Catalog Numbers[5][6]		
			Box 20 in. W x 5.75 in. D[7] or 8.75 in. D[8][9]	Mono-Flat™ Trim Front [10]	Hinged Trim Front[10]	Mono-Flat™ 3 Point Latch Trim Front [10][11]	Hinged 3 Point Latch Trim Front [10][11]	Type 3R/5/12 20 in. W x 5.75 in. D[12]	Vented Type 3R 26 in. W x 8.75 in. D[13]	Height (In.)
20-inch-wide Cabinet[14] —Single Phase 3-Wire.										
18	100	NQ18L1 NQ18L1C	MH26, MH26BE	NC26 ( )	NC26( )HR	–	–	MH26WP	–	26
30	100	NQ30L1 NQ30L1C	MH32, MH32BE	NC32 ( )	NC32( )HR	–	–	MH32WP	–	32
30	225	NQ30L2 NQ30L2C	MH32, MH32BE	NC32 ( )	NC32( )HR	–	–	MH32WP	–	32
42	225	NQ42L2 NQ42L2C	MH38, MH38BE	NC38 ( )	NC38( )HR	–	–	MH38WP	–	38
72	225	NQ72L2 NQ72L2C	MH44, MH44BE	NC44 ( )	NC44( )HR	–	–	MH44WP	–	44
84	225	NQ84L2 NQ84L2C	MH50, MH50BE	NC50 ( )	NC50( )HR	–	–	MH50WP	–	50
30	400	NQ30L4 NQ30L4C	MH50, MH50BE	NC50V ( )	NC50V( )HR	NC50V( )3P	–	MH50WP	MH62D9VWP	50/62
42	400	NQ42L4 NQ42L4C								
54	400	NQ54L4 NQ54L4C	MH56, MH56BE	NC56V( )	NC56V( )HR	NC56V( )3P	–	MH56WP	MH68D9VWP	56/68
84[15]	400	NQ84L4C	MH68, MH68BE	NC68V ( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	MH68WP	MH80D9VWP	68/80
30	600	NQ30L6C	MH50, MH50BE	NC50V ( )	NC50V( )HR	NC50V( )3P	NC50V( )3PHR	MH62WP[16]	MH62D9VWP[16]	50/62
42	600	NQ42L6C								
54	600	NQ54L6C	MH56, MH56BE	NC56V( )	NC56V( )HR	NC56V( )3P	NC56V( )3PHR	MH68WP[16]	MH68D9VWP[16]	56/68
84[15]	600	NQ84L6C	MH68, MH68BE	NC68V ( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	MH80WP[16]	MH80D9VWP[16]	68/80
20-inch-wide Cabinet[14]—Three Phase 4-Wire										
18	100	NQ418L1 NQ418L1C	MH26, MH26BE	NC26 ( )	NC26( )HR	–	–	MH26WP	–	26
30	100	NQ430L1 NQ430L1C	MH32, MH32BE	NC32 ( )	NC32( )HR	–	–	MH32WP	–	32
30	225	NQ430L2 NQ430L2C	MH32, MH32BE	NC32 ( )	NC32( )HR	–	–	MH32WP	–	32
42	225	NQ442L2 NQ442L2C	MH38, MH38BE	NC38 ( )	NC38( )HR	–	–	MH38WP	–	38
54	225	NQ454L2 NQ454L2C								
72[15]	225	NQ472L2 NQ472L2C	MH44, MH44BE	NC44 ( )	NC44( )HR	–	–	MH44WP	–	44
84[15]	225	NQ484L2 NQ484L2C	MH50, MH50BE	NC50 ( )	NC50( )HR	–	–	MH50WP	–	50
30	400	NQ430L4 NQ430L4C	MH50, MH50BE	NC50V ( )	NC50V( )HR	NC50V( )3P	–	MH50WP	MH62D9VWP[16]	50/62
42	400	NQ442L4 NQ442L4C								
54	400	NQ454L4 NQ454L4C	MH56, MH56BE	NC56V( )	NC56V( )HR	NC56V( )3P	–	MH56WP	MH68D9VWP[16]	56/68
72[15]	400	NQ472L4 NQ472L4C	MH62, MH62BE	NC62V ( )	NC62V( )HR	NC62V( )3P	NC62V( )3PHR	MH62WP	MH74D9VWP[16]	62/74
84[15]	400	NQ484L4C	MH68, MH68BE	NC68V ( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	MH68WP	MH80D9VWP[16]	68/80
30	600	NQ430L6C	MH50, MH50BE	NC50V ( )	NC50V( )HR	NC50V( )3P	NC50V( )3PHR	MH62WP[16]	MH62D9VWP[16]	50/62
42	600	NQ442L6C								
54	600	NQ454L6C	MH56, NH56BE	NC56V( )	NC56V( )HR	NC56V( )3P	NC56V( )3PHR	MH68WP[16]	MH68D9VWP[16]	56/68
84[15]	600	NQ484L6C	MH68, MH68BE	NC68V ( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	MH80WP[16]	MH80D9VWP[16]	68/80

Note: All NQ Merchandised Panelboard interiors include the following: a NQFP15 bag of blank filler plates; a neutral bonding strap; an NQ information manual; a NEMA instruction booklet; and a sheet of circuit numbers.

[1] DC voltage applications require installation of DC rated QO(B) circuit breakers
[2] Please note that some local building codes limit panelboards to 42 circuits, including those that reference 2005 or earlier version of NFPA 70.
[3] Accepts all QO(B) shown in Tables in Sections 7 and 9. Branch circuit breaker trip ampacity cannot exceed panelboard mains rating. 175 A and 200 A circuit breakers may only be installed in single phase 400 A and 600 A NQ Panelboards. Tandem circuit breakers may not be installed.
[4] "C" suffix indicates copper bussing.
[5] Enclosure height may increase if accessories including alternate neutral lugs, condo riser neutral assemblies, feed-thru lugs, or sub-feed lugs are installed. 26 in. wide enclosures and trim fronts are required if condo riser neutral assemblies are installed.
[6] Wall mounting brackets add 0.4 inches to back of MHxxWP enclosures.
[7] Nominal interior dimensions, see PBA600 for details.
[8] D9 suffix indicates the 8.75 in. Deep Enclosure required for panelboards wit PowerPacT L Main Breaker, Switch, or Sub-Feed Breaker. See PBA604 for dimensional details.
[9] If Blank End Walls are desired at both ends of NEMA 1 Enclosure, select catalog number with "BE" suffix.
[10] Add "F" for flush mount, "S" for surface mount.
[11] Three point latch trim fronts are required for enclosures on panelboards with QO2175, QO2200, QO2175VH, or QO2200VH branch circuit breakers. These breakers take four pole spaces in single phase NQ interior.
[12] Enclosure includes trim kit. Nominal interior dimensions, see PBA711 for details.
[13] Vented Type 3R enclosure with three point latch door. Required for outdoor applications with two sub-feed breakers, or sub-feed breaker with trip current >150A. NEMA 3R enclosures must be bottom fed, and a NQ12RDE kit should also be selected. Interior nominal dimensions, see PBA603WP for details.
[14] For the NQ14-inch-wide panelboard offer, See NQ 14-inch-wide—240 Vac, 48 Vdc.
[15] Use only if the Local Jurisdiction where this panelboard interior is being applied has adopted the 2008 NFPA 70—National Electrical Code® (NEC®), which allows single panelboard interiors greater than 42 circuits.
[16] NEMA 3R, 5, or 12 enclosures must be bottom fed, when selected, an NQ12RDE kit should also be selected. See NQ Merchandised Accessories., page 9-18

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

NQ Main Circuit Breaker Interiors—240 Vac, 48 Vdc[17]

Table 9.4: Main Circuit Breaker Interiors—Will accept plug-on and bolt-on circuit breakers

Circuit Breaker Pole Spaces [18]	Mains Rating (Amps)	Interior Only Catalog Number (Order Branch Circuit Breakers Separately) [19][20]	Main Circuit Breaker Adapter Kits (Less Circuit Breaker)			NEMA Type 1 Enclosure, Catalog Numbers[21]					Water, Dirt, and Dust Resistant Enclosure Catalog Numbers[21][22]		
			Main Circuit Breaker Kit	UL Service Entrance Barrier Kit [23]	Circuit Breaker Frame Size[24]	Box 20 in. W x 5.75 in. D[25] or 8.75 in. D[26] [27]	Mono-Flat™ Trim Front [28]	Hinged Trim Front[28]	Mono-Flat™ 3 Point Latch Trim Front [28][29]	Hinged 3 Point Latch Trim Front [28][29]	Type 3R/5/12 20 in. Wide x 5.75 in. Deep [30]	Vented Type 3R 26 in. Wide x 8.75 in. Deep[31]	Ht (In.)
20-inch-wide Cabinet [32]—Single Phase 3-Wire													
16 [33]	15–100 back-fed	NQ18L1	—	—	Select 2-pole QOB or QOB-VH[34]	MH26, MH26BE	NC26( )	NC26( )HR	—	—	MH26WP	—	26
		NQ18L1C											
28 [33]		NQ30L1	—	—		MH32, MH32BE	NC32( )	NC32( )HR	—	—	MH32WP	—	32
		NQ30L1C											
26 [33]	110-150 back-fed	NQ30L2	—	—	Select 2-pole QOB-VH[34] [35]	MH32, MH32BE	NC32( )	NC32( )HR	—	—	MH32WP	—	32
		NQ30L2C											
38 [33]		NQ42L2	—	—		MH38, MH38BE	NC38( )	NC38( )HR	—	—	MH38WP	—	38
		NQ42L2C											
50 [33]		NQ54L2	—	—		MH38, MH38BE	NC38( )	NC38( )HR	—	—	MH38WP	—	38
		NQ54L2C											
68 [33]		NQ72L2	—	—		MH44, MH44BE	NC44( )	NC44( )HR	—	—	MH44WP	—	44
		NQ72L2C											
80 [33]		NQ84L2	—	—		MH50, MH50BE	NC50( )	NC50( )HR	—	—	MH50WP	—	50
		NQ84L2C											
18	15–100	NQ18L1	NQMB2HJ	NQHJQLLC	HD [36], HG [36], HJ, HL, HR [36]	MH38, MH38BE	NC38( )	NC38( )HR	—	—	MH38WP	—	38
		NQ18L1C											
30		NQ30L1				MH44, MH44BE	NC44( )	NC44( )HR	—	—	MH44WP	—	44
		NQ30L1C											
	15–225	NQ30L2	NQMB2HJ NQMB2Q	NQHJQLLC	HD [36], HG [36], HJ, HL, HR [36], JD, JG, JJ, JL, JR [36]; or QB, QD, QG, QJ				—	—		—	
		NQ30L2C											
42		NQ42L2				MH50, MH50BE	NC50( )	NC50( )HR	—	—	MH50WP	—	50
		NQ42L2C											
72		NQ72L2				MH56, MH56BE	NC56( )	NC56( )HR	—	—	MH56WP	—	56
		NQ72L2C											
84		NQ84L2				MH62, MH62BE	NC62( )	NC62( )HR	—	—	MH62WP	—	62
		NQ84L2C											
30	125–400	NQ30L4	NQMB4LA	NQLALLC	LA/LH [37]		NC62V( )	NC62V( )HR	NC62V( )3P	NC62( )3PHR		MH62D9VWP	
		NQ30L4C											
42		NQ42L4											
		NQ42L4C											
54		NQ54L4				MH68, MH68BE	NC68V( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	MH68WP	MH68D9VWP	68
		NQ54L4C											
84		NQ84L4C				MH80, MH80BE	NC80V( )	NC80V( )HR	NC80V( )3P	NC80V( )3PHR	MH80WP	MH80D9VWP	80
30		NQ30L4	NQMB6PP-L	NQPPLLLC	LG, LJ, LL	MH62D9	NC62V( )	NC62V( )HR	NC62V( )3P	NC62V( )3PHR	—	Factory Assembled Only	62
		NQ30L4C											
42		NQ42L4				MH68D9	NC68V( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	—		68
		NQ42L4C											
54		NQ54L4				MH74D9	NC74V( )	NC74V( )HR	NC74V( )3P	NC74V( )3PHR	—		74
		NQ54LC											
84		NQ84L4C				MH86D9	NC86V( )	NC86V( )HR	NC86V( )3P	NC86V( )3PHR	—	—	86
30	125–600	NQ30L6C	NQMB6PP-L	NQPPLLLC	LG, LJ, LL	MH62D9	NC62V( )	NC62V( )HR	NC62V( )3P	NC62V( )3PHR	—	Factory Assembled Only	62
42		NQ42L6C				MH68D9	NC68V( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	—		68
54		NQ54L6C				MH74D9	NC74V( )	NC74V( )HR	NC74V( )3P	NC74V( )3PHR	—		74
84		NQ84L6C				MH86D9[26]	NC86V( )	NC86V( )HR	NC86V( )3P	NC86V( )3PHR	—	—	86

[17] DC Voltage applications require installation of DC rated QO(B) circuit breakers.
[18] Please note that some local building codes limit panelboards to 42 circuits, including those that reference 2005 or earlier version of NFPA 70.
[19] Accepts all QO(B) shown in Tables in Sections 7 and 9. Branch circuit breaker trip ampacity cannot exceed panelboard mains rating. 175 A and 200 A circuit breakers may only be installed in single phase 400 A and 600 A NQ Panelboards. Tandem circuit breakers may not be installed.
[20] "C" suffix indicates copper bussing.
[21] Enclosure height may increase if accessories including alternate neutral lugs, condo riser neutral assemblies, feed-thru lugs, or sub-feed lugs are installed. 26 in. wide enclosures and trim fronts are required if condo riser neutral assemblies are installed.
[22] Wall mounting brackets add 0.4 inches to back of MHxxWP enclosures.
[23] Please select the appropriate UL Service Entrance Kit for UL Service Entrance applications (see , page).
[24] Circuit breaker interrupt ratings, see the table for each circuit breaker range in Section 7.
[25] Nominal interior dimensions, see PBA600 for details.
[26] D9 suffix indicates the 8.75 in. Deep Enclosure required for panelboards wit PowerPacT L Main Breaker, Switch, or Sub-Feed Breaker. See PBA604 for dimensional details.
[27] If Blank End Walls are desired at both ends of 5.75" deep NEMA 1 Enclosure, select catalog number with "BE" suffix. Both end walls are blank in 8.75" deep enclosures.
[28] Replace ( ) with "F" for flush mount, or "S" for surface mount.
[29] Three point latch trim fronts are required for enclosures on panelboards with QO2175, QO2200, QO2175VH, or QO2200VH branch circuit breakers. These breakers take four pole spaces in single phase NQ interiors.
[30] Enclosure includes trim kit. Nominal enclosure dimensions, see PBA711 for details.
[31] Vented Type 3R enclosure with three point latch door. Required for outdoor applications with PowerPacT L main breaker, two sub-feed breakers, or sub-feed breaker with trip current >150 A. NEMA 3R enclosures must be bottom fed. Interior nominal dimensions, see PBA603WP for details.
[32] For the NQ14-inch-wide panelboard offer, See NQ 14-inch-wide—240 Vac, 48 Vdc, page 9-14.
[33] Pole spaces shown are available for branch circuits, with spaces deducted for the back-fed main breaker.
[34] Do not select a back-fed main for panels to be "Suitable for use as UL service equipment." Select a H frame circuit breaker (and associated main circuit breaker kit) from the list for 225 interiors, for panels to be "Suitable for use as UL service equipment."
[35] QOB2110VH, QOB2125VH, or QOB2150VH take four pole spaces in NQ single phase interior.
[36] For single phase applications, order a 3-pole breaker. Example: HDL36100.
[37] Available for 125–400 A applications. Please order short handle circuit breaker (i.e., LAL36400MB).

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.4 Main Circuit Breaker Interiors—Will accept plug-on and bolt-on circuit breakers (cont'd.)

Circuit Breaker Pole Spaces *[38]*	Mains Rating (Amps)	Interior Only Catalog Number (Order Branch Circuit Breakers Separately) *[39][40]*	Main Circuit Breaker Adapter Kits (Less Circuit Breaker)			NEMA Type 1 Enclosure, Catalog Numbers *[41]*					Water, Dirt, and Dust Resistant Enclosure Catalog Numbers *[41][42]*		Ht (In.)
			Main Circuit Breaker Kit	UL Service Entrance Barrier Kit *[43]*	Circuit Breaker Frame Size *[44]*	Box 20 in. W x 5.75 in. D *[45]* or 8.75 in. D *[46][47]*	Mono-Flat™ Trim Front *[48]*	Hinged Trim Front *[48]*	Mono-Flat™ 3 Point Latch Trim Front *[48][49]*	Hinged 3 Point Latch Trim Front *[48][49]*	Type 3R/5/12 20 in. Wide x 5.75 in. Deep *[50]*	Vented Type 3R 26 in. Wide x 8.75 in. Deep *[51]*	
20-inch-wide Cabinet *[52]*—Three Phase 4-Wire													
15 *[53]*	15–100 back-fed	NQ418L1	—	—	Select 3-pole QOB or QOB-VH *[54]*	MH26, MH26BE	NC26 ( )	NC26( )HR	—	—	MH26WP	—	26
27 *[53]*		NQ418L1C											
		NQ430L1				MH32, MH32BE	NC32 ( )	NC32( )HR	—	—	MH32WP	—	32
		NQ430L1C											
24 *[53]*	110-150 back-fed	NQ430L2			Select 3-pole QOB-VH *[54][55]*	MH44, MH44BE	NC44 ( )	NC44( )HR	—	—	MH44WP	—	44
		NQ430L2C											
36 *[53]*		NQ442L2											
		NQ442L2C											
48 *[53]*		NQ454L2				MH50, MH50BE	NC50 ( )	NC50( )HR	—	—	MH50WP	—	50
		NQ454L2C											
66 *[53]*		NQ472L2				MH56, MH56BE	NC56( )	NC56( )HR	—	—	MH56WP	—	56
		NQ472L2C											
78 *[53]*		NQ484L2				MH62, MH62BE	NC62( )	NC62( )HR	—	—	MH62WP	—	62
		NQ484L2C											
18	15–100	NQ418L1	NQMB2HJ	NQHJQLLC	HD HG, HJ, HL, or HR	MH38, MH38BE	NC38( )	NC38( )HR	—	—	MH38WP	—	38
		NQ418L1C											
30		NQ430L1				MH44, MH44BE	NC44 ( )	NC44( )HR	—	—	MH44WP	—	44
		NQ430L1C											
	15–225	NQ430L2	NQMB2HJ NQMB2Q	NQHJQLLC	HD *[56]*, HG *[56]*, HJ, HL, HR *[56]*, JD, JG, JJ, JL, JR *[56]*; or QB, QD, QG, QJ				—	—		—	
		NQ430L2C											
42		NQ442L2							—	—		—	
		NQ442L2C											
54		NQ454L2				MH50, MH50BE	NC50 ( )	NC50( )HR	—	—	MH50WP	—	50
		NQ454L2C											
72		NQ472L2				MH56, MH56BE	NC56 ( )	NC56( )HR	—	—	—	—	56
		NQ472L2C											
84		NQ484L2				MH62, MH62BE	NC62( )	NC62( )HR	—	—	MH62WP	—	62
		NQ484L2C											
30	125–400	NQ430L4	NQMB4LA	NQLALLC	LA/LH *[57]*		NC62V( )	NC62V( )HR	NC62V( )3P	NC62V( )3PHR		MH62D9VWP	
		NQ430L4C											
42		NQ442L4											
		NQ442L4C											
54		NQ454L4				MH68, MH68BE	NC68V ( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	MH68WP	MH68D9VWP	68
		NQ454L4C											
72		NQ472L4				MH74, MH74BE	NC74V ( )	NC74V( )HR	NC74V( )3P	NC74V( )3PHR	MH74WP	MH74D9VWP	74
		NQ472L4C											
84		NQ484L4C				MH80, MH80BE	NC80V ( )	NC80V( )HR	NC80V( )3P	NC80V( )3PHR	MH80WP	MH80D9VWP	80
30		NQ430L4	NQMB6PP-L	NQPPLLLC	LG, LJ, LL	MH62D9 *[46]*	NC62V( )	NC62V( )HR	NC62V( )3P	NC62V( )3PHR	—	Factory Assembled Only	62
		NQ430L4C											
42		NQ442L4				MH68D9 *[46]*	NC68V( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	—		68
		NQ442L4C											
54		NQ454L4				MH74D9 *[46]*	NC74V( )	NC74V( )HR	NC74V( )3P	NC74V( )3PHR	—		74
		NQ454L4C											
72		NQ472L4				MH80D9 *[46]*	NC80V( )	NC80V( )HR	NC80V( )3P	NC80V( )3PHR	—	—	80
		NQ472L4C											
84		NQ484L4C				MH86D9 *[46]*	NC86V( )	NC86V( )HR	NC86V( )3P	NC86V( )3PHR	—	—	86
30	125–600	NQ430L6C				MH62D9 *[46]*	NC62V( )	NC62V( )HR	NC62V( )3P	NC62V( )3PHR	—	Factory Assembled Only	62
42		NQ442L6C				MH68D9 *[46]*	NC68V( )	NC68V( )HR	NC68V( )3P	NC68V( )3PHR	—		68
54		NQ454L6C				MH74D9 *[46]*	NC74V( )	NC74V( )HR	NC74V( )3P	NC74V( )3PHR	—		74
72		NQ472L6C				MH80D9 *[46]*	NC80V( )	NC80V( )HR	NC80V( )3P	NC80V( )3PHR	—	—	80
84		NQ484L6C				MH86D9 *[46]*	NC86V( )	NC86V( )HR	NC86V( )3P	NC86V( )3PHR	—	—	86

[38] Please note that some local building codes limit panelboards to 42 circuits, including those that reference 2005 or earlier version of NFPA 70.
[39] Accepts all QO(B) shown in Tables in Sections 7 and 9. Branch circuit breaker trip ampacity cannot exceed panelboard mains rating. 175 A and 200 A circuit breakers may only be installed in single phase 400 A and 600 A NQ Panelboards. Tandem circuit breakers may not be installed.
[40] "C" suffix indicates copper bussing.
[41] Enclosure height may increase if accessories including alternate neutral lugs, condo riser neutral assemblies, feed-thru lugs, or sub-feed lugs are installed. 26 in. wide enclosures and trim fronts are required if condo riser neutral assemblies are installed.
[42] Wall mounting brackets add 0.4 inches to back of MHxxWP enclosures.
[43] Please select the appropriate UL Service Entrance Kit for UL Service Entrance applications (see , page).
[44] Circuit breaker interrupt ratings, see the table for each circuit breaker range in Section 7.
[45] Nominal interior dimensions, see PBA600 for details.
[46] D9 suffix indicates the 8.75 in. Deep Enclosure required for panelboards wit PowerPacT L Main Breaker, Switch, or Sub-Feed Breaker. See PBA604 for dimensional details.
[47] If Blank End Walls are desired at both ends of 5.75" deep NEMA 1 Enclosure, select catalog number with "BE" suffix. Both end walls are blank in 8.75" deep enclosures.
[48] Replace ( ) with "F" for flush mount, or "S" for surface mount.
[49] Three point latch trim fronts are required for enclosures on panelboards with QO2175, QO2200, QO2175VH, or QO2200VH branch circuit breakers. These breakers take four pole spaces in single phase NQ interiors.
[50] Enclosure includes trim kit. Nominal enclosure dimensions, see PBA711 for details.
[51] Vented Type 3R enclosure with three point latch door. Required for outdoor applications with PowerPacT L main breaker, two sub-feed breakers, or sub-feed breaker with trip current >150 A. NEMA 3R enclosures must be bottom fed. Interior nominal dimensions, see PBA603WP for details.
[52] For the NQ14-inch-wide panelboard offer, See NQ 14-inch-wide—240 Vac, 48 Vdc.
[53] Pole spaces shown are available for branch circuits, with spaces deducted for the back-fed main breaker.
[54] Do not select a back-fed main for panels to be "Suitable for use as UL service equipment." Select a H frame circuit breaker (and associated main circuit breaker kit) from the list for 225 interiors, for panels to be "Suitable for use as UL service equipment."
[55] QOB2110VH, QOB2125VH, or QOB2150VH take four pole spaces in NQ single phase interior.
[56] For single phase applications, order a 3-pole breaker. Example: HDL36100.
[57] Available for 125–400 A applications. Please order short handle circuit breaker (i.e., LAL36400MB).

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



14–inch wide NQ Panelboard Main Lug



Main Circuit Breaker Panelboard



Main Lug Panelboard

NQ 14-inch-wide—240 Vac, 48 Vdc[58]

Features

14-inch-wide NQ panelboards are available for those customers whose equipment space is limited. Developed with customer input, Square D™ brand NQ panelboards are built to last, featuring innovations for ease of installation and durability.

- 240 Vac, 48 Vdc maximum
- 225 A maximum main circuit breaker or main lugs
- 100 A maximum branch circuit breakers
- Visi-Trip™ indication on branch circuit breakers
- 10,000–65,000 A Short Circuit Current Rating (SCCR)
- Interiors supplied with silver flashed copper bus as standard
- Interiors accept bolt-on and plug-on branch circuit breakers
- Three-phase, four-wire, and single-phase, three-wire interiors available
- Panelboards available with Mono-Flat™ front
- May be suitable for use as service entrance equipment with neutral bonding kit and main circuit breaker barrier installed
- Branch circuit filler plates provide fast and easy installation
- Both fully and series-rated systems are available

Table 9.5: Main Lug Interiors—Accepts Plug-On and Bolt-On Branch Breakers

Max. Number of Breakers	Main Ratings	Interior Only (Order Branch Circuit Breakers Seperately)	NEMA Type 1 Enclosure		
			Box 14 in. W x 5.75 in. Db	Mono Flat Front	Hinged Front
		Cat. No.	Cat. No.	Cat. No. [59]	Cat. No.
14-inch-wide Cabinet—Single Phase 3-Wire					
18	100 A	NQ18L1C14	NQB532	NQC32 ( )	N/A
30		NQ30L1C14	NQB532	NQC32 ( )	N/A
30	225 A	NQ30L2C14	NQB532	NQC32 ( )	N/A
42		NQ42L2C14	NQB538	NQC38 ( )	N/A
14-inch-wide Cabinet—Three Phase 4-Wire					
18	100 A	NQ418L1C14	NQB532	NQC32 ( )	N/A
30		NQ430L1C14	NQB532	NQC32 ( )	N/A
30	225 A	NQ430L2C14	NQB532	NQC32 ( )	N/A
42		NQ442L2C14	NQB538	NQC38 ( )	N/A

Table 9.6: Main Circuit Breaker Interiors—Accepts Plug-On and Bolt-On Branch Breakers

Max. Number of Breakers	Main Ratings	Interior Only (Order Branch Circuit Breakers Seperately)	Main Circuit Breaker Kit [60]	UL SE Barrier Kit	Main Circuit Breaker Frame	NEMA Type 1 Enclosure		
						Box 14 in. W x 5.75 in. Db	Mono Flat Front	Hinged Front
		Cat. No.				Cat. No. [61]	Cat. No. [59]	Cat. No.
14-inch-wide Cabinet—Single Phase 3-Wire								
16 [62]	100	NQ18L1C14	—	—	Select QOB 2-pole or QOB-VH [60]	NQB532	NQC32 ( )	N/A
28 [62]		NQ30L1C14	—	—		NQB532	NQC32 ( )	N/A
30	225	NQ30L2C14	NQMB2H-J14 or NQMB2Q14	HJQL-LC	HD, HG, HJ, HL, HR JD, JG, JJ, JL, QB , QD, QG, QJ	NQB544	NQC44 ( )	N/A
42		NQ42L2C14				NQB550	NQC50 ( )	N/A
14-inch-wide Cabinet—Three Phase 4-Wire								
15 [62]	100	NQ418L1-C14	—	—	Select QOB 3-pole or QOB-VH [60]	NQB532	NQC32 ( )	N/A
27 [62]		NQ430L1-C14	—	—		NQB532	NQC32 ( )	N/A
30	225	NQ430L2-C14	NQMB2H-J14 or NQMB2Q14	HJQL-LC	HD, HG, HJ, HL, HR JD, JG, JJ, JL, QB , QD, QG, QJ	NQB544	NQC44 ( )	N/A
42		NQ442L2-C14				NQB550	NQC50 ( )	N/A

Table 9.7: NQ Accessories Available on NQ 14” Panelboards

Description	Catalog No.
Equipment Ground Bars	
Aluminum (twenty seven terminations #14 to #4 AWG)	PK27GTA
PK23GTA+ #1 to #4/0 AWG Al or Cu lug	PK23GTAL
Copper (twenty seven terminations #14 to #4 AWG)	PK27GTACU
Ground Bar Insulator Kit	PKGTAB
Handle Attachments—Branch Circuit Breakers	
Handle lock-off	HLO1
Handle tie - (QO and QOB only)	QO1HT
Handle padlock attachment—1-pole	QO1PA
2- and 3-pole	QO1PL
Handle tie and lock-off for three 1-pole (QO, QOB)	QO3HT
Other Accessories	
Filler plates (15 per package)	NQFP15

[58] DC voltage applications require installation of DC rated QO(B) circuit breakers.
[59] Add “F” for flush mount, “S” for surface mount.
[60] Select a Q or H frame circuit breaker, HJQLLC barrier (and associated main circuit breaker kit) from the list for 225 interiors, for panels to be "Suitable for use as UL service equipment."
[61] All 14 in. W boxes come with blank endwalls.
[62] Pole spaces shown are available for branch circuits, with spaces deducted for the back-fed main circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

QOB Bolt-On Circuit Breakers with Visi-Trip™ Indicator for NQ Panelboards

NOTE: NQ panelboards also accept QO plug-on circuit breakers, see tables in Section 7 of the Digest. NQ panelboards with 175 or 200 A QO breakers require three point latch trim fronts.

Table 9.8: QOB-GFI, QOB-EPD, and QOB-EPE Circuit Breakers

Ampere Rating *[63]*	One-pole	Two-pole—Common Trip	Three-pole—Common Trip	
	Catalog No.	Catalog No.	Catalog No.	Catalog No.
QOB-GFI—QOB Qwik-Gard™ Circuit Breaker With Ground Fault Circuit Interrupter—UL Class A 4–6 mA People Protection. *[64]*				
	120 Vac—10 k AIR*[65]*	120/240 Vac—10 k AIR*[65]*	208Y/120 Vac—10 k AIR	
15 A	QOB115GFI	QOB215GFI	QOB315GFI	
20 A	QOB120GFI	QOB220GFI	QOB320GFI	
25 A	QOB125GFI	QOB225GFI	—	
30 A	QOB130GFI	QOB230GFI	QOB330GFI	
40 A	—	QOB240GFI	QOB340GFI	
50 A	—	QOB250GFI	QOB350GFI	
60 A	—	QOB260GFI*[66]*	—	
QOB-VHGFI *[67]*				
	120 Vac—22 k AIR*[65]*			
15 A	QOB115VHGFI			
20 A	QOB120VHGFI			
25 A	QOB125VHGFI			
30 A	QOB130VHGFI			
QOB-EPD—QOB Equipment protection circuit breakers with UL Listed 30 mA (EPD) or 100 mA (EPE) equipment protection.				
	120 Vac—10 k AIR*[65]*	120/240 Vac—10 k AIR*[65]*	240 Vac—10 k AIR*[65]*	
15 A	QOB115EPD	QOB215EPD	QOB315EPD	QOB315EPE
20 A	QOB120EPD	QOB220EPD	QOB320EPD	QOB320EPE
25 A	QOB125EPD	QOB225EPD	—	—
30 A	QOB130EPD	QOB230EPD	QOB330EPD	QOB330EPE
40 A	—	QOB240EPD	QOB340EPD	QOB340EPE
50 A	—	QOB250EPD	QOB350EPD	QOB350EPE
60 A	—	QOB260EPD	—	—
QOB-VHEPD				
	120 Vac—22 k AIR*[65]*			
15 A	QOB115VHEPD			
20 A	QOB120VHEPD			
25 A	QOB125VHEPD			
30 A	QOB130VHEPD			
QOB-HM—High magnetic trip circuit breakers				
15 A	QOB115HM*[68]*			
20 A	QOB120HM*[68]*			
QOB-K—Key operated QOB circuit breakers *[69]*				
	120 Vac—10 k AIR*[65]*			
10 A	QOB110K			
15 A	QOB115K			
20 A	QOB120K			
25 A	QOB125K			
30 A	QOB130K			

[63] 10–30 A circuit breakers are suitable for use with 60 °C or 75 °C conductors. 35–60 A circuit breakers are suitable for use with 75 °C conductors.
[64] Do not connect to more than 250 feet of load conductor for the total one-way run to prevent nuisance tripping.
[65] May be applied in 208Y/120 Vac systems.
[66] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.
[67] Recommended for applications where high initial inrush may occur and for individual dimmer applications.
[68] UL Listed as SWD (switching duty) rated suitable for switching 120 Vac fluorescent lighting loads.
[69] Available in single pole construction and can be mounted in any single pole space which will accept a standard QOB. These circuit breakers can be turned ON or OFF or RESET with a special key (Catalog No. QOK10) included with the circuit breaker. These circuit breakers are UL Listed and available as shown in the table.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.9: Standard Interrupting QOB 10,000 AIR Circuit Breakers

Ampere Rating *[70]*	One-pole	Two-pole—Common Trip	Two-pole—Common Trip *[71]*	Three-pole—Common Trip
	Catalog No.	Catalog No.	Catalog No.	Catalog No.
QOB Bolt-On				
	120 Vac—10 k AIR 48 Vdc—5 k AIR*[72]*	120/240 Vac—10 k AIR 48 Vdc—5 k AIR *[73] [72]*	240 Vac—10 k AIR*[72]*	240 Vac—10 k AIR 48 Vdc—5 k AIR *[73] [72]*
10 A	QOB110	QOB210	—	QOB310
15 A	QOB115*[74][75]*	QOB215*[75]*	QOB215H	QOB315*[75]*
20 A	QOB120*[74][75]*	QOB220*[75]*	QOB220H	QOB320*[75]*
25 A	QOB125*[75]*	QOB225*[75]*	QOB225H	QOB325*[75]*
30 A	QOB130*[75]*	QOB230*[75]*	QOB230H	QOB330*[75]*
35 A	QOB135*[75]*	QOB235*[75]*	—	QOB335*[75]*
40 A	QOB140*[75]*	QOB240*[75]*	QOB240H	QOB340*[75]*
45 A	QOB145*[75]*	QOB245*[75]*	—	QOB345*[75]*
50 A	QOB150*[75]*	QOB250*[75]*	QOB250H	QOB350*[75]*
60 A	QOB160*[75]*	QOB260*[75]*	QOB260H	QOB360*[75]*
70 A	QOB170*[75]*	QOB270*[75]*	QOB270H	QOB370*[75][73]*
80 A	—	QOB280*[75] [73]*	QOB280H	QOB380*[75][73]*
90 A	—	QOB290*[75] [73]*	QOB290H	QOB390*[75] [73]*
100 A	—	QOB2100*[75] [73]*	QOB2100H	QOB3100*[75] [73]*
110 A	—	QOB2110*[75] [73]*	—	—
125 A	—	QOB2125*[75] [73]*	—	—
Molded Case Switch 60 A max—240 Vac		QOB200	—	QOB300
Molded Case Switch 100 A max—240 Vac		QOB2000	—	QOB3000

Table 9.10: High Interrupting QOB and Specialty Circuit Breakers*[70]*

Ampere Rating *[70]*	One-pole	Two-pole—Common Trip	Three-pole—Common Trip
	Catalog No.	Catalog No.	Catalog No.
QOB-VH			
	120 Vac—22 k AIR*[72]*	120/240 Vac —22 k AIR*[72]*	240 Vac—22 k AIR*[72]*
15 A	QOB115VH*[74][75]*	QOB215VH*[75]*	QOB315VH*[75]*
20 A	QOB120VH *[74][75]*	QOB220VH*[75]*	QOB320VH*[75]*
25 A	QOB125VH*[75]*	QOB225VH*[75]*	QOB325VH*[75]*
30 A	QOB130VH*[75]*	QOB230VH*[75]*	QOB330VH*[75]*
40 A	QOB140VH	QOB240VH*[75]*	QOB340VH*[75]*
50 A	QOB150VH	QOB250VH*[75]*	QOB350VH*[75]*
60 A	QOB160VH	QOB260VH*[75]*	QOB360VH*[75]*
70 A	QOB170VH	QOB270VH*[75]*	QOB370VH*[75]*
80 A	—	QOB280VH*[75]*	QOB380VH*[75]*
90 A	—	QOB290VH*[75]*	QOB390VH*[75]*
100 A	—	QOB2100VH*[75]*	QOB3100VH*[75]*
110 A	—	QOB2110VH*[75]*	QOB3110VH *[76]*
125 A	—	QOB2125VH*[75]*	QOB3125VH *[76]*
150 A	—	QOB2150VH *[76]*	QOB3150VH *[76]*
QHB			
	120 Vac—65 k AIR*[72]*	120 Vac/240 Vac—65 k AIR *[72]*	240 Vac—65 k AIR*[72]*
15 A	QHB115 *[74]*	QHB215*[75]*	QHB315*[75]*
20 A	QHB120 *[74]*	QHB220*[75]*	QHB320*[75]*
25 A	QHB125*[75]*	QHB225*[75]*	QHB325*[75]*
30 A	QHB130*[75]*	QHB230*[75]*	QHB330*[75]*
QOB-HID—**HID circuit breakers** *[77]*			
	120 Vac—10 k AIR*[72]*	120/240 Vac—10 k AIR*[72]*	240 Vac—10 k AIR*[72]*
15 A	QOB115HID *[74]*	QOB215HID	QOB315HID
20 A	QOB120HID *[74]*	QOB220HID	QOB320HID
25 A	QOB125HID	QOB225HID	QOB325HID
30 A	QOB130HID	QOB230HID	QOB330HID
40 A	QOB140HID	QOB240HID	—
50 A	QOB150HID	QOB250HID	—
QOB-SWN—**Switch Neutral—Common Trip—NEC 514.11**			
		1-pole—2-Wire 2 Spaces —120 Vac*[72]*	2-pole—3-Wire 3 Spaces—120/240 Vac*[72]*
10 A	—	QOB210SWN	QOB310SWN
15 A	—	QOB215SWN	QOB315SWN
20 A	—	QOB220SWN	QOB320SWN
25 A	—	QOB225SWN	QOB325SWN
30 A	—	QOB230SWN	QOB330SWN
40 A	—	QOB240SWN	QOB340SWN
50 A	—	QOB250SWN	QOB350SWN

[70] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–60 A circuit breakers are suitable for use with 75°C conductors.
[71] UL Listed 5,000 AIR on 3Ø corner grounded delta systems.
[72] May be applied in 208Y/120 Vac systems.
[73] DC Rating is not available on indicated products.
[74] UL Listed as SWD (switching duty) rated suitable for switching 120 Vac fluorescent lighting loads.
[75] UL Listed as HACR type for use with air conditioning, heating, and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[76] QOB2150VH uses 4 pole spaces. QOB3110VH, QOB3125VH, and QOB3150VH each use 6 pole spaces. 40A maximum circuit breaker mounted opposite. Use with 75 °C wire only.
[77] UL Listed for use on circuit feeding fluorescent and High Intensity Discharge (HID) lighting systems such as mercury vapor, metal halide, or high pressure sodium. These circuit breakers are physically interchangeable with QOB circuit breakers.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.11: QO/QOB Circuit Breaker Wire Sizes

Breaker Type	Ampere Rating	Wire Size (AWG or kcmil)	
		Al	Cu
QOB 1-pole	10–30 A	#14–8	#14–8
	10–30 A	—	two #14–10
	35–70 A	#8–2	#8–2
QOB 2-pole	10–30 A	#14–8	#14–8
	10–30 A	—	two #14–10
	35–70 A	#8–2	#8–2
	80–125 A	#4–2/0	#4–2/0
	150–200 A	#4–300	#4–300
QOB 3-pole	10–30 A	#14–8	#14–8
	35–70 A	#8–2	#8–2
	80–125 A	#4–2/0	#4–2/0
QOB-VH	110–150 A	#4–300	#4–300
QOB-GFI and QOB-EPD	15–30 A	#12–8	#14–8
	40, 50, or 60 A	#12–4	#14–6

Table 9.12: QO™ Arc-Fault and Dual Function Circuit Breakers *[78][79][80]*

Circuit Breaker Type	Ampere Rating *[80]*	1P 120 Vac 10 kAIR 1 Space Required	1P 120 Vac 22 kAIR 1 Space Required	2P 240 Vac 10 kAIR 2 Space Required	2P 240 Vac 22 kAIR 2 Space Required
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
Combination Arc-Fault Interupter	15 A	QOB115CAFI	QOB115VHCAFI	QOB215CAFI	QOB215VHCAFI
	20 A	QOB120CAFI	QOB120VHCAFI	QOB220CAFI	QOB220VHCAFI
Dual Function: Arc-Fault and Ground Fault	15 A	QOB115DF	QOB115VHDF	Use plug-on QO 2–pole dual function MCBs	
	20 A	QOB120DF	QOB120VHDF		

NOTE: For accessories, see Accessories for QO/QOB Circuit Breakers, in Section 7.

Single Phase 400 or 600 A NQ Panelboards now accept 150, 175, and 200 A Two Pole QO Plug-on Branch Circuit Breakers.

Each breaker takes four pole spaces. Installation into three phase interiors is not allowed as it may create a phase to phase short circuit.

One NQ200AN neutral lug kit should be installed for each pair of 175 or 200 A QO breakers if a neutral termination is required.

- One Q1150AN lug kit should be installed for each 110 to 150 A QO(B) circuit breaker, if a neutral termination is required.

–

Table 9.13: High Ampacity Plug-on Two Pole QO Branch Circuit Breakers

Catalog Number	Ampere Rating	AIC Rating
QO2150	150	10 kA
QO2150VH	150	22 kA
QO2175	175	10 kA
QO2200	200	
QO2175VH	175	22 kA
QO2200VH	200	

NOTE: May only be installed on Single Phase 400 or 600 A NQ Panelboards with three point latch trim fronts.

A maximum of four 150, 175, or 200 A QO (VH) plug-on branch circuit breakers may be installed in NEMA 1 enclosures. These enclosures require NCxxV( )3P three point latch trim fronts, as listed in Table 9.3 Main Lug Interiors, page 9-7 or Table 9.4 Main Circuit Breaker Interiors, page 9-8.

One 150, 175, or 200 A QO (VH) plug-on branch circuit breaker may be installed in 8.75 in. deep MHxxD9VWP NEMA 3R enclosures, as listed in Table 9.3 Main Lug Interiors, page 9-7 or Table 9.4 Main Circuit Breaker Interiors, page 9-8.

[78] UL Listed as HACR type for use with air conditioning, heating, and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.
[79] QO arc-fault circuit breakers provide branch feeder protection (for example, QO115AFI) or combination protection (for example, QO115CAFI) as required by the NEC and local code adoption, and comply with UL 1699.
[80] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–60 A circuit breakers are suitable for use with 75°C conductors.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Factory Assembled Main Circuit Breakers

400 A and 600 A panelboards, 1Ø or 3Ø

Table 9.14: NQ Panelboard Factory Assembled Interiors - 240 Vac / 48 Vdc Max

Single Phase or Three Phase						
Mains Rating (Amps)			Max. Number of One-Pole Circuit Breakers	Bus Material	Min. Box Depth	
Main Lugs Only	Main Circuit Breaker*[81]*	Main Switch *[81]*			Main Lugs Only	Main Circuit Breaker / Switch
100 Max	15–100	70–100	18, 30	Al, Cu	5.75 in.	5.75 in.
225 Max	15–250	110–250	30, 42, 54, 72, 84	Al, Cu	5.75 in.	5.75 in.
400 Max	125–400	300–400	30, 42, 54, 72*[82]*, 84*[83]*	Al, Cu	5.75 in.	5.75 in. / 8.75 in. *[84]*
600 Max	125–600	450–600	30, 42, 54, 72*[82]*, 84	Cu	5.75 in.	8.75 in.*[84]*

Table 9.15: Main Circuit Breaker (PowerPacT L-frame - see PowerPacT Interrupting Ratings, and Common Catalog Numbering System, in Section 7)

Number of Poles	Trip Unit Options	Frame Sizes	Ampacity
3	LI, LSI, Switch	LG, LJ, LL	125–600 A

LA/LH PowerPacT H, J, and Q-frame circuit breakers are also available - see and and Supplemental Digest Section 3.

Table 9.16: PowerPacT L Main Circuit Breaker Cabinet Height (inches)

Max. No. of Branch Spaces (Does not include sub-feed circuit breaker spaces)	NEMA 1 Enclosure (20 in. W x 8.75 in. D)*[84]*	Vented NEMA 3R Enclosure (26 in. W x 8.75 in. D)*[85]*	
	400 or 600 A	400 A	600 A
30	62	62	68
42	68	68	74
54	74	74	80
72	80	–	–
84	86	–	–

Sub-feed Circuit Breakers

Main lugs or main circuit breaker interior—1Ø or 3Ø. Maximum 1 circuit breaker per 225 A main lug or 250 A main circuit breaker panelboard, 2 PowerPacT H-, J-, or Q-frame sub-feed circuit breakers may be installed on a 400–600 A panelboard.

Panelboards in MHxxWP NEMA Type 3R/5/12 enclosures are limited to one 150 A maximum sub-feed breaker.

- Panelboards in vented MHxxD9VWP NEMA 3R enclosures may have two 225 A maximum sub-feed circuit breakers. A single 600 A maximum sub-feed circuit breaker may be factory installed in these new enclosures.

Table 9.17: Sub-feed Circuit Breakers for NQ Panelboards*[86]*

Interior Rating	Sub Feed Circuit Breakers*[86]*			Space Factor
	Ampacity	Poles	MCCB Frame	
225 A	70–225	2 or 3	QB, QD, QG, QJ	18 in.
	110–150	2 or 3	HD, HG, HJ, HL, HR*[87]*	
	150–225	2 or 3	JD, JG, JJ, JL, JR*[88]*	
400 A / 600 A	70–225	2 or 3	QB, QD, QG, QJ*[89]*	24 in.
	110–150	2 or 3	HD, HG, HJ, HL, HR*[87]*, *[89]*	
	150–225	2 or 3	JD, JG, JJ, JL, JR*[88]*, *[89]*	
	125–400	2 or 3	LA / LH	18 in.*[90]*
	125–600	3	LG, LJ, LL	18 in.*[91]*
PowerPacT H, J, & L frame circuit breakers are also available - see Tables PowerPacT Interrupting Ratings, and Common Catalog Numbering System, Section 7.				

[81] Factory Assembled Interiors are rated for trip current of Main Breaker / Switch.
[82] Three Phase only.
[83] Copper only.
[84] D9 8.75 in. deep enclosures are required for PowerPacT L Main Circuit Breaker, Switch, or Sub-Feed Circuit Breaker. Reference PBA713x drawing for more dimensional information, where x may be A, HR, HRT, or T depending upon the choice of options and enclosure.
[85] Feed-thru lugs and compression lugs available factory assembled only. These add 6 - 12 inches to enclosure length. Please reference PBA755 or PBA755T for more complete dimensional information, where x may be A, HR, HRT, or T depending upon the choice of options and enclosure.
[86] See Digest Section 7 for Interrupting Ratings and Catalog Numbers of PowerPacT H-, J-, L-, Q- and LA/LH frame MCCBs.
[87] Three pole HD, HG, HR MCCBs are installed for single phase sub-feed circuit breaker applications.
[88] Three pole JR MCCBs are installed for single phase sub-feed circuit breaker applications.
[89] One or two sub-feed circuit breakers may be selected.
[90] NQ Panelboards with LA or LH sub-feed circuit breaker and LG, LJ, or LL main circuit breaker are supplied with 26 in. wide, 8.75 in. deep enclosures and have Condo Riser neutral assemblies.
[91] Space Factor for LG, LJ, or LL is 24 in. when it is installed onto a main circuit breaker panelboard or a main lugs panelboard with a Condo Riser neutral assembly. These panelboards are supplied with 26 in. wide, 8.75 in. deep enclosures and have Condo Riser neutral assemblies.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.18: PowerPacT H, J, or Q-frame Sub-feed Circuit Breaker Cabinet Height (inches)*[92]*

Max. No. of Branch Circuit Spaces (not including sub-feed circuit breaker)	Mains Type and Maximum Current Rating				
	225 A Main Lugs*[93]*	250 A Main Circuit Breaker*[94]*	400 / 600 A Main Lugs *[95]*	400 A LA/LH Main Circuit Breaker*[96]*	400 / 600 A LG/LJ/LL Main Circuit Breaker*[97]*
30	50	62	74	86	86
42	56	68	74	86	86
54	62	74	80	92	–
72	68	80	86	–	–
84	74	86	92	–	–

Table 9.19: PowerPacT LG, LJ, or LL Sub-feed Circuit Breaker Cabinet Height (inches)*[98]*

Max. No. of Branch Spaces (Does not include sub-feed circuit breaker spaces)	NEMA 1 D9 Enclosure (8.75-in. D)*[99]*			Vented NEMA 3R Enclosure Height (26-in. W x 8.75-in. D)			
	20-in. Wide		26-in. Wide	Main Lugs	Main Circuit Breaker*[99]*		
	Main Lugs	LA / LH Main Circuit Breaker	LG / LJ / LL*[99]* Main Breaker		LA / LH	400A PP-L	600A PP-L
30	68	80	80	74	74	86	92
42	68	80	86	74	80	86	92
54	74	86	92	80	86	92	—
72	80	92	—	—	—	—	—
84	86	—	—	—	—	—	—

Table 9.20: Weather and Dust Resistant Enclosures—Type 3R, 4, 4X, 5, 12

Weatherproof or Dusttight Cabinets

NOTE: NQ panelboards with PowerPacT L circuit breakers are not available with a NEMA Type 4, 4X, 5, or 12 enclosure. (Use I-Line).

NQ panelboards with PowerPacT L circuit breakers are available with vented 26 in. wide NEMA 3R enclosures. These vented NEMA 3R enclosures also enable selection of subfeed circuit breakers up to 600 A.

400 A maximum NQ panelboards in NEMA 4, 4X, 5, or 12 enclosures are available with one subfeed breaker up to 150 A.



NQ MLO Panelboard in Vented NEMA 3R enclosure with 600 A Sub-Feed Circuit Breaker

Table 9.21: Optional Factory Assembled Lugs for Main Lugs Only and Main Circuit Breaker Interiors

Incoming Lug Type:
Aluminum Compression Lugs
Copper Mechanical Lugs
Copper Compression Lugs

NOTE: Optional lugs are not available for Q frame main or QOB circuit breakers.

Sub-feed Lugs

NOTE: Available on main lug interiors only, 1Ø or 3Ø.

Table 9.22: Sub-feed Lug Wire Range Per Phase (AWG or kcmil)

Mains Rating	Incoming	Outgoing
100	one #6-2/0 Al or Cu	one #6-2/0 Al or Cu
225	one 1/0-350 kcmil Al or Cu	one 1/0-350 kcmil Al or Cu
400	one 1/0-750 kcmil Cu only	one 1/0-750 kcmil Cu only

Table 9.23: Sub-feed Lug Cabinet Data

Max. No. of Branch Spaces	Box Height (20 in. W x 5.75 in. D)		
	100 A	225 A	400 A
18	MH26	—	—
30	MH32	MH38	MH50
42	—	MH44	MH50
54	—	MH44	MH50
72	—	MH50	MH62
84	—	MH56	MH68

[92] Bottom feed only in NEMA Type 3R enclosures. NEMA 3R applications with sub-feed circuit breakers greater than 150A require 8.75 in. deep, 26 in. wide enclosure - reference PBA603WP.
[93] Reference PBA701x drawing for more dimensional information. PBA701x - x may be A, E, HR, HRT, or T, depending upon choice of options and trim front.
[94] Reference PBA707x drawing for more dimensional information. PBA707x - x may be A, E, HR, HRT, or T, depending upon choice of options and trim front.
[95] Reference PBA709x drawing for more dimensional information. Bottom feed only in NEMA Type 3R enclosures. NEMA 3R applications with sub-feed circuit breakers greater than 150A require 8.75 in. deep, 26 in. wide enclosure - reference PBA603WP. PBA709x - x may be A, E, HR, HRT, or T, depending upon choice of options and trim front.
[96] Reference PBA710x drawing for more dimensional information. Bottom feed only in NEMA Type 3R enclosures. NEMA 3R applications with sub-feed circuit breakers greater than 150 A require 8.75 in. deep, 26 in. wide enclosure - reference PBA603WP. PBA710x - x may be A, E, HR, HRT, or T depending upon choices of options and trim front.
[97] LG, LJ, or LL Main Circuit Breaker requires D9 8.75 in. enclosure. Reference PBA713x or PBA755x drawing for more dimensional information. PBA###x - x may be A, E, HR, HRT, or T, depending upon choice of options and enclosure.
[98] Feed-thru lugs and compression lugs available factory assembled only. These add 6 - 12 inches to enclosure length.
[99] NQ Panelboards with PowerPacT L Main Circuit Breaker and PowerPacT L Sub-Feed Circuit Breaker are supplied with Condo Riser Neutral Assemblies, and require 26 in. wide, 8.75 in. deep enclosures.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Feed-through Lugs

Table 9.24: Feed-through Lugs

Mains Rating	Feed-Through Wire Range Per Phase (AWG or kcmil)
100 A	one #6-2/0 Al or Cu
225 A	one #6–350 Al or Cu
400 A	one 1/0–750 or two 1/0–350 Al or Cu
600 A	two 1/0–750 Al or Cu

Table 9.25: Feed-through Lugs Cabinet Data

Max. No. of Branch Spaces	Box Height (20 in. W x 5.75 in. D)					
	225 A	250 A	400 A		600 A	
	Main Lugs	Main Circuit Breaker	Main Lugs	Main Circuit Breaker	Main Lugs	Main Circuit Breaker *[100]*
30	38	50	50	62	62	68
42	38	50	56	68	62	80
72	50	62	68	80	74	—
84	56	68	68	80	80	—

Table 9.26: Name Plates

Name Plates
Standard white face/black letter laminated bakelite, 1 in. x 3.5 in., adhesive backed or screw mountable with screws in a bag assembly

Table 9.27: Copper Bus Bars

Copper Bus Bars
100 A, 225 A, 250 A
400 A
600 A

Table 9.28: NQ Panelboard Neutral Assembly Options

Interior Rating	Without Sub-Feed or Thru-Feed Lugs				With Sub-Feed or Thru-Feed Lugs			
	100% Neutrals		200% Neutrals		100% Neutrals		200% Neutrals	
	Aluminum	Copper	Aluminum	Copper	Aluminum	Copper	Aluminum	Copper
100 A	Standard	NQN1CU	NQNL1	Factory Assembled Only	Standard	NQN1CU	NQNL1	Factory Assembled Only
225 A		NQN2CU	NQNL2			NQN2CU	NQNL2ACCY	
400 A		NQN6CU	NQNL4			NQN6CU	FA Only*[101]*	
600 A*[102]*			Not Available	Not Available			Not Available	Not Available

Table 9.29: NQ Main 100% and 200% Rated Neutral Conductors—(Quantity) and Wire Size (Mechanical Lugs & Compression Lugs)*[103]*

Interior Rating	Lug Material	Mechanical Neutral Line Lugs						Compression Neutral Line Lugs	
		100% Rated			200% Rated*[104]*			100% Rated	200% Rated*[104]*
		Standard Neutral Assemblies	Oversized Neutral Assemblies		Standard Neutral Assemblies	Oversized Neutral Assemblies			
		Lug Wire Range	Lug Wire Range	Space Factor	Lug Wire Range	Lug Wire Range	Space Factor	Lug Wire Range	Lug Wire Range
100 A	Al	(1) #6-2/0	select 225 A neutral assembly	N/A	(2) #6-2/0	select 225 A neutral assembly	N/A	(1) #6-2/0	(1) #6-2/0
	Cu								
225 A	Al	(1) #6-300 kcmil *[105]*	select 400 A neutral assembly	N/A	(2) #6-350 kcmil	select 400 A neutral assembly	N/A	(1) #4-300 kcmil	(2) #1/0-300
	Cu	(1) #6-250 kcmil			(2) #6-250 kcmil			(1) #2/0-300 kcmil	(2) #2/0-300 kcmil
400 A	Al	(2) 1/0-300 kcmil or (1) 1/0-700 kcmil *[106]*	(2) 1/0-750 kcmil or (4) 1/0-300 kcmil	6	(4) 1/0-300 kcmil or (2) 1/0-700 kcmil *[106]*	(4) 1/0-750 kcmil or (8) 1/0-300 kcmil	6	(2) 2/0-500 kcmil	(4) 2/0-500 kcmil
	Cu							(2) 400-750 kcmil	(2) 400-750 kcmil
600 A	Al	(4) 1/0-300 kcmil or (2) 1/0-700 kcmil *[106]*	(4) 1/0-700 kcmil *[106]* or (8) 1/0-300 kcmil	6	N/A	N/A	N/A	(2) 2/0-500 kcmil	N/A
	Cu								
600 A (with NQALMN6 or NQCUMN6)	Al	N/A	(6) 1/0-750 kcmil or (4) 1/0-300 kcmil and (4) 1/0-750 kcmil	12	N/A	N/A	N/A	N/A	N/A
	Cu								

NOTE: Implicit AWG (American Wire Gauge) abbreviation on conductors wire range (kcmil is shown).
Gutter extensions may be required to provide NEC wire bending space for cable(s) of maximum lug size.



600 A NQ Main Breaker Panelboard with Condo Riser Neutral Assembly

Table 9.30: NQ Panelboard Condo Riser Neutral Panelboards (Requires 26 in. Wide Enclosure)*[107]*

Interior Rating	Maximum Branch Circuits	Neutral Rating	Neutral Assembly	Mains Options			Load End Options		Minimum Enclosure Depth	Space Factor (inches) *[108]*
				Main Lugs	Main Circuit Breaker	Sub-Feed Lugs	Feed-Thru Lugs	Sub-Feed Breaker		
400 / 600 A	42	100%	NQN6CRUS	Y	LA / LH	N/A	Y	H, J, Q, LA/LH	5.75-in.	12
		200%	NQNL6CRUS							
	72*[109]*	100%	NFN6CR	Y	LA, LG, LH, LJ, LL	Y	Y	Y	8.75-in.	0–12
		200%	NFNL6CR							

[100] 8.75 in. deep box, ship fully assembled only.
[101] FA - Factory Assembled Panelboards
[102] 600 A main circuit breaker panelboards with PowerPacT L sub-feed circuit breakers are supplied with Condo Riser Neutral Assemblies and require 26 in. wide, 8.75 in. deep enclosures.
[103] Lug Wire Ranges shown meet NEC wire bending space. Lugs may accept larger cables if enclosure size is increased.
[104] 200% Neutrals not available on Column Width interiors.
[105] Installation of 350 kcmil netural conductors possible is enclosure is extended to increase wire bending space.
[106] Installation of 750 kcmil neutral conductors possible if enclosure is extended to increase wire bending space.
[107] Select 26 in. Wide Condo Riser Panel under Structure Options in the SE Advantage Panelboard Product Selector.
[108] Space factor is the additional enclosure length required for selected option. Additional required length may be reduced or eliminated if load end options like feed-thru lugs or sub-feed circuit breakers require a space factor of at least 12 inches.
[109] May be used with a 84 circuit interior when a SurgeLoc SPD is installed. No more than 72 branch circuit breaker poles may be installed.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.31: Metal Directory Frames

Metal Directory Frame
Replaces standard plastic stick-on directory pouch, add "WMD" suffix to NC Trim catalog number.

Table 9.32: NQ Equipment Ground Bar Kits[110]

Interior Rating	Aluminum	Copper	Ground Bar Insulator Kit
100 A / 225 A	PK12GTA, PK18GTA, PK23GTA, or PK27GTA	PK27GTACU	PKGTAB
400 A / 600 A	PK12GTA, PK27GTA	PK27GTACU	PKGTAB

Table 9.33: Hinged Door-in-Door Trim Fronts

Hinged Door-in-Door Trim Front
Hinged Door-in-Door Trim Front has piano hinge down one side. Inner door has a lock, outer door is retained with screws
Hinged Door-in-Door Trim Fronts with Outer Door Lock in place of screws are available as a factory assembled option.

NQ with Surge Protective Devices

Table 9.34: Surgelogic™ SurgeLoc Plug-On SPD[111]

Surge Current Rating kA
80 kA
100 kA
120 kA
160 kA
200 kA
240 kA

Table 9.35: Surgelogic SPD Features

Description
Surge Counter
Dry Contacts
Remote Monitor

NOTE: Additional factory modifications, see Modifications For Factory Assembled Panelboards, page 9-63.

[110] One PK kit supplied when ground bar is specified. Two PK kits supplied when "extra" ground bar is ordered.
[111] Please reference publication 998-21173700_GMA-USfor additional information.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

NQ Merchandised Accessories

Table 9.36: NQ Merchandised Neutral Assemblies

Mains Rating (Amps)	200% Neutral Kit		Copper 100% Neutral Kit	
	Catalog No.	Space Factor	Catalog No.	Space Factor
100	NQNL1	0	NQN1CU	0
225	NQNL2	0	NQN2CU	0
225	NQNL2ACCY*[112]*	6		
400	NQNL4*[113]*	0	NQN6CU	0
600	–	0		

Table 9.37: NQ Merchandised Sub-feed Lugs, Feed-through Lugs, and Sub-feed Breaker Kits

Mains Rating	Sub-feed Lugs Catalog Number	Feed-through Lugs Catalog Number	Sub-feed Circuit Breaker Kits (breaker not incl.)	
			Single SFB	Two SFBs
100 A	NQSFL1	100 A not available; use 225 A interior	—	—
225 A	NQSFL2	NQFTL2L*[114]*	NQSFB2Q or NQSFB2HJ*[115]*	—
		NQFTL2H*[116]*		
400 A	NQSFL4	NQFTL4L*[114]*	NQSFB4Q or NQSFB4HJ or NQMB6PPL*[117][115]*	NQSFB4Q or NQSFB4HJ
		NQFTL4H*[116]*		
600 A	Not Available	Factory Assembled Only	NQSFB6PPL*[117]* or NQMB6PPL	Factory Assembled Only

NOTE: See Table 9.38 and Table 9.39.

Table 9.38: Box Selection Table: Merchandised NQ Main Lug Panelboards with Accessories

Feature Circuits	Sub-feed Lugs				Feed-through Lugs				Sub-feed Circuit Breakers				
	100 A	225 A	400 A	600 A	100 A	225 A	400 A	600 A	100 A	225 A (one)	400 A (two)	400 A / 600 A (one)	600 A (two)
18	MH26	—	—	Factory Assembled Only	—	—	—	Factory Asssembled Only	—	—	—	—	Factory Asssembled Only
30	MH32	MH38	MH50		Use 225 A Interior	MH38	MH50		—	MH50	MH74	MH62D9	
42	—	MH44	MH50			MH38	MH56		—	MH56	MH74	MH62D9	
54	—	MH44	MH56			MH44	MH62		—	MH56	MH80	MH68D9	
72	—	MH50	MH62			MH50	MH68		—	MH62	MH86	—	
84	—	MH56	MH68			MH56	MH68		—	MH68	MH92	—	

Table 9.39: Box Selection Table: Merchandised NQ Vertically Mounted Main Breaker Panelboards w/ Accessories (by Mains Rating)

Feature Circuits	Feed-through Lugs					PowerPacT H, J, or Q Sub-feed Circuit Breakers (Max Amp and Qty)				
	100 A	225 A	400 A		600 A	100 A	225 A (one)	400 A (two SFB)		600 A (two SFB)
			LA / LH MB	PowerPacT L MB				LA / LH MB	PowerPacT L MB	
18	—	—	—	—	—	—	—	—	—	—
30	—	MH50	MH62	MH68D9	Factory Asssembled Only	—	MH62	MH86	MH86D9	Factory Asssembled Only
42	—		MH68			—	MH68			
54	—	MH56	MH74	MH74D9		—		MH92	—	
72	—	MH62	MH80	MH80D9		—	MH74	*[118]*	—	
84	—	MH68	MH80	MH86D9		—	MH80	*[118]*	—	

Table 9.40: NQ Optional Lugs

Ampacity	Al Compression Lug Kit		Cu Mechanical Lug Kit		Cu Compression Kit	
	Catalog No.	Lug Wire Range (AWG-kcmil)	Catalog No.	Lug Wire Range (AWG-kcmil)	Catalog No.	Lug Wire Range (AWG-kcmil)
100	NQALV1	one #8–1/0	NQCUM1	one #6–2/0	NQCUV1	one #6–1/0
225	NQALV2	one #4–300	NQCUM2	one #6–250	NQCUV2	one 2/0–300
400	NQALV4	two 2/0–500	NQCUM4	one 1/0–750 or two 1/0–350	NQCUV4	one 400–700
600	NQALV6	two 2/0–500	NQCUM6		NQCUV6	two 250–500

Neutral Terminations in NQ Panelboards*[119]*					Add-on Neutral Lug Capacity in Merchandised NQ Panelboards*[120]*			
Panelboard Interior Ampacity	Branch Circuit Pole Spaces	Branch Circuit Terminals Provided in Neutral Assembly (AWG or kcmil)			NQ100AN*[121]*	Q1150AN*[122]*	NQ200AN*[123]*	Catalog Number
					#14 - 2/0	#1 - 4/0	#4 - 300 kcmil	Lug Wire Range (AWG or kcmil)
					2	3	2	#14 Neutral Terminations Required*[124]*
		#14 - #4	#14 - #6	#14 - 2/0	70 - 110 A	110 - 150 A	150 - 200 A	Max. Circuit Breaker Amps
100 A or 225 A	18	20	–	–	4	3	–	
	30	34	–	–	5	5	–	
	42	42	–	–	5	5	–	
	54	60	–	–	5	3	–	
	72	90	–	–	5	3	–	
	84	90	–	–	5	3	–	
400 A or 600 A	30	16	22	4	4	2	2	
	42	23	22	4	7	3	2	
	54	45	11	2	5	3	2	
	72	60	22	4	8	3	2	
	84	60	22	4	0	3	2	

[112] For 225 A panel with SFL, FTL, or SFB.
[113] Not to be used with SFL, FTL, or SFB. These combinations are factory assembled only.
[114] The final character L indicates the kit is used for Low circuit count interiors 30 and 42.
[115] 3-pole HD, HG or HR sub-feed circuit breaker should be selected for single phase 110–150 A applications.
[116] The final character H indicates the kit is used for High circuit count interiors 54, 72, and 84.
[117] PowerPacT L Circuit Breakers require 8.75 in. deep enclosures.
[118] Requires box longer than available box offer.
[119] Quantity of terminations is the same for copper and aluminum neutral assemblies.
[120] Allowances shown are for installation of only one type of add-on neutral lug type. When mixing add-on neutral lug types in a panelboard: 1) the total quantity may not exceed the maximum shown in that row of the table. 2) the capacity for NQ100AN is reduced by twice the quantity of NQ200AN and Q1150AN installed.
[121] Each 1 pole 70 A QO(B)170(VH) installed reduces maximum add-on lug quantity by two. A QO70AN may be used in place of an NQ100AN to create a neutral termination for a 70 A QO(B)-(VH) circuit breaker.
[122] Not allowed in 100 A NQ panelboards.
[123] One NQ200AN is required provide neutral termination for every two 175 - 200 A QO (VH) circuit breakers.
[124] Number of Terminations Required to Install Add-on Lug to NQ Neutral assembly. Lugs may block 1-4 additonal terminations depending upon where each is installed.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.41: NQ Accessories

Description	Catalog No.
Sub-feed Lug (Bolt-on)	
2-pole QOB Branch Mounted Sub-feed Lug Kit	QOB2125SL
3-pole QOB Branch Mounted Sub-feed Lug Kit	QOB3125SL
Equipment Ground Bars (Lug and terminal sizes shown are AWG)	
Aluminum (#6 to 2/0 Cu or Al lug , #14–#4 Cu or #12–#4 Al terminals)	PK27GTA
PK23GTA+ #1 to #4/0 Al or Cu lug	PK23GTAL
Copper (#14 to #1 Cu lug, #14-#4 Cu terminals)	PK27GTACU
Ground Bar Insulator Kit	PKGTAB
Aluminum (twenty seven terminations #14 to #4 AWG)	PK27GTA
PK23GTA+ #1 to #4/0 AWG Al or Cu lug	PK23GTAL
Copper (twenty seven terminations #14 to #4 AWG)	PK27GTACU
Ground Bar Insulator Kit	PKGTAB
Circuit I.D. Number Strips	
1–102 odd/even (left side numbered 1,3,5 ...101)	NQ102OE
103–204 odd/even (left side numbered 103,105,107 ... 203)	NQ204OE
1–102 sequential (left side numbered 1,2,3 ... 102)	NQ102S
103–204 sequential (left side numbered 103,104,105 ... 204)	NQ204S
Rail and Deadfront Extensions	
6 in. Extension	NQ6RDE
12 in. Extension	NQ12RDE
18 in. Extension	NQ18RDE
24 in. Extension	NQ24RDE
Handle Attachments—Branch Circuit Breakers	
Handle lock-off	HLO1
Handle tie - (QO and QOB only)	QO1HT
Handle padlock attachment—1-pole	QO1PA
2- and 3-pole	QO1PL
Handle tie and lock-off for three 1-pole (QO, QOB)	QO3HT
Handle tie for two 10–30 A single pole QO(B) circuit breaker	QOHT2
Handle tie for three 10–30 A single pole QO(B) circuit breaker	QOHT3
Handle Padlock Attachment for Padlocking in OFF position	
For padlocking 1P QO circuit breaker in OFF position only, fixed attachment	QO1PAF
For padlocking 2P and 3P QO circuit breaker in OFF position only, fixed attachment	QO2PAF
For padlocking 1P QO-GFI, QO-AFI, QO-CAFI, and QO-EPD circuit breakers in OFF position only, fixed attachment	QOADV1PAF
For padlocking 2P QO-GFI and QO-EPD circuit breakers in OFF position only, fixed attachment	QOGFI2PAF
Neutral or Ground Lugs (Lug sizes shown are AWG)	
#10 to #2 Al or #14 to #4 Cu	QO70AN
#14 to 2/0 Al or Cu	NQ100AN
#1 to #4/0 Al or Cu	Q1150AN
(2) #4 AWG to 300 kcmil Al or Cu	NQ200AN
Endwalls for MH Enclosures	
Blank (one per package)	MHBE20
With Knockouts (one per package)	MHKE20
NF NQ Rectangular Cutout Endwall Kit for 20 in. wide NEMA 1 Encl.	MHCO20
Blank 26 in. wide (one per package)	MHBE26
Replacement Part Kits	
NQ & NF Tackle Box Spare Parts Kit	TBPANEL
Other Accessories	
Filler plates (15 per package)	NQFP15



NQ MB Panelboard with SurgeLoc SPD installed

Table 9.42: NQ SurgeLogic SurgeLoc Plug-on SPD *[125][126]*

Voltage	Surge Current Rating	Part Number
120 / 240 V	80 kA	SSP01SBA08D
	100 kA	SSP01SBA10D
	120 kA	SSP01SBA12D
	160 kA	SSP01SBA16D
	200 kA	SSP01SBA20D
	240 kA	SSP01SBA24D
208 Y / 120 V	80 kA	SSP02SBA08D
	100 kA	SSP02SBA10D
	120 kA	SSP02SBA12D
	160 kA	SSP02SBA16D
	200 kA	SSP02SBA20D
	240 kA	SSP02SBA24D
240 / 120 Vac High Leg Delta	240 kA	SSP03SBA24D

[125] Please reference publication 998-21173700_GMA-US for additional information.
[126] 96 space interiors are available factory assembled when SurgeLoc SPDs are to be installed in 84 circuit NQ panelboards.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Factory-installed IP2X barriers for NQ Panelboards reduce the risk of accidental contact with energized components if a cover is removed.

Features


- Plastic barriers cover Mains (lugs or circuit breaker), copper bus, and branch circuit breakers
  - IP2X per IEC 60529 on all ungrounded parts
- 240 Vac maximum
- Three phase (Wye and Delta)
  NEMA 1, 2, 3R, 4/4X, 5, or 12 (up to 225 A)
  - NEMA 1 panelboards up to 400 A
- Branch circuits up to 100 A: 1-, 2-, and 3-pole
- Selectively coordinated up to 30k AIC
- Available with main lugs, or PowerPacT Q-, H-, J-frame, and LA/LH main circuit breakers
- Series rated up to 200 kAIC with integral main circuit breaker—fully rated up to 65 kAIC
- Sub feed lugs up to 225 A
- cULus Listed to UL 67 and CSA C22.2, No. 29

New Enhanced IP2X design meets IEC 60529*[127]* with or without a branch circuit breaker installed.

- Unique jaw kit allows QOB branch circuit breakers to plug onto NQ interior with IP2X barriers

Two factory-assembled constructions (refer to Data Bulletin 1640BR1701 for additional information):

Standard IP2X per IEC 60529
(Bus Finger Covers Empty Spaces)

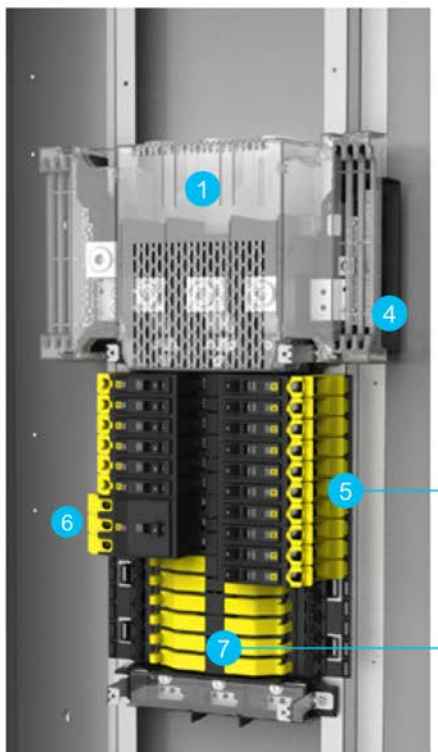

1 Main Lug Cover
2 Main Breaker Line Side Cover
3 Main Breaker Load Side Cover
4 Neutral Cover
5 Low Amp QO(B) Cover
6 High Amp QO(B) Cover
7 Bus Finger Cover

Enhanced IP2X per IEC 6052
(Bus Covered Without Branch Circuit Breaker)



[127] International Electrotechnical Commission (IEC)
a. IEC 60529: 1989+AMD1:1999+AMD2:2013 CSV Consolidated version.- Degrees of Protection Provided by Enclosures (IP Code)

© 2026 Schneider Electric
All Rights Reserved
4/10/2026







Specifications

NQ Fingersafe Bus Ratings, Enclosures, and Circuit Counts								
IP2X Design	Mains rating	Enclo-sures: NEMA types	Circuit Count					
			18	30	42	54	72	84
Standard	100	1, 2, 3R, 4/4X, 5, 12	X	X	—	—	—	—
	225		—	X	X	X	X	X
	400	1	—	X	X	—	X	X
Enhanced	225	1, 2, 3R, 4/4X, 5, 12	—	—	X	—	—	—
	400	1	—	—	X	—	—	X

QO(B) Branch Circuit Breaker Ratings*[128]*				
Branch Circuit Breaker	Amperes	1–Pole	2–Pole	3–Pole
QO / QOB	10–60	L	L	L
	70	L	L	H
	80–100	—	H	H
QO-H / QOB-H	15–30	—	L	—
	40–100	—	H	—
QO-HID / QOB-HID	15–30	L	L	L
	40–50	L	L	—
QO-HM / QOB-HM	15–20	L	—	—
QO- VH / QOB-VH	15–30	—	L	L
	15–70	L	—	—
	40–100	—	H	H
QOH*[129]*	40–100	—	H	—
QHB*[129]*	15–30	L	L	—
IP2X QO(B) Lug Covers:	**L** (Low Amp) - **QOFSLALB** **H** (High Amp) - **QOFSHALB**			

Panelboards intended for use as service equipment, require a barrier over live field connected load terminals. Please select the appropriate barrier from the table below, based upon the main circuit breaker.

Table 9.43: Line Side Barrier and Neutral Bonding Strap Kits

Catalog Number	Contents		Description
	Line Lug Cover	Neutral Bonding Strap	
NQLALLC			NQ LA/LH Line Lug Cover and Neutral Bonding Strop and Lug
NQHJQLLC			NQ H/J/Q Line Lug Cover and Neutral Bonding Strap
NQPPLLLC			PowerPacT™ L Line Lug Cover and Neutral Bonding Strap and Lug

[128] QOB circuit breakers and jaw kits required for Enhanced IP2X design.
[129] Available only in standard IP2X design

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Selection Procedure for NF Merchandised Panelboards

1. Review maximum electrical system voltage, ampacity, and available fault current, and determine the type of panelboard is desired (see NF Panelboards, page 9-5 and I-Line Series Connected Circuit Breaker Ratings , page 9-66).
2. Identify total quantity of branch circuit breaker poles and panel spaces required (see Digest sections 7 and 9 for catalog numbers).
3. Select proper main lug interior from NF Main Lug Interiors, page 9-23 or:
   - Select main circuit breaker interior and main circuit breaker adapter kit from NF Main Circuit Breaker Interiors - 600Y/347 Vac Max., page 9-24 based upon the equivalent number of poles and ampere rating.
     NOTE: Interiors include solid neutral and are field convertible to top-feed.
   - If a main circuit breaker interior was selected, select a vertical main circuit breaker (or fuse) from PowerPacT H-, J-, L-, or LA/LH frame circuit breakers pages in Section 7 or a back-fed E-frame circuit breaker from Section 9 of the Digest.
4. Select ground bars from tables Table 9.78 and any non-standard neutral assembly (i.e., 200% neutral for non-linear loads) from Table 9.74.
   - Please note that an aluminum ground bar kit is included with NF Panelboard Interiors.
5. Select any required sub-feed circuit breakers, sub-feed lugs (SFL), or feed-through lugs (FTL) kits:
   - Subfeed circuit breaker (SFB), sub-feed lugs (SFL) or feed-through lugs (FTL) kits: Table 9.75 in the NF Accessories sections.
   - For subfeed circuit breakers, select PowerPacT H-, J-, L- frame circuit breaker from Section 7 of the Digest.
6. Determine the total enclosure height required by adding requirements from interior, main circuit breaker, neutrals, SFL, FTL, or sub-feed circuit breaker.
7. Select enclosure from the tables Table 9.70 and Table 9.71.
   NEMA Type 1—select box and front (cover) catalog number corresponding to interior catalog number.
   NEMA Type 3R, 5, 12—select enclosure. Cover for Type 3R, 5, 12 is included with the enclosure.
8. Select the branch circuit breakers to be installed in the panel.
   For NF panelboards, use E-frame circuit breakers from Table 9.46 E-frame Thermal-magnetic (480Y/277 Vac Max) Maximum allowable branch breaker pair combination = 170 A.100 A Maximum at 600Y/347 Vac, page 9-25.
9. Select options and accessories from tables Table 9.74–Table 9.79.
   NOTE: Additional NF and NQ options may be found in the Supplemental Digest, Section 4.

NF Merchandised Selection Example
480Y/277 Vac, 3Ø4W, 25 kA SCCR, fully rated, copper bus, 100 A, main circuit breaker, Type 1, flush-mount, bolt-on, branch circuit breakers

Branches	Table No.	Catalog Number	Spaces
(13) 20/1	Table 9.46	EGB14020	13
one 40/2	Table 9.46	EGB24040	2
one 50/3	Table 9.46	EGB34050	3
			Total 18 spaces

			Min. Box Height
125 A MLO Cu Bus Interior	page 9-23	NF418L1C	—
With Main Circuit Breaker Adapter Kit	page 9-24	N150MH	38 inches
Main Circuit Breaker	Section 7	HGL36100	—

Enclosure (Box)	page 9-24	MH38	—
Front (Cover)	page 9-24	NC38F	—
			Total 38 inches

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

NF Main Lug Interiors - 600Y/347 Vac Max

Table 9.44: NF Main Lug Interiors - Use I-Line Panelboard for 3Ø3W Delta applications above 240 Vac

Circuit Breaker Pole Spaces *[1] [2]*	Mains Rating (Amps)	Interior Only Catalog Number (Order Branch Circuit Breakers Separately)*[1][3]*	NEMA 1 Enclosure			Water, Dirt, and Dust Resistant Enclosure Catalog Numbers*[4]*		
			Box 20 in. W x 5.75 in. D *[5][6]*	Mono-Flat Trim™ Front *[7]*	Hinged Front*[5]*	Type 3R/5/12 20 in. W x 5.75 in. D *[8]*	Vented Type 3R 26 in. W x 8.75 in. D *[9]*	Height (In.)
(Single Phase 3-Wire: Factory Assembled Only) Three Phase 4-Wire *[10]*								
18	125	NF418L1 NF418L1C	MH26, MH26BE	NC26( )	NC26( )HR	MH26WP	–	26
30	125	NF430L1 NF430L1C	MH32, MH32BE	NC32( )	NC32( )HR	MH32WP	–	32
42	125	NF442L1C	MH38, MH38BE	NC38( )	NC38( )HR	MH38WP	–	38
54	125	NF454L1C	MH44, MH44BE	NC44( )	NC44( )HR	MH44WP		44
30	250	NF430L2 NF430L2C	MH38, MH38BE	NC38( )	NC38( )HR	MH38WP	–	38
42	250	NF442L2 NF442L2C	MH44, MH44BE	NC44( )	NC44( )HR	MH44WP	–	44
54	250	NF454L2 NF454L2C	MH50, MH50BE	NC50( )	NC50( )HR	MH50WP	–	50
66	250	NF466L2 NF466L2C	MH62, MH62BE	NC62( )	NC62( )HR	MH62WP	–	62
30	400	NF430L4 NF430L4C	MH50, MH50BE	NC50V( )	NC50V( )HR	MH50WP	MH62D9VWP*[11]*	50/62
42	400	NF442L4 NF442L4C	MH56, MH56BE	NC56V( )	NC56V( )HR	MH56WP	MH68D9VWP*[11]*	56/68
54	400	NF454L4 NF454L4C	MH62, MH62BE	NC62V( )	NC62V( )HR	MH62WP	MH74D9VWP*[11]*	62/74
66	400	NF466L4 NF466L4C	MH74, MH74BE	NC74V( )	NC74V( )HR	MH74WP	MH86D9VWP*[11]*	74/86
84	400	NF484L4 NF484L4C	MH86, MH86BE	NC86V( )	NC86V( )HR	MH86WP	–	86
30	600	NF430L6C	MH50, MH50BE	NC50V( )	NC50V( )HR	MH62WP*[11]*	MH62D9VWP*[11]*	50/62
42	600	NF442L6C	MH56, MH56BE	NC56V( )	NC56V( )HR	MH68WP*[11]*	MH68D9VWP*[11]*	56/68
54	600	NF454L6C	MH62, MH62BE	NC62V( )	NC62V( )HR	MH74WP*[11]*	MH74D9VWP*[11]*	62/74
66	600	NF466L6C	MH74, MH74BE	NC74V( )	NC74V( )HR	MH86WP*[11]*	MH86D9VWP*[11]*	74/86
84	600	NF484L6C	MH86, MH86BE	NC86V( )	NC86V( )HR	–	–	86
	800	Factory Assembled Only*[12]*						

Note: All NF Merchandised Panelboard interiors include the following: a NFFP15 bag of blank filler plates; a neutral bonding strap; an NF information manual; a NEMA instruction booklet; and a sheet of circuit numbers.

[1] Order EDB, EGB, or EJB branch circuit breakers separately. Maximum allowable branch circuit breaker pair combination is 170 A.
[2] Please note that some local building codes limit panelboards to 42 circuits, including those that reference 2005 or earlier version of the US NEC.
[3] "C" suffix indicates copper bussing.
[4] Wall mounting brackets add 0.4 inches to back of MHxxWP enclosures.
[5] Nominal interior dimensions, see PBA600 for details.
[6] If Blank End Walls are desired at both ends of NEMA 1 Enclosure, add "BE" suffix to MHXX catalog number.
[7] Add "F" for flush mount, "S" for surface mount.
[8] Enclosure includes trim kit. NEMA 3R, 5, 12 enclosures must be bottom fed. Nominal enclosure dimensions, see PBA555 for details.
[9] Vented Type 3R enclosure with three point latch door required for outdoor applications with two sub-feed breakers, or sub-feed breaker with trip current >150A. NEMA 3R enclosures must be bottom fed, when selected a NF12RDE kit should also be selected. Enclosure nominal dimensions, see PBA603WP for details.
[10] NF panelboards without neutral connections may be applied to 3 phase, 4 wire grounded Wye systems, except at the Service Entrance.
[11] NEMA 3R, 5, 12 enclosures must be bottom fed, when selected a NF12RDE kit should also be selected.
[12] 800 A interiors with main circuit breaker require 8.75 inch deep, 26 inch wide enclosures.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

NF Main Circuit Breaker Interiors - 600Y/347 Vac Max.

Table 9.45: NF Main Circuit Breaker Interiors - Use I-Line Panelboard for 3Ø3W Delta applications above 240 Vac

Circuit Breaker Pole Spaces *[13]*	Mains Rating (Amps)	Main Circuit Breaker Adapter Kits Less Circuit Breaker)			Interior Only Catalog Number (Order Branch Circuit Breakers Separate-ly)*[13][14]*	NEMA 1 Enclosure			Water, Dirt, and Dust Resistant Enclosure Catalog Numbers*[15]*		
		Main Breaker Kit	UL Service Entrance Barrier Kit *[16]*	Main Circuit Breaker Frame Size*[17]*		Box 20 in. W x 5.75 in. D*[18]* or 8.75 in. D *[19][20]*	Mono-Flat™ Front *[21]*	Hinged Front*[21]*	Type 3R/5/12 20 in. W x 5.75 in. D*[22]*	Vented Type 3R 26 in. W x 8.75 in. D*[23]*	Height (In.)
(Single Phase 3-Wire: Factory Assembled Only) Three Phase 4-Wire *[24]*											
15*[25]*	15–125	Back-fed Main Breaker *[26]*	NFEDBS	EDB, EGB or EJB	NF418L1 NF418L1C	MH26, MH26BE	NC26( )	NC26( )HR	MH26WP	—	26
27*[25]*					NF430L1 NF430L1C	MH32, MH32BE	NC32( )	NC32( )HR	MH32WP	—	32
18	15–125	N150MH *[17]*	NFHJLLC	HD/HG/HJ/ HL/HR	NF418L1 NF418L1C	MH38, MH38BE	NC38( )	NC38( )HR	MH38WP	—	38
30					NF430L1 NF430L1C	MH44, MH44BE	NC44( )	NC44( )HR	MH44WP	—	44
42					NF442L1C	MH50, MH50BE	NC50( )	NC50( )HR	MH50WP	—	50
54*[27]*					NF454L1C	MH56, MH56BE	NC56( )	NC56( )HR	MH56WP	—	56
30	125–250	N250MJ *[17]*		JD/JG/JJ/ JL/JR	NF430L2 NF430L2C	MH50, MH50BE	NC50( )	NC50( )HR	MH50WP	—	50
42					NF442L2 NF442L2C	MH56, MH56BE	NC56( )	NC56( )HR	MH56WP	—	56
54					NF454L2 NF454L2C	MH62, MH62BE	NC62( )	NC62( )HR	MH62WP	—	56
66					NF466L2 NF466L2C	MH74, MH74BE	NC74( )	NC74( )HR	MH74WP	—	74
30	125–400	N400M*[17]*	NFLALLC	LA/LH*[28]*	NF430L4 NF430L4C	MH62, MH62BE	NC62V( )	NC62V( )HR	MH62WP	MH62D9VWP	62
42					NF442L4 NF442L4C	MH68, MH68BE	NC68V( )	NC68V( )HR	MH68WP	MH68D9VWP	68
54					NF454L4 NF454L4C	MH74, MH74BE	NC74V( )	NC74V( )HR	MH74WP	MH74D9VWP	74
66					NF466L4 NF466L4C	MH86, MH86BE	NC86V( )	NC86V( )HR	MH86WP	MH86D9VWP	86
30	125–600	N600MPPL *[17]*	NFPPLLLC	LG/LJ/LL/ LR	NF430L6C	MH68D9	NC68V( )3PNF *[29]*	NC68V( )3PNFHR*[29]*	—	Factory Assembled Only	68
42					NF442L6C	MH74D9	NC74V( )3PNF *[29]*	NC74V( )3PNFHR*[29]*	—		74
54					NF454L6C	MH80D9	NC80V( )3PNF *[29]*	NC80V( )3PNFHR*[29]*	—		80
	600–800	Factory Assembled Only*[30]*									

[13] Order EDB, EGB, or EJB branch circuit breakers separately. Maximum allowable branch circuit breaker pair combination is 170 A.
[14] "C" suffix indicates copper bussing.
[15] Wall mounting brackets add 0.4 inches to back of MHxxWP enclosures.
[16] Please select the appropriate Main Circuit Breaker Barrier for UL Service Entrance applications (see , page).
[17] Select the appropriate PowerPacT main circuit breaker from Section 7.
[18] Nominal interior dimensions, see PBA600 for details.
[19] D9 suffix indicates the 8.75 in. Deep Enclosure required for panelboards with PowerPacT L main circuit breaker or sub-feed circuit breaker. See PBA604 for dimensional details.
[20] If Blank End Walls are desired at both ends of 5.75" deep NEMA 1 Enclosure, select catalog number with "BE" suffix. Both end walls are blank in 8.75" deep enclosures.
[21] Add "F" for flush mount, "S" for surface mount.
[22] Enclosure includes trim kit. NEMA 3R, 5, 12 enclosures must be bottom fed. Nominal interior dimensions, see PBA555 for details.
[23] Vented Type 3R enclosure with three point door. Must be bottom fed. Required for outdoor applications with PowerPacT L main circuit breaker, two sub-feed circuit breakers, or sub-feed circuit breaker with trip current >150A. Interior nominal dimensions, see PBA603WP for details.
[24] NF panelboards without neutral connections may be applied to 3 phase, 4 wire grounded Wye systems, except at the Service Entrance.
[25] Pole spaces shown are available for branch circuits, with spaces deducted for the back fed main circuit breaker.
[26] Back-fed EDB 125 A 3 pole main circuit breaker must be ordered separately and field installed. Maximum breaker rating opposite is 20 A.
[27] Please note that some local building codes limit panelboards to 42 circuits, including those that reference 2005 or earlier version of NFPA 70.
[28] Available for 125 A–400 A applications. Please order short handle circuit breaker (i.e., LAL36400MB).
[29] Three point latch trim front; required for enclosures on panelboards with PowerPacT L Main Circuit Breaker, Switch, or Sub-Feed Circuit Breaker
[30] 800 A interiors with main circuit breaker require 8.75 inch deep, 26 inch wide enclosures.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



EDB, EGB, EJB
1–pole
15–70 A



EDB, EGB, EJB
2–pole
15–125 A



EDB, EGB, EJB
3–pole
15–125 A



EDB, EPD
1-pole with alarm switch

E-frame Circuit Breakers for NF Merchandised Panelboards

Table 9.46: E-frame Thermal-magnetic (480Y/277 Vac Max) *[31][32]*

Ampere Rating	ED, EG, EJ (480Y/277 Vac)		"D" Interrupting Level 18 kA @ 480Y/ 277 Vac	"G" Interrupting Level 35 kA @ 480Y/ 277 Vac	"J" Interrupting Level 65 kA @ 480Y/ 277 Vac	Terminal Wire Range (AWG)
	Hold	Trip	Catalog Number	Catalog Number	Catalog Number	
1-pole, 277 Vac						
15 A	270	875	EDB14015*[33][34]*	EGB14015*[33][34]*	EJB14015*[33][34]*	AL30FD #14–#6 Al or Cu
20 A			EDB14020*[33][34]*	EGB14020*[33][34]*	EJB14020*[33][34]*	
25 A			EDB14025*[34]*	EGB14025*[34]*	EJB14025*[34]*	
30 A			EDB14030*[34]*	EGB14030*[34]*	EJB14030*[34]*	
35 A	630	1800	EDB14035*[34]*	EGB14035*[34]*	EJB14035*[34]*	AL100FD #14–2/0 Al or Cu
40 A			EDB14040*[34]*	EGB14040*[34]*	EJB14040*[34]*	
45 A			EDB14045*[34]*	EGB14045*[34]*	EJB14045*[34]*	
50 A			EDB14050*[34]*	EGB14050*[34]*	EJB14050*[34]*	
60 A			EDB14060	EGB14060	EJB14060	
70 A			EDB14070	EGB14070	EJB14070	
2-pole, 480Y/277 Vac *[35]*						
15 A	270	875	EDB24015*[34]*	EGB24015*[34]*	EJB24015*[34]*	AL30FD #14–#6 Al or Cu
20 A			EDB24020*[34]*	EGB24020*[34]*	EJB24020*[34]*	
25 A			EDB24025*[34]*	EGB24025*[34]*	EJB24025*[34]*	
30 A			EDB24030*[34]*	EGB24030*[34]*	EJB24030*[34]*	
35 A	630	1800	EDB24035*[34]*	EGB24035*[34]*	EJB24035*[34]*	AL100FD #14–2/0 Al or Cu
40 A			EDB24040*[34]*	EGB24040*[34]*	EJB24040*[34]*	
45 A			EDB24045*[34]*	EGB24045*[34]*	EJB24045*[34]*	
50 A			EDB24050*[34]*	EGB24050*[34]*	EJB24050*[34]*	
60 A			EDB24060	EGB24060	EJB24060	
70 A			EDB24070	EGB24070	EJB24070	
80 A	1000	2300	EDB24080	EGB24080	EJB24080	AL100FD #14–2/0 Al or Cu
90 A			EDB24090	EGB24090	EJB24090	
100 A			EDB24100	EGB24100	EJB24100	
110 A			EDB24110	EGB24110	EJB24110	
125 A			EDB24125	EGB24125	EJB24125	
3-pole, 480Y/277 Vac						
15 A	270	875	EDB34015*[34]*	EGB34015*[34]*	EJB34015*[34]*	AL30FD #14–#6 Al or Cu
20 A			EDB34020*[34]*	EGB34020*[34]*	EJB34020*[34]*	
25 A			EDB34025*[34]*	EGB34025*[34]*	EJB34025*[34]*	
30 A			EDB34030*[34]*	EGB34030*[34]*	EJB34030*[34]*	
35 A	630	1800	EDB34035*[34]*	EGB34035*[34]*	EJB34035*[34]*	AL100FD #14–2/0 Al or Cu
40 A			EDB34040*[34]*	EGB34040*[34]*	EJB34040*[34]*	
45 A			EDB34045*[34]*	EGB34045*[34]*	EJB34045*[34]*	
50 A			EDB34050*[34]*	EGB34050*[34]*	EJB34050*[34]*	
60 A			EDB34060	EGB34060	EJB34060	
70 A			EDB34070	EGB34070	EJB34070	
80 A	1000	2300	EDB34080	EGB34080	EJB34080	AL100FD #14–2/0 Al or Cu
90 A			EDB34090	EGB34090	EJB34090	
100 A			EDB34100	EGB34100	EJB34100	
110 A			EDB34110	EGB34110	EJB34110	
125 A			EDB34125	EGB34125	EJB34125	
EPDs (Equipment Protection Devices), 1-pole, 277 Vac, Thermal-magnetic with 30 mA ground-fault protection *[36]*						
15 A	270	875	EDB14015EPD*[33][34]*	EGB14015EPD*[33][34]*	EJB14015EPD*[33][34]*	#14–#6 Cu or #12–#4 Al
20 A			EDB14020EPD*[33][34]*	EGB14020EPD*[33][34]*	EJB14020EPD*[33][34]*	
30 A			EDB14030EPD*[34]*	EGB14030EPD*[34]*	EJB14030EPD*[34]*	
40 A	630	1800	EDB14040EPD*[34]*	EGB14040EPD*[34]*	EJB14040EPD*[34]*	
50 A			EDB14050EPD*[34]*	EGB14050EPD*[34]*	EJB14050EPD*[34]*	

NOTE:

- All EDB, EGB, and EJB circuit breakers are UL Listed as HACR Type. For 50°C calibration, use a CA suffix. NF branch circuit breakers are fungus proof as standard.
- If circuit breakers are required for 600Y/347 Vac applications, view the E-frame circuit breakers available at www.se.com/ca.

[31] Maximum allowable branch breaker pair combination = 170 A.
[32] 100 A Maximum at 600Y/347 Vac
[33] UL Listed as SWD (Switching duty rated).
[34] UL Listed as HID (High Intensity Discharge rated).
[35] UL Listed for use on 240 V Corner-grounded Delta Systems (Grounded B Phase). See data bulletin 2700DB0202.
[36] All EPDs occupy two spaces, with or without Alarm Switch option. For alarm switch, add the suffix BA. EPD circuit breakers may not be used in systems with phase to ground voltages other than 277 Vac.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.47: Factory installed Electrical Accessories

Auxiliary Switch (1A/1B)	Alarm Switch (NO)	Coil Burden Max. (VA)	Minimum Recommended Supply Transformer (VA)
		288	50
Monitors circuit breaker contact status and provides a remote signal indicating the circuit breaker contacts are OPEN or CLOSED. **Application** Max Load = 10 A @ 120 Vac 50/60 Hz Terminals for #14 AWG Cu wire	Used with control circuits and is actuated only when the circuit breaker has tripped. **Application** Max Load = 7 A @ 120 Vac 50/60 Hz Terminals for #14 AWG Cu wire.	Shunt Trip—Trips the circuit breaker from a remote location by means of a coil energized from a separate circuit. A 120 V shunt trip will operate at 55% or more of rated voltage. **Application** For use with momentary or maintained push button. 120 Vac 50/60 Hz Terminals for #14 AWG Cu wire.	

Table 9.48: Factory Installed Electrical Accessory Packages for ED, EG, EJ Circuit Breakers

Accessory Package	Suffix
Auxiliary Switch and Alarm Switch*[37][38]*	AABA
Shunt Trip Package*[37][38]*	SA
Auxiliary Switch/Alarm Switch/Shunt Trip Package*[37][38]*	AABASA
Alarm Switch (N.O.) Package for EPDs only	BA

Table 9.49: Terminal Nut Insert Kit

Circuit Breaker Type	Qty. per Kit	Catalog No.
ED, EG, EJ	3	TIKFD

Table 9.50: Handle Accessories

Circuit Breaker Type	No. of Poles	Catalog No.
E-frame Fixed Padlock Attachment, Lock ON/OFF		
ED, EG, EJ	1, 2, or 3	EDPA
E-frame Fixed padlock attachment, Lock OFF only		
ED, EG, EJ	1, 2, or 3	EDPAF
E-frame Removable padlock attachment, Lock OFF only		
ED, EG, EJ	1, 2, or 3	HPAFD
E-frame Handle Ties		
ED, EG, EJ	Ties 2 – 1P	ECB2HT
	Ties 3 – 1P	ECB3HT

Table 9.51: Interrupt Ratings (kA)

	EDB	EGB	EJB
120 V	25	65	100
240 V	18 (1P), 25	35 (1P), 65	65 (1P), 100
480Y/277 V	18	35	65
600Y/347 V*[39]*	14	18	25

Table 9.52: Mechanical Lug Kit Information (Al lugs for use with Al or Cu wire)*[38]*

Circuit Breaker Application				Number of Wires Per Lug and Wire Range	Catalog Number	Lugs Per Kit
Standard	Ampere Rating	Optional	Ampere Rating			
EDB, EGB, EJB	15–30 A	—	—	one #12—#6 AWG Al or one #14—#6 AWG Cu	AL30FD	3
	35–125 A	EDB, EGB, EJB	15–30 A *[40]*	one #12—2/0 AWG Al or one #14—2/0 AWG Cu	AL100FD	3
—	—	EDB, EGB, EJB	15–125 A	one #14—1/0 AWG Cu	CU100FD	3

[37] Accessory package takes an additional pole space.
[38] Not available for EPD.
[39] Requires use of ExBx6xxx circuit breakers, i.e. EDB16015 for a 1P, 15A circuit.
[40] Factory installed only. Use suffix “LH”.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Factory Assembled Main Circuit Breakers—600Y/347 Vac maximum

Table 9.53: NF Panelboard Factory Assembled Interiors—600Y/347 Vac Max

Single Phase 3-Wire (1P/3W), or Three Phase 4-Wire (3P/4W) *[41]*							
Mains Rating (Amps)				Max. Number of One-Pole Circuit Breakers	Bus Material	Min. Box Depth (inches)	
Main Lugs Only	Circuit Breaker Frame	Main Breaker *[42]*	Main Switch *[42]*			Main Lugs Only	Main Breaker / Switch
125 Max	ED, EG, EJ *[43]*	15–125	–	18, 30	Al, Cu	5.75 in.	5.75 in.
125 Max	HD/HG/HJ/HL/HR	15–125	110–125	18, 30, 42, 54 *[44]*	Al, Cu	5.75 in.	5.75 in.
250 Max	JD/JG/JJ/JL/JR	150–250	150–250	30, 42, 54, 66	Al, Cu	5.75 in.	5.75 in.
400 Max	LA/LH	125–400	300–400	30, 42, 54, 66, 84	Al, Cu	5.75 in.	5.75 in.
600 Max	LG/LJ/LL/LR *[45]*	125–600	450–600	30, 42, 54, 66 *[46]*, 84	Cu	5.75 in.	8.75 in. *[47]*
800 Max	MG	600–800	—	30, 42, 54	Cu	8.75 in. *[48]*	8.75 in. *[49]*
	PG, PJ, PL	600–800	600–800				

NOTE: Factory Assembled Main Circuit Breakers (600Y/347 Vac maximum). 600Y/347 Vac applications require use of E_B_6___ branch circuit breakers, i.e. EDB16015 for a 1P, 15A circuit.*[50]*

400 A and 600 A panelboards, 1Ø or 3Ø

PowerPacT L-frame - see Tables in Section 7.

Table 9.54: Main Circuit Breaker

No. of Poles	Trip Unit Options	Frame Sizes	Ampacity
3	LI, LSI, Switch	LG, LJ, LL, LR	125–600 A
LA/LH, PowerPacT H and J-frame circuit breakers are also available —see Tables in Section 7 and Supplemental Digest Section 3.			

Table 9.55: PowerPacT L Main Circuit Breaker Cabinet Height (inches)

Max. No. of Branch Spaces (Does not include sub-feed circuit breaker spaces)	NEMA 1 Enclosure (20 in. W x 8.75 in. D) *[51]*	Vented NEMA 3R Enclosure (26 in. W x 8.75 in. D) *[52]*	
	400 / 600 A Interior	400 A	600 A
30	68	68	74
42	74	74	80
54	80	80	86

Table 9.56: Sub-feed Circuit Breakers for NF Panelboards *[53]*

Interior Mains Rating	Mains Type	Sub-Feed Circuit Breaker(s)			Space Factor *[54]*
		Ampacity	Poles	MCCB Frame	
250 - 800 A	Main Lugs	110 - 150	2, 3	HD, HG, HJ, HL, HR *[55] [56]*	18 inches
		150 - 250	2, 3	JD, JG, JJ, JL, JR *[56] [57]*	
		300 - 400	2, 3	LA or LH	
		125 - 600	3	LG, LJ, LL, LR	
250 - 400 A	PowerPacT J or LA/ LH Main Circuit Breaker	110 - 150	2, 3	HD, HG, HJ, HL, HR *[55] [56]*	
		150 - 250	2, 3	JD, JG, JJ, JL, JR *[56] [57]*	
		300 - 400	2, 3	LA or LH *[58]*	
		125 - 400	3	LG, LJ, LL, LR *[59]*	
400 - 600 A *[60] [61]*	PowerPacT L Main Circuit Breaker *[62]*	110 - 150	2, 3	HD, HG, HJ, HL, HR *[55] [56]*	18 inches
		150 - 250	2, 3	JD, JG, JJ, JL, JR *[56] [57]*	
		125 - 400	2, 3	LA / LH *[58]*	12 inches
		125 - 600	3	LG, LJ, LL, LR *[60]*	18 inches
700 - 800 A *[63]*	PowerPacT M, P Main Circuit Breaker	110 - 150	2, 3	HD, HG, HJ, HL, HR *[55] [56]*	12 inches
		150 - 250	2, 3	JD, JG, JJ, JL, JR *[56] [57]*	18 inches
		300 - 400	2, 3	LA / LH	12 inches
		125 - 600	3	LG, LJ, LL, LR	18 inches
400 - 800 A *[58]*	Main Circuit Breaker*[62]*	110 - 400	2, 3	One LA / LH with one H-, or J- frame	36 inches

[41] NF panelboards without neutral connections may be applied in 3-phase, 4-wire grounded Wye systems, except at the Service Entrance.
[42] Factory Assembled Interiors are rated for trip current of Main Breaker / Switch.
[43] Back-Fed Main Breaker applications only.
[44] Three Phase Copper only.
[45] PowerPacT L crcuit breakers may only be installed on 600 A NF panelboard interiors. 400 A max. PowerPacT L circuit breakers should be selected for applications requiring trip ampacities between 125–400 A.
[46] NF Panelboards with PowerPacT L Main Circuit Breaker or Switch are limited to a maximum of 54 branch circuits.
[47] NF Panelboards with PowerPacT L Main Circuit Breaker or Switch require 8.75 in. deep enclosures and three point latch trim fronts.
[48] Enclosures limited to NEMA Type 1 only.
[49] 8.75 in. Enclosures limited to 26 in. Wide NEMA Type 1.
[50] Requires use of ExBx6xxx branch circuit breakers, i.e. EDB16015 for a 1P, 15A circuit.
[51] D9 8.75 in. deep enclosure and three point latch door is required for PowerPacT L Main Circuit Breaker, Switch, or Sub-Feed Circuit Breaker. See Table 9.45 NF Main Circuit Breaker Interiors - Use I-Line Panelboard for 3Ø3W applications above 240 Vac, page 9-24.
[52] PowerPacT L not available in non-vented (NEMA Type 3R/5/12, or 4/4X) enclosures.
[53] See Digest Section 7 for Interrupting Ratings and Catalog Numbers of PowerPacT H-, J-, L-, and LA/LH frame MCCBs. NEMA 3R applications with sub-feed breakers greater than 150 A require 8.75 in. deep, 26 in. wide enclosure - reference PBA603WP for dimensions.
[54] Space Factor is the length required for sub-feed circuit breaker. Please reference Product Selector output for panelboard enclosure dimensions.
[55] Three pole HD, HG, HR MCCBs are installed for single phase sub-feed circuit breaker applications.
[56] One or two sub-feed circuit breakers may be selected.
[57] Three pole JR MCCBs are installed for single phase sub-feed circuit breaker applications.
[58] NF Panelboards with LA / LH sub-feed circuit breakers are shipped fully assembled.
[59] NF Panelboards with PowerPacT L main and sub-feed circuit breakers require 26 in. wide, 8.75 in. deep enclosure with 3-point latch trim front. Reference PBA758 or PBA754 drawings for dimensions in NEMA Type 1 or 3R enclosures, respectively.
[60] NF Panelboards with PowerPacT L circuit breakers require 8.75 in. a deep enclosure with 3-point latch trim front. Reference PBA559x drawings for dimensions, where x may be blank, HR, HRT, or T.
[61] Add 6 in. to space factor for NF Panelboards with 600 A PowerPacT L circuit breakers in NEMA 3R enclosures. Reference PBA754 drawing for dimensions. Maximum sub-feed breaker is 400 A when installed with a 600 A rated main circuit breaker in a NEMA 3R enclosure.
[62] NF Panelboards with PowerPacT L main circuit breaker and any sub-feed circuit breaker(s) are shipped completely assembled in 26 in. wide, 8.75 in. deep enclosures, with gutter mounted neutral assemblies.
[63] NF Panelboards with 800 A rated main circuit breaker are shipped completely assembled in 26 in. wide, 8.75 in. NEMA 1 enclosures. Reference PBA756 or PBA756HR drawing for dimensions.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Common Features

Table 9.57: Sub-feed (Double) Lugs (Standard Copper Mechanical Lugs)

Mains Rating	Sub-feed Lug Wire Range
125 A	(2) #6–2/0 AWG Al or Cu
250 A	two 1/0 AWG–350 kcmil or one 1/0 AWG-750 kcmil Al or Cu
400 A	(2) 1/0 AWG–750 kcmil Cu
600 A	(4) 4/0 AWG–500 kcmil Al or Cu
800 A	(6) 3/0 AWG–500 kcmil Al or Cu
Sub-feed (Double) Lugs (Standard Aluminum Mechanical Lugs): An additional mains and termination point that can be used to feed out to another panelboard or device from the incoming service lines. Available on main lug interiors only.	

Table 9.58: Sub-feed Lug Cabinet Data (Standard Aluminum Mechanical Lugs)

Max. No. of Branch Spaces	Main Lugs Enclosure Height in Inches				
	125 A	250 A	400 A	600 A	800 A *[64]*
18	26	—	—	—	—
30	32	38	50	74	80
42	—	44	56	80	86
54	—	50	62	86	92

Table 9.59: Feed-through Lugs (Standard Aluminum Mechanical Lugs)

Mains Rating	Feed-through Wire Range Wire
125 A	one #6 AWG–2/0 kcmil Al or Cu
250 A	one #6 AWG–350 kcmil Al or Cu
400 A	one 1/0 AWG–750 kcmil or two 1/0 AWG–350 kcmil Al or Cu
600 A	two 1/0 AWG–750 kcmil Al or Cu

Feed-through Lugs (Standard Aluminum Mechanical Lugs): A second set of lugs assembled at the opposite end from the mains of the panelboard. Often used to connect another panelboard or device to the incoming lines. Available on main lugs and main circuit breaker panelboards.

Table 9.60: Feed-through Lugs Cabinet Data (Standard Aluminum Mechanical Lugs)

Max. No. of Branch Spaces	Enclosure Height in Inches									
	125 A	100/125 A		250 A		400 A LA/LH		600 A		800 A
	Main Breaker (back-fed only)	Main Lugs	Main Breaker	Main Lugs	Main Breaker	Main Lugs	Main Breaker	Main Lugs	Main Breaker *[65]*	Main Lugs *[64]*
18	38	32	44	—	—	—	—	—	—	—
30	44	38	50	50	62	56	68	56	74	56
42	—	—	—	56	68	62	74	62	80	62
54	—	—	—	62	74	68	80	68	86	68

Table 9.61: NF Equipment Ground Bar Kits *[66]*

Interior Rating	Circuit Count	Aluminum	Copper	Ground Bar Insulator Kit
125 A / 250 A	18	PK12GTA	PK27GTACU	PKGTAB
	30	PK18GTA		
	42, 54	PK23GTA		
250 A	66 and Split Bus	PK27GTA		
400 A / 600 A	All	PK27GTA		

Table 9.62: Name Plates

Name Plates
Standard white face/black letter laminated bakelite, 1 in. x 3.5 in., adhesive-backed or screw mountable with screws in a bag assembly

Table 9.63: NF Panelboard Neutral Assembly Options (Standard Width Enclosures)

Interior Mains Rating	Mains Type			Load End Options		100% Neutrals		200% Neutrals	
	MLO	MB	SFL	FTL	SFB	Aluminum	Copper	Aluminum	Copper
125 A	Y	Y	Y	Y	N/A	Standard	NFN1CU	NFNL1	Factory Assembled Only
250 A	Y	Y	-	-	-		NFN2CU	NFNL2	
	-	-	Y	Y	Y				
400 A	Y	Y	-	-	-		NFN6CU	NFNL4	
	-	-	Y	Y	Y			Factory Assembled Only	
600 A	Y	-	-	-	-				
	-	Y	Y	Y	Y	Factory Assembled Only	Factory Assembled Only		
800 A	Y	Y	-	-	-				
	-	-	Y	Y	Y				

Table 9.64: NF Main Neutral Conductors—(Quantity) and Wire Size *[67]*

Interior Rating	Mechanical Neutral Line Lugs		Compression Neutral Line Lugs
	Standard Lug Wire Range	Oversized Lug Wire Range	Standard Lug Wire Range
125 A	(1) #6–2/0 AWG Cu or Al	Select 250 A neutral assembly	(1) #6-2/0 AWG Cu or (1) #4-300 kcmil Al
250 A	(1) #6 AWG-250 kcmil Cu or (1) #6 AWG - 350 kcmil	Select 400 A neutral assembly	(1) 2/0 AWG-250 kcmil Cu or (1) 250-350 kcmil Al
400 A	(2) 1/0 AWG–300 kcmil or (1) 1/0 AWG-700 *[68]* kcmil Cu or Al	(2) 1/0 AWG-700 *[68]* kcmil or (4) 1/0 AWG-300 kcmil	(1) 400-600 *[68]* kcmil Cu or (1) 2/0 AWG-500 kcmil Al
600 A		(4) 1/0 AWG-600 *[68]* kcmil Cu or Al *[69]*	(1) 2/0 AWG-500 kcmil Cu or Al
		(6) 4/0 AWG-500 kcmil Cu or Al *[70]*	
800 A		—	

NOTE: 200% applications require gutter mounted neutral in special (W x 26 in.) enclosure factory assembled only. One exception, without subfeed lugs, feed-thru lugs and subfeed breakers 400 A (30-84 circuit interiors) and 600 A (30-54 circuit interiors) does not require an special enclosure. Gutter extensions may be required to provide NEC wire bending space for cable(s) of maximum lug size.

[64] 800 A main lug panelboards require an 8.75 in. deep and 26 in. wide box.
[65] 600 A main circuit breaker panelboards require an 8.75 in. deep, 26 in. wide box.
[66] One (1) PK kit supplied when ground bar is specified. Two (2) PK kits supplied when "extra" ground bar is ordered.
[67] Lug Wire Ranges shown meet NEC wire bending space. Lugs may accept larger cables if enclosure size is increased.
[68] Installation of 750 kcmil neutral lugs possible if enclosure size is increased to provide wire bending space.
[69] Factory Assembled only; increases enclosure length 6-12 in.
[70] Factory Assembled only; enclosure length increases 6-12 in.; requires 8.75 in. deep D9 enclosure.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



600 A NF Main Lug Only Panelboard with Condo Riser Neutral Assembly

Table 9.65: NF Panelboard Condo Riser Neutral Panelboards (Requires 26 in. Wide, 8.75 in. Deep Enclosure)*[71]*

Mains Rating	Available Branch Circuits	Neutral Rating	Neutral Assembly	Mains Options			Load End Options		Line Lug Wire Range	Load Lug Wire Range
				Main Lugs	Main Breaker	Sub-Feed Lugs	Feed-Thru Lugs	Sub-Feed Breaker		
400 / 600 A	30, 42, 54	100%	NFN6CR	Y*[72]*	LA, LG, LH, LJ, LL, LR*[73]*	Y	Y	Y	(4) AWG 1/0 - 750 kcmil	(8) AWG 3/0 - 750 kcmil
		200%	NFNL6CR							
800 A		100%	Factory Assembled Only	N / A	MG, PG, PJ,PL*[74]*	Y	Y	Y	(8) AWG 3/0 - 750 kcmil	(8) AWG 3/0 - 750 kcmil
		200%								

Table 9.66: Metal Directory Frame

Metal Directory Frame
Metal Directory Frames are available as a premium factory assembled alternative to standard plastic directory card holders on the back of panelboard trim fronts.

Table 9.67: Hinged Door-in-Door Trim

Hinged Door-in-Door Trim
Hinged Door-in-Door Trim has piano hinge down one side. Inner door has a lock, outer door is retained with screws
Hinged Door-in-Door with Outer Door Lock in place of screws



NF MB Panelboard in Vented NEMA 3R enclosure

Table 9.68: Weatherproof or Dusttight Cabinets NEMA Type 3R, 4, 4X, 5, 12)

Weather resistant and Dust resistant Cabinets —Type 3R, 4, 4X, 5, 12

NOTE: NF panelboards with PowerPacT L circuit breakers are not available with a NEMA Type 4, 4X, 5, or 12 enclosure. (Use I-Line).

NF panelboards with PowerPacT L circuit breakers are available with vented 26 in. wide NEMA 3R enclosures. These vented NEMA 3R enclosures also enable selection of subfeed circuit breakers up to 600 A.

400 A NF panelboards in NEMA 4, 4X, 5, or 12 enclosures are available with one subfeed breaker up to 150 A.

Table 9.69: Optional Factory Assembled Lugs for Main Lug Only and Main Circuit Breaker Interiors

Incoming Lugs Type
Aluminum Compression Lugs
Copper Mechanical Lugs
Copper Compression Lugs

Table 9.70: NF Special Features Standard NEMA Type 1 Enclosure Selection Table—Enclosure Catalog Number for Standard Main Mechanical Lugs Only

Feature	Main Lugs Only														
	Sub-feed Lugs					Feed-through Lugs					Sub-feed Circuit Breaker				
Interior Rating	125 A	250 A	400 A	600 A	800 A	125 A	250 A	400 A	600 A	800 A	250 A	400 A	600 A	600 A*[75]*	800 A
No. of Circuits	NEMA 1 Enclosure Catalog Number					NEMA 1 Enclosure Catalog Number					NEMA 1 Enclosure Catalog Number				
18	MH26	—	—	—	—	MH32	—	—	—	—	—	—	—	—	Factory Assembled Only
30	MH32	MH38	MH50	Factory Assembled Only		MH38	MH50	MH56	Factory Assembled Only		MH56	MH68	MH68	MH62D9	
42	—	MH44	MH56			—	MH56	MH62			MH62	MH74	MH74	MH68D9	
54	—	MH50	MH62			—	MH62	MH68			MH68	MH80	MH86	MH74D9	
66	—	MH62	MH74			—	MH74	MH80			MH80	MH92	MH92	—	
84	—	—	MH86			—	—	—			—	—	—	—	

Table 9.71: Special Features Enclosures Selection Table—Merchandised NF Vertically Mounted Main Breaker Panelboards with Accessories (by Mains Rating)

No. of Circuits	Vertical Main Circuit Breaker (MB) *[76]*									Back-fed MB FTL
	Sub-feed Circuit Breaker (PowerPacT H or J)					Feed-through Lugs (FTL)				
	125 A Cat. No.	250 A Cat. No.	400 A Cat. No.	600 A Cat. No.	800 A Cat. No.	125 A Cat. No.	250 A Cat. No.	400 A*[76]* Cat. No.	600 A Cat. No.	125 A Cat. No.
18	—	—	—	—	—	MH44	—	—	—	MH32
30	—	MH68	MH80	Factory Assembled Only	Factory Assembled Only	MH50	MH62	MH68	Factory Assembled Only	MH38
42	—	MH74	MH86			—	MH68	MH74		—
54	—	MH80	MH92			—	MH74	MH86		—
66	—	MH92	—		—	—	MH86	MH92		—

Table 9.72: Surgelogic™ Hard Bus SPD—Model*[77]*

Surge Current Rating kA
100
120
160
200
240

[71] Select 26 in. Wide Condo Riser Panel under Structure Options in the SE Advantage Panelboard Product Selector.
[72] Reference PBA757 drawing for additional dimensional information.
[73] Reference PBA758 drawing for additional dimensional information.
[74] Reference PBA756 or PBA756HR drawing for additional dimensional information.
[75] PowerPacT LG, LJ, LL, or LR Sub-Feed Circuit Breaker.
[76] 400 A dimension for LA/LH main circuit breakers only.
[77] Panelboard box height with SPD unit—Contact your local Schneider Electric representative or distributor.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.73: Surgelogic SPD Options

Surgelogic SPD Options
Surge Counter
Dry Contacts
Remote Monitor

Additional Factory Assembled Options - NF and NQ Panelboards

- PowerLogic™ metering
- Customer equipment space
- Increased box depth
- Box extensions top, bottom and side
- Drip hoods
- Non-standard paint
- NEMA 1 gasketed
- NEMA 4 Stainless steel enclosure
- NEMA 4X Fiberglass enclosure (NQ and NF)
- Stainless steel trim front (NQ, NF and I-LINE)
- Padlockable hasp
- Special locks (Corbin, Yale, Best)
- Equal height boxes
- Common trip to cover two equal height boxes
- Panelboard skirthides conduits feeding a panelboard
- Panelboard wireway for terminating conduit in wireway endwall
- Panelboard interiors and special fronts to fit existing boxes

NOTE: For additional factory modifications, see Modifications For Factory Assembled Panelboards, page 9-63.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Accessories

Table 9.74: NF Merchandised Neutrals

Mains Ampacity	200% Neutral Kit	Copper 100% Neutral Kit
	Catalog No.	Catalog No.
125	NFNL1	NFN1CU
250	NFNL2	NFN2CU
400	NFNL4*[78]*	NFN6CU
600	Factory Assembled Only	NFN6CU*[78]*

Table 9.75: NF Merchandised Interior Modification Kits

Mains Ampacity	Sub-feed Lugs *[79]*	Feed-through Lugs *[79]*
	Catalog No.	Catalog No.
125	NF125SFL	NF125FTL
250	NF250SFL	NF250FTL
400	NF400SFL *[81]*	NF400FTL
600	Factory Assembled Only	
800		

Mains Ampacity	Sub-feed Circuit Breaker Kits *[79]* (circuit breaker not Included)	
	Single Sub-feed Circuit Breaker	Twin Sub-feed Circuit Breakers
	Catalog No.	Catalog No.
250	NF250SFBH/NF250SFBJ	—
400	N600MPPL (400 A Max.)	NF600SFBH NF600SFBJ*[80]*
600	NF600SFBPPL (600A)*[80]*	Factory Assembled Only
800	Factory Assembled Only	

NOTE: NF250SFBH and NF600SFBH are for use with HDL, HGL, HJL, HLL, and HRL circuit breakers. NF250SFBJ and NF600SFBJ are for use with JDL, JGL, JJL, JLL, and JRL circuit breakers.

Table 9.76: Optional Main Lug Kits for Main Lug Panelboards

Ampacity	Al Compression Lug Kit		Cu Mechanical Lug Kit		Cu Compression Lug Kit *[81]*	
	Catalog No.	Lug Wire Range	Catalog No.	Lug Wire Range	Catalog No.	Lug Wire Range
125	NFALV1 *[82]*	one #4 AWG–300 kcmil	NFCUM1	#6–2/0 AWG	NFCUV1 *[83]*	one #6–1/0 AWG
250	NFALV2	one 250–350 kcmil	NFCUM2	#6 AWG–250 kcmil	NFCUV2 *[83]*	one 2/0 AWG–300 kcmil
400	NFALV4	two 2/0 AWG–500 kcmil	NFCUM4	one 1/0 AWG–750 kcmil, or two 1/0 AWG–350 kcmil	NFCUV4	one 400–750 kcmil
600	NFALV6	two 2/0 AWG–500 kcmil	NFCUM6	two 1/0 AWG–750 kcmil	NFCUV6	two 250–500 kcmil
800	Contact your local Schneider Electric representative or distributor.					

[78] Not to be used with SFL, FTL, or SFB. These combinations are factory assembled only.
[79] Available factory assembled only on non-linear panelboards.
[80] Sub-feed circuit breakers may not be field installed onto NF Panelboards with PowerPacT L main circuit breakers.
[81] Use copper wire only.
[82] Use of this kit requires an additional 6 in. added to box height.
[83] Use of this kit to terminate larger than standard wire size requires an additional 6 in. added to box height.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.77: US Service Entrance Barrier Kits (required by NFPA 70—National Electrical Code® (NEC®) 2017 and later)


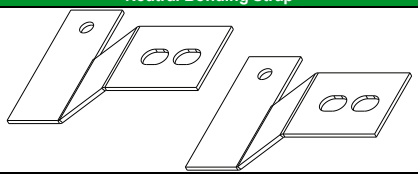
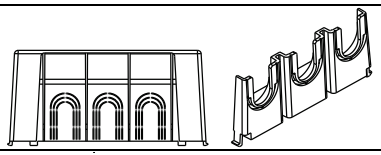


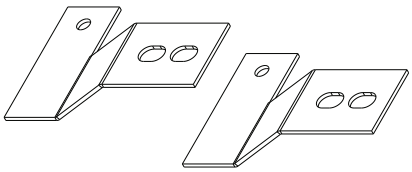

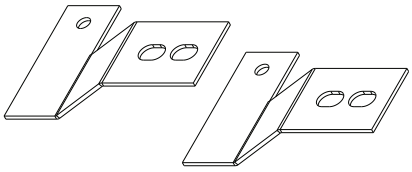


Catalog Number	Contents		Description
	Line Lug Cover	Neutral Bonding Strap	
NFLALLC			NF LA/LH Line Lug Cover and Neutral Bonding Strap
NFHJLLC			NF H/J Line Lug Cover and Neutral Bonding Strap
NFPPLLLC			NF PowerPacT L Line Lug Cover and Neutral Bonding Strap
NFPPPLLC			PowerPacT P Line Lug Cover and Neutral Bonding Strap
NFEDBS			NF E Frame Line Lug Cover and Neutral Bonding Strap

Table 9.78: NF Accessories

Description	Catalog No.
Aluminum Equipment Ground Bar	PK27GTA
Copper Equipment Ground Bar	PK27GTACU
AWG #1-4/0 Aluminum Lug on Aluminum Equipment Ground Bar	PK23GTAL
Equipment Ground Bar Insulator Kit	PKGTAB
Circuit I.D. number strips	
102 odd/even (left side numbered 1, 3, 5...101)	NF102OE
103–204 odd/even (left side numbered 103, 105, 107...203)	NF204OE
1–102 sequential (left side numbered 1, 2, 3 ...102)	NF102S
103–204 sequential (left side numbered 103, 104, 105... 204)	NF204S
Rail and Deadfront Extensions	
6 in. Extension	NF6RDE
12 in. Extension	NF12RDE
18 in. Extension	NF18RDE

Description	Catalog No.
Replacement Part Kits	
Filler plate (15 per package)	NFFP15
E-frame Fixed padlock attachment, Lock ON/OFF for ED, EG, and EJ Circuit Breakers 1, 2, or 3 poles	EDPA
E-frame Fixed padlock attachment, Lock OFF only for ED, EG, and EJ Circuit Breakers 1, 2, or 3 poles	EDPAF
Drip Hood for 20 in. wide enclosures	MHT2DH20

Table 9.79: Add-On Lugs for Neutral Bars or Ground Bars

Catalog Number	Lug Wire Range (AWG)	Wire Ampere
QO70AN	#12 to #2 Al or #14 to #4 Cu	70 A
Q1100AN	#14 to #1/0 Al or Cu	80 - 100 A
NOTE: Requires two standard termination spaces on Neutral or Ground bar.		

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.80: NQ Standard Aluminum Mechanical Lugs—Main Lugs

Panel Type	Ampere Rating	Part Number	Lug Wire Range*[1]*
NQ	100 A	NQALM1	(1) #6-2/0 Al or Cu
	225 A	NQALM2	(1) #6-350 kcmil Al or Cu
	400 A	NQALM4	(1) 1/0-750 kcmil Al or Cu or (2) 1/0-350 kcmil Al or Cu
	600 A	NQALM6	(2) 1/0-750 kcmil Al or Cu
		NQAL-M6A	(1) 1/0-750 kcmil Al or Cu or (3) 250 kcmil Al-Cu

Table 9.82: NF Standard Mechanical Lugs—Main Lugs

Panel Type	Ampere Rating	Part Number	Lug Wire Range*[1]*
NF	125 A	NFALM1	(1) #6–2/0 Al or Cu
	250 A	NFALM2	(1) #6–350 kcmil Al or Cu
	400 A	NFALM4	(1) #1/0–750 kcmil or (2) #1/0–350 kcmil Al or Cu
	600 A	NFALM6	(2)1/0-750 kcmil Al or Cu
	800 A	NFALM8	(3) 1/0-750 kcmil Al or Cu

NQ and NF Terminal Data

Table 9.81: NQ Standard Aluminum Mechanical Lugs—Main Circuit Breaker

Panel Type	Ampere Rating	Circuit Breaker Type	Lug Wire Range *[2][1]*
NQ	100 A	QOB	(1) #4–#2/0 Al or Cu
	150 A	HD, HG, HJ, HL	(1) #14–#3/0 Al or Cu
	225 A	QB, QD, QG, QJ	(1) #4-300 kcmil Al or Cu
	250 A	JD, JG, JJ, JL	(1) #3/0–350 kcmil Al or Cu *[2]*
	400 A	LA, LH	(1) #1–600 kcmil Al or Cu or (2) #1–250 kcmil Al or Cu
	600 A	LD, LG, LJ, LL	(2) #4/0-500 kcmil Al or Cu

Table 9.83: NF Standard Mechanical Lugs—Main Circuit Breaker

Panel Type	Ampere Rating	Circuit Breaker Type	Lug Wire Range *[2][1]*
NF	125 A	ED, EG, EJ	(1) #14–#2/0 Al or Cu
	150 A	HD, HG, HJ, HL	(1) #14–#3/0 Al or Cu
	250 A	JD, JG, JJ, JL	(1) #3/0–350 kcmil Al or Cu *[2]*
		DJ	(1) #2–600 Cu or #2–500 Al
	400 A	LA, LH	(1) #1–600 kcmil or (2) #1–250 kcmil Al or Cu
	600 A	LD, LG, LJ, LL, LR	(2) #4/0–500 kcmil Al or Cu

[1] (#) = Number of conductors per phase.
[2] The lug range shown is for the highest amperage of the circuit breaker frame shown in the table.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026


Separated Distribution and Split Bus NF and NQ Panelboards



Square D Separated Distribution and Split Bus Panelboards provide compact, affordable options to protect lighting, HVAC, renewable energy, and appliance circuits in buildings.
Separated Distribution Panelboards facilitate Separation of Electrical Circuits for Electrical Energy Monitoring to simplify compliance with Section 130.5-B of California's 2016 Building Energy Efficiency Standards.
NOTE: Refer to Data Bulletin 1600HO1701 for more information.



Special lug pad adaptors allow field removal of cables, for easy field installation of solid core or split CTs for electrical energy measurement, by load type.

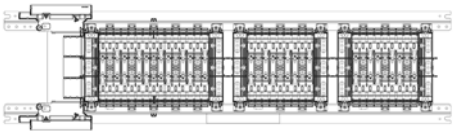

Split Bus panelboards enable configurations of two or three back fed main circuit breakers, with independent branch distribution sections, in a single enclosure.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.84: Separated Distribution Interiors (Cabled Between Sections)

Separated Distribution Interiors (cabled between sections)			Max. No. of Available Pole Spaces			Box Height (in.)	
Product Family	Main Ampacity MLO	Voltage Phases	Main	Split	Split 2	Main Lug Only	Main Circuit Breaker
NQ	225 A	3 Ph	30	18	18	62	74
			18	18	18	62	74
	400 A		30	18	18	80	92
			18	18	18	80	92
NF	250 A	3 Ph	30	18	18	80	92
			18	18	18	74	86

Table 9.85: Bus Bar Interiors (125 A Max. Split Amps)

Split Bus Bar Interiors (125 A Max. Split Amps)			Max. No. of Available Pole Spaces			Box Height (in.)	
Product Family	Main Ampacity MLO	Voltage Phases	Main	Split	Split 2	Main Lug Only	Main Circuit Breaker
NQ	225 A	1, 3 Ph	18	30	—	44	56
		1, 3 Ph	30	18	—	44	56
		1, 3 Ph	30	30	—	44	56
		3 Ph	30	18	18	50	62
NF	250 A	3 Ph	18	30	—	56	68
		1, 3 Ph	30	18	—	56	68
		1, 3 Ph	30	30	—	62	74
		3 Ph	30	18	18	74	86

Square D NF and NQ Separated Distribution and Split Bus Panelboards come Factory Assembled with copper bus, with or without an integral Main Circuit Breaker. A wide variety of configurations may be submitted for quotation via Square D QuoteFAST, and may be quoted or ordered by Authorized Distributors using SE Advantage or E-Way Quote Management.

Features:

- Multiple branch section configurations (pole spaces per section):
  - Split Bus: 18-30; 30-18; 30-30; 30-18-18
  - Separated Distribution: 30-18-18; 18-18-18
- Up to 400 A Mains rating for NQ; up to 250 A Mains in NF panelboards

Notes:

Enclosure width / depth: 20 in. / 5.75 in. minimum.

Subfeed breaker or lugs, feed through lugs not available at top or bottom ends of panel.

- Split Bus - feeder breaker (125 A max.) in downstream split section back-fed from feeder breaker in upstream main or split section.
- Segregated Distribution - cables may be removed in the field. Downstream Split section may have same rating as Main.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



(60 A Max. Branch Circuit Breaker) NQ Application Data

Application: For use on ac only. Meet Federal Specification W-P-115c, Type 1, Class 1. UL Listed.
Service: 1Ø3W, 3Ø3W, 3Ø4W,
3 Grd. "B" Ø—240 Vac max.
AIR: See the QOB(VH) circuit breaker tables in Section 9.
Mains: Type NQ—Bolt-on main lugs: 100 A, 225 A

- Main circuit breaker: 100 A—QOU, 225 A—QB
- See the tables in Section 7 for main circuit breaker interrupt ratings. See catalog for terminal lug data.
- Main circuit breakers with higher interrupt ratings are available as factory assembled panelboards.

Branches: Bolt-on QOB, 60 A maximum. QOB 10-60 A 1-, 2- and 3-pole. See QOB Circuit Breakers for NQ Panelboards, page 9-11 and NQ Factory Assembled Panelboards, page 9-14 for branch circuit breaker terminal data. QOB-VH and QHB branch circuit breakers are also available as factory assembled.

Cabinet: Front—Screw cover. Box—galvanized steel with removable endwalls.

Gutters:

- 100 A—4 in. min. mains end, 3 in. min. opposite mains
- 225 A—10 in. min. mains end, 5 in. min. opposite mains

Table 9.86: NQ Single-Row (Column-width)—240 Vac Bolt-on *[1]*

Max. No. of Poles	Mains Rating	Box and Interior with Solid Neutral (8.625 in. W. x 5 in. D.) (Order branch circuit breakers separately)		Front (Surface Mount)
		Catalog Number	Box Height (In.)	Catalog Number
1 Phase 3-Wire Main Lugs Only				
30	225	NQ830L2C	45	LX45TS
Main Circuit Breaker—2-pole				
20	100	NQ820B1C	40	LX40TS
3 Phase 4-Wire Main Lugs Only				
30	100	NQ8430L1C	40	LX40TS
42	225	NQ8442L2C	58	LX58TS
Main Circuit Breaker—3-pole				
30	100	NQ8430B1C	45	LX45TS
42	225	NQ8442B2C	62	LX62TS

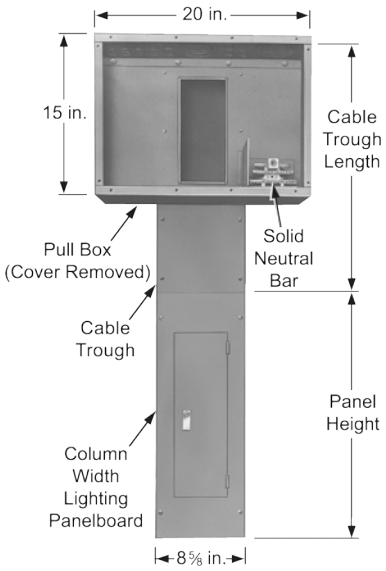


Table 9.87: Cable Troughs and Pull Boxes

Cable Troughs (L=Length) *[2]*		Pull Boxes with Solid Neutral	
L (In.)	8.625 in. x 5 in. Catalog Number	S/N Terminals	Catalog Number
36	MTX836	42	MPX81542
48	MTX848		
56	MTX856		
66	MTX866		

[1] 60 A Maximum Branch—Copper Bus Standard.
[2] Cable troughs are standard with a trough barrier.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



(60 A Max. Branch Circuit Breaker) NF Application Data

Application: For use on ac only. Meet Federal Specification W-P-115c, Type 1, Class 1. UL Listed.

Service: 600Y/347 Vac, 3Ø4W

AIR: See the E-frame circuit breaker tables in Section 9.

Mains: Type NF–Bolt-on main lugs: 125 A, 225 A

- Main circuit breaker: 100 A—HD, 225 A—JD. See the tables in Section 7 for main circuit breaker interrupt rating. See the catalog section for terminal lug data.
- Main circuit breakers with higher interrupt ratings are available as factory assembled panelboards.

Branches: EDB, EGB, or EJB, 60 A maximum. See Table 9.46 E-frame Thermal-magnetic (480Y/277 Vac Max), page 9-25 for branch circuit breaker catalog numbers and terminal data.

Cabinet: Front—Screw cover. Box—galvanized steel with removable endwalls.

Gutters:

- 100 A—4 in. min. mains end, 3 in. min.opposite mains
- 225 A—10 in. min. mains end, 5 in. min. opposite mains

Table 9.88: NF Single-Row (Column-width)—600Y/347 Vac Bolt-on

Max. No. of Poles	Mains Rating	Box and Interior with S/N (9.69 in. W. x 5.625 in. D.)		Front (Surface Mount)
		Catalog Number	Box Height (In.)	Catalog Number
Main Lugs Only—3 Phase 4-Wire				
30	125	NF8430L1C	59	NC59TS
42	225	NF8442L2C	71	NC71TS
Main Circuit Breaker—3-pole				
30	100	NF8430M1C NF8430M1HDC	65	NC65TS
42	225	NF8442M2JDC	85	NC85TS

Table 9.89: Cable Troughs and Pull Boxes

Cable Troughs (L=Length) *[3]*		Pull Boxes with Solid Neutral	
L (In.)	9.69 in. x 5.625 in. Catalog Number *[4]*	S/N Terminals	Catalog Number
36	NTX836	42	MPX81542
48	NTX848		
56	NTX856		
66	NTX866		

[3] Cable troughs are standard with a trough barrier.
[4] Box width = 8.625 in.; width at front, including flange, is 9.69 in.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

New!

NQ and NF MVP Panelboards

NF and NQ Measurement and Verification Panelboards (MVP) panelboards with HDPM6000 high density power metering enable monitoring of the incoming mains and all outgoing feeders in final distribution panelboards. The HDPM6000 head unit serves as a stand-alone power quality meter and the foundational unit for the entire HDPM6000 range of devices. It provides voltage waveform capture, data logging, and communications via Ethernet, Modbus, SNMP, and BACnet. Current transformers (CTs) can be connected to the head unit to monitor the incoming main phase and neutral cables.

HDPM6000S24 CT strips and click-in CTs enable the monitoring of up to 87 outgoing feeder wires in a single panelboard and up to 165 branch circuits in a two-section panelboard.

Factory Assembled System

SE Advantage may be used to select NQ MVP panelboards for applications at 240, 208Y/120, or 120/240 Vac, and may be available in a wide variety of configurations, with main lugs or a main circuit breaker up to 600 A. NF MVP panelboards are available for three-phase and single-phase applications up to 480Y/277 Vac, with lugs or a main circuit breaker up to 800 A.

- Branch circuits up to 125 Amperes (2-pole and 3-pole), up to 70 A 1-pole
- NEMA Type 1, 2, or 3R/5/12 enclosures
- Sub-feed lugs up to 400 A
- Feed-thru lugs up to 600 A
- Sub-feed circuit breakers up to 600 A
- Barriers between line power and electronics for building code compliance

MVP Panelboards support a wide variety of applications and can be easily integrated into an EcoStruxure™ system to manage energy in almost any building.

- Accurately correlate and/or bill for circuit- and process-specific costs, keep users accountable for energy use.
- Gather and analyze consumption data to identify patterns, target energy efficiency measures and verify results, identify waste and opportunities to reduce energy.
- Analyze and interpret power quality data to useful information, improve system-wide performance, and help determine causes of equipment malfunction.
- View current and historic circuit-focused energy bills, compare use across circuits and discover trends over time.
- Support compliance to ASHRAE 90.1, International Energy Conservation Code, California Energy Code (Title 24), Washington State Energy Code, etc.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026





Powerlink available in column width design

Powerlink™ Intelligent Lighting Control Systems

Powerlink intelligent lighting control systems are ideally suited for controlling lighting and other loads in commercial, institutional, and industrial facilities. Such systems are typically used to lower utility cost by switching branch circuits OFF during non-occupied periods when lighting is unnecessary or during peak demand periods when a partial reduction in load can save significant money.

These systems utilize remotely operated circuit breakers to switch branch circuits ON and OFF via a time schedule or by an externally generated signal (typically a low voltage wall switch, photocell, access system, fire alarm or building management system). All Powerlink components mount inside a standard lighting panelboard to provide a compact, space saving installation.

Powerlink intelligent lighting control systems feature a powerful microprocessor based controller that provides system intelligence for 168 remotely operated branch circuits. Primary panelboards contain the control electronics, power supply, and control bus strips for up to 84 branch circuit breakers. Sub-panels extend the capability of the system by allowing remotely operated branch circuit breakers to be operated from the primary controller via a simple, 4-wire, sub-net connection.

Powerlink panels systems have the capability of being networked together and operated from a central workstation or via a remote modem connection. Powerlink software allows users to remotely configure the system, change time schedules, monitor circuit breaker or input status, and override zones and breakers.


BACnet Capability

The Building Automation and Control network (BACnet) communication protocol is incorporated into the Powerlink™ controller design. The addition of the BACnet protocol allows Powerlink panels to be easily integrated into a Building Automation System (BAS) employing this open communication standard without the need for communication bridges or gateways.

Controller

Powerlink NF3500G4 controllers support 'native' BACnet and Ethernet communications.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

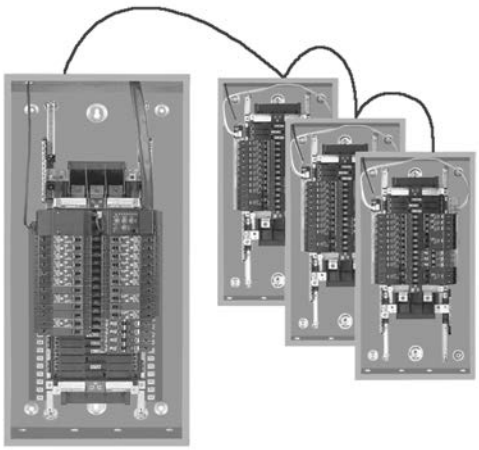

Up to eight panels can be controlled from a single controller.

Powerlink Automated Lighting and Load Control - Factory Assembled System

SE advantage may be used to select 120 Vac, 240 Vac or 480Y/277 Vac Powerlink intelligent lighting control systems:

- Select system type and interior size from Table 9.90 , page 9-40. All Powerlink panels are furnished with either 1 or 2 control bus strips.
- All Powerlink panels use NF type panelboard interiors, boxes, and trims and are suitable for 120 Vac, 240 Vac or 480Y/277 Vac systems.
- Select branch circuit breaker requirements. Powerlink panels can accommodate both ECB-G3 remotely operated circuit breakers and EDB, EGB and EJB standard branch circuit breakers.
- Refer to panelboard section for additional panelboard accessories.
- For complete price, order by description.
- Apply appropriate discount schedule.

240 Vac Factory Assembled System Example:

Powerlink 3500 level system with 250 A MLO panelboard rated for 208Y/120 Vac, 3Ø4W, 10kAIR, Type 1, surface mount with ground bar and (12) 20 A 1-pole bolt-on remote operated circuit breakers.

Table 9.90:

Item	Page No.
System Type: 3500 controller with 12 ckt bus	page 9-41
Panel type: 250 A MLO	page 9-23
Branch circuit breakers: (12) 20 A 1-pole	page 9-40
Ground bar	page 9-28

Table 9.91:

NF3500G4 Controller Feature	Quantity Available[1]
Inputs	
2 - wire	16
2 - wire with status feedback[2]	8
3 - wire	8
Analog Inputs available	4
Time Scheduler	
Independent schedules	64
ON-OFF periods/schedule	999
Special events/holiday periods	64
Automatic daylight savings	X
Sunrise/sunset tracking	X
Network Variables	
Communications inputs accessible	256
Remote sources (per controller)	128
Maximum subscriptions	256
Zones	
Maximum number	256
Maximum number of sources per zone	4
Maximum number of remotely operated circuit breakers (per subnet)	168
Networking	
RS-232 port/RS-485 port	X
Ethernet (100BaseT port)	X
Protocols	
Modbus™ ASCII/RTU	X
Modbus TCP	X
BACnet/IP, BACnet MS/TP	X
DMX512	X

Powerlink™ ECB-G3 Circuit Breakers

Table 9.92: ECB-G3 Circuit Breakers Bolt-On Remotely Operated

Ampere Rating	One-Pole 277 Vac – 14,000 AIR 120 Vac – 65,000 AIR	Two-Pole 480Y/277 Vac – 14,000 AIR 120/240 Vac – 65,000 AIR 240 Vac – 14,000 AIR Ground B Phase	Three-Pole 480Y/277 Vac – 14,000 AIR 240 Vac – 42,000 AIR
15	ECB14015G3[3]	ECB24015G3[3]	ECB34015G3[3]
20	ECB14020G3[3]	ECB24020G3[3]	ECB34020G3[3]
30	ECB14030G3	ECB24030G3	ECB32030G3[4]

Table 9.93: ECB-G3 Circuit Breakers for Emergency Lighting (requires 2-pole spaces)

Ampere Rating	One-Pole 480 Y/277 – 14,000 AIR 240 V – 65,000 AIR
20	ECB142020G3EL


NOTE: All are listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers. UL listed as HID rated for use with high intensity discharge lighting systems. (1) #10–8 Al or (1) #12–8 Cu. Suitable for use with 75°C conductors.



ECB-G3 Circuit Breakers

[1] X = Supported feature.
[2] 7.5 mA maximum load per input terminal.
[3] UL listed as SWD (switching duty) rated.
[4] Rated for 240 Vac only – 42,000 AIR

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

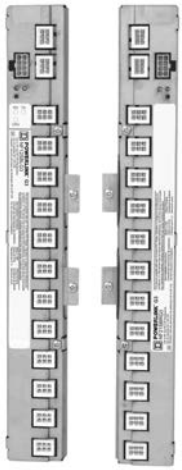

Control Bus



Power Supply



NF3500G4 Controller



Powerlink Software

Powerlink™ Accessories

Table 9.94: Control Bus

Max. No. of Control Circuits	Required Interior Size	Panel Orientation	Catalog No.
12	30	Left	NF12SBLG3
12	30	Right	NF12SBRG3
18	42	Left	NF18SBLG3
18	42	Right	NF18SBRG3
21	54	Left	NF21SBLG3
21	54	Right	NF21SBRG3

Table 9.95: Power Supply

Voltage	Primary Source	Catalog No.
120 V	Panel Bus	NF120PSG3
240 V	Panel Bus	NF240PSG3
277 V	Panel Bus	NF277PSG3
120 V	External	NF120PSG3L
240 V	External	NF240PSG3L
277 V	External	NF277PSG3L

Table 9.96: Cables & Accessories

Description	Catalog No.
Control bus cables	
Harness standard panel	NF2HG3
Sub-net accessories & cables	
Sub-panel address selector*[5]*	NFSELG3
6' sub-net cable	NFSN06
25' sub-net cable	NFSN25

Table 9.97: Miscellaneous Hardware

Description	Catalog No.
Circuit Breaker Handle Padlock (Lock On or Off)	HPAFD

Table 9.98: Software

Description	Catalog No.
LCSV2 Software*[6]*	LCSV2

[5] One address selector required for each sub-panel.
[6] Required for G4 controllers (NF3500G4). Will also support G3 controllers.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



Remote Mount Controller

Remote Mount Controller

Table 9.99: Remote Mount Controller (for externally mounted electronics) Includes NEMA 1 enclosure, NF3500G4 controller, and power supply

Voltage	Catalog No.	Controller Type
120 V	RMC3500G4120	NF3500G4
240 V	RMC3500G4240	
277 V	RMC3500G4277	

NF Panelboards 240 V and 480Y/277 V Factory Assembled Systems—Max. Voltage 480Y/277 Vac

Table 9.100: Branch Circuit Breaker


Powerlink G3—ECB Bolt-On 65 kA AIR@240 Vac, 14 kA AIR@480 Y/277		Standard Breakers—EDB Bolt-On 18 kA AIR 1-pole, 25 kA AIR 2 & 3-pole @ 240 V, 18 kA AIR@480 Y/277		Standard Breakers HIC—EGB Bolt-On 65 kA AIR@240 Vac, 35 kA AIR@480 Y/277		Standard Breakers Extra HIC—EJB Bolt-On 100 kA AIR@240 Vac, 65 kA AIR@480 Y/277	
Voltage	Ampere Rating	Voltage	Ampere Rating	Voltage	Ampere Rating	Voltage	Ampere Rating
240 Vac	15–20 A	480Y/277 Vac	15–60 A	480Y/277 Vac	15–60 A	480Y/277 Vac	15–60 A
	30 A		70 A		70 A		70 A
480Y/277 Vac	15–20 A		80–100 A		80–100 A		80–100 A
	30 A		110–125 A		110–125 A		110–125 A
Space Only			Space Only		Space Only		Space Only

NOTE: All EC, ED, EG and EJ branch circuit breakers are UL Listed as HACR type.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



Powerlink Energy Management (EM) Lighting Control System

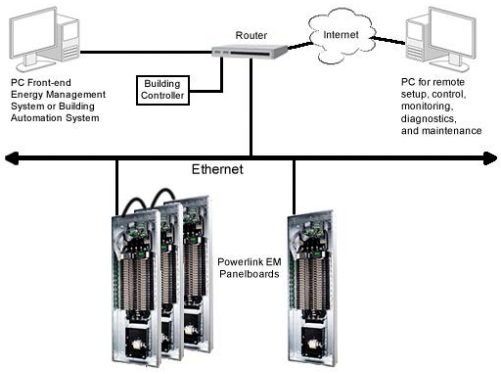

Powerlink MVP (Measurement and Verification Panelboards)

Energy Management (EM) and Control of Lighting and Other Loads

Powerlink MVP panelboards integrate the same features found in the Powerlink 3500G4 level system with energy monitoring and verification of lighting and other branch circuit loads. The PowerLogic™ metering installed in these panelboards may be configured to accurately monitor every branch circuit and the incoming mains.

The Powerlink system reduces electrical energy consumption associated with lighting and other loads by automatically switching loads off during non-occupied periods. The Powerlink system is often ideal for reducing the peak demand by switching unnecessary lights off in response to an automated response signal or when high time-of-day energy tariffs occur.

- Integral individual and optional mains metering to provide utmost flexibility in assurng a sustainable metering and verification program
- Monitors current, voltage, energy consumption, demand, and power factor for complete energy profiling
- Accumulated metering information transmitted via Modbus communications interface
- Data updates occurring within seconds to provide timely preventative maintenance information
- Alarm indication when parameters approach user-configured thresholds
- 16 hard-wired inputs available for connection to devices with physical dry-contacts
- 64 communication inputs available for network connection
- 16 independent time schedules, each can be configured into 24 distinct periods
- 7-day repeating clock with changeable automatic daylight savings time
- Automatic sunrise/sunset tracking with offsets
- 32 special event periods
- 32 remote sources for sharing input status, time schedules, or zone status between controllers
- Full custom logic capabilities, including full Boolean functions and synchronization services
- RS232 and RS485
- Serial communications using Modbus ASCII/RTU, BACnet MS/TP and DMX512 protocols (metering Modbus only)
- Ethernet 100BaseT communications using Modbus TCP and BACnet/IP or Ethernet TCP/IP protocols

Table 9.101: Characteristics, Standards Compliance, and Power Monitoring Specifications

Characteristics	
Operating Temperature	-5° to 40°C (23° to 104°F) (95%RH, non-condensing)
Storage Temperature	-20° to 85°C (-4° to 185°F) (<95%RH, non-condensing)

Regulatory/Standards Compliance

- UL Listed 916, Energy Management Equipment
- FCC Part 15, Class A
- NEC Class 1 and Class 2 Control Circuits
- ESD Immunity: IEC 1000, level 4
- RF Susceptibility: IEC 1000, level 3
- Electrical Fast Transient Susceptibility: IEC 1000, level 3
- Electrical Surge Susceptibility: IEC 1000, level 4 (power line)
- Electrical Fast Transient Susceptibility: IEC 1000, level 3 (interconnection lines)

Power Monitoring Specifications	
General	
Control Power	100–277 Vac
Frequency	50/60 Hz
Sampling Frequency	2560 Hz
Update Rate	1.6 seconds per panelboard
Overload Capability	10 kAIC
Ribbon Cable Support	Up to 20 ft.
Operating Temperature	0° to 60°C (32°C to 122°F) (<90%RH, non-condensing)
Storage Temperature	-40° to 70°C (-40° to 158°F)
Maximum Operating Altitude	2000 m (6562 ft.)
Accurancy	
Current Monitoring	0.25 A to 100A: 3% of reading from 0.25 A to 2 A; 2% of reading from 2 A to 100 A
Auxiliary Inputs	2% of reading from 1% to 10% of rated current; 1% of reading from 10% to 100% of rated current (0 to 0.333 Vac)
Voltage Input	90–277 Vac; 1% of reading from 90–277 L-N (models BCPMA and BCPMB only)
Power	4% of reading from 0.25 A to 2 A; 3% of reading 2 A to 100 A*[7]* (models BCPMA and BCPM only)
Network Communications	
Serial	Modbus™ RTU, Modbus TCP
Ethernet	TCP/IP
BACnet	BACnet IP
SNMP	SNMP v2

[7] Recommended for application where EMS software monitoring is not provided.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

I-Line Combo Panelboard

Table 9.102: Interior Boxes and Fronts — Includes Solid Neutral

I-Line Mounting Space	Part Number	Panelboard Ampacity	Single/ Duplex	Lighting Section Type	Lighting Section Amperage	Lighting Section Circuits	Busing	Phase	Ground Bar	Box	4 Piece Trim Without Door	Trim with Door	NEMA 3R/5/12 (Includes Front)
18	CP18864N3Q2C	400	S	NQ	225	30	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N3Q2	400	S	NQ	225	30	Al	3	PK32DGTA	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N4Q2C	400	S	NQ	225	42	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N4Q2	400	S	NQ	225	42	Al	3	PK32DGTA	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N3F2C	400	S	NF	250	30	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N3F2	400	S	NF	250	30	Al	3	PK32DGTA	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N4F2C	400	S	NF	250	42	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18864N4F2	400	S	NF	250	42	Al	3	PK32DGTA	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP118864N4Q4C	400	S	NQ	400	42	Cu	1	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18866N3Q4C	600	S	NQ	400	30	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18866N4Q4C	600	S	NQ	400	42	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP118866N4Q6C	600	S	NQ	600	42	Cu	1	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18866N3F4C	600	S	NF	400	30	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
18	CP18866N4F4C	600	S	NF	400	42	Cu	3	PK32DGTACU	HC2686DB	HC2686T( ) 4P	HC2686T( ) HR	HC2686WP
22.5	CP23734N3Q2C	400	S	NQ	225	30	Cu	3	PK32DGTACU	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP23734N3Q2	400	S	NQ	225	30	AL	3	PK32DGTA	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP123734N3Q4C	400	S	NQ	400	30	Cu	1	PK32DGTACU	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP23734N3F2C	400	S	NF	250	30	Cu	3	PK32DGTACU	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP23734N3F2	400	S	NF	250	30	AL	3	PK32DGTA	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP23736N3Q4C	600	S	NQ	400	30	Cu	3	PK32DGTACU	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP23736N3F4C	600	S	NF	400	30	Cu	3	PK32DGTA	HC3273DB9	HCM73T( )V	HCM73T( )VD	N/A
22.5	CP23914N4Q2C	400	S	NQ	225	42	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N4Q2	400	S	NQ	225	42	Al	3	PK32DGTA	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N5Q2C	400	S	NQ	225	54	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N5Q2	400	S	NQ	225	54	Al	3	PK32DGTA	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N4F2C	400	S	NF	250	42	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N4F2	400	S	NF	250	42	Al	3	PK32DGTA	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N5F2C	400	S	NF	250	54	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23914N5F2	400	S	NF	250	54	Al	3	PK32DGTA	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23916N4Q4C	600	S	NQ	400	42	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23916N5Q4C	600	S	NQ	400	54	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP123916N5Q4C	600	S	NQ	400	54	Cu	1	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23916N4F4C	600	S	NF	400	42	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23916N5F4C	600	S	NF	400	54	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP123916N5Q6C	600	S	NQ	600	54	CU	1	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23916N44Q4C	600	D	NQ	400	42/42	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP123916N44Q4C	600	D	NQ	400	42/42	Cu	1	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
22.5	CP23916N53Q4C	600	D	NQ	400	54/30	Cu	3	PK32DGTACU	HC3291DB9	HCM91T( )V	HCM91T( )VD	N/A
31.5	CP32866N44Q4C	600	D	NQ	400	42/42	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32866N53Q4C	600	D	NQ	400	54/30	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32866N4BQ4C	600	D	NQ	400	42/B*	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP132866N44Q6C	600	D	NQ	600	42/42	Cu	1	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32866N44F4C	600	D	NF	400	42/42	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32866N53F4C	600	D	NF	400	54/30	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32866N4BF4C	600	D	NF	400	42/B*	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N44Q6C	800	D	NQ	600	42/42	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP132868N44Q6C	800	D	NQ	600	42/42	Cu	1	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N53Q6C	800	D	NQ	600	54/30	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N3BQ6C	800	D	NQ	600	30/B[1]	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N4BQ6C	800	D	NQ	600	42/B[1]	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP132868N4BQ6C	800	D	NQ	600	42/B[1]	Cu	1	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N5BQ6C	800	D	NQ	600	54/B[1]	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N44F6C	800	D	NF	600	42/42	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N53F6C	800	D	NF	600	54/30	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N3BF6C	800	D	NF	600	30/B[1]	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N4BF6C	800	D	NF	600	42/B[1]	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP
31.5	CP32868N5BF6C	800	D	NF	600	54/B[1]	Cu	3	PK32DGTACU	HC4486DB	HCR86T( )	HCR86T( )D	HC4486WP

[1] B denotes a blank space on the right hand side of a duplex panel for future expansion

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



Table 9.103: RTI Cabled Lighting Section Kit for I-Line Combo Panelboard

Part Number	Description	MLO Panelboard Ampacity	Lighting Section Type	Lighting Section Circuits
NFICRT418L1C	NF Lighting Section Kit	125	NF	18 dual
NFICRT442L2C	NF Lighting Section Kit	250	NF	42
NFICRT442L4C	NF Lighting Section Kit	400	NF	42
NFICRT442L6C	NF Lighting Section Kit	600	NF	42
NQICRT418L1C	NQ Lighting Section Kit	100	NQ	18 dual
NQICRT442L2C	NQ Lighting Section Kit	225	NQ	42
NQICRT442L4C	NQ Lighting Section Kit	400	NQ	42
NQICRT442L6C	NQ Lighting Section Kit	600	NQ	42
NQICRT418C1C	Contactor with 18 Circuit NQ Lighting Section Kit	100	NQ	18
NFICRT418C1C	Contactor with 18 Circuit NF Lighting Section Kit	125	NF	18

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

I-Line Panelboard




HCJ
Box Size:
32 in. Wide, 9.5 in. Deep, NEMA Type 1



HCP SU
Box Size:
26 in. Wide, 9.5 in. Deep, NEMA Type 1

TYPE HCJ
250 A max. branch circuit breaker
BD, BG, BJ, QB, QD, QG, QJ, HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR

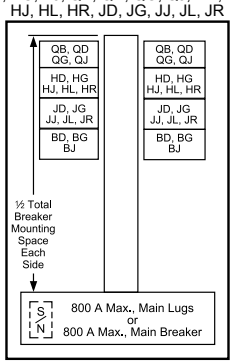

TYPE HCP-SU
800 A max. main circuit breaker
600 A max. branch circuit breaker
BD, BG, BJ, LA, LG, LJ, LL, LH, LR, MG, MJ, PG, PJ, PL, PGC, PJC, PLC[2], QB, QD, QG, QJ, HD, HG, HJ, HL, JD, JG, JJ, JL




Table 9.104: Interiors, Boxes and Fronts

Total Circuit Breaker Mounting Space (In.)	Mains Ampere Rating	Interior Assembly (Less Branch Circuit Breakers)	Front [3]		Box [4]		Box Height (In.)
			4 Piece Trim Without Door	Trim With Door[4]	Type 1	NEMA 3R/5/12 [5] (Includes Front)	
		Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	
HCJ Main Lugs Only **3-pole—Suitable for use as service equipment when provided with a main circuit breaker and service barrier kit.**							
27	400 A	HCJ14484	HCM48T( )	HCM48T( )D	HC3248DB9	HCJ3248WP	48
	600 A	HCJ14484CU					
		HCJ14486					
		HCJ14486CU					
	800 A	HCJ14488					
45	400 A	HCJ23734	HCM73T( )	HCM73T( )D	HC3273DB9	HCJ3273WP	73
	600 A	HCJ23736					
	800 A	HCJ23738					
63	400 A	HCJ32734					
		HCJ32734CU					
	600 A	HCJ32736					
		HCJ32736CU					
	800 A	HCJ32738					
99	400 A	HCJ50914	HCM91T( )	HCM91T( )D	HC3291DB9	HCJ3291WP	91
	600 A	HCJ50916					
	800 A	HCJ50918					
HCJ Main Circuit Breaker *[6] [7]* **Includes 3-pole, vertically mounted main circuit breaker**							
27	400 A	HCJ14734M	HCM73T( )	HCM73T( )D	HC3273DB9	HCJ3273WP	73
36	600 A	HCJ18736MP					
	800 A	HCJ18738MP					
45	400 A	HCJ23734M					
72	600 A	HCJ36916MP	HCM91T( )	HCM91T( )D	HC3291DB9	HCJ3291WP	91
82	400 A	HCJ41914MCU					
		HCJ41914M					
72	800 A	HCJ36918MP					
HCP-SU *[8]* **Universal Single Row Main Lugs or Main Circuit Breaker** *[7]* **3-pole—Suitable for use as service equipment when provided with a main circuit breaker and service barrier kit.** *[9]* **For main circuit breaker panel, order plug-on I-Line type PG, PJ, PL, MG, or MJ circuit breakers from page 9-60 through page 9-61 and back-fed as the main breaker (order solid neutral from page 9-49).**							
54	800	HCP54868SU	**HC2686T( )4P**	**HC2686T( ) HR***[10]*	HC2686DB	HC2886WP	86

[2] PG, PJ, PL circuit breakers are available with both thermal-magnetic equivalent and MicroLogic trip. The MicroLogic circuit breakers are available 80% and 100% rated. “C” suffix denotes a 100% rating.
[3] Add “F” for flush mount, “S” for surface mount.
[4] For Type 1 applications, order interior, front, and box. For Type 3R/5/12 applications, order interior and box only. The front is included with the box.
[5] Remove drain screws for Type 3R rating.
[6] Bottom feed standard.
[7] Circuit breaker interrupt ratings, see Table 9.128 Interrupting Ratings Codes (kA), page 9-57.
[8] For main lugs panel, order sub-feed lug kit and back-fed as main lugs.
[9] Suitable for use as service equipment if equipped with an integral main circuit breaker or when not more than six main disconnecting means are provided and the panelboard is not used as a lighting and appliance branch circuit panelboard. (Not applicable in Canada)
[10] Hinged trim with door.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026




TYPE HCP
Box Size:
42 in. Wide, 9.5 in. Deep, NEMA Type 1



TYPE HCR-U Universal Mains
Box Size:
44 in. Wide, 9.5 in. Deep, NEMA Type 1

TYPE HCP
800 A max. branch circuit breaker
BD, BG, BJ, QB, QD, QG, QJ, HD, HG, HJ, HL, HR, JD*[11]*, JG, JJ, JL, JR, LA, LH, LG, LJ, LL, LR, MG, MJ, PG, PJ, PL, PGC, PJC, PLC *[12]*



TYPE HCR-U Universal Mains
1200 A max. branch circuit breaker
BD, BG, BJ, QB, QD, QG, QJ, HD, HG, HJ, HL, HR, JD*[11]*, JG, JJ, JL, JR, LA, LH, LG, LJ, LL, LR, MG, MJ, PG, PJ, PK, PL, RG, RJ, RK, RL, PGC, PJC, PKC, PLC, RGC, RJC, RKC, RLC*[13][12]*




Table 9.105: (1200 A Interiors Include solid neutral, all others without solid neutral)
[14]

Total Circuit Breaker Mtg. Space (In.)	Mains Amp. Rating	Max. No. of MJ, PL, RL Circuit Breakers	Interior Assembly (Less Branch Circuit Breakers)	Front *[15]*		Box *[16]*	Box Height (In.)
				4 Piece Trim Without Door *[17]*	Trim With Door		
			Catalog Number	Catalog Number	Catalog Number	Catalog Number	
HCP **Main Lugs Only—3-pole** Suitable for use as service equipment when provided with a main circuit breaker and service barrier kit.							
27	400	1PL	HCP14504	HCW50T( )	HCW50T( )D	HC4250DB	50
	600		HCP14506				
	800		HCP14508				
	1200		HCP145012N				
45	400	2PL	HCP23594	HCW59T( )	HCW59T( )D	HC4259DB	59
	600		HCP23596				
	800		HCP23598				
	1200		HCP235912N				
63	400	3PL	HCP32684	HCW68T( )	HCW68T( )D	HC4268DB	68
	600		HCP32686				
	800		HCP32688				
	1200		HCP326812N				
99	400	5PL	HCP50864	HCW86T( )	HCW86T( )D	HC4286DB	86
	600		HCP50866				
	800		HCP50868				
	1200		HCP508612N				
HCP **Main Circuit Breaker***[18]*—Includes 3-pole Vertically mounted main circuit breaker—Suitable for use as service equipment with service barrier kit.*[19]***For main circuit breaker panel, order plug-on I-Line type PG, PJ, PL, MG, or MJ circuit breakers from page 9-60 through page 9-61 and back-fed as the main breaker (order solid neutral from page 9-49).**							
36	600	2LC	HCP18686M	HCW68T( )	HCW68T( )D	HC4268DB	68
	800		HCP18688M				
72	600	4LC	HCP36866M	HCW86T( )	HCW86T( )D	HC4286DB	86
	800		HCP36868M				
HCR-U **Universal Main Lugs or Main Circuit Breaker** *[20]* **—3-pole** Suitable for use as service equipment when provided with a main circuit breaker and service barrier kit. For Main Lugs panel, order sub-feed lug kit catalog number S33930 and back-fed as main lugs. For Main Circuit Breaker panel, order plug-on I-Line type PG, PJ, PL, RGC, RJC, or RLC *[20]* circuit breakers from page 9-61 and page 9-62, and back-fed as the main circuit breaker. (Order solid neutral separately)							
108 *[21]*	1200	6PL or 3RLC	HCR548612U	HCR86T( ) *[22]*	HCR86T( )D	HC4486DB	86

[11] JD circuit breakers with field installable ground fault kits may be mounted in type HCP, HCP-SU, and HCR-U panelboards as shown, and require L-frame mounting space.
[12] PG, PJ, and PL circuit breakers are available with both thermal-magnetic equivalent and MicroLogic trip. The MicroLogic circuit breakers are available 80% and 100% rated. “C” suffix denotes a 100% rating.
[13] When RL main circuit breakers with equipment ground fault are applied on a 3Ø4W system, order solid neutral catalog number HCR12SNCT. The HCR12SNCT includes a neutral current transformer.
[14] Order solid neutral from page 9-49.
[15] Add “F” for flush mount, “S” for surface mount.
[16] For 42 in. wide weatherproof enclosures, see Type 3R/5/12 Enclosures, page
[17] Add-on door kit available. Example: For HCW50TS trim kit, order HCW50D door kit.
[18] Circuit breaker interrupt ratings, see Table 9.128 Interrupting Ratings Codes (kA), page 9-57.
[19] Suitable for use as service equipment if equipped with an integral main circuit breaker or when not more than six main disconnecting means are provided and the panelboard is not used as a lighting and appliance branch circuit panelboard. (Not applicable in Canada).
[20] When RL main circuit breakers with equipment ground fault are applied on a 3Ø4W system, order solid neutral catalog number HCR12SNCT. The HCR12SNCT includes a neutral current transformer.
[21] 15 in. of mounting space is taken up by the back-fed main lug kit or RG, RJ, RL main circuit breaker, leaving 93 in. of branch circuit breaker mounting space.
[22] Add-on door kit available. Example: For HCR86TS trim kit, order HCW86D door kit.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.106: Main Circuit Breaker Interiors —Standard Frame Types *[23]*

Main Circuit Breaker Ampacity	Panelboard Type	Factory Supplied Main Circuit Breaker
400	HCJ	LAP36400MB
600 or 800	HCJ, HCP	MGP36600 or MGP36800

Table 9.107: Type 3R/5R/12R Enclosures

Catalog Number	Interior Type	Dimensions (In.)		
		H	W	D
HC4250WP	HCP	50	43.19	12.95
HC4259WP	HCP	59	43.19	12.95
HC4268WP	HCP	68	43.19	12.95
HC4286WP	HCP	86	43.19	12.95
HC4486WP	HCR-U	86	45.19	14.63

Table 9.108: Standard Copper Bus Interiors

Type	Main Ampacity
HCJ, HCP-SU	800
HCP, HCR-U	800 and Above

NOTE: Merchandised copper interiors are not available in all ampacities.

Table 9.109: Circuit Breaker / Sub-feed Lug Kit Mounting Space Requirement

Type of Circuit Breaker	Maximum Ampacity	No. of Poles	Inch Mounting Requirements
BD, BG, BJ	125	1	1.5
BD, BG, BJ		2	3
BD, BG, BJ		3	4.5
HD, HG	150	2	3
HD, HG		3	4.5
HJ, HL, HR		2, 3	4.5
JD, JG, JJ, JL, JR, SL250	250	2, 3	4.5
LA, LH, SL400	400		6
LG, LJ, LL, LR	600		6
I-Line Enable	N/A		6
MG, MJ, SL800, PGC, PJC, PLC	800		9
PG, PJ, PL, S33931	1200		9
QB, QD, QG, QJ	225	2	3
QB, QD, QG, QJ		3	4.5
RG, RJ, RL, RGC, RJC, RLC, S33930	1200	2, 3	15

[23] Circuit breaker interrupt ratings, see Table 9.128 Interrupting Ratings Codes (kA), page 9-57.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

I-Line Merchandised Panelboard Accessories


Blank Fillers


Equipment Ground Bar


Solid Neutral

Table 9.110: I-Line Merchandised Panelboard Accessories

	Description	Catalog No.
Blank Filler Kit—1.5 in.*[24]* (One kit contains quantity of 3 blank fillers.)		HNM1BL
Blank Filler Kit—4.5 in.*[24]* (One kit contains quantity of 5 blank fillers.)		HNM4BL
Equipment Ground Bar Kits—HCJ, HCP, HCP-SU (single row), HCR-U		PK32DGTA
Blank Extensions (For replacement purposes)		
 Blank Extensions	1.5 in. for mounting on wide side of I-Line panelboard used with HNM1BL and HNM4BL as a filler plate on the wide side of the panel (HCP, HCP-SU and HCRU). Do not use with MicroLogic trip unit as this filler will cover the trip unit.	HLW1BL (Kit contains quantity of 3.)
	4.5 in. for mounting on wide side of I-Line panelboard used with HNM1BL and HNM4BL as a filler plate on the wide side of the panel (HCP, HCP-SU and HCRU). Do not use with MicroLogic trip unit as this filler will cover the trip unit.	HLW4BL (Kit contains quantity of 5.)
	1.5 in. for mounting on narrow side of I-Line panelboard used with HNM1BL and HNM4BL as a filler plate on the narrow side of the panel. Do not use with MicroLogic trip unit as this filler will cover the trip unit.	HLN1BL (Kit contains quantity of 3.)
	4.5 in. for mounting on narrow side of I-Line panelboard used with HNM1BL and HNM4BL as a filler plate on the narrow side of the panel. Do not use with MicroLogic trip unit as this filler will cover the trip unit.	HLN4BL (Kit contains quantity of 5.)
	4.5 in. for mounting on wide side of I-Line panelboard. For use with PowerPacT H and J circuit breakers mounted on the wide side of the panel so that electronic trip unit can be accessed.	HLW4EBL (Kit contains quantity of 5.)
	4.5 in. for mounting on narrow side of I-Line panelboard. For use with PowerPacT H and J circuit breakers mounted on the narrow side of the panel so that electronic trip unit can be accessed.	HLN4EBL (Kit contains quantity of 5.)

[24] Blank extension and blank filler pricing is per kit. See note on kit number for number included in each kit.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.111: UL Service Entrance Barriers Kits for I-Line Panelboards with Back-fed Main Circuit Breaker *[25]*

I-Line Panelboard Type	Back-fed Main Circuit Breaker	Catalog Number *[26]*
HCJ	H, J	ILBFMHCJHULC
HCP, HCP-SU	H, J	ILBFMHCPHJULC
	LA, LH, PowerPacT L	ILBFMHCPLULC
	M, P	ILBFMHCPMPULC
HCR	LA, LH, PowerPacT L	ILBFMHCRLULC
	M	ILBFMHCRMULC
	P	ILBFMHCRPULC
	R	ILBFMHCRRULC

NOTE: Barriers are required by 2017 version of NFPA70—National Electric Code. Both the 2017 UL67 and 2017 NFPA70 allow an exception for service entrance panelboards with more than one disconnect.

Table 9.112: Solid Neutral Lug Quantities and Sizes

Solid Neutral Assembly	Interior Type	Ampere Rating	Configuration	Main Terminal Wire Range	Branch Terminal Wire Range
HC2SN	HCJ	225 A	Aluminum Lugs, Aluminum Neutral Plate	(1) 6 - 300 kcmil	(1) 6 - 300, (9) #1/0 - 14, (45) #4 - 14
HC4SN*[27]*	HCJ	400 A		(2) 4 - 600 kcmil	(7) 6 - 350, (45) #4 - 14
HC6SN*[27]*	HCJ	600 A		(2) 4 - 600 kcmil	(7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HC8SN*[27]*	HCJ	800 A		(4) 3/0 - 750 kcmil	(7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCPSU8SN*[28]*	HCPSU	800 A		(4) 3/0 - 600 kcmil	(4) 3/0 - 600, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14,
HCW4SN*[29]*	HCP	400 A		(2) 4 - 600 kcmil	(2) 4 - 600, (7) 6 - 350, (45) #4 - 14
HCW6SN*[29]*	HCP	600 A		(2) 4 - 600 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCW8SN*[29]*	HCP	800 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCW12SN*[29]*	HCP	1200 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCWM12SN*[30]*	HCRU	1200 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HC6SNALCU	HCJ	600 A	Aluminum Lugs, Copper Neutral Plate	(2) 4 - 600 kcmil	(7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HC8SNALCU	HCJ	800 A		(4) 3/0 - 750 kcmil	(7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCPSU8SNALCU	HCPSU	800 A		(4) 3/0 - 600 kcmil	(4) 3/0 - 600, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCP4SNALCU	HCP	400 A		(2) 4 - 600 kcmil	(2) 4 - 600, (7) 6 - 350, (45) #4 - 14
HCP6SNALCU	HCP	600 A		(2) 4 - 600 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCP8SNALCU	HCP	800 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCP12SNALCU	HCP	1200 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HCR12SNALCU	HCRU	1200 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (34) #4 - 14
HC6SNCU	HCJ	600 A	Copper Lugs, Copper Neutral Plate	(2) 4 - 600 kcmil	(7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HC8SNCU	HCJ	800 A		(4) 3/0 - 750 kcmil	(7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HCPSU8SNCU	HCPSU	800 A		(4) 3/0 - 600 kcmil	(4) 3/0 - 600, (7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14,
HCW4SNCU	HCP	400 A		(2) 4 - 600 kcmil	(2) 2 - 600, (7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HCW6SNCU	HCP	600 A		(2) 4 - 600 kcmil	(2) 2 - 600, (7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HCW8SNCU	HCP	800 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HCP12SNCU	HCP	1200 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HCW12SNCU	HCP	1200 A		(8) 250 - 500 kcmil (crimp)	(7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14
HCR12SNCU	HCRU	1200 A		(4) 3/0 - 750 kcmil	(4) 3/0 - 750, (7) 6 - 350, (9) #1/0 - 14, (28) #4 - 14

Table 9.113: Panelboard Adapter Kits

Crimp Lug Adapter Kits *[31]*	I-Line Panelboard Type	
	HCJ	HCP, HCR-U *[32]*
400 A	HCM400VCA	HCW400VCA
600 A	HCM600VCA	HCW600VCA
800 A	HCM800VCA	HCW800VCA
1200 A	—	HCW1200VCA

[25] For US only.
[26] For panelboards manufactured after 1 January 2017.
[27] Used on Type HCJ.
[28] Used on Type HCP-SU (single row).
[29] Used on 400 A, 600 A, 800 A, and 1200 A HCP (main lugs), and 600 A and 800 A (main circuit breaker).
[30] Used on Type HCR-U.
[31] For use with MLO panel, order VCEL lugs seperately.
[32] Not for use with P- or R-frame circuit breakers or sub-feed kits S33930 or S33931.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.114: Box Extensions

	Catalog Number	Interior Type	Extension
	HC2609DEX (F or S)	HCP-SU	9 in.
	HC3209EX (F or S)	HCJ	9 in.
	HC4212DEX (F or S)	HCP	12 in.
	HC4406DEX (F or S)	HCR-U	6 in.
	HC4412DEX (F or S)	HCR-U	12 in.

The Drip Hoods listed below are intended for use on surface mounted HC boxes only. Select the appropriate Drip Hood based on Interior Type, Width, and Depth from the following table. The Drip Hoods are designed to fit on the outside of the boxes. The Drip Hood will increase the enclosure rating of the box from Type 1 to Type 2. Reference Instruction Bulletin 80043-401-03.

Table 9.115: I-Line PanelBoard Drip Hood Kits

Catalog Number	Interior Type	Dimensions (In.)	
		Width	Depth
HCT2DH32D9	HCJ	32	9.5
HCT2DH42	HCP	42	9.5
HCT2DH26D9	HCP-SU	26	9.5
HCT2DH47	HCP (L5)*[33]*	47	9.5
HCT2DH56	HCP (PL)*[34]*	56	9.5
HCT2DH42D12	HCP (DB)*[35]*	42	12.5
HCT2DH44	HCR-U	44	9.5
HCT2DH49	HCR-U (L5)*[33]*	49	9.5
HCT2DH58	HCR-U (PL)*[34]*	58	9.5
HCT2DH44D12	HCR-U (DB)*[35]*	44	12.5

[33] Box Types noted with (L5) are standard width boxes with an additional 5 in. side extension.
[34] Box Types noted with (PL) are standard width boxes with an additional 14 in. PowerLogic extension.
[35] Box Types noted with (DB) have additional box depth.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



Sub-feed Lug Kits

Table 9.116: Sub-feed Lug Kits *[36][37][38]*

Ampere Rating	Height		Catalog Number	Max. Short Circuit System Ratings Available RMS Symmetrical Amperes			Protected by Circuit Breaker*[39]*	For Use in I-Line Panelboard Types
	In.	(mm)		240 Vac	480 Vac	600 Vac		
250 A	5	114	SL250	200,000	200,000	100,000	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR	HCJ, HCP, HCP-SU, HCR-U
400 A	6	152	SL400 *[40]*	65,000	35,000	25,000	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR, LA, LH,, LG, LJ, LL, LR (LR not available in HCJ) ("L" FRAME 400 A max.)	HCP, HCP-SU, HCR-U (wide side only)
800 A	9	229	SL800M5	200,000	200,000	100,000	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR, LA, LH, MG, MJ, PG, PJ, PK, PL, LG, LJ, LL, LR (LR not available in HCJ)	HCJ, HCP, HCP-SU, HCR-U
1200 A*[41]*	15	381	S33930	125,000	100,000	50,000	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR, LA, LH, MG, MJ, PG, PJ, PK, PL, RG, RJ, RL, RK, LG, LJ, LL, LR	HCR-U (HCP, HCP-SU)*[41]*
	9	229	SL1200P5 SL1200P6 SL1200P7	125,000	100,000	65,000	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR, LA, LH, MG, MJ, PG, PJ, PK, PL, RG, RJ, RL, RK, LG, LJ, LL, LR	

Table 9.117: Sub-feed Lug kit terminal data

Catalog No. (Prefix)	No. Poles	Ampere Rating	Standard Lug Wire Size *[42]*
SL100	3	100	#14–1/0 AWG Cu or #12–1/0 AWG Al
SL250	3	250	(1) #4 AWG–300 kcmil
SL400	3	400	(1) #1 AWG–600 kcmil or 2– #1 AWG–250 kcmil
SL800M5	3	800	(3) #3/0 AWG–500 kcmil
S33930	3	1200	(4) #3/0 AWG–600 kcmil
SL1200P5	3	1200	(4) #3/0 AWG–500 kcmil
SL1200P6	3	1200	(3) 350–600 kcmil
SL1200P7	3	1200	(3) #3/0 AWG–750 kcmil
S33931	3	1200	(4) #3/0–600 kcmil Al/Cu

[36] Plug-on in same manner as a branch circuit breaker
[37] For other ratings, see the latest edition of I-Line Information Manual, #80043-309-20.
[38] cannot be used in HCJ panelboards due to inadequate wire bending space.
[39] Maximum SCCRs shown in this table are not available with all circuit breakers. Refer to Instruction Bulletin 80043-309-20 for the SCCR available for each circuit breaker in I-Line panelboards. PL is not allowed with 600 Vac.
[40] SL400 cannot be used in HCJ panelboards due to inadequate wire bending space.
[41] S33930, SL1200P5, SL1200P6, SL1200P7, Sub-feed Lug Kits are rated 1200 A and may be applied to 1200 ampere loads when installed in the HCR-U panelboards. However, when installed in the HCP and HCP-SU panelboards, they are only rated 800 amperes maximum due to restricted wire bending space. The addition of extended gutter spaces will not qualify these Sub-feed Lug Kits for higher amperage ratings without the completion of formal thermal analysis and probable testing. Must be protected by a circuit breaker rated not more than 1200 amperes.
[42] Unless otherwise specified, wire sizes apply to both aluminum and copper conductors.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

PowerPacT™ B-frame, Thermal Magnetic

Accessories are located in Section 7 PowerPacT Accessories.

Table 9.118: B-frame Interrupting Ratings

	Interrupting Rating			
	D	G	J	K
240 Vac	25 kA	65 kA	100 kA	100 kA
480/277 Vac	18 kA	35 kA	65 kA	65 kA
480 Vac	18 kA	35 kA	65 kA	65 kA
600Y/347 Vac	14 kA	18 kA	25 kA	65 kA
1P 125 Vdc	10 kA	20 kA	50 kA	—
2–3P 250 Vdc	10 kA	20 kA	50 kA	—



2-pole, 3 in. (6 mm) Mounting Height



3-pole, 4.5 in. (114 mm) Mounting Height

Table 9.119: PowerPacT B-frame, 125 A max, Thermal Magnetic UL Circuit Breaker (PowerPacT B-frame 1–pole branch circuit breakers utilize 1.5 in. of I-Line mounting space, 2–pole branch circuit breakers utilize 3 in. of I-Line mounting space and 3–pole B-frame circuit breakers utilize 4.5 in. of I-Line mounting space.) Refer to Table 9.121 Phase Options Suffix Numbers for B/Q-frame Circuit Breakers, page 9-54 Example for phase options and suffix information.

D - SCCR					
	1-pole	2-pole	3-pole	Fixed AC Magnetic Trip	
Amps	277 Vac	480/277 Vac	480/277 Vac	Hold	Trip
15	BDA14015	BDA24015Y	BDA34015Y	400 A	600 A
20	BDA14020	BDA24020Y	BDA34020Y	400 A	600 A
25	BDA14025	BDA24025Y	BDA34025Y	400 A	600 A
30	BDA14030	BDA24030Y	BDA34030Y	400 A	600 A
35	BDA14035	BDA24035Y	BDA34035Y	400 A	600 A
40	BDA14040	BDA24040Y	BDA34040Y	400 A	600 A
45	BDA14045	BDA24045Y	BDA34045Y	400 A	600 A
50	BDA14050	BDA24050Y	BDA34050Y	480 A	720 A
60	BDA14060	BDA24060Y	BDA34060Y	640 A	960 A
70	BDA14070	BDA24070Y	BDA34070Y	640 A	960 A
80	BDA14080	BDA24080Y	BDA34080Y	800 A	1200 A
90	BDA14090	BDA24090Y	BDA34090Y	1000 A	1500 A
100	BDA14100	BDA24100Y	BDA34100Y	1000 A	1500 A
110	BDA14110	BDA24110Y	BDA34110Y	1000 A	1500 A
125	BDA14125	BDA24125Y	BDA34125Y	1000 A	1500 A
G - SCCR					
	1-pole	2-pole	3-pole	Fixed AC Magnetic Trip	
Amps	277 Vac	480/277 Vac	480/277 Vac	Hold	Trip
15	BGA14015	BGA24015Y	BGA34015Y	400 A	600 A
20	BGA14020	BGA24020Y	BGA34020Y	400 A	600 A
25	BGA14025	BGA24025Y	BGA34025Y	400 A	600 A
30	BGA14030	BGA24030Y	BGA34030Y	400 A	600 A
35	BGA14035	BGA24035Y	BGA34035Y	400 A	600 A
40	BGA14040	BGA24040Y	BGA34040Y	400 A	600 A
45	BGA14045	BGA24045Y	BGA34045Y	400 A	600 A
50	BGA14050	BGA24050Y	BGA34050Y	480 A	720 A
60	BGA14060	BGA24060Y	BGA34060Y	640 A	960 A
70	BGA14070	BGA24070Y	BGA34070Y	640 A	960 A
80	BGA14080	BGA24080Y	BGA34080Y	800 A	1200 A
90	BGA14090	BGA24090Y	BGA34090Y	1000 A	1500 A
100	BGA14100	BGA24100Y	BGA34100Y	1000 A	1500 A
110	BGA14110	BGA24110Y	BGA34110Y	1000 A	1500 A
125	BGA14125	BGA24125Y	BGA34125Y	1000 A	1500 A
J - SCCR					
	1-pole	2-pole	3-pole	Fixed AC Magnetic Trip	
Amps	347 Vac	600Y/347 Vac	600Y/347 Vac	Hold	Trip
15	BJA16015	BJA26015	BJA36015	400 A	600 A
20	BJA16020	BJA26020	BJA36020	400 A	600 A
25	BJA16025	BJA26025	BJA36025	400 A	600 A
30	BJA16030	BJA26030	BJA36030	400 A	600 A
35	BJA16035	BJA26035	BJA36035	400 A	600 A
40	BJA16040	BJA26040	BJA36040	400 A	600 A
45	BJA16045	BJA26045	BJA36045	400 A	600 A
50	BJA16050	BJA26050	BJA36050	480 A	720 A
60	BJA16060	BJA26060	BJA36060	640 A	960 A
70	BJA16070	BJA26070	BJA36070	640 A	960 A
80	BJA16080	BJA26080	BJA36080	800 A	1200 A
90	BJA16090	BJA26090	BJA36090	1000 A	1500 A
100	BJA16100	BJA26100	BJA36100	1000 A	1500 A
110	BJA16110	BJA26110	BJA36110	1000 A	1500 A
125	BJA16125	BJA26125	BJA36125	1000 A	1500 A

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

I-Line HQO Accessory

For phase option information see Table 9.121.

Table 9.120: QO™ Distribution Panel—240 Vac Max. Only Mounts in Type HCJ, HCP, HCP-SU, or HCR-U I-Line panelboards, 30 A max. branch circuit breaker.

Maximum No. 1-pole QO Circuit Breakers	Phase Connection	Mounting Height		2-pole Catalog Number	3-pole Catalog Number
		In.	mm		
6	AB	4.5	114	HQO206AB	—
6	BC	4.5	114	HQO206BC	—
6	AC	4.5	114	HQO206AC	—
6	ABC	4.5	114	—	HQO306
6	CBA	4.5	114	—	HQO306CBA

Table 9.121: Phase Options Suffix Numbers for B/Q-frame Circuit Breakers

Phase Option Number	Phase Connection	1-pole	2-pole	3-pole
1	A	BDA140151	—	—
3	B	BDA140153	—	—
5	C	BDA140155	—	—
1	AB	—	QBA220701	—
2	AC	—	QBA220702	—
3	BA	—	QBA220703	—
4	BC	—	QBA220704	—
5	CA	—	QBA220705	—
6	CB	—	QBA220706	—
Standard *[43]*	ABC	—	—	QBA32070
6	CBA	—	—	QBA320706

[43] The absence of a phase option number after a 3-pole catalog number will result in an ABC phase connection.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



QB/QD/QG/QJ
Mounting Height
2–pole 3 in. [76 mm]



QB/QD/QG/QJ
Mounting Height
3–pole 4.5 in [114 mm]

PowerPacT Q-frame for I-Line™ Panelboards and Switchboards

Table 9.122: PowerPacT™ Q-frame— 225 A, Thermal-magnetic (240 Vac)
(PowerPacT Q-frame 2–pole branch circuit breakers utilize 3 in. of I-Line mounting space and 3–pole Q-frame circuit breakers utilize 4.5 in. of I-Line mounting space.)

Ampere Rating	AC Magnetic Trip Settings		"B" Interrupting	"D" Interrupting	"G" Interrupting	"J" Interrupting *[44]*
	Hold	Trip	Catalog Number	Catalog Number	Catalog Number	Catalog Number
2-pole, 240 Vac *[45]*.						
70 A	1000	1800	QBA22070( )	QDA22070( )	QGA22070( )	QJA22070( )
80 A			QBA22080( )	QDA22080( )	QGA22080( )	QJA22080( )
90 A			QBA22090( )	QDA22090( )	QGA22090( )	QJA22090( )
100 A	1200	2400	QBA22100( )	QDA22100( )	QGA22100( )	QJA22100( )
110 A			QBA22110( )	QDA22110( )	QGA22110( )	QJA22110( )
125 A			QBA22125( )	QDA22125( )	QGA22125( )	QJA22125( )
150 A			QBA22150( )	QDA22150( )	QGA22150( )	QJA22150( )
175 A			QBA22175( )	QDA22175( )	QGA22175( )	QJA22175( )
200 A			QBA22200( )	QDA22200( )	QGA22200( )	QJA22200( )
225 A			QBA22225( )	QDA22225( )	QGA22225( )	QJA22225( )
3-pole, 240 Vac *[46]*						
70 A	1000	1800	QBA32070( )	QDA32070( )	QGA32070( )	QJA32070( )
80 A			QBA32080( )	QDA32080( )	QGA32080( )	QJA32080( )
90 A			QBA32090( )	QDA32090( )	QGA32090( )	QJA32090( )
100 A	1200	2400	QBA32100( )	QDA32100( )	QGA32100( )	QJA32100( )
110 A			QBA32110( )	QDA32110( )	QGA32110( )	QJA32110( )
125 A			QBA32125( )	QDA32125( )	QGA32125( )	QJA32125( )
150 A			QBA32150( )	QDA32150( )	QGA32150( )	QJA32150( )
175 A			QBA32175( )	QDA32175( )	QGA32175( )	QJA32175( )
200 A			QBA32200( )	QDA32200( )	QGA32200( )	QJA32200( )
225 A			QBA32225( )	QDA32225( )	QGA32225( )	QJA32225( )

See *[47]* below.

Table 9.123: Interrupt Ratings (kA)

	QB	QD	QG	QJ *[44]*
240 V	10	25	65	100
480 V	—	—	—	—
600 V	—	—	—	—

Padlock attachments for Q-frame are available.

[44] 3P circuit breakers are rated 65 kA at 240/120 Vac, 3Ø, 4-wire delta or 100 kA at 208Y/120 Vac, 3Ø, 4-wire.
[45] 2-pole QB, QD, QG, and QJ circuit breakers are completed by adding the required phasing numbers as indicated in the parentheses, see Table 9.121 on page 9-54
[46] 3-pole QB, QD, QG, and QJ circuit breakers for ABC phasing are complete without additional phasing number. For CBA phasing, complete the catalog number by inserting the number 6 in the parentheses.
[47] Replacement lugs are not available on QB, QD, QG, or QJ circuit breakers. Lugs for QB, QD, QG, or QJ circuit breakers accept one #4 AWG–300 kcmil. No accessories are available for PowerPacT Q Frame breakers.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



HD/HG/HJ/HL/HR
2- and 3-pole Circuit Breaker



JD/JG/JJ/JL/JR
2- and 3-pole
Thermal-Magnetic Trip Unit

Table 9.125: Interrupting Ratings Codes (kA)

Voltage	D	G	J	L	R
240 V	25	65	100	125	200
480Y/277	18	35	65	100	200
480 V	18	35	65	100	200
600Y/347	14	18	25	50	100
600 V	14	18	25	50	100

H- and J-frame for I-Line™ Panelboards and Switchboards

Table 9.124: H-frame 150 A Thermal-Magnetic UL Current-Limiting[48] Circuit Breakers (600 Vac, 250 Vdc) With Factory Sealed Trip Unit[49] Suitable for Reverse Connection[49]

(PowerPacT HD and HG 2–pole circuit breakers utilize 3 in. of I-Line mounting space, HJ and HL 2–pole circuit breakers utilize 4.5 in. of I-Line mounting space, all 3–pole H and J-frame circuit breakers utilize 4.5 in. of I-Line mounting space.)

Current Rating @ 40° C	Fixed AC Magnetic Trip		Cat. No. [50]	Terminal Wire Range
	Hold	Trip		
H-frame, 150A 2P, 600 Vac 50/60 Hz, 250 Vdc[51]				
15 A	350 A	750 A	H( )A26015( )	AL150HD 14–3/0 AWG Al or Cu
20 A	350 A	750 A	H( )A26020( )	
25 A	350 A	750 A	H( )A26025( )	
30 A	350 A	750 A	H( )A26030( )	
35 A	400 A	850 A	H( )A26035( )	
40 A	400 A	850 A	H( )A26040( )	
45 A	400 A	850 A	H( )A26045( )	
50 A	400 A	850 A	H( )A26050( )	
60 A	800 A	1450 A	H( )A26060( )	
70 A	800 A	1450 A	H( )A26070( )	
80 A	800 A	1450 A	H( )A26080( )	
90 A	800 A	1450 A	H( )A26090( )	
100 A	800 A	1700 A	H( )A26100( )	
110 A	900 A	1700 A	H( )A26110( )	
125 A	900 A	1700 A	H( )A26125( )	
150 A	900 A	1700 A	H( )A26150( )	
H-frame 150A 3P, 600 Vac 50/60 Hz, 250 Vdc				
15 A	350 A	750 A	H( )A36015	AL150HD 14–3/0 AWG Al or Cu
20 A	350 A	750 A	H( )A36020	
25 A	350 A	750 A	H( )A36025	
30 A	350 A	750 A	H( )A36030	
35 A	400 A	850 A	H( )A36035	
40 A	400 A	850 A	H( )A36040	
45 A	400 A	850 A	H( )A36045	
50 A	400 A	850 A	H( )A36050	
60 A	800 A	1450 A	H( )A36060	
70 A	800 A	1450 A	H( )A36070	
80 A	800 A	1450 A	H( )A36080	
90 A	800 A	1450 A	H( )A36090	
100 A	800 A	1700 A	H( )A36100	
110 A	900 A	1700 A	H( )A36110	
125 A	900 A	1700 A	H( )A36125	
150 A	900 A	1700 A	H( )A36150	

Table 9.126: J-frame 250 A Thermal-Magnetic UL Current-Limiting[52]Circuit Breakers (600 Vac, 250 Vdc) With Factory Sealed Trip Unit[49] Suitable for Reverse Connection[49]

(All PowerPacT J-frame circuit breakers, both 2– and 3–pole, utilize 4.5 in. of I-Line mounting space.)

Current Rating @ 40°C	Adjustable AC Magnetic Trip		Cat. No.[50]	Terminal Wire Range
	Low	High		
J-frame 250A 2P, 600 Vac 50/60 Hz, 250 Vdc[53].				
150 A	750 A	1500 A	J( )A26150( )	AL175JD 4–4/0 AWG Al or Cu
175 A	875 A	1750 A	J( )A26175( )	
200 A	1000 A	2000 A	J( )A26200( )	AL250JD 3/0 AWG–350 kcmil Al or Cu
225 A	1125 A	2250 A	J( )A26225( )	
250 A	1250 A	2500 A	J( )A26250( )	
J-frame 250A 3P, 600 Vac 50/60 Hz, 250 Vdc				
150 A	750 A	1500 A	J( )A36150	AL175JD 4–4/0 AWG Al or Cu
175 A	875 A	1750 A	J( )A36175	
200 A	1000 A	2000 A	J( )A36200	AL250JD 3/0 AWG–350 kcmil Al or Cu
225 A	1125 A	2250 A	J( )A36225	
250 A	1250 A	2500 A	J( )A36250	

[48] Circuit breakers with J and L interrupting ratings are UL certified as current limiting.
[49] See Supplemental Digest Section 3 for circuit breakers with field-interchangeable trip units.
[50] To complete catalog number, replace the blank with the appropriate interrupting rating (D, G, J, L).
[51] 2 pole circuit breaker catalog numbers are completed by adding the required phase connection number as a suffix see Table 9.133 H/J/L-Frame Circuit Breaker/Switch Phase Options—Example HDA26150( ), page 9-58.
[52] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[53] 2 pole circuit breaker catalog numbers are completed by adding the required phase connection number as a suffix see Table 9.133 H/J/L-Frame Circuit Breaker/Switch Phase Options—Example HDA26150( ), page 9-58

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



HDA36250U33X
2- and 3-pole
MicroLogic Electronic Trip Unit



JDA36250U44X
2- and 3-pole
MicroLogic Electronic Trip Unit

Table 9.127: H-frame 150 A and J-frame 250 A MicroLogic Electronic Trip UL Current-Limiting[54]Circuit Breakers (600 Vac) With Factory Sealed Trip Unit[55] Suitable for Reverse Connection [56] (PowerPacT Electronic Trip H- and J-frame circuit breakers utilize 4.5 in. of I-Line mounting space.)

Electronic Trip Unit			Sensor Rating	Cat. No.[57]	Terminal
Type	Function	Trip Unit			
600 Vac, 50/60 Hz, 3P					
MicroLogic Standard	LI	3.2[58]	60 A	H( )A36060U31X	AL150HD[59]
			100 A	H( )A36100U31X	
			150 A	H( )A36150U31X	
			250 A	J( )A36250U31X	AL250JD[60]
	LSI	3.2S[58]	60 A	H( )A36060U33X	AL150HD[59]
			100 A	H( )A36100U33X	
			150 A	H( )A36150U33X	
			250 A	J( )A36250U33X	AL250JD[60]
MicroLogic Ammeter	LSI	5.2A	60 A	H( )A36060U43X	AL150HD[59]
			100 A	H( )A36100U43X	
			150 A	H( )A36150U43X	
			250 A	J( )A36250U43X	AL250JD[60]
MicroLogic Energy	LSI	5.2E	60 A	H( )A36060U53X	AL150HD[59]
			100 A	H( )A36100U53X	
			150 A	H( )A36150U53X	
			250 A	J( )A36250U53X	AL250JD[60]
MicroLogic Ammeter	LSIG	6.2A	60 A	H( )A36060U44X	AL150HD[59]
			100 A	H( )A36100U44X	
			150 A	H( )A36150U44X	
			250 A	J( )A36250U44X	AL250JD[60]
MicroLogic Energy	LSIG	6.2E	60 A	H( )A36060U54X	AL150HD[59]
			100 A	H( )A36100U54X	
			150 A	H( )A36150U54X	
			250 A	J( )A36250U54X	AL250JD[60]

Table 9.128: Interrupting Ratings Codes (kA)

Voltage	D	G	J	L	R
240 V	25	65	100	125	200
480 V	18	35	65	100	200
600 V	14	18	25	50	100

[54] Circuit breakers with J, L, and R interrupting ratings are UL certified as current limiting.
[55] See Supplemental Digest Section 3 for circuit breakers with field-interchangeable trip units.
[56] For applications requiring communications, see page .
[57] To complete catalog number, replace the blank with the appropriate interrupting rating (D, G, J, L).
[58] 3P circuit breakers with this trip unit can be used for 2P applications.
[59] AL150HD wire range is 14–3/0 AWG Al or Cu.
[60] AL250JD wire range is 3/0 AWG–350 kcmil Al or Cu. For smaller wire range (4–4/0 AWG Al or Cu), replace the lug's wire binding screws with the larger binding screws provided.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

J-frame Mission Critical Circuit Breaker

Table 9.129: J-frame 250 A MicroLogic Electronic Trip Mission Critical Circuit Breakers (480/277 Vac) With Factory Sealed Trip Units Suitable for Reverse Connection *[61]*

Electronic Trip Unit Type	Trip Function	Trip Unit	Continuous Current	D Interrupting	G Interrupting	J Interrupting	L Interrupting	Terminal
				Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Standard	LI	3.2 W	250	JDA34250WU31X	JGA34250WU31X	JJA34250WU31X	JLA34250WU31X	AL250JD *[62]*
Standard	LSI	3.2S-W	250	JDA34250WU33X	JGA34250WU33X	JJA34250WU33X	JLA34250WU33X	AL250JD *[62]*
High Perf. Ammerter	LSI	5.2A-W	250	JDA34250WU43X	JGA34250WU43X	JJA34250WU43X	JLA34250WU43X	AL250JD *[62]*
High Perf. Energy	LSI	5.2E-W	250	JDA34250WU53X	JGA34250WU53X	JJA34250WU53X	JLA34250WU53X	AL250JD *[62]*
High perf. Ammerter	LSIG	6.2A-W	250	JDA34250WU44X	JGA34250WU44X	JJA34250WU44X	JLA34250WU44X	AL250JD *[62]*
High Perf. Energy	LSIG	6.2E-W	250	JDA34250WU54X	JGA34250WU54X	JJA34250WU54X	JLA34250WU54X	AL250JD *[62]*

L-frame Mission Critical Circuit Breaker

Table 9.130: L-frame 600 A MicroLogic Electronic Trip Mission Critical Circuit Breakers (480/277 Vac) With Factory Sealed Trip Units Suitable for Reverse Connection *[61]*

Electronic Trip Unit Type	Trip Function	Trip Unit	Continuous Current	G Interrupting	J Interrupting	L Interrupting	Terminal
				Cat. No.	Cat. No.	Cat. No.	
Standard	LI	3.3 W	250	LGA34250WU31X	LJA34250WU31X	LLA34250WU31X	AL400L61K3 *[63]*
			400	LGA34400WU31X	LJA34400WU31X	LLA34400WU31X	AL600LF52K3 *[64]*
			600	LGA34600WU31X	LJA34600WU31X	LLA34600WU31X	
Standard	LSI	3.3S-W	250	LGA34250WU33X	LJA34250WU33X	LLA34250WU33X	AL400L61K3 *[63]*
			400	LGA34400WU33X	LJA34400WU33X	LLA34400WU33X	AL600LF52K3 *[64]*
			600	LGA34600WU33X	LJA34600WU33X	LLA34600WU33X	
High Perf. Ammeter	LSI	5.3A-W	400	LGA34400WU43X	LJA34400WU43X	LLA34400WU43X	AL600LF52K3 *[64]*
			600	LGA34600WU43X	LJA34600WU43X	LLA34600WU43X	
High Perf. Energy	LSI	5.3E-W	400	LGA34400WU53X	LJA34400WU53X	LLA34400WU53X	AL600LF52K3 *[64]*
			600	LGA34600WU53X	LJA34600WU53X	LLA34600WU53X	
High Perf. Ammeter	LSIG	6.3A-W	400	LGA34400WU44X	LJA34400WU44X	LLA34400WU44X	AL600LF52K3 *[64]*
			600	LGA34600WU44X	LJA34600WU44X	LLA34600WU44X	
High Perf. Energy	LSIG	6.3E-W	400	LGA34400WU54X	LJA34400WU54X	LLA34400WU54X	AL600LF52K3 *[64]*
			600	LGA34600WU54X	LJA34600WU54X	LLA34600WU54X	

Table 9.131: PowerPacT™ H-, J-, and L-frame Automatic Molded Case Switches, 600 Vac

Circuit Breaker	Poles	Ampere Rating	G Withstand		L Withstand		R Withstand		Terminal	Wire Range
			Cat. No.	Trip Point	Cat. No.	Trip Point	Cat. No.	Trip Point		
H-frame J-frame	2 *[65]*	150 A	HGA26000S15( )	2250 A	HLA26000S15	2250 A	—	—	—	—
		175 A	JGA26000S17( )	3125 A	JLA26000S17	3125 A	—	—	—	—
		250 A	JGA26000S25( )	3125 A	JLA26000S25	3125 A	—	—	—	—
	3	150 A	HGA36000S15	2250 A	HLA36000S15	2250 A	HRA36000S15	2250 A	AL150HD	14 AWG–3/0 AWG Al/Cu
		175 A	JGA36000S17	3125 A	JLA36000S17	3125 A	JRA36000S17	3125 A	AL175JD	4–4/0 AWG Al/Cu
		250 A	JGA36000S25	3125 A	JLA36000S25	3125 A	JRA36000S25	3125 A	AL250JD	3/0 AWG–350 kcmil Al/Cu
L-frame	3	400 A	LGA36000S40X	4800 A	LLA36000S40X	4800 A	LRA36000S40X	4800 A	AL150HD	AL600LS52K3 (2) 2/0 AWG–500 kcmil Al/Cu
		600 A	LGA36000S60X	6600 A	LLA36000S60X	6600 A	LRA36000S60X	6600 A	AL250JD	

H-, J-, and L-frame accessories starting on PowerPacT Accessories, page .
H-, J-, and L-frame dimensions starting on Molded Case Circuit Breaker Dimensions, page .
H-, J-, and L-frame optional lugs Mechanical Lugs, page .

Table 9.132: Interrupting Ratings Codes (kA)

Voltage	D	G	J	L	R
240 V	25	65	100	125	200
480Y/277	18	35	65	100	200
480 V	18	35	65	100	200
600Y/347	14	18	25	50	100
600 V	14	18	25	50	100

Table 9.133: H/J/L-Frame Circuit Breaker/Switch Phase Options—Example HDA26150( )

Phase Option Number	Phase Connection	2-pole	3-pole
1	AB	HDA261501	—
2	AC	HDA261502	—
3	BA	HDA261503	—
4	BC	HDA261504	—
5	CA	HDA261505	—
6	CB	HDA261506	—
Standard	ABC	—	JDA34250WU31X
6	CBA	—	JDA34250WU31X6

[61] Standard rated (80%). Not available in 100% rated.
[62] AL250JD terminal wire range is (1) 3/0 AWG–350 kcmil Al or Cu.
[63] AL400L61K3 terminal wire range is (1) #2 AWG–500 kcmil Al or #2 AWG–600 kcmil Cu..
[64] AL600LF52K3 terminal wire range is (2) #3/0 AWG–500 kcmil Al or Cu.
[65] 2-pole circuit breaker catalog numbers are completed by adding the required phase connection number as a suffix, see Table 9.133 H/J/L-Frame Circuit Breaker/Switch Phase Options—**Example HDA26150( )**, page 9-58.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

LA/LH-frame Thermal Magnetic Circuit Breakers

L-frame circuit breaker utilizes 6 in. of available I-Line bus



LA36400 2- and 3-pole Circuit Breaker

Table 9.134: L-frame—400 A, Thermal-magnetic (600 Vac)

Ampere Rating	AC Magnetic Trip Settings		Standard Interrupting	High Interrupting	Terminal Wire Range
	Low	High	Catalog Number	Catalog Number	
2-pole, 600 Vac, 250 Vdc *[66]*					
125 A	625	1250	LA26125( )	LH26125( )	AL400LA (1) #1 AWG–600 kcmil or (2) #1 AWG–250 kcmil Al or Cu
150 A	750	1500	LA26150( )	LH26150( )	
175 A	875	1750	LA26175( )	LH26175( )	
200 A	1000	2000	LA26200( )	LH26200( )	
225 A	1125	2250	LA26225( )	LH26225( )	
250 A	1250	2500	LA26250( )	LH26250( )	
300 A	1500	3000	LA26300( )	LH26300( )	
350 A	1750	3500	LA26350( )	LH26350( )	
400 A	2000	4000	LA26400( )	LH26400( )	
3-pole, 600 Vac, 250 Vdc					
125 A	625	1250	LA36125	LH36125	AL400LA (1) #1 AWG–600 kcmil or (2) #1 AWG–250 kcmil Al or Cu
150 A	750	1500	LA36150	LH36150	
175 A	875	1750	LA36175	LH36175	
200 A	1000	2000	LA36200	LH36200	
225 A	1125	2250	LA36225	LH36225	
250 A	1250	2500	LA36250	LH36250	
300 A	1500	3000	LA36300	LH36300	
350 A	1750	3500	LA36350	LH36350	
400 A	2000	4000	LA36400	LH36400	

LA circuit breaker accessories can be found in Supplemental Digest Section 3.

LA circuit breaker dimensions can be found in Digest Section 7.

Mechanical lug kits for LA, LH, and Q4 circuit breakers can be found in Supplemental Digest Section 3.

Table 9.135: Interrupt Ratings (kA)

	LA	LH
240 V	42	65
480 V	30	35
600 V	22	25

PowerPacT L- and M-frame for I-Line™ Panelboards and Switchboards

Table 9.136: L-frame 600 A Circuit Breakers with Lugs and Factory-Sealed Electronic Trip Units Suitable for Reverse Connection *[67]*
(L-frame circuit breaker utilizes 6 in. of available I-Line bus)



PowerPacT L-Frame
LG/LJ/LL/LR
2- and 3-pole
4.5 in. (114 mm)

Electronic Trip Unit			Sensor Rating	Catalog Number *[68]*	Terminal
Type	Function	Trip Unit			
600 Vac, 53/60 Hz, 3P					
MicroLogic Standard	LI	3.3 *[69]*	250 A	L( )A36250U31X	AL400L61K3 *[70]*
			400 A 600 A	L( )A36400U31X L( )A36600U31X	AL600LF52K3 *[71]* (2) 3/0–500 kcmil Al or Cu.
MicroLogic Standard	LSI	3.3S *[69]*	250 A	L( )A36250U33X	AL400L61K3 *[70]*
			400 A 600 A	L( )A36400U33X L( )A36600U33X	AL600LF52K3 (2) 3/0–500 kcmil Al or Cu.
MicroLogic Ammeter	LSI	5.3A	400 A 600 A	L( )A36400U43X L( )A36600U43X	
MicroLogic Energy	LSI	5.3E	400 A 600 A	L( )A36400U53X L( )A36600U53X	
MicroLogic Ammeter	LSIG	6.3A	400 A 600 A	L( )A36400U44X L( )A36600U44X	
MicroLogic Energy	LSIG	6.3E	400 A 600 A	L( )A36400U54X L( )A36600U54X	

Table 9.137: Interrupt Ratings Codes (kA) for PowerPacT L and M Frames

	G	J	L *[72]*	R
240 V	65	100	125	200
480 V	35	65	100	200
600 V	18	25	50	100

[66] 2-pole circuit breaker catalog numbers are completed by adding required phase connection letters as suffix to catalog number. See Table 9.133 H/J/L-Frame Circuit Breaker/Switch Phase Options—Example HDA26150( ), page 9-58.
[67] See Supplemental Digest page 3-4 for circuit breakers with field-interchangeable trip units.
[68] For 100% rated circuit breakers (250 A and 400 A only), add a "C" in the 9th character place (for example, LRA36400CU31X). To complete catalog number, replace the blank with the appropriate interrupting rating (G, J, L or R).
[69] 3P circuit breakers with this trip unit can be used for 2P applications.
[70] AL400L61K3 terminal wire ranges are (1) 2 AWG–600 kcmil Cu or (1) 2 AWG–500 kcmil Al.
[71] AL600LF52K3 terminal wire range is (2) 3/0 –500 kcmil.
[72] L interrupting rating is not available in M-frame.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.138: M-Frame 800 A, Basic Electronic Trip System Type ET 1.0*[73]* Factory-Sealed Trip Unit (PowerPacT M-frame circuit breakers utilize 9 in. of the available I-Line bussing.)

Electronic Trip Unit		Ampere Rating	Adjustable Instantaneous Trip Range		Interrupting Rating		Terminal Wire Range
Type	Function		Low	High	G	J	
2P, 600 Vac 50/60 Hz*[74]*							
Basic	Fixed Long-time, Adjustable Instantaneous Trip	400 A	800	4000	MGA26400()	MJA26400()	(3) 3/0 through 500 kcmil Al or Cu
		600 A	1200	6000	MGA26600()	MJA26600()	(3) 3/0 through 500 kcmil Al or Cu
3P, 600 Vac 50/60 Hz							
Basic	Fixed Long-time, Adjustable Instantaneous Trip	400 A	800	4000	MGA36400	MJA36400	(3) 3/0 through 500 kcmil Al or Cu
		600 A	1200	6000	MGA36600	MJA36600	(3) 3/0 through 500 kcmil Al or Cu

Table 9.139: M-Frame 800 A, Adjustable Amperage Electronic Trip Unit

Electronic Trip Unit		Adjustable Long-Time Settings	Adjustable Instantaneous		Interrupting Rating		Terminal Wire Range
Type	Function		Low	High	G	J	
2P, 600 Vac 50/60 Hz*[74]*							
Basic	Adjustable Long-time, Adjustable Instantaneous Trip	300–800	2x	10x	MGA26800()E10	MJA26800()E10	(3) 3/0 through 500 kcmil Al or Cu
3P, 600 Vac 50/60 Hz							
Basic	Adjustable Long-time, Adjustable Instantaneous Trip	300–800	2x	10x	MGA36800E10	MJA36800E10	(3) 3/0 through 500 kcmil Al or Cu

L-frame accessories, see PowerPact Accessories in Section 7 of the Digest.
L-frame dimensions, see Molded Case Circuit Breaker Dimensions in Section 7 of the Digest.
L-frame optional lugs, see Mechanical Lugs in Section 7 of the Digest.

M-frame accessories, see PowerPact Accessories in Section 7 of the Digest.
M-frame dimensions, see Molded Case Circuit Breaker Dimensions in Section 7 of the Digest.
M-frame optional lugs, see Mechanical Lugs in Section 7 of the Digest.

Table 9.140: Automatic Molded Case Switches—600 Vac, 50/60 Hz

Ampere Rating	2-pole	3-pole	Withstand Rating *[75]*			Trip Point Amperes	Terminal Wire Range
	Catalog Number *[74]*	Catalog Number	240 Vac	480 Vac	600 Vac	AC	
600 A	PJA26000S60( )	PJA36000S60	100	65	25	10000	(3) 3/0 through 500 kcmil Al or Cu
800 A	PJA26000S80( )	PJA36000S80	100	65	25	10000	
1000 A	PJA26000S10( )	PJA36000S10	100	65	25	10000	(4) 3/0 through 500 kcmil Al or Cu
1200 A	PJA26000S12( )	PJA36000S12	100	65	25	10000	



PG/PJ/PK/PL
2– and 3–pole



RG/RJ/RK/RL
2– and 3–pole

Table 9.141: PowerPacT P- and R-frame Interrupt Ratings Codes

Voltage	P-frame Interrupt Rating				R-frame Interrupt Rating			
	G	J	K	L	G	J	K	L
240 Vac	65 kA	100 kA	65 kA	125 kA	65 kA	100 kA	65 kA	125 kA
480 Vac	35 kA	65 kA	50 kA	100 kA	35 kA	65 kA	65 kA	100 kA
600 Vac	18 kA	25 kA	50 kA	25 kA	18 kA	25 kA	65 kA	50 kA

[73] The ET 1.0 trip unit cannot be field replaced. The Basic Electronic ET1.0 trip unit (offered in 400 A and 600 A only) does not allow adjustment of the long time trip point setting. It is considered an electronic equivalent of a thermal-magnet circuit breaker.
[74] Fill in parentheses with the following phase connection options: (2) for AC or (5) for CA.
[75] The withstand rating is the fault current, at rated voltage, that the molded case switch will withstand without damage when protected by a circuit breaker with an equal ampere rating.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

PowerPacT P- and R-frame for I-Line™ Panelboards and Switchboards

Table 9.142: PowerPacT P-frame 1200 A (600 Vac, 50/60 Hz) 3P Circuit Breaker with Electronic Trip Unit (PowerPacT P-frame circuit breakers utilize 9 in. of the available I-Line bussing.)

Electronic Trip Unit			Sensor Rating	Cat. No.*[76][77][78][79]*	Terminal Wire Range
Type	Function	Code			
Basic Electronic Trip Unit (Not Interchangeable)	Fixed long-time, Adjustable Instantaneous	ET1.0I	600 A	P( )A36060	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			800 A	P( )A36080	
			1000 A	P( )A36100	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120	
MicroLogic Interchangeable Standard Trip Unit	LI	3.0	250 A	P( )A36025(C)U31A	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U31A	
			600 A	P( )A36060(C)U31A	
			800 A	P( )A36080(C)U31A	
			1000 A	P( )A36100U31A	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U31A	
	LSI	5.0	250 A	P( )A36025(C)U33A	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U33A	
			600 A	P( )A36060(C)U33A	
			800 A	P( )A36080(C)U33A	
			1000 A	P( )A36100U33A	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U33A	
MicroLogic Interchangeable Ammeter Trip Unit	LI	3.0A	250 A	P( )A36025(C)U41A	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U41A	
			600 A	P( )A36060(C)U41A	
			800 A	P( )A36080(C)U41A	
			1000 A	P( )A36100U41A	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U41A	
	LSI	5.0A	250 A	P( )A36025(C)U43A	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U43A	
			600 A	P( )A36060(C)U43A	
			800 A	P( )A36080(C)U43A	
			1000 A	P( )A36100U43A	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U43A	
	LSIG	6.0A	250 A	P( )A36025(C)U44A	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U44A	
			600 A	P( )A36060(C)U44A	
			800 A	P( )A36080(C)U44A	
			1000 A	P( )A36100U44A	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U44A	
MicroLogic Interchangeable Power Trip Unit	LSI	5.0P	250 A	P( )A36025(C)U63AE1	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U63AE1	
			600 A	P( )A36060(C)U63AE1	
			800 A	P( )A36080(C)U63AE1	
			1000 A	P( )A36100U63AE1	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U63AE1	
	LSIG	6.0P	250 A	P( )A36025(C)U64AE1	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U64AE1	
			600 A	P( )A36060(C)U64AE1	
			800 A	P( )A36080(C)U64AE1	
			1000 A	P( )A36100U64AE1	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U64AE1	
MicroLogic Interchangeable Harmonic Trip Unit	LSI	5.0H	250 A	P( )A36025(C)U73AE1	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U73AE1	
			600 A	P( )A36060(C)U73AE1	
			800 A	P( )A36080(C)U73AE1	
			1000 A	P( )A36100U73AE1	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U73AE1	
	LSIG	6.0H	250 A	P( )A36025(C)U74AE1	(3) 3/0 AWG–500 kcmil Al or Cu AL800M23K
			400 A	P( )A36040(C)U74AE1	
			600 A	P( )A36060(C)U74AE1	
			800 A	P( )A36080(C)U74AE1	
			1000 A	P( )A36100U74AE1	(4) 3/0 AWG–500 kcmil Al or Cu AL1200P24K
			1200 A	P( )A36120U74AE1	

[76] To complete the catalog number, replace the blank ( ) with the appropriate interrupt rating (G, J, K, or L).
[77] For 100% rated circuit breakers add a “C” in the 9th character place. For example, the catalog number for a 100% standard-type trip unit with LI trip functions at 250 A would be PGA36025CU31A.
[78] The L interrupt rating is supplied in 480 V only. Change the 5th character (voltage rating) from a 6 (600 V) to a 4 (480 V); for example, PLA34025U31A.
[79] See Table 9.141 PowerPacT P- and R-frame Interrupt Ratings, page 9-60 for interrupt ratings.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.143: PowerPacT R-frame 1200 A (600 Vac, 50/60 Hz) 3P Circuit Breaker with Electronic Trip Unit

Electronic Trip Unit			Sensor Rating	Cat. No. *[80][81][82][83]*	Terminal Wire Range
Type	Function	Code			
Basic Electronic Trip Unit (Not Interchangeable)	Fixed Long-Time, Adjustable Instantaneous	ET1.01	1200 A	R( )A36120	AL1200R53K (4) 3/0-600 kcmil Al or Cu
MicroLogic Interchangeable Standard Trip Unit	LI	3.0	1000 A	R( )A36100CU31A	
			1200 A	R( )A36120CU31A	
	LSI	5.0	1000 A	R( )A36100CU33A	
			1200 A	R( )A36120CU33A	
MicroLogic Interchangeable Ammeter Trip Unit	LI	3.0A	1000 A	R( )A36100CU41A	
			1200 A	R( )A36120CU41A	
	LSI	5.0A	1000 A	R( )A36100CU43A	
			1200 A	R( )A36120CU43A	
	LSI	6.0A	1000 A	R( )A36100CU44A	
			1200 A	R( )A36120CU44A	
MicroLogic Interchangeable Power Trip Unit	LSI	5.0P	1000 A	R( )A36100CU63AE1	
			1200 A	R( )A36120CU63AE1	
	LSIG	6.0P	1000 A	R( )A36100CU64AE1	
			1200 A	R( )A36120CU64AE1	
MicroLogic Interchangeable Harmonic Trip Unit	LSI	5.0H	1000 A	R( )A36100CU73AE1	
			1200 A	R( )A36120CU73AE1	
	LSIG	6.0H	1000 A	R( )A36100CU74AE1	
			1200 A	R( )A36120CU74AE1	

P- and R-frame accessories, see PowerPact Accessories in Section 7 of the Digest.
P- and R-frame dimensions, see Molded Case Circuit Breaker Dimensions in Section 7 of the Digest.
P- and R-frame trip unit options, see MicroLogic Electronic Trip Units in Section 7 of the Digest.
P- and R-frame optional lugs, see Mechanical Lugs in Section 7 of the Digest.
P- and R-frame alternate rating plugs, see MicroLogic Electronic Trip Units in Section 7 of the Digest.

I-Line™ Factory Assembled Panelboards

Table 9.144: I-Line 200% Rated Neutral—Standard Terminal Configuration

Panel Type	Ampacity	Type	Branch Space		Neutral Terminals Quantity and Size		Type 1 Enclosure					
							H		W		D	
			In.	mm	Main	Branch	In.	mm	In.	mm	In.	mm
HCJ	600 A	MLO	72	1829	(8) 750 kcmil	(35) 350 kcmil, (9)#14-1/0, (17)#14-#4	91	2311	32	813	9.50	210
	600 A (MG, MJ)	M/B	72	1829	(8) 750 kcmil		91	2311	32	813	9.50	241
	800 A	MLO	72	1829	(8) 750 kcmil		91	2311	32	813	9.50	210
	800 A (MG, MJ)	M/B	72	1829	(8) 750 kcmil		91	2311	32	813	9.50	241
HCR-U *[84]*	1200A	M/B, MLO	108	2743	(8) 750 kcmil	(8) 600 kcmil, (15) 350 kcmil (9) #14-1/0, (17)#14-#4	86	2184	44	1118	9.50	241
HCP	600A	M/B, MLO	63	1600	(8) 750 kcmil	(35) 350 kcmil, (9)#14-1/0, (17)#14-#4	68	1727	42	1067	9.50	241
	800A	M/B, MLO	99	2515	(8) 750 kcmil	(35) 350 kcmil, (9)#14-1/0, (17)#14-#4	86	2184	42	1067	9.50	241
HCP-SU *[85]*	800A	M/B, MLO	54	1371	(8) 750 kcmil	(8) 750 kcmil, (21) 350 kcmil, (9) #14-1/0, (17) #14-#4	86	2184	26	660	9.5	241

[80] To complete the catalog number, replace the blank ( ) with the appropriate interrupt rating (G, J, K, or L).
[81] For 100% rated circuit breakers add a “C” in the 9th character place. For example, the catalog number for a 100% standard-type trip unit with LI trip functions at 250 A would be PGA36025CU31A.
[82] The L interrupt rating is supplied in 480 V only. Change the 5th character (voltage rating) from a 6 (600 V) to a 4 (480 V); for example, PLA34025U31A.
[83] See Table 9.141 PowerPacT P- and R-frame Interrupt Ratings, page 9-60 for interrupt ratings.
[84] 6 in. enclosure extension is required for HCRU I-Line panelboard.
[85] 9 in. enclosure extension is required for HCP-SU I-Line panelboard.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Refer to 2110CT9701, 1640CT0801, 4620CT9601

Panelboard Special Features

- **Main circuit breaker without overload trip —** Automatic Molded Case Switch (Not UL Listed)
- **Shunt Trip Circuit Breakers**
- **Other Special Features —** For information on the following special features, please see the Supplemental and Obsolescence Digest.
  - PowerLogic™ metering *[1]*
  - Customer equipment space (NQ and NF) *[1]*
  - Increased box depth *[1]*
  - Increased gutters–top, bottom, and sides *[1]*
  - Non-standard paint *[1]*
  - Welded base channel *[1]*
  - Type 1 gasketed *[1]*
  - Type 2 drip hood *[1]*
  - Type 3R/4/4X/5/12 stainless steel enclosure *[1]*
  - Type 4X fiberglass enclosure *[1]*
  - Stainless steel trim front *[1][1]*
  - Padlockable hasp *[1]*
  - Special locks (Corbin, Yale, Best) *[1]*
  - Equal height boxes *[1]*
  - Common trim to cover two equal height boxes *[1]*
  - Panelboard skirt—hides conduits feeding a panelboard *[1]*
  - Panelboard wireway—for terminating conduit in wireway endwall *[1]*
  - Keyed mechanical interlocking of two or more circuit breakers (I-Line) *[1]*
  - Motor operators (I-Line only)
  - Panelboard interiors and special fronts to fit existing boxes
  - A standard panelboard box has one blank endwall and one with knockouts. Blank endwalls or knockouts in both endwalls are also available *[1]*

I-Line Terminal Data

Table 9.145: Standard Mechanical Lugs—Main Lugs

Panel Type	Ampere Rating	Wire Range Wire Bending Space per NEC Table 312-6 *[2]*
I-Line	100 A	—
	225 A	(1) #6–300 kcmil Al or Cu
	400 A	(1) #2–600 kcmil Al or Cu (2) #2–500 kcmil Al or Cu
	600 A	(2) #2–500 kcmil Al or Cu
	800 A	(3) 3/0–500 kcmil Al or Cu
	1200 A	(4) 3/0–500 kcmil Al or Cu

Table 9.146: Standard Mechanical Lugs—Main Circuit Breaker

Panel Type	Ampere Rating	Circuit Breaker Type	Wire Range Wire Bending Space per NEC Table 312-6 *[2]*
I-Line	125 A	BD, BG, BJ	(1) #14-#2/0 AWG Al or Cu
	150 A	HD, HG, HJ, HL	(1) #14-3/0 Al or Cu
	250 A	JD, JG, JJ, JL	(1) #1/0-300 kcmil Al or Cu
	400 A	LA, LH	(1) #1-600 kcmil Al or Cu
	800 A	MG, MJ, PG, PJ, PL	(3) 3/0-500 kcmil Al or Cu
	1200 A	PG, PJ, PL, RGC, RJC, RLC	(4) 3/0-500 kcmil Al or Cu

[1] Supported by the Panelboard Product Selector.
[2] (#) = Number of conductors per phase.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

New!

I-Line Enable Modules for I-Line Panelboards

I-Line Enable Modules (formerly known as Smart Cells) are a space-saving module for value-added digital solutions. The self-contained unit fits onto the I-Line bus using only a 6-inch circuit breaker mounting space and using the same mounting as a circuit breaker. This allow the I-Line panelboard to be transformed into a digital communication or metered electrical distribution solution with enhanced protection now or in the future.

I-Line Enable modules are available for:

- IFM Modbus serial network communications interface
- Energy Reduction Maintenance Setting (ERMS)
- Maintenance Mode Switch (MMS)
- PM5563 or PM8244 meter with or without communications
- Universal Panel Server Gateway and Data Logger for Ethernet networking or cloud-based solutions

For more information, refer to Handout (document number 2700HO1501) or Instruction Bulletin (document number JYT97577). See I-Line Enable Modules for additional product information.



ERMS module

Table 9.147: Energy Reduction Maintenance Setting (ERMS)

Catalog Number	Voltage Vac	Features	No. of circuit breakers the unit will communicate to as standard	No. of additional circuit breakers the unit can communi-cate to with added Field Kit	Total possible No. of circuit breakers per module
ICW-L2222ERMS	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, ERMS - Ethernet communications	1	0	1
IC-WR2222ERMS	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, ERMS - Ethernet communications	1	0	1
ICW-L2422ERMS	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, ERMS - Ethernet communications	1	0	1
IC-WR2422ERMS	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, ERMS - Ethernet communications	1	0	1
ICW-L2222ERM2	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, ERMS - Modbus communications	2	2 (IFMs)	4
IC-WR2222ERM2	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, ERMS - Modbus communications	2	2 (IFMs)	4
ICW-L2422ERM2	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, ERMS - Modbus communications	2	2 (IFMs)	4
IC-WR2422ERM2	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, ERMS - Modbus communications	2	2 (IFMs)	4
ICW-L2622ERM2	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, ERMS - Modbus communications	1	0	1
IC-WR2622ERM2	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, ERMS - Modbus communications	1	0	1



MMS module

Table 9.148: Maintenance Mode Switch (MMS)

Catalog Number	Voltage Vac	Features
ICNL2222MMS	120–240	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on left, Maintenance Mode Switch
ICNR2222MMS	120–240	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on right, Maintenance Mode Switch
ICNL2422MMS	277–480	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on left, Maintenance Mode Switch
ICNR2422MMS	277–480	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on right, Maintenance Mode Switch
ICWL2222MMS	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, Maintenance Mode Switch
ICWR2222MMS	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, Maintenance Mode Switch
ICWL2422MMS	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, Maintenance Mode Switch
ICWR2422MMS	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, Maintenance Mode Switch
ICWL2622MMS	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, Maintenance Mode Switch
ICWR2622MMS	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, Maintenance Mode Switch

© 2026 Schneider Electric
All Rights Reserved
4/10/2026



IFM module

Table 9.149: IFM Modbus Serial Network Communications Interface

Catalog Number	Voltage Vac	Features	No. of circuit breakers the unit will communicate to as standard	No. of additional circuit breakers the unit can communi-cate to with added Field Kit	Total possible No. of circuit breakers per module
ICWL2222M01	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, IFM, Interface for Modbus-SL communications	1	8	9
ICWR2222M01	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, IFM, Interface for Modbus-SL communications	1	6	7
ICWL2422M01	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, IFM, Interface for Modbus-SL communications	1	8	9
ICWR2422M01	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, IFM, Interface for Modbus-SL communications	1	6	7
ICWL2622M01	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, IFM, Interface for Modbus-SL communications	1	2	3
ICWR2622M01	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on Right, IFM, Interface for Modbus-SL communications	1	2	3
ICNL2222M01	120–240	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on left, IFM, Interface for Modbus-SL communications	1	3	4
ICNR2222M01	120–240	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on right, IFM, Interface for Modbus-SL communications	1	2	3
ICNL2422M01	277–480	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on left, IFM, Interface for Modbus-SL communications	1	3	4
ICNR2422M01	277–480	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on right, IFM, Interface for Modbus-SL communications	1	2	3



UPAS module

Table 9.150: Universal Panel Server Gateway and Data Loggor for Ethernet Networking or Cloud-based Solutions (U-PaS)

Catalog Number	Voltage Vac	Features
ICWL222XUPAS	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, Universal Panel Server
ICWR222XUPAS	120–240	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, Universal Panel Server
ICWL242XUPAS	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, Universal Panel Server
ICWR242XUPAS	277–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, Universal Panel Server
ICWL262XUPAS	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, Universal Panel Server
ICWR262XUPAS	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, Universal Panel Server
ICNL222XUPAS	120–240	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on left, Universal Panel Server
ICNR222XUPAS	120–240	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on right, Universal Panel Server
ICNL242XUPAS	277–480	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on left, Universal Panel Server
ICNR242XUPAS	277–480	For mounting on narrow side, when narrow side of I-Line panelboard is mounted on right, Universal Panel Server



PM module

Table 9.151: PM5563 or PM8244 Meter with or without Communications

Catalog Number	Voltage Vac	Features
ICWL243X5563	120–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, PM5563 meter
ICWR243X5563	120–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, PM5563 meter
ICWL263X5563	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, PM5563 meter
ICWR263X5563	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, PM5563 meter
ICWL243X8244	120–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, PM8244 meter
ICWR243X8244	120–480	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, PM8244 meter
ICWL263X8244	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on left, PM8244 meter
ICWR263X8244	600	For mounting on wide side, when wide side of I-Line panelboard is mounted on right, PM8244 meter

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

I-Line Series Connected Circuit Breaker Ratings

Table 9.152: I-Line Series Connected Circuit Breaker Ratings (RMS Symmetrical)

Maximum System Voltage AC *[1]*	Maximum Short Circuit Current Rating	Square D Brand Integral or Remote 2- or 3-Pole Main Circuit Breaker *[2]*	Square D Brand Branch Circuit Breaker	
			Catalog Designation	Poles
120	65,000	QG, BG6, HG, JG, LG, MG, PG	BD6 (60 A Max.)	1
	100,000	QJ, BJ, HJ, JJ, LJ, MJ, PJ	BD6, BG6	
	125,000	HL, JL, LL	BD6, BG6, BJ	
	200,000	HR, JR	BD6, BG6, BJ	
208Y/120	65,000	QG, BG6, HG, JG, LG, MG, PG	BD6	2, 3
	100,000	QJ, BJ, HJ, HL, JJ, JL, LJ, MJ, PJ	BD6, BG6	
		QJ, PJ, RJ	QD	
240	42,000	LA	HD, JD, QD	2, 3
	65,000	HG, JG	HD	2, 3
		JG	JD, QD	
		QG, JL	QD	
		QG, BG6, HG, JG, LG, MG, PG	BD6	
		LH, PG, RG	HD, JD, QD	
		MG	HD, JD	1, 2, 3
		LG	HD, JD, KA, LA, MA	
		LG	LD	3
	100,000	PJ, RJ	QD	2
		LJ	HD, HG, JD, JG, LA, MG	2, 3
		LJ	LD, LG	3
		LL	LA, MG	2, 3
		QJ, BJ, HJ, JJ, LJ, MJ	BD6, BG6	
		PJ	BG6	3
		HJ	HD, HG	2, 3
		JJ, MJ, PJ, RJ	HD, HG, JD, JG	
		MJ	LA, LH	
	125,000	HL, JL	HD, HG, HJ	
		JL	JD, JG, JJ	
		HL, JL, LL	BD6, BG6, BJ	
		PL, RL	HD, HG, HJ, JD, JG, JJ	
	200,000	HR, JR	BD6, BG6, BJ	
		LR	BJ	3
		JR	QD	2, 3
		LR	HJ, HL, JJ, JL, LA, LH, QD, QG, QJ	
277	35,000	BG6, HG, JG, LG, MG, PG	BD6	1
	65,000	BJ, HJ, JJ, LJ, MJ, PJ	BD6, BG6	
	100,000	HL, JL, LL	BD6, BG6, BJ	
	200,000	HR, JR	BD6, BG6, BJ	
480	30,000	LA	HD, JD	2, 3
	35,000	HG, JG	HD	
		JG	JD	
		LH, MG, PG, RG	HD, JD	
		BG6, HG, JG, LG, MG, PG	BD6	
		LH	HG, JG	
		LG	LD	3
		LG	HD, JD, LA	2, 3
	42,000	RL	RG	
	65,000	HJ, JJ	HD, HG	
		BJ, HJ, JJ, LJ, MJ, PJ	BD6, BG6	
		JJ	JD, JG	
		LJ	LD, LG	3
		LJ	HD, HG, JD, JG, LA	2, 3
	100,000	HL, JL	HD, HG, HJ	
		HL, JL, LL	BD6, BG6, BJ	
		JL	JD, JG, JJ	
		PL, RL	HJ, JJ	
		LL	LD, LG, LJ	3
		LL	HD, HG, HJ, JD, JG, JJ, LA	2, 3
	200,000	HR, JR	BD6, BG6, BJ	
		HR	HD, HG, HJ, HL	
		JR	HD, HG, HJ, HL, JD, JG, JJ, JL	
		LR	HJ, HL, JJ, JL, LA, LH	
480Y/277	35,000	BG6, HG, JG, LG, MG, PG	BD6	2, 3
	65,000	BJ, HJ, JJ, LJ, MJ, PJ	BD6, BG6	
	100,000	HL, JL, LL	BD6, BG6, BJ	
	200,000	HR, JR	BD6, BG6, BJ	

[1] For indicated circuit breakers rated less than this maximum voltage. The indicated short circuit current rating also applies, but at the voltage rating of the circuit breaker.
[2] LG, LJ, and LL are only available in 3-pole configurations.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.152 I-Line Series Connected Circuit Breaker Ratings (RMS Symmetrical) (cont'd.)

Maximum System Voltage AC *[3]*	Maximum Short Circuit Current Rating	Square D Brand Integral or Remote 2- or 3-Pole Main Circuit Breaker *[4]*	Square D Brand Branch Circuit Breaker	
			Catalog Designation	Poles
600	18,000	HG, JG	HD	2, 3
		JG	JD	
		MG, PG, RG	HD, JD	
		LG	LD	3
		LG	HD, JD	2, 3
	25,000	HJ, JJ	HD, HG	
		JJ	JD, JG	
		LJ	LD, LG	3
		LJ	JD, JG, HD, HG	2, 3
	50,000	HL, JL	HD, HG, HJ	
		JL	JD, JG, JJ	
		PK	HJ, JJ	
		LL	LD, LG, LJ	3
		LL	HD, HG, HJ, JD, JG, JJ	2, 3
	100,000	HR	HD, HG, HJ, HL	
		JR	HD, HG, HJ, HL, JD, JG, JJ, JL	
		LR	HJ, HL, JJ, JL	
347	18,000	BG6, HG, JG, LG, MG, PG	BD6	1
	25,000	BJ, HJ, JJ, LJ, LL, MJ, PJ	BD6, BG6	
	50,000	HL, JL	BD6, BG6, BJ	
	100,000	JR	BD6 (60 A Max.), BG6, BJ	
		HR	BD6, BG6, BJ	
600Y/347	18,000	BG6, HG, JG, LG, MG, PG	BD6	3
	25,000	BJ, HJ, JJ, LJ, MJ, PJ	BD6, BG6	
		LJ	JD	
	50,000	HL, JL, LL	BD6, BG6, BJ	
		LJ	LG	
	100,000	HR, JR	BD6, BG6, BJ	
		LR	HJ, HL, JJ. JL	

[3] For indicated circuit breakers rated less than this maximum voltage. The indicated short circuit current rating also applies, but at the voltage rating of the circuit breaker.
[4] LG, LJ, and LL are only available in 3-pole configurations.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Table 9.153: Fuse/I-Line Circuit Breaker Series Connected Ratings

Maximum System Voltage AC *[5]*	Maximum Short Circuit Current Rating	Remote Main Fuse		Square D Brand Branch Circuit Breaker Catalog Designation (2- or 3-Pole) Unless Otherwise Stated
		Max A	Class	
120/240 1Ø 208Y/120	100,000	1200 A	L, T (300 V)	QD, QG
		800 A	T (600 V)	
		600 A	J, RK5	
240	65,000	1200 A	L, T (300 V)	QD
		800 A	T (600 V)	
		600 A	J, RK5	
	100,000	1200 A	L, T (300 V)	QD, QG (2-Pole)
		800 A	T (600 V)	
		600 A	J, RK5	
			J, T (600 V)	LA, LH, PG
			RK5	LA, LH, PG, HD, HG, HJ, HL, JD, JG, JJ, JL
			J	HD, HG, HJ, HL, JD, JG, JJ, JL
		800 A	T (600 V)	LA, LH, PG
			T (300 V)	PG
			L	LA, LH, PG
		1200 A	L	LA, LH, PG
			T (600 V)	HD, HG, HJ, HL, JD, JG, JJ, JL
		1600/2000 A	L	NA, NC, NX, PJ, PL
		4000 A	L	HD, HG, HJ, HL, JD, JG, JJ, JL
	200,000	600 A	J, T (600 V)	LA, LH, NA, NC, NX, PG, PJ, PL
			RK5	HD, HG, HJ, HL, JD, JG, JJ, JL, LA, LH, NC, NX, PG,PJ, PL
			J	HD, HG, HJ, HL, JD, JG, JJ, JL
		800 A	T (600 V)	LA, LH, NA, NC, NX, PG, PJ, PL
			T (300 V)	PG, PJ, PL
			L	LA, LH, NA, NC, NX, PG, PJ, PL
		1200 A	L	NA, NC, NX, PG, PJ, PL
			T (600 V)	HD, HG, HJ, HL, JD, JG, JJ, JL
		1600 /2000 A	L	NA, NC, NX, PJ, PL
		4000 A	L	HD, HG, HJ, HL, JD, JG, JJ, JL
480	100,000	400 A	J, T (600 V)	HD, HG, HJ, HL, JD, JG, JJ, JL
		600 A	J, RK5	HJ, HL, JJ, JL
		600 A	J, T (600 V)	LA, LH, NA, PG, PJ
			RK5	LA, LH, NA, PG, PJ
		800 A	L, T (600 V)	LA, LH, NA, PG, PJ
		1200 A	L	LA, LH, NA, PG, PJ
			T (600 V)	HJ, HL, JJ, JL
		1600 A	L	NA, PG, PJ
		2000 A	L	MG, MJ, NA, PG, PJ
		4000 A	L	HJ, HL, JJ, JL
	200,000	200 A	RK5	HJ, HL
		400 A	J	HJ, HL, JJ, JL, LA, LH, NA, NC, NX, PG, PJ, PL
			T (600 V)	HJ, HL, JJ, JL, LA, LH, NA, NC, NX
		600 A	J	LA, LH, LC, MG, MJ, NA, NC, NX, PG, PJ, PL
			T (600 V)	LA, LH, NA, NC, NX
			RK5	LA, LH, LC, MG, MJ, NC, NX, PG, PJ
		800 A	T (300 V)	PG, PJ, PL
			T (600 V)	LA, LH, MG, MJ, NA, NC, NX, PG, PJ, PL
			L	LA, LH, NA, NC, NX, PG, PJ, PL
		1200 A	L	MG, MJ, NA, NC, NX, PG, PJ, PL
		1600/2000 A	L	NA, NC, NX
600	100,000	30 A	CC	HG, JG (Molded Case Switches)
		200 A	J	HD, HG, HJ, HL, JD, JG, JJ, JL
		400 A	J, T (600 V)	HJ, HL, JJ, JL

- The fuse used in this UL test is an envelope (umbrella) fuse. This fuse is designed as a “worst case’’ fuse. Thus, no matter what manufacturer’s fuse is used, the Square D brand circuit breaker is protected.
- The line side fused switch may be in a separate enclosure or in the same enclosure as the loadside breaker. A line side fused switch may be a submain, integral main, or remote main. A load side breaker may be a branch, submain, or an integral main used on the load side of a remote main. This series combination short circuit current rating shall not exceed that of the line side fused switch. The charts apply to Square D brand load side breakers only. However, the line side fuse ratings are independent of the fuse manufacturer.
- Not applicable to Corner Grounded Systems.
- Limiters used in Square D brand DSL and DSL II fused power circuit breakers are not class L fuses and do not have series ratings.

[5] For indicated circuit breakers rated less than this maximum voltage. The indicated short circuit current rating also applies, but at the voltage rating of the circuit breaker.

© 2026 Schneider Electric
All Rights Reserved
4/10/2026

Section 10

Power Solutions Integrated Equipment



MPS



IPC



IPC2

Power Solutions Integrated Equipment 10-2

Power Solutions Integrated Equipment Overview 10-2

Modular Panelboard System 10-3

MPS (Modular Panelboard System) 10-3
Modular Panelboard System 10-3

Integrated Power Center 10-4

IPC (Integrated Power Center) 10-4
Integrated Power Center 10-4

Integrated Power Center 2 (IPC2™) 10-5

IPC2™ (Integrated Power Center 2) 10-5
Integrated Power Center 2 10-5
Integrated Power Center 2 Transformer Combo 10-5

EV Charging Power Distribution 10-6

Power Solutions Integrated Equipment 10-6
Level 2 208 V/240 V Fleet Charging and Level 3 480 V Nevi Compliant DC Fast Charging 10-6

© 2025 Schneider Electric
All Rights Reserved
3/20/2025

Visit us here:

Power Solutions Integrated Equipment Overview

For over 30 years, the Schneider Electric Power Solutions business has been providing integrated equipment solutions for retail construction, commercial, and industrial projects. The Square D™ brand family of integrated equipment combines electrical distribution, building controls, and automation into a single, factory-assembled and pre-wired enclosure/lineup. Our innovative, cost-effective, integrated solutions save valuable floor space, shorten construction cycle times, and reduce installation and material handling costs.

Modular Panelboard System—Pre-Engineered Solution

The Modular Panelboard System (MPS) is tailored to customer specifications and may include panels and lighting control equipment. Special Powerlink™ lighting control and column-width panel interiors are available. Additional options include power and control cable wiring, contactors, terminal blocks, surge protective devices (SPDs), equipment spaces, and power metering/monitoring solutions. Seismically qualified MPS sections are also available.
Tailored to customer specifications, MPS sections are:

- 86 in. (2184 mm) high,
- 9.5 in. (241 mm) deep, and
- vary in width depending on customer specifications

Integrated Power Center—Custom-Designed Solution

For more complex applications, the Integrated Power Center (IPC) allows for the integration of a variety of components, including electrical distribution equipment, HVAC controls, lighting controls, power quality and power conditioning products, SPDs, building management systems and power metering/monitoring solutions. As with all Power Solutions Integrated Equipment products, the IPC is designed to meet applicable codes and standards and is available as seismically qualified. Factory-assembled, pre-wired (based on shipping splits), and tested in a controlled environment, IPC sections are:

- 84 in. (2134 mm) high,
- 10.5 in. (267 mm) deep, and
- vary in width depending on customer specifications

Integrated Power Center 2

The newest addition to the family of Integrated Equipment products, the Integrated Power Center 2 (IPC2™) provides maximum flexibility to meet customers' specifications. Features include those found in the IPC and are provided in a free-standing enclosure that can be front and rear aligned when transformers are included. The IPC2 family is available as seismically-qualified. Enclosure options include NEMA 1, NEMA 1 with driphood and NEMA 3R. IPC2 sections are:

- 91.5 in. (2324 mm) high, and
- vary in width and depth depending on customer specifications

Integrated Power Center 2 Transformer Combo

Ideally suited for projects having both 480Y/277 V and 208Y/120 V requirements. Available as a stand-alone solution or can be incorporated into an MPS, IPC or IPC2 lineup. The standard 42in. wide x 24 in. deep footprint will decrease space requirements by 40% or more. A typical IPC2 Transformer Combo includes two panels in the upper cells and a transformer in the bottom cell. Other upper cell options include contactors, individually mounted circuit breakers, ATS's, equipment spaces and power metering/monitoring solutions. The IPC2 Transformer Combo is available as seismically qualified. Enclosure options include NEMA 1, NEMA 1 with driphood and NEMA 3R. IPC2 Transformer Combo sections are:

- 91.5 in. (2324 mm) high, and
- vary in width and depth depending on the transformer kVA

Additional savings are realized on installation, material costs and material handling, as shown in the table below.

Table 10.1: IPC2 Transformer Combo—Estimated Savings *[1]*

	Stick-Built	Transformer Combo	Savings Realized
Estimated Installation Hours	26–32	3–6	23–26
Materials	Associated pipe, wire and fittings	—	Associated pipe, wire and fittings
No. of Pieces Handled	20–30	1	19–29

[1] Based on an NF 480 V panel, 75 kVA transformer, NQ 240 V panel installation.

© 2025 Schneider Electric
All Rights Reserved
3/20/2025



Modular Panelboard System



MPS Interior

Modular Panelboard System

The pre-engineered Modular Panelboard System (MPS) bundles electrical distribution equipment into a single factory-assembled and wired integrated system. This approach replaces the traditional method of independently mounting each panelboard and lighting control system. MPS allows for the integration of a variety of components including:

- Panelboards: I-Line, NF, NQ, and Column-width
- Surge Suppression: SPD integral to panel and/or separately mounted
- Lighting Controls: Powerlink™ or lighting contactors
- Monitoring/Metering: PowerLogic™ power meters, circuit monitors, branch circuit monitoring, and system display meters

Equipment spaces including factory-installed lighting contactors are available in three configurations:

1. Unwired: Mounted in cell only
2. Line side wired: Line side of each pole is wired to a branch circuit breaker
3. Fully wired: Line side of each pole is wired to a branch circuit breaker, load side of each pole is wired to a terminal block

Built on a panelboard platform, Modular Panelboard System sections are NEMA 1-rated and meet the requirements of UL 67. Individual MPS configurations include panel sections in full-height, stacked or side-by-side arrangements. Individual sections measure:

- 86 in. (2184 mm) high
- 10–44 in. (254–1118 mm) wide
- 9.5 in. (241 mm) deep

Typical applications for MPS equipment include:

- Restaurants / Food service
- Office buildings / Public buildings
- Warehouses
- Schools / Universities

© 2025 Schneider Electric
All Rights Reserved
3/20/2025



Integrated Power Center



IPC Interior

Integrated Power Center

The custom-designed Integrated Power Center (IPC) combines electrical distribution equipment and building management controls into a single factory-assembled and wired integrated system. IPC has much greater design flexibility for producing a fully customized solution integrating a variety of distribution and control components, including:

- Panelboards: I-Line, NF, NQ, and Column-width
- Surge Suppression: SPD integral to panel and/or separately mounted
- Lighting Controls: Powerlink™ or lighting contactors
- Monitoring/Metering: PowerLogic™ power meters, circuit monitors, branch circuit monitoring, and system display meters
- Power quality and power conditioning
- Building automation
- HVAC controls

Equipment spaces including factory-installed lighting contactors are available in three configurations:

1. Unwired: Mounted in cell only
2. Line side wired: Line side of each pole is wired to a branch circuit breaker
3. Fully wired: Line side of each pole is wired to a branch circuit breaker, load side of each pole is wired to a terminal block

Integrated Power Centers are NEMA 1 rated and meet the requirements of UL 891. As with all integrated solutions, IPCs are shipped to the site fully assembled, completely pre-tested and ready-to-install. Individual IPC configurations include panel sections in full height, stacked, or side-by-side arrangements. IPC sections measure:

- 84 in. (2134 mm) High
- 10.25 (260 mm) Deep
- Widths vary, depending upon customer specifications

Typical applications for IPC equipment include:

- Retail stores / Grocery stores
- Office buildings / Public buildings
- Shopping malls / Strip malls
- Schools/Universities
- Restaurants / Food service
- Hotels/Motels
- Warehouses
- Equipment rooms

MPS and IPC Layout, Lead Time, and Pricing

Contact your local Schneider Electric representative or distributor.

MPS and IPC Shipping

MPS and IPC lineups are shipped factory-assembled and pre-wired. Customers may specify single- or multiple-section shipping splits (some limitations apply). In addition, lineups may be ordered with or without factory-installed power cables.

© 2025 Schneider Electric
All Rights Reserved
3/20/2025



Integrated Power Center 2

Integrated Power Center 2

The Integrated Power Center 2 (IPC2™) provides maximum design flexibility. In addition to the features found in the Integrated Power Center (IPC), IPC2 lineups are free-standing enclosures that can be front and rear-aligned. IPC2 has the ability to incorporate:

- Panelboards: I-Line, NF, and NQ
- Transformers: 300 kVA (max)
  - K-rated also available; may limit max kVA size of transformer
- Individually mounted circuit breakers
- Surge Suppression: SPD integral to panel and/or separately mounted
- Automatic Transfer Switch: Open type 400 A 3-pole maximum including a variety of options
- Lighting Controls: Powerlink™ or lighting contactors
- PowerLogic™ Monitoring / Metering: power meters, circuit monitors, branch circuit monitoring, and system display meters
- Building Management Systems

As a stand-alone solution, the IPC2 family provides the flexibility to enter and/or exit the section from either the top or bottom. IPC2 is offered in a variety of widths and depths:

- 24–48 in. (610–1219 mm) Wide
- 24–36 in. (610–915 mm) Deep

Typical applications for IPC2 equipment include:

- Schools/Universities
- Office buildings
- Data centers
- Industrial facilities
- Casinos
- Healthcare
- Hotels
- Any project with panels and transformers

ICP2 Layout, Lead Time, and Pricing

Contact your local Schneider Electric representative or distributor.

IPC2 Shipping

IPC2 lineups are shipped fully assembled and ready-to-install. Customers may specify single- or multiple-section shipping splits (some limitations apply). In addition, lineups may be ordered with or without factory-installed power cables.



IPC2 Transformer Combo

Integrated Power Center 2 Transformer Combo

For projects having both 480Y/277 V and 208Y/120 V requirements, the Integrated Power Center 2 (IPC2) Transformer Combo is the perfect solution. One of the most popular members of the IPC2 product family, the IPC2 Transformer Combo has been recognized by the industry multiple times for its innovative design.

As a stand-alone solution, the IPC2 Transformer Combo is appropriate when panelboards and transformers are installed in close proximity to each other. It provides the flexibility to enter and/or exit the section from either the top or the bottom. Catalog numbers have been created for some of the more typical configurations.

All IPC2 sections can be close-coupled to QED switchboard, MPS, and IPC products. Enclosure options for IPC2 include NEMA 1, NEMA 1 with driphood, and NEMA 3R-rated, and all meet the requirements of UL 891. These sections are also seismically qualified to meet IBC and ASCE7 requirements.

© 2025 Schneider Electric
All Rights Reserved
3/20/2025

Scan for brochure



Level 2 208 V/240 V Fleet Charging and Level 3 480 V Nevi Compliant DC Fast Charging

Electric Vehicles (EV) are rapidly gaining popularity, driving demand for reliable and efficient charging infrastructure. Schneider Electric offers customized integrated solutions to address power distribution needs for a wide variety of Level 2 and Level 3 (DC fast) EV charging applications.

Our solutions include flexible design options:

- Single or multi-section configurations
- Panelboards for I-Line, NF, and NQ applications
- Breaker-in-transformer cell design acting as main circuit breaker for panelboard

Example Configurations:

- 300 kVA Transformer = (2) 600 A NQ Panels w/ (2) 80% rated 600 A breakers for Level 2 fleet charging
- 225 kVA Transformer = (2) 400 A NQ Panels w/ (2) 100% rated 400 A breakers
- MDP Only = For Level 3 DC fast charging high-power requirements

Variation of Transformer sizes:

- 15 kVA to 300 kVA

Applications:

- Fleet Charging Level-2
- Quick Charging Level-3
- Parking Deck, Hotel, Other

The integrated EV offer comes in a compact NEMA 1 or 3R rated enclosure meeting UL891 requirements. Free standing construction. Units ship fully assembled, wired, tested, and ready for quick installation onsite. Typical dimensions are 91.5" high with widths and depths varying based on transformer size.

With diverse configurations available, Schneider Electric's EV charging power solutions ensure reliable, high-efficiency operation tailored to your facility's needs. Contact us to learn how our innovative offerings can power your EV charging infrastructure.

© 2025 Schneider Electric
All Rights Reserved
3/20/2025

Section 11

Switchboards and Switchgear



FlexSeT Switchboard



Metalclad and HVL/cc Switchgear



Unit Substation



Model III Package Unit Substation

Low Voltage Switchboards 11-2

- FlexSeT Switchboards (cULus Listed) **11-2**
- Power-Style QED-2 Switchboards (UL Listed) **11-7**
- Power-Style Commercial Multi-Metering Switchboards (UL Listed) **11-8**
- Power-Style QED-6 Switchboards (UL Listed) **11-9**

Low Voltage Switchgear 11-11

- Power-Zone™ 4 Low Voltage Switchgear with MasterPacT™ MTZ or NW/NT Circuit Breakers **11-11**
- Power-Zone™ 4 Arc Resistant Switchgear with ArcBlok Technology **11-12**
- Built on the Legendary Performance and Reliability of the MasterPact Line **11-12**

Medium Voltage Switchgear 11-13

- Air-Insulated Switchgear for Primary Distribution **11-13**
  - SureSeT™ Medium Voltage Metalclaid Switchgear (UL Listed) **11-13**
  - Masterclad™ Medium Voltage Metalclad Switchgear (UL Listed) **11-15**
- Gas-Insulated Switchgear (GIS) for Primary Distribution **11-17**
  - GHA Gas-Insulated Switchgear (UL Listed) **11-17**
  - CBGS-0 Gas-Insulated Switchgear (UL Listed) **11-18**
- Air-Insulated Switchgear for Secondary Distribution **11-19**
  - HVL/cc Metal-Enclosed Load Interrupter Switchgear—Full Range **11-19**
  - HVL/cc Switchgear Quick Ship Program—5–15 kV, 600 A **11-21**
  - HVL Metal-Enclosed Load Interrupter Switchgear—Full Range **11-26**
  - HVL Switchgear Quick Ship Program—5 kV–15 kV, 600 A **11-27**
  - HVL Switches for Power-Dry II™, Power-Cast II™, and Uni-Cast II™ Transformer Connections **11-28**
  - Square D™ Brand DIN/E Fuse Selection Tables—HVL **11-30**
  - Boric Acid Fuse Selection Tables—HVL **11-31**
  - MiniBreak™ Compact Height Switches— 5.5 kV, 200 A **11-32**
- Gas-Insulated Ring Main Units for Secondary Distribution Systems **11-34**
  - DVCAS Switchgear **11-34**
- Shielded and Solid Insulation System (SSIS) **11-36**
  - PremSeT Compact Vacuum Circuit Breaker Switchgear with Shielded Solid Insulation System (2SIS) **11-36**

Medium Voltage Unit Substations 11-37

- Power-Zone Load Center Unit Substations **11-37**
- Power-Zone Model III Package Unit Substations **11-37**

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 11.1: Low Voltage Switchboards

Description	Speed-D	FlexSeT	QED-2	QED-6
Amperage Range	400-800 A	2000 A, 400-1600 A Backfed Main	400-5000 A (6000 A cross bus available)	800-5000 A (6000 A cross bus available)
Voltages	120/240 1P 208Y/120 3P 240/120 3P 480Y/277 3P	208Y/120 3P 240 480Y/277 3P	120/240 1P 208Y/120 3P 240/120 3P 480Y/277 3P 600Y/347 3P	208Y/120 3P 240/120 3P 480Y/277 3P 600Y/347 3P
Max AIC	200 kA	65 kA	200 kA	200 kA
Enclosure Ratings	NEMA 1 NEMA 3R	NEMA 1 NEMA 3R	NEMA 1 NEMA 3R	NEMA 1
Incoming Connection	Cable	Cable (left incoming only)	Cable Busway Transformer (close coupled) Connect to Existing	Cable Busway Transformer (close coupled) Connect to Existing
Mounting Type	Free-Standing	Free-Standing	Free-Standing	Free-Standing
Arc Flash Mitigation	None	MMS	ERMS MMS ArcBlok	ERMS
Main Mounting	Unit Mounted I-Line Mounted	Unit Mounted I-Line (backfed)	Unit Mounted I-Line (backfed) Drawout	Drawout
Branch Mounting	I-Line Plug On	I-Line	I-Line Unit Mounted Drawout	Drawout
Utility Metering	EUSERC	EUSERC	EUSERC Non-EUSERC	EUSERC Non-EUSERC
Metering	Trip Unit	Power Meter	Power Meter ION Meter Trip Unit	Power Meter ION Meter Trip Unit
Surge Ratings	Available via NQ plug on option or I-line Enable	240 kA	Up to 480 kA	Up to 480 kA
Special Options and Features	Compact footprint for applications requiring lower amperage with utility metering	Backfed Main on Distribution section, swingable main for labor saving, ready to assemble switchboard built by distributors, short leadtimes	CTM ArcBlok ASCO Auto Transfer Switches Multi-Source Options Highly customizable	CTM Service Ready Multi-Source Options Highly customizable



New! FlexSeT Switchboards (cULus Listed)

FlexSeT is a complete low voltage Switchboard offer and service model that enables new methods of assembly, installation, and maintenance, while delivering unprecedented availability, reliability, and modularity. FlexSeT customers will benefit from dramatically reduced lead times with design flexibility through a modern and innovative switchboard system, offering an end-to-end digital experience.

Designed with the entire product lifecycle experience in mind, FlexSeT is a product developed with a fully customer centric approach, making everything simpler and faster from ordering to maintenance without compromising quality or safety, all while ensuring compliance to UL Standards.

FlexSeT is delivered on-time with the shortest lead time in the market! The complete offer can shorten delivery to days instead of weeks. Even with configuration changes at virtually any part of the ordering process. The product modularity allows for adaptations without risks to your project timelines as features are added or removed in the lineup.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Product Design and Key Features Highlights

Years of leadership in the switchboard market have provided Schneider Electric with the expertise to drive innovation. FlexSeT switchboards are designed to take solutions to a whole new level, making the best switchboards in the market even better.

Designed to be assembled anywhere without the need of heavy machinery or complex tools, FlexSeT is structured to be simple and intuitive, not only for assembly but also for operation and maintenance.


FlexSeT modularity comes in the form of kits and design features that allow for quick and easy installation, removal, or replacement. This makes installation and operation more intuitive and faster with the benefit of improved efficiency.




Swingable Main
The main breaker assembly is mounted on a robust hinge system. This feature enables the use of cable pulling machines in the equipment space and exposes the wire terminals for easier and faster connection.




Backfed Main at 1600 A
Main breaker and the I-Line™ stack in one single section to provide unmatched footprint performance.

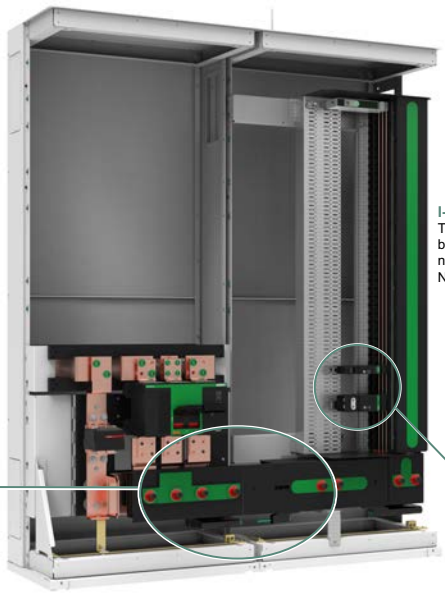


I-Line Bus Stack with Neutral Bar
The I-Line bus stack, which has been benefitting our customers for years, has now gotten even better by having the Neutral within the stack.



Captive Hardware
No lost time in removing and replacing covers as the hardware is always in place.



Bussing System
The bussing designs deliver reliable connections with quick and easy installation! Visi-tite™ bolts ensure proper torquing while the bus bridge connects all phases simultaneously in one simple operation. The bussing has an enclosed design which greatly reduces the points of exposed bus bars.



Plug-on Neutral
From Panelboards to Switchboards! Land the neutral closer to the load, reducing complexity and making wiring cleaner and more efficient.

Digital Journey and Tools

FlexSeT has taken advantage of the latest digital and end-to-end cyber-secured technology to drive customer satisfaction for the best possible experience throughout the lifecycle.

Digital tools are used in every aspect of the product starting at the quoting and ordering process with **FlexSeT Design™**. The new product selector is intuitive by nature and provides logic and pricing live at each selection, surfacing the right information to make informed decisions

Schneider Electric's **Asset Lifecycle Management™** (ALM) system tracks and stores all documentation for each feature and component of a FlexSeTSwitchboard. The documentation specific to each order and configuration is stored digitally, cyber-secured, and is accessible at anytime with a simple QR scan. This information is linked and stored directly from FlexSeTDesign and updated with any change.








The assembly process is executed with **FlexSeT Build™**, an interactive step by step guide for the assembler that help ensure the quality and integrity of the product. The app ensures each assembly step is properly executed from start to finish and inspected for compliance subsequently. Furthermore, FlexSeT Build™ is directly linked and paired with physical assembly tools that ensure proper technical aspects are adhered to, with live verification throughout the assembly. The testing of every section is also completed with FlexSeT Build™ as the last step. A successful result is required in order to generate and apply the UL label of certification. Each FlexSeTsection assembled will have a final report with Digital Artifacts and Photos for quality assurance and compliance.

The UL Mark and Certification Labels are issued digitally at the conclusion of each successful assembly. The auditing of an assembled FlexSeT switchboard is done via digital artifacts and critical quality data collected during assembly and quality control process.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



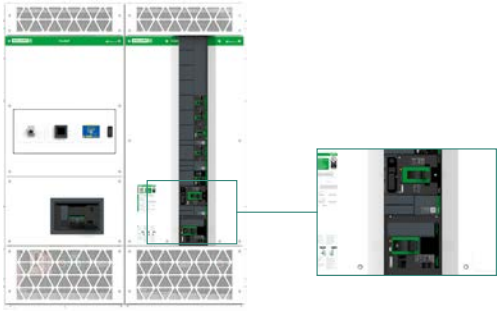

Features and Specifications Summary

Just like all Schneider Electric products, FlexSeT is always evolving to bring the best features to market with the latest technology, and will continue to develop and enhance customer solutions, constantly improving the offer!

Here are the latest features for FlexSeT Switchboards:

- Designed, listed, and assembled in accordance with UL 891 Standards
- NEMA 1 enclosure
- All front and side covers use captive hardware
- Front and rear accessible
- Swingable main breaker mounting assembly
- Main breaker ampacities—100% rated up to 65 kA
  - Backfed: 400 A, 600 A, 800 A, 1000 A, 1200 A, 1600 A
  - Individually mounted: 400 A to 2000 A
- All copper system bussing rated for 2000 A, including neutrals
- Plug-on neutral for group mounted devices
- 2000 A I-Line™ feeder section with neutral bar within the stack—feeders from 15 A up to 1200 A
- Splice bridge with extending bussing
- Visi-Tite™ bolts on all torque-required bussing connections
- Swingable instrument compartment—separated and modularized
- Available devices:
  - PowerLogic™ power meter PM5563
  - Surge protective device—rated up to 240 kA
  - Maintenance mode setting (MMS) switch—compliant with NEC 240.87 Arc Energy Reduction requirements
  - SmartCell™ compatible!
- Digital Asset Lifecycle Management—all drawings, test reports, and instruction/installation manuals are cyber-secured and available online



Partner Support Program

The Partner Support Program is in place to support and grow our partner business through fast and reliable service using a best-in-class process that is simple and smooth utilizing a self-help guide.

A dedicated Partner Support Program specialist is assigned to each partner with the mission to support, train, and certify partners to build FlexSeT switchboards with the high level of quality and safety standards expected of Schneider Electric products, as well as provide an ongoing and dedicated direct line of support.



Customer Care Center and Technical Support

For any inquiries on FlexSeT and other Schneider Electric products, please contact our customer service and technical support personnel at 1-888-778-2733 anytime. Our support teams can assist with any questions you might have and help you with the solutions you need.

Catalog of Kits and Parts

Use the commercial reference numbers listed in the following tables to order new/replacement kits and parts as needed. The modularity of the FlexSeT Switchboard design makes it easy for the equipment to expand according to our customer needs. Many applications are retrofittable. New functionality can be added by purchasing the kits below and installing on existing installed equipment. Certain spare parts are provided for replacement as needed by the customer.

Please consult Schneider Electric instruction bulletins JYT1078000, *FlexSeT Switchboards*, or NNZ9919501, *FLEXPON 570/1200/1200S Plug-on Neutrals*, for references on certain selections, based on application and technical specifications.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 11.2: Field Installable—Individually Mounted Devices (Installed in the Instrument Compartment)

Kit Description	Application	Maximum Voltage	Catalog No.	Installation Site
Instrument compartment box *[1]*	Enclosure for MMS/Trip unit, PM 5563, and SPD	600	FLEXINSTRCOMP	Partner/Field
MMS/Trip unit	Incident energy reduction switch; Low/no power circuit breaker trip		FLEXIMAMMS	
Power meter 5563	Power metering and monitoring		FLEXIMAMETER	
208 V SPD	Surge protection	208	FLEXIMA208SPD	
480 V SPD		480	FLEXIMA480SPD	
ENCT	Radial ground fault protection 400–2000 A	600	FLEXNCT2000	
120 Vac shunt trip *[2]*	Powerpact M/P/R remote tripping		S33661	Field
24 Vdc shunt trip *[2]*			S33659	

Table 11.3: Field Installable—Group Mounted Devices (Installed on the I-Line Stack)

Kit Description	Application	Maximum Voltage	Catalog No.	Plug-on Neutral Required	Installation Site
240 V MMS/Trip unit	Incident energy reduction switch; Low/no power circuit breaker trip	240	ICWL22X2BFMMMS	No	Partner/ Field
480 V MMS/Trip unit		480	ICWL24X2BFMMMS		
600 V MMS/Trip unit		600	ICWL26X2BFMMMS		
208 V SPD	Surge protection	220	FLEXGRP208SPD	Yes	
480 V SPD		480	FLEXGRP480SPD		
Power meter 5563	Power metering and monitoring		FLEXGRPPM5563	No	
120 Vac shunt trip *[2]*	Powerpact M/P/R remote tripping	600	S33661		Field
24 Vdc shunt trip *[2]*			S33659		
1200 A plug-on neutral with sensor *[3]*	Neutral termination device with LSIG circuit breakers		FLEXPON1200S	—	Partner/ Field
1200 A plug-on neutral *[3]*	Neutral termination device		FLEXPON1200		
570 A plug-on neutral *[3]*			FLEXPON570		

FlexSeT Circuit Breakers—Prewired for MMS and Ground Fault Applications

Please use the following table as a reference-specific circuit breakers. These circuit breakers are PowerPact™ Series with a wire harness pre-installed according to application needs. If MMS, or ground fault protection are needed in main or feeder applications, these circuit breakers must be used. These circuit breakers should not be installed in QED-2 Switchboards.

The I-Line™ feeder section in FlexSeT switchboards is fully compatible with any plug-on circuit breaker used in QED-2 Switchboards. The circuit breakers listed in the table are specific only to applications mentioned above, where a harness is provided for ease of installation.

Table 11.4: FlexSeT Circuit Breakers

Description	Application	Mounting Type	Trip Unit	Pre-Wired Harness	Catalog No.
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	I-Line Group Mounted	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJA36100U44AFLEX
600 V, 800 A circuit breaker	Main or feeder; MMS capable	I-Line Group Mounted	5.0 A (LSI)	MMS and Trip Unit Power	PJA36120U43AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	I-Line Group Mounted	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJA36120U44AFLEX
600 V, 400 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36040CU43AFLEX
600 V, 400 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36040CU44AFLEX
600 V, 400 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36040U43AFLEX
600 V, 400 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36040U44AFLEX
600 V, 600 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36060CU43AFLEX
600 V, 600 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36060CU44AFLEX
600 V, 600 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36060U43AFLEX
600 V, 600 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36060U44AFLEX
600 V, 800 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36080CU43AFLEX
600 V, 800 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36080CU44AFLEX
600 V, 800 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36080U43AFLEX
600 V, 800 A circuit breaker	Main or Feeder - MMS and Ground Fault Capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36080U44AFLEX
600 V, 1000 A circuit breaker	Main or Feeder - MMS Capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36100CU43AFLEX

[1] Required for MMS/Trip unit, PM5563, or SPD installation only. An instrument compartment for field installation needs to be ordered with an instrument compartment cover (catalog number 80210-181-50) in theTable 11.5 FlexSeT Spare Parts, page 11-6 table. Not required for ENCT or shunt trip kits.

[2] Shunt trip kits to be shipped from partner to field job site for contractor installation only.

[3] Plug-on neutrals have limited amounts of devices that can be provided. Please consult the FlexSeT PON instruction bulletin (NNZ9919501) to determine the right allocation per circuit breakers and other devices.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 11.4 FlexSeT Circuit Breakers (cont'd.)

Description	Application	Mounting Type	Trip Unit	Pre-Wired Harness	Catalog No.
600 V, 1000 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36100CU44AFLEX
600 V, 1000 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36100U43AFLEX
600 V, 1000 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36100U44AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36120CU43AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36120CU44AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	PJF36120U43AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LSIG)	MMS, Trip Unit Power, and ENCT	PJF36120U44AFLEX
600 V, 1000 A circuit breaker	Main or feeder; MMS and ground fault capable	I-Line Group Mounted	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKA36100CU44AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS capable	I-Line Group Mounted	5.0 A (LSI)	MMS and Trip Unit Power	RKA36120CU43AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	I-Line Group Mounted	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKA36120CU44AFLEX
600 V, 1000 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36100CU43AFLEX
600 V, 1000 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36100CU44AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36120CU43AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36120CU44AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36120U43AFLEX
600 V, 1200 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36120U44AFLEX
600 V, 1600 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36160CU43AFLEX
600 V, 1600 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36160CU44AFLEX
600 V, 1600 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36160U43AFLEX
600 V, 1600 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36160U44AFLEX
600 V, 2000 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36200CU43AFLEX
600 V, 2000 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36200CU44AFLEX
600 V, 2000 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36200U43AFLEX
600 V, 2000 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36200U44AFLEX
600 V, 2500 A circuit breaker	Main or feeder; MMS capable	Unit Mount	5.0 A (LSI)	MMS and Trip Unit Power	RKF36250U43AFLEX
600 V, 2500 A circuit breaker	Main or feeder; MMS and ground fault capable	Unit Mount	6.0 A (LISG)	MMS, Trip Unit Power, and ENCT	RKF36250U44AFLEX

Spare Parts

These kits can be ordered for replacing parts, as necessary. The following table lists commercial kits for parts sold in individual or paired quantities. These kits can be ordered for replacing parts, as necessary. If a needed part or hardware is not listed, please contact Customer Service or the Partner Support Program Team.

Table 11.5: FlexSeT Spare Parts

Description	Catalog No. *[4]*	Parts List *[4]*
Instrument compartment front cover assembly	80210-181-50	—
Deadfront covers	80210-219-50	80210-070-50 80210-071-50
Barriers	80210-219-51	80211-011-01 80211-015-01
Vented covers	80210-219-52	80210-072-50 80210-073-50
Bracing	80210-219-53	2 x 80210-080-50
Rear corner channel	80210-219-54	2 x 80210-020-50
Front corner channel	80210-219-55	2 x 80210-013-01
Escutcheon package	80210-219-57	80210-095-50
RCC main package	80210-219-58	2 x 80210-020-51
Rodent Barrier	80210-219-59	2 x 80210-010-01
Access cover	80210-219-60	2 x 80210-003-01
Base assembly with rivets	80210-074-50	80210-074-50
Frame with ground bus	80210-087-50	80210-087-50
Frame with ground bus and lugs	80210-087-51	80210-087-51
1600 A MCCB backfed bus bar assembly	80210-090-50	—

[4] Contact Customer Care

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



QED-2 Switchboard
The industry exclusive I-line design enables quick installation of group mounted breakers with one single screw and a flathead screwdriver.



ArcBlok 2500
Line side arc flash hazard protection, reduces incident energy exposure to less than 1.2 cal/cm2



TH110 Temperature Sensor for Continuous Thermal Monitoring
Remote monitoring and alarming of cable connection temperatures reduces risks and help prevent connection failures.

Power-Style QED-2 Switchboards (UL Listed)

QED-2 low voltage switchboards from Schneider Electric are built to last with durable construction and flexible design. These free-standing structures can contain circuit breaker overcurrent protection up to 5000 A at a maximum voltage of 600 Vac.

QED-2 is future ready with the options of having advanced metering, continuous thermal monitoring, ArcBlok, and communicating trip units. Pair QED-2 with EcoStruxure Power, Asset Advisor, or Energy Hub.

QED-2 offers a wide variety of features and pre-engineered designs with optimized lead times. Custom versions of switchboards are also available to accommodate project-specific design criteria. The QED-2 frame allows various special components to be mounted in the switchboard, saving time, money and space in the field. These components include automatic throwover systems, automatic transfer switches, and special metering systems. This flexibility means the QED-2 switchboard can meet customer requirements on the most complex applications.

Features

Structure

- QED-2 switchboards are designed, listed, and built to UL 891
- Switchboard ratings through 5000 A, 200 kA

Service

- Single and multiple source configurations
- Cable, busway, transformer, or bussed incoming connections
- Front accessible load connections
- Hot or cold sequence utility metering

Devices

- PowerPacT™ electronic molded case circuit breakers
- MasterPacT™ stored energy fixed or drawout circuit breakers
- Thermal-magnetic circuit breakers
- Group-mounted I-line circuit breakers
- Stacked breaker designs for PowerPacT and MasterPact circuit breakers to optimize overall layout
- Main and branch devices in single section configuration

Safety

- Energy-reduction maintenance switch available for single-mount and group-mounted devices
- ArcBlok line side arc flash hazard reduction
- Continuous thermal monitoring
- Remote status indication and control
- Internally-mounted Surgelogic™ surge protection

Connectivity

- EcoStruxure Power Monitoring Expert, Asset Advisor, and Energy Hub
- PowerLogic customer metering, including options for custom communications and interwiring
- Networked communications capabilities provide direct access to energy management at main and feeder level

Source control

- Quick Connect Generator option available
- ASCO automatic transfer switches available for load transfer between alternate sources of power
- Multiple source configurations including main-tie-mains and automatic transfer schemes

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Power-Style Commercial Multi-Metering Switchboards (UL Listed)

- Designed, built, and listed to UL 891
- Lever bypass and EUSERC non-lever bypass
- Hot or cold sequence metering—EUSERC, NEMA, LOCAL
- Front and rear alignment standard
- Switchboard ratings through 4000 A, 100 kA
- Meter sections in either three- or six-socket section configuration
- Tenant mains either circuit breaker or fusible
- 60–200 A without lever bypass with self-contained meter sockets, 5- or 7-jaw, ring type and test block where required
- 60–200 A lever bypass with self-contained meter sockets, 7-jaw, ringless
- Factory-installed devices with completely wired from meter socket to disconnect
- Provisions for adding future tenants available, as well as future sections
- Sections in either NEMA 1 or NEMA 3R construction
- For use on 120/240 V, 120/208 V, and 277/480 V systems
- Integrated, front-accessible wireway for top exiting load cables
- Customer access area for top exiting load cables



Lever Bypass
Class 2755



EUSERC
Class 2756

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



QED-6 Switchboard with MasterPact MTZ Circuit Breakers (Class 2746)



QED-6 Switchboard with MasterPact NW/NT and PowerPacT H/J Circuit Breakers (Class 2746)

Power-Style QED-6 Switchboards (UL Listed)

MasterPacT™ MTZ, NW, NT, and PowerPacT™ H and J Circuit Breakers

The QED-6 switchboard is designed to provide excellent distribution, protection, and power quality management in commercial electrical equipment. The circuit protection components of the switchboard are the MasterPacT MTZ2, MTZ3 or NW circuit breakers in 800–6000 A frame sizes, MasterPacT MTZ1 or NT circuit breakers in 800–1200 A frame sizes, and PowerPacT H and J circuit breakers in 150–250 A frame sizes. These circuit breakers deliver maximum system uptime, system selectivity, ease of maintenance, and reliable circuit protection.

QED-6 switchboard features include: MasterPacT MTZ2, MTZ3 or NW UL 489 Listed circuit breakers for main and feeder devices, MasterPacT MTZ1 or NT UL 489 Listed circuit breakers for feeder devices, PowerPacT H and J UL 489 Listed circuit breakers for feeder devices, and a wide range of designs and options. Highly flexible drawout circuit breakers can meet a wide variety of power distribution requirements. Choices include drawout construction in PowerPacT H and J circuit breakers, and optional prepared drawout spaces that are equipped with all specified control functions. This capability allows quick additions for load upgrades.

- QED-6 switchboards are designed, listed, and built to UL 891; MasterPacT and PowerPacT circuit breakers are designed, listed, and built to UL 489
- Circuit breakers are individually mounted, rear connected; MasterPacT MTZ, NW and NT circuit breakers are drawout; PowerPacT H and J breakers are drawout
- Family of field installable and upgradeable MicroLogic™ trip units with optional EcoStruxure Power™ data communications features
- Switchboard ratings up to 150 kA short-circuit current rating for services 1600–6000 A at 480 V and 100 kA at 600 V
- Up to (12) 250 A PowerPacT H and J circuit breakers in a single 30-inch wide section
- Up to (8) 1200 A frame MasterPacT MTZ1/NT circuit breakers in a single 30-inch wide section
- Flexible branch circuit breaker locations: MasterPacT and PowerPacT circuit breakers can be mixed in a single 30-inch wide section (15–2000 A)
- Compartmentalization: separate compartments for circuit breakers, bussing, and load cabling
- Available in 54-, 60-, 72-, and 80-inch deep construction
- Available in NEMA 3R outdoor walk-in enclosures
- Mixing of MTZ and NW/NT circuit breakers are not offered in factory configured sections but can be field retrofitted as such
- MasterPacT and PowerPacT circuit breakers are field maintainable

Table 11.6: Circuit Breaker Selection

Rating (A) (Frame)	Circuit Breakers
150–250	PowerPacT H, J
800–1200	MasterPacT MTZ1/NT
800–6000	MasterPacT MTZ2, 3/NW

QED-6 switchboards are reliable power protection equipment when working with telecommunication facilities, e-business servers, or mainframes that perform critical business transactions. These types of facilities cannot afford downtime.

QED-6 rear-connected switchboards are designed as standalone switchboards or as an integral part of the low voltage equipment lineup in a user's power unit substation.

Specify QED-6 Switchboards

When drawout construction is required for quick circuit breaker changeout; system requirements call for circuit breakers to close within five cycles; stored energy circuit breakers are required; front access to control wires is desired; ease of installation, maintenance, and upgrade of circuit breaker compartmentalization is required; system integrity and segregation of circuit breaker compartments from bus and cable compartments is required; equipment isolation is required.

Benefits/Values of Circuit Breaker Performance

MasterPact MTZ, NW and NT circuit breakers are designed to provide maximum protection and reliable operation with a long service life. They exceed all UL 489 endurance testing requirements and are certified to a minimum of 10,000 operations through the 3000 A frame.

System Coordination

Short-time ratings are high, giving users excellent system coordination and selectivity with downstream breakers.

High Short-Circuit Current Ratings (SCCR)

Up to 200 k AIR at 240 V, 150 k AIR at 480 V, and 100 k AIR at 600 V, which allows customers to design systems with high fault current and paralleling schemes.

Arc Flash Limiting (LF) Feeder Breakers

High speed operation of MasterPact MTZ, NW and NT circuit breakers (150 k AIR at 480 V) helps reduce arc flash incident energy (cal/cm2) on downstream equipment.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Ease of Installation and Maintenance

Thru-the-door construction, an easy to operate drawout mechanism, and front access to all control wiring make this equipment easy to install, maintain, and upgrade. Load connections in the cable compartment are easily accessible in the rear of the switchboard. Remote racking of the MasterPact circuit breaker is also available with the optional remote racking tool, which, if required, is field installable.

Ability to Upgrade

UL Listed, field-installable accessories include: motor operators, shunt trips, under voltage devices, trip units, and communication modules for trip units. Manually operated circuit breakers are field convertible to electrical operation.

Open Communication System

The MicroLogic trip units in MasterPact circuit breakers use the Ethernet TCP/IP or Modbus™ serial protocol. These are widely accepted protocols which allow QED-6 to be integrated into new or many existing communication systems.

Adaptable

Drawout circuit breakers, front access control wiring, and expandable lineups are quickly adaptable to changing load and control requirements.

Expandable

MasterPact circuit breakers have many control termination points, giving the equipment extensive flexibility and expandability for sophisticated control schemes.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



Power-Zone 4
Low Voltage Switchgear with MasterPacT MTZ Circuit Breakers
(Class 6037)



Power-Zone 4
Low Voltage Switchgear with MasterPacT NW Circuit Breakers
(Class 6037)



Power-Zone 4
Front Accessible Low Voltage Switchgear
(Class 6037)

NOTE: Shown with MasterPacT MTZ circuit breakers. MasterPacT NW circuit breakers are also available.

Power-Zone™ 4 Low Voltage Switchgear with MasterPacT™ MTZ or NW/NT Circuit Breakers

Square D™ brand Power-Zone™ 4 low voltage, metal-enclosed, drawout switchgear is designed to provide superior electrical distribution, protection, and power quality management. The prime components of the switchgear are the MasterPacT™ ANSI rated circuit breaker. Power-Zone 4 switchgear is designed to maximize the functionality of the MasterPacT circuit breakers, which, in turn, deliver maximum uptime, system selectivity, ease of maintenance, and reliable circuit protection. All of these features are packed into the smallest footprint available for low voltage drawout switchgear.

- Power-Zone 4 is designed and built to ANSI® C37.20.1 and is Listed to UL 1558
- MasterPacT MTZ, NW and NT drawout low voltage power circuit breakers are designed and built to ANSI C37.13 and C37.16. Listed to UL 1066
- Short-circuit current rating up to 200 kA at 240 V and 480 V without fuses
- High short-time withstand ratings up to 100 kA for 1 second, minimum
- Arc flash limiting (L1F) MasterPacT MTZ2 or NW feeder breakers available in 800, 1600, and 2000 A ratings
- Family of field installable and upgradeable MicroLogic™ trip units with optional EcoStruxure Power™ data communications features
- Power-Zone 4 switchgear can offer optional factory integrated data communications capability with Ethernet (Modbus TCP/IP) connectivity to EcoStruxure Power Edge Control or Asset Management software
- Smallest equipment footprint available in this product class
- Front access to all control and communications wire connections
- Bolted copper bus provided as standard (up to 6000 A maximum)
- Large rear cable compartment pull area allowing maximum room for power cables
- Horizontal bus provision for future equipment expansion
- System designed for maximum uptime with low maintenance
- Modular circuit breaker designed for easy addition of control accessories
- Available in NEMA 3R outdoor walk-in enclosures
- Available in 42" deep, front accessible only version for greater layout flexibility and optimized electrical house footprint
- Available Arc Resistant construction certified to ANSI C37.20.7. See Power-Zone™ 4 Arc Resistant Switchgear with ArcBlok Technology, page 11-12.

MasterPacT MTZ2, 3 or NW circuit breakers are available in various levels of interrupting ratings from 42–200 kA at 480 V and 130 kA at 600 V.

The MasterPacT MTZ1 or NT circuit breaker is available in an 800 A frame size and 42 kA at 480 V interrupting rating. Up to 8 MasterPacT MTZ1 or NT circuit breakers can be mounted in a 30-inch wide section. (Not available for 600 V.)

Circuit breakers of like frame sizes and interrupting ratings are interchangeable.

Table 11.7: Equipment Ratings

Application Voltage Systems	Ampacities
600 Vac Maximum 1Ø3W, 3Ø3W, 3Ø4W 50/60 Hz	1600 A–6000 A (Main circuit breaker or main lugs only)

Short-Circuit Current Ratings			Short-Time Withstand Ratings
240 V	480 V	600 V	
42 kA	42 kA	42 kA	42 kA
65 kA	65 kA	65 kA	65 kA
85 kA	85 kA	85 kA	85 kA
200 kA	200 kA	130 kA	100 kA (maximum)

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



Arc Resistant Power-Zone 4
Low Voltage Switchgear
(Class 6037)

NOTE: Shown with MasterPact NW ArcBlok circuit breakers. MasterPact MTZ2,3 ArcBlok circuit breakers are also available.

Power-Zone™ 4 Arc Resistant Switchgear with ArcBlok Technology

Protecting Your Personnel and Equipment from an Arc Flash

Power-Zone 4 arc resistant switchgear with MasterPact ArcBlok technology offers patented, superior arc flash protection for operators and maintenance personnel. The arc flash containment features are unique to the industry in both the circuit breaker compartment and the structure.

Power-Zone 4 Arc Resistant Switchgear with ArcBlok Technology is certified to comply with *ANSI C37.20.7 IEEE Guide for Testing Metal-Enclosed Switchgear Rated Up to 38 kV for Internal Arcing Faults*, and third-party (UL) witnessed as arc resistant switchgear. Refer to Data Bulletin 6037DB1302 for the complete UL Witness Certification Summary.

Features

- MasterPact MTZ2, 3/NW circuit breakers with patented ArcBlok technology (up to 5000 A)
- Rated for systems with up to 100kA, 635V fault current
- 60 in. deep x 22 in. wide (smallest arc resistant footprint in the industry)
- 22 in., 36 in. section widths
- 60 in., 72 in., 80 in. section depths
- Internal arc gas management system for optimized cooling
- ANSI Type 2B Rating
- NEMA 1 enclosure

Available Options

- Insulated copper bus
- Zone selective interlocking
- High-resistance grounding
- Energy reduction maintenance switch
- Section barriers (rear, cable, and side)
- Circuit breaker remote racking
- ANSI Type 2B rated arc plenum exhaust

Built on the Legendary Performance and Reliability of the MasterPact Line

MasterPact MTZ circuit breakers prepare you for the future of power distribution. Smart connectivity. Remote monitoring. Easy customization via digital modules. MasterPact MTZ circuit breakers bring the future-ready EcoStruxure Power capabilities you need to build smart, dependable, and sustainable power distribution systems:

- Smartphone connectivity for wireless alerts and maintenance
- Precision Class 1 power meter built in for energy-saving capabilities
- Easy customization via digital modules
- Intuitive MicroLogic™ X control unit
- Robust performance, even in harsh environments
- Seamless integration with building and energy management systems via EcoStruxure Power architecture
- Designed and tested to applicable standards for ANSI, UL and IEC





© 2025 Schneider Electric
All Rights Reserved
12/17/2025



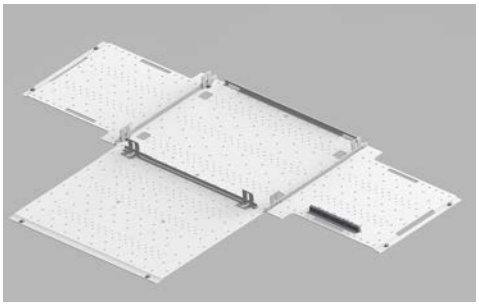


Table 11.8: Ratings

Maximum Voltages	4.76 kV, 15 kV
Continuous Current – Circuit Breakers	1200 A, 2000 A
Continuous Current – Main Bus	2000 A
Symmetrical Interrupting Capacity	25 kA, 40 kA
Basic Impulse Level	95 kV, peak (impulse) dielectric withstand
Enclosure	NEMA Type 1 – Indoor enclosure
Paint Color	White RAL 9003 finish standard. Additional colors selectable with customer provided paint sample with additional cost and lead time.

New!

SureSeT™ Medium Voltage Metalclaid Switchgear (UL Listed)

Product Description

Schneider Electric's Square D SureSeT™ metal-clad switchgear powered by EvoPacT™ vacuum circuit breakers provides control and protection of medium voltage power equipment.

SureSeT offers a two-high breaker design in a narrow 26 in. wide footprint that is fully compartmentalized for breaker, auxiliary equipment, and low voltage compartment. SureSeT is designed to be configured in various combinations to meet customer requirements. It is enabled with Circuit Breaker Monitoring.

SureSeT switchgear with EvoPacT circuit breakers is tested in accordance with ANSI C37.20.2. EvoPacT circuit breakers are tested per ANSI C37.09. SureSeT and EvoPacT are UL and cUL listed.

Smart Through Design

- EvoPacT breaker tested to 30,000 breaker open/close operations and 1,000 breaker racking operations
- SureSeT switchgear uses only Schneider Electric in-house designed key components: breaker mechanism, vacuum interrupter bottles, contact, etc.
- Breaker designed with integrated racking mechanism allowing for ease of maintenance
- Fillable frame design for low voltage compartments. That is, the original equipment manufacturers (OEM) and panel builders can wire low voltage devices ahead for ease of assembly.
- Circuit breaker health monitoring uses sensors embedded within the circuit breaker to measure strategic data of the most critical points including:
  - Thermal monitoring of circuit breaker primary connections
  - Operating speed of circuit breaker mechanism
  - Vacuum interrupters contact erosion gap
  - Health of closing and tripping coils
  - Health of spring charging motors
  - Health of circuit breaker/VT/CPT racking motors, when equipped

  Alarms and notifications are displayed on the HMI screen when action is required.

For more information on this product, contact your Schneider Electric sales representative.


Standard Features

SureSeT is metal-clad switchgear as defined by ANSI C37.20.2 and includes:

- Withdrawable circuit breakers
- Fully compartmentalized construction
- Grounded metal barriers enclose all live components
- Automatic shutters over primary contacts
- Fluidized-bed epoxy insulated bus
- Mechanical and electrical interlocks
- Disconnect type voltage transformers or low power voltage transformers
- Fixed control power transformer with draw out primary fuses
- Grounded breaker truck in and between test-disconnected and connected positions
- Low voltage control compartment isolated from primary voltage areas
- Front and rear access required

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Front view

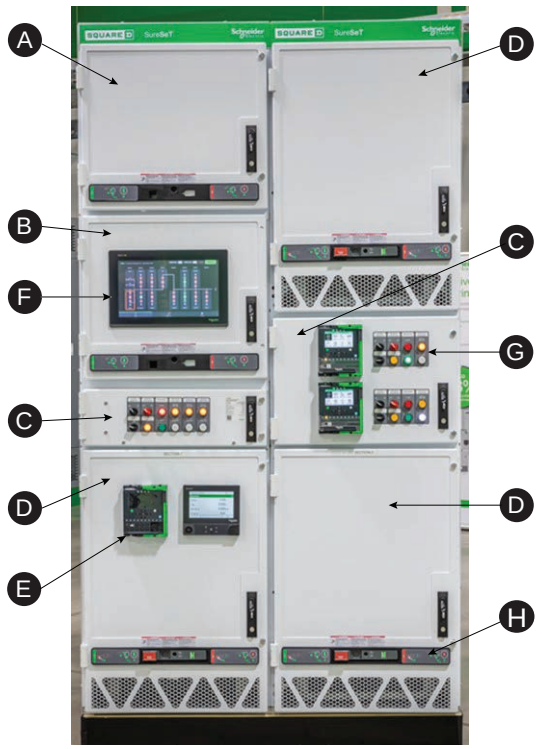

Rear view



Table 11.9: Legend

A	Auxiliary compartment – Position A	F	Human Machine Interface (HMI) screen (only available with Digital Monitoring package)
B	Auxiliary compartment – Position B	G	Control panel with local/remote switch, operational pushbuttons, and racking time delay
C	Low voltage compartment	H	Racking mechanism faceplate
D	Upper and lower circuit breaker compartment	I	Cable connections
E	Instruments can be mounted on the panel doors in front of the circuit breakers or auxiliary drawouts.	J	Busbar connection for auxiliary to main

For more details on circuit breaker cubicle, refer to the EvoPacT™ ANSI product range online.

Technical Characteristics

Table 11.10: SureSeT Switchgear Characteristics

Main Characteristics	
Brand	Square D™ by Schneider Electric
Range series of product	SeT Series
Range of product	SureSeT
Product or component type	Metal-Clad MV Switchgear
Insulation types	Group A – Bushings and stand-off insulators are molded fiberglass polyester. Group B – Bushings are epoxy, stand-off insulators are porcelain.
Ratings of SureSeT switchgear with EvoPacT Series	
Rated maximum voltage range available (kV rms)	5–15.0
Rated power frequency withstand range available (kV rms)	19–36
Rated lightning impulse withstand insulation levels available (kV peak)	60–95
Rated frequency (Hz)	60
Rated continuous current range available (A)	1200–2000
Rated momentary withstand current range available (kA peak)	65–104
Rated 2 second short-time withstand current (kA sym)	25–40
Enclosure category	B
Internal arc withstand	Non-Arc rated
RoHS compliant	Applicable
REACH compliant	Applicable
California Proposition 65	Applicable
Ambient and Operating Conditions	
Type	Type 1 Indoor
Applicable Codes and Standards	
cULus	Listed
IEEE	Compliant
NEMA	Compliant
CSA	Compliant
IEC/IEEE	Compliant
Seismic IBC / ASCE 7	Compliant
3–cycle interrupting rating	Rated
ANSI/IEEE C37.20.2, C37.09, C37.54, C37.55	Rated

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Dimensions and Weight

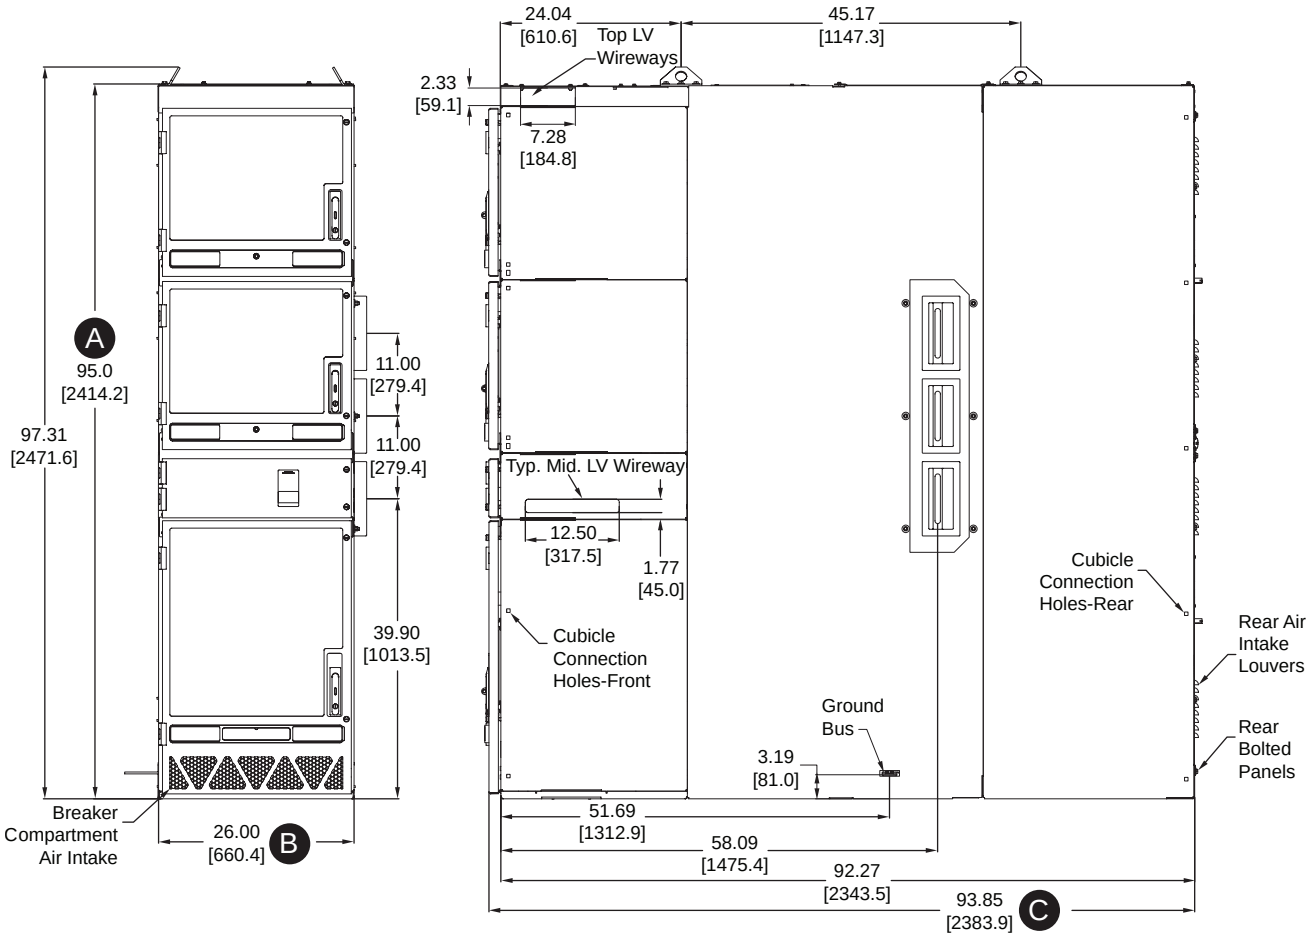


Table 11.11: Switchgear and Component Approximate Dimensions

Item		Description
A	Section Height	95 in. (2,413 mm)
B	Section Width	26 in. (660 mm)
C	Section Depth	92.5 in. (2,350 mm)

Masterclad™ Medium Voltage Metalclad Switchgear (UL Listed)

The Reliability of a Quality Design

Masterclad™ offers a customizable solution for demanding medium voltage applications. Rugged construction is coupled with low maintenance 3-cycle vacuum circuit breaker.

A comprehensive design testing program has been performed by Schneider Electric. The switchgear and breakers are designed and tested in accordance with all applicable ANSI Standards C37.04, C37.06, C37.09, and C37.20.2. The switchgear and breakers meet the requirements of ANSI, IEEE, NEMA, and exceeds most IEC standards.

Listed Metalclad Switchgear



Two-high Masterclad 5–27 kV Indoor, Metalclad Switchgear

Table 11.12: Ratings

Nominal voltage (kV)	4.16			7.2	13.8				24.9	
Maximum voltage (kV)	4.76			8.25	15.0				27.0	
BIL (kV)	60			95	95				125	
Frequency (Hz)	50/60									
Continuous amperes (A)	1200–4000								1200–2000	
MVA (reference only)	250	350	500	500	500	750	1000	1500	1250	2000
Short-time rating (kA) 3 seconds	40	50	63	50	25	40	50	63	25	40
Close and latch rating (kA) (peak)	104	130	164	130	65	104	130	164	68	108

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



Vacuum VR Circuit Breaker
for Masterclad Switchgear



Masterclad 27 kV, Outdoor
Non Walk-in, Metalclad Switchgear

Type VR Vacuum Circuit Breaker

The VR breaker is a horizontal drawout type designed to provide long life, reduced maintenance, and ease of handling. The Type RI advanced design motor-charged stored energy mechanism is a model of reliability with simplicity-with an operating life exceeding ANSI requirements. The VR circuit breaker is UL labeled and includes a permanently mounted manual charging handle.

Standard features include:

- 3-cycle interrupting rating
- Rated per ANSI/IEEE C37.06, C37.09, C37.013, C37.54
- UL Listed
- Motor operated, spring-charged, stored-energy operating mechanism
- Permanently mounted manual charging handle
- Five normally open and normally closed auxiliary contacts
- Wheels that roll directly to floor level from lower cell


Switchgear Construction

- High-speed operation—3–cycles
- Removable (draw-out) circuit breaker
- Grounded metal barriers enclose all live parts
- Automatic shutters driven by breaker racking mechanism
- Closed door breaker position indication
- Closed door breaker racking mechanism
- Insulated main bus—aluminum or copper
- Standard glass polyester insulators or optional epoxy and porcelain insulators
- Mechanical interlocks
- Disconnect type CPT and VT trucks
- Grounded breaker truck in and between test/disconnected and connected positions
- Low voltage instrument/control compartment isolated from primary voltage areas
- Compliance to ANSI/IEEE standards C37.20.2 and C37.55 (designed and tested to comply with or exceed ANSI and IEEE standards)
- ISO 9001 Certification (Designed and manufactured in a facility that is Quality Systems Certified by Underwriters Laboratories, Inc.® to ISO 9001)
- Indoor NEMA 1 enclosure
- Outdoor NEMA 3R enclosure
  - Walk-in enclosure
  - Non walk-in enclosure

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



Listed Metal-Enclosed Interrupter Switchgear

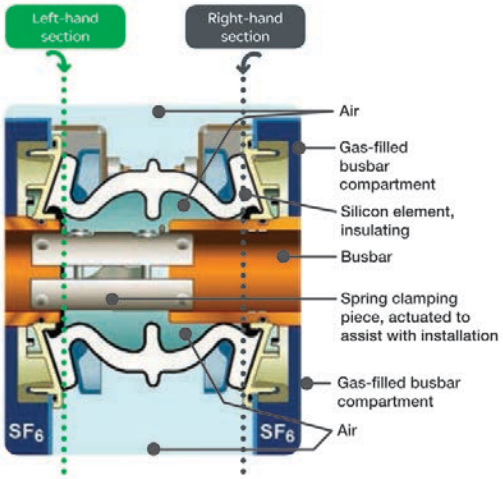

GHA Gas-Insulated Switchgear (UL Listed)

Easy, innovative, and economical **up to 38kV**

GHA Medium Voltage (MV) switchgear is an ideal solution for a variety of applications and requirements. GHA is well suited for public and industrial distribution networks, infrastructure projects, petrochemical oil and gas industries, and container substations to name a few. This compact and modular switchgear offers both flexibility and a long, low-maintenance service life.

Each section consists of sealed-for-life SF_6 modules, which contain the fixed vacuum circuit breaker, disconnect switch, and innovative busbar system. By design, there is no gas handling throughout the service life of the equipment, from installation until recycling at the end of life of the switchgear. Utilize the cutting-edge B-link busbar to easily install, extend, or replace gear in the middle of a lineup, without handling SF_6. Like the gas-filled modules, the B-link system does not require any maintenance.

Front accessible and ideal for a variety of applications, GHA represents the new generation of robust, extremely compact, and low maintenance MV switchgear.

Table 11.13: Ratings

Rated Voltage (kV)	Rated Lightning Impulse Withstand Voltage (kV)	Rated Power Frequency Withstand Voltage (kV)	Rated Short-Time Withstand Current (kA)	Rated Busbar Current (A)	Rated Current of Outgoing Feeders (A)	Arc Resistant per IEEE C37.20.7
12	75	28	40	2500	2500	40 ka duration for 0.5 seconds
15	95	38	40	2500	2500	
27	125	50	40	2500	2500	
38	170	80	40	2500	2500	

Table 11.14: Dimensions

Electrical Characteristics		Dimensions (in./mm)				
		Cubical Width				
Rated Voltage (kV)	Rated nominal current (A)	Main/Feeder	Bus Tie with Circuit Breaker	Bus Sectionalizer	Depth	Section Height
12 17.5 24 38	≤ 1200	23.6/600	31.5/800	23.6/600	62.8/1595	94.5/2400 (with 31.5/800 LV compartment)
	2500	35.5/900	39.4/1000	23.6/600	62.8/1595	

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

CBGS-0 Gas-Insulated Switchgear (UL Listed)

Easy innovative and economical **up to 38kV**


CBGS-0 Medium Voltage (MV) switchgear is compact and easy to install and operate. Due to the insulating gas as well as the solidly insulated busbar and cable connections the medium voltage circuit is protected from environmental influences reducing the risk of arc flash events.

Each section consists of a sealed-for-life SF_6 tank which contains the fixed SF range circuit breaker and disconnect switch. By design there is no gas handling throughout the service life of the equipment from installation until recycling at the end of life of the switchgear.

Front accessible and ideal for a variety of applications from transformer substations to primary power distribution in markets ranging from mining and metals renewable installations container substations and heavy industry where space is at a premium.



Listed Metal-Enclosed Interrupter Switchgear

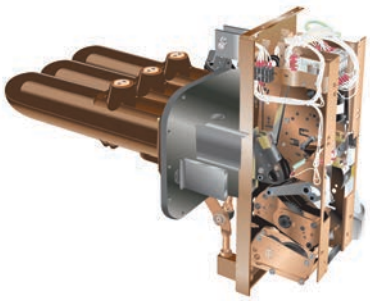

CBGS-0 Circuit Breaker

Table 11.15: Ratings






Rating	Main/Feeder	Bus Section	Bus Riser	Disconnecting Switch	Auxiliary Services
					
Nominal voltage (kV)	15 27 38	15 27 38	15 27 38	15 27 38	15 27 38
Busbar system rated current (A)	1200/2000	1200/2000	1200/2000	1200/2000	1200/2000
Outgoing rated current (A)	1200/2000	1200/2000	1200/2000	1200/2000	—
Short-time withstand current (kA)	25–31.5	25–31.5	25–31.5	25–31.5	Limited by the fuse

Table 11.16: General Electrical Characteristics

Rated Voltage		kV Rating	
		27	38
Rated Insulation Level	Power frequency 60 Hz. (efficient kV)	60	70
	Lightning impulse withstand voltage (kV peak)	125	150
Rated normal current (A)	Busbar system	1200/2000	
	Incoming/outgoing	1200/2000	
Short circuit breaking current (kA)		25/31.5	
Short circuit breaking current (kA peak)		63/80	
Short time withstand current (kA/s)		Max 25/2–31.5/2	
Gas pressure at 200 °C (psi)		18.85	
Standard degrees of protection	High voltage compartment	IP65	
	Low voltage compartment	IP3X–IP41	

Table 11.17: Dimensions and Weights

Modular Functional Unit (s)	Continuous Current Rating (A)	Dimensions Inches (mm)			Weight lbs. (kg)
		Width	Depth	Height	
Main/feeder bus section	1200	23.5 (600)	55.1 (1400)	92.5 (2350)	1598 (725)
	2000	47.2 (1200)			2249 (1020)
Bus riser disconnecting switch	1200	23.5 (600)			1058 (480)
	2000	47.2 (1200)			2052 (930)
VT auxiliary section	Not applicable	23.5 (600)			926 (420)

© 2025 Schneider Electric
All Rights Reserved
12/17/2025




HVL/cc Metal-Enclosed Load Interrupter Switchgear—Full Range

Square D™ brand HVL/cc metal-enclosed load interrupter switchgear with a sealed switch enclosure contains the contact arcing from switch contacts (all interruption takes place within the sealed enclosure), a critical concern in gaseous environments – Class 1 Div 2 certified. The permanently sealed switch help prevent switch contamination, especially important in dusty environments, thus eliminating maintenance on main and ground switch contacts.

Its compact size is made up of modular units, making the HVL/cc easy to expand future extensions and connections to existing equipment and ideal for retrofit applications. With front access, only options available at system voltages below 17.5 kV can be positioned against walls, in small rooms, or in prefabricated buildings. The small footprint can result in considerable cost savings from the reduction of building or room sizes.

The HVL/cc switch can be equipped with either an over-toggle mechanism (OTM), which is standard, or an optional stored energy mechanism (SEM). Top or bottom cable entry enhances installation flexibility. Enclosures are free-standing and suitable for both indoor (NEMA 1) and outdoor (NEMA 3R) applications.

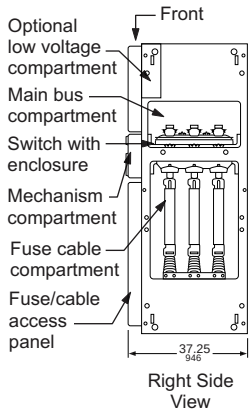


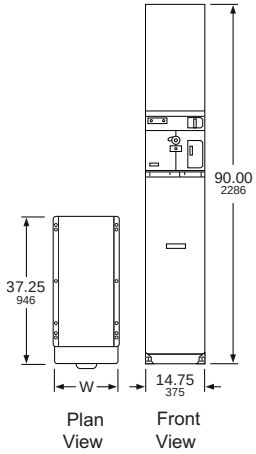


Table 11.18: HVL/cc Load Interrupter Switches— Full Range 600/1200 A Ratings

Switch (kV)—maximum design	5.5	17.5	17.5	25.8	38
BIL (kV)	60	95	95	125	150
Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Withstand (kV)	19	36	36	50	80
Continuous current (A)	600/1200	600/1200	600/1200	600	600
Interrupting current (A)	600/1200	600/1200	600/1200	600	600
Fault close (kA asymmetrical)	40	40	40	32	32
Momentary current (kA asymmetrical)	40	40	40	32	32
Short time current (kA symmetrical)	25	25	25	25	25
Electrical endurance (number of operations at 80% P.F.)	100/600 A 26/1200 A	100/600 A 26/1200 A	100/600 A 26/1200 A	100	100
Mechanical endurance (number of operations)	1000	1000	1000	1000	1000

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

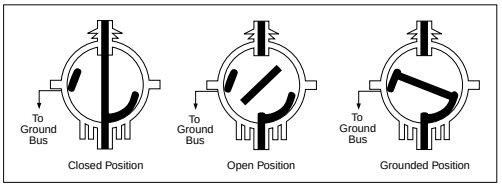

Switch Standard Features

- Switch Positions: Closed, open, and internally grounded (optional) (connects switch contacts to ground)
- Enclosure: Epoxy
- Medium: Sulphur hexalfluoride
- Maintenance: Maintenance free main switch contact sealed for life
- Pressure:
  - 5.8 PSI (≤ 17.5 kV)
  - 22 PSI (25.8–38 kV)
- View ports to show switch blade position

Options

- Internal ground switch: Has full fault making capability
- Fuselogic™ system
- Infrared viewing windows
- Class I, Division 2
- Fast/auto transfer configuration (main-main and main-tie-main)
- Duplex configurations
- Powerlogic™ metering
- 20-inch or 29.5-inch wide enclosures
- Duplex configuration with mechanical interlock blocks simultaneous closure of both switches
- Ground switch (fault close rated)
- Thermal monitoring
- Motor operator
- Under coated base channels
- Insulated bus
- Lug termination boots
- Key locks

Fuselogic™

Fuselogic is a protection system that provides the ultimate in medium voltage fuse protection. This patented system utilizes Square D™ brand current-limiting fuses with mechanical sensors that function without any auxiliary power requirements. Several combinations of Fuselogic functions can be combined to provide simple blown fuse indication contacts with mechanical lockout to anti-single phasing protection. Anti-single phasing requires the optional stored energy mechanism. Fuselogic is available on both HVL/cc and HVL switches.

Switchgear Standard Features

- Compartmentalization – up to five isolated compartments for the switch, bus, fuse/cable, mechanism and optional low voltage and control components; blocks inadvertent access to main bus compartment when accessing fuse/cable compartment.
- 11 gauge steel enclosure
- Epoxy insulators
- Fuse/cable access panel interlocked with switch
- Front access only options available at system voltages below 17.5 kV
- Animated mechanism mimic bus
- Padlocking provision—open or closed (OTM); open-only (SEM)
- Top or bottom cable entry
- UL/CUL Listed, IEEE C37.20.3
- Live line indicators on all incoming switch bays and outgoing feeder circuits
- Cable lugs included for one cable per phase
- Tin plated copper bus for lineups
- Square D™ TGIC polyester powder paint system, toughest in the industry

Listed Metal-Enclosed Interrupter Switchgear

Table 11.19: Surge Arresters

System L-L Voltage kV		Arrester MCOV-kV	
Nominal	Maximum	Effectively Grounded Neutral Circuits	Impedance Grounded and Ungrounded Circuits
2.4	2.54	—	2.55
4.16	4.4	2.55	5.1
4.8	5.08	—	5.1
6.9	7.26	—	7.65
12.0	12.7	7.65	12.70
12.47	13.2	7.65	12.70
13.2	13.97	8.4	—
13.8	14.52	8.4	—


© 2025 Schneider Electric
All Rights Reserved
12/17/2025

HVL/cc Switchgear Quick Ship Program—5–15 kV, 600 A

The HVL/cc quick ship program provides basic fused and unfused load interrupter switch configurations for standalone or transformer primary applications. The Quick Ship program offers faster delivery, but with fewer options.

Three-pole, 600 A individual HVL/cc switches are available in free-standing indoor (NEMA 1) enclosures. These switches are available unfused or with provisions for Square D™ brand current-limiting DIN/E fuses. Factory optional accessories include auxiliary bays, main bus, auxiliary switches, and distribution class surge arresters. The fuse access panel is mechanically interlocked with the switch mechanism. Key interlocks are not an available option with Digest-listed HVL/cc switches. (1) Set screw type lugs for (2) #2–350 kcmil copper or aluminum cables are provided for line and load connections. **Fuses are not furnished with this equipment.** For fuse information, refer to General Purpose E-Rated Current-Limiting Fuses:Type DIN/E for HVL/cc Switches, page 11-24.


NOTE: Cable entry and exit must be opposite to maintain the minimum sections shown.



5 kV Indoor N1
Top Cable In/Bottom Cable Out Switch in Position A

Mechanical interlock between switch and fuse access panel.

NOTE: Mechanical interlock is standard on switches.



5 kV Indoor N1
Top Cable In/Bottom Cable Out Switch in Position B

Provisions for Future Expansion

- All “single” HVL/cc switches have provisions for future expansion on either side
- Order main bus kits for copper 600 A bus

600 A Single Switch Unfused

- Manual over-toggle mechanism, no grounding switch
- Includes (1) set screw for (2) #2–350 kcmil Cu or Al conductors per phase
- Application A = Top entry (incoming—cable or main bus), bottom exit (load—cable or main bus)
- Application B = Bottom entry (incoming—cable or main bus), top exit (load—cable or main bus)

Table 11.20: Unfused Switch Selection

Catalog No.	kV Rating	Fuse Range	Application	Width	
				in	mm
HVLCCA14305N	4.76	—	A	14.75	375
HVLCCA20305N	4.76	—	A	20.00	508
HVLCCA14315N	15	—	A	14.75	375
HVLCCA20315N	15	—	A	20.00	508
HVLCCB14305N	4.76	—	B	14.75	375
HVLCCB20305N	4.76	—	B	20.00	508
HVLCCB14315N	15	—	B	14.75	375
HVLCCB20315N	15	—	B	20.00	508

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

600 A Single Switch Fused

- Provisions only for Square D™ brand current-limiting DIN/E fuses—order separately
- Manual over-toggle mechanism, no grounding switch
- Includes (1) set screw lug for (2) #2–350 kcmil Cu or Al conductor per phase
- Application A = Top entry (incoming—cable or main bus), bottom exit (load—cable or main bus)
- Application B = Bottom entry (incoming—cable or main bus), top exit (load—cable or main bus)

Table 11.21: Fused Switch Selection

Catalog No.	kV Rating	Fuse Range	Application	Width	
				in	mm
HVLCCA14305D	4.76	10–450E	A	14.75	375
HVLCCA20305D	4.76	10–450E	A	20.00	508
HVLCCA14315D	15	10–200E	A	14.75	375
HVLCCA20315D	15	10–200E	A	20.00	508
HVLCCB14305D	4.76	10–450E	B	14.75	375
HVLCCB20305D	4.76	10–450E	B	20.00	508
HVLCCB14315D	15	10–200E	B	14.75	375
HVLCCB20315D	15	10–200E	B	20.00	508

600 A Incoming Line Auxiliary Bay

For bottom incoming cable to application A (bottom cable exit) switch(es), order 600 A tin plated Cu main bus to adjacent section from bus table. Includes (1) set screw lug for (2) #2–350 kcmil Cu or Al conductor per phase.

Table 11.22: Bays for Bottom Entry/Bottom Exit Cables

Catalog No.	kV Rating	Fuse Range	Application	Width	
				in	mm
HVLCCA14A	4.76/15	—	A	14.75	375
HVLCCA20A	4.76/15	—	A	20.00	508

For top incoming cable to application B (top cable exit) switch(es), order 600 A tin plated Cu main bus to adjacent section from main bus kits table. Includes (1) set screw lug for (2) #2–350 kcmil Cu or Al conductor per phase.

Table 11.23: Bays for Top Entry/Top Exit Cables

Catalog No.	kV Rating	Fuse Range	Application	Width	
				in	mm
HVLCCB14A	4.76/15	—	B	14.75	375
HVLCCB20A	4.76/15	—	B	20.00	508

600 A Tin Plated Copper Main Bus Kits

Table 11.24: Bus Kits

Catalog No.	Left (From) Application	Width		Right (To) Application	Width	
		in	mm		in	mm
HVLCCMBA14A14	A	14.75	375	A	14.75	375
HVLCCMBA14A20	A	14.75	375	A	20.00	508
HVLCCMBA20A14	A	20.00	508	A	14.75	375
HVLCCMBA20A20	A	20.00	508	A	20.00	508
HVLCCMBB14B14	B	14.75	375	B	14.75	375
HVLCCMBB14B20	B	14.75	375	B	20.00	508
HVLCCMBB20B14	B	20.00	508	B	14.75	375
HVLCCMBB20B20	B	20.00	508	B	20.00	508

Ratings

HVL/cc Switch with manually operated type OTM mechanism in cubicle enclosure (does not include internal ground switch). Ratings are based on an X/R ratio of 1.6.

Table 11.25: HVL/cc Switch Ratings

Switch (kV)—maximum design	5.5	17.5
BIL (kV)	60	95
Frequency (Hertz)	50/60	50/60
Withstand (kV)	19	36
Continuous current (amperes)	600	600
Interrupting current (amperes)	600	600
Fault close (amperes asymmetrical)	40,000	40,000
Integrated switch and fuse rating (amperes symmetrical)*[1]*	65,000	65,000
Momentary current (amperes asymmetrical)	40,000	40,000
Short time current, 2 seconds (amperes symmetrical)	25,000	25,000
Operations at Full Load	100	100
Mechanical Endurance (number of operations)	1000	1000

[1] 50,000 for 630 A fuse.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Factory Modifications

Table 11.26: Factory Modifications


Catalog No.	Description
HVLCC-X3	Auxiliary switch 2 N.O.–2 N.C. contact

Distribution Class Surge Arresters

(One Set of Three) Switch Load Side Connected or Incoming Line Bay)

Table 11.27: Surge Arresters

Catalog No.	kV Rating	Section Width Minimum Required	
		in	mm
HVLCCDSA3	3 kV, 2.55 kV MCOV	14.75	375
HVLCCDSA6	6 kV, 5.10 kV MCOV	14.75	375
HVLCCDSA9	9 kV, 7.65 kV MCOV	14.75	375
HVLCCDSA10	10 kV, 8.40 kV MCOV	14.75	375
HVLCCDSA12	12 kV, 10.20 kV MCOV	14.75	375
HVLCCDSA15	15 kV, 12.70 kV MVOV	20.00	508
HVLCCDSA18	18 kV, 15.3 kV MCOV	20.00	508

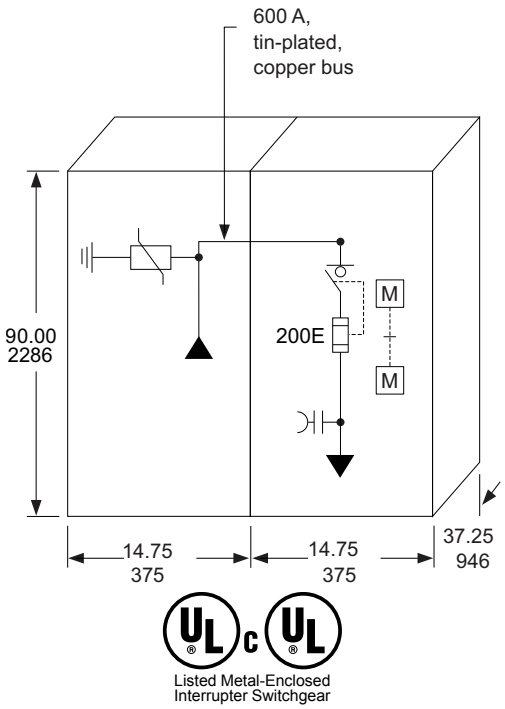

Listed Metal-Enclosed Interrupter Switchgear

600 A "Single" HVL/cc Switch with PROVISIONS ONLY for Square D™ brand Current-Limiting, Non-Disconnect Type Fuses for Cable Connection to Power-Dry™, Power-Cast™, and Uni-Cast™ Transformers

(FLC = 300 A MAXIMUM)
RH—Transformer on right, LH—Transformer on Left
Application A = Top Entry (Incoming Cables)
Application B = Bottom Entry (Incoming Cables)

Table 11.28: 600 A "Single" HVL/cc Switch Selection

Catalog No.	kV Rating	Fuse Range	Ap-plica-tion	Width		RH / LH
				in	mm	
HVLCCA14405DGR	4.76	10–450E	A	14.75	375	RH
HVLCCA20405DGR	4.76	10–450E	A	20.00	508	RH
HVLCCA14405DGL	4.76	10–450E	A	14.75	375	LH
HVLCCA20405DGL	4.76	10–450E	A	20.00	508	LH
HVLCCA14415DGR	15	10–200E	A	14.75	375	RH
HVLCCA20415DGR	15	10–200E	A	20.00	508	RH
HVLCCA14415DGL	15	10–200E	A	14.75	375	LH
HVLCCA20415DGL	15	10–200E	A	20.00	508	LH
HVLCCB14405DGR	4.76	10–450E	B	14.75	375	RH
HVLCCB20405DGR	4.76	10–450E	B	20.00	508	RH
HVLCCB14405DGL	4.76	10–450E	B	14.75	375	LH
HVLCCB20405DGL	4.76	10–450E	B	20.00	508	LH
HVLCCB14415DGR	15	10–200E	B	14.75	375	RH
HVLCCB20415DGR	15	10–200E	B	20.00	508	RH
HVLCCB14415DGL	15	10–200E	B	14.75	375	LH
HVLCCB20415DGL	15	10–200E	B	20.00	508	LH

NOTE: Switches with transformer connections are painted ANSI 49. Standalone switches are painted ANSI 61. Transformer connections in HVL/cc switches are based on standard Square D™ brand transformer connections. If these switches are used to connect to other manufacturers' transformers, then connections must match standard Square D™ brand transformer connections. (Cable connections are furnished with the transformer.)

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

General Purpose E-Rated Current-Limiting Fuses: Type DIN/E for HVL/cc Switches

- Integrated rating for 600 A HVL/cc switches with Square D™ brand DIN/E fuses listed below is 65 kA rms symmetrical amperes.
- Current-limiting fuses increase the integrated short-circuit current rating because of their energy-limiting capabilities.
- To increase the short-circuit current rating of the entire lineup of switchgear, current-limiting fuses must be used in the entrance sections.

Table 11.29: Fuse Selection

Catalog No.	kV Rating	Fuse Rating	Set of Fuses *[2]*	Fuse Size	Section Width Required	
					in	mm
55DE010	5.5	10E	1	Actual	14.75	375
55DE015	5.5	15E	1	Actual	14.75	375
55DE020	5.5	20E	1	Actual	14.75	375
55DE025	5.5	25E	1	Actual	14.75	375
55DE030	5.5	30E	1	Actual	14.75	375
55DE040	5.5	40E	1	Actual	14.75	375
55DE050	5.5	50E	1	Actual	14.75	375
55DE065	5.5	65E	1	Actual	14.75	375
55DE080	5.5	80E	1	Actual	14.75	375
55DE100	5.5	100E	1	Actual	14.75	375
55DE125	5.5	125E	1	Actual	14.75	375
55DE150	5.5	150E	1	Actual	14.75	375
55DE175	5.5	175E	1	Actual	14.75	375
55DE200	5.5	200E	1	Actual	14.75	375
55DE250	5.5	250E	1	Actual	14.75	375
55DE300	5.5	300E	1	Actual	14.75	375
55DE350	5.5	350E	1	Actual	14.75	375
55DE400	5.5	400E	1	Actual	14.75	375
55DE450	5.5	450E	1	Actual	14.75	375
175DE010	15.5	10E	1	Actual	14.75	375
175DE015	15.5	15E	1	Actual	14.75	375
175DE020	15.5	20E	1	Actual	14.75	375
175DE025	15.5	25E	1	Actual	14.75	375
175DE030	15.5	30E	1	Actual	14.75	375
175DE040	15.5	40E	1	Actual	14.75	375
175DE050	15.5	50E	1	Actual	14.75	375
175DE065	15.5	65E	1	Actual	14.75	375
175DE080	15.5	80E	1	Actual	14.75	375
175DE100	15.5	100E	1	Actual	14.75	375
175DE125	15.5	125E	1	Actual	14.75	375
175DE150	15.5	150E	1	Actual	14.75	375
155DE175	15.5	175E	1	Actual	14.75	375
155DE200	15.5	200E	1	Actual	14.75	375

600 A "Duplex" HVL/cc Switch with PROVISIONS ONLY for Square D™ brand Current-Limiting, Non-Disconnect Type Fuses for Cable Connection to Power-Dry, Power-Cast, and Uni-Cast Transformers

- FLC = 300 A **maximum**
- RH—Transformer on right
- LH—Transformer on left includes mechanical interlock to prevent paralleling of sources
- Application A = top entry (incoming cables)
- Application B = bottom entry (incoming cables)

Table 11.30: 600 A "Duplex" HVL/cc Switch Selection

Catalog No.	kV Rating	Fuse Range	Appli-cati-on	Width		RH / LH
				in	mm	
HVLCCA14505DGR	4.76	10–450E	A	14.75	375	RH
HVLCCA20505DGR	4.76	10–450E	A	20.00	508	RH
HVLCCA14505DGL	4.76	10–450E	A	14.75	375	LH
HVLCCA20505DGL	4.76	10–450E	A	20.00	508	LH
HVLCCA14515DGR	15	10–200E	A	14.75	375	RH
HVLCCA20515DGR	15	10–200E	A	20.00	508	RH
HVLCCA14515DGL	15	10–200E	A	14.75	375	LH
HVLCCA20515DGL	15	10–200E	A	20.00	508	LH
HVLCCB14505DGR	4.76	10–450E	B	14.75	375	RH
HVLCCB20505DGR	4.76	10–450E	B	20.00	508	RH
HVLCCB14505DGL	4.76	10–450E	B	14.75	375	LH
HVLCCB20505DGL	4.76	10–450E	B	20.00	508	LH
HVLCCB14515DGR	15	10–200E	B	14.75	375	RH
HVLCCB20515DGR	15	10–200E	B	20.00	508	RH
HVLCCB14515DGL	15	10–200E	B	14.75	375	LH
HVLCCB20515DGL	15	10–200E	B	20.00	508	LH

[2] Each set of fuses contains three fuses, so, for example, two sets of fuses yield a total of six fuses.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Ordering Information

1. Select switch catalog number based on fused or unfused and cable entry locations (top or bottom) from Table 11.20 Unfused Switch Selection, page 11-21, or Table 11.21 Fused Switch Selection, page 11-22.
2. Select incoming line auxiliary bay from Table 11.22 Bays for Bottom Entry/Exit Cables, page 11-22, or Table 11.23 Bays for Top Entry/Exit Cables, page 11-22, if required.
3. Select main bus from Table 11.24 Bus Kits, page 11-22, if required.
4. Select catalog numbers for factory modifications from Table 11.26 Factory Modifications, page 11-23, if required.
5. If fused, select DIN/E fuses from Table 11.29 Fuse Selection, page 11-24.

Ordering Example


Order indoor 600 A, 5 kV, HVL/cc switch with bottom incoming and bottom outgoing cables (1) #2 AWG per phase, (1) set 200E fuses, and (1) set 6 kV surge arresters.

Order:	Catalog. No.
Switch w/fuse provisions and bottom exit load cables	HVLCCA14305D
600 incoming line auxiliary bay (Application A—bottom entry)	HVLCCA14A
Main Bus (Application A—14 in. to Application A–14 in.)	HVLCCMBA14A14
6 kV LAs	HVLCCDSA6
Set 200E fuses	55DE200

© 2025 Schneider Electric
All Rights Reserved
12/17/2025




Listed Metal-Enclosed Interrupter Switchgear



Side view Front view

Recommended power cable conduit area



HVL Metal-Enclosed Load Interrupter Switchgear—Full Range

HVL™ 5–38 kV Load Interrupter is the most popular ANSI-rated go to switchgear in its class in America. Among medium voltage interrupter switchgear, both the switch and the enclosure stand as industry benchmarks in the areas of design, manufacturing, and performance. Load interrupter switchgear must perform a number of critical functions in a unit substation - protecting equipment and disconnecting faulted lines and transformers. Designed and tested to the latest applicable standards, HVL has been engineered to provide superior protection for your distribution system.

HVL switchgear is available for various applications and configurations, including:

- Individual service entrance bays
- Multiple-bay lineups incorporating HVL load interrupters
- Substation primaries

Square D™ brand metal-enclosed switchgear has become an industry standard for its better system performance, lower maintenance cost, easier system expansion, and reduced system expense.

A full range of ratings and options are available but not listed in this publication. Contact your nearest Schneider Electric sales office or your local Schneider Electric distributor.

Table 11.31: Ratings

Maximum design voltage (kV)	4.76	15	17	25.8	29	38
BIL (kV)	60	95	95	125	125	150
Frequency (Hz)	50/60	50/60	50/60	50/60	50/60	50/60
Continuous amperes	600/1200	600/1200	600	600/1200	600/1200	600
Interrupting amperes	600/1200	600/1200	600	600	400	400
Momentary (kA asymmetrical)	40/61/80	40/61/80	61	40/61	40/61	40
Fault close (kA asymmetrical)	40/61	40/61	40	28	28	20
Capacitor switching (kVAR)	2400	2400	–	–	–	–
Short time rating 2 seconds (kA symmetrical)	25/38/50	25/38/50	25	25	25	25
Low frequency withstand (kV)	19	36	36	60	60	80

Standard Features

- 11 gauge steel enclosure
- Direct drive mechanism for quick make and break operation
- Permanently attached operating handle
- Visible isolation viewing window for switch blade position
- Mechanical interlocked fuse access door
- Provision for padlock and key interlock
- Highly flexible design
- ANSI 61 paint
- Upright or inverted switch mounting
- Heaters for outdoor equipment

Options

- Outdoor construction
- Square D™ brand DIN-style current-limiting fuses
- Boric acid fuses
- Silver or tin plated copper bus
- 600, 1200, or 2000 A main bus
- Heat shrink insulated bus
- Motor operator
- Shunt trip
- Fuselogic™ tripping system (SEM type mechanism only)
- Roof bushings
- Key interlocks
- Surge arresters
- Utility metering bays
- Duplex switch
- Transformer connections
- Infrared windows for thermal scanning of connections
- Floor plates
- Undercoated base channels
- Dual shunt trip
- Heaters
- Mimic bus placard
- Switch position auxilary contacts
- Automated switching
- Viewing window on fuse access door
- Tamperproof hardware
- CS-3 Type fuse mounting
- Hard bus to transformer mounting
- EcoStruxure temperature monitoring

Fuselogic™

Fuselogic is a protection system that provides the ultimate in medium voltage equipment protection. This patented system utilizes the CS-3 Type striker type current-limiting fuses with mechanical sensors that function without any auxiliary power requirements. Several configurations of Fuselogic functions can be combined to provide simple blown fuse indication during operation contacts or closing of the switch with mechanical lockout to help prevent anti-single phasing protection. Anti-single phasing requires the optional stored energy mechanism (SEM). Fuselogic is available on both HVL/cc™ and HVL switches.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

HVL Switchgear Quick Ship Program—5 kV–15 kV, 600 A

The HVL quick ship program provides basic fused and unfused load interrupter switch configurations for stand-alone or transformer primary applications. The Quick Ship program offers faster delivery, but with fewer options.

Three-pole, 600 A individual HVL switches are available in free-standing indoor (NEMA 1) or outdoor (NEMA 3R) enclosures. The switches used in these enclosures are UL Recognized and are listed under Category WIQG2 in File E140591(M). These switches are available unfused or with provisions for DIN—style, Square D™ brand current-limiting fuses, CS-3 Type or for boric acid fuses. Factory optional accessories include auxiliary switches, extra cable terminating lugs and distribution class surge arresters. The door is mechanically interlocked with the switch operating handle and provisions for key interlocks and padlocks are standard. Set screw type lugs for one #2 solid—600 kcmil copper or aluminum cables are provided for line and load connections. Other standard features include a bolted enclosure with a viewing window, ground pad, and space heater (NEMA 3R only). Control power for heater must be from external source. **Fuses are not furnished with this equipment.** For fuse information, refer to Table 11.43 DIN/E Current-Limiting Fuses, Non-Disconnecting Type , page 11-30, or Table 11.44 Boric Acid Fuses, page 11-31. Many of the fuses listed in these tables are available from stock. Switches are listed in the tables below and on page 11-28.

Table 11.32: 600 A "Single" Switch Unfused

Catalog No.	kV Rating	Fuse Range	Enclosure Type
HVL305NG	4.76	—	NEMA 1
HVL305NW	4.76	—	NEMA 3R
HVL315NG	15	—	NEMA 1
HVL315NW	15	—	NEMA 3R

Table 11.33: 600 A "Single" Switch with PROVISIONS ONLY for Square D™ brand Current-Limiting, Non-Disconnect Type Fuses

Catalog No.	kV Rating	Fuse Range	Enclosure Type
HVL305DEG	4.76	10–450E	NEMA 1
HVL305DEW	4.76	10–450E	NEMA 3R
HVL315DEG1	15	10–100E	NEMA 1
HVL315DEG2	15	125–200E	NEMA 1
HVL315DEW1	15	10–100E	NEMA 3R
HVL315DEW2	15	125-200E	NEMA 3R

Table 11.34: 600 A "Single" Switch with PROVISIONS ONLY for S&C Boric Acid Non-Disconnect Type Fuses *[3]*

Catalog No.	kV Rating	Fuse Range	Enclosure Type
HVL305BG	4.76	10E–400E	NEMA 1
HVL305BW	4.76	10E–400E	NEMA 3R
HVL315BG	15	10E–400E	NEMA 1
HVL315BW	15	10E–400E	NEMA 3R
HVL317BG	17	10E–400E	NEMA 1
HVL317BW	17	10E–400E	NEMA 3R

Table 11.35: Ratings

Max. Design Voltage (kV)	4.76	15.0
BIL (kV)	60	95
Frequency (Hz)	50/60	50/60
Continuous amperes	600	600
Interrupting amperes	600	600
Momentary (amperes asymmetrical)	40,000	40,000
Fault close (amperes asymmetrical)	40,000	40,000
Capacitor switching (kVAR)	2,400	2,400
Short-time rating, 2 seconds (amperes symmetrical)	25,000	25,000
Low frequency withstand (kV)	19	36

Table 11.36: Distribution Class Surge Arresters

System L-L Voltage kV		Arrester MCOV-kV	
Nominal	Maximum	Effectively Grounded Neutral Circuits	Impedance Grounded and Ungrounded Circuits
2.4	2.54	—	2.55
4.16	4.4	2.55	5.1
4.8	5.08	—	5.1
6.9	7.26	—	7.65
12.0	12.7	7.65	12.70
12.47	13.2	7.65	12.70
13.2	13.97	8.4	—
13.8	14.52	8.4	—

Table 11.37: Enclosure Type

Type	W		D		H		Weight	
	in	mm	in	mm	in	mm	lbs	kg
Indoor	38.00	965	54.50	1384	90.00	2286	1200	545
Outdoor	38.00	965	60.00	1524	97.50	2477	1400	636

Provisions for Future Expansion

All "single" Digest switches have provisions for future expansion on either side. Order kits HVMB for top crossover copper 600 A bus and HVLC for line connections to the top bus. (See Table 11.42 Factory Modifications, page 11-29.)

[3] Boric acid fuses may increase lead times. Contact the factory for availability.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

HVL Switches for Power-Dry II™, Power-Cast II™, and Uni-Cast II™ Transformer Connections

HVL switches can be configured for close coupling cable connections to listed dry type transformers for primary main switches of unit substations. These are listed in the tables below with current-limiting or boric acid fuses. Both single and duplex switch mains are included in this selection. Transformers are listed on Digest Section 14: “Medium Voltage Distribution Transformers” and may not be suitable for close coupling. For transformer availability and specific configurations, contact your local Schneider Electric sales office. All connections in this digest are based on standard Square D™ brand transformer connections. If these switches are used to connect to other manufacturers’ transformers, then connections must coordinate with
standard Square D™ brand transformer connections. (Cable connections are furnished with the transformer.)

Table 11.38: 600 A “Single” Switch with PROVISIONS ONLY for Square D™ brand Current-Limiting, Non-Disconnect Type Fuses for Cable Connection to Power-Dry II, Power-Cast II, and Uni-Cast II Transformers
(FLC = 300 A max.) RH—Transformer on Right, LH—Transformer on Left

Catalog No.	kV Rating	Fuse Range	Enclosure Type	RH / LH
HVL405DEGR	4.76	10–450E	NEMA 1	RH
HVL405DEGL	4.76	10–450E	NEMA 1	LH
HVL405DEWRH	4.76	10–450E	NEMA 3R	RH
HVL405DEWLH	4.76	10–450E	NEMA 3R	LH
HVL415DEGR1	15	10–100E	NEMA 1	RH
HVL415DEGR2	15	125–200E	NEMA 1	RH
HVL415DEGL1	15	10–100E	NEMA 1	LH
HVL415DEGL2	15	125–200E	NEMA 1	LH
HVL415DEWR1H	15	10–100E	NEMA 3R	RH
HVL415DEWR2H	15	125-200E	NEMA 3R	RH
HVL415DEWL1H	15	10–100E	NEMA 3R	LH
HVL415DEWL2H	15	125-200E	NEMA 3R	LH

Table 11.39: 600 A “Duplex” Switch with PROVISIONS ONLY for Square D™ brand Current-Limiting, Non-Disconnect Type Fuses for Cable Connection to Power-Dry II, Power-Cast II, and Uni-Cast II Transformers
(FLC = 300 A max.) RH—Transformer on Right, LH—Transformer on Left

Catalog No.	kV Rating	Fuse Range	Enclosure Type	RH / LH
HVL505DEGR	4.76	10–450E	NEMA 1	RH
HVL505DEGL	4.76	10–450E	NEMA 1	LH
HVL505DEWRH	4.76	10–450E	NEMA 3R	RH
HVL505DEWLH	4.76	10–450E	NEMA 3R	LH
HVL515DEGR1	15	10–100E	NEMA 1	RH
HVL515DEGR2	15	125–200E	NEMA 1	RH
HVL515DEGL1	15	10–100E	NEMA 1	LH
HVL515DEGL2	15	125–200E	NEMA 1	LH
HVL515DEWR1H	15	10–100E	NEMA 3R	RH
HVL515DEWR2H	15	125–200E	NEMA 3R	RH
HVL515DEWL1H	15	10–100E	NEMA 3R	LH
HVL515DEWL2H	15	125-200E	NEMA 3R	LH

Table 11.40: 600 A “Single” Switch with PROVISIONS ONLY for S&C Boric Acid Non-Disconnect Type Fuses for Cable Connection to Power-Dry II, Power-Cast II, and Uni-Cast II Transformers *[4]*
(FLC = 300 A max.) RH—Transformer on Right, LH—Transformer on Left

Catalog No.	kV Rating	Fuse Range	Enclosure Type	RH / LH
HVL405BGR	4.76	10E–400E	NEMA 1	RH
HVL405BGL	4.76	10E–400E	NEMA 1	LH
HVL405BWRH	4.76	10E–400E	NEMA 3R	RH
HVL405BWLH	4.76	10E–400E	NEMA 3R	LH
HVL415BGR	15	10E–400E	NEMA 1	RH
HVL415BGL	15	10E–400E	NEMA 1	LH
HVL415BWRH	15	10E–400E	NEMA 3R	RH
HVL415BWLH	15	10E–400E	NEMA 3R	LH

[4] Includes fuse holder only. See Table 11.44 Boric Acid Fuses , page 11-31 for fuse refills. Boric acid fuses may increase lead times. Contact the factory for availability.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Table 11.41: 600 A "Duplex" Switch with PROVISIONS ONLY for S&C Boric Acid Non-Disconnect Type Fuses for Cable Connection to Power-Dry II, Power-Cast II, and Uni-Cast II Transformers *[5]*
(FLC = 300 A max.) RH—Transformer on Right, LH—Transformer on Left

Catalog No.	kV Rating	Fuse Range	Enclosure Type	RH / LH
HVL505BGR	4.76	10E–400E	NEMA 1	RH
HVL505BGL	4.76	10E–400E	NEMA 1	LH
HVL505BWRH	4.76	10E–400E	NEMA 3R	RH
HVL505BWLH	4.76	10E–400E	NEMA 3R	LH
HVL515BGR	15	10E–400E	NEMA 1	RH
HVL515BGL	15	10E–400E	NEMA 1	LH
HVL515BWRH	15	10E–400E	NEMA 3R	RH
HVL515BWLH	15	10E–400E	NEMA 3R	LH

NOTE: Switches with transformer connections are painted ANSI 49. Standalone switches are painted ANSI 61.

Fuse Selection

The rule of thumb method for selecting fuses for transformer protection is 1.33 times the self-cooled full load current of the transformer or the next higher fuse rating. Selection of the fuse is the customer's responsibility and should be based on transformer and system characteristics.

- **Maximum Fuse Size:**
  Maximum fuse size should be determined by comparing the fuse total clearing curve to the transformer damage curve. Contact Schneider Electric for transformer overload and short-circuit withstand capability.
- **Minimum Fuse Size:**
  Minimum fuse size shall carry the transformer magnetizing inrush current of 12 times full load amperes for 0.1 second.

Table 11.42: Factory Modifications

Catalog No.	Description
HVMB	Main Bus Kit, 600 A copper
HVLC	Line side connector kit (main bus) 600 A with 2–1/0=500 MCM lugs (bottom entry only)
	Provisions for key interlocks—Type KFL Kirk key lock with a 0-inch bolt projection (Kirk item master number KFL000010SH)
HVLX3	Auxiliary switch 2 N.O.—2 N.C. contact
HVLC2	Set screw type lugs 1/0—500 kcmil (qty. 3)
Distribution Class Surge Arresters *[6]*	
HVDSA3	3 kV, 2.55 MCOV
HVDSA6	6 kV, 5.10 MCOV
HVDSA9	9 kV, 7.65 MCOV
HVDSA10	10 kV, 8.40 MCOV
HVDSA12	12 kV, 10.20 MCOV
HVDSA15	15 kV, 12.70 MCOV

Standard Features

- Switches for transformer primaries are cable connected only.
- Key interlocks must be ordered and coordinated by customer.
- Standard color is ANSI 61 for standalone units; ANSI 49 for switches connecting to transformers.
- If switches are purchased to coordinate with Square D™ brand transformers, composite drawings and shipment coordination will not be available.
- Switches are not designed for any special dimensions for retrofit purposes. For dimensions other than shown, contact your nearest Schneider Electric sales office or your local Schneider Electric distributor.

Ordering Information

1. Select switch catalog number based on fused or unfused and enclosure type.
2. Select catalog numbers for factory modifications from the table above.
3. If fused, select fuse from Table 11.43 DIN/E Current-Limiting Fuses, Non-Disconnecting Type (Extended Travel Blown Fuse Indicator), page 11-30 or Table 11.44 Boric Acid Fuses, page 11-31.
4. Price switch and fuses separately. Switches are furnished with provisions only for current-limiting fuse or boric acid fuse.

[5] Includes fuse holder only. See Table 11.44 Boric Acid Fuses , page 11-31 for fuse refills. Boric acid fuses may increase lead times. Contact the factory for availability.
[6] Load side connected

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Square D™ Brand DIN/E Fuse Selection Tables—HVL

Table 11.43: DIN/E Current-Limiting Fuses, Non-Disconnecting Type *[7][8][9]*
(Extended Travel Blown Fuse Indicator*[10]*)

Continuous Current	Fuse Mounting Clip *[11]*		Catalog No. *[12][13]*
	Centers (in)	Diameter (mm)	
5 kV Fuse			
10E	17.4	51	55DE010
15E	17.4	51	55DE015
20E	17.4	51	55DE020
25E	17.4	51	55DE025
30E	17.4	51	55DE030
40E	17.4	51	55DE040
50E	17.4	51	55DE050
65E	17.4	51	55DE065
80E	17.4	51	55DE080
100E	17.4	51	55DE100
125E	17.4	76	55DE125
150E	17.4	76	55DE150
175E	17.4	76	55DE175
200E	17.4	76	55DE200
250E	17.4	76	55DE250
300E	17.4	76	55DE300
350E	17.4	76	55DE350
400E	17.4	76	55DE400
450E	17.4	76	55DE450
15 kV Fuse			
10E	17.4	51	175DE010
15E	17.4	51	175DE015
20E	17.4	51	175DE020
25E	17.4	51	175DE025
30E	17.4	51	175DE030
40E	17.4	76	175DE040
50E	17.4	76	175DE050
65E	17.4	76	175DE065
80E	17.4	76	175DE080
100E	17.4	88	175DE100
125E	21.14	88	175DE125
150E	21.14	88	175DE150
175E	21.14	88	155DE175
200E	21.14	88	155DE200

[7] Square D™ brand DIN/E fuses are shown in this table. For fuses produced by other manufacturers, contact your nearest Schneider Electric sales office or your local Schneider Electric distributor.
[8] Current-limiting fuses will increase the integrated short-circuit ratings beyond the non-fusible units. Contact your nearest Schneider Electric sales office or your local Schneider Electric distributor.
[9] Caution—These fuses will not work for the MiniBreak. See Table 11.47 Current-Limiting Fuses, page 11-32 for the appropriate MiniBreak fuses.
[10] HVLcc Only.
[11] All fuses are single barrel arrangement with ferrule diameters per the chart.
[12] Contact your Schneider Electric representative for current stock quantities.
[13] Includes one set of three fuses, packed in a single box.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Boric Acid Fuse Selection Tables—HVL

Table 11.44: Boric Acid Fuses *[14]*

Continuous Current	Fuse Type*[15]*	Catalog No.	Fuse Type *[16]*	Catalog No. *[17][18]*
5 kV Fuse Refill				
10E	SM-5S	5SM5010	RBA400	405WBAF010
15E	SM-5S	5SM5015	RBA400	405WBAF015
20E	SM-5S	5SM5020	RBA400	405WBAF020
25E	SM-5S	5SM5025	RBA400	405WBAF025
30E	SM-5S	5SM5030	RBA400	405WBAF030
40E	SM-5S	5SM5040	RBA400	405WBAF040
50E	SM-5S	5SM5050	RBA400	405WBAF050
65E	SM-5S	5SM5065	RBA400	405WBAF065
80E	SM-5S	5SM5080	RBA400	405WBAF080
100E	SM-5S	5SM5100	RBA400	405WBAF100
125E	SM-5S	5SM5125	RBA400	405WBAF125
150E	SM-5S	5SM5150	RBA400	405WBAF150
175E	SM-5S	5SM5175	—	—
200E	SM-5S	5SM5200	RBA400	405WBAF200
250E	SM-5S	5SM5250	RBA400	405WBAF250
300E	SM-5S	5SM5300	RBA400	405WBAF300
400E	SM-5S	5SM5400	RBA400	405WBAF400
15 kV Fuse Refill				
10E	SM-5S	15SM5010	RBA400	415WBAF010
15E	SM-5S	15SM5015	RBA400	415WBAF015
20E	SM-5S	15SM5020	RBA400	415WBAF020
25E	SM-5S	15SM5025	RBA400	415WBAF025
30E	SM-5S	15SM5030	RBA400	415WBAF030
40E	SM-5S	15SM5040	RBA400	415WBAF040
50E	SM-5S	15SM5050	RBA400	415WBAF050
65E	SM-5S	15SM5065	RBA400	415WBAF065
80E	SM-5S	15SM5080	RBA400	415WBAF080
100E	SM-5S	15SM5100	RBA400	415WBAF100
125E	SM-5S	15SM5125	RBA400	415WBAF125
150E	SM-5S	15SM5150	RBA400	415WBAF150
175E	SM-5S	15SM5175	—	—
200E	SM-5S	15SM5200	RBA400	415WBAF200
250E	SM-5S	15SM5250	RBA400	415WBAF250
300E	SM-5S	15SM5300	RBA400	415WBAF300
400E	SM-5S	15SM5400	RBA400	415WBAF400

[14] S&C Boric Acid Fuses Type SM-5S fuses are manufactured by the S&C Electric Company. SM-5S has a 25.0 kA symmetrical short-circuit rating from 2.4 kV to 17.0 kV. For 16.5 kV ratings, only S&C boric acid fuses can be used.

[15] Cutler-Hammer - Westinghouse Fuses
Type RBA-400 fuses are manufactured by Cutler-Hammer - EATON Corporation. RBA-400 has a 37.5 kA symmetrical ampere short-circuit rating from 2.4 kV to 4.8 kV and 29.4 kA symmetrical from 12 kV to 13.8 kV.

[16] Caution—These fuses will not work for the MiniBreak. See Table 11.47 Current-Limiting Fuses, page 11-32 for the appropriate MiniBreak fuses.

[17] Contact your Schneider Electric representative for current stock quantities.

[18] Includes one set of three fuses, packed in a single box.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



MiniBreak Switch Enclosure with Door (Class 6042)


MiniBreak Switch Interior Showing Fuses (Class 6042)

MiniBreak™ Compact Height Switches— 5.5 kV, 200 A

The Square D™ brand MiniBreak compact height switch enclosure is only 66-inches high and contains a single 3-pole load interrupter switch, rated 5.5 kV and 200 A. Enclosures are free-standing and suitable for both indoor (NEMA 1) and outdoor (NEMA 3R) applications. These switches are available unfused or with provisions for ANSI-style, 3-inch-barrel fuses rated from 10E A to 200E A. Factory-installed accessories include an auxiliary switch, strip heaters, and provisions for a “lock open” only key interlock. The door is mechanically interlocked with the switch operating handle. Set screw cable lugs for #14 solid—2/0 stranded aluminum or copper cable are provided for two line and one load connections. **Fuses are not furnished with this equipment.** For fuse information, see Table 11.47 Current-Limiting Fuses, Non-Disconnect Type. The Fused switches and many of the fuses listed in this table are available from stock.

Table 11.45: Ratings

Max. design voltage (kV)	5.5
BIL (kV)	60
Frequency (Hz)	60
Continuous amperes	200
Interrupting amperes	200
Momentary (amperes asymmetrical)	20,000
Fault close (amperes asymmetrical)	20,000
Capacitor switching (kVAR)	None
Short time, 2 seconds (amperes symmetrical)	12,500
Low frequency withstand (kV)	19
Fuse integrated (symmetrical)	63,000

NOTE: 1200 hp maximum.

Ordering Information

Table 11.46: 5 kV—200 A Switch

Type	Switch Catalog No.
Unfused	HVMB305200U
Fused	HVMB305200

Listed Metal-Enclosed Interrupter Switchgear

1. Select switch catalog number based on fused or unfused.
2. Select catalog numbers for modifications from Factory Modifications table.
3. If fused, select 5 kV, 200 A maximum current-limiting fuse from table below.
4. Price switch and fuses separately. Switches are furnished with provisions only for fuses.
5. Weight 450 lbs (204 kg).

Table 11.47: Current-Limiting Fuses, Non-Disconnect Type

Continuous Current	Fuse Mounting Clip		Catalog Number *[19] [20]*
	Size	Centers	
5 kV Fuse			
10E	D	12”	5GS010
15E			5GS015
20E			5GS020
25E			5GS025
30E	D	12”	5GS030
40E			5GS040
50E			5GS050
65E			5GS065
80E			5GS080
100E			5GS100
125E	D	12”	5GS125
150E			5GS150
175E			5GS175
200E			5GS200

Table 11.48: Factory Modifications

Catalog No.	Description
HVMX1	Auxiliary switch, 1-N.O. and 1-N.C. contacts
HVMK1	Provisions for lock open only key interlock—Type KFL Kirk key lock with a 0-inch bolt projection (Kirk item master number KFL000010SH)
HVMH1	Strip heater 100 W @ 120 V
HVMH2	Strip heater with thermostat 100 W @ 120 V
HVMSA3	Distribution class surge arrester (set of three arresters) 3 kV, 2.55 MCOV *[21]*
HVMSA6	Distribution class surge arrester (set of three arresters) 6 kV, 5.10 MCOV *[21]*


[19] Contact your Schneider Electric representative for current stock quantities.
[20] Includes one set of three fuses, packed in a single box.
[21] Arresters are line side connected.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025


Ordering Example

Order one (1), 5 kV, 200 A switch with 65E current-limiting fuses. Provide one auxiliary switch with 1-N.O. and 1-N.C. contact and with provision for installing a “lock open” key interlock on the switch operating mechanism.


Order:	Catalog No.
Switch with enclosure	HVMB305200
Auxiliary switch	HVMX1
Key interlock adapter	HVMK1
Fuses (set of three, from Table 11.47 Current-Limiting Fuses, Non-Disconnect Type, page 11-32. *[22] [23]*	5GS065

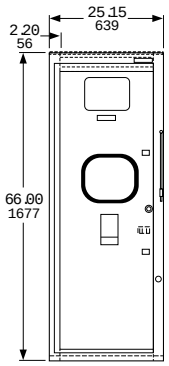


Front View

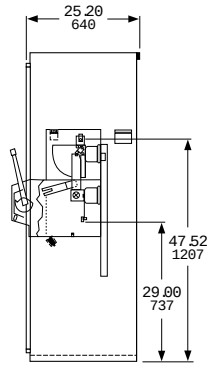

Section View
(unfused)

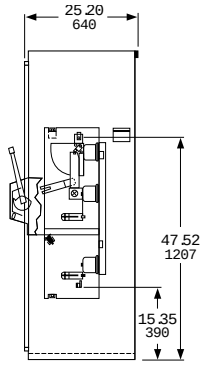

Section View
(fused)



Bottom View
Selected Area Recommended
(bottom conduit entrance)

[22] For fuses produced by other manufacturers, contact your nearest Schneider Electric sales office or your local Schneider Electric distributor.
[23] Current-limiting fuses will increase the integrated short-circuit ratings beyond the non-fusible units. Contact your nearest Schneider Electric sales office or your local Schneider Electric distributor.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

DVCAS Switchgear

DVCAS medium voltage (MV) switchgear from Schneider Electric is designed to meet the electrical switching, protection, and connection needs of wind farm applications up to 38 kV. Three different modules are available:


- Transformer protection module D
- Outgoing line module O
- Incoming line module I

For standard wind power applications, a maximum of four modules can be connected in various configurations to provide the most commonly used wind power functions.


DVCAS switchgear is designed, manufactured, and tested in accordance with the following standards:

- C37.20.3-9
- C37.54
- CAN/CSA C22.2 No.31-M89
- UL Listed
- IEEE Cable Bushings



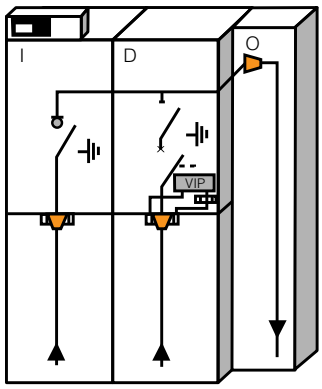

Typical IDO Configuration

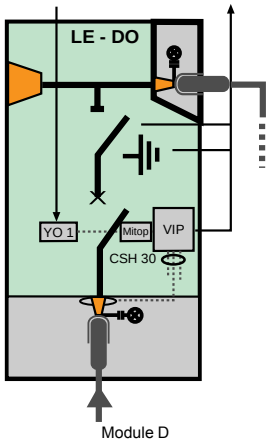

Module D

Transformer Protection Module D

DVCAS switchgear module D provides transformer protection. Construction features include:

- Metal base frame
- Operating mechanism and relay compartment
  - disconnector operating mechanism
  - operating mechanism of the circuit breaker
  - protection relay VIP, Sepam, or Micom
  - zero sequence current transformer CSH 30
- MV cable compartment
  - bushings for cable connection
  - Three CRc current sensors per phase
- Stainless steel, gas-tight tank
  - busbar system
  - three position disconnector
  - circuit breaker

© 2025 Schneider Electric
All Rights Reserved
12/17/2025


Outgoing Line Module O

DVCAS switchgear module O functions as an outgoing line to a downstream wind generator. There are two medium voltage cables per phase. Construction features include:


- Metal base frame
- Voltage presence indicator
- MV cable compartment
  - bushings for cable connection
  - clamps for MV cable connection



D + O
Transformer protection + Outgoing line



(I + D + O)
Incoming line + Transformer protection + Outgoing line



(I + I + D + O)
Two Incoming lines + Transformer protection + Outgoing line

Recommended Configurations

Incoming Line Module I

DVCAS switchgear module I is a three-position switch-disconnector. It is recommended for the incoming line function from an upstream wind generator for the following reasons:

- Reduces downtime caused by faults
- Helps with fault detection
- Reduces interruptions due to maintenance work
- Improves energization works

Module I is always connected to module D on the right with single-phase, coupling bushings. Construction features include:

- Metal base frame
- Operating mechanism compartment
  - operating mechanism of the switch-disconnector
  - motor for the operating mechanism (optional)
- MV cable compartment
  - bushings for cable connection
- Stainless steel, gas-tight tank
  - busbar system
  - three position disconnector

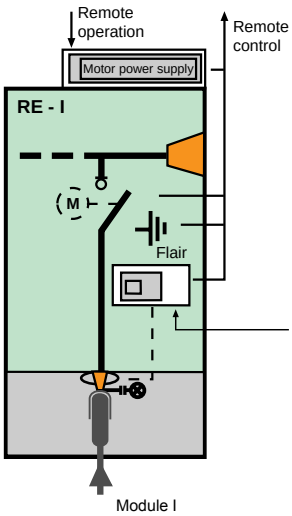


Table 11.49: Ratings

Type	Rating
Frequency (Hz)	50/60
Rated voltage (kV)	38
Insulation level	
Power frequency withstand voltage (kV)	70
Lightning impulse withstand voltage, peak (kV)	170
Rated current of the main busbar (A)	600
Short time withstand current (kA/s)	20/3 *[24]*
Short circuit breaking current capacity (kA)	20 *[24]*
Short circuit making capacity, peak (kA)	50
Internal arc withstand IAC AFL (kA/1s)	20 *[24]*
Degree of protection (NEMA/IP)	
HV compartment	6/67
LV and operating mechanism compartment	6P/3X
SF6 gas pressure at 20 °C (PSI/bar)	4.35/0.3

[24] 25 kA for circuit breaker switchgear module D.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



PremSeT Compact Vacuum Circuit Breaker Switchgear with Shielded Solid Insulation System (2SIS)

PremSeT is 15 kV vacuum circuit breaker switchgear technology that takes advantage of the innovative shielded solid insulated system (2SIS). 2SIS creates a three-layered system (medium voltage conductive layer, epoxy insulating layer, and grounded shield layer) throughout the entire switchgear that optimizes performance and increases life expectancy. PremSeT reduces the opportunity of arc flash or contact with live parts by insulating and screening all live parts in an epoxy dielectric molding. In addition, a grounded shield layer helps reduce the likelihood of exposure to electrical hazards while at the same time better protecting the insulating material from harsh environmental conditions such as moisture, dust, chemicals, and vermin.

PremSeT delivers a compact architecture that is both modular and flexible. It allows for front-only accessibility (bottom incoming cables) and the smallest 15 kV vacuum circuit breaker footprint on the market. Plug-and-play design of accessories and auxiliaries makes even last minute or field modifications possible. Modular design improves cost savings and optimizes delivery times. PremSeT's modular configurations make it a great fit for applications and intuitive to learn for operators. PremSeT has options for both indoor and outdoor enclosures with transitions to dry type transformers.

Table 11.50: PremSeT Ratings

Voltage Class	5 and 15 kV			
Bus Current Rating	600 and 1200 A			1200 A
Circuit Breaker Current Rating	100 A	200 A	600 A	1200 A
Maximum Short-Time Interrupting Current	25 kA (2 seconds)			
Rated BIL Withstand Voltage	95 kV			



Listed Metal-Enclosed Interrupter Switchgear

Table 11.51: Dimensions

Indoor	600 A	14.76 in. (375 mm) x 96.76 in. (2458 mm) x Various
	1200 A	29.53 in. (750 mm) x 96.76 in. (2458 mm) x Various
Outdoor	600 A	14.76 in. (375 mm) x 99.77 in. (2534 mm) x Various
	1200 A	29.53 in. (750 mm) x 99.77 in. (2534 mm) x Various

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



Unit Substation

Power-Zone Load Center Unit Substations

Table 11.52: Complete Close Coupled Unit Substations Available

Product Type	Class Nos.	Digest Section
Primary Section		
Medium voltage load interrupter switchgear	6040, 6045	11
Metalclad switchgear	6055	
Low voltage Power-Style™ QED switchboard	2741–2744	
Air terminal chamber	7240, 7310, 7320, 7421–23	
Transformer Section		
Open, ventilated dry—Power-Dry™	7421–23	14
Open, ventilated dry/cast resin combination—Uni-Cast™	7320	
Open, ventilated cast resin—Power-Cast™	7310	
Mineral oil or high fire point fluid—liquid	7240	
Secondary Section		
Medium voltage load interrupter switchgear	6040	11
Metalclad switchgear	6055	
Medium voltage motor control center	8198	
Low voltage Power-Style QED switchboard	2741–2744	
Air terminal chamber	7240, 7310, 7320, 7421–23	
Low voltage drawout switchgear	6037	
Low voltage Model 6 motor control centers	8998	15



Model III Package Unit Substation
with HVL/cc Load Interrupter Switch (on left)

Power-Zone Model III Package Unit Substations

General

Power-Zone Model III package unit substations combine a primary switch, dry-type transformer, and I-Line™ distribution section into a single, compact unit. All components are engineered, manufactured, and tested by Schneider Electric. The substation is available with a UL listing.

The Model III is only 49 inches deep and 90 inches high, which allows the entire substation to pass through standard size doorways and narrow hallways.

The Model III is front accessible; the transformer taps are accessible from the side. For proper ventilation, a minimum distance of 12 inches should be maintained on the transformer side of the equipment.

Model III package unit substations are ideal for renovations and high rise applications requiring increased customer electrical demand as well as new construction requiring multiple zones and a small footprint.

75–1000 kVA at 480 V; 75–500 kVA at 240 V

Available with primary voltages of 2400–13800 V. Forced air cooling (AA/FA) provides an additional 33%. Features 220 °C insulation and 150 °C, 115 °C, or 80 °C temperature rise. Largest 80 °C or 115 °C rise unit available is 750 kVA.

The secondary circuit breaker distribution section may be equipped with an individually mounted secondary main breaker or an I-Line distribution panelboard. Branch circuit breakers from PowerPact™ B to PowerPact RLC 1200 A may be installed. PowerPact M-, P-, and R-frame molded case circuit breakers are available with electronic trip units.

Additional options include PowerLogic™ and ION™ series metering, surge arresters, and I-Line™ plug-on units with a Surgelogic™ Surge Protective Device (SPD).

Incoming Line Section

Most Model IIIs are supplied with a Square D™ brand fused HVL/cc 600 A load interrupter switch. The HVL/cc offers the smallest footprint in the industry and is an exclusive sealed interruption type compartmentalized switch. Where switching and overcurrent protection are provided elsewhere, a full-height air-filled terminal chamber can be provided in place of the switch.

Table 11.53: Primary Switch Ratings, Type HVL/cc

Nominal Voltage	4.16	13.8
BIL	60	95
Continuous amperes	600	600
Interrupting amperes	600	600
Fault close (kA asymmetrical)	40	40
Momentary current (kA asymmetrical 10 cycles)	40	40
Duty-cycle-fault-close (number of operations)	4	4
Grounding switch fault close (kA asymmetrical)	40	40
Short-time rating (kA asymmetrical 2 seconds)	25	25
Dielectric withstand (kV 1 minute)	19	36
Electrical endurance (close-open)	100	100
Mechanitcal endurance (close-open)	1000	1000

© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Transformer Section


Special barrel wound dry-type transformers employing resin encapsulated VPI (Vacuum Pressure Impregnation) techniques are used to achieve the low-loss, compact design necessary for the space-saving package substation concept. Class H, 220 °C insulation is used throughout. Temperature rise is 150 °C as standard, although 80°C or 115 °C low temperature premium transformers are available through 750 kVA. Aluminum windings are standard with copper as an option. Four full capacity 2-1/2 percent taps are provided-two above nominal voltage and two below.

Fan cooling is optional. When selected, it increases the capacity rating of the transformer an additional 33 percent. The Model 98 digital controller is employed. This system provides precision control through the use of three high accuracy thermocouple type sensors—one in each phase of the windings.

The controller has a membrane front panel for displaying the temperature of all three phases with individual readings. The hottest phase is automatically displayed. The Model 98 digital controller features simple three-button operation with fan, alarm and trip function settings and is Powerlogic™ compatible.


Table 11.54: Transformer Basic Insulation Levels

KV Class	Primary Voltages	BIL	600 Hz Test
1.2	< 600 V Secondary	10	4 kV
2.5	2400	20	10 kV
5.0	4160, 4800	30	12 kV
7.2	6900, 7200	30	12 kV
8.7	8320	45	19 kV
15.0	12, 12.47, 13.2, 13.8	60	31 kV

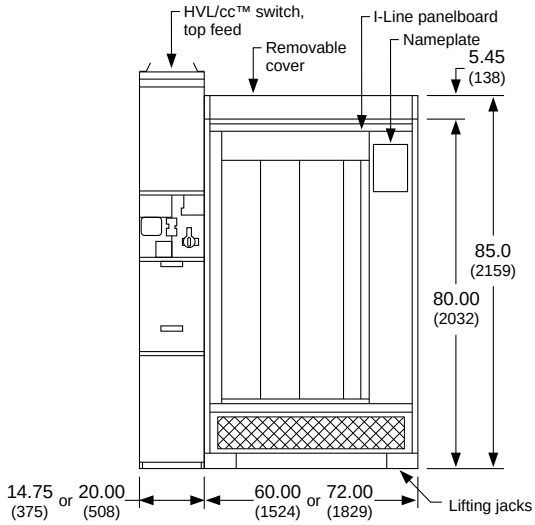

Power-Zone Model III
Front View

© 2025 Schneider Electric
All Rights Reserved
12/17/2025



HCR-U 1200 A I-Line panelboards can be used for up to 600 Vac. They are UL Listed under File E33139.

Distribution Section

I-Line™ Mounted Molded Case Circuit Breakers

Molded case circuit breakers are group mounted in an I-Line panelboard section offering the inherent ease of installation for which the plug-on I-Line circuit breaker has become known. All circuit breakers are quick-make, quick-break, thermal magnetic, permanent trip type and are factory-calibrated and sealed for accurate overcurrent response and maximum short-circuit strength. PowerPact™ P and R circuit breakers are available with solid-state MicroLogic™ trip units. Current limiting high interrupting capacity FI, KI, and LI circuit breakers are also available. Circuit breakers may be safely back-fed for use as main circuit breakers. All circuit breakers are UL listed and carry integrated equipment rating when used exclusively with other Square D™ brand circuit breakers in intended assemblies.

I-Line panel is available in 1200 A. Maximum mounting space is 108 inches. Tin-plated copper bus is standard.

Dimensions shown in Inches (mm). See table below for A, B, C, D, E dimensions.

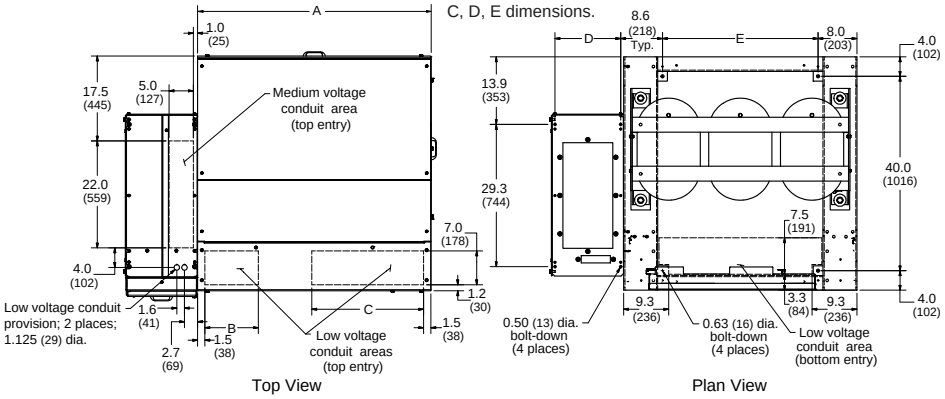


Table 11.55: Substation Dimensions and Approximate Weights

kVA	Temperature Rise ° C	Dimensions (for drawing shown)					Estimated Weight
		A	B	C	D	E	
75	80, 115, 150	48	11.0	23.0	13.5	32.0	3600
112.5							
150							
225	80, 115, 150						4500
300							
500	150						6000
500	80, 115	60	18.5	27.0	18.75	44.0	6200
750	80, 115, 150						6700
1000	150						7500

Contact your nearest Schneider Electric sales office for ordering assistance.

© 2025 Schneider Electric
All Rights Reserved
12/17/2025


© 2025 Schneider Electric
All Rights Reserved
12/17/2025

Section 12

Busway




Powerbus 100-400 A




I-Line Plug-in Busway 225-600 A

Plug-in Style

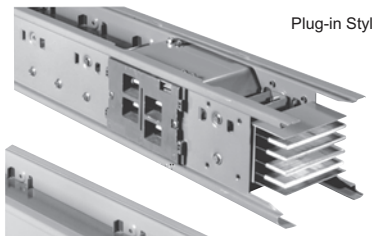

Feeder Style

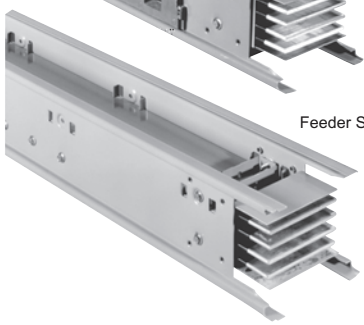

I-Line II Busway 800-5000 A



I-Line Plug-in Units



Power-Zone Busway

Busway 12-1

Introduction 12-2

Powerbus™ Busway 12-3

Powerbus™ Busway 12-3
Powerbus Plug-In Units 12-5
Powerbus Plug-in Units with Metering 12-7

I-Line™ Busway 12-8

Standard Components 12-8

I-Line™ II Busway 12-9

800 A–5000 A Busway 12-9
I-Line™ II Straight Lengths, Fittings, and Accessories 12-9
800 A to 5000 A “Factory Assembled" Busway Systems (or Components) 12-11
Additions, Accessories, and Electrical Data 12-12
Electrical Data for I-Line II Busway 12-12
Plug-In Units 12-12
Fusible Plug-In Units, Class R Fuse Kits, and Hooksticks 12-12
Surge Protective Device Plug-In Units 12-13
PowerPact™ H-, and J-Frame Plug-in Units 12-14
PowerPact™ H-, J-, and L-Frame Plug-in Units with Electronic Trip 12-15
H- , J-, and L-Frame Plug-In Units with Electronic Trip and Communication 12-17
PowerPact™ M-Frame Plug-in Units with Basic Electronic Trip 12-17
PowerPact™ P-Frame Plug-in Units 12-18
PowerPact™ R-Frame Plug-in Units 12-19

Power-Zone™ Busway 12-20

Non-Segregated Bus 12-20

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Distinct service advantages make your Busway installation “hassle-free”

- **Missing Link** program guarantees shipment in a maximum of 5 working days of a small quantity (10 pieces or less) of standard indoor feeder straight lengths and fittings for US destinations. Orders for international destinations require 2 additional days for processing. The quantity of working days guaranteed by this program excludes the day of receipt of the order. Contact your local sales office for outdoor busway and for additional details of this program.
- **Measurement Services** are offered for your critical and complex projects. Schneider Electric will assist with field measurement and assume responsibility for the layout and exact fit of all components. Contact your local Schneider Electric sales office for exact details.
- **Emergency Service;** we are on call 24 hours a day, 7 days a week, 365 days a year. For emergencies, call 1-888-SquareD (1-888-778-2733).
- **Quick Ship** program provides product availability for time sensitive orders. The program is available through the product selectors and offers a limited selection of I-Line busway footage and fittings. Contact your local Schneider Electric sales office for exact details.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Powerbus Busway


Construction

Powerbus busway construction consists of a light-weight electrical grade all-aluminum housing with up to five (5) silver-plated copper conductor bars for maximum electrical efficiency. The total product offer includes straight sections, fittings, accessories, and plug-in units for a total installation. This busway is available in 400 A, 225 A and 100 A ratings. A 50% integral ground is standard.

Straight Sections

Straight sections of busway are available in 10 ft. and 4 ft. lengths in a painted black finish. The Enhanced busway offer includes 10 plug-in openings on each side of a 10 ft. section and 3 plug-in openings on each side of a 4 ft. section.

Metering and Communications Options

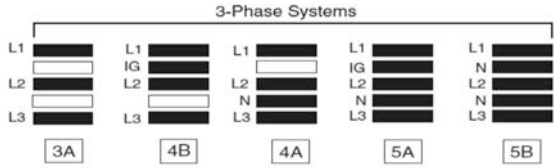



Single phase systems and DC systems are also available. Contact your local Schneider Electric representative.

Powerbus busway tap boxes and plug-in units are available with optional metering and communication capabilities, which include an integrated display and the ability to remotely monitor the busway.

Table 12.1: 3Ø3W—Powerbus Straight Lengths and Fittings—600 V Maximum

Amperage	Component	Configuration 3A–Catalog No.*[1]*	Configuration 4B–Catalog No.*[1]*
100 A	Enhanced Straight 10 ft.	PBCE3A100AST120B	PBCE4B100AST120B
	Enhanced Straight 4 ft.	PBCE3A100AST048B	PBCE4B100AST048B
	Elbow – Left	PBCF3A100ALLB	PBCF4B100ALLB
	Elbow – Right	PBCF3A100ALRB	PBCF4B100ALRB
	Cross Fitting	PBCF3A100ACRB	PBCF4B100ACRB
	Tap Box	PBCF3A100ATBB	PBCF4B100ATBB
	Tap Box w/Meter*[2][3]*	PBCF3A100ATBM( )B	PBCF4B100ATBM( )B
225 A	Enhanced Straight 10 ft.	PBCE3A225AST120B	—
	Enhanced Straight 4 ft.	PBCE3A225AST048B	PBCE4B225AST048B
	Elbow – Left	PBCF3A225ALLB	PBCF4B225ALLB
	Elbow – Right	PBCF3A225ALRB	PBCF4B225ALRB
	Cross Fitting	PBCF3A225ACRB	PBCF4B225ACRB
	Tap Box	PBCF3A225ATBB	PBCF4B225ATBB
	Tap Box w/Meter*[3]*	PBCF3A225ATBM( )B	PBCF4B225ATBM( )B
400 A	Enhanced Straight 10 ft.	PBCE3A400AST120B	PBCE4B400AST120B
	Enhanced Straight 4 ft.	PBCE3A400AST048B	PBCE4B400AST048B
	Elbow – Left	PBCF3A400ALLB	PBCF4B400ALLB
	Elbow – Right	PBCF3A400ALRB	PBCF4B400ALRB
	Cross Fitting	PBCF3A400ACRB	PBCF4B400ACRB
	Tap Box	PBCF3A400ATBB	PBCF4B400ATBB
	Tap Box w/Meter*[3]*	PBCF3A400ATBM( )B	PBCF4B400ATBM( )B

[1] Busway catalog numbers shown include a black painted finish. Contact your local Schneider Electric representative for a natural aluminum finish option.
[2] For 100 A busway only, add an (L), for top cable access, or a (U), for bottom cable access, before the last letter in the catalog no., which is (B).
[3] Replace the ( ) in the Tap Box w/Meter catalog number with the meter suffix number in Table 12.3 Meter Suffix Number, page 12-4. The meter will be configured based on system voltage.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 12.2: 3Ø4W—Straight Lengths and Fittings—600 V Maximum

Amperage	Component	Configuration 4A–Catalog No.*[4]*	Configuration 5A–Catalog No.*[4]*	Configuration 5B–Catalog No.*[4]*
100 A	Enhanced Straight 10 ft.	PBCE4A100AST120B	PBCE5A100AST120B	PBCE5B100AST120B
	Enhanced Straight 4 ft.	PBCE4A100AST048B	PBCE5A100AST048B	PBCE5B100AST048B
	Elbow – Left	PBCF4A100ALLB	PBCF5A100ALLB	PBCF5B100ALLB
	Elbow – Right	PBCF4A100ALRB	PBCF5A100ALRB	PBCF5B100ALRB
	Cross Fitting	PBCF4A100ACRB	PBCF5A100ACRB	PBCF5B100ACRB
	Tap Box	PBCF4A100ATBB	PBCF5A100ATBB	PBCF5B100ATBB
	Tap Box w/Meter*[5][6]*	PBCF4A100ATBM( )B	PBCF5A100ATBM( )B	PBCF5B100ATBM( )B
225 A	Enhanced Straight 10 ft.	PBCE4A225AST120B	PBCE5A225AST120B	PBCE5B225AST120B
	Enhanced Straight 4 ft.	PBCE4A225AST048B	PBCE5A225AST048B	PBCE5B225AST048B
	Elbow – Left	PBCF4A225ALLB	PBCF5A225ALLB	PBCF5B225ALLB
	Elbow – Right	PBCF4A225ALRB	PBCF5A225ALRB	PBCF5B225ALRB
	Cross Fitting	PBCF4A225ACRB	—	PBCF5B225ACRB
	Tap Box	PBCF4A225ATBB	PBCF5A225ATBB	PBCF5B225ATBB
	Tap Box w/Meter*[6]*	PBCF4A225ATBM( )B	PBCF5A225ATBM( )B	PBCF5B225ATBM( )B
400 A	Enhanced Straight 10 ft.	PBCE4A400AST120B	PBCE5A400AST120B	PBCE5B400AST120B
	Enhanced Straight 4 ft.	PBCE4A400AST048B	PBCE5A400AST048B	PBCE5B400AST048B
	Elbow – Left	PBCF4A400ALLB	PBCF5A400ALLB	PBCF5B400ALLB
	Elbow – Right	PBCF4A400ALRB	PBCF5A400ALRB	PBCF5B400ALRB
	Cross Fitting	PBCF4A400ACRB	PBCF5A400ACRB	PBCF5B400ACRB
	Tap Box	PBCF4A400ATBB	PBCF5A400ATBB	PBCF5B400ATBB
	Tap Box w/Meter*[6]*	PBCF4A400ATBM( )B	PBCF5A400ATBM( )B	PBCF5B400ATBM( )B

Table 12.3: Meter Suffix Number

Meter Suffix	System Voltage
1	208Y/120 V 3Ø4W
2	240 V 3Ø3W
4	415/240 V 3Ø4W
5	480Y/277 V 3Ø4W

Table 12.4: Accessories*[7]*

Description	100 A Catalog No.	225 A Catalog No.	400 A Catalog No.
Standard Hanger	PB100FH	PB225FH	PB400FH
Side Mount Hanger	PB100HFW	PB225HFW	PB400HFW
Vertical Sway Brace	PB100VSB	PB225VSB	PB400VSB
End Closure	PB100AEC	PB225AEC	PB400AEC
Wall Flange	PB100WF	PB225WF	PB400WF
Plug-in Opening Cover	PBPIOCVR	PBPIOCVR	PBPIOCVR


Table 12.5: Hooksticks

Length	Catalog No.
8'	515608
14'	515614
4'—8' extension pole*[8]*	PBHS0408
8'—15' extension pole*[8]*	PBHS0815

[4] Busway catalog numbers shown include a black painted finish. Contact your local Schneider Electric representative for a natural aluminum finish option.
[5] For 100 A busway only, add an (L), for top cable access, or a (U), for bottom cable access, before the last letter in the catalog no., which is (B).
[6] Replace the ( ) in the Tap Box w/Meter catalog number with the meter suffix number in Table 12.3 Meter Suffix Number, page 12-4. The meter will be configured based on system voltage.
[7] For the NetShelter ™ IT Rack-Mounting Bracket, refer to **5600CT9101**.
[8] For single-pole operation on QO and ED circuit breakers.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025


Three-Phase Systems

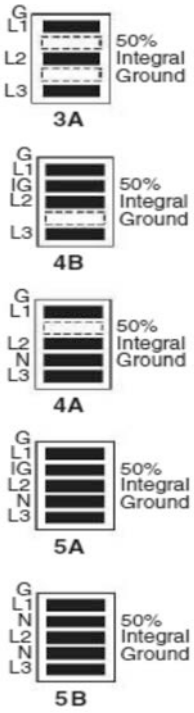

Powerbus Plug-In Units

Powerbus plug-in units are rated maximum 100 A and may be offered as field installable or factory assembled units. All units conform to NEMA type 1. An optional kit is available for QO units to raise the protection to IP54. This kit raises the QOR unit to moisture protection of IPX3.

Table 12.6: Plug-In Units—Circuit breakers not included

Busbar Configuration		3 Spaces for QO/QOB Circuit Breakers	3 Spaces for QO/QOB Circuit Breakers 3 Openings for Receptacles*[9]*
			
	Tap Box*[10]*	QO Unit	QOR Unit
	Catalog Number	Catalog Number	Catalog Number
4B	PBPTB4B100	PBPQO4B100	PBPQOR4B100
3A	PBPTB3A100	PBPQO3A100	PBPQOR3A100
4A	PBPTB4A100	PBPQO4A100	PBPQOR4A100
5A	PBPTB5A100	PBPQO5A100	PBPQOR5A100

[9] Certain NEMA receptacles can be field installed in this unit. Consult your local Schneider Electric representative.
[10] Plug-in tap box to be installed on 100 A and 225 A busways only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

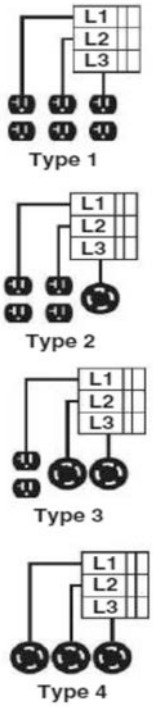


Table 12.7: 120 V Factory Assembled Units: 1-pole QO/QOB circuit breakers with NEMA 5-15R or 5-20R receptacles*[11][12]*

Circuit Breaker		4A Configuration	5A Configuration	5B Configuration
Rating	Type	Catalog Number	Catalog Number	Catalog Number
Type 1		**(3 circuit breakers w. 3 duplex receptacles)**		
15	QO	PBPQOR4A100M115	PBPQOR5A100M115	PBPQOR5B100M115
15	QOB	PBPQOR4A100M115B	PBPQOR5A100M115B	PBPQOR5B100M115B
20	QO	PBPQOR4A100M120	PBPQOR5A100M120	PBPQOR5B100M120
20	QOB	PBPQOR4A100M120B	PBPQOR5A100M120B	PBPQOR5B100M120B
Type 2		**(3 circuit breakers w. 2 duplex/1 locking recpt.)**		
15	QO	PBPQOR4A100M215	PBPQOR5A100M215	PBPQOR5B100M215
15	QOB	PBPQOR4A100M215B	PBPQOR5A100M215B	PBPQOR5B100M215B
20	QO	PBPQOR4A100M220	PBPQOR5A100M220	PBPQOR5B100M220
20	QOB	PBPQOR4A100M220B	PBPQOR5A100M220B	PBPQOR5B100M220B
Type 3		**(3 circuit breakers w. 1 duplex/2 locking recpt.)**		
15	QO	PBPQOR4A100M315	PBPQOR5A100M315	PBPQOR5B100M315
15	QOB	PBPQOR4A100M315B	PBPQOR5A100M315B	PBPQOR5B100M315B
20	QO	PBPQOR4A100M320	PBPQOR5A100M320	PBPQOR5B100M320
20	QOB	PBPQOR4A100M320B	PBPQOR5A100M320B	PBPQOR5B100M320B
Type 4		**(3 circuit breakers w. 3 locking receptacles)**		
15	QO	PBPQOR4A100M415	PBPQOR5A100M415	PBPQOR5B100M415
15	QOB	PBPQOR4A100M415B	PBPQOR5A100M415B	PBPQOR5B100M415B
20	QO	PBPQOR4A100M420	PBPQOR5A100M420	PBPQOR5B100M420
20	QOB	PBPQOR4A100M420B	PBPQOR5A100M420B	PBPQOR5B100M420B

Table 12.8: Factory Assembled Units: One (1) QOU circuit breaker and one (1) drop cord with connector*[13][14]*

Circuit Breaker		NEMA Connector	Drop Cord Length (ft)	4A Configuration	5A Configuration	5B Configuration
Rating	Poles			Catalog Number	Catalog Number	Catalog Number
15 A	1	L5-15	3	PBPQOU4A100COOL515	PBPQOU5A100COOL515	PBPQOU5B100COOL515
20 A	1	L5-20	3	PBPQOU4A100COOL520	PBPQOU5A100COOL520	PBPQOU5B100COOL520
30 A	1	L5-30	3	PBPQOU4A100COOL530	PBPQOU5A100COOL530	PBPQOU5B100COOL530
15 A	2	L6-15	3	PBPQOU4A100COOL615	PBPQOU5A100COOL615	PBPQOU5B100COOL615
20 A	2	L6-20	3	PBPQOU4A100COOL620	PBPQOU5A100COOL620	PBPQOU5B100COOL620
30 A	2	L6-30	3	PBPQOU4A100COOL630	PBPQOU5A100COOL630	PBPQOU5B100COOL630
20 A	3	L21-20	3	PBPQOU4A100COOL2120	PBPQOU5A100COOL2120	PBPQOU5B100COOL2120
30 A	3	L21-30	3	PBPQOU4A100COOL2130	PBPQOU5A100COOL2130	PBPQOU5B100COOL2130
15 A	1	L5-15	6	PBPQOU4A100FOOL515	PBPQOU5A100FOOL515	PBPQOU5B100FOOL515
20 A	1	L5-20	6	PBPQOU4A100FOOL520	PBPQOU5A100FOOL520	PBPQOU5B100FOOL520
30 A	1	L5-30	6	PBPQOU4A100FOOL530	PBPQOU5A100FOOL530	PBPQOU5B100FOOL530
15 A	2	L6-15	6	PBPQOU4A100FOOL615	PBPQOU5A100FOOL615	PBPQOU5B100FOOL615
20 A	2	L6-20	6	PBPQOU4A100FOOL620	PBPQOU5A100FOOL620	PBPQOU5B100FOOL620
30 A	2	L6-30	6	PBPQOU4A100FOOL630	PBPQOU5A100FOOL630	PBPQOU5B100FOOL630
20 A	3	L21-20	6	PBPQOU4A100FOOL2120	PBPQOU5A100FOOL2120	PBPQOU5B100FOOL2120
30 A	3	L21-30	6	PBPQOU4A100FOOL2130	PBPQOU5A100FOOL2130	PBPQOU5B100FOOL2130

[11] Many more factory assembled units are available using combinations of 1P/2P/3P circuit breakers with other NEMA receptacles. Maximum of 3 breaker spacess available. Consult your local Schneider Electric representative.

[12] See Digest Section 7 for QOU circuit breaker information.

[13] Factory assembled units are available using combinations of 1P/2P/3P circuit breakers with other NEMA and IEC type receptacles. Maximum of three drop cords with six breaker spaces available. Consult your local Schneider Electric representative.

[14] See Digest Section 7 for QOU circuit breaker information. Catalog numbers shown have the breaker in the top slot in the front cover and the drop cord in the left position in the base of the unit. Other combinations are available.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Powerbus Plug-in Units with Metering

Powerbus plug-in units with metering are rated maximum 100 A and are offered as factory assembled units. All units conform to NEMA type 1.

Table 12.9: Factory Assembled Units with NEMA Connectors and Metering*[15][16]*

Circuit Breaker		NEMA Connector	Drop Cord Length (ft)	Catalog Number*[17][18]*		
Rating	Poles			4A Configuration	5A Configuration	5B Configuration
15 A	1	L5-15	3	PBPEDU4A100COOL515M( )	PBPEDU5A100COOL515M( )	PBPEDU5B100COOL515M( )
20 A	1	L5-20	3	PBPEDU4A100COOL520M( )	PBPEDU5A100COOL520M( )	PBPEDU5B100COOL520M( )
30 A	1	L5-30	3	PBPEDU4A100COOL530M( )	PBPEDU5A100COOL530M( )	PBPEDU5B100COOL530M( )
15 A	2	L6-15	3	PBPEDU4A100COOL615M( )	PBPEDU5A100COOL615M( )	PBPEDU5B100COOL615M( )
20 A	2	L6-20	3	PBPEDU4A100COOL620M( )	PBPEDU5A100COOL620M( )	PBPEDU5B100COOL620M( )
30 A	2	L6-30	3	PBPEDU4A100COOL630M( )	PBPEDU5A100COOL630M( )	PBPEDU5B100COOL630M( )
20 A	3	L21-20	3	PBPEDU4A100COOL2120M( )	PBPEDU5A100COOL2120M( )	PBPEDU5B100COOL2120M( )
30 A	3	L21-30	3	PBPEDU4A100COOL2130M( )	PBPEDU5A100COOL2130M( )	PBPEDU5B100COOL2130M( )
15 A	1	L5-15	6	PBPEDU4A100FOOL515M( )	PBPEDU5A100FOOL515M( )	PBPEDU5B100FOOL515M( )
20 A	1	L5-20	6	PBPEDU4A100FOOL520M( )	PBPEDU5A100FOOL520M( )	PBPEDU5B100FOOL520M( )
30 A	1	L5-30	6	PBPEDU4A100FOOL530M( )	PBPEDU5A100FOOL530M( )	PBPEDU5B100FOOL530M( )
15 A	2	L6-15	6	PBPEDU4A100FOOL615M( )	PBPEDU5A100FOOL615M( )	PBPEDU5B100FOOL615M( )
20 A	2	L6-20	6	PBPEDU4A100FOOL620M( )	PBPEDU5A100FOOL620M( )	PBPEDU5B100FOOL620M( )
30 A	2	L6-30	6	PBPEDU4A100FOOL630M( )	PBPEDU5A100FOOL630M( )	PBPEDU5B100FOOL630M( )
20 A	3	L21-20	6	PBPEDU4A100FOOL2120M( )	PBPEDU5A100FOOL2120M( )	PBPEDU5B100FOOL2120M( )
30 A	3	L21-30	6	PBPEDU4A100FOOL2130M( )	PBPEDU5A100FOOL2130M( )	PBPEDU5B100FOOL2130M( )

Table 12.10: Factory Assembled Units with IEC Connectors and Metering*[19][16]*

Circuit Breaker		IEC 60309 Connector*[20]*	Drop Cord Length (ft)	Catalog Number*[18][21]*		
Rating	Poles			4A Configuration	5A Configuration	5B Configuration
20	2	2-Pole, 3-Wire Grounding	3	PBPEDU4A100COOS3420M( )	PBPEDU5A100COOS3420M( )	PBPEDU5B100COOS3420M( )
30	2	2-Pole, 3-Wire Grounding	3	PBPEDU4A100COOS3430M( )	PBPEDU5A100COOS3430M( )	PBPEDU5B100COOS3430M( )
60	2	2-Pole, 3-Wire Grounding	3	PBPEDU4A100COOS3460M( )	PBPEDU5A100COOS3460M( )	PBPEDU5B100COOS3460M( )
20	3	3-Pole, 4-Wire Grounding	3	PBPEDU4A100COOS4420M( )	PBPEDU5A100COOS4420M( )	PBPEDU5B100COOS4420M( )
30	3	3-Pole, 4-Wire Grounding	3	PBPEDU4A100COOS4430M( )	PBPEDU5A100COOS4430M( )	PBPEDU5B100COOS4430M( )
60	3	3-Pole, 4-Wire Grounding	3	PBPEDU4A100COOS4460M( )	PBPEDU5A100COOS4460M( )	PBPEDU5B100COOS4460M( )
20	3	4-Pole, 5-Wire Grounding	3	PBPEDU4A100COOS5420M( )	PBPEDU5A100COOS5420M( )	PBPEDU5B100COOS5420M( )
30	3	4-Pole, 5-Wire Grounding	3	PBPEDU4A100COOS5430M( )	PBPEDU5A100COOS5430M( )	PBPEDU5B100COOS5430M( )
60	3	4-Pole, 5-Wire Grounding	3	PBPEDU4A100COOS5460M( )	PBPEDU5A100COOS5460M( )	PBPEDU5B100COOS5460M( )

Table 12.11: Meter Suffix Number

Meter Suffix*[22]*	System Voltage
1	208Y/120 V 3Ø4W
2	240 V 3Ø3W
4	415/240 V 3Ø4W
5	480Y/277 V 3Ø4W

Table 12.12: Gateway Plug-in Unit (480 V Max)*[23]*

4A Configuration	5A Configuration	5B Configuration
Catalog No.	Catalog No.	Catalog No.
PBPEGX4A100T	PBPEGX5A100T	PBPEGX5B100T

Table 12.13: NEMA Receptacles and Connectors*[24]*

Wiring	Voltage	NEMA Non-Locking			NEMA Locking		
		15 A	20 A	30 A	15 A	20 A	30 A
2-pole, 3-wire grounding	120	5–15	5–20	5–30	L5–15	L5–20	L5–30
2-pole, 3-wire grounding	240	6–15	6–20	6–30	L6–15	L6–20	L6–20
3-pole, 4-wire grounding	120/240	14–15	14–20	14–30	—	L14–20	L14–30
3-pole, 4-wire grounding	3Ø 240	15–15	15–20	15–30	—	L15–20	L15–30
4-pole, 5-wire grounding	3ØY 120/208	—	—	—	—	L21–20	L21–30

[15] See Digest Section 9, NF Merchandised Panelboards for ED circuit breaker information. Catalog numbers shown have the breaker in the top slot in the front cover and the drop cord in the left position in the base of the unit. Other combinations are available. The Power Meter display will be located below the breaker space. For remote monitoring capabilities, a gateway is required. The gateway is located in the tap box with metering or in a separate gateway plug-in unit listed below. The units with metering can be daisy-chained together back to the gateway. A maximum of 30 units should be daisy-chained together to one gateway.

[16] Factory assembled units are available using combinations of 1P/2P/3P circuit breakers with other NEMA and IEC type receptacles. Maximum of three drop cords with three breaker spaces available. Consult your local Schneider Electric representative.

[17] For IP54 splash resistant construction, add an "M54" suffix.

[18] For metering, replace ( ) in catalog number with the appropriate number in Table 12.11 Meter Suffix Number, page 12-7. Connectors must be rated for appropriate voltages.

[19] See Digest Section 9, For NF Merchandised Panelboards, page for ED circuit breaker information. Catalog numbers shown have the breaker in the top slot in the front cover and the drop cord in the left position in the base of the unit. Other combinations are available. The Power Meter display will be located below the breaker space. For remote monitoring capabilities, a gateway is required. The gateway is located in the tap box with metering or in a separate gateway plug-in unit listed below. The units with metering can be daisy-chained together back to the gateway. A maximum of 30 units should be daisy-chained together to one gateway.

[20] Other IEC Connectors are available.

[21] For the offer without metering, do not use the suffix “M” or any numbers following.

[22] Replace ( ) in above tables with the appropriate meter suffix number. Connectors must be rated for appropriate voltages.

[23] For remote monitoring capabilities, a gateway is required. The gateway is located in the tap box with metering or in a separate gateway plug-in unit listed above. Units with metering can be daisy-chained together back to the gateway. A maximum of 30 units should be daisy-chained together to one gateway.

[24] Additional NEMA, IEC, and California Standard type receptacles and connectors are available.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 12.14: Short Circuit Current Rating *[25]*

Product	Short-Circuit Current Rating KA, RMS Symmetrical
	UL 3–Cycle Test
100 A	14 kA
225 A	22 kA
400 A	35 kA

I-Line™ Standard Components and Accessories

Table 12.15: Standard Components—Aluminum

Aluminum

Number of Poles and Voltage	Rating (A)	G PH PH PH N 10'-0" Length	G PH PH PH N 6'-0" Length	G PH PH PH N Front Elbow *[1]*	G PH PH PH N Top Elbow *[1]*	G PH PH PH N Plug-In Tee	G PH PH PH N Plug-In Tap Box
		Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
3Ø3W	225 400 600	AP30210 AP30410 AP30610	AP3026 AP3046 AP3066	AP302LF( ) AP304LF( ) AP306LF( )	AP302LT( ) AP304LT( ) AP306LT( )	PTT23W PTT33W PTT43W	— PBTB306 PBTB306
3Ø4W	225 400 600	AP50210 AP50410 AP50610	AP5026 AP5046 AP5066	AP502LF( ) AP504LF( ) AP506LF( )	AP502LT( ) AP504LT( ) AP506LT( )	PTT24W PTT34W PTT44W	PTB502 PBTB506 PBTB506
3Ø3W + Integral Ground Bus	225 400 600	AP302G10 AP304G10 AP306G10	AP302G6 AP304G6 AP306G6	AP302GLF( ) AP304GLF( ) AP306GLF( )	AP302GLT( ) AP304GLT( ) AP306GLT( )	PTT23WG PTT33WG PTT43WG	PTB302G PBTB306G PBTB306G
3Ø4W + Integral Ground Bus	225 400 600	AP502G10 AP504G10 AP506G10	AP502G6 AP504G6 AP506G6	AP502GLF( ) AP504GLF( ) AP506GLF( )	AP502GLT( ) AP504GLT( ) AP506GLT( )	PTT24WG PTT34WG PTT44WG	PTB502G PBTB506G PBTB506G

Table 12.16: Standard Components—Copper

Copper

Number of Poles and Voltage	Rating (A)	G PH PH PH N 10'-0" Length	G PH PH PH N 6'-0" Length	G PH PH PH N Front Elbow *[1]*	G PH PH PH N Top Elbow *[1]*	G PH PH PH N Plug-In Tee	G PH PH PH N Plug-In Tap Box
		Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
3Ø3W	225 400 600	CP30210 CP30410 CP30610	— CP3046 CP3066	CP302LF( ) CP304LF( ) CP306LF( )	CP302LT( ) CP304LT( ) CP306LT( )	PTT23W PTT33W PTT33W	— PBTB306 PBTB306
3Ø4W	225 400 600	CP50210 CP50410 CP50610	— CP5046 CP5066	CP502LF( ) CP504LF( ) CP506LF( )	CP502LT( ) CP504LT( ) CP506LT( )	PTT24W PTT34W PTT34W	— PBTB506 PBTB506
3Ø3W + Integral Ground Bus	225 400 600	CP302G10 CP304G10 CP306G10	— CP304G6 CP306G6	CP302GLF( ) CP304GLF( ) CP306GLF( )	CP302GLT( ) CP304GLT( ) CP306GLT( )	PTT23WG PTT33WG PTT33WG	PTB302G PBTB306G PBTB306G
3Ø4W + Integral Ground Bus	225 400 600	CP502G10 CP504G10 CP506G10	— CP504G6 CP506G6	CP502GLF( ) CP504GLF( ) CP506GLF( )	CP502GLT( ) CP504GLT( ) CP506GLT( )	PTT24WG PTT34WG PTT34WG	PTB502G PBTB506G PBTB506G

Table 12.17: Common Accessories

Ampere Rating		Hanger *[2]*				End Closure	Wall Flange	Floor Flange
Aluminum	Copper	Flatwise	Vertical	Edgewise	Seismic	Catalog No.	Catalog No.	Catalog No.
225 400 — 600	225 400 600 —	HP2F HP3F HP3F HP5F	HP2V HP3V HP3V HP4V	HP3E HP3E HP3E HP5E	HP2SH HP3SH HP3SH HP5SH	ACP2EC ACP3EC ACP3EC ACP4EC	ACP2WF ACP3WF ACP3WF ACP4WF	ACP2FF ACP3FF ACP3FF ACP4FF

[25] See **5600CT9101** for fuse and circuit breaker series connected ratings.
[1] Add "I" for inside elbow; add "O" for outside elbow.
[2] For seismic applications, seismic hangers must be used with horizontal mount flatwise or edgewise busway. Vertical mount busway may use standard fixed or spring hangers.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

I-Line™ II Straight Lengths, Fittings, and Accessories

Table 12.18: Straight Lengths (10 ft.) and Plug-in Tap Box



Number of Poles	Ampere Rating	Aluminum		Both Aluminum and Copper	Copper	
		G PH PH PH N	G PH PH PH N	G PH PH PH N	G PH PH PH N	G PH PH PH N
						
		10'0" Length		Plug-In Tap Box[1][2]	10'0" Length	
		Feeder Style[3]	Plug-In Style[4]		Feeder Style[3]	Plug-In Style[4]
		Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
3Ø3W + Integral Ground Bus	800	AF2308G10ST	AP2308G10ST	PTB316G( )	CF2308G10ST	CP2308G10ST
	1000	AF2310G10ST	AP2310G10ST	PTB316G( )	CF2310G10ST	CP2310G10ST
	1200	AF2312G10ST	AP2312G10ST	PTB316G( )	CF2312G10ST	CP2312G10ST
	1350	—	—	PTB316G( )	—	—
	1600	AF2316G10ST	AP2316G10ST	PTB316G( )	CF2316G10ST	CP2316G10ST
	2000	AF2320G10ST	AP2320G10ST	—	CF2320G10ST	CP2320G10ST
	2500	AF2325G10ST	AP2325G10ST	—	—	—
	3000	AF2330G10ST	AP2330G10ST	—	—	CP2330G10ST
3Ø4W + Integral Ground Bus	800	AF2508G10ST	AP2508G10ST	PTB516G( )	CF2508G10ST	CP2508G10ST
	1000	AF2510G10ST	AP2510G10ST	PTB516G( )	CF2510G10ST	CP2510G10ST
	1200	AF2512G10ST	AP2512G10ST	PTB516G( )	CF2512G10ST	CP2512G10ST
	1350	—	—	PTB516G( )	—	—
	1600	AF2516G10ST	AP2516G10ST	PTB516G( )	CF2516G10ST	CP2516G10ST
	2000	AF2520G10ST	AP2520G10ST	—	CF2520G10ST	CP2520G10ST
	2500	AF2525G10ST	AP2525G10ST	—	—	—
	3000	AF2530G10ST	AP2530G10ST	—	—	CP2530G10ST

Table 12.19: Fittings (All Feeder Style)

Number of Poles	Ampere Rating	Aluminum			Copper		
							
		End Tap Box	Edgewise Elbow	Flatwise Elbow	End Tap Box	Edgewise Elbow	Flatters Elbow
		Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
3Ø3W with Integral Ground Bus	800	AF2308GETBMB	AF2308GLEM11	AF2308GLFM11	CF2308GETBMB	CF2308GLEM11	CF2308GLFM11
	1000	AF2310GETBMB	AF2310GLEM11	AF2310GLFM12	CF2310GETBMB	CF2310GLEM11	CF2310GLFM11
	1200	AF2312GETBMB	AF2312GLEM11	AF2312GLFM12	CF2312GETBMB	CF2312GLEM11	CF2312GLFM12
	1350	—	AF2313GLEM11	AF2313GLFM13	CF2313GETBMB	CF2313GLEM11	CF2313GLFM12
	1600	AF2316GETBMB	AF2316GLEM11	AF2316GLFM13	CF2316GETBMB	CF2316GLEM11	CF2316GLFM12
	2000	AF2320GETBMB	AF2320GLEM11	AF2320GLFM15	CF2320GETBMB	CF2320GLEM11	CF2320GLFM13
	2500	AF2325GETBMB	AF2325GLEM11	AF2325GLFM17	CF2325GETBMB	CF2325GLEM11	CF2325GLFM15
	3000	AF2330GETBMB	AF2330GLEM11	AF2330GLFM18	CF2330GETBMB	CF2330GLEM11	CF2330GLFM16
	3200	—	—	—	—	CF2332GLEM11	CF2332GLFM17
	4000	—	AF2340GLEM11	AF2340GLFM22	CF2340GETBMB	CF2340GLEM11	CF2340GLFM21
	5000	—	—	—	CF2350GETBMB	CF2350GLEM11	CF2350GLFM21
3Ø4W with Integral Ground Bus	800	AF2508GETBMB	AF2508GLEM11	AF2508GLFM11	CF2508GETBMB	CF2508GLEM11	CF2508GLFM11
	1000	AF2510GETBMB	AF2510GLEM11	AF2510GLFM12	CF2510GETBMB	CF2510GLEM11	CF2510GLFM11
	1200	AF2512GETBMB	AF2512GLEM11	AF2512GLFM12	CF2512GETBMB	CF2512GLEM11	CF2512GLFM12
	1350	—	AF2513GLEM11	AF2513GLFM13	CF2513GETBMB	CF2513GLEM11	CF2513GLFM12
	1600	AF2516GETBMB	AF2516GLEM11	AF2516GLFM13	CF2516GETBMB	CF2516GLEM11	CF2516GLFM12
	2000	AF2520GETBMB	AF2520GLEM11	AF2520GLFM15	CF2520GETBMB	CF2520GLEM11	CF2520GLFM13
	2500	AF2525GETBMB	AF2525GLEM11	AF2525GLFM17	CF2525GETBMB	CF2525GLEM11	CF2525GLFM15
	3000	AF2530GETBMB	AF2530GLEM11	AF2530GLFM18	CF2530GETBMB	CF2530GLEM11	CF2530GLFM16
	3200	—	—	—	—	CF2532GLEM11	CF2532GLFM17
	4000	AF2540GETBMB	AF2540GLEM11	AF2540GLFM22	CF2540GETBMB	CF2540GLEM11	CF2540GLFM21
	5000	—	—	—	CF2550GETBMB	CF2550GLEM11	CF2550GLFM21

[1] To complete the catalog number, replace the blank with an “H” for the plug-in unit to be mounted on horizontally—oriented busway and “V” for the plug-in unit to be mounted on vertically-oriented busway.
[2] Cannot be used for 800 A copper busway.
[3] Feeder style available in lengths from 16 to 120 inches.
[4] Plug-in style also available in 4, 6, and 8 foot lengths.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 12.20: Accessories

Ampere Rating		Hangers*[5]*					End Closure	Wall Flange
Al	Cu	Horizontal Mount Busway		Vertical Mount Busway		Seismic	Catalog No.	Catalog No.
		Flatwise	Edgewise	Fixed	Spring			
—	800	HF38F	HF43E	HFV	HFVS1	HF38SH	ACF38EC	ACF38WF
800	1000	HF43F	HF43E	HFV	HFVS1	HF43SH	ACF43EC	ACF43WF
1000	1200	HF53F	HF58E	HFV	HFVS1	HF53SH	ACF53EC	ACF53WF
—	1350	HF58F	HF58E	HFV	HFVS2	HF58SH	ACF58EC	ACF58WF
1200	—	HF63F	HF67E	HFV	HFVS1	HF63SH	ACF63EC	ACF63WF
—	1600	HF67F	HF67E	HFV	HFVS2	HF67SH	ACF67EC	ACF67WF
1350	—	HF73F	HF78E	HFV	HFVS1	HF73SH	ACF73EC	ACF73WF
—	2000	HF78F	HF78E	HFV	HFVS2	HF78SH	ACF78EC	ACF78WF
1600	—	HF88F	HF88E	HFV	HFVS1	HF88SH	ACF88EC	ACF88WF
2000	—	HF13F	HF13E	HFV	HFVS2	HF13SH	ACF13EC	ACF13WF
—	2500	HF13F	HF13E	HFV	HFVS8	HF13SH	ACF13EC	ACF13WF
2500	—	HF16F	HF16E	HFV	HFVS2	HF16SH	ACF17EC	ACF17WF
—	3000	HF15F	HF15E	HFV	HFVS8	HF15SH	ACF15EC	ACF15WF
—	3200	HF16F	HF16E	HFV	HFVS8	HF16SH	ACF17EC	ACF17WF
3000	—	HF19F	HF19E	HFV	HFVS8	HF19SH	ACF19EC	ACF19WF
4000	—	HF26F	HF26E	HFV	HFVS8	HF26SH	ACF26EC	ACF26WF
—	4000	HF24F	HF24E	HFV	HFVS8	HF24SH	ACF24EC	ACF24WF
—	5000	HF25F	HF26E	HFV	HFVS8	HF25SH	ACF25EC	ACF25WF

[5] For seismic applications, seismic hangers must be used with horizontal mount flatwise or edgewise busway. Vertical mount busway may use standard fixed or spring hangers.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Standard Straight Lengths

The basic component of a busway system is a straight section with a "joint pak" factory-affixed to one end. Plug-in busway is available in standard lengths of 4, 6, 8, and 10 feet. Feeder busway is available in lengths from 16" to 120" in increments of 1".

Riser Busway

We also offer a "Riser" Plug-In busway with openings on one side only for riser installations. This busway offers the same short circuit ratings as our standard plug-in busway.

Indoor Drip Resistant and IP54 Splash Resistant Busway

These water resistant features are available as an option for indoor plug-in and feeder busway.

Outdoor Construction

Outdoor construction is only available in feeder busway. It prevents the entry of rain and can be installed in any mounting position.

High Short Circuit Bracing

I-Line busway is available with either standard short circuit bracing or high short circuit bracing. Electrical Data for I-Line II Busway, page 12-12 lists maximum short circuit ratings for each busway type and rating.

Hangers

Indoor horizontal busway requires one hanger for every 10 feet of busway. Vertical indoor busway requires one hanger for every 16 feet. Outdoor feeder busway requires one hanger for every 5 feet in horizontal mounting and one hanger for every 10 feet in vertical mounting.

Elbows

90° elbows are standard. 91° elbows to 179° elbows in 1° increments are also available.

Tee

90° flatwise tees fittings are standard. Edgewise tees and crosses are also available.

Indoor Tap Boxes

Feeder cable tap boxes are used at the end (-ETBMB) or center (-CTB) of a busway run and incorporate a short section of busway into their construction. See **5600CT9101** for the length of the tap box.

Plug-in cable tap boxes are plugged into the side of the busway (at any opening except the very last opening of a run).

Lugs other than standard mechanical lugs are available.

Service Heads

Service heads are of outdoor construction and include Square D™ brand standard lugs.

Unfused Reducer

Unfused reducers are used to reduce from a higher amperage busway to a lower amperage.

NOTE: The National Electric Code does not allow the use of unfused reducers in vertical riser installations. Refer to the NEC for restrictions in industrial installations.

Fused or Circuit Breaker Cubicle

These are used as in-line overcurrent protection devices. They can be used in conjunction with an unfused reducer to offer a device which reduces a run of busway in ampacity and offers overcurrent protection.

I-Line to I-Line II Adapter

This adapter is used to join I-Line II busway (800 A–5000 A) to existing installations of original I-Line busway. If connecting to an existing "slot end" of original I-Line, use a "bolt end" adapter (-12B), and vice versa.

Expansion Fittings

The expansion fitting is built into a 3 ft. – 4 in. straight length for 800 A–5000 A and a 5 feet – 0 inch straight length for 225 A–600 A. Limit of expansion or contraction is ±1-1/2 inches. Not available in outdoor construction.

Bussed Transformer Connection

A bussed transformer connection is used when the busway physically attaches (other than cable) to a three phase transformer. For power company vault termination information, consult the factory.

Transformer Taps

Transformer taps are used to make cable connection to transformers. Lugs other than standard Square D brand lugs are available. Note that taps need **NOT** be located directly above transformers for cable connections.

Connection to Competitive Busway

Consult your nearest Schneider Electric sales office.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Electrical Data for I-Line II Busway

Standards:	UL857 (File Number E22182); CSA C22.2 No. 27-1994 (File Number LL-61778); IEC 61439–6
Systems:	AC–3Ø3W, 3Ø4W, 1Ø2W, 1Ø3W. DC–2-pole. All neutrals are 100% capacity.
Voltage:	600 volts AC/DC, 50 Hz and 60 Hz
Integral Ground:	50% capacity as standard for 800 A to 5000 A, as an option on 225 A to 600 A
Enclosure:	Indoor, indoor drip resistant, indoor splash resistant (IP54), and outdoor (indoor drip resistant, indoor splash resistant (IP54), and outdoor are available in I-Line II [800–5000 A] busway only)

Table 12.21: Short Circuit Ratings: UL 3 Cycle Test (KA, RMS Symmetrical) *[6]*

Ampere Rating	Aluminum				Copper			
	AOF2 AF2	AOFH AFH2	AP AP2/AR2	APH APH2/ ARH2	COF2 CF2	COFH CFH2	CP CP2/CR2	CPH CPH2/ CRH2
225	—	—	22	—	—	—	22	—
400	—	—	22	42	—	—	22	42
600	—	—	22	42	—	—	22	42
800	50	85	50	75	50	85	50	75
1000	50	100	50	100	50	85	50	75
1200	50	100	50	100	50	100	50	100
1350	50	100	50	100	50	100	50	100
1600	50	100	50	100	50	100	50	100
2000	100	150	125	150	50	100	65	100
2500	100	150	125	150	100	150	125	150
3000	100	150	125	150	100	150	125	150
3200	—	—	—	—	100	150	125	150
4000	150	200	200	200	150	200	200	200
5000	—	—	—	—	150	200	200	200

Fusible Plug-In Units, Class R Fuse Kits, and Hooksticks


Table 12.22: Fusible Plug-In Units *[7]*

Ampere Rating	Type of Connection	240 Vac 3-Pole, 3 Fuse + G	120/208 Vac, (240 Vac Max.) 4-Pole, 3 Fuse + G	600 Vac 3-Pole, 3 Fuse + G	277/480 Vac, (600 Vac Max.) 4-Pole, 3 Fuse + G
		Catalog No.	Catalog No.	Catalog No.	Catalog No.
30	Plug-in	PQ3203G	PQ4203G	PQ3603G	PQ4603G
60		PQ3206G	PQ4206G	PQ3606G	PQ4606G
100		PQ3210G	PQ4210G	PQ3610G	PQ4610G
200		PQ3220G	PQ4220G	PQ3620G	PQ4620G
200 *[8]*		PS3220G *[8]*	PS4220G *[8]*	PS3620G *[8]*	PS4620G *[8]*
400		PBQ3640G *[9]*	PBQ4640G *[9]*	PBQ3640G *[9]*	PBQ4640G *[9]*
600		PBQ3660G *[9]*	PBQ4660G *[9]*	PBQ3660G *[9]*	PBQ4660G *[9]*
800	Bolt-on	—	—	PTQ36080G( ) *[10]*	PTQ46080G() *[10]*
1000		—	—	PTQ36100G( ) *[10]*	PTQ46100G( ) *[10]*
1200		—	—	PTQ36120G( ) *[10]*	PTQ46120G( ) *[10]*

Class J Fuses – Provisions for installing Class J fuses are included in 30 through 600 A fusible devices. Conversion to Class J fuse spacing requires relocating the load side fuse base assembly from standard Class H fuse location to an alternate position in the enclosure.



"Hook-Swing" Mounting

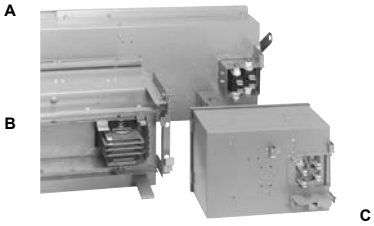

A–High Ampere Plug-In Connection
B – High Ampere Bolt-On Connection
C – Low Ampere Plug-In Connection

There are three different types of plug-in connections:

- High Ampere Bolt-On Connection (catalog numbers that begin with "PT")—bolted "joint pack" type connection
  - Used on I-Line™/I-Line II busway amperages 800 A aluminum and greater.
  - Used on I-Line™/I-Line II busway amperages 1000 A copper and greater.
- High Ampere Plug-In Connection (catalog numbers that begin with "PB")—individual bolted jaws for connections
- Low Ampere Plug-In Connection (catalog numbers that begin with "P," except for "PB" and "PT")—spring pressure jaws for connection

Table 12.23: Class R Fuse Kits *[11]*

Switch Size (A)	Voltage Rating	Kit *[11]* Catalog No.
30	250 V *[12]* 600 V *[12]*	QMB30R QMB36R
60	250 V *[12]* 600 V *[12]*	QMB36R QMB60R
100 200	All	HRK1020
400 600	All	QMB4060R

Class R Fuse Kits when installed reject all but class R fuses.

[6] 6–cycle and 30–cycle, and fuse/circuit breaker series connected ratings are available. Please reference **5600CT9101**.
[7] For IP54 splash resistant construction, add an "M54" suffix.
[8] For use on vertical riser applications only.
[9] For vertical riser applications, order auxiliary mounting kit—Catalog Number PBQ4060RMK.
[10] This device uses bolt-on connection. It may be used only on plug-in busway with same number of poles. To complete the catalog number, replace the blank with an "H" for the plug-in unit to be mounted on horizontally—oriented busway and "V" for the plug-in unit to be mounted on vertically-oriented busway. Not for use on 800 A copper busway.
[11] Kit must be field installed.
[12] Contains parts to convert two units.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 12.24: Hooksticks

Length	Catalog No.
8'	515608
14'	515614

Surge Protective Device Plug-In Units

All Busway SPD Plug-In Units include as standard:

- Individually Fused Modules
- Circuit Breaker Disconnect
- Cover Mounted Diagnostic Panel
- EMI/RFI Filter
- Audible Alarm with Test/Disable/Enable

Table 12.25: Surge Capacity

System Voltage	160,000 Amperes Per Phase	240,000 Amperes Per Phase
	Catalog Number*[13]*	Catalog Number*[13]*
208Y/120 Vac, 3Ø4W/Grd.	PIU2IMA16	PIU2IMA24
240Y/120 Vac, 3Ø4W/Grd.	PIU3IMA16	PIU3IMA24
480Y/277 Vac, 3Ø4W/Grd.	PIU4IMA16	PIU4IMA24
600Y/347 Vac, 3Ø4W/Grd.	PIU8IMA16	PIU8IMA24

Table 12.26: Options

Description	When Required Add Suffix to Catalog Number
Surge Counter and Dry Contacts	—
Remote Monitor with Dry Contacts	M

[13] For IP54 splash resistant construction, add an "M54" suffix.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

H- and J-Frame Plug-In Units

Table 12.27: H-Frame Circuit Breaker Plug-in Units—Standard (80%) Rated—3Ø3W

Trip Rating Ampere	D Interrupting Catalog No. *[14]*	G Interrupting Catalog No. *[14]*	J Interrupting Catalog No. *[14]*	L Interrupting Catalog No. *[14]*
3Ø3W + G, 600 Vac 50/60 Hz				
15	PHD36015G	PHG36015G	PHJ36015G	PHL36015G
20	PHD36020G	PHG36020G	PHJ36020G	PHL36020G
30	PHD36030G	PHG36030G	PHJ36030G	PHL36030G
40	PHD36040G	PHG36040G	PHJ36040G	PHL36040G
50	PHD36050G	PHG36050G	PHJ36050G	PHL36050G
60	PHD36060G	PHG36060G	PHJ36060G	PHL36060G
70	PHD36070G	PHG36070G	PHJ36070G	PHL36070G
80	PHD36080G	PHG36080G	PHJ36080G	PHL36080G
90	PHD36090G	PHG36090G	PHJ36090G	PHL36090G
100	PHD36100G	PHG36100G	PHJ36100G	PHL36100G
125	PHD36125G	PHG36125G	PHJ36125G	PHL36125G
150	PHD36150G	PHG36150G	PHJ36150G	PHL36150G

Table 12.28: H-Frame Circuit Breaker Plug-in Units—Standard (80%) Rated—3Ø4W

Trip Rating Ampere	D Interrupting Catalog No. *[14]*	G Interrupting Catalog No. *[14]*	J Interrupting Catalog No. *[14]*	L Interrupting Catalog No. *[14]*
3Ø4W + G, 600 Vac Max. 50/60 Hz				
15	PHD36015GN	PHG36015GN	PHJ36015GN	PHL36015GN
20	PHD36020GN	PHG36020GN	PHJ36020GN	PHL36020GN
30	PHD36030GN	PHG36030GN	PHJ36030GN	PHL36030GN
40	PHD36040GN	PHG36040GN	PHJ36040GN	PHL36040GN
50	PHD36050GN	PHG36050GN	PHJ36050GN	PHL36050GN
60	PHD36060GN	PHG36060GN	PHJ36060GN	PHL36060GN
70	PHD36070GN	PHG36070GN	PHJ36070GN	PHL36070GN
80	PHD36080GN	PHG36080GN	PHJ36080GN	PHL36080GN
90	PHD36090GN	PHG36090GN	PHJ36090GN	PHL36090GN
100	PHD36100GN	PHG36100GN	PHJ36100GN	PHL36100GN
125	PHD36125GN	PHG36125GN	PHJ36125GN	PHL36125GN
150	PHD36150GN	PHG36150GN	PHJ36150GN	PHL36150GN

Table 12.29: J-Frame Circuit Breaker Plug-in Units—Standard (80%) Rated—3Ø3W

Trip Rating Ampere	D Interrupting Catalog No. *[14]*	G Interrupting Catalog No. *[14]*	J Interrupting Catalog No. *[14]*	L Interrupting Catalog No. *[14]*
3Ø3W + G, 600 Vac 50/60 Hz				
175	PJD36175G	PJG36175G	PJJ36175G	PJL36175G
200	PJD36200G	PJG36200G	PJJ36200G	PJL36200G
225	PJD36225G	PJG36225G	PJJ36225G	PJL36225G
250	PJD36250G	PJG36250G	PJJ36250G	PJL36250G

Table 12.30: J-Frame Circuit Breaker Plug-in Units—Standard (80%) Rated—3Ø4W

Trip Rating Ampere	D Interrupting Catalog No. *[14]*	G Interrupting Catalog No. *[14]*	J Interrupting Catalog No. *[14]*	L Interrupting Catalog No. *[14]*
3Ø4W + G, 600 Vac Max. 50/60 Hz				
175	PJD36175GN	PJG36175GN	PJJ36175GN	PJL36175GN
200	PJD36200GN	PJG36200GN	PJJ36200GN	PJL36200GN
225	PJD36225GN	PJG36225GN	PJJ36225GN	PJL36225GN
250	PJD36250GN	PJG36250GN	PJJ36250GN	PJL36250GN

Table 12.31: Circuit Breaker Interrupting Ratings

Interrupting Ratings (kA)	D	G	J	L	R
240 V	25	65	100	125	200
480 V	18	35	65	100	200
600 V	14	18	25	50	100

[14] For IP54 splash resistant construction, add an "M54" suffix.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

H-, J-, and L-Frame Plug-In Units with Electronic Trip

Table 12.32: H- and J-Frame Circuit Breaker Plug-in Units with Electronic Trip—Standard (80%) Rated—3Ø3W

Trip Rating Ampere	Trip Function[15]	Trip Unit [16]	D Interrupting Catalog Number[17][18][19]	G Interrupting Catalog Number[17][18][19]	J Interrupting Catalog Number[20][18][19]	L Interrupting Catalog Number[20][18][19]
MicroLogic Standard Trip Unit						
3Ø3W + G, 600 Vac 50/60 Hz						
60	LI	3.2	PHD36060GU31X	PHG36060GU31X	PHJ36060GU31X	PHL36060GU31X
100			PHD36100GU31X	PHG36100GU31X	PHJ36100GU31X	PHL36100GU31X
150			PHD36150GU31X	PHG36150GU31X	PHJ36150GU31X	PHL36150GU31X
250			PJD36250GU31X	PJG36250GU31X	PJJ36250GU31X	PJL36250GU31X
60	LSI	3.2 S	PHD36060GU33X	PHG36060GU33X	PHJ36060GU33X	PHL36060GU33X
100			PHD36100GU33X	PHG36100GU33X	PHJ36100GU33X	PHL36100GU33X
150			PHD36150GU33X	PHG36150GU33X	PHJ36150GU33X	PHL36150GU33X
250			PJD36250GU33X	PJG36250GU33X	PJJ36250GU33X	PJL36250GU33X
MicroLogic Ammeter Trip Unit						
3Ø3W + G, 600 Vac 50/60 Hz						
60	LSI	5.2 A	PHD36060GU43X	PHG36060GU43X	PHJ36060GU43X	PHL36060GU43X
100			PHD36100GU43X	PHG36100GU43X	PHJ36100GU43X	PHL36100GU43X
150			PHD36150GU43X	PHG36150GU43X	PHJ36150GU43X	PHL36150GU43X
250			PJD36250GU43X	PJG36250GU43X	PJJ36250GU43X	PJL36250GU43X
MicroLogic Energymeter Trip Unit						
3Ø3W + G, 600 Vac 50/60 Hz						
60	LSI	5.2 E	PHD36060GU53X	PHG36060GU53X	PHJ36060GU53X	PHL36060GU53X
100			PHD36100GU53X	PHG36100GU53X	PHJ36100GU53X	PHL36100GU53X
150			PHD36150GU53X	PHG36150GU53X	PHJ36150GU53X	PHL36150GU53X
250			PJD36250GU53X	PJG36250GU53X	PJJ36250GU53X	PJL36250GU53X

Table 12.33: H- and J-Frame Circuit Breaker Plug-in Units with Electronic Trip—Standard (80%) Rated—3Ø4W

Trip Rating Ampere	Trip Function [15]	Trip Unit [16]	D Interrupting Catalog Number[20][18][19]	G Interrupting Catalog Number[20][18][19]	J Interrupting Catalog Number[20][18][19]	L Interrupting Catalog Number[20][18][19]
MicroLogic Standard Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
60	LI	3.2	PHD36060GNU31X	PHG36060GNU31X	PHJ36060GNU31X	PHL36060GNU31X
100			PHD36100GNU31X	PHG36100GNU31X	PHJ36100GNU31X	PHL36100GNU31X
150			PHD36150GNU31X	PHG36150GNU31X	PHJ36150GNU31X	PHL36150GNU31X
250			PJD36250GNU31X	PJG36250GNU31X	PJJ36250GNU31X	PJL36250GNU31X
60	LSI	3.2 S	PHD36060GNU33X	PHG36060GNU33X	PHJ36060GNU33X	PHL36060GNU33X
100			PHD36100GNU33X	PHG36100GNU33X	PHJ36100GNU33X	PHL36100GNU33X
150			PHD36150GNU33X	PHG36150GNU33X	PHJ36150GNU33X	PHL36150GNU33X
250			PJD36250GNU33X	PJG36250GNU33X	PJJ36250GNU33X	PJL36250GNU33X
MicroLogic Ammeter Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
60	LSI	5.2 A	PHD36060GNU43X	PHG36060GNU43X	PHJ36060GNU43X	PHL36060GNU43X
100			PHD36100GNU43X	PHG36100GNU43X	PHJ36100GNU43X	PHL36100GNU43X
150			PHD36150GNU43X	PHG36150GNU43X	PHJ36150GNU43X	PHL36150GNU43X
250			PJD36250GNU43X	PJG36250GNU43X	PJJ36250GNU43X	PJL36250GNU43X
60	LSIG	6.2 A	PHD36060GNU44X	PHG36060GNU44X	PHJ36060GNU44X	PHL36060GNU44X
100			PHD36100GNU44X	PHG36100GNU44X	PHJ36100GNU44X	PHL36100GNU44X
150			PHD36150GNU44X	PHG36150GNU44X	PHJ36150GNU44X	PHL36150GNU44X
250			PJD36250GNU44X	PJG36250GNU44X	PJJ36250GNU44X	PJL36250GNU44X
MicroLogic Energymeter Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
100	LSI	5.2 E	—	—	—	PHL36100GNU53X
250			PJD36250GNU53X	—	PJJ36250GNU53X	—

[15] If alternate trip functions are required, contact your local Schneider Electric field office for pricing.
[16] For Trip Unit information, refer to Digest Section 7, MicroLogic Trip Units.
[17] For communication capabilities, add the communication suffix as shown in Table 12.36 Communication Suffix, page 12-17. The communication package will be configured based on the system voltage specified by the communication suffix.
[18] For availability on 100% rated, see **5600CT9101**.
[19] For IP54 splash resistant construction, add an "M54" suffix.
[20] For communication capabilities, add the communication suffix as shown in Table 12.36 Communication Suffix, page 12-17. The communication package will be configured based on the system voltage specified by the communication suffix.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 12.34: L-Frame Circuit Breaker Plug-in Units with Electronic Trip—Standard (80%) Rated—3Ø3W

Trip Rating Ampere	Trip Function *[21][22]*	Trip Unit*[23]*	G Interrupting Catalog Number*[24][25][26][27]*	J Interrupting Catalog Number*[24][25][26][27]*	L Interrupting Catalog Number*[24][25][26][27]*	R Interrupting Catalog Number*[24][25][26][27]*
Basic Electronic Trip Unit						
3Ø3W + G, 600 Vac 50/60 Hz						
250	LI	1.0	PBLG36250G	—	—	—
MicroLogic Standard Trip Unit						
3Ø3W + G, 600 Vac 50/60 Hz						
250	LI	3.3	—	—	—	PBLR36250GU31X
250	LSI	3.3 S	PBLG36250GU33X	PBLJ36250GU33X	PBLL36250GU33X	—
MicroLogic Energymeter Trip Unit						
3Ø3W + G, 600 Vac 50/60 Hz						
400	LSI	5.3 E	PBLG36400GU53X	PBLJ36400GU53X	PBLL36400GU53X	PBLR36400GU53X
600			PBLG36600GU53X	PBLJ36600GU53X	PBLL36600GU53X	PBLR36600GU53X

Table 12.35: L-Frame Circuit Breaker Plug-in Units with Electronic Trip—Standard (80%) Rated—3Ø4W

Trip Rating Ampere	Trip Function *[21][22]*	Trip Unit*[23]*	G Interrupting Catalog Number*[24][25][26][27]*	J Interrupting Catalog Number*[24][25][26][27]*	L Interrupting Catalog Number*[24][25][26][27]*	R Interrupting Catalog Number*[24][25][26][27]*
Basic Electronic Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
250	LI	1.0	PBLG36250GN	—	—	—
400			—	PBLJ36400GN	—	—
MicroLogic Standard Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
250	LI	3.3	—	PBLJ36250GNU31X	PBLL36250GNU31X	PBLR36250GNU31X
400			PBLG36400GNU31X	—	—	PBLR36400GNU31X
600			—	—	—	PBLR36600GNU31X
250	LSI	3.3 S	PBLG36250GNU33X	PBLJ36250GNU33X	PBLL36250GNU33X	PBLR36250GNU33X
400			—	—	—	PBLR36400GNU33X
600			—	—	—	PBLR36600GNU33X
MicroLogic Ammeter Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
400	LSI	5.3 A	—	—	—	PBLR36400GNU43X
600			—	—	—	PBLR36600GNU43X
400	LSIG	6.3 A	—	—	—	PBLR36400GNU44X
600			—	—	—	PBLR36600GNU44X
MicroLogic Energymeter Trip Unit						
3Ø4W + G, 600 Vac 50/60 Hz						
400	LSI	5.3 E	PBLG36400GNU53X	PBLJ36400GNU53X	PBLL36400GNU53X	PBLR36400GNU53X
600			PBLG36600GNU53X	PBLJ36600GNU53X	PBLL36600GNU53X	PBLR36600GNU53X
400	LSIG	6.3 E	PBLG36400GNU54X	PBLJ36400GNU54X	PBLL36400GNU54X	PBLR36400GNU54X
600			PBLG36600GNU54X	PBLJ36600GNU54X	PBLL36600GNU54X	PBLR36600GNU54X

[21] If alternate trip functions are required, contact your local Schneider Electric field office for pricing.
[22] L-frame circuit breaker plug-in units with basic electronic trip units have a fixed, long-time and adjustable, instantaneous setting.
[23] For Trip Unit information, refer to Digest Section 7, MicroLogic Trip Units.
[24] For communication capabilities, add the communication suffix as shown in Table 12.36 Communication Suffix, page 12-17. The communication package will be configured based on the system voltage specified by the communication suffix.
[25] For availability on 100% rated, see **5600CT9101**.
[26] For IP54 splash resistant construction, add an "M54" suffix.
[27] For vertical riser applications, order auxiliary mounting kit—Catalog Number PBQ4060RMK.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

H- , J-, and L-Frame Plug-In Units with Electronic Trip and Communication

Hardware communication packages are now available on PowerPacT™ H-, J-, and L-Frame Plug-in Units with Electronic Trip. These hardware communication packages will provide you the capability to access and monitor circuit breaker data from these plug-in units. The packages are available in Modbus™ and Ethernet.

Add the appropriate communication system voltage suffix to the end of the associated H-, J-, or L-Frame breaker with electronic trip, for example: PHD36060GNU31X**IFE4**.

Table 12.36: Communication Suffix*[28]*

System Voltage	Communication	Communication Type Suffix	System Voltage Suffix
Up to 480Y/277 V	Ethernet	IFE	4
	Modbus	IFM	
480 V only	Ethernet	IFE	5
	Modbus	IFM	
600Y/347 V, 600 V	Ethernet	IFE	6
	Modbus	IFM	

M-Frame Plug-In Units

Table 12.37: M-Frame Circuit Breaker Plug-in Units with Adjustable Basic Electronic Trip Unit (ET 1.0)*[29][30][31]*

Frame Rating Ampere	System	G Interrupting Catalog Number*[32]*	J Interrupting Catalog Number*[32]*
800	3Ø3W + G	PTMG36800G( )	PTMJ36800G( )
	3Ø4W + G	PTMG36800GN( )	PTMJ36800GN( )

[28] Communication packages are housed in a separate enclosure mounted adjacent to the plug-in units.
[29] The ET 1.0 trip unit cannot be field replaced or have the long-time trip point setting adjusted.
[30] All these devices use bolt-on connection. It may be used only on busway with same number of poles. Not for use on 800 A copper busway. To complete the catalog number, replace the blank with an “H” for horizontal applications and “V” for vertical applications.
[31] All M-frame plug-in units are 800 A frame, and the trip setting can be adjusted to 300 A, 350 A, 400 A, 450 A, 500 A, 600 A, 700 A, or 800 A.
[32] For IP54 splash resistant construction, add an "M54" suffix.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

P-Frame Plug-In Units

Table 12.38: P-Frame Circuit Breaker Plug-in Units—3Ø3W*[33]*

Trip Rating Ampere	Trip Function*[34]*	Trip Unit*[35]*	Interrupting Rating	
			G	J
			Catalog Number*[36][37][38][39]*	Catalog Number*[36][37][38][39]*
MicroLogic Standard Trip Unit				
3Ø3W + G, 600 Vac 50/60 Hz				
400	LI	3.0	PTPG36040G( )U31A	PTPJ36040G( )U31A
600			PTPG36060G( )U31A	PTPJ36060G( )U31A
800			PTPG36080G( )U31A	PTPJ36080G( )U31A
1000			PTPG36100G( )U31A	PTPJ36100G( )U31A
1200			PTPG36120G( )U31A	PTPJ36120G( )U31A
400	LSI	5.0	PTPG36040G( )U33A	PTPJ36040G( )U33A
600			PTPG36060G( )U33A	PTPJ36060G( )U33A
800			PTPG36080G( )U33A	PTPJ36080G( )U33A
1000			PTPG36100G( )U33A	PTPJ36100G( )U33A
1200			PTPG36120G( )U33A	PTPJ36120G( )U33A
MicroLogic Ammeter Trip Unit				
3Ø3W + G, 600 Vac 50/60 Hz				
400	LI	3.0 A	PTPG36040G( )U41A	PTPJ36040G( )U41A
600			PTPG36060G( )U41A	PTPJ36060G( )U41A
800			PTPG36080G( )U41A	PTPJ36080G( )U41A
1000			PTPG36100G( )U41A	PTPJ36100G( )U41A
1200			PTPG36120G( )U41A	PTPJ36120G( )U41A
400	LSI	5.0 A	PTPG36040G( )U43A	PTPJ36040G( )U43A
600			PTPG36060G( )U43A	PTPJ36060G( )U43A
800			PTPG36080G( )U43A	PTPJ36080G( )U43A
1000			PTPG36100G( )U43A	PTPJ36100G( )U43A
1200			PTPG36120G( )U43A	PTPJ36120G( )U43A
400	LSIG	6.0 A	PTPG36040G( )U44A	PTPJ36040G( )U44A
600			PTPG36060G( )U44A	PTPJ36060G( )U44A
800			PTPG36080G( )U44A	PTPJ36080G( )U44A
1000			PTPG36100G( )U44A	PTPJ36100G( )U44A
1200			PTPG36120G( )U44A	PTPJ36120G( )U44A

Table 12.39: P-Frame Circuit Breaker Plug-in Units—3Ø4W

Trip Rating Ampere	Trip Function	Trip Unit	Interrupting Rating	
			G	J
			Catalog Number*[36][37][38]*	Catalog Number*[36][37] [38]*
MicroLogic Standard Trip Unit				
3Ø4W + G, 600 Vac 50/60 Hz				
400	LI	3.0	PTPG36040GN( )U31A	PTPJ36040GN( )U31A
600			PTPG36060GN( )U31A	PTPJ36060GN( )U31A
800			PTPG36080GN( )U31A	PTPJ36080GN( )U31A
1000			PTPG36100GN( )U31A	PTPJ36100GN( )U31A
1200			PTPG36120GN( )U31A	PTPJ36120GN( )U31A
400	LSI	5.0	PTPG36040GN( )U33A	PTPJ36040GN( )U33A
600			PTPG36060GN( )U33A	PTPJ36060GN( )U33A
800			PTPG36080GN( )U33A	PTPJ36080GN( )U33A
1000			PTPG36100GN( )U33A	PTPJ36100GN( )U33A
1200			PTPG36120GN( )U33A	PTPJ36120GN( )U33A
MicroLogic Ammeter Trip Unit				
3Ø4W + G, 600 Vac 50/60 Hz				
400	LI	3.0 A	PTPG36040GN( )U41A	PTPJ36040GN( )U41A
600			PTPG36060GN( )U41A	PTPJ36060GN( )U41A
800			PTPG36080GN( )U41A	PTPJ36080GN( )U41A
1000			PTPG36100GN( )U41A	PTPJ36100GN( )U41A
1200			PTPG36120GN( )U41A	PTPJ36120GN( )U41A
400	LSI	5.0 A	PTPG36040GN( )U43A	PTPJ36040GN( )U43A
600			PTPG36060GN( )U43A	PTPJ36060GN( )U43A
800			PTPG36080GN( )U43A	PTPJ36080GN( )U43A
1000			PTPG36100GN( )U43A	PTPJ36100GN( )U43A
1200			PTPG36120GN( )U43A	PTPJ36120GN( )U43A
400	LSIG	6.0 A	PTPG36040GN( )U44A	PTPJ36040GN( )U44A
600			PTPG36060GN( )U44A	PTPJ36060GN( )U44A
800			PTPG36080GN( )U44A	PTPJ36080GN( )U44A
1000			PTPG36100GN( )U44A	PTPJ36100GN( )U44A
1200			PTPG36120GN( )U44A	PTPJ36120GN( )U44A

[33] The 250 A is available as a special device. Contact your local Schneider Electric field office for ordering information.
[34] If alternate trip functions are required, contact your local Schneider Electric field office for pricing.
[35] For Trip Unit information, refer to Digest Section 7, MicroLogic Trip Units.
[36] Listed catalog numbers are for 80% rated circuit breakers. For 100% rated circuit breakers, replace the blank with an “HC” for horizontal applications and “VC” for vertical applications. For example, the catalog number for a 100% standard trip unit with standard LI trip functions at 800 A 3Ø3W for a horizontal application would be PTPG36080GHCU31A.
[37] The standard rating plug supplied with a trip unit will be the "A" rating plug. To specify an alternative rating plug, replace the "A" at the end of the catalog number with the applicable suffix letter. See Digest Section 7, Rating Plugs, for rating plug catalog suffix letters.
[38] All these devices use bolt-on connection. It may be used only on busway with same number of poles. Not for use on 800 A copper busway. To complete the catalog number, replace the blank with an “H” for horizontal applications and “V” for vertical applications.
[39] For IP54 splash resistant construction, add an "M54" suffix.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

R-Frame Plug-In Units

Table 12.40: R-Frame Circuit Breaker Plug-in Units—3Ø3W*[40]*

Trip Rating Ampere	Trip Function	Trip Unit	Interrupting Rating		
			G	J	L
			Catalog Number*[41][42][43][44]*	Catalog Number*[41][42][43][44]*	Catalog Number*[41][42][43][44]*
MicroLogic Standard Trip Unit					
3Ø3W + G, 600 Vac 50/60 Hz					
800	LI	3.0	PTRG36080G( )U31A	PTRJ36080G( )U31A	PTRL36080G( )U31A
1000			PTRG36100G( )U31A	PTRJ36100G( )U31A	PTRL36100G( )U31A
1200			PTRG36120G( )U31A	PTRJ36120G( )U31A	PTRL36120G( )U31A
1600			PTRG36160G( )U31A	PTRJ36160G( )U31A	PTRL36160G( )U31A
800	LSI	5.0	PTRG36080G( )U33A	PTRJ36080G( )U33A	PTRL36080G( )U33A
1000			PTRG36100G( )U33A	PTRJ36100G( )U33A	PTRL36100G( )U33A
1200			PTRG36120G( )U33A	PTRJ36120G( )U33A	PTRL36120G( )U33A
1600			PTRG36160G( )U33A	PTRJ36160G( )U33A	PTRL36160G( )U33A
MicroLogic Ammeter Trip Unit					
3Ø3W + G, 600 Vac 50/60 Hz					
800	LI	3.0 A	PTRG36080G( )U41A	PTRJ36080G( )U41A	PTRL36080G( )U41A
1000			PTRG36100G( )U41A	PTRJ36100G( )U41A	PTRL36100G( )U41A
1200			PTRG36120G( )U41A	PTRJ36120G( )U41A	PTRL36120G( )U41A
1600			PTRG36160G( )U41A	PTRJ36160G( )U41A	PTRL36160G( )U41A
800	LSI	5.0 A	PTRG36080G( )U43A	PTRJ36080G( )U43A	PTRL36080G( )U43A
1000			PTRG36100G( )U43A	PTRJ36100G( )U43A	PTRL36100G( )U43A
1200			PTRG36120G( )U43A	PTRJ36120G( )U43A	PTRL36120G( )U43A
1600			PTRG36160G( )U43A	PTRJ36160G( )U43A	PTRL36160G( )U43A
800	LSIG	6.0 A	PTRG36080G( )U44A	PTRJ36080G( )U44A	PTRL36080G( )U44A
1000			PTRG36100G( )U44A	PTRJ36100G( )U44A	PTRL36100G( )U44A
1200			PTRG36120G( )U44A	PTRJ36120G( )U44A	PTRL36120G( )U44A
1600			PTRG36160G( )U44A	PTRJ36160G( )U44A	PTRL36160G( )U44A

Table 12.41: R-Frame Circuit Breaker Plug-in Units—3Ø4W*[40]*

Trip Rating Ampere	Trip Function	Trip Unit	Interrupting Rating		
			G	J	L
			Catalog Number*[41][42][43][44]*	Catalog Number*[41][42][43][44]*	Catalog Number*[41][42][43][44]*
MicroLogic Standard Trip Unit					
3Ø4W + G, 277/480 Vac (600 Vac Max.) 50/60 Hz					
800	LI	3.0	PTRG36080GN( )U31A	PTRJ36080GN( )U31A	PTRL36080GN( )U31A
1000			PTRG36100GN( )U31A	PTRJ36100GN( )U31A	PTRL36100GN( )U31A
1200			PTRG36120GN( )U31A	PTRJ36120GN( )U31A	PTRL36120GN( )U31A
1600			PTRG36160GN( )U31A	PTRJ36160GN( )U31A	PTRL36160GN( )U31A
800	LSI	5.0	PTRG36080GN( )U33A	PTRJ36080GN( )U33A	PTRL36080GN( )U33A
1000			PTRG36100GN( )U33A	PTRJ36100GN( )U33A	PTRL36100GN( )U33A
1200			PTRG36120GN( )U33A	PTRJ36120GN( )U33A	PTRL36120GN( )U33A
1600			PTRG36160GN( )U33A	PTRJ36160GN( )U33A	PTRL36160GN( )U33A
MicroLogic Ammeter Trip Unit					
3Ø4W + G, 277/480 Vac (600 Vac Max.) 50/60 Hz					
800	LI	3.0 A	PTRG36080GN( )U41A	PTRJ36080GN( )U41A	PTRL36080GN( )U41A
1000			PTRG36100GN( )U41A	PTRJ36100GN( )U41A	PTRL36100GN( )U41A
1200			PTRG36120GN( )U41A	PTRJ36120GN( )U41A	PTRL36120GN( )U41A
1600			PTRG36160GN( )U41A	PTRJ36160GN( )U41A	PTRL36160GN( )U41A
800	LSI	5.0 A	PTRG36080GN( )U43A	PTRJ36080GN( )U43A	PTRL36080GN( )U43A
1000			PTRG36100GN( )U43A	PTRJ36100GN( )U43A	PTRL36100GN( )U43A
1200			PTRG36120GN( )U43A	PTRJ36120GN( )U43A	PTRL36120GN( )U43A
1600			PTRG36160GN( )U43A	PTRJ36160GN( )U43A	PTRL36160GN( )U43A
800	LSIG	6.0 A	PTRG36080GN( )U44A	PTRJ36080GN( )U44A	PTRL36080GN( )U44A
1000			PTRG36100GN( )U44A	PTRJ36100GN( )U44A	PTRL36100GN( )U44A
1200			PTRG36120GN( )U44A	PTRJ36120GN( )U44A	PTRL36120GN( )U44A
1600			PTRG36160GN( )U44A	PTRJ36160GN( )U44A	PTRL36160GN( )U44A

[40] The 600 A is available as a special device. Contact your local Schneider Electric field office for ordering information.
[41] Listed catalog numbers are for 80% rated circuit breakers. For 100% rated circuit breakers, replace the blank with an “HC” for horizontal applications and “VC” for vertical applications. For example, the catalog number for a 100% standard trip unit with standard LI trip functions at 800 A 3Ø3W for a horizontal application would be PTPG36080GHCU31A.
[42] The standard rating plug supplied with a trip unit will be the "A" rating plug. To specify an alternative rating plug, replace the "A" at the end of the catalog number with the applicable suffix letter. See Digest Section 7, Rating Plugs, for rating plug catalog suffix letters.
[43] All these devices use bolt-on connection. It may be used only on busway with same number of poles. Not for use on 800 A copper busway. To complete the catalog number, replace the blank with an “H” for horizontal applications and “V” for vertical applications.
[44] For IP54 splash resistant construction, add an "M54" suffix.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Non-Segregated Bus

- Non-segregated phase bus
- 600 V through 38 kV (1200 A–6000 A)
- Aluminum, steel or stainless steel housing
- Aluminum or copper bus bars
- Insulated with fluidized bed epoxy (5 kV–38 kV)
- Complete line of fittings provides for any configuration
- Indoor trapeze and outdoor column supports
- For use in utilities, industrial and commercial facilities



PowerZone™ bus is custom designed, manufactured and tested per ANSI C37.23 standards to meet customer specifications. The 600 V product is also UL Listed. It is a completely coordinated package of equipment with all the auxiliary material and supports for connecting transformers, switchgear, MCCs, and motors, in all types of utility, industrial, and commercial facilities.

Bus Options

Some available options are special momentary rating, special housing material and/or finish, special conductor supports, heaters and thermostats, and ground bus.

Weatherproof Bus

All weatherproof runs must be equipped with strip heaters to eliminate condensation and, if applicable, a thermostat. A heater should be used for every seven (7) foot of bus and no more than 20 heaters can be controlled by one thermostat. Also, each bus run should have its own thermostat. The heaters are rated 240 V, 500 watts and operate at 120 V, 125 watts.

Flanged Ends

A flanged end is used to terminate the bus into switchgear, motor control centers, switchboards, or any rigid bus-to-bus connection. It consists of a gasketed equipment flange, up to 1'-0" of 3Ø3W conductor (3Ø4W as applicable), necessary insulation tapes, and required bolting hardware.

Cable Tap Box

A cable tap box includes a gasketed and accessible termination box, lugs, necessary insulation tape (between bus and lugs only), and required bolting hardware. Lug sizes and quantity should be specified by purchaser.

Transformer/Generator Connection

This type of termination should be used whenever the bus is connecting to a transformer, generator, motor, switch or any connection where the bus bars are connecting to porcelain mounted equipment terminals. It will include the same components as a flanged end plus one set of flexible braid type connectors and a terminal box (if required).

Bushing Box (Weatherhead)

A bushing box is used on service entrance run where the cable connection to the bus must be made via porcelain bushings. It is comprised of the same components as a transformer connection plus 3 through stud type apparatus bushings, bushing stud connectors (lug pads) and a strip heater.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Ground Bus

The bus housing is designed and constructed to provide an electrically continuous ground path. The side rails of the bus housings are capable of carrying the full rated phase current continuously and, under short circuit conditions, are capable of carrying up to 60 kA RMS asymmetrical fault current for 3 seconds. Consequently, a separate ground bus is not necessary unless specified.

Wall Entrance Seal

A wall entrance seal consists of a wall throat, wall flange (one side of wall only), and a barrier which prevents air or vapor from passing from one room to another or from outdoors to indoors. It also carries a 1/2 hour fire rating. Consult factory for higher fire ratings.

Table 12.42: Wall Flange

Description
Optional (in addition to wall entrance seal) Aluminum 14 Gauge Steel 14 Gauge 304 Stainless Steel 14 Gauge 316 Stainless Steel

Equipment Entrance Seal

An equipment entrance seal should be used whenever a barrier is required to prevent the passing of flame and/or gasses between the bus housing and the terminating equipment.

Expansion Fittings

An expansion fitting is used to counteract the strain placed on the bus due to the expansion and contraction of the building or the bus itself. One should be used whenever the bus run crosses a building expansion joint and whenever a straight run of bus exceeds 60 feet.

Flexible Housing (Misalignment) Collar

Required at terminations or wall penetrations when vibrations due to seismic forces may cause damage to the bus. It may also be used to adjust for the “settling” of terminating equipment after installation.

Supporting Steel (Hangers)

Supports should be added on the basis of one for every 10 ft. for indoor and one for every 12 ft. for outdoor. Indoor supports are a trapeze type hanger while outdoor supports are a single or double column type support. Consult factory for other type supports.

Table 12.43: Hangers/Supports

Support Description	Maximum Height Options
Indoor Trapeze Hanger	—
Outdoor, Single Column Support	12 feet
Outdoor, Double Column Support	22 feet

Hazardous or Seismic Locations

Consult factory for bus runs which are to be installed in a location which is classified as hazardous or in a seismic location.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Standard Construction

Standard construction is as follows:

- Conductor (plating): Copper (silver) or Aluminum (tin)
- Conductor Insulation (5 kV through 38 kV only): epoxy
- Conductor Supports: Glass reinforced polyester blocks (5 kV and 15 kV); porcelain (38 kV)
- Housing Material: Extruded Aluminum (1/8-inch Nominal)
- Housing Construction: Totally Enclosed Non-ventilated
- Joint Insulation: EPR and PVC tape
- BIL Rating: 30 kV (600 V), 60 kV (5 kV) and 95 kV (15 kV)
- Momentary (Short Circuit) Rating: 75 kA (600 V), 60 kA (5 kV, 15 kV), and 39 kA (38 kV)
- Ground Conductor: Housing (100% rated)

Table 12.44: Bus Enclosures

Material and Finish
Painted Aluminum (1/8” Nominal)
Painted 14 Gauge Steel
Painted 11 Gauge Steel
Painted 14 Gauge 304 Stainless Steel
Painted 14 Gauge 316 Stainless Steel

Table 12.45: Momentary (Asymmetrical Short Circuit) Ratings

Voltage Class	Ampere Options
600 V	75 kA 100 kA 125 kA 150 kA
5 kV 15 kV	60 kA 80 kA 100 kA 150 kA
38 kV	39 kA 49 kA 62 kA 100 kA


© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Section 13


Wire Management



Wireway



Wall Duct

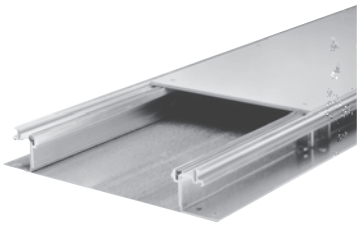

Trench Duct

Wireway 13-2

- General Purpose—NEMA Type 1 13-2
- Oiltight—NEMA Type 12 13-3
- Raintight Wireway—NEMA Type 3R 13-4
- Raintight Trough—NEMA Type 3R 13-4

Wall Duct 13-5

- Wall Duct General Description 13-5
- Components and Accessories 13-5
- Wall Duct Accessories 13-6

Trench Duct 13-7

- Trench Duct General Description 13-7
- Trench Duct Fittings 13-7
- Accessories and Components 13-8

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

General Purpose—NEMA Type 1

For more information on Wireway, refer to Catalog **5100CT0101**.

Standards

Square-Duct wireway is Underwriters Laboratories listed as steel enclosed wireway and auxiliary gutter. CSA listing is also available.



Painted Hinge-Cover
Type LDB—ANSI 49 Gray
Polyester Powder Finish

Sizes

2-1/2", 4", and 6" sizes are manufactured from 16 gauge steel. Straight lengths are available with or without knockouts. Knockouts are of various sizes in sides and bottom of wireway. 8", 10", and 12" sizes are made of 14 gauge steel and are furnished without knockouts.

Table 13.1: General Purpose (Connectors not supplied; order separately) *[1] [2] [3]*

Component	2-1/2" x 2-1/2"		4" x 4"		6" x 6"		8" x 8"	10" x 10"	12" x 12"*[4]*
	Catalog Number		Catalog Number		Catalog Number		Cat. No.	Cat. No.	Cat. No.
	With Knockouts	Without Knockouts	With Knockouts	Without Knockouts	With Knockouts	Without Knockouts	Without Knockouts	Without Knockouts	Without Knockouts
1' Length	LDB21KO	LDB21	LDB41KO	LDB41	LDB61KO	LDB61	LDB81	LDB101	LDB121
2' Length	LDB22KO	LDB22	LDB42KO	LDB42	LDB62KO	LDB62	LDB82	LDB102	LDB122
3' Length	LDB23KO	LDB23	LDB43KO	LDB43	LDB63KO	LDB63	LDB83	LDB103	LDB123
4' Length	LDB24KO	LDB24	LDB44KO	LDB44	LDB64KO	LDB64	LDB84	LDB104	LDB124
5' Length	LDB25KO	LDB25	LDB45KO	LDB45	LDB65KO	LDB65	LDB85	LDB105	LDB125
6' Length	—	—	LDB46KO	LDB46	LDB66KO	LDB66	LDB86	LDB106	—
10' Length	LDB210KO	LDB210	LDB410KO	LDB410	LDB610KO	LDB610	LDB810	LDB1010	LDB1210
90° L	—	LDB290L	—	LDB490L	—	LDB690L	LDB890L	LDB1090L	LDB1290L
90° Sweep L	—	LDB290LS	—	LDB490LS	—	LDB690LS	LDB890LS	LDB1090LS	LDB1290LS
45° L	—	LDB245L	—	LDB445L	—	LDB645L	LDB845L	LDB1045L	LDB1245L
Tee	—	LDB2T	—	LDB4T	—	LDB6T	LDB8T	LDB10T	LDB12T
Junction Box	—	LDB2J	—	LDB4J	—	LDB6J	LDB8J	LDB10J	LDB12J
Telescope Ftg.	—	LDB2TF	—	LDB4TF	—	LDB6TF	LDB8TF	LDB10TF	LDB12TF
Connector*[3]*	—	LDB2C	—	LDB4C	—	LDB6C	LDB8C	LDB10C	LDB12C
Drop/Brkt Hgr.	—	LDB2H	—	LDB4H	—	LDB6H	LDB8H	LDB10H	LDB12H
Support Hanger	—	LDB2SH	—	LDB4SH	—	LDB6SH	LDB8SH	LDB10SH	LDB12SH
Closing Plate	LDB2CPKO	LDB2CP	LDB4CPKO	LDB4CP	LDB6CPKO	LDB6CP	LDB8CP*[5]*	LDB10CP*[5]*	LDB12CP*[5]*
Panel Adapter	—	LDB2A	—	LDB4A	—	LDB6A	LDB8A	LDB10A	LDB12A
Open Adapter	—	LDB2OA	—	LDB4OA	—	LDB6OA	LDB8OA	LDB10OA	LDB12OA
Reducer	—	—	—	LDB42R	—	LDB64R	LDB86R	LDB108R	LDB1210R
	—	—	—	—	—	—	—	—	LDB128R
Adapter to "LD"*[6]*	—	LDB2GASK	—	LDB4GAS	—	LDB6GAS	LDB8GASK	LDB10GASK	—
Barrier Kit—5 ft. long w/hardware	—	—	—	LJB45B	—	LJB65B	LJB85B	—	—
5 pc. Barrier Pack—5 ft. long	—	—	—	LJB45BKM	—	LJB65BKM	—	—	—
5 pc. Barrier Bracket—2 compartment	—	—	—	LJB4BB2C	—	LJB6BB2C	—	—	—
5 pc. Barrier Bracket—3 compartment	—	—	—	LJB4BB3C	—	LJB6BB3C	—	—	—

[1] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[2] For wireway fill information, see NEC 376.
[3] Add connectors for all lengths and fittings, except closing plates, reducers, and adapters.
[4] Painted 12" x 12" wireway is not furnished with hinge-cover (screw-cover only).
[5] These closing plates also available with knockout. Add "KO" to cat #.
[6] Adapters to competitors' wireways also available. Contact your nearest Schneider Electric sales office for availability.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Oiltight—NEMA Type 12

Type LJB Oiltight lay-in wireway is fully gasketed and used to protect runs of electrical wiring from oil, water, coolants, dirt, or dust as well as physical damage. This wireway is manufactured to exceed oiltight and NFPA standards for industrial control equipment. Lengths and fittings are made of 14 gauge steel with 10 gauge end flanges. Straight lengths and fittings have hinged covers with oil resistant gasket all around and are held closed with pull-down latches. All lengths and fittings are without knockouts. Type LJB lay-in Wireway is finished with ANSI-49 gray polyester powder finish over a corrosion resistant phosphate preparation. All Type LJB oiltight wireway is UL listed as steel enclosed wireway and auxiliary gutter. Conforms to NEMA Type 12.

Table 13.2: Type LJB Lay-in *[7] [8]*

Description	2-1/2" x 2-1/2" Catalog No.	4" x 4" Catalog No.	6" x 6" Catalog No.	8" x 8" Catalog No.	12" x 6" Catalog No.
1" Nipple	LJB201	LJB401	LJB601	—	—
2" Nipple	LJB202	LJB402	LJB602	—	—
3" Nipple	LJB203	LJB403	LJB603	—	—
6" Length	LJB206	LJB406	LJB606	LJB806	LJB12606
1' Length	LJB21	LJB41	LJB61	LJB81	LJB1261
2' Length	LJB22	LJB42	LJB62	LJB82	LJB1262
3' Length	LJB23	LJB43	LJB63	LJB83	LJB1263
4' Length	LJB24	LJB44	LJB64	LJB84	LJB1264
5' Length	LJB25	LJB45	LJB65	LJB85	LJB1265
10' Length *[9]*	LJB210	LJB410	LJB610	LJB810	LJB12610
45º Top Opening	LJB245LT	LJB445LT	LJB645LT	LJB845LT	LJB12645LT
45º Inside Opening	LJB245LI	LJB445LI	LJB645LI	LJB845LI	—
45º Outside Opening	LJB245LO	LJB445LO	LJB645LO	LJB845LO	—
90º Inside Opening	LJB290LI	LJB490LI	LJB690LI	LJB890LI	LJB12690LI
90º Outside Opening	LJB290LO	LJB490LO	LJB690LO	LJB890LO	LJB12690LO
90º Outside Top Opening	—	LJB490LOT	LJB690LOT	LJB890LOT	—
90º Top Opening	LJB290LT	LJB490LT	LJB690LT	LJB890LT	LJB12690LT
Tee—Top Opening	LJB2TT	LJB4TT	LJB6TT	LJB8TT	LJB126TT
Tee—Outside Opening	LJB2TO	LJB4TO	LJB6TO	LJB8TO	—
Cross	LJB2X	LJB4X	LJB6X	LJB8X	LJB126X
Junction Box	LJB2JB	LJB4JB	LJB6JB	LJB8JB	—
Telescopic Fitting	LJB2TF	LJB4TF	LJB6TF	LJB8TF	LJB126TF
Closing Plate	LJB2CP	LJB4CP	LJB6CP	LJB8CP	LJB126CP
Panel Adapter	LJB2A	LJB4A	LJB6A	LJB8A	LJB126A
Bracket Hanger	LJB2BH	LJB4BH	LJB6BH	LJB8BH	—
Drop Hanger	LJB2DH	LJB4DH	LJB6DH	LJB8DH	—
Extra Connector Kit *[8]*	LJB2C	LJB4C	LJB6C	LJB8C	LJB126C
90º Connector	LJB290C	LJB490C	LJB690C	LJB890C	LJB12690C
Reducer to 2"	—	LJB42R	—	—	—
Reducer to 4"	—	—	LJB64R	—	LJB1264R
Reducer to 6"	—	—	—	LJB86R	LJB1266R
Cut-off fitting—not Lay-in	LJB2CF	LJB4CF	LJB6CF	LJB8CF	LJB126CF
Cut-off fitting—Lay-in	LJB2CFL	LJB4CFL	LJB6CFL	LJB8CFL	LJB126CFL
Transposition Fitting—CCW (Str)	LJB21CCW	LJB41CCW	LJB61CCW	—	—
Transposition Fitting—CW (Str)	LJB21CW	LJB41CW	LJB61CW	—	—
Transposition Elbow—CCW	LJB290LCCW	LJB490LCCW	LJB690LCCW	LJB890LCCW	—
Transposition Elbow—CW	LJB290LCW	LJB490LCW	LJB690LCW	LJB890LCW	—
Swivel fitting—Wireway to Wireway	LJB2S	LJB4S	LJB6S	LJB8S	—
Swivel fitting—Wireway to Box	LJB2SB	LJB4SB	LJB6SB	LJB8SB	—
Flex Fitting—Feed Through	LJB2FF	LJB4FF	LJB6FF	LJB8FF	—
Barrier Kit—5 ft. long w/hardware	—	LJB45B	LJB65B	LJB85B	LJB65B
5 pc. Barrier Pack—5 ft. long	—	LJB45BKM	LJB65BKM	—	—
5 pc. Barrier Bracket—2 compartment	—	LJB4BB2C	LJB6BB2C	—	—
5 pc. Barrier Bracket—3 compartment	—	LJB4BB3C	LJB6BB3C	—	—

[7] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[8] Connector kit furnished with each length and fitting.
[9] 10 foot straight lengths UL listed for up to 10 foot hanger spacing.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Raintight Wireway—NEMA Type 3R

Outdoor raintight wireway is used to protect electrical wiring against rain, sleet, and physical damage. Unique drip shield cover protects wiring from weather and maintains the “lay-in” feature for ease of wiring installation. Lengths and fittings are constructed of 16 gauge galvanized steel with ANSI-49 gray polyester powder finish over a corrosion resistant phosphate preparation. Underwriters Laboratories Listed as steel enclosed wireway and auxiliary gutter *(horizontal mounting only)*. Conforms to NEMA Type 3R.

Table 13.3: Raintight Wireway *[10]*

Description*[11]*	4" x 4" Catalog Number	6" x 6" Catalog Number	8" x 8" Catalog Number
1' Length	LDRB41M	LDRB61M	LDRB81M
5' Length	LDRB45M	LDRB65M	LDRB85M
10' Length	LDRB410M	LDRB610M	LDRB810M
90º L	LDRB490L	LDRB690L	LDRB890L
30º Sweep L	LDRB430SE	LDRB630SE	LDRB830SE
Tee	LDRB4T	LDRB6T	LDRB8T
Junction Box	LDRB4J	LDRB6J	LDRB8J
Panel Adapter	LDRB44A	LDRB66A	LDRB88A
Connector*[11]*	LDRB4C	LDRB6C	LDRB8C
Closing Plate	LDRB4CP	LDRB6CP	LDRB8CP
Drop Hanger	LDRB4DH	LDRB6DH	LDRB8DH
Wall Hanger	LDRB4WH	LDRB6WH	LDRB8WH
Reducer	—	LDRB64R	LDRB86R

Raintight Trough—NEMA Type 3R

Raintight trough is designed for ganging meter devices, panelboards, switches, and circuit breaker enclosures. Each length is a completely enclosed section with a removable cover that has provisions for sealing.

Design: 4” and 6” wireway is constructed of 16 gauge galvanized steel. 8”, 10”, and 12” wireway is constructed of 14 gauge galvanized steel. All raintight troughs conform to NEMA Type 3R.

Finish: ANSI-49 gray polyester powder finish over a corrosion resistant phosphate preparation. All raintight troughs are Underwriters Laboratories listed as steel enclosed wireway and auxiliary gutter *(horizontal mounting only)*.

Table 13.4: Raintight Trough *[10]*

Length	4" x 4" Cat. No.	6" x 6" Cat. No.	8" x 8" Cat. No.	10" x 10" Cat. No.	12" x 12" Cat. No.
1'	RDB41	RDB61	—	—	—
2'	RDB42	RDB62	RDB82	RDB102	RDB122
3'	RDB43	RDB63	RDB83	RDB103	RDB123
4'	RDB44	RDB64	RDB84	—	—
5'	RDB45	RDB65	RDB85	RDB105	RDB125
6'	—	RDB66	RDB86	RDB106	RDB126

[10] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[11] Add connectors for all lengths and fittings.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Typical Surface Mount, Straight-Length Wall Duct


Wall Duct General Description

UL Listed, File E65247, for Enclosure of Wiring to X-Ray Machines. Also available in aluminum for MRI application.


Wall duct is used as the continuation for standard trench duct in the floor. Wall duct can be routed up the wall and across the ceiling or under the finished floor (in ceiling space below) to provide a continuous lay-in raceway system from control consoles and floor equipment to overhead apparatus. Devices are furnished complete with covers and are available for either flush or surface mounted installations.

General Notes:


- Standard construction is 14 gauge steel with gray electrodeposition paint. Alternate construction is painted aluminum.
- Covers and coupling devices are furnished with each device.
- Wire retainers are furnished with each device.
- Straight lengths are field cut to length.
- Partitions and tunnels are to be field modified and installed where required.
- Hangers or other mounting devices to be furnished by others.

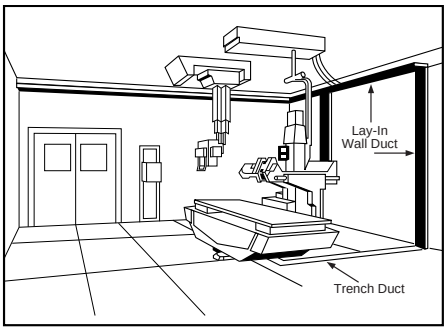

With SURFACE Covers (Matching Width)



With FLUSH Covers (2" Oversize)

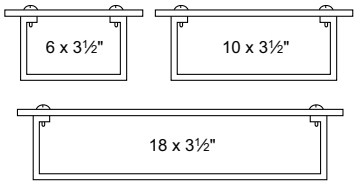

Components and Accessories

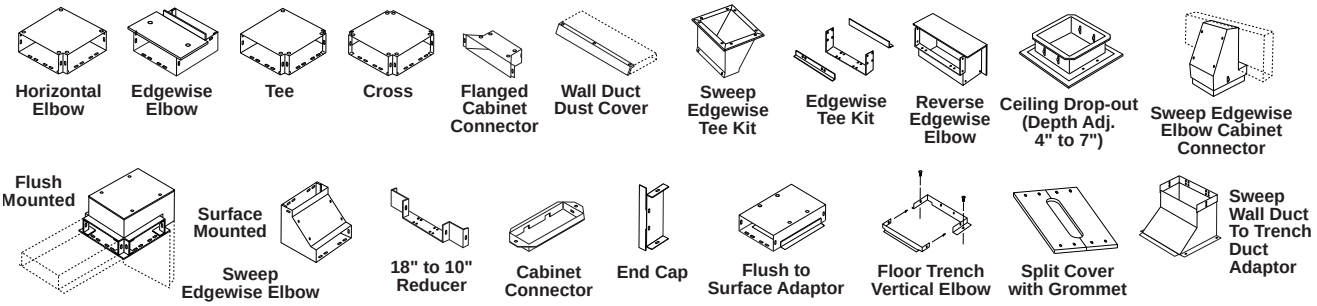


Table 13.5: Lay-In Wall Duct Components *[1] [2]*

Component		Flush Cover		Surface Cover	
		Catalog Number	Weight Lbs.	Catalog Number	Weight Lbs.
5'–0" Straight Length With Cover	6"W 10"W 18"W	RWT06S60 RWT10S60 RWT18S60	22.5 39.2 62.2	RWT06S60S RWT10S60S RWT18S60S	20.4 36.4 59.4
1'–6" Straight Length With Cover	6"W 10"W 18"W	RWT06S18 RWT10S18 RWT18S18	12.6 16.4 23.3	RWT06S18S RWT10S18S RWT18S18S	12.6 16.3 23.3
Horizontal Elbow With Cover—90º	6"W 10"W 18"W	RWT06HE RWT10HE RWT18HE	6.5 9.3 24.9	RWT06HES RWT10HES RWT18HES	6.0 8.1 23.7
Horizontal Elbow With Cover—45º	6"W 10"W 18"W	— — —	— — —	RWT06HE45S RWT10HE45S RWT18HE45S	6.0 8.1 23.7
Edgewise Elbow With Cover	6"W 10"W 18"W	RWT06EE RWT10EE RWT18EE	5.5 7.5 11.1	RWT06EES RWT10EES RWT18EES	5.5 7.4 11.0
Tee With Cover	6"W 10"W 18"W	RWT06TE RWT10TE RWT18TE	6.2 8.5 24.1	RWT06TES RWT10TES RWT18TES	5.9 7.3 22.9
Cross With Cover	10"W 18"W	RWT10XE RWT18XE	1.3 1.8	RWT10XES RWT18XES	6.2 21.8
Flanged Cabinet Connector With Cover	10"W	RWT10CUC	8.0	RWT10CUCS	7.8
Reverse Edgewise Elbow With Cover	6"W 10"W 18"W	RWT06REE RWT10REE RWT18REE	5.8 7.5 11.1	RWT06REES RWT10REES RWT18REES	5.7 7.4 11.0
Sweep Edgewise Elbow With Cover	6"W 10"W 18"W	— RWT10SFEE RWT18SFEE	10.0 12.0 16.5	RWT06SSEES RWT10SSEES RWT18SSEES	4.8 11.8 16.3
Sweep Edgewise Elbow Cabinet Connector	10"W 18"W	— —	— —	RWT10SWEECC RWT18SWEECC	14.0 20.0

[1] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[2] All devices available in aluminum. Add "A" suffix to the catalog number.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Wall Duct Accessories

Table 13.6: Lay-In Wall Duct Accessories *[3] [4]*

Accessories		Catalog Number	Weight Lbs.
5'–0" Partition		RWTP60	5.4
Straight through tunnel for tees *[5]*	10"W 18"W	RWT10ST RWT18ST	2.9 3.8
90º Elbow tunnel for crosses *[5]*	10"W 18"W	RWT10ET RWT18ET	3.2 5.1
3 compartment tunnel for tees	10"W 18"W	RWT10PTE RWT18PTE	5.0 6.0
3 compartment tunnel for crosses	10"W 18"W	RWT10PXE RWT18PXE	8.0 9.0
Edgewise Tee Kit	10"W 18"W	RWT10ETK RWT18ETK	1.3 2.1
Sweep Edgewise Tee Kit	10"W 18"W	RWT10SWET RWT18SWET	8.0 8.0
Flush to Surface Adaptor	10"W 18"W	RWT10FS RWT18FS	11.9 16.4
Ceiling Drop-Out	12x12 Flush Cover 8"x8"	RWTCDO	15.0
Extra Coupling Device 10"W 18"W	10"W 18"W	RWT10COUP RWT18COUP	.4 .5
Extra Straight Cover—30" long (Order 2 pcs. for 5 ft. of duct.)	Flush 10"W Flush 18"W Surface 10"W Surface 18"W	RWT10SCOV RWT18SCOV RWT10SCOVS RWT18SCOVS	7.2 13.0 6.1 11.8

Table 13.7: Wall Duct Accessories *[3] [4]*


Accessories		Catalog Number	Weight Lbs.
Reducer Coupling	18" to 10" 10" to 6"	RWTRC RWT06RC	2.1 1.6
Cabinet Connector	6"W 10"W 18"W	RWT06CC RWT10CC RWT18CC	1.0 1.3 2.4
End Cap	6"W 10"W 18"W	RWT06EC RWT10EC RWT18EC	1.0 1.3 1.8
Vertical Elbows for:	6" Trench to 6" Wall Duct 12" Trench to 10" Wall Duct 12" Trench to 18" Wall Duct 18" Trench to 10" Wall Duct 18" Trench to 18" Wall Duct	RWT06FTVE06 RWT10FTVE12 RWT18FTVE12 RWT10FTVE18 RWT18FTVE18	1.1 1.2 1.2 1.3
Sweep Trench Duct to Wall Duct Adapter (available in surface cover only)	12" Trench to 10" Wall Duct 18" Trench to 18" Wall Duct	RWT10SWFTVE12 RWT18SWFTVE18	10.0 14.0
Split Cover with Grommet 12" long–3"x 8" Opening	Flush 6"W Flush 10"W Flush 18"W Surface 6"W Surface 10"W Surface 18"W	RWT06ACP RWT10ACP RWT18ACP RWT06ACPS RWT10ACPS RWT18ACPS	2.6 3.1 4.8 2.0 2.7 4.0
Dust Cover—5 ft. long		RWTDCOV60	5.5
Grommet—100 ft. roll		RWTBG100	

[3] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[4] All devices available in aluminum. Add "A" suffix to the catalog number.
[5] Tunnels form a 3 in. wide compartment.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Trench Duct General Description

- STANDARD LENGTH of trench duct is 10 ft. Gasketed cover plates are ordered and shipped separately.
- FEATURES of trench duct:
  - Trench duct width is cover plate width.
  - Tub width is trench duct width less 1.8".
  - Overall width (bottom flange to flange) is 3" wider than trench duct width.
  - Standard depth is adjustable from 2-3/8" to 3-3/8". Also available as standard is depth adjustable from 3" to 4". To order, change “2” to “3”. Ex. RSV063100120. Applies to trench duct, elbows, crosses, tees, and reducers. Other depths available.
  - Tees, crosses, horizontal elbows, and reducers are shipped complete with cover plates assembled.
  - Grey vinyl tile trim is furnished as standard. Aluminum is available when requested.
  - All compartments over 17" wide must be supported with dividers or posts.

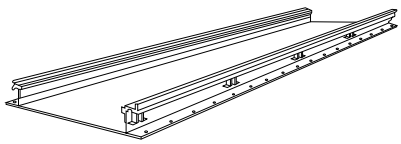

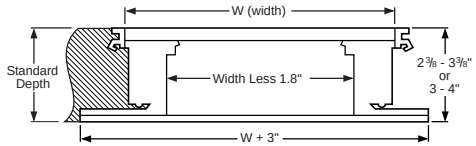






Table 13.8: Assembled Trench Duct *[1]*

Straight Sections	Trench Duct		
	Length	Width	Catalog Number
Full Length	10'-0"	6" 9" 12" 18" 24" 30"	RSV062100120 RSV092100120 RSV122100120 RSV182100120 RSV242100120 RSV302100120
	Covers Only (5 Plates per 10' Length) *[2]*		
	24"	6" 9" 12" 18" 24" 30"	RCP0624 RCP0924 RCP1224 RCP1824 RCP2424 RCP3024
	12"	12" 18"	RCP1212 RCP1812
Factory Cut-to-Length (12" Wide Only)	6'-0"L 4'-3- 1/2"L 3'-3- 1/2"L 2'-0"L 1'-0"L 0'-3-1/2"L	12" 12" 12" 12" 12" 12"	RSV122100072 RSV122100051.5 RSV122100039.5 RSV122100024 RSV122100012 RSV122100003.5
	3–24" Long Covers *[3]* 2–24" Long Covers & 1 – Wall Duct Vertical Elbow*[3]* 1–24" & 1–12" Long Cover & 1—Wall Duct Vertical Elbow *[3]* 1–24" Long Cover *[3]* 1–12" Long Cover *[3]* 1–Wall Duct Vertical Elbow*[3]*		


Trench Duct Fittings

Table 13.9: Trench Duct Fittings

Item		Width *[4]*	Catalog No.
	End Closures *[5]*	6" 9" 12" 18" 24" 30"	REC06 REC09 REC12 REC18 REC24 REC30
	Vertical Elbows	6" 9" 12" 18" 24" 30"	RVE06 RVE09 RVE12 RVE18 RVE24 RVE30
	Riser and Cabinet Connector (Removable Front)	6" 9" 12" 18" 24" 30"	RRC06 RRC09 RRC12 RRC18 RRC24 RRC30
	Z-Divider 5'-0" *[5]* Adjustable Barrier and Support Strip		RZD60
Tape for Trench Duct (180 ft. rolls)			G1414
Marker for Cellular Floor			G1426

[1] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[2] Straight length cover plates are shipped separately and must be ORDERED SEPARATELY.
[3] Covers and/or vertical elbows for connecting trench duct to lay-in wall duct—ORDER SEPARATELY.
[4] All devices through 18" width are available in aluminum. Height is factory-set to customer specifications from 2-1/2 to 4 inches. (Non-Adjustable)
[5] For 3 in. to 4 in. trench duct, add a “3” to end of catalog number.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

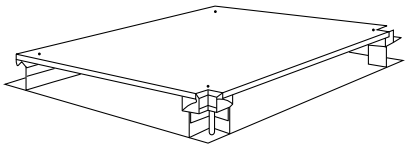





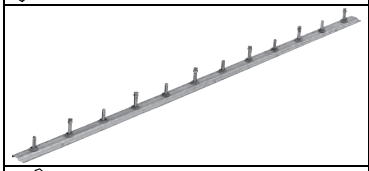




Tee

Table 13.10: Trench Duct Elbows, Tees, and Crosses *[6]*

Item	Complete Device	
	Width	Catalog Number
90° Horizontal *[7]* Elbows 	6" 9" 12" 18" 24" 30"	RHV062100009 RHV092100012 RHV122100015 RHV182100021 RHV242100027 RHV302100033
45° Horizontal Elbow *[7]*	12"	RHV12245
Tees *[7]* 	6" 9" 12" 18" 24" 30"	RTV062100011 RTV092100014 RTV122100017 RTV182100023 RTV242100029 RTV302100035
Crosses*[7]* 	6" 9" 12" 18" 24" 30"	RXV062100012 RXV092100015 RXV122100018 RXV182100024 RXV242100030 RXV302100036

Accessories and Components

Table 13.11: Trench Duct Accessories *[6]*

Item/Catalog Number			
	Right Hand Reducer 18" to 12" Cover Included		RRV182100012RR
	Left Hand Reducer 18" to 12" Cover Included		RRV182100012LR
	Reducing Tee 18" to 12" Cover Included		RTV182100017
	Spacer Bar and Barrier Adjustment Gage		6" 9" 12" 18" 24" 30"
	Support Post Strips 5'		RSP60
	U-Compartment 5'-0" Long x 3 -1/2" Wide with Adjustable Height Sides		RUC60
Leveling Legs 	Support Channel Leveling Legs Not Included	9" and 12" wide trench 18" and 24" wide trench 30" wide trench	G1500T12 G1500T24 G1500T36
	5/16 x 18 x 3"		G19103
	Cover Lifter (Suction Cup Device)		G1735S
Tunnels for Trench Duct Elbows (Tee or Cross) Straight through tunnel 90° elbow tunnel 	90° tunnel for 12" trench 90° tunnel for 18" trench Straight tunnel for 12" trench Straight tunnel for 18" trench		RSV122ET RSV182ET RSV122ST RSV182ST
Grommet Material (50 ft. rolls)			RG50

[6] Some products may be discontinued. Refer to **Busway and Cable Management** online for current information.
[7] Includes cover; shipped attached. All coverplate corner notches are 1–1/2" deep.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Section 14
Transformers

General Purpose Dry Type
600 Volts and Below







Type T and Type TF



Medium Voltage
Distribution Transformer



EZ Selector–Selection Assistance 14-2

LV Transformers EZ Selector–Selection Assistance 14-2

Low-Voltage Dry-Type Distribution Transformers 14-3

Overview 14-3
DOE 2016 Energy Efficient Three Phase 14-4
DOE 2016 Energy Efficient Three Phase and Single Phase Watchdog 14-7
Accessories 14-9
Resin Encapsulated Three and Single Phase Transformers 14-11
Resin Encapsulated Export Model and Buck Boost Transformers 14-12
Non-Ventilated and Transformer House 14-13

Mini Power-Zone Low Voltage Unit Substation 14-14

Mini Power-Zone Unit Substation 14-14
Sealed, Mini Power-Zone™ Unit Substation 14-14

Industrial Control Transformers 14-15

Type T and Type TF 14-15
Transformer Disconnects 14-19
Transformer Disconnects for NEMA Type 1 and Type 12 Enclosures 14-19

Energy Efficient, Dry Type 2.4, 5, and 15 kV 14-20

DOE 2016 Energy Efficient Medium Voltage Distribution Transformers 14-20
Medium Voltage Distribution Transformers 14-20
General Purpose Dry Type Medium Voltage Transformers 14-21
1,201–15,000 Vac Single-Phase Indoor Transformers 14-21
General Purpose Power-Dry™ II Stand Alone Dry Type Medium Voltage Transformers 14-21

© 2025 Schneider Electric
All Rights Reserved
9/29/2025





LV Transformers EZ Selector

Steps to select an LV transformer.

1. Select product type:
   - Three Phase – Energy Efficient – EX (DOE 2016)
   - Three Phase – Energy Efficient – EX, K-13 Rated (DOE 2016)
   - Three Phase – Energy Efficient – EX, Watchdog Low Temperature Rise (DOE 2016)
   - Single Phase – Energy Efficient – EE (DOE 2016)
   - Three Phase – Resin Encapsulated
   - Single Phase – Resin Encapsulated
2. Select kVA Rating – 15, 30, 45, 75, 112.5, 150, 225, 300, 500, or 750 kVA
3. Select Primary Voltage – 208, 240, 480, or 600 Vac Delta
4. Select Secondary Voltage – 208Y/120, 240 Vac Delta 120 V CT, 480Y/277
5. Select Mounting – Floor, Wall
6. Select Enclosure – Indoor (Type 1), Indoor (Type 2), Indoor/Outdoor (Type 3R), Indoor/Outdoor (Type 4X)
7. Select Temperature Rise – 55°C, 80°C, 115°C, 150°C
8. Select Material – Aluminum, Copper
9. Select Sound Level – 39 dB (6 dB below), 44 dB (6 dB below), 47 dB (3 dB below), 49 dB (6 dB below), 54 dB (6 dB below), 58 dB (6 dB below)

Additional Information

Search for “LV Transformers” from our technical FAQs page: www.se.com/us/en/faqs

View all **Low Voltage Transformer** Ranges and Documentation online: se.com/us/en/product-subcategory/80396.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

The Energy Policy and Conservation Act of 1975 (EPCA), update in the Energy Policy Act of 2005, authorized the Department of Energy (DOE) to evaluate and set minimum efficiency levels for Low Voltage Distribution Transformers. The DOE published a final rule prescribing new energy conservation standards for distribution transformers. 78 FR 23335 (April 18, 2013).

10 CFR 431.196: The efficiency of a low-voltage dry-type distribution transformer manufactured on or after January 1, 2016, shall be no less than that required for their kVA rating in the table below. Low-voltage dry-type distribution transformers with kVA ratings not appearing in the table shall have their minimum efficiency level determined by linear interpolation of the kVA and efficiency values immediately above and below that kVA rating. All efficiency values are at thirty-five percent of nameplate-rated load temperature corrected to 75°C, determined according to the DOE Test Method for Measuring the Energy Consumption of Distribution Transformers under Appendix A to Subpart K of 10 CFR part 431. https://www1.eere.energy.gov/buildings/appliance_standards/standards.aspx?productid=55&action=viewcurrent.

Energy Conservation Standards for Low-Voltage Dry-Type Distribution Transformers			
Single phase		Three phase	
kVA	Efficiency %[1]	kVA	Efficiency %[1]
15	97.70	15	97.89
25	98.00	30	98.23
37.5	98.20	45	98.40
50	98.30	75	98.60
75	98.50	112.5	98.74
100	98.60	150	98.83
167	98.70	225	98.94
250	98.80	300	99.02
333	98.90	500	99.14
—	—	750	99.23
—	—	1000	99.28

Distribution transformer means a transformer that (1) has an input voltage of 34.5 kV or less; (2) has an output voltage of 600 V or less; (3) is rated for operation at a frequency of 60 Hz; and (4) has a capacity of 10 to 2500 kVA for liquid-immersed units and 15 to 2500 kVA for dry-type units.

Low voltage dry-type distribution transformer means a distribution transformer that: has an input voltage of 600 V or less, is air-cooled, and not used oil as a coolant.

The following product offering must comply with the table above:

- Three- and single-phase
- Step up and step down transformers
- General purpose ventilated transformers (isolation transformers)
- Watchdog general purpose ventilated transformers (low temperature rise)
- Transformers designed for harmonic applications (K-rated, data center transformers, etc.)
- General purpose open core and coil transformers

The following low voltage transformers do not need to comply with the table above:

- Auto-transformers
- Drive isolation transformers
- Non-ventilated transformers
- Resin encapsulated transformers
- Buck boost transformers
- Control transformers (machine tool)
- Medical isolation panel transformers compliance with UL 1047 (Tables 30.1 and 30.2) (SPECIAL IZ — LOW LEAKAGE)

New Three-Phase Offering from Square D — DOE 2016 EX

- Exceed the efficiency levels from 10 CFR 431.196
- Terminals sized to handle wire ranges to match Square D circuit breakers, switches, panelboards, etc. Located to meet NEC bending radius and layout to simplify connections
- IZ Levels to allow for designing with the minimum AIC Panels available
- In-rush current limited to expand the Square D circuit breaker options at both 125 and 250% sizing
- Sound level at 3 dB for all designs, but up to 6–10 dB below on certain units—QUIET QUALITY
- 1/2 in. clearance from the rear and side, **UL 1561alcove testing all enclosures to not exceed 90°C on adjacent walls**
- Four product families of the DOE 2016 EX: General purpose, aluminum and copper windings, 150°C rise; Watchdog, low temperature rise, aluminum and cover windings, 115 or 80°C rise; K-rated transformers for harmonic applications

[1] Efficiencies are determined at the following reference conditions: 1. for no-load losses, at the temperature of 20°C; 2. for load-losses, at the temperature of 75°C and 35% of nameplate load. (Source: Table 4–2 of National Electrical Manufacturers Association (NEMA) Standard TP–1–2002, *Guide for Determining Energy Efficiency for Distribution Transformers*.)

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

DOE 2016 Energy Efficient Three Phase

Table 14.1: EXN & EX Three-Phase 60 Hz, 208Y/120 Vac Secondary; UL Listed

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level dB	Weight (lbs) *[2]*	Enclosure*[3]*
480 Vac Delta Primary, Aluminum Windings									
15	EXN15T3H	97.89%	6–2.5%2+4–	150	220	4.03%	39 dB	188	17M
30	EXN30T3H	98.23%				3.80%		303	18M
45	EXN45T3H	98.40%				4.10%		369	19M
75	EXN75T3H	98.60%				4.90%	44 dB	515	20M
112.5	EXN112T3H	98.74%				3.70%		724	21M
150	EXN150T3H	98.83%				3.10%		933	22M
225	EXN225T3H	98.94%				2.90%		1260	22M
225	EX225T3H	98.94%				4.4%	52 dB	1450	25J
300	EX300T3H	99.02%				5.0%		1860	25J
500	EX500T68H	99.14%	4–2.5%2+2–			4.9%	57 dB	2915	30J
600 Vac Delta Primary, Aluminum Windings									
15	EXN15T65H	97.89%	6–2.5%2+4–	150	220	4.32%	39 dB	188	17M
30	EXN30T65H	98.23%				3.70%		324	18M
45	EXN45T65H	98.40%				4.10%		368	19M
75	EXN75T65H	98.60%				4.67%	44 dB	513	20M
112.5	EXN112T65H	98.74%				3.62%		727	21M
150	EXN150T65H	98.83%				3.14%		1002	22M
225	EXN225T65H	98.94%				2.90%		1245	22M
225	EX225T65H	98.94%				5.2%	52 dB	1450	25J
300	EX300T65H	99.02%				5.3%		1860	25J
500	EX500T79H	99.14%	4–2.5%2+2–			—	57 dB	2915	30J
208 Vac Delta Primary, Aluminum Windings*[4]*									
15	EXN15T3156H	97.89%	192/200/208/216/232/240/248	150	220	4.04%	39 dB	192	17M
30	EXN30T3156H	98.23%				3.22%		363	18M
45	EXN45T3156H	98.40%				4.04%		396	19M
75	EXN75T3156H	98.60%				4.88%	44 dB	526	20M
112.5	EXN112T3156H	98.74%				3.48%		811	21M
150	EXN150T3156H	98.83%				3.22%		1015	22M
240 Vac Delta Primary, Aluminum Windings*[4]*									
15	EXN15T3156H	97.89%	192/200/208/216/232/240/248	150	220	4.04%	39 dB	192	17M
30	EXN30T3156H	98.23%				3.22%		363	18M
45	EXN45T3156H	98.40%				4.04%		396	19M
75	EXN75T3156H	98.60%				4.88%	44 dB	526	20M
112.5	EXN112T3156H	98.74%				3.48%		811	21M
150	EXN150T3156H	98.83%				3.22%		1015	22M
480 Vac Delta Primary, Copper Windings									
15	EXN15T3HCU	97.89%	6–2.5%2+4–	150	220	4.06%	39 dB	222	17M
30	EXN30T3HCU	98.23%				4.08%		356	18M
45	EXN45T3HCU	98.40%				3.44%		399	19M
75	EXN75T3HCU	98.60%				4.99%	44 dB	661	20M
112.5	EXN112T3HCU	98.74%				3.27%		974	21M
150	EXN150T3HCU	98.83%				3.60%		1156	22M
225	EXN225T3HCU	98.94%				2.56%		1640	22M
225	EX225T3HCU	98.94%				5.7%	52 dB	1545	25J
300	EX300T3HCU	99.02%				6.0%		1975	25J
500	EX500T68HCU	99.14%	4–2.5%2+2–			4.8%	57 dB	3705	30J

Table 14.2: EXN & EX Three-Phase 60 Hz, 480Y/277 Vac Secondary; UL Listed

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level	Weight (lbs)*[2]*	Enclosure*[3]*
208 Vac Delta Primary, Aluminum Windings *[5]*									
15	EXN15T3155H	97.89%	192/200/208/216/232/240/248	150	220	4.01%	39 dB	191	17M
30	EXN30T3155H	98.23%				3.43%		335	18M
45	EXN45T3155H	98.40%				3.86%		395	19M
75	EXN75T3155H	98.60%				3.94%	44 dB	544	20M
112.5	EXN112T3155H	98.74%				3.67%		735	21M
150	EXN150T3155H	98.83%				3.12%		1020	22M
225	EX225T212H	98.94%	3–5%1+2–			5.8%	52 dB	1450	25J
300	EX300T212H	99.02%				5.2%		1860	25J
500	EX500T212H	99.14%				4.8%	57 dB	2915	30J
480 Vac Delta Primary, Aluminum Windings									
15	EXN15T1814H	97.89%	6–2.5%2+4–	150	220	4.62%	39 dB	191	17M
30	EXN30T1814H	98.23%				3.50%		333	18M
45	EXN45T1814H	98.40%				3.95%		373	19M
75	EXN75T1814H	98.60%				5.03%	44 dB	531	20M
112.5	EXN112T1814H	98.74%				3.53%		730	21M
150	EXN150T1814H	98.83%				3.08%		1012	22M
225	EXN225T1814H	98.94%				3.2%	52 dB	1270	22M
225	EX225T1814H	98.94%				4.6%		1450	25J
300	EX300T1814H	99.02%				5.4%		1860	25J
500	EX500T76H	99.14%	4–2.5%2+2–			—	57 dB	2915	30J

[2] Not for construction, Contact your local Schneider Electric representative for certified prints.
[3] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9
[4] 3156 Catalog Numbers are shipped connected as 240 V.
[5] 3155 Catalog Numbers are shipped connected as 240 V.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.3: EXN & EX Three Phase 60 Hz, 240 Vac Delta Secondary; UL Listed

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level dB	Weight (lbs) [6]	Enclosure[7]
480 Vac Delta Primary, Aluminum Windings									
15	EXN15T6H	97.89%	6-2.5%2+4-	150	220	4.70%	39dB	193	17M
30	EXN30T6H	98.23%	6-2.5%2+4-	150	220	2.99%	39dB	361	18M
45	EXN45T6H	98.40%	6-2.5%2+4-	150	220	4.06%	39dB	369	19M
75	EXN75T6H	98.60%	6-2.5%2+4-	150	220	5.08%	44dB	529	20M
112.5	EXN112T6H	98.74%	6-2.5%2+4-	150	220	3.47%	44dB	730	21M
150	EXN150T6H	98.83%	6-2.5%2+4-	150	220	3.08%	44dB	1007	22M
225	EXN225T6H	98.94%	6-2.5%2+4-	150	220	3.2%	52 dB	1245	22M
225	EX225T6H	98.94%	6-2.5%2+4-	150	220	4.5%	52 dB	1820	25J
300	EX300T6H	99.02%	6-2.5%2+4-	150	220	5.2%	52 dB	1960	25J
500	EX500T63H	99.14%	4–2.5%2+2–	150	220	4.9%	57 dB	3090	30J
480 Vac Delta Primary, Aluminum Windings									
120 Volt Center Tap - Limited to 7.5% Loading, Design for Ground Reference and Light Maintenance Loading.									
15	EXN15T6HCT	97.89%	6-2.5%2+4-	150	220	4.70%	39dB	193	17M
30	EXN30T6HCT	98.23%	6-2.5%2+4-	150	220	2.99%	39dB	361	18M
45	EXN45T6HCT	98.40%	6-2.5%2+4-	150	220	4.06%	39dB	369	19M
75	EXN75T6HCT	98.60%	6-2.5%2+4-	150	220	5.08%	44dB	529	20M
112.5	EXN112T6HCT	98.74%	6-2.5%2+4-	150	220	3.47%	44dB	730	21M
150	EXN150T6HCT	98.83%	6-2.5%2+4-	150	220	3.08%	44dB	1007	22M
225	EXN225T6HCT	98.94%	6-2.5%2+4-	150	220	3.2%	52 dB	1245	22M
225	EX225T6HCT	98.94%	6-2.5%2+4-	150	220	4.5%	52 dB	1820	25J
300	EX300T6HCT	99.02%	6-2.5%2+4-	150	220	5.2%	52 dB	1960	25J
500	EX500T63HCT	99.14%	4–2.5%2+2–	150	220	4.9%	57 dB	3090	30J

DOE 2016 Energy Efficient Single Phase

Table 14.4: EE Single-Phase 60 Hz, 120 / 240 Vac Secondary; cULus Listed

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps *[6]*	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level dB	Weight (lbs) *[7]*	Enclosure*[8]*
240 x 480 Vac Primary, Aluminum Windings									
15	EE15S3H	97.70%	480 Vac 6–2.5% 2+4– 240 Vac 3–5% 1+2–	150	220	6.1%	45 dB	215	17D
25	EE25S3H	98.00%				5.9%		275	17H
37.5	EE37S3H	98.20%				6.1%		340	18H
50	EE50S3H	98.30%				5.1%		395	18H
75	EE75S3H	98.50%				5.7%	50 dB	619	21D
100	EE100S3H	98.60%				4.7%		682	22D
167	EE167S3H	98.70%				3.9%	55 dB	982	24D
250	EE250S3H	98.80%				5.7%		1060	25D
333	EE333S3H	98.90%				6.3%	60 dB	1854	31D
600 Vac Primary, Aluminum Windings									
15	EE15S3534H	97.70%	6–2.5%2+4–	150	220	4.0	45 dB	215	17D
25	EE25S3534H	98.00%				4.3		275	17H
37.5	EE37S3534H	98.20%				3.8		400	18H
50	EE50S3534H	98.30%				4.2		450	18H
75	EE75S3534H	98.50%				3.2	50 dB	605	21D
100	EE100S3534H	98.60%				2.9		795	22D
208 Vac Primary, Aluminum Windings									
15	EE15S60H	97.70%	2–5% FCBN	150	220	4.3	45 dB	200	17D
25	EE25S60H	98.00%				4.1		275	17H
37.5	EE37S60H	98.20%				3.6		397	18H
50	EE50S60H	98.30%				5.7		420	18H
75	EE75S60H	98.50%				3.6	50 dB	621	21D
100	EE100S60H	98.60%				6.3		795	22D

[6] FCBN = Full Capacity Below Normal.
[7] Not for construction, Contact your local Schneider Electric representative for certified prints.
[8] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

DOE 2016 Energy Efficient K-Rated Three Phase

Square D offers offers Delta - Wye 30°Phase Shift transformers which reconfigure the harmonic models and mitigate the harmful effects of triplens. UL Listed with the following K-ratings to handle excess heat created by harmonic wave forms, K4 and K13. Available with aluminum or copper windings and 150°C or 115°C Rise with 220C insulation system.

Table 14.5: EXN & EX Three Phase 60 Hz, 30° Phase Shift, 480 Delta to 208Y/120; UL Listed, K-RATED

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level	Weight (lbs) *[9]*	Enclosure*[10]*
480 Delta Primary, 208Y/120 Secondary, Aluminum Windings, 150°C Rise, 220C Insulation, K13 Listed									
15	EXN15T3HNLP	97.89%	6–2.5%2+4–	150	220	4.51%	39 dB	195	17M
30	EXN30T3HNLP	98.23%				4.18%		336	18M
45	EXN45T3HNLP	98.40%				4.71%		400	19M
75	EXN75T3HNLP	98.60%				5.26%	44 dB	580	20M
112.5	EXN112T3HNLP	98.74%				3.70%		802	21M
150	EX150T3HNLP	98.83%				3.00%		1825	25J
225	EX225T3HNLP	98.94%				3.30%	49 dB	1975	25J
480 Delta Primary, 208Y/120 Secondary, Copper Windings, 150°C Rise, 220C Insulation, K13 Listed									
15	EXN15T3HCUNLP	97.89%	6–2.5%2+4–	150	220	4.96%	39 dB	235	17M
30	EXN30T3HCUNLP	98.23%				3.06%		407	18M
45	EXN45T3HCUNLP	98.40%				4.41%		509	19M
75	EXN75T3HCUNLP	98.60%				5.56%	44 dB	700	20M
112.5	EXN112T3HCUNLP	98.74%				3.33%		1000	21M
150	EX150T3HCUNLP	98.83%				4.60%		1545	25J
225	EX225T3HCUNLP	98.94%				3.80%	49 dB	1975	25J
480 Vac Delta Primary, 208Y/120 Secondary, Aluminum Winding, K4									
15	EXN15T3HNL	97.89%	6–2.5%2+4–	150	220	4.30%	39 dB	184	17M
30	EXN30T3HNL	98.23%				3.15%		324	18M
45	EXN45T3HNL	98.40%				4.13%		392	19M
75	EXN75T3HNL	98.60%				5.21%	44 dB	527	20M
112.5	EXN112T3HNL	98.74%				3.80%		713	21M
150	EXN150T3HNL	98.83%				3.37%		1012	22M
480 Vac Delta Primary, 208Y/120 Secondary, Copper Winding, K4									
15	EXN15T3HCUNL	97.89%	6–2.5%2+4–	150	220	4.22%	39 dB	219	17M
30	EXN30T3HCUNL	98.23%				4.23%		358	18M
45	EXN45T3HCUNL	98.40%				3.95%		412	19M
75	EXN75T3HCUNL	98.60%				4.15%	44 dB	548	20M
112.5	EXN112T3HCUNL	98.74%				3.52%		899	21M
150	EXN150T3HCUNL	98.83%				4.35%		1303	22M

[9] Not for construction, Contact your local Schneider Electric representative for certified prints.
[10] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

DOE 2016 Energy Efficient Watchdog Three Phase and Single Phase

Watchdog transformers, by design, reduce energy consumption at loads greater than 50% loading, giving fewer BTUs/hour at those loading levels. The life expectancy is greater than that of 150°C rise General Purpose units.

- Aluminum or copper windings
- Two temperature rise options: 115°C rise on 220°C insulation systems (15% continuous emergency overload capacity); 80°C rise on 220°C insulation systems (30% continuous emergency overload capacity)

Table 14.6: EXN & EX Three Phase 60 Hz; UL Listed

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level	Weight (lbs) *[11]*	Enclosure*[12]*
480 V Delta Primary, 208Y/120 Secondary, Aluminum Windings									
15	EXN15T3HF	97.89%	6–2.5%2+4–	115	220	3.98%	39 dB	184	17M
30	EXN30T3HF	98.23%				2.92%		324	18M
45	EXN45T3HF	98.40%				3.46%		400	19M
75	EXN75T3HF	98.60%				5.07%	44 dB	527	20M
112.5	EXN112T3HF	98.74%				3.30%		806	21M
150	EXN150T3HF	98.83%				3.29%		1012	22M
225	EXN225T3HF	98.94%				2.8%	49 dB	1260	22M
225	EX225T3HF	98.94%				4.5%		1825	24J
300	EX300T3HF	99.02%				30.0%		1975	25J
500	EX500T68HF	99.14%	4–2.5%2+2–			4.9%	56 dB	3100	30J
480 V Delta Primary, 208Y/120 Secondary, Copper Windings									
15	EXN15T3HFCU	97.89%	6–2.5%2+4–	115	220	3.90%	39 dB	219	17M
30	EXN30T3HFCU	98.23%				3.98%		358	18M
45	EXN45T3HFCU	98.40%				3.72%		412	19M
75	EXN75T3HFCU	98.60%				4.01%	44 dB	653	20M
112.5	EXN112T3HFCU	98.74%				3.42%		899	21M
150	EXN150T3HFCU	98.83%				4.56%		1303	22M
225	EXN225T3HFCU	98.94%				2.5%	49 dB	1640	22M
225	EX225T3HFCU	98.94%				6.8%		1545	24J
300	EX300T3HFCU	99.02%				5.0%		1975	25J
500	EX500T68HFCU	99.14%	4–2.5%2+2–			4.8%	56 dB	3705	30J
480 V Delta Primary, 208Y/120 Secondary, Aluminum Windings									
15	EXN15T3HB	97.89%	6–2.5%2+4–	80	220	4.01%	39 dB	195	17M
30	EXN30T3HB	98.23%				4.37%		345	18M
45	EXN45T3HB	98.40%				4.10%		416	19M
75	EXN75T3HB	98.60%				5.05%	44 dB	580	20M
112.5	EXN112T3HB	98.74%				2.54%		949	21M
150	EXN150T3HB	98.83%				3.92%		1208	22M
225	EX225T3HB	98.94%				4.6%	49 dB	1975	25J
300	EX300T68HB	99.02%	4–2.5%2+2–			4.4%	56 dB	3100	30J
480 V Delta Primary, 208Y/120 Secondary, Copper Windings									
15	EXN15T3HBCU	97.89%	6–2.5%2+4–	80	220	4.53%	39 dB	235	17M
30	EXN30T3HBCU	98.23%				2.76%		407	18M
45	EXN45T3HBCU	98.40%				4.12%		509	19M
75	EXN75T3HBCU	98.60%				5.61%	44 dB	690	20M
112.5	EXN112T3HBCU	98.74%				3.76%		1146	21M
150	EXN150T3HBCU	98.83%				5.45%		1424	22M
225	EX225T3HBCU	98.94%				6.9%	49 dB	1975	25J
300	EX300T68HBCU	99.02%	4–2.5%2+2–			5.0%	56 dB	3705	30J

Schneider Electric's Reduced Energy Family™ Low Voltage Transformers meet the next level of DOE efficiency. The Reduced Energy product family is designed with 20% reduction in losses at 35% Loading – 75°C. Available in aluminum or copper windings, and standardized at 80°C temperature rise.

Table 14.7: Reduced Energy Three Phase 60 Hz; UL Listed

kVA	Catalog No.	DOE 2029 Efficiency	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	Sound Level	Weight (lbs)*[11]*	Enclosure*[12]*
480 V Delta Primary, 208Y/120 Secondary, Aluminum Windings								
15	RE15T3HB	98.31%	6–2.5%2+4–	80	220	39 dB	240	18M
30	RE30T3HB	98.58%	6–2.5%2+4–	80	220	39 dB	305	19M
45	RE45T3HB	98.72%	6–2.5%2+4–	80	220	39 dB	405	20M
75	RE75T3HB	98.88%	6–2.5%2+4–	80	220	44 dB	610	21M
112.5	RE112T3HB	98.99%	6–2.5%2+4–	80	220	44 dB	810	22M
150	RE150T3HB	99.06%	6–2.5%2+4–	80	220	44 dB	1060	22M
225	RE225T3HB	99.15%	6–2.5%2+4–	80	220	49 dB	1385	25J
300	RE300T68HB	99.22%	4–2.5%2+2–	80	220	49 dB	1790	30J
500	RE500T68HB	99.31%	4–2.5%2+2–	80	220	56 dB		31J
480 V Delta Primary, 208Y/120 Secondary, Copper Windings								
15	RE15T3HBCU	98.31%	6–2.5%2+4–	80	220	39 dB	265	18M
30	RE30T3HBCU	98.58%	6–2.5%2+4–	80	220	39 dB	350	19M
45	RE45T3HBCU	98.72%	6–2.5%2+4–	80	220	39 dB	450	20M
75	RE75T3HBCU	98.88%	6–2.5%2+4–	80	220	44 dB	680	21M
112.5	RE112T3HBCU	98.99%	6–2.5%2+4–	80	220	44 dB	870	22M
150	RE150T3HBCU	99.06%	6–2.5%2+4–	80	220	44 dB	1175	22M
225	RE225T3HBCU	99.15%	6–2.5%2+4–	80	220	49 dB	1615	25J
300	RE300T68HBCU	99.22%	4–2.5%2+2–	80	220	49 dB	2045	30J
500	RE500T68HBCU	99.31%	4–2.5%2+2–	80	220	56 dB		31J

[11] Not for construction, Contact your local Schneider Electric representative for certified prints.
[12] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.8: EE Single Phase: 60 Hz, cULus Listed

kVA	Catalog No.	Minimum Efficiency @ 35% 75°C	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Sound Level dB	Weight (lbs)*[13]*	Enclosure*[14]*
240 x 480 Vac Primary, 120 / 240 Vac Secondary, Aluminum Windings									
15	EE15S3HF	97.70%	480 Vac 6–2.5% 2+4– 240 Vac 3–5% 1+2–	115	220	3.5%	45 dB	275	17D
25	EE25S3HF	98.00%				4.0%		340	18H
37.5	EE37S3HF	98.20%				3.7%		395	18H
50	EE50S3HF	98.30%				3.7%		620	21D
75	EE75S3HF	98.50%				3.5%	50 dB	685	22D
100	EE100S3HF	98.60%				3.5%		985	24D
15	EE15S3HB	97.70%		80		1.7%	45 dB	280	17D
25	EE25S3HB	98.00%				3.9%		345	18H
37.5	EE37S3HB	98.20%				3.7%		400	18H
50	EE50S3HB	98.30%				3.6%		625	21D
75	EE75S3HB	98.50%				3.4%	50 dB	690	22D
100	EE100S3HB	98.60%				3.4%		995	24D

Other primary and secondary combinations are available via the Schneider Electric Product Configurator. Contact your local Schneider Electric representative for more information.

[13] Not for construction, Contact your local Schneider Electric representative for certified prints.
[14] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9

© 2025 Schneider Electric
All Rights Reserved
9/29/2025



Style D and H—Type 2 Rated
Converts to Type 3R with Weathershield




Style M—Type 2 Rated
Converts to Type 3R
with Weathershield



Style J—Type 1 Rated
Converts to Type 2 with Drip Shield
Converts to Type 3R with Weathershield

Table 14.9: Enclosure Dimensions and Accessories

Enclosure Number/Style		Height		Width*[15]*		Depth		Mounting	Weathershield	Wall Mounting Bracket *[16]*	Ceiling Mounting Bracket *[17]*	Drip Shield
		in.	mm	in.	mm	in.	mm					
17	D	27	686	20	508	16	406		WS363	WMB361362	CMB363	—
	H	37	940	20	508	16	406		WS363	WMB361362	CMB363	—
18	D	30	762	20	508	20	508		WS363	WMB363364	CMB363	—
	H	37	940	20	508	20	508		WS363	WMB363364	CMB363	—
19		30	762	30	762	20	508		WS364	WMB363364	CMB364	—
20		37	940	30	762	20	508		WS364	WMB363364	CMB364	—
21		37	940	30	762	24	610		WS364	—	CMB364	—
22		43.8	1111	32	813	27	686		WS380	—	CMB380	—
24		49.5	1257	35	889	28.5	724		WS381	—	CMB381	—
25	D	49.5	1257	41	1041	32	813		WS382	—	—	—
26		57.5	1461	41	1041	32	813	Floor	WS382	—	—	—
28		60	1524	56	1422	36	914		WS370A	—	—	—
29		68	1727	56	1422	36	914		WS370A	—	—	—
30		71	1803	48	1219	36	914		WS383	—	—	—
31		74	1880	56	1422	40.5	1029		WS384	—	—	—
17		23.98	609	21.50	546	21.18	538		7400WS17M	7400WMB17M	7400CMB17M	—
18		28.31	719	25.51	648	24.69	627		7400WS18M19M	7400WMB18M19M20M	7400CMB18M19M20M	—
19	M	29.33	745	25.51	648	25.94	659		7400WS18M19M	7400WMB18M19M20M	7400CMB18M19M20M	—
20		33.50	851	30.08	764	27.44	697		7400WS20M	7400WMB18M19M20M	7400CMB18M19M20M	—
21		37.52	953	31.30	795	28.43	722		7400WS21M	—	7400CMB21M	—
22		40.59	1031	33.66	855	32.56	827		7400WS22M	—	7400CMB22M	—
24	—	—	—	—	—	—	—	—	—	—	—	—
25		57.5	1461	40.1	1019	32.75	832		7400WS25J	—	—	7400DS25J
30	J	71	1803	48.25	1226	37.9	963	Floor	7400WS30J	—	—	7400DS30J
31		76	1930	56	1422	44.5	1130		7400WS31J	—	—	7400DS31J

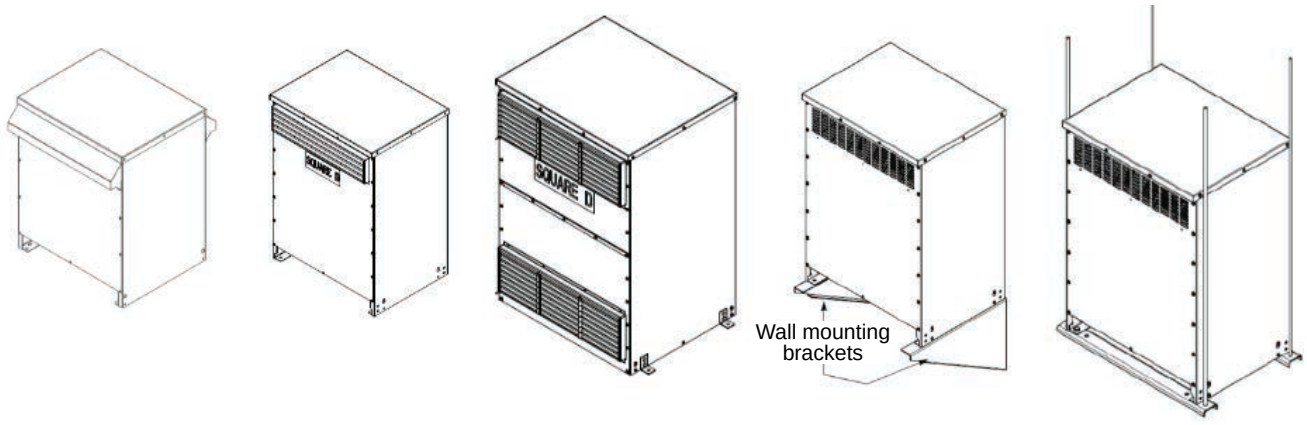

New Optional Floor Mounting Kit — Enclosures M and J

Table 14.10: Mechanical Lug Kits

Catalog No.	Lugs Per Kit	Wire Range	Cap Screws	Current Range	Grounding Lugs per Kit	Wire Range	Bonding Lugs per Kit	Wire Range
Single-Phase Primary, Single-Phase Secondary, Three-Phase Delta Primary, Three-Phase Delta Secondary								
DASKP100	3	1/0–14 STR	1/4 x 1 in.	Up to 100 A	Not applicable	Not applicable	Not applicable	Not applicable
DASKP250		350 kcmil–6 STR	3/8 x 2 in.	101 to 250 A				
DASKP400		600 kcmil–4 STR (2) 250 kcmil–1/0 STR		201 to 400 A				
DASKP600	6			601 to 800 A				
DASKP1000	9	600 kcmil–2 STR						
DASKP1200	12			801 to 1200 A				
Single-Phase Primary and Secondary, Three-Phase Wye Secondary, Three-Phase Delta with Center Tap								
DASKGS100	5	1/0–14 STR	1/4 x 1 in.	Up to 100 A	1	(4) 2/0 to 14 STR	1	2 to 14 STR
DASKGS250		350 kcmil–6 STR	3/8 x 2 in.	101 to 250 A				
DASKGS400		600 kcmil–4 STR (2) 250 kcmil–1/0 STR		201 to 400 A				1/0 to 14 STR

[15] These dimensions are not for construction. Contact your local Schneider Electric.
[16] Wall mounting brackets are used with units weighing no more than 700 lbs.
[17] Ceiling mounting brackets are used with units weighing no more than 1200 lbs.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.10 Mechanical Lug Kits (cont'd.)

Catalog No.	Lugs Per Kit	Wire Range	Cap Screws	Current Range	Grounding Lugs per Kit	Wire Range	Bonding Lugs per Kit	Wire Range
DASKGS600	10	600 kcmil–2 STR		601 to 800 A		(4) 350 kcmil to 6 STR		250 kcmil to 6 STR
DASKGS1000	15							
DASKGS1200	20			801 to 1200 A				
DASKGS2000	25			1201 to 2000 A				

Lugs are not supplied with transformer units. They must be purchased separately.

Table 14.11: Ground Lug Kits

Catalog No.	Wire Range
DASKGK1	(4) 2/0 to 14 STR
DASKGK2	(4) 350 kcmil to 6 STR



Table 14.12: Compression Lug Kits

Transformer kVA Sizes	Kit Catalog No.	Terminal Lugs		Aluminum or Copper Conductor Range (AWG or kcmil)	Hardware Included	
		Qty.	Catalog No.		Qty.	Cap Screws
15–37 ½ 1Ø 15–45 3Ø	VCELSK1	8 5	VCEL02114S1 VCEL030516H1	#8–1/0 #4–300 kcmil	8 1	1/4 x 1 in. 1/4 x 2 in.
50–75 1Ø 75–112 ½ 3 Ø	VCELSK2	13	VCEL030516H1	#4–300 kcmil	8 8	1/4 x 1 in. 1/4 x 2 in.
100–167 1Ø 150–300 3Ø	VCELSK3	3	VCEL030516H1		3	1/4 x 3/4 in.
		26	VCEL07512H1	500–750 kcmil Al 500 kcmil Cu	16	3/8 x 2 in.
500 3Ø	VCELSK4	34	VCEL07512H1		21	

Schneider Electric Low Voltage Transformers have been qualified to the site-specific requirements of the following listed model building code and/or standard. (International Building Code, California Building Code, Uniformed Building Code). Qualification based on tri-axial shake table test results conduced in accordance with the AC156 test protocol3 (Acceptance Criteria for Seismic Qualification Testing of Nonstructural Components).

- Enclosure 1A to 11A, 12C to 16C, 12B to 15B (Resin Encapsulated Transformers)
- Enclosure 17D to 31D, 17H to 18H, 17K to 22K, 25J to 31J (Ventilated Transformers)
- Enclosure 17K to 20K with wall mounting bracket (Ventilated Transformers)
- Enclosure 17E to 31E (Non-ventilated Transformers)
- Enclosure MPZ A, AA, B, BB, C, CC (MPZB)

Product is Listed for installation in Hospitals State of California–OSHPD Special Seismic Certification Preapproval OSP-0023-10.

Accessory Labels–required for Building Inspection–OSHPD		
OSP Label Catalog Number	Products	Enclosure Style
7400CAOSHPDABC	Resin encapsulated, buck boost transformers	Style A, B, C
7400CAOSHPDDH	Ventilated Type EE, drive isolation, auto-transformers	Style D, H
7400CAOSHPDF	Low voltage 750 and 1000 kVA Type EE	Style F
7400CAOSHPDJ	Ventilated Type EX	Style J
7400CAOSHPDK	Ventilated Type EX	Style K
7400CAOSHPDKO	Ventilated Type EX, wall-mounted using Square D brackets	Style K with WMB
7400CAOSHPDMPZB	Mini Power Zone Bolt-on	A, AA, B, BB, C, CC

© 2025 Schneider Electric
All Rights Reserved
9/292025

Resin Encapsulated Three and Single Phase Transformers

Table 14.13: Resin Encapsulated Three and Single Phase Transformers

kVA	Type 3R STD			Type 3R 304 Stainless			Type 4X 304 Stainless					
	Catalog No.	Weight (lbs)*[18]*	Enclosure *[19]*	Catalog No.	Weight (lbs)*[18]*	Enclosure *[19]*	Catalog No.	Weight (lbs)*[18]*	Enclosure *[19]*	Full Capacity Taps*[20]*	Deg C Temp. Rise	Insulation Class
Three Phase—480 Vac Delta Primary 208Y/120 Vac Secondary, 60 Hz; UL/cULus Listed												
3	3T2F	120	12C	—	120	12C	4X3T2FSS	165	54X	2–5% FCBN	115	180
6	6T2F	145	12C	6T2SS	145	12C	4X6T2FSS	195				
9	9T2F	235	14C	9T2SS	235	14C	4X9T2FSS	290				
15	15T2F	300	14C	15T2SS	300	14C	4X15T2FSS	350				
30	30T2F	660	16C	30T2SS	660	16C	4X30T2FSS	850	55X			
Three Phase—480 Vac Delta Primary 240 Vac Delta Secondary, 60 Hz; UL/cULus Listed												
3	3T5F	120	12C	Via Product Configurator	120	12C	Via Product Configurator	165	54X	2–5% FCBN	115	180
6	6T5F	145	12C		145	12C		195				
9	9T75F	235	14C		235	14C		290				
15	15T75F	300	14C		300	14C		350				
Single Phase—240 x 480 Vac Primary 120/240 Vac Secondary, 60 Hz; UL/cULus Listed												
1	1S1F	21.2	7A	1S1FSS	21.2	7A	Via Product Configurator	48	51X	None	115	180
1.5	1.5S1F	30.1	8A	1.5S1FSS	30.1	8A		55				
2	2S1F	39.1	9A	2S1FSS	39.1	9A		55				
3	3S1F	60	10A	3S1FSS	60	10A		75	52X			
5	5S1F	115	13B	5S1FSS	115	13B		125				
7.5	7S1F	135	13B	7S1FSS	135	13B		150				
10	10S1F	165	13B	10S1FSS	165	13B		180				
15	15S1F	225	15B	15S1FSS	225	15B		390	53X			
Single Phase—480 Vac Primary 120/240 Vac Secondary, 60 Hz; UL/cULus Listed												
3	3S40F	60	10A	3S40FSS	60	10A	4X3S40FSS	75	52X	2–5% FCBN	115	180
5	5S40F	115	13B	5S40FSS	115	13B	4X5S40FSS	125				
7.5	7S40F	135	13B	7S40FSS	135	13B	4X7S40FSS	150				
10	10S40F	165	13B	10S40FSS	165	13B	4X10S40FSS	180				
15	15S40F	225	15B	15S40FSS	225	15B	4X15S40FSS	390	53X			
Single Phase—600 Vac Primary 120/240 Vac Secondary, 60 Hz; UL/cULus Listed												
1	1S51F	21.2	7A	Via Product Configurator	21.2	7A	Via Product Configurator	48	51X	None	115	180
1.5	1.5S51F	30.1	8A		30.1	8A		55				
2	2S51F	39.1	9A		39.1	9A		55				
3	3S4F	60	10A		60	10A		75	52X	2–5% FCBN		
5	5S4F	115	13B		115	13B		125				
7.5	7S4F	135	13B		135	13B		150				
10	10S4F	165	13B		165	13B		180				
15	15S4F	225	15B		225	15B		390	53X			
25	25S4F	300	15B		300	15B		450				
Single Phase—208 Vac Primary 120/240 Vac Secondary, 60 Hz; UL/cULus Listed												
1	1S7F	21.2	7A	Via Product Configurator	21.2	7A	Via Product Configurator	48	51X	None	115	180
1.5	1.5S7F	30.1	8A		30.1	8A		55				
2	2S7F	39.1	9A		39.1	9A		55				
3	Via Product Configura-tor	60	10A		60	10A		75	52X	2–5% FCBN		
5		115	13B		115	13B		125				
7.5		135	13B		135	13B		150				
10		165	13B		165	13B		180				
15		225	15B		225	15B		390	53X			
25		300	15B		300	15B		450				
Single Phase—277 Vac Primary 120/240 Vac Secondary, 60 Hz; UL/cULus Listed												
1	1S8F	21.2	7A	Via Product Configurator	21.2	7A	Via Product Configurator	48	51X	None	115	180
1.5	1.5S8F	30.1	8A		30.1	8A		55				
2	2S8F	39.1	9A		39.1	9A		55				
3	Via Product Configura-tor	60	10A		60	10A		75	52X	2–5% FCBN		
5		115	13B		115	13B		125				
7.5		135	13B		135	13B		150				
10		165	13B		165	13B		180				
15		225	15B		225	15B		390	53X			
25		300	15B		300	15B		450				

Table 14.14: Single-Phase—120/240 Vac Secondary 60 Hz; cULus Listed

kVA	240 x 480 Primary Catalog No.	Weight (lbs) *[18]*	Enclosure*[19]*	600 Primary Catalog No.	Weight (lbs) *[18]*	Enclosure*[19]*	Full Capacity Taps	Degree C Temperature Rise	Insulation Class
0.05	50SV1A	4.2	1A	50SV51A	4.2	1A	None	55	105
0.1	100SV1A	4.5	2A	—	4.5	2A			
0.15	150SV1A	6.2	3A	150SV51A	6.2	3A			
0.25	250SV1B	10.5	4A	250SV51B	10.5	4A		80	130
0.5	500SV1B	13.8	5A	500SV51B	13.8	5A			
0.75	750SV1F	15.5	6A	750SV51F	15.5	6A		115	180

[18] Not for construction, Contact your local Schneider Electric representative for certified prints.
[19] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9
[20] FCBN = Full Capacity Below Normal.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Resin Encapsulated Export Model and Buck Boost Transformers

Single Phase Export Model

These general purpose transformers accommodate voltage systems world wide. Export model transformers 10 kVA and smaller, CE marked in addition to being cULus Listed. For CE marked transformers in other ratings, contact your local Schneider Electric representative for CE marked transformers up to 300 kVA, single and three phase.

Table 14.15: Single-Phase—110 / 220 Vac Secondary; 50/60 Hz; cULus Listed (240 x 480 Vac Primary to 120 / 240 Vac Secondary - 60 Hz only)

kVA	220 x 440 Primary Catalog No.	Weight (lbs)*[21]*	Enclosure*[22]*	Full Capacity Taps	Degree C Temperature Rise	Insulation Class
1	1S67F	21.2	7A	190/200/208/220 x 380/400/416/440	115	180
2	2S67F	39.1	9A			
3	3S67F	55.2	10A			
5	5S67F	135	13B			
7.5	7S67F	165				
10	10S67F	165				

Sealed Single-Phase Buck and Boost

When buck and boost transformers are interconnected as an autotransformer, they can supply small changes in voltage. Wiring diagrams and sizing are available from catalog 7414CT0201 or www.buckboostcalculator.com.
Units can also be used as isolation transformers for:
120 x 240 to 12/24 or 16/32 and 240 x 480 to 24/48 by connecting using the diagram on the nameplate.
NOTE: When used to supply a three-phase four-wire load, the source must be three-phase four-wire.

kVA	120 x 240 Vac Primary 60 Hz		240 x 480 Vac Primary 60 Hz	Weight (lbs)*[21]*	Enclosure*[22]*	Degree C Temperature Rise	Insulation Class
	12/24 Vac Secondary	16/32 Vac Secondary	24/48 Vac Secondary				
0.05	50SV43A	50SV46A	50SV82A	4.2	1A	55	105
0.1	100SV43A	100SV46A	100SV82A	4.5	2A		
0.15	150SV43A	150SV46A	150SV82A	6.2	3A		
0.25	250SV43B	250SV46B	250SV82B	10.5	4A	80	130
0.5	500SV43B	500SV46B	500SV82B	13.8	5A		
0.75	750SV43F	750SV46F	750SV82F	15.5	6A	115	180
1	1S43F	1S46F	1S82F	21.2	7A		
1.5	1.5S43F	1.5S46F	1.5S82F	30.1	8A		
2	2S43F	2S46F	2S82F	39.1	9A		
3	3S43F	3S46F	3S82F	60	See Table 14.16 Enclosure Dimensions, page 14-12.		


Style A—Type 3R Rated


Style B—Type 3R Rated


Style C—Type 3R Rated


Style X—Type 4X Rated

3 kVA Buck Boost

Table 14.16: Enclosure Dimensions

Enclosure Number/ Style		Height		Width		Depth		Mounting
		in.	mm	in.	mm	in.	mm	
1	A	5.00	127	4.47	114	3.44	87	Wall
2		5.50	140	4.47	114	3.44	87	
3		5.00	127	4.85	123	3.75	95	
4		5.50	140	5.23	133	4.06	103	
5		6.19	157	6.19	157	4.69	119	
6		6.69	170	6.19	157	4.69	119	
7		8.13	270	6.94	176	5.31	135	
8		8.25	210	8.68	220	6.56	167	
9		9.56	243	8.68	220	6.56	167	
10		10.50	267	8.62	219	6.50	165	
11		12.56	319	8.62	219	6.50	165	
* 3 kVA Buck Boost		14.5	—	8.62	—	6.5	—	—
12	C	13.50	343	14.75	375	9	229	Wall
13	B	14.75	375	9.75	248	11.75	298	
14	C	14.75	375	19.1	485	2.25	311	
15	B	20.00	508	15	381	13.5	343	
16	C	22.00	559	25	635	13.5	343	
51	X	9.5	24	10	25	7.75	20	
52		12	30	13.75	35	13.75	35	
53		24	61	21.5	55	16.38	42	Floor
54		23	58	25.5	65	13.75	35	
55		31.5	80	31.5	80	16.25	41	

These dimensions are not for construction. Contact you local Schneider Electric representative for certified prints.

Fingersafe™ terminal block cover kits for encapsulated transformers can be used to meet touch-safe requirements.

Enclosure	Kit Catlog Number	Description
7A (1 kVA)	7400ENT9	Terminal Block H1, H2, H3, H4, H5, H6, H7, H8, H9, H10 and X1, X2, X3, X4
9A (2 kVA)	7400ENT11	
10A (3 kVA)	7400ENT11	
13B (5–10 kVA)	7400ENT13	

[21] Not for construction, Contact your local Schneider Electric representative for certified prints.
[22] For enclosure styles, see Table 14.16 Enclosure Dimensions, page 14-12

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.17: NV Three Phase; 60 Hz; 208Y / 120 Vac Secondary[23]

kVA	Type 3R - IP 54 Catalog No.	Type 3R - IP 54 Catalog 304 Stainless Steel	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Weight (lbs) [24]	Enclosure[25]
480 Vac Delta Primary, Aluminum Windings								
15	15T3HNV	Via Product Configurator	6–2.5%2+4–	150	220	2.8	—	—
30	30T3HNV					3.5	340	19E
45	45T3HNV					3.3	510	19E
75	75T3HNV					2.5	1025	22E
112.5	112T3HNV					3.3	1250	24E
150	150T3HNV					2.9	2000	25E

Table 14.18: NV Single Phase; 60 Hz; 120/240 Vac Secondary[23]

kVA	Type 3R - IP 54 Catalog No.	Type 3R - IP 54 Catalog 304 Stainless Steel	Full Capacity Taps	Degree C Temp. Rise	Insulation Class	%IZ	Weight (lbs) [24]	Enclosure[25]
240 x 480 Vac Primary, Aluminum Windings								
15	15S3HNV	Via Product Configurator	480 Vac 6 - 2.5% 2+4- 240 Vac 3 -5% 1+2-	150	220	4.4	230	17E
25	25S3HNV					4.1	310	18E
37.5	37S3HNV					4.4	350	18E
50	50S3HNV					3.1	450	21E
75	75S3HNV					2.9	880	24E
100	100S3HNV					1.7	975	25E



Style E—IP55 Rated

Table 14.19: Enclosure Dimensions and Accessories

Enclosure Number/ Style		Height		Width		Depth		Mount-ting	Wall Mounting Bracket	Ceiling Mounting Bracket	Insula-tion Class °C
		in.	mm	in.	mm	in.	mm				
17	E	27	686	20	508	16	406	Floor	WMB361362	CMB363	220
18	E	30	762	20	508	20	508		WMB363364	CMB363	
19	E	30	762	30	762	20	508		WMB363364	CMB364	
21	E	37	940	30	762	24	610		—	CMB364	
22	E	43.75	1111	32	813	27	686		—	CMB380	
24	E	49.5	1257	35	889	28.5	724		—	CMB381	
25	E	49.5	1257	41	1041	32	813		—	—	
26	E	57.5	1461	41	1041	32	813		—	—	
28	E	60	1524	56	1422	36	914		—	—	
29	E	68	1727	56	1422	36	914		—	—	
30	E	71	1803	48	1219	36	914		—	—	
31	E	74	1880	56	1422	40.5	1029		—	—	

These dimensions are not for construction. Contact your local Schneider Electric representative for certified prints.

[23] Lugs are furnished by customer.
[24] Not for construction, Contact your local Schneider Electric representative for certified prints.
[25] For enclosure styles, see Table 14.9 Enclosure Dimensions and Accessories, page 14-9

© 2025 Schneider Electric
All Rights Reserved
9/29/2025



Sealed, Mini Power-Zone™ Unit Substation

The Square D™ brand Mini Power-Zone™ unit substation from Schneider Electric provides the answer to requirements for a compact unit substation at low amperage ratings.. This complete package yields considerable savings on floor space, installation, and overall cost.

NOTE: Mini Power-Zone unit substations are UL 1062 Listed File E92978 design in a Type 3R enclosure allowing for indoor or outdoor applications. Designed for wall-mounting, the unit substation leverages Schneider Electric components integrated into one device.

- Epoxy resin encapsulated low voltage transformer
- H-frame main circuit breaker
- Secondary main circuit breaker
- Square D panel board or load center allowing for QO™ or QOB™ branch circuit breakers

New!

New MPU solution leverages the latest load center interiors, giving customers more flexibility for branch circuit requirements. Additionally design with a tiered dead front construction. The first dead front allows access to the secondary main circuit breaker, distribution panel board, and the second dead front. The second dead front allows access to the primary main circuit breaker and incoming voltage connection points.

Table 14.20: Distribution System Square D Load Centers (allowing plug-on QO circuit breakers only)

kVA	Catalog No.	Full Capacity Taps[16]	Enclosure	Weight (lbs)	Primary Main Circuit Breaker Rating (A)	Secondary Main Circuit Breaker Rating (A)	Spaces for Branch Circuit Breakers
Single Phase Unit Substation Input: 480 Vac, 18 kAIC; Output: 120 / 240 Vac							
3	MPU3S40F	2–5% FCBN	MPU-A	85	15	15	10
5	MPU5S40F	2–5% FCBN	MPU-A	135	15	30	10
7.5	MPU7S40F	2–5% FCBN	MPU-A	145	20	40	10
10	MPU10S40F	2–5% FCBN	MPU-A	220	30	60	10
15	MPU15S40F	2–5% FCBN	MPU-B	350	60	80	22
25	MPU25S40F	2–5% FCBN	MPU-B	425	100	125	22
Three-Phase Unit Substation Input: 480 Vac 18 kAIC; Output: 208Y / 120 Vac							
15	MPU15T2F	2–5% FCBN	MPU-C	510	40	60	27
22.5	MPU22T2F	2–5% FCBN	MPU-C	670	60	80	27
30	MPU30T2F	2–5% FCBN	MPU-C	695	90	100	27

NOTE: Dimensions should not be used for construction. Contact you local Schneider Electric representative for certified prints.
FCBN = Full Capacity Below Normal

Table 14.21: Bolt-On Circuit Breakers

kVA	Catalog No.				Full Capacity Taps[16]	Enclosure	Weight (lbs)	Primary Main Circuit Breaker Rating (A)	Secon-dary Main Circuit Breaker Rating (A)	Spaces for Branch Circuit Breakers
	18 kAIC		25 kAIC	65 kAIC						
Single-Phase Unit Substation Input: 480 Vac, Output: 120 / 240 Vac										
3	MPUB3S40F	MPUB3S40FSS	MPUB3S40FG	MPUB3S40FJ	2–5% FCBN	MPUB-AA	137	15	15	16
5	MPUB5S40F	MPUB5S40FSS	MPUB5S40FG	MPUB5S40FJ	2–5% FCBN	MPUB-AA	187	15	30	16
7.5	MPUB7S40F	MPUB7S40FSS	MPUB7S40FG	MPUB7S40FJ	2–5% FCBN	MPUB-AA	207	20	40	16
10	MPUB10S40F	MPUB10S40FSS	MPUB10S40FG	MPUB10S40FJ	2–5% FCBN	MPUB-AA	237	30	60	16
15	MPUB15S40F	MPUB15S40FSS	MPUB15S40FG	MPUB15S40FJ	2–5% FCBN	MPZUB-BB	367	60	80	28
25	MPUB25S40F	MPUB25S40FSS	MPUB25S40FG	MPUB25S40FJ	2–5% FCBN	MPZUB-BB	442	100	125	28
Three-Phase Unit Substation Input: 480 Vac, Output 208Y / 120 Vac										
15	MPUB15T2F	MPUB15T2FSS	MPUB15T2FG	MPUB15T2FJ	2–5% FCBN	MPUB-CC	541	40	60	27
22.5	MPUB22T2F	MPUB22T2FSS	MPUB22T2FG	MPUB22T2FJ	2–5% FCBN	MPUB-CC	701	60	80	27
30	MPUB30T2F	MPUB30T2FSS	MPUB30T2FG	MPUB30T2FJ	2–5% FCBN	MPUB-CC	726	90	100	27

Table 14.22: E–Frame Bolt-on Circuit Breakers

kVA	Catalog No.				Full Capacity Taps[16]	Enclosure	Weight (lbs)	Primary Main Circuit Breaker Rating (A)	Secondary Main Circuit Breaker Rating (A)	Spaces for Branch Circuit Breakers
	18 kAIC		25 kAIC	65 kAIC						
Three-Phase Unit Substation Input: 480 Vac, Output 480Y / 277 Vac										
15	MPUE15T1816F	MPUE15T1816FSS	MPUE15T1816FG	MPUE15T1816FJ	2–5% FCBN	MPUB-CC	541	40	60	12
30	MPUE30T1816F	MPUE30T1816FSS	MPUE30T1816FG	MPUE30T1816FJ	2–5% FCBN	MPUB-CC	726	90	100	12

Table 14.23: Enclosure Dimensions and Accessories

Enclosure Number/ Style	Height		Width		Depth		Mounting
	in.	mm	in.	mm	in.	mm	
MPU-A	32.90	836.0	14.00	356	11.80	300	Wall
MPU-B	43.20	1097.0	21.00	533	13.50	343	Wall
MPU-C	45.20	1148.0	27.40	696	13.50	343	Wall
MPU-AA	43.20	—	16.00	—	11.75	—	Wall
MPU-BB	51.00	—	27.40	—	13.50	—	Wall
MPU-CC	51.20	—	27.40	—	13.50	—	Wall

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Type T and Type TF

Type T transformers are designed with low impedance windings for excellent voltage regulation and can accommodate the high inrush current associated with contactors, starters, solenoids, and relays. Type T transformers are manufactured using the most advanced insulating materials and are the best choice if size and cost are of concern.

Type TF transformers include factory-installed primary and secondary fuse blocks. Type TF transformers consist of two primary fuse blocks and one secondary fuse block. The primary includes rejection-style clips to increase the AIC ratings for the fuses. Since the fuse blocks are mounted on the top of the transformer, Type TF transformers are interchangeable with Type T transformers except for their increased height.

Selection Guide

1. Determine the inrush and sealed VA of each coil in the control circuit and the VA of all other components.
2. Total the **sealed** VA of all operating coils and the VA of all other loads. (This determines the minimum VA size required for the circuit.)
3. Total the **inrush** VA of all coils that are starting at the same time and all loads and coils that are running.
4. Locate a value in the VA column of Table 14.24 Regulation Chart for Type T, page 14-15, shown below, that is **equal to** or **greater than** the value calculated in step 2.
5. In the VA row selected in step 4, find the inrush value under the appropriate voltage regulation column of Table 14.24 Regulation Chart for Type T, page 14-15, shown below. If this value is **greater than** the calculated value from step 3, this is the correct transformer VA rating.

   If the inrush value on the selected VA row is **not greater than** the calculated value from step 3, use the next higher transformer VA rating, that is, the rating on the next row.

If your supply voltage is stable and fluctuates less than 5%, Schneider Electric recommends you use the 90% secondary voltage column. If your supply voltage is not stable and fluctuates more than 10% we recommend you use the 95% secondary voltage column. We recommend that you never use the 85% secondary voltage column since magnetic devices lose life expectancy if they are continuously started at 85% of rated voltage.

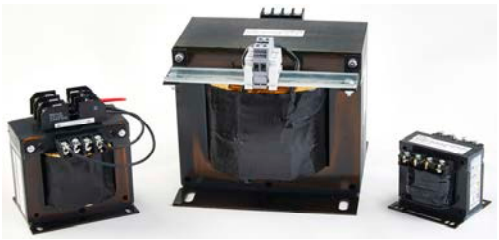


Table 14.24: Regulation Chart for Type T

VA	Inrush VA @ 20% power factor			Inrush VA @ 40% power factor		
	95% Secondary Voltage	90% Secondary Voltage	85% Secondary Voltage	95% Secondary Voltage	90% Secondary Voltage	85% Secondary Voltage
50	193	266	339	151	215	282
75	271	396	20	210	318	430
100	339	499	659	266	404	549
150	666	893	1120	529	731	942
200	588	815	1041	459	659	866
250	1416	1910	2388	1057	1494	1936
300	1634	2184	2709	1194	1681	2169
350	1894	2592	3261	1392	2005	621
500	3197	4104	4981	2374	3195	4019
750	3770	5515	7231	2887	4391	5945
1000	6587	9079	11430	4706	6886	9051
1500	19324	23983	28607	15066	19361	23756
2000	31384	38777	6161	24794	31630	38667
3000	26539	39934	52713	19355	30721	42216
5000	53111	85265	116277	39368	66309	93882

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.25: 240 x 480 V Primary, 120 V Secondary; 230 x 460 V Primary, 115 V Secondary; 220 x 440 V Primary, 110 V Secondary

VA		Type T	Type TF	Weight lbs.	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
25	25	9070T25D1	—	2.5	2.58	66	4.00	102	3.00	76	3.09	79	FSC1
50	50	9070T50D1	9070TF50D1										
75	75	9070T75D1	9070TF75D1	3.8	2.89	73	4.18	106	3.38	86	3.34	85	
100	100	9070T100D1	9070TF100D1										
150	150	9070T150D1	9070TF150D1	5.5	3.20	81	4.50	114	3.75	95	3.59	91	
200	200	9070T200D1	9070TF200D1										
250	160	9070T250D1	9070TF250D1	7.1							5.30	135	FSC2
300	200	9070T300D1	9070TF300D1	8.5							4.74	120	
350	250	9070T350D1	9070TF350D1	10.5	3.84	98	5.13	130	4.50	114	5.11	130	
500	300	9070T500D1	9070TF500D1	11.9							5.49	139	
750	500	9070T750D1	9070TF750D1	11.0	4.51	115	5.80	147	5.25	133	5.61	143	
1000	630	9070T1000D1	9070TF1000D1	20.6							6.30	160	
1500	1000	9070T1500D1	9070TF1500D1	34.0	6.17	157	7.46	190	7.06	179	5.92	150	
2000	1500	9070T2000D1	9070TF2000D1	47.0							7.17	182	
3000	2000	9070T3000D1	—	60.0	8.75	222	—	—	9.00	229	7.24	184	
5000	3000	9070T5000D1	—	89.0							9.15	232	

Table 14.26: 208 Vac Primary, 120 Vac Secondary

VA		Type T	Type TF	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D3	9070TF50D3	2.5	2.58	66	4.00	102	3.00	76	3.09	79	FSC1
100	100	9070T100D3	9070TF100D3	3.8	2.89	73	4.18	106	3.38	86	3.34	85	
150	150	9070T150D3	9070TF150D3	5.5	3.20	81	4.50	114	3.75	95	3.59	91	
200	200	9070T200D3	9070TF200D3										
250	160	9070T250D3	9070TF250D3	7.1							5.30	135	FSC2
300	200	9070T300D3	9070TF300D3	8.5							4.74	120	
350	250	9070T350D3	9070TF350D3	10.5	3.84	98	5.13	130	4.50	114	5.11	130	
500	300	9070T500D3	9070TF500D3	11.9							5.49	139	
750	500	9070T750D3	9070TF750D3	11.0	4.51	115	5.80	147	5.25	133	5.61	143	
1000	630	9070T1000D3	9070TF1000D3	20.6							6.30	160	
1500	1000	9070T1500D3	9070TF1500D3	34.0	6.17	157	7.46	190	7.06	179	5.92	150	
2000	1500	9070T2000D3	9070TF2000D3	47.0							7.17	182	
3000	2000	9070T3000D3	—	60.0	8.75	222	—	—	9.00	229	7.24	184	
5000	3000	9070T5000D3	—	89.0							9.15	232	

Table 14.27: 600 Vac Primary, 120 Vac Secondary

VA		Type T	Type TF	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D5	9070TF50D5	2.5	2.58	66	4.00	102	3.00	76	3.09	79	FSC1
100	100	9070T100D5	9070TF100D5	3.8	2.89	73	4.18	106	3.38	86	3.34	85	
150	150	9070T150D5	9070TF150D5	5.5	3.20	81	4.50	114	3.75	95	3.59	91	
200	200	9070T200D5	9070TF200D5										
250	160	9070T250D5	9070TF250D5	7.1							5.30	135	FSC2
300	200	9070T300D5	9070TF300D5	8.5							4.74	120	
350	250	9070T350D5	9070TF350D5	10.5	3.84	98	5.13	130	4.50	114	5.11	130	
500	300	9070T500D5	9070TF500D5	11.9							5.49	139	
750	500	9070T750D5	9070TF750D5	11.0	4.51	115	5.80	147	5.25	133	5.61	143	
1000	630	9070T1000D5	9070TF1000D5	20.6							6.30	160	
1500	1000	9070T1500D5	9070TF1500D5	34.0	6.17	157	7.46	190	7.06	179	5.92	150	
2000	1500	9070T2000D5	9070TF2000D5	47.0							7.17	182	
3000	2000	9070T3000D5	—	60.0	8.75	222	—	—	9.00	229	7.24	184	

Table 14.28: 277 Vac Primary, 120 Vac Secondary

VA		Type T	Type TF*[1]*	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
25	25	9070T25D4	—	2.5	2.58	66	—	—	3.00	76	3.09	79	FSC1
50	50	9070T50D4	—										
75	75	9070T75D4	—	3.8	2.89	73	—	—	3.38	86	3.34	85	
100	100	9070T100D4	—										
150	150	9070T150D4	—	5.5	3.20	81	—	—	3.75	95	3.59	91	
200	200	9070T200D4	—										
250	160	9070T250D4	—	7.1							5.30	135	FSC2
300	200	9070T300D4	—	8.5							4.74	120	
350	250	9070T350D4	—	10.5	3.84	98	—	—	4.50	114	5.11	130	
500	300	9070T500D4	—	11.9							5.49	139	
750	500	9070T750D4	—	11.0	4.51	115	—	—	5.25	133	5.61	143	
1000	630	9070T1000D4	—	20.6							6.30	160	
1500	1000	9070T1500D4	—	34.0	6.17	157	—	—	7.06	179	5.92	150	
2000	1500	9070T2000D4	—	47.0							7.17	182	

[1] TF units are design for line to line voltages on the primary, 277 Vac is a line to neutral voltage.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.29: 240 x 480 V Primary, 120/240 V Secondary; 230 x 460 V Primary, 115/230 V Secondary; 220 x 440 V Primary, 110/220 V Secondary

VA		Type T	Type TF[2]	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D31	9070TF50D31	2.5	2.58	66	4.00	102	3.00	76	3.09	79	FSC1
100	100	9070T100D31	9070TF100D31	3.8	2.89	73	4.18	106	3.38	86	3.34	85	
150	150	9070T150D31	9070TF150D31	5.5	3.20	81	4.50	114	3.75	95	3.59	91	
200	200	9070T200D31	9070TF200D31										
250	160	9070T250D31	9070TF250D31	7.1							5.30	135	FSC2
500	300	9070T500D31	9070TF500D31	11.9	3.84	98	5.13	130	4.50	114	5.49	139	
750	500	9070T750D31	9070TF750D31	11.0	4.51	115	5.80	147	5.25	133	5.61	143	
1000	630	9070T1000D31	9070TF1000D31	20.6							6.30	160	
1500	1000	9070T1500D31	9070TF1500D31	34.0	6.17	157	7.46	190	7.06	179	5.92	150	
2000	1500	9070T2000D31	9070TF2000D31	47.0							7.17	182	
3000	2000	9070T3000D31	—	60.0	8.75	222	—	—	9.00	229	7.24	184	
5000	3000	9070T5000D31	—	89.0							9.15	232	

Table 14.30: 600 Vac Primary, 120/240 Vac Secondary

VA		Type T	Type TF[2]	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D37	9070TF50D37	2.5	2.58	66	4.00	102	3.00	76	3.09	79	FSC1
100	100	9070T100D37	9070TF100D37	3.8	2.89	73	4.18	106	3.38	86	3.34	85	
150	150	9070T150D37	9070TF150D37	5.5	3.20	81	4.50	114	3.75	95	3.59	91	
200	200	9070T200D37	9070TF200D37									91	
250	160	9070T250D37	9070TF250D37	7.1							5.30	135	FSC2
500	300	9070T500D37	9070TF500D37	11.9	3.84	98	5.13	130	4.50	114	5.49	139	
750	500	9070T750D37	9070TF750D37	11.0	4.51	115	5.80	147	5.25	133	5.61	143	
1000	630	9070T1000D37	9070TF1000D37	20.6							6.30	160	
1500	1000	9070T1500D37	9070TF1500D37	34.0	6.17	157	7.46	190	7.06	179	5.92	150	
2000	1500	9070T2000D37	9070TF2000D37	47.0							7.17	182	
3000	2000	9070T3000D37	—	60.0	8.75	222	—	—	9.00	229	7.24	184	
5000	3000	9070T5000D37	—	89.0							9.15	232	

Table 14.31: 380/400/415 Vac Primary, 115/230 Vac Secondary

VA		Type T	Type TF	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D33	—	2.5	2.58	66	—	—	3.00	76	3.09	79	FSC1
100	100	9070T100D33	—	3.8	2.89	73	—	—	3.38	86	3.34	85	
150	150	9070T150D33	—	5.5	3.20	81	—	—	3.75	95	3.59	91	
200	200	9070T200D33	—										
250	160	9070T250D33	—	7.1								135	FSC2
300	200	9070T300D33	—	8.5	3.84	98	—	—	4.50	114	4.74	120	
350	250	9070T350D33	—	10.5							5.11	130	
500	300	9070T500D33	—	11.9							5.49	139	
750	500	9070T750D33	—	11.0	4.51	115	—	—	5.25	133	5.61	143	
1000	630	9070T1000D33	—	20.6							6.30	160	
1500	1000	9070T1500D33	—	34.0	6.17	157	—	—	7.06	179	5.92	150	
2000	1500	9070T2000D33	—	47.0							7.17	182	
3000	2000	9070T3000D33	—	60.0	8.75	222	—	—	9.00	229	7.24	184	
5000	3000	9070T5000D33	—	89.0							9.15	232	

Field Installed Fuse Blocks—Design for Line to Line Primary Voltages and Line to Neutral Secondary Voltages

Table 14.32: Accessories

Catalog No.	Voltage Codes			Description	Order Qty
Fuse Kit					
—	D1, D2, D3, D4, D5, D13, D14,D15, D23, D31, D33, D37	D20, D32	D19, D50	—	—
9070FB3A	T25–T200	T25–T150	—	3-pole fuse block for primary and secondary fusing, accommodates 1-1/2 x 13/32 in. midget fuse (2 rejection and 1 non-rejection)	1
9070FB3B	T250–T3000	T250–T2000	T25–T2000		
9070FB2A	T25–T200	T25–T150	—	2-pole fuse block for primary fusing, accommodates 1-1/2 x 13/32 in. midget fuse (2 rejection)	
9070FB2B	T250–T3000	T250–T2000	T25–T2000		
9070SF25A	T25–T200	T25–T150	—	Secondary fuse clips accommodates 1-1/4 x 1/4 in. fuse	10
9070SF25B	T250–T3000	T250–T2000	T25–T2000		
9070SF41A	T25–T200	T25–T150	—	Secondary fuse clips accommodates 1-1/2 x 13/32 in. fuse	
9070SF41B	T250–T3000	T250–T2000	T25–T2000		
9070FB1A	T25–T200	T25–T150	—	Secondary fuse block accommodates 1-1/4 x 1/4 in. fuse	1
9070FB1B	T250–T3000	T250–T2000	T25–T2000		
9070FP1	—	—	—	Fuse puller for TF and FB kits	10

Table 14.33: 208/230/460 Vac Primary, 115 Vac Secondary

VA		Type T	Type TF	Weight	Height				Width		Depth		Accesory Finger-safe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D20	9070TF50D20	4.0	2.89	73	4.18	106	3.38	86	3.34	85	FSC1
100	100	9070T100D20	9070TF100D20	5.5	3.20	81	4.50	114	3.75	95	3.59	91	
150	150	9070T150D20	9070TF150D20										
250	160	9070T250D20	9070TF250D20	10.5	3.84	98	5.13	130	4.50	114	4.74	120	FSC2

[2] TF designed for line to line primary and line to neutral secondary. If secondary connected in series, fuse block should be disconnected.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.33 208/230/460 Vac Primary, 115 Vac Secondary (cont'd.)

VA		Type T	Type TF	Weight	Height				Width		Depth		Accesory Fingersafe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
300	200	9070T300D20	9070TF300D20								5.11	130	
350	250	9070T350D20	9070TF350D20	11.9							5.49	139	
500	300	9070T500D20	9070TF500D20	11.0	4.51	115	5.80	147	5.25	133	5.61	143	
750	500	9070T750D20	9070TF750D20	20.6							6.30	160	
1000	630	9070T1000D20	9070TF1000D20	34.0	6.17	157	7.46	190	7.06	179	5.92	150	
1500	1000	9070T1500D20	9070TF1500D20	47.0							7.17	182	

Table 14.34: 240/416/480/600 Vac Primary, 99/120/130 Vac Secondary; 230/400/460/575 Vac Primary, 95/115/125 Vac Secondary; 220/380/440/550 Vac Primary, 90/110/120 Vac Secondary; 208/360/416/520 Vac Primary, 85/104/115 Vac Secondary

VA		Type T	Type TF	Weight	Height				Width		Depth		Accesory Fingersafe Covers
					Type T		Type TF						
UL/CSA/NOM	CE	Catalog No.			in.	mm	in.	mm	in.	mm	in.	mm	
50	50	9070T50D50	9070TF50D50	4.0	2.89	73	4.19	106	3.38	86	4.43	113	FSC23
100	100	9070T100D50	9070TF100D50	7.1	3.20	81	4.50	114	3.75	95	4.70	119	
150	150	9070T150D50	9070TF150D50	8.5	3.84	98	5.14	131	4.50	114	4.74	120	
250	160	9070T250D50	9070TF250D50	10.5							5.11	130	
300	200	9070T300D50	9070TF300D50	11.9							5.49	139	
350	250	9070T350D50	9070TF350D50	11.0	4.51	115	5.81	148	5.25	133	5.61	143	
500	300	9070T500D50	9070TF500D50										
750	500	9070T750D50	9070TF750D50	20.6							6.30	160	
1000	630	9070T1000D50	9070TF1000D50	34.0	6.17	157	7.47	190	7.06	179	5.92	150	
1500	1000	9070T1500D50	9070TF1500D50	47.0							7.17	182	
2000	1500	9070T2000D50	9070TF2000D50	60.0	7.63	194	8.93	227	9.00	229	6.38	162	

Table 14.35: Accessories

Catalog No.	Voltage Codes			Description	Order Qty
—	D1, D2, D3, D4, D5, D13, D14,D15, D23, D31, D33, D37	D20, D32	D19, D50	—	—
9070FSC1	T25–T200	T25–T150	—	2 covers per kit	10
9070FSC2	T250–T5000	T250–T5000	—		
9070FSC23	—	—	T25–T5000		

Table 14.36: 240 x 480 Vac Primary, 24 Vac Secondary

VA		Type T	Weight	Height		Width		Depth		Accesory Fingersafe Covers
				Type T						
UL/CSA/NOM	CE	Catalog No.		in.	mm	in.	mm	in.	mm	
50	50	9070T50D2	2.5	2.58	66	3.00	76	3.09	79	FSC1
75	75	9070T75D2	3.8	2.89	73	3.38	86	3.34	85	
100	100	9070T100D2								
150	150	9070T150D2	5.5	3.20	81	3.75	95	3.59	91	
200	200	9070T200D2								
250	160	9070T250D2	7.1					5.30	135	FSC2
300	200	9070T300D2	8.5	3.84	98	4.50	114	4.74	120	
500	300	9070T500D2	11.9					5.49	139	
750	500	9070T750D2	11.0	4.51	115	5.25	133	5.61	143	
1000	630	9070T1000D2	20.6					6.30	160	

Table 14.37: 208 Vac Primary, 24 Vac Secondary

VA		Type T	Weight	Height		Width		Depth		Accesory Fingersafe Covers
				Type T						
UL/CSA/NOM	CE	Catalog No.		in.	mm	in.	mm	in.	mm	
50	50	9070T50D14	2.5	2.58	66	3.00	76	3.09	79	FSC1
100	100	9070T100D14	3.8	2.89	73	3.38	86	3.34	85	
150	150	9070T150D14	5.5	3.20	81	3.75	95	3.59	91	
200	200	9070T200D14								
250	160	9070T250D14	7.1					5.30	135	FSC2

Table 14.38: 120 x 240 Vac Primary, 24 Vac Secondary

VA		Type T	Weight	Height		Width		Depth		Accesory Fingersafe Covers
				Type T						
UL/CSA/NOM	CE	Catalog No.		in.	mm	in.	mm	in.	mm	
50	50	9070T50D23	2.5	2.58	66	3.00	76	3.09	79	FSC1
75	75	9070T75D23	3.8	2.89	73	3.38	86	3.34	85	
100	100	9070T100D23								
150	150	9070T150D23	5.5	3.20	81	3.75	95	3.59	91	
200	200	9070T200D23								
250	160	9070T250D23	7.1					5.30	135	FSC2
350	250	9070T350D23	10.5	3.84	98	4.50	114	5.11	130	
500	300	9070T500D23	11.9					5.49	139	
750	500	9070T750D23	11.0	4.51	115	5.25	133	5.61	143	
1000	630	9070T1000D23	20.6					6.30	160	

Table 14.39: 120 Vac Primary, 12/24 Vac Secondary

VA		Type T	Weight	Height		Width		Depth		Accesory Fingersafe Covers
				Type T						
UL/CSA/NOM	CE	Catalog No.		in.	mm	in.	mm	in.	mm	
50	50	9070T50D13	2.5	2.58	66	3.00	76	3.09	79	FSC1
75	75	9070T75D13	3.8	2.89	73	3.38	86	3.34	85	
100	100	9070T100D13								
150	150	9070T150D13	5.5	3.20	81	3.75	95	3.59	91	
200	200	9070T200D13								

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Table 14.39 120 Vac Primary, 12/24 Vac Secondary (cont'd.)

VA		Type T	Weight	Height Type T		Width		Depth		Accesory Fingersafe Covers
UL/CSA/NOM	CE	Catalog No.		in.	mm	in.	mm	in.	mm	
250	160	9070T250D13	7.1					5.30	135	FSC2
300	200	9070T300D13	8.5	3.84	98	4.50	114	4.74	120	
500	300	9070T500D13	11.9					5.49	139	
750	500	9070T750D13	11.0	4.51	115	5.25	133	5.61	143	
1000	630	9070T1000D13	20.6					6.30	160	

Table 14.40: 208/240/277/380/480 Vac Primary, 24 Vac Secondary

VA		Type T	Weight	Height Type T		Width		Depth		Accesory Fingersafe Covers
UL/CSA/NOM	CE	Catalog No.		in.	mm	in.	mm	in.	mm	
50	50	9070T50D19	4.0	2.89	106	3.38	86	3.34	85	FSC23
75	75	9070T75D19	5.5							
100	100	9070T100D19		3.20	114	3.75	95	3.59	91	
150	150	9070T150D19								
200	200	9070T200D19	8.5					5.30	135	
250	160	9070T250D19	10.5	3.84	130	4.50	114	4.74	120	
500	300	9070T500D19	11.0	4.51	147	5.25	133	5.61	143	



Transformer disconnects are available in NEMA Type 1 Standard, NEMA Type 12 Standard, and NEMA Type 1 Mini.

Transformer Disconnects for NEMA Type 1 and Type 12 Enclosures

Square D brand transformer disconnects mount inside or outside a control system enclosure. The transformer disconnect being connected directly to the 480 Vac system controls power for auxiliary, single-phase loads when the main three-phase disconnect is either ON or OFF. The transformer disconnect is normally wired to the line side of the control panel's main disconnect.

This convenient source of 120 Vac power can be used for auxiliary or isolated loads, such as panel lighting, portable power tools, and programmable controller equipment.

Units consist of copper-wound transformers, a disconnect switch, and primary and secondary fuse blocks. All blocks are installed in NEMA Type 1 or Type 12 enclosures.

Transformer disconnects are UL Listed. Use Square D brand Type TF industrial control transformers and Square D brand disconnect switches.

Multiple enclosure options and accessories are available. See catalog 9070CT0301 or contact your local Schneider Electric representative or distributor.

- Standard NEMA Type 1
- Mini NEMA Type 1
- Compact NEMA Type 1
- NEMA Type 12

Contact local Schneider Representative for catalog number and quotation.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025



Power-Cast™ II



Liquid Filled Pad Mounted



Liquid Filled Substation



Power-Dry™ II

Medium Voltage Distribution Transformers

In 2010 Schneider Electric released energy efficient transformers based on the Department of Energy (DOE) 10 CFR Part 431 Energy Conservation program for Commercial Equipment. On April 18, 2013 the United States Department of Energy (DOE) issued its final ruling on transformer efficiency for liquid-filled and dry-type distribution transformers. The ruling impacts single phase (10 kVA to 833 kVA) and three phase (15 kVA to 2,500 kVA). Distribution transformers manufactured in, or imported into the U.S. and its territories on or after January 1, 2016 are required to comply with the new DOE standards. Schneider Electric medium voltage transformers provide the solution to help end users to comply with this DOE ruling. Our commitment is for you to meet DOE compliance, improve energy efficiency, and create a positive impact on the environment by updating to our energy efficient products.

Table 14.41: Standard Efficiency Levels for Liquid Immersed Distribution Transformers

Single Phase	
kVA	Efficiency %
10	98.7
15	98.82
25	98.95
37.5	99.05
50	99.11
75	99.19
100	99.25
167	99.33
250	99.39
333	99.43
500	99.49
667	99.52
833	99.55
—	—

Three Phase	
kVA	Efficiency %
—	—
—	—
45	98.92
75	99.03
112.5	99.11
150	99.16
225	99.23
300	99.27
500	99.35
750	99.4
1000	99.43
1500	99.48
2000	99.51
2500	99.53

All Efficiency values are at 50% of nameplate-rated load, determined according to the DOE Test Procedure 10 CFR 431, Subpart K, Appendix A.

Table 14.42: Standard Levels for Medium Voltage Dry Type Distribution Transformers

kVA	Single Phase			kVA	Three Phase		
	20-45kV BIL Efficiency %	46-95 kV BIL Efficiency %	>/ 96 kV BIL Efficiency %		20-45kV BIL Efficiency %	46-95 kV BIL Efficiency %	>/ 96 kV BIL Efficiency %
15	98.1	97.86	—	45	98.1	97.86	—
25	98.33	98.12	—	75	98.33	98.13	—
37.5	98.49	98.3	—	112.5	98.52	98.36	—
50	98.6	98.42	—	150	98.65	98.51	—
75	98.73	98.57	98.53	225	98.82	98.69	98.57
100	98.82	98.67	98.63	300	98.93	98.81	98.69
167	98.96	98.83	98.8	500	99.09	98.99	98.89
250	99.07	98.95	98.91	750	99.21	99.12	99.02
333	99.14	99.03	98.99	1000	99.28	99.2	99.11
500	99.22	99.12	99.09	1500	99.37	99.3	99.21
667	99.27	99.18	99.15	2000	99.43	99.36	99.28
833	99.31	99.23	99.2	2500	99.47	99.41	99.33

NOTE: BIL means Basic Impulse Level.

NOTE: All Efficiency values are at 50% of nameplate-rated load, determined according to the DOE Test Procedure 10 CFR 431, Subpart K, Appendix A.

© 2025 Schneider Electric
All Rights Reserved
9/29/2025



Style D, NEMA 1 Rated



Style F—NEMA 1 Rated

General Purpose Dry Type Medium Voltage Transformers

All Transformers are built with 220 C Insulation and 150 C Temperature Rise

Optional Temperature Rise of 115 C and 80 C.

Aluminum windings are standard, with an option for Copper Windings

Standard high voltage taps: 4-2.5%, 2FCAN and 2FCBN. Optional 4-2.5% FCBN

1,201–15,000 Vac Single-Phase Indoor Transformers

Enclosure Dimensions will be available with Product Selector output.

Lugs: Furnished by customer.

General Purpose Power-Dry™ II Stand Alone Dry Type Medium Voltage Transformers

Now Supported via product selector:

- Three Phase – 112.5 kVA to 3000 kVA
- Single Phase – 167 kVA to 333k VA
- Aluminum or Copper Windings, 220°C Insulation with 150°C default temperature rise with options for 115°C or 80°C rise

Enclosure is for indoor use only, contact local Schneider Electric representation for outdoor applications.

Primary Voltages 1201 V to 15 KV with taps 2-2.5% FCAN, 2-2.5% FCBN

- 2.4 kV Class @ 30 kV BIL
- 5 kV Class @ 30 kV BIL
- 15 kV Class @ 60 kV BIL

Secondary Voltages:


- Three Phase: 208Y/120, 480Y/277, 240 Delta, 480 Delta, 600 Delta
- Single Phase: 120/240, 277

All secondary voltages are at 10 kV BIL

© 2025 Schneider Electric
All Rights Reserved
9/29/2025

Section 15
Motor Control Centers





Model 6 Unit



Model 6 Motor Control Center

Structure and Unit Features 15-2

Features, Merchandised Units 15-2
Model 6 Structure Features 15-2
Model 6 Arc Resistant 15-2
Model 6 ArcBlok 15-2
Model 6 Unit Features 15-3
Intelligent Motor Control Center—Model 6 iMCC 15-3
Merchandised Units (shipment in as low as 3 days) 15-4
Combination Starter Units Catalog Numbering System 15-4

MCC Units 15-5

Combination Starter Units 15-5
Combination Starters Units with Motor Circuit Protector Disconnects 15-5
Combination Starter Units with Fusible Switch Disconnects 15-6
Compac™ 6 Combination Starter Units with Motor Circuit Protector Disconnects 15-7
Compac™ 6 Combination Starter Units with Fusible Switch Disconnects 15-7
Branch Feeder Units 15-8
Circuit Breaker Branch Feeder Units 15-8
Fusible Branch Feeder Units 15-8
Model 6 Blank Doors 15-8

Overview

Designed and manufactured to tackle the toughest power and process control challenges, the Model 6 Motor Control Center features industry-finest innovations that provide unmatched performance, high reliability, and low maintenance. The Model 6 Motor Control Center has integrated industry-leading components into the smallest and most flexible footprint possible to meet your power, control, and automation needs. The Model 6 offers superior quality, increased uptime, and features that improve the protection of your personnel and facility from electrical safety hazards.


© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Model 6 Motor Control Center

Model 6 Structure Features

- Horizontal main bus uses captive splice bar assembly; allows splicing without removing units
- Horizontal bus is located at the top of the structure for easy installation, inspection and maintenance
- Available ampacity 600 A, 800 A, 1200 A, 2000 A, 2500 A, and 3200 A
- Sliding non-conductive horizontal bus barrier
- 300 A, 600 A, and 1200 A vertical bus
- Vertical bus openings on 3-inch centers
- Optional automatic vertical bus shutters are available
- Base mounting channel includes lever notches for ease of alignment
- Full depth vertical wireway available, either 4-inch or 9-inch width
- Vertical ground bus is standard

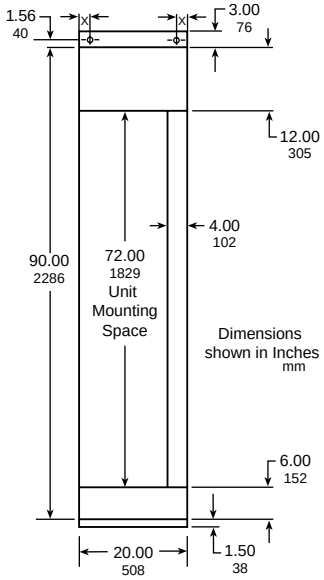

20-in. (508 mm)-wide Section
with Standard Vertical Wireway

Model 6 Arc Resistant

The Model 6 Arc Resistant Enclosure provides reliable arc flash containment through passive technology and design and has been witnessed and verified by UL for design and performance to the ANSI/IEEE C37.20.7 standard. Most of the standard offer configurations and units are available, making the Model 6 Arc Resistant MCC the industry's most complete offer.

Certification and Validation:

- Tested and certified performance to the industry's Arc Resistant Standard (ANSI/IEEE C37.20.7)
- Internal arc testing validated and witnessed by UL
- Industry's highest MCC arc duration rating of 100 milliseconds (6 Cycles)

Technical Specifications and Highlights:

- Up to 65 kA at 600 VAC Rated
- Accessibility Type 2A
- Main bus up to 2000 A amps
- Optional insulated bus (Epoxy or Heat Shrink)
- Optional automatic bus shutters
- Optional exhaust plenums
- Reinforced enclosure: 12 gage steel doors and covers, additional fasteners and hinges
- Reinforced frame with additional internal supports
- Pathways inside the enclosure manage arc by-products and pressure
- iMCC remote monitoring and controlling
- MasterPact type LF (designed to limit arc energy) circuit breakers are available in upstream gear



Model 6 ArcBlok

The Square D™ brand Model 6 Low Voltage Motor Control Center (MCC) with ArcBlok™ by Schneider Electric™ is a game changer in electrical equipment protection and safety-related work practices. With ArcBlok arc isolation, the line side conductors are fully enclosed inside a cable vault, which has been tested for the ANSI/IEEE C37.20.7 requirements for arc containment. Not just a barrier, ArcBlok reduces the chance that an arc flash could occur and reduces and contains the arc energy if it does. Sensors inside the compartment continuously take thermal readings and communicate those to a mobile device, while maintenance personnel stand outside the arc flash zone to review.

Build features include:

- Steel barriers
- Lifting handles
- Bolts face outward for easy alignment
- Interior barriers separate phases
- Thermal sensors communicate data
- Absence of voltage tester
- Vents direct arc flash energy to minimize impact

Technical Details

- ArcBlok MCC: 100 kA at 208, 240 and 480 Vac; 50 kA at 600 Vac , up to 1200 A
- Line side testing was UL® witnessed in accordance with ANSI/IEEE C37.20.7-2017
- Model 6 MCCs are Listed to UL845 Standard and Certified to Canadian Standard C22.2 No. 254 and Mexican Standard NOM-003-SCFI-2014 (NMX-J-515-ANCE)
- PowerPact™ P Molded Case Circuit Breakers with ArcBlok Technology are Listed to the UL489 Standard and Certified to Canadian Standard C22.2 No. 5

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Model 6

Model 6 Unit Features

- Metal operator handle, color coded for clear indication of disconnect position (including “Tripped”)
- Twin-handle cam mechanism standard on all plug-on units (except Compac™ 6)
- Rugged unit construction features solid rear sides and hinged bottom plates
- Forward tilted pull-apart control terminal blocks standard with NEMA Type B or C wiring
- Starter units available with Class 8536 Type S NEMA or D-Line IEC
- Available overload relays on starter include: melting alloy, Motor Logic™, and TeSys™ T
- Control station plate for pilot devices is mounted on front of unit
- Easily accessible control transformer
- Starter mounted on right-hand side of unit, adjacent to wireway, for ease of cable termination

Table 15.1: Available units include:

- Automation equipment
- Altivar™ AC drives
- Altistart™ soft starts
- Surge Protection Device (SPD) units
- PowerLogic™ circuit monitor and power meter
- Compac 6 starters and branch feeders
- Reduced voltage starters
- Distribution transformers and panelboards
- 3–inch accessory units
- Empty mounting units
- MasterPact™ drawout main circuit breakers
- Master terminal compartments
- Automatic transfer switches
- Full voltage non-reversing
- Full voltage reversing
- Circuit breaker branch feeders
- Fusible switch branch feeders
- Full voltage 2-speed
- Programmable logic controllers
- Incoming devices
- Tie breakers

Intelligent Motor Control Center—Model 6 iMCC

Maximize customer value with the industry’s most comprehensive energy and asset management capabilities.

Standard Architectures

SIMPLE, standardized network designs create consistency and familiarity, reduce changes, accelerate startup and commissioning, and ultimately drive efficiency in existing operations and future expansions.

Reduced Lead Times

FASTER quotations, drawings, pricing, submittals, and manufacturing allow for shorter cycle times and increased flexibility to make changes later in the project as designs mature and requirements change.

Ethernet Communications

OPEN protocols in Modbus™ TCP and EtherNet/IP eliminate expensive proprietary software, hardware, and services. Both protocols provide the speed, reliability, and network services to easily and efficiently manage the entire network. Ethernet-based networks easily integrate with business systems for management across the enterprise.

Integrated Wonderware Solution

COMPLETE Wonderware solution allows the end user to perform comprehensive asset and energy management through simple, organized, and role-based screens. Power and process data can be viewed in real time or in trended report, which increases user awareness and delivers actionable data. Local or remote configuration, monitoring, and control provides optimal flexibility. Maximizing uptime, slashing troubleshooting, and delivering true predictive maintenance strategies become a reality with all the right information at the right time. Seamless integration into enterprise-level Invensys-based SCADA/DCS systems will save countless hours of unnecessary programming, engineering, and troubleshooting during both startup and operation.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Merchandised Units (shipment in as low as 3 days)

Model 6 Industrial Package units (white) are available for ordering by catalog number. A listing of types available by quick shipment may be found on the following pages. This limited offering includes popular combinations of types and options. Catalog numbers consist of class number (8998), disconnect and device types, horsepower or ampacity ratings and options (for example, 8998SBA001XFTMA). See table below. All units are UL Listed.

Combination Starter Units Catalog Numbering System

Units rated as follows:

- Model 6 Industrial Package, 480 V, 60 Hz, NEMA 12 enclosure
- Type 1B wiring, 100,000 AIR rating, 1 N.O./1 N.C. auxiliary interlock on each contactor

Table 15.2: Numbering System *[1]*

First	Second	Third	Fourth	Fifth	Sixth	Seventh	Eighth
8998	S	B	A	005	A	FT	MA
Class	**Type**	**Disconnect**	**Device**	**Motor Hp**	**Pilot Device Function**	**Control Power**	**Overload Relay**
8998	S- Standard Size H- High Density (Compac 6) *[2]*	B- Circuit Breaker (PowerPact™ MCP) F- Fusible (Class R except Compac 6 Class J)	A-FVNR C-FVR *[3]*	001=1 hp 002=2 hp 003=3 hp 005=5 hp 007=7.5 hp 010=10 hp 015=15 hp *[3]* 025=25 hp *[3]* 040=40 hp *[3]* 050=50 hp *[3]* 060=60 hp *[3]* 075=75 hp *[3]* 100=100 hp *[3]*	X=None A=Start-Stop PB, On/Off Lights*[4]* C=HOA Sel.Switch, On/Off Lights *[2]*	FT- 480-120 V CPT*[5]* FS- 120 V Fused Separate Ctl w/intlk	MA-Melting Alloy (Thermal Units not Included) SS-Motor Logic SSOL

NOTE: For more information, contact your nearest Schneider Electric sales office.

[1] Complete Model 6 Motor Control Centers are available from the factory.
[2] Not available with FVR
[3] Not available with Compac 6
[4] Includes forward, reverse and stop push-buttons; and forward and reverse pilot lights with FVR starters
[5] Includes extra 50 VA CPT on Sz 1 FVNR (T1)

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Combination Starters Units with Motor Circuit Protector Disconnects

Model 6 NEMA-rated FVNR combination starter units use PowerPact™ Motor Circuit Protectors.

Ratings: 480 V, NEMA 12, Type 1B-D wiring, 100,000 AIR. Units include 1 N.O./1 N.C. auxiliary contacts. Units with pilot devices use 22 mm type. Units without pilot devices include a station plate with knockouts for five 22 mm devices.

Thermal units are not included with melting alloy overloads.

Table 15.3: FVNR Combination Starter Units with Motor Circuit Protector Disconnects

Ratings			Control Transformer			Fused Separate Control		
			No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA Red On/Green Off Lights	No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA Red On/Green Off Lights
NEMA Size	Hp	Space (IN)	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number
Full Voltage Non-Reversing (FVNR) Starters With Motor Circuit Protector Disconnect and Melting Alloy Overload Relay								
1	1	12	SBA001XFTMA	SBA001AFTMA	SBA001CFTMA	SBA001XFSMA	SBA001AFSMA	SBA001CFSMA
	2		SBA002XFTMA	SBA002AFTMA	SBA002CFTMA	SBA002XFSMA	SBA002AFSMA	SBA002CFSMA
	3		SBA003XFTMA	SBA003AFTMA	SBA003CFTMA	SBA003XFSMA	8998BA003AFSMA	SBA003CFSMA
	5		SBA005XFTMA	SBA005AFTMA	SBA005CFTMA	SBA005XFSMA	SBA005AFSMA	SBA005CFSMA
	7.5		SBA007XFTMA	SBA007AFTMA	SBA007CFTMA	SBA007XFSMA	SBA007AFSMA	SBA007CFSMA
	10		SBA010XFTMA	SBA010AFTMA	SBA010CFTMA	SBA010XFSMA	SBA010AFSMA	SBA010CFSMA
2	15	12	SBA015XFTMA	SBA015AFTMA	SBA015CFTMA	SBA015XFSMA	SBA015AFSMA	SBA015CFSMA
	25		SBA025XFTMA	SBA025AFTMA	SBA025CFTMA	SBA025XFSMA	SBA025AFSMA	SBA025CFSMA
3	40	18	SBA040XFTMA	SBA040AFTMA	SBA040CFTMA	SBA040XFSMA	SBA040AFSMA	SBA040CFSMA
	50		SBA050XFTMA	SBA050AFTMA	SBA050CFTMA	SBA050XFSMA	SBA050AFSMA	SBA050CFSMA
4	60	21	SBA060XFTMA	SBA060AFTMA	SBA060CFTMA	SBA060XFSMA	SBA060AFSMA	SBA060CFSMA
	75		SBA075XFTMA	SBA075AFTMA	SBA075CFTMA	SBA075XFSMA	SBA075AFSMA	SBA075CFSMA
	100		SBA100XFTMA	SBA100AFTMA	SBA100CFTMA	SBA100XFSMA	SBA100AFSMA	SBA100CFSMA
Full Voltage Non-Reversing (FVNR) Starters With Motor Circuit Protector Disconnect and Solid State Overload Relay (Motor Logic™)								
1	1	12	SBA001XFTSS	SBA001AFTSS	SBA001CFTSS	SBA001XFSSS	SBA001AFSSS	SBA001CFSSS
	2		SBA002XFTSS	SBA002AFTSS	SBA002CFTSS	SBA002XFSSS	SBA002AFSSS	SBA002CFSSS
	3		SBA003XFTSS	SBA003AFTSS	SBA003CFTSS	SBA003XFSSS	SBA003AFSSS	SBA003CFSSS
	5		SBA005XFTSS	SBA005AFTSS	SBA005CFTSS	SBA005XFSSS	SBA005AFSSS	SBA005CFSSS
	7.5		SBA007XFTSS	SBA007AFTSS	SBA007CFTSS	SBA007XFSSS	SBA007AFSSS	SBA007CFSSS
	10		SBA010XFTSS	SBA010AFTSS	SBA010CFTSS	SBA010XFSSS	SBA010AFSSS	SBA010CFSSS
2	15	12	SBA015XFTSS	SBA015AFTSS	SBA015CFTSS	SBA015XFSSS	SBA015AFSSS	SBA015CFSSS
	25		SBA025XFTSS	SBA025AFTSS	SBA025CFTSS	SBA025XFSSS	SBA025AFSSS	SBA025CFSSS
3	40	18	SBA040XFTSS	SBA040AFTSS	SBA040CFTSS	SBA040XFSSS	SBA040AFSSS	SBA040CFSSS
	50		SBA050XFTSS	SBA050AFTSS	SBA050CFTSS	SBA050XFSSS	SBA050AFSSS	SBA050CFSSS
4	60	21	SBA060XFTSS	SBA060AFTSS	SBA060CFTSS	SBA060XFSSS	SBA060AFSSS	SBA060CFSSS
	75		SBA075XFTSS	SBA075AFTSS	SBA075CFTSS	SBA075XFSSS	SBA075AFSSS	SBA075CFSSS
	100		SBA100XFTSS	SBA100AFTSS	SBA100CFTSS	SBA100XFSSS	SBA100AFSSS	SBA100CFSSS

Table 15.4: FVR Combination Starter Units with Motor Circuit Protector Disconnects

Ratings			Control Transformer		Fused Separate Control	
			No Pilot Devices	Forward-Rev.-Stop PB, Forward/Reverse Lights	No Pilot Devices	Forward-Rev.-Stop PB, Forward/Reverse Lights
NEMA Size	Hp	Space (IN)	Catalog Number	Catalog Number	Catalog Number	Catalog Number
Full Voltage Reversing (FVR) Starters With Motor Circuit Protector Disconnect and Melting Alloy Overload Relay						
1	1	18	SBC001XFTMA	SBC001AFTMA	SBC001XFSMA	SBC001AFSMA
	2		SBC002XFTMA	SBC002AFTMA	SBC002XFSMA	SBC002AFSMA
	3		SBC003XFTMA	SBC003AFTMA	SBC003XFSMA	SBC003AFSMA
	5		SBC005XFTMA	SBC005AFTMA	SBC005XFSMA	SBC005AFSMA
	7.5		SBC007XFTMA	SBC007AFTMA	SBC007XFSMA	SBC007AFSMA
	10		SBC010XFTMA	SBC010AFTMA	SBC010XFSMA	SBC010AFSMA
2	15	18	SBC015XFTMA	SBC015AFTMA	SBC015XFSMA	SBC015AFSMA
	25		SBC025XFTMA	SBC025AFTMA	SBC025XFSMA	SBC025AFSMA
3	40	27	SBC040XFTMA	SBC040AFTMA	SBC040XFSMA	SBC040AFSMA
	50		SBC050XFTMA	SBC050AFTMA	SBC050XFSMA	SBC050AFSMA
4	60	33	SBC060XFTMA	SBC060AFTMA	SBC060XFSMA	SBC060AFSMA
	75		SBC075XFTMA	SBC075AFTMA	SBC075XFSMA	SBC075AFSMA
	100		SBC100XFTMA	SBC100AFTMA	SBC100XFSMA	SBC100AFSMA
Full Voltage Reversing (FVR) Starters With Motor Circuit Protector Disconnect and Solid State Overload Relay (Motor Logic)						
1	1	18	SBC001XFTSS	SBC001AFTSS	SBC001XFSSS	SBC001AFSSS
	2		SBC002XFTSS	SBC002AFTSS	SBC002XFSSS	SBC002AFSSS
	3		SBC003XFTSS	SBC003AFTSS	SBC003XFSSS	SBC003AFSSS
	5		SBC005XFTSS	SBC005AFTSS	SBC005XFSSS	SBC005AFSSS
	7.5		SBC007XFTSS	SBC007AFTSS	SBC007XFSSS	SBC007AFSSS
	10		SBC010XFTSS	SBC010AFTSS	SBC010XFSSS	SBC010AFSSS
2	15	18	SBC015XFTSS	SBC015AFTSS	SBC015XFSSS	SBC015AFSSS
	25		SBC025XFTSS	SBC025AFTSS	SBC025XFSSS	SBC025AFSSS
3	40	27	SBC040XFTSS	SBC040AFTSS	SBC040XFSSS	SBC040AFSSS
	50		SBC050XFTSS	SBC050AFTSS	SBC050XFSSS	SBC050AFSSS
4	60	33	SBC060XFTSS	SBC060AFTSS	SBC060XFSSS	SBC060AFSSS
	75		SBC075XFTSS	SBC075AFTSS	SBC075XFSSS	SBC075AFSSS
	100		SBC100XFTSS	SBC100AFTSS	SBC100XFSSS	SBC100AFSSS

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Combination Starter Units with Fusible Switch Disconnects

Model 6 NEMA-rated FVNR combination starter units listed below use fusible switches with Class R fuse clips (fuses not included).

Ratings: 480 V, NEMA 12, Type 1B-D wiring, 100,000 AIR. Units include 1 N.O./1 N.C. auxiliary contacts. Units with pilot devices use 22 mm type. Units without pilot devices include a station plate with knockouts for five 22 mm devices.

Thermal units are not included with melting alloy overloads.

Table 15.5: FVNR Combination Starter Units with Fusible Switch Disconnects

Ratings			Control Transformer			Fused Separate Control		
			No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA Red On/Green Off Lights	No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA Red On/Green Off Lights
NEMA Size	Hp	Space (IN)	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
Full Voltage Non-Reversing (FVNR) Starters With Fusible Switch Disconnect and Melting Alloy Overload Relay								
1	1	12	SFA001XFTMA	SFA001AFTMA	SFA001CFTMA	SFA001XFSMA	SFA001AFSMA	SFA001CFSMA
	2		SFA002XFTMA	SFA002AFTMA	SFA002CFTMA	SFA002XFSMA	SFA002AFSMA	SFA002CFSMA
	3		SFA003XFTMA	SFA003AFTMA	SFA003CFTMA	SFA003XFSMA	SFA003AFSMA	SFA003CFSMA
	5		SFA005XFTMA	SFA005AFTMA	SFA005CFTMA	SFA005XFSMA	SFA005AFSMA	SFA005CFSMA
	7.5		SFA007XFTMA	SFA007AFTMA	SFA007CFTMA	SFA007XFSMA	SFA007AFSMA	SFA007CFSMA
	10		SFA010XFTMA	SFA010AFTMA	SFA010CFTMA	SFA010XFSMA	SFA010AFSMA	SFA010CFSMA
2	15	12	SFA015XFTMA	SFA015AFTMA	SFA015CFTMA	SFA015XFSMA	SFA015AFSMA	SFA015CFSMA
	25		SFA025XFTMA	SFA025AFTMA	SFA025CFTMA	SFA025XFSMA	SFA025AFSMA	SFA025CFSMA
3	40	18	SFA040XFTMA	SFA040AFTMA	SFA040CFTMA	SFA040XFSMA	SFA040AFSMA	SFA040CFSMA
	50		SFA050XFTMA	SFA050AFTMA	SFA050CFTMA	SFA050XFSMA	SFA050AFSMA	SFA050CFSMA
4	60	30	SFA060XFTMA	SFA060AFTMA	SFA060CFTMA	SFA060XFSMA	SFA060AFSMA	SFA060CFSMA
	75		SFA075XFTMA	SFA075AFTMA	SFA075CFTMA	SFA075XFSMA	SFA075AFSMA	SFA075CFSMA
	100		SFA100XFTMA	SFA100AFTMA	SFA100CFTMA	SFA100XFSMA	SFA100AFSMA	SFA100CFSMA
Full Voltage Non-Reversing (FVNR) Starters With Fusible Switch Disconnect and Solid State Overload Relay (Motor Logic™)								
1	1	12	SFA001XFTSS	SFA001AFTSS	SFA001CFTSS	SFA001XFSSS	SFA001AFSSS	SFA001CFSSS
	2		SFA002XFTSS	SFA002AFTSS	SFA002CFTSS	SFA002XFSSS	SFA002AFSSS	SFA002CFSSS
	3		SFA003XFTSS	SFA003AFTSS	SFA003CFTSS	SFA003XFSSS	SFA003AFSSS	SFA003CFSSS
	5		SFA005XFTSS	SFA005AFTSS	SFA005CFTSS	SFA005XFSSS	SFA005AFSSS	SFA005CFSSS
	7.5		SFA007XFTSS	SFA007AFTSS	SFA007CFTSS	SFA007XFSSS	SFA007AFSSS	SFA007CFSSS
	10		SFA010XFTSS	SFA010AFTSS	SFA010CFTSS	SFA010XFSSS	SFA010AFSSS	SFA010CFSSS
2	15	12	SFA015XFTSS	SFA015AFTSS	SFA015CFTSS	SFA015XFSSS	SFA015AFSSS	SFA015CFSSS
	25		SFA025XFTSS	SFA025AFTSS	SFA025CFTSS	SFA025XFSSS	SFA025AFSSS	SFA025CFSSS
3	40	18	SFA040XFTSS	SFA040AFTSS	SFA040CFTSS	SFA040XFSSS	SFA040AFSSS	SFA040CFSSS
	50		SFA050XFTSS	SFA050AFTSS	SFA050CFTSS	SFA050XFSSS	SFA050AFSSS	SFA050CFSSS
4	60	30	SFA060XFTSS	SFA060AFTSS	SFA060CFTSS	SFA060XFSSS	SFA060AFSSS	SFA060CFSSS
	75		SFA075XFTSS	SFA075AFTSS	SFA075CFTSS	SFA075XFSSS	SFA075AFSSS	SFA075CFSSS
	100		SFA100XFTSS	SFA100AFTSS	SFA100CFTSS	SFA100XFSSS	SFA100AFSSS	SFA100CFSSS

Table 15.6: FVR Combination Starter Units with Fusible Switch Disconnects

Ratings			Control Transformer		Fused Separate Control	
			No Pilot Devices	Forward-Rev.-Stop PB, Forward/Reverse Lights	No Pilot Devices	Forward-Rev.-Stop PB, Forward/Reverse Lights
NEMA Size	Hp	Space (IN)	Catalog No.	Catalog No.	Catalog No.	Catalog No.
Full Voltage Reversing (FVR) Starters With Fusible Switch Disconnect and Melting Alloy Overload Relay						
1	1	18	SFC001XFTMA	SFC001AFTMA	SFC001XFSMA	SFC001AFSMA
	2		SFC002XFTMA	SFC002AFTMA	SFC002XFSMA	SFC002AFSMA
	3		SFC003XFTMA	SFC003AFTMA	SFC003XFSMA	SFC003AFSMA
	5		SFC005XFTMA	SFC005AFTMA	SFC005XFSMA	SFC005AFSMA
	7.5		SFC007XFTMA	SFC007AFTMA	SFC007XFSMA	SFC007AFSMA
	10		SFC010XFTMA	SFC010AFTMA	SFC010XFSMA	SFC010AFSMA
2	15	18	SFC015XFTMA	SFC015AFTMA	SFC015XFSMA	SFC015AFSMA
	25		SFC025XFTMA	SFC025AFTMA	SFC025XFSMA	SFC025AFSMA
3	40	27	SFC040XFTMA	SFC040AFTMA	SFC040XFSMA	SFC040AFSMA
	50		SFC050XFTMA	SFC050AFTMA	SFC050XFSMA	SFC050AFSMA
4	60	39	SFC060XFTMA	SFC060AFTMA	SFC060XFSMA	SFC060AFSMA
	75		SFC075XFTMA	SFC075AFTMA	SFC075XFSMA	SFC075AFSMA
	100		SFC100XFTMA	SFC100AFTMA	SFC100XFSMA	SFC100AFSMA
)Full Voltage Reversing (FVR) Starters with Fusible Switch Disconnect and Solid State Overload Relay (Motor Logic						
1	1	18	SFC001XFTSS	SFC001AFTSS	SFC001XFSSS	SFC001AFSSS
	2		SFC002XFTSS	SFC002AFTSS	SFC002XFSSS	SFC002AFSSS
	3		SFC003XFTSS	SFC003AFTSS	SFC003XFSSS	SFC003AFSSS
	5		SFC005XFTSS	SFC005AFTSS	SFC005XFSSS	SFC005AFSSS
	7.5		SFC007XFTSS	SFC007AFTSS	SFC007XFSSS	SFC007AFSSS
	10		SFC010XFTSS	SFC010AFTSS	SFC010XFSSS	SFC010AFSSS
2	15	18	SFC015XFTSS	SFC015AFTSS	SFC015XFSSS	SFC015AFSSS
	25		SFC025XFTSS	SFC025AFTSS	SFC025XFSSS	SFC025AFSSS
3	40	27	SFC040XFTSS	SFC040AFTSS	SFC040XFSSS	SFC040AFSSS
	50		SFC050XFTSS	SFC050AFTSS	SFC050XFSSS	SFC050AFSSS
4	60	39	SFC060XFTSS	SFC060AFTSS	SFC060XFSSS	SFC060AFSSS
	75		SFC075XFTSS	SFC075AFTSS	SFC075XFSSS	SFC075AFSSS
	100		SFC100XFTSS	SFC100AFTSS	SFC100XFSSS	SFC100AFSSS

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Compac™ 6 Combination Starter Units with Motor Circuit Protector Disconnects

NEMA-rated Compac 6, half-height FVNR combination starters use TeSys BV4 Motor Circuit Protectors.

Ratings: 480 V, NEMA 12, Type 1B-D wiring, 100,000 AIR. Units include 1 N.O./1 N.C. auxiliary contacts. Units with pilot devices use 22 mm type.

Units without pilot devices include a station plate with knockouts for four 22 mm devices. Thermal units are not included with melting alloy overloads.

Table 15.7: Compac 6 Combination Starter Units with Motor Circuit Protector Disconnects

Ratings			Control Transformer			Fused Separate Control		
			No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA, Red On/Green Off Lights	No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA, Red On/Green Off Lights
NEMA Size	Hp	Space (IN)	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
Full Voltage Non-Reversing (FVNR) Starters With Motor Circuit Protector Disconnect and Melting Alloy Overload Relay								
1	1	6	HBA001XFTMA	HBA001AFTMA	HBA001CFTMA	HBA001XFSMA	HBA001AFSMA	HBA001CFSMA
	2		HBA002XFTMA	HBA002AFTMA	HBA002CFTMA	HBA002XFSMA	HBA002AFSMA	HBA002CFSMA
	3		HBA003XFTMA	HBA003AFTMA	HBA003CFTMA	HBA003XFSMA	HBA003AFSMA	HBA003CFSMA
	5		HBA005XFTMA	HBA005AFTMA	HBA005CFTMA	HBA005XFSMA	HBA005AFSMA	HBA005CFSMA
	7.5		HBA007XFTMA	HBA007AFTMA	HBA007CFTMA	HBA007XFSMA	HBA007AFSMA	HBA007CFSMA
	10		HBA010XFTMA	HBA010AFTMA	HBA010CFTMA	HBA010XFSMA	HBA010AFSMA	HBA010CFSMA
Full Voltage Non-Reversing (FVNR) Starters With Motor Circuit Protector Disconnect and Solid State Overload Relay (Motor Logic™)								
1	1	6	HBA001XFTSS	HBA001AFTSS	HBA001CFTSS	HBA001XFSSS	HBA001AFSSS	HBA001CFSSS
	2		HBA002XFTSS	HBA002AFTSS	HBA002CFTSS	HBA002XFSSS	HBA002AFSSS	HBA002CFSSS
	3		HBA003XFTSS	HBA003AFTSS	HBA003CFTSS	HBA003XFSSS	HBA003AFSSS	HBA003CFSSS
	5		HBA005XFTSS	HBA005AFTSS	HBA005CFTSS	HBA005XFSSS	HBA005AFSSS	HBA005CFSSS
	7.5		HBA007XFTSS	HBA007AFTSS	HBA007CFTSS	HBA007XFSSS	HBA007AFSSS	HBA007CFSSS
	10		HBA010XFTSS	HBA010AFTSS	HBA010CFTSS	HBA010XFSSS	HBA010AFSSS	HBA010CFSSS

Compac™ 6 Combination Starter Units with Fusible Switch Disconnects

NEMA-rated Compac 6, half-height FVNR combination starters listed below use fusible switches with Class J fuse clips (fuses not included).

Ratings: 480 V, NEMA 12, Type 1B-D wiring, 100,000 AIR. Units include 1 N.O./1 N.C. auxiliary contacts.

Units with pilot devices use 22 mm type. Units without pilot devices include a station plate with knockouts for four 22 mm devices. Thermal units are not included with melting alloy overloads.

Table 15.8: Compac 6 Combination Starter Units with Fusible Switch Disconnects

Ratings			Control Transformer			Fused Separate Control		
			No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA, Red On/Green Off Lights	No Pilot Devices	Start-Stop PB, Red On/Green Off Lights	HOA, Red On/Green Off Lights
NEMA Size	Hp	Space (IN)	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.	Catalog No.
Full Voltage Non-Reversing (FVNR) Starters with Fusible Switch Disconnect and Melting Alloy Overload Relay								
1	1	6	HFA001XFTMA	HFA001AFTMA	HFA001CFTMA	HFA001XFSMA	HFA001AFSMA	HFA001CFSMA
	2		HFA002XFTMA	HFA002AFTMA	HFA002CFTMA	HFA002XFSMA	HFA002AFSMA	HFA002CFSMA
	3		HFA003XFTMA	HFA003AFTMA	HFA003CFTMA	HFA003XFSMA	HFA003AFSMA	HFA003CFSMA
	5		HFA005XFTMA	HFA005AFTMA	HFA005CFTMA	HFA005XFSMA	HFA005AFSMA	HFA005CFSMA
	7.5		HFA007XFTMA	HFA007AFTMA	HFA007CFTMA	HFA007XFSMA	HFA007AFSMA	HFA007CFSMA
	10		HFA010XFTMA	HFA010AFTMA	HFA010CFTMA	HFA010XFSMA	HFA010AFSMA	HFA010CFSMA
Full Voltage Non-Reversing (FVNR) Starters With Fusible Switch Disconnect and Solid State Overload Relay (Motor Logic)								
1	1	6	HFA001XFTSS	HFA001AFTSS	HFA001CFTSS	HFA001XFSSS	HFA001AFSSS	HFA001CFSSS
	2		HFA002XFTSS	HFA002AFTSS	HFA002CFTSS	HFA002XFSSS	HFA002AFSSS	HFA002CFSSS
	3		HFA003XFTSS	HFA003AFTSS	HFA003CFTSS	HFA003XFSSS	HFA003AFSSS	HFA003CFSSS
	5		HFA005XFTSS	HFA005AFTSS	HFA005CFTSS	HFA005XFSSS	HFA005AFSSS	HFA005CFSSS
	7.5		HFA007XFTSS	HFA007AFTSS	HFA007CFTSS	HFA007XFSSS	HFA007AFSSS	HFA007CFSSS
	10		HFA010XFTSS	HFA010AFTSS	HFA010CFTSS	HFA010XFSSS	HFA010AFSSS	HFA010CFSSS

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Units rated as follows:

- 480 V, 60 Hz, NEMA Type 12 Enclosure, Industrial Package
- Short Circuit rating: 100,000 AIR

Circuit Breaker Branch Feeder Units

Table 15.9: Circuit Breaker Branch Feeder Units

First Position	Second Position	Third Position	Fourth Position	Fifth Position	
8998	S	B	F	015	
Class	**Type**	**Disconnect**	**Device**	**Feeder Amps**	
8998	S- Standard Size H- Compac™ 6	B- Breaker (Thermal-Mag)	F- Feeder	015	080
				020	100
				030	125
				040	150
				050	200
				060	250
				070	
Amps	**Breaker Frame**	**Space (IN)**	**Catalog No.**		
15	HL	6	HBF015		
20			HBF020		
30			HBF030		
40			HBF040		
50			HBF050		
60			HBF060		
70			HBF070		
80			HBF080		
100			HBF100		
125			HBF125		
150			HBF150		
200	JL		HBF200		
250			HBF250		
15	HL	12	SBF015		
20			SBF020		
30			SBF030		
40			SBF040		
50			SBF050		
60			SBF060		
70			SBF070		
80			SBF080		
100			SBF100		
125			SBF125		
150			SBF150		
200	JL	18	SBF200		
250			SBF250		

Fusible Branch Feeder Units

Table 15.10: Fusible Branch Feeder Units

First Position	Second Position	Third Position	Fourth Position	Fifth Position
8998	S	F	F	015
Class	**Type**	**Disconnect**	**Device**	**Feeder Amps**
8998	S- Standard Size H- Compac 6	F- Fusible *[1]*	F- Feeder	030
				060
				100
				200 *[2]*
Amps	**Fuse Clips**	**Space (IN)**	**Catalog No.**	
30 60	Class J	6 (Compac 6)	HFF030 HFF060	
100			HFF100	
30 60	Class R	12	SFF030 SFF060	
100			SFF100	
200		24	SFF200	

Model 6 Blank Doors

These doors may be used to cover an unused space in the MCC. A blank door will be required when placing a new unit in an existing space that is larger than the new unit.

Table 15.11: Model 6 Blank Doors

Catalog Number	Description
8998CP03	3–Inch High Blank Cover Plate
8998CP06	6–Inch High Blank Door
8998CP09	9–Inch High Blank Door
8998CP12	12–Inch High Blank Door
8998CP15	15–Inch High Blank Door
8998CP18	18–Inch High Blank Door
8998CP24	24–Inch High Blank Door

[1] Class R except Compac 6, fuses not included. Compac 6 units accept Class J fuses.
[2] Not available with Compac 6.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Section 16

NEMA and Definite Purpose Contactors and Starters




Manual Starters and Switches



Definite Purpose Contactors and Starters




NEMA Style Type S Contactors and Starters




Lighting Contactors



Pump Panel



Combination Starters




NEMA Style TeSys N Contactors and Starters

Selection Information	16-2
Manual Starters and Switches	16-4
TeSys™ Ultra Motor Starters	16-12
TeSys™ N Contactors and Starters	16-13
Type S Full Voltage Contactors and Starters	16-28
Vacuum Contactors and Starters, Full Voltage	16-44
Type S Combination Starters	16-47
Type S Reversing Full Voltage Contactors and Starters	16-61
Reversing Vacuum Contactors, Full Voltage	16-67
Type S Reversing Combination Starters	16-68
Lighting Contactors	16-75
Definite Purpose Contactors	16-91
Definite Purpose Starters	16-94
Well-Guard Control™ Pump Panels	16-95
Duplex AC Motor Controllers	16-97
Reversing Definite Purpose Contactors	16-101
Overload Relays	16-102
Separate Enclosures	16-112
Factory Modifications (Forms)	16-118
Magnetic Coils	16-124
Replacement Parts Kits	16-126
Accessories	16-129
Thermal Units	16-135

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Selection Information













Class	2510, 2511, 2512	T02, T36	8502 & 8702	8536 & 8736	8538 & 8738
		NEMA Style, Full Voltage Non-Reversing and Full Voltage Reversing			
Type of Product	Manual Starters and Switches, Non-Reversing, Reversing and Two Speed	TeSys™ N Contactors and Starters	AC Magnetic Contactors	AC Magnetic Starters	Combination Magnetic Starters with Disconnect Switch
Page	page 16-4	page 16-14	8502: page 16-30 8702: page 16-61	8536: page 16-35 8736: page 16-63	8538: page 16-48 8738: page 16-68
NEMA Sizes	M-0 M-1 M-1P	00–7	00–7	00–7	8538: 0– 6 8738: 0–5
Load Voltage	Type F: 277 Vac Types K & M: 600 Vac	600 Vac Max.	600 Vac Max.	600 Vac Max.	600 Vac Max.
Current Ratings (Continuous)	Type F: 16 A Types K & M: 30 A	9–810 A	9–810 A	9–810 A	8538: 18–540 A 8738: 18–270 A
Horsepower Ratings (Maximum)	Type F: 1 Type K: 20 Type M: 10	600	0.5–600	0.5–600	8538: 0.5–400 8738: 0.5–200
Overload Relay	Type F: Melting Alloy Type K: N/A Type M: Melting Alloy	Contactors: N/A Starters: Bimetallic (Size 00-2) or Solid-State	N/A	Melting Alloy Bimetallic (Size 00–2) Solid State	Melting Alloy Bimetallic (Size 0–2) Solid State
Enclosure Types	1, Flush Mount, 3R, 4, 4X, 7 & 9 and Open	Open	1, 3R, 4, 4X, 12/3R, 7 & 9 and Open	1, 3R, 4, 4X, 12/3R, 7 & 9 and Open	1, 4, 4X, 12/3R
Approvals	UL File E42243 NLRV UR File E42243 NLRV2 CSA File LR 25490	Contactors: UL File E164862 NLDX CSA LR43364 Class 3211-24 Starters: UL File E152395 NKJH CSA LR60905 Class 3211-24	UL File E78351 NLDX CSA 60905 Class 3211-04	UL File E78351 NLDX CSA 60905 Class 3211-04	UL File E152395 NKJH7 CSA LR584 Class 3211 04

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Selection Information

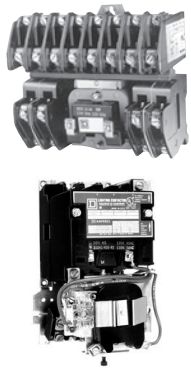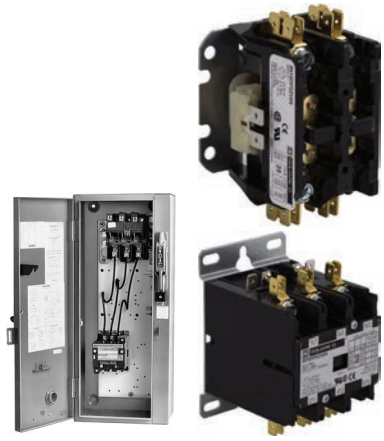

Class	8539 & 8739	8903L & 8903S	8903 Combination Devices	8910, 8911, 8965	8940	8941
Type of Product	Combination Magnetic Starters with PowerPact™ Circuit Breaker	Multipole electrically held and mechanically held contactors available in 30 A configurations to 12 poles and 800 A configurations to 3 poles.	Type S lighting contactors electrically held and mechanically held available with disconnect switches or PowerPact™ circuit breakers	Definite Purpose non-reversing contactors available as compact 1 or 2 pole to 40 A and 2 to 4 pole to 90 A. Reversing and Starter Configurations also available.	Well-Guard Control™ Pumping Plant Panels available with disconnect switches or PowerPact™ circuit breakers.	NEMA Style AC Duplex Motor Controllers available as a combination starter or without disconnecting means.
Page	8539: page 16-52 8739: page 16-69	page 16-75	page 16-79	8910: page 16-91 8911: page 16-94 8965: page 16-101	page 16-95 page 16-96	page 16-97
NEMA Sizes	8539: 0–7 8739: 0–6	N/A	N/A	N/A	1–7	1–4
Load Voltage	600 Vac Max.	600 Vac Max.	600 Vac Max.	600 Vac Max.	600 Vac Max.	600 Vac Max.
Current Ratings (Continuous)	8539: 18–810 A 8739: 18–540 A	8903L to 30 A 8903S to 800 A	300 A (Disconnect) 600 A (Circuit Breaker)	20–40 A (Compact) 20–90 A	27–810 A	27–135 A
Horsepower Ratings (Maximum)	8539: 0.5–600 8739: 0.5–400	N/A	N/A	0.5–50	0.5–600	0.5–100
Overload Relay	Melting Alloy Bimetallic (Size 0–1) Solid State	N/A	N/A	Melting Alloy (8911)	Melting Alloy Bimetallic Solid State	Melting Alloy Bimetallic Solid State
Enclosure Types	1, 4, 4X, 12/3R	1, 3R, 4, 4X, 12/3R and Open	1, 4, 4X, 12/3R	1	3R	1, 4, 4X, 12/3R and Open
Approvals	UL File E152395 NKJH7 CSA LR584 Class 3211 04	UL File E78427 NRNT CSA LR60905 Class 3231 01	UL File E16151 NRNT cUL File E16151 NRNT	UL E3190 NLDX2 CSA LR25490 Class 3211 04	UL/cUL 152395 NKJH	UL File E152395 NKJH7

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Fractional Horsepower Manual Starters with Melting Alloy Type Thermal Overload Relay

Table 16.1: Single-Unit Types—Class 2510—Rated 16 A—Thermal Units (see Thermal Unit Selection, page 16-135)


Type of Operator	No. of Poles	Features	NEMA 1 General Purpose Enclosure Surface Mounting	General Purpose Flush Mounting (Without Pull Box)			NEMA Type 4 *[1]* Enclosure Watertight and Dusttight	NEMA Types 3R, 7 & 9 Enclosure Hazardous Locations Div. 1 & 2 Class I Groups B, C, & D, & Class II Groups E, F, & G	Open Type	Number of Thermal Units Required
			Standard	Gray Flush Plate	Standard Stainless Steel Flush Plate	Jumbo Stainless Steel Flush Plate				
			Type	Type	Type	Type	Type	Type	Type	
Basic Starter—Class 2510										
Toggle	1	Standard	FG1	FF1	—	—	—	—	FO1	1
		With Red Pilot Light *[2]*	FG1P	FF1P	—	—	—	—	FO1P	1
	2	Standard	FG2	FF2	FS2	—	—	—	FO2	1
		With Red Pilot Light *[2]*	FG2P	FF2P	—	FSJ2P	—	—	FO2P	1
Key	1	Standard	—	FF3	—	—	—	—	—	1
		With Red Pilot Light *[2]*	—	FF3P	—	FSJ3P	—	—	—	1
	2	Standard	—	—	—	—	—	—	FO4	1
Starter with Handle Guard/Lock-Off—Class 2510										
Toggle	1	Standard	FG5	Order basic starter plus separate handle guard kit.			FW1	FR1	*[3] [4]*	1
		With Red Pilot Light *[2]*	FG5P				FW1P	—	*[3] [4]*	1
	2	Standard	FG6				FW2	FR2	*[3] [4]*	1
		With Red Pilot Light *[2]*	FG6P				FW2P	—	*[3] [4]*	1

Table 16.2: Duplex Units—Class 2510

Type of Operator	No. of Poles	Features	NEMA 1 General Purpose Enclosure Surface Mounting	General Purpose Flush Mounting (Without Pull Box)			Number of Thermal Units Required
				Gray Flush Plate for Wall or Cavity Mounting	Stainless Steel Flush Plate for Wall or Cavity Mounting	Replacement Starter Class 2510	
			Type	Type	Type	Type	
One Starter in Duplex Enclosure—Class 2510							
Key	2	With Red Pilot Light *[5]*	FG04P	—	—	—	1
Two Starters in One Enclosure—Class 2510							
Toggle	2 Each Str.	Standard	—	FF22	—	—	2
Starter and Auto-Off-Hand SPDT Selector Switch (AC Only)—Class 2510							
Toggle	1	Standard	FG71	—	—	—	1
		With Red Pilot Light *[5]*	FG71P	—	—	—	
	2	Standard	—	FF72	—	—	1
		With Red Pilot Light*[5]*	—	FF72P	FS72P	—	
Key	2	With Red Pilot Light*[5]*	—	—	FS74P	—	1
Two Speed Starters (AC Only)—Class 2512						**Replacement Starter—Class 2510**	
	2	**With Mechanical Interlock:**					2
		Standard	—	FF22	—	FO2T	
		With 2 Red Pilot Lights *[5]*	—	—	—	FO2PT	
		With High-Off-Low Selector Switch:					
		With 2 Red Pilot Lights *[5]*	—	—	—	FO2PT	



Type FG2P



Type FO2

Table 16.3: Horsepower Ratings, Type F (continuous current rating: 16 A)

Volts	Maximum Horsepower		
	AC Single Phase		DC 2-Pole Only
	1-Pole	2-Pole	
115	1	1	3/4
230	1	2	3/4
277	1	1	—

Table 16.4: Approvals—2510 Type F and K

Agency	Enclosed		Open	
UL	UL Listed	File: E42243, CCN: NLRV	UL Component Recognized	File: E42243, CCN: NLRV2
CSA	CSA Certified	File: LR25490, Class: 3211-05		

Table 16.5: How to Order

To Order Specify:	Catalog Number	
	Class	**Type**
• Class Number	2510	FG1
• Type Number		

Manual Switches, Type K

Table 16.6: Non-Reversing—Class 2510

Operator Style	No. of Poles	Features	NEMA 1 General Purpose Enclosure Surface Mounting		General Purpose Flush Mounting (Without Pull Box)			NEMA 4 Enclosure*[1]* Watertight and Dusttight	NEMA 3R, 7 & 9 Enclosures*[1]* Hazardous Locations Div. 1 & 2 Class I Groups B, C, & D, & Class II Groups E, F, and G	Open Style
			Standard	Oversized	Gray Flush Plate	Standard Stainless Steel Flush Plate	Jumbo Stainless Steel Flush Plate			
			Type	Type	Type	Type	Type	Type	Type	Type
Toggle	2	**Standard**	KG1	KGJ1	KF1	—	—	KW1	KR1	KO1

[1] Furnished with one 3/4 in. pipe tap in the bottom (reversible for top feed). For a 3/4 in. pipe tap in the top and bottom, add the suffix **H** to the Type.
[2] Pilot light units are limited to 240V. For a green pilot light, add the letter G to the catalog number (i.e. 2510FG2PG).
[3] For a replacement starter, order the Open type above.
[4] When replacing a starter equipped with a pilot light in NEMA 4 enclosure, retain the pilot light mounting bracket from the original device.
[5] For a green pilot light, add the letter **G** to the catalog number (i.e. 2510FG2P**G**).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.6 Non-Reversing—Class 2510 (cont'd.)

Operator Style	No. of Poles	Features		NEMA 1 General Purpose Enclosure Surface Mounting		General Purpose Flush Mounting (Without Pull Box)			NEMA 4 Enclosure[6] Watertight and Dusttight	NEMA 3R, 7 & 9 Enclosures[6] Hazardous Locations Div. 1 & 2 Class I Groups B, C, & D, & Class II Groups E, F, and G	Open Style
				Standard	Oversized	Gray Flush Plate	Standard Stainless Steel Flush Plate	Jumbo Stainless Steel Flush Plate			
				Type	Type	Type	Type	Type	Type	Type	Type
		With Pilot Light [6]	115 Vac	KG1A	—	—	—	—	KW1A	—	—
			230 Vac	KG1B	—	KF1B	—	KSJ1B	KW1B	—	—
	3	**Standard**		KG2	KGJ2	KF2	KS2	—	KW2	KR2	KO2
		With Pilot Light [6]	208–277 Vac	KG2B	—	—	—	—	KW2B	—	—
			440–600 Vac	KG2C	—	—	—	KSJ2C	KW2C	—	KO2C [7]
	2	**Standard**		KG5	—	—	—	—	—	—	—
			230 Vac	KG5B	—	—	—	—	—	—	—
	3	**Standard**		KG6	—	—	—	—	KW6	—	KO6
		With Pilot Light [6]	208–277 Vac	—	—	—	—	—	KW6B	—	—
			440–600 Vac	KG6C	—	—	—	—	—	—	—
Key	2	**Standard**		—	—	—	KS3	—	—	—	KO3
		With Pilot Light [6]	115 Vac	—	—	—	KS3A	KSJ3A	—	—	—
			230 Vac	—	—	—	—	KSJ3B	—	—	KO3B
	3	**Standard**		—	KGJ4	KF4	—	—	—	—	—
		With Pilot Light [6]	208–277 Vac	—	KGJ4B	—	—	—	—	—	—
			440–600 Vac	—	KGJ4C	KF4C	—	—	—	—	—

Table 16.7: Reversing—Class 2511

Operator Style	No. of Poles	Suitable for Motor Types	Features (Including Mechanical Interlock)		NEMA 1 General Purpose Enclosure Surface Mounting	With Flush Plate for Cavity Mounting (Without Pull Box)	Replacement Switch Class 2510
					Type	Type	Type
Toggle	3	3 Ø; Also 1 Ø Capacitor, Split Ø, or 4-Lead Repulsion-Induction	**With Pilot Light** [8]	110–120 Vac	KG22A	KF22A	KO2AT

Table 16.8: Class 2511 and 2512 Horsepower Ratings Type K

Device	No. of Poles	Motor Type AC	Maximum Hp			Maximum DC Hp (breaking 2 poles)		
			115 V	230 V	460–575 V	90 V	115 V	230 V
Class 2511	2	1 Ø	2	2	3	1	2	1-1/2
	3	3Ø	2	7-1/2	10			
Class 2512	2	1 Ø	2	2	3			
	3	3 Ø, Constant or Variable Torque	2	7-1/2	10			
	3	3 Ø, Constant Hp	2	7-1/2	10			
Continuous current rating			30 A at 600 Vac maximum			30 A at 24 Vdc maximum		


Table 16.9: Class 2510 Horsepower Ratings

Class 2510	No. of Poles	Motor Type AC	Maximum Hp				Maximum DC Hp (breaking 2 poles)		
			115 V	230 V	460 V	575 V	90 V	115 V	230 V
KO1 KO3	2	Single Ø	2	2	3	3	1	2	1-1/2
KO2	3	Three Ø	2	7-1/2	10	10			
KO6	3	Three Ø	2	7-1/2	15	20			
Continuous current rating			30 A at 600 Vac maximum				30 A at 24 Vdc maximum		


Table 16.10: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number	2510	KO2
• Type Number		

Open Type



Types FO1, 1P, 2
Fractional Hp Starter




Types KO1, 1A, 1B, 2, 2B, 2C
Types KO5A, 5B, 6, 6B, 6C
Motor Starting Switch

[6] Furnished with one 3/4 in. pipe tap in the bottom (reversible for top feed). For a 3/4 in. pipe tap in the top and bottom, add the suffix **H** to the Type.
[6] For a green pilot light, add the letter **G** to the catalog number (i.e. 2510FG2P**G**)
[7] When replacing a starter equipped with a pilot light in NEMA 4 enclosure, retain the pilot light mounting bracket from the original device.
[8] For a green pilot light, add the letter **G** to the catalog number.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 1 General Purpose Enclosure (Surface Mount)

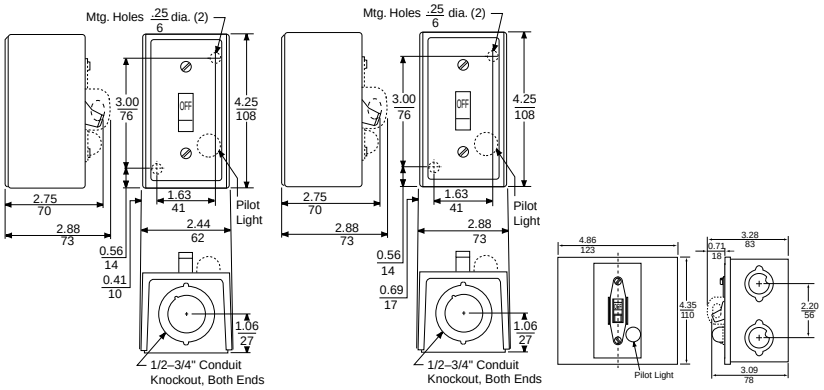

Standard
(Class 2510 Types FG & KG, Single Unit)

Oversized
(Class 2510 Types FGJ & KGJ, Single Unit)

Jumbo
(Class 9991, see Table 16.26)

NEMA 1 General Purpose Enclosure (Flush Mount)

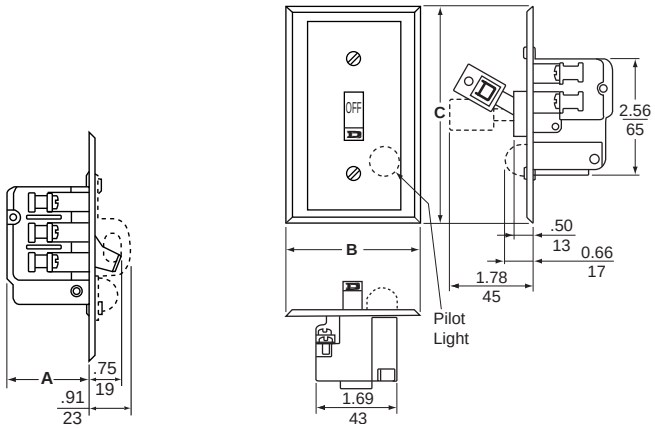


Table 16.11: General Purpose Enclosure (Flush Mount)

Device	Type of Operator	Class 2510 Type	Dimensions		
			A	B	C
Fractional Hp Starter	Toggle	FF1, 1P, 2, 2P, FS1, 1P, 2, 2P	1.44	2.75	4.5
		FSJ2P	1.44	3.5	5.25
	Key	FF3, 3P, 4, 4P, FS3P, 4, 4P	1.44	2.75	4.5
		FSJ3P, 4P	1.44	3.5	5.25
Motor Starting Switch	Toggle	KF1, 1A, 1B, 2, 2B, 2C KS1, 1A, 1B, 2, 2B, 2C	1.75	2.75	4.5
		KSJ1B, 2B, 2C	1.75	3.5	5.25
	Key	KF3A, 3B, 4, 4B, 4C KS3, 3A, 3B, 4, 4B, 4C	1.75	2.75	4.5
		KSJ3A, 3B, 4B, 4C	1.75	3.5	5.25

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

NEMA 4 Watertight Die-Cast Zinc Enclosure


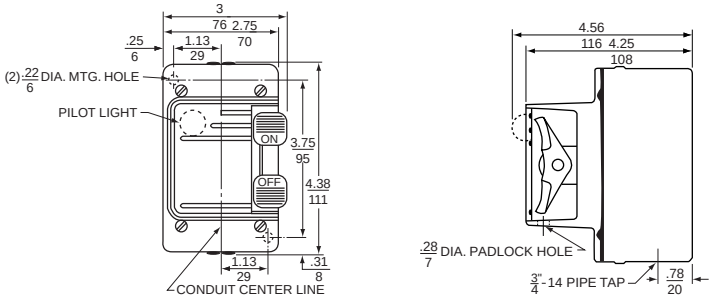


Table 16.12: NEMA 4 Watertight Die-Cast Zinc Enclosure

Device	Class	Type
Fractional Hp Starter	2510	FW1, 1P, 2, 2P
Motor Starting Switch	2510	KW1, 1A, 1B, 2, 2B, 2C

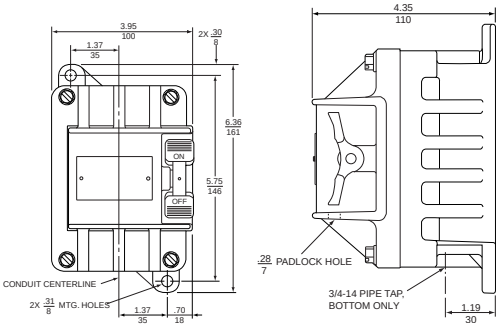


NEMA 3R Aluminum Enclosure for Hazardous Locations

Table 16.13: NEMA 3R Aluminum Enclosure for Hazardous Locations

Device	Class	Type
Fractional Hp Starter	2510	FR1, 2
Motor Starting Switch	2510	KR1, 2

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

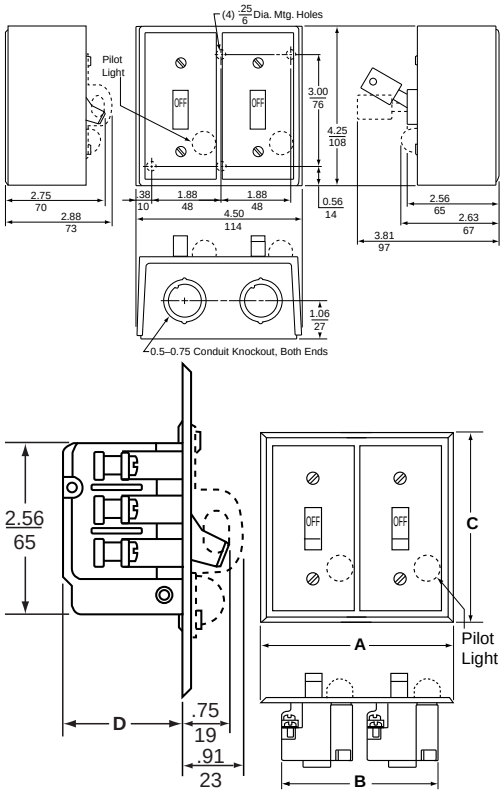

Dimensions for Duplex Devices

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.14: NEMA 1 General Purpose Surface Mount Enclosure for Duplex Devices

Device	Type of Operator	Class	Type
One Starter	Toggle	2510	FGO2, 02P
	Key	2510	FGO4P
Two Starters	Toggle	2510	FG22P
One Starter and One Selector Switch*[9]*	Toggle	2510	FG71, 71P, 72, 72P
Reversing Switch*[10]*	Toggle	2511	KG11A, 11B, 22, 22A, 22B, 22C
Two-Speed Starter	Toggle	2512	FG11P, 22, 22P
Two-Speed Switch	Toggle	2512	KG11A, 11B, 22, 22B, 22C

Table 16.15: General Purpose Flush Mounting Plate for Duplex Devices

Device	Type of Operator	Class	Type	Dimensions*[11]*			
				A	B	C	D
Two Starters	Toggle	2510	FF22, 22P	5.25	3.75	5.25	1.44
One Starter and One Selector Switch*[12]*	Toggle	2510	FF71P, 72, 72P	5.25	0.75	5.25	2
			FS72P	4.56	3.5	4.5	2
	Key	2510	FS74P	4.56	3.5	4.5	2
Reversing Switch	Toggle	2511	KF11A, 11B KF22A KF22C	5.25	3.75	5.25	1.75
Two-Speed Starter	Toggle	2512	FF11P, 22, 22P	5.25	3.75	5.25	1.44
Two-Speed Switch	Toggle	2512	KF11A, 11B, KF22B, 22C	5.25	3.75	5.25	1.75

[9] Selector switch is on the left and increases the overall depth to 3.5 in.
[10] Only one pilot light (located on right) is used on Class 2511 switches.
[11] Dimensions include factory wired power connections.
[12] Selector Switch is on left, extends 1-5/8" from mounting surface.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Integral Horsepower



Types M and T integral horsepower manual starters provide convenient On-Off operation of small single phase, polyphase or DC motors. Typical applications include small machine tools, pumps, fans and conveyors.

- Push button (M) or toggle (T) operators
- Reliable overload protection
- Auxiliary contact available

Table 16.16: Integral Horsepower Manual Starters (see Thermal Unit Selection, page 16-135)

Non-Reversing, Class 2510, Max. Voltage: 600 Vac												
No. of Poles	NEMA Size	Ratings			NEMA 1 Surface Mounting		NEMA 4/4X Watertight and Dusttight Enclosure Brushed Stainless Steel	NEMA 4/4X Watertight, Dusttight and Corrosion-Resistant Glass-Polyester Enclosure	NEMA 7 & 9 For Hazardous Locations Class I—Groups C, D Class II—Groups E, F & G	NEMA 12 Dusttight and Driptight Industrial Use Enclosure	Open Type	
		Motor Voltage	Max. Hp		Square P.B. Operator	Toggle Operator					Square P.B. Operator	Toggle Operator
			Poly-Phase	Single Phase	Type		Type	Type	Type *[13]*	Type	Type	
2-Pole	M-0	115 230	— —	1 2	—	TBG1	MBW11 *[14]*	MBW1 *[14]*	—	MBA1 *[14]*	—	—
	M-1	115 230	— —	2 3	—	TCG1	MCW11	MCW1	—	MCA1	—	—
	M-1P	115 230	— —	3 5	MCG2	—	MCW12	MCW2	—	MCA2	MCO2	—
3-Pole	M-0	200-230 380-575	— 3 5	— — —	MBG2	TBG2	MBW12 *[14]*	MBW2 *[14]*	MBR2 *[14]*	MBA2 *[14]*	MBO2	TBO2
	M-1	200-230 380-575	— 7.5 10	— — —	MCG3	TCG3	MCW13	MCW3	MCR3	MCA3	MCO3	TCO3
DC 2-Pole	M-0	115 230	1 hp DC 1.5 hp DC		—	TBG4	MBW14	MBW4	—	MBA4	—	TBO4
	M-1	115 230	1.5 hp DC 2 hp DC		—	TCG5	MCW15	MCW5	MCR5	MCA5	MCO5	—

All Except NEMA 7 and 9
File E42243
CCN NLRV
NEMA 7 and 9 Only
File E58760
CCN NPXZ

All Except NEMA 7 and 9
File LR60905
Class 3211-05
NEMA 7 and 9 Only
File LR26817
Class 3218-04

Table 16.17: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number	2510	MCA1
• Type Number		

[13] NEMA 7 & 9 enclosures are cast iron. NEMA 7 & 9 cast aluminum enclosures are also available; to order, replace the **R** in the catalog number with a **T**. For additional information, contact the Customer Care Center.

[14] Approved for group motor installations per NEC 430-53(c).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Reversing and Two Speed

Class 2511 reversing and Class 2512 two-speed manual starters consist of two mechanically interlocked Class 2510 Types M or T manual starters.

Table 16.18: Reversing Class 2511

Class	Description	Number of Poles	NEMA Size	Ratings		NEMA 1 Surface Mounting	Open Type	
				Motor Voltage	Maximum Hp	Toggle Operator	Square P.B. Operator	Toggle Operator
2511	Standard	3-Pole	M-0	200-230	3	TBG1	MBO1	TBO1
				380-575	5			
			M-1	200-230	7-1/2	TCG1	—	—
				380-575	10			

Table 16.19: Two Speed, Class 2512 (Wye-Connected Separate Winding Motors Only)

Class	Description	Number of Poles	NEMA Size	Ratings			NEMA 1 Surface Mounting		Open Type	
				Motor Voltage	Constant Hp	Constant Torque or Variable Torque	Square P.B. Operator	Toggle Operator	Square P.B. Operator	Toggle Operator
2512	Standard	3-Pole	M-0	200-230	2	3	—	TBG1	—	TBO1
				380-575	3	5				
			M-1	200-230	5	7-1/2	MCG1	TCG1	MCO1	TCO1
				380-575	7-1/2	10				

Thermal Units

Starters will not operate without properly installed thermal units and device reset. Thermal unit must be installed so that markings face the front of starter.

Application Data

Size–Available in NEMA Sizes M-0, M-1, and M-1P.

Poles–Two poles single phase; three poles polyphase; 2 poles DC.

Voltage–600 Vac max.; 250 Vdc max.

Overload Relays–Melting alloy thermal overload relays have provisions for one Type B thermal unit for single phase starters and three Type B thermal units for three phase starters. **All thermal units must be installed and the device reset before the starter contacts will operate.** After overload relays have tripped, allow one or two minutes for the alloy to solidify before resetting.

Operator–Available with a push button or toggle operator in open and NEMA 1 versions. NEMA 4/4X (stainless) and 12 versions utilize a direct acting push button only. NEMA 4/4X (polyester) and 7/9 versions utilize an external toggle to actuate a push button device inside.

Maintenance of Equipment

For proper performance, all equipment should be periodically inspected and maintained. Replacement contacts and interlocks are available in kit form to facilitate servicing and stocking. In addition, the service bulletin contains an exploded view of the device with components clearly marked for easy identification by description and part number.

Mechanism Lock Off – Both open devices and starters in NEMA 1 surface and flush mounting, and NEMA 4, 4X, 7 & 9, and 12 enclosures can be locked in the Off or Stop position.
The NEMA 1 surface mounting, 4, 4X, 7 & 9, and 12 enclosures can also be locked closed to prevent unauthorized entry.

Table 16.20: Terminal information and Replacement Contact Kits

NEMA Size	Power Terminals		Auxiliary Interlock Terminals		Number of Poles	Service Bulletin	Replacement Contact Kit	
	Type of Lug	Wire Size (Solid or Stranded Copper Wire) Min.-Max.	Type of Lug	Wire Size (Solid or Stranded Copper Wire) Min.-Max.			Class	Type
M-0	Pressure Wire	14–8	Pressure Wire	16–12	2 or 3	312AS	9998	ML1
M-1	Pressure Wire	14–8	Pressure Wire	16–12	2 or 3	312AS	9998	ML2
M-1P	Box Lug	14–6	Pressure Wire	16–12	2	312AS	9998	ML2

Accessories and Modification Kits

One auxiliary contact, either N.O. or N.C. can easily be added internally to any open or enclosed Type M or T manual starter. It occupies the space provided in either the upper right hand or left hand corners of the device. These contacts are for AC loads only. For electrical ratings, refer to page 16-130, Class 9999 Types SX11 or SX12.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Approximate Dimensions




NEMA 1
General Purpose Surface Mounting



NEMA 12
Dusttight and Driptight
Industrial Use



NEMA 4/4X
Watertight and Dusttight
Stainless Steel

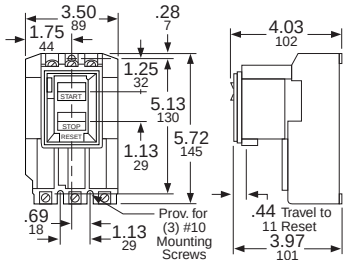


Class 2510 Type M
Sizes M-0, M-1 and M-1P, Open Style
Approximate Shipping Weight: 3 lb




NEMA 4/4X
Watertight, Dusttight
and Corrosion Resistant
Glass Polyester




NEMA 7 & 9
Hazardous Locations
Cast Iron

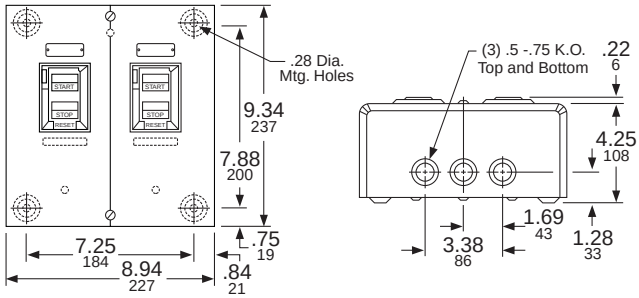


Classes 2511, 2512, Types M & T
Sizes M-0 and M-1 NEMA 1
General Purpose Enclosure
Approximate Shipping Weight: 9 lb

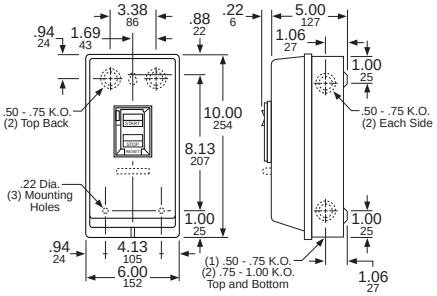


Class 2510 Type M & T Size M-1P
NEMA 1 General Purpose Enclosure
Approximate Shipping Weight: 5 lb

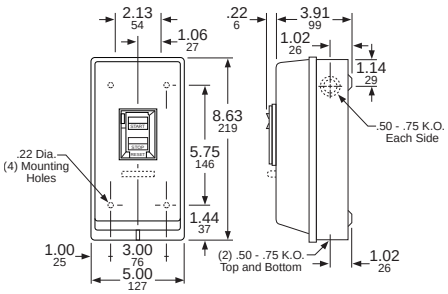


Class 2510 Type M & T Sizes M-0 and M-1
NEMA 1 General Purpose Enclosure
Approximate Shipping Weight: 5 lb

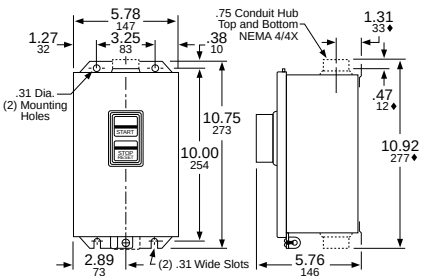


Class 2510 Type M Sizes M-0, M-1 and M-1P
NEMA 4/4X Watertight Stainless Steel Enclosure
NEMA 12 Dusttight Industrial Use Enclosure
Approximate Shipping Weight: 9 lb

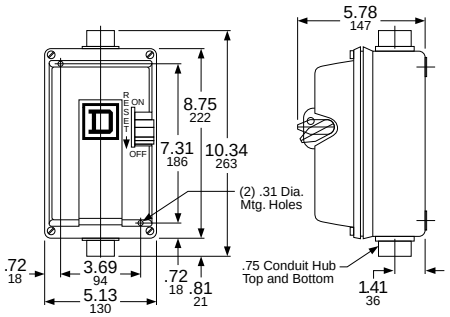

Class 2510 Type M Size M-0 (AC–DC)
and Size M-1 (DC) NEMA 4/4X
Watertight Corrosion-Resistant
Glass Polyester Enclosure
Approximate Shipping Weight—6 lb

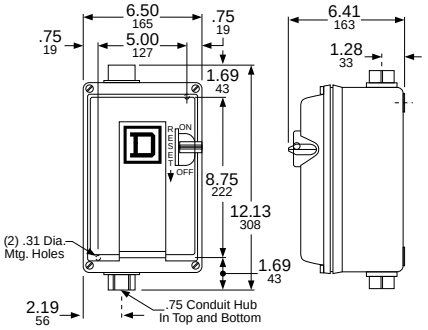

Class 2510 Type M Sizes M-1 and M-1P (AC)
NEMA 4/4X Watertight Corrosion-Resistant
Glass Polyester Enclosure
Approximate Shipping Weight—6 lb

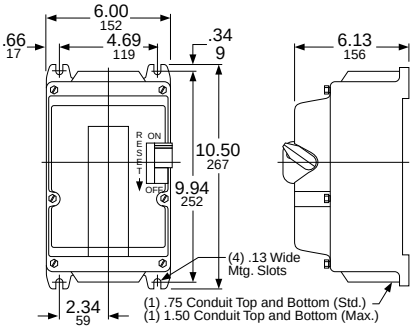

Class 2510 Type M Sizes M-0, M-1 and M-1P
NEMA 7 & 9 Hazardous Location
Cast Iron Enclosure
Approximate Shipping Weight—18 lb

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Accessories, Modifications, and Replacement Parts

Table 16.21: Modifications (Types M & T only)

Description	Factory Modifications (Forms)	Field Modification Kits, Class & Type
Auxiliary Contacts *[15]*	X1 (1 N.O.)	9999SX11 (N.O.)
	X2 (1 N.C.)	9999SX12 (N.C.)
Jumper Straps *[16]*	N/A	9998SO31
Contactor only	Y76	N/A

Table 16.22: Accessories—Class 2510 Types F and K

Description	Class & Type
Handle Guard Kit with Padlock Provision *[17]*	2510FL1

Table 16.23: Replacement Nameplates—Class 2510 Types F and K

Description	Application	Nameplate Marking	Nameplate Type Number—Class 2510			
			For Type K Switch		For Type F Starter (includes Reset indication)	
			Without Pilot Light	With Pilot Light	Without Pilot Light	With Pilot Light
1-3/4" x 2-13/16" Nameplate with Embossed Mounting Holes for #6 Oval Head Screws	Standard commercial switch box cover or flush plate, including Square D stainless steel plates	(Special marking –specify the marking desired)	FN5	—	FN6	—
1-29/32" x 3-27/32" Flat Nameplate with Mounting Holes for #6 Pan Head Screws	Square D NEMA 1 surface mounted enclosure or gray flush plate	High	FN11	FN21	FN31	FN41
		Low	FN12	FN22	FN32	FN42
		Forward	FN13	—	—	—
		Reverse	FN14	FN24	—	—
		(Special marking—specify the marking desired)	—	FN25	—	FN45

Contact Kits

See page 16-126 for Class 9998 Replacement Contact Kits.

Table 16.24: Replacement Part Kits

Enclosure	Product Description	Kit Catalog No.
Replacement Toggle Kits		
NEMA 4	Type FW and KW	9998HW1
Replacement Handle Kits		
NEMA 12	Type MBA, MCA (Ser. A & B)	9998HWA1
	Type MBA, MCA (Ser. C)	31085-381-50
NEMA 4/4X (Stainless)	Type MBW, MCW (Ser. A & B)	9998HWA1
	Type MBW, MCW (Ser. C)	31085-381-50
NEMA 4/4X (Polyester)	Type MBW (Size 0)	9998HWA1
	Type MCW (Size 1)	9998HR3
NEMA 7 and 9	Type MBR, MCR	9998HR3
Description		**Kit Catalog No.**
Internal Lever		9998IL1

Table 16.25: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9991	KE3

Table 16.26: Enclosures

For use with Class 2510 Type	Enclosure	Catalog No.
MBO and MCO	NEMA 1 Flush Mount (with pull box and plaster adjustment)	9991MF1
	NEMA 1 Flush Mount (without pullbox but with mounting strap)	9991MF2
KO1, KO2, KO2C, KO3, KO3B, KO6	NEMA 3R	9991KE3

[15] For proper operation, only one auxiliary contact kit per device may be added.
[16] Used to control a single phase motor utilizing a three phase starter.
[17] Standard on Type K devices.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

For detailed information about TeSys™ Ultra, visit www.se.com/us/en/.



Power Base

TeSys™ Ultra Selection

The NEMA style TeSys Ultra motor starter is an integrated product—simple to choose and to install—consisting of a control unit snapped into a power base. TeSys Ultra can be configured to fit specific applications as well. The NEMA style TeSys Ultra starter uses the same optional accessories—reverser, current limiter, predictive maintenance options, and communication options—as the IEC TeSys Ultra.

Selecting a NEMA TeSys Ultra Motor Starter in Three Steps



Table 16.27: Step 1. Select Power Base

Control Connection	NEMA Size	Max. hp, Three Phase				Max. hp, Single Phase		Power Bases
		200/208 V	220/240 V	460 V	575/600 V	120 V	240 V	Catalog Number
With screw terminations	1	7.5	7.5	10	10	2	3	LUB32NR

Table 16.28: Voltage Codes

Volts	24	48–72	110–240
DC	BL*[1]*	—	—
AC	B	—	—
DC or AC	—	ES*[2]*	FU

Table 16.29: Step 2. Select Control Unit *[3]*

Setting Range A	Standard 3-phase Class 10 trip *[4]*	Advanced 3-Phase Class 10 trip *[4]*	Advanced Single-Phase Class 10 trip *[4]*	Advanced 3-Phase Class 20 trip *[4]*
0.15–0.6	LUCAX6••	LUCBX6••	LUCCX6••	LUCDX6••
0.3–1.4	LUCA1X••	LUCB1X••	LUCC1X••	LUCD1X••
1.25–5.0	LUCA05••	LUCB05••	LUCC05••	LUCD05••
3–12	LUCA12••	LUCB12••	LUCC12••	LUCD12••
4.5–18	LUCA18••	LUCB18••	LUCC18••	LUCD18••
8–32	LUCA32••	LUCB32••	LUCC32••	LUCD32••



Control Unit



Auxiliary Contact

Table 16.30: Step 3. Select Auxiliary Contacts (optional)

Auxiliary Contact Blocks									
Terminals	Contact Indicates	Normal Contact Status	Contact State for Each Mode *[5]*						Catalog Number
			Off	Ready	Run	Short Circuit Trip	Overload Trip (Manual Reset)	Overload Trip (Remote/Auto Reset) *[6]*	
Screw	Ready condition	N.O.	O	I	I	O	O	I	LUA1C11
	Fault condition	N.C.	I	I	I	O	O	I	
Screw	Ready condition	N.O.	O	I	I	O	O	I	LUA1C20
	Fault condition	N.O.	O	O	O	I	I	O	

Table 16.31: TeSys Ultra Auxiliary Contact Function Modules

Terminals	Contact Indicates	Normal Contact Status	Catalog Number
Screw	Power pole status	2 N.O.	LUFN20
Screw	Power pole status	1 N.O. and 1 N.C.	LUFN11
Screw	Power pole status	2 N.C.	LUFN02

Table 16.32: TeSys Ultra Accessories

Accessories for LUB32NR	Quick Description	For details and selection, see pages:
Current limiter	Increases the breaking capacity to 130kA @ 460 V	18-25
Reverser	Stacked or side mounted (LU6MB0•• *[4]* only)	18-25
Line phase barrier	Required for use as a self-protected combination starter (UL508 Type E)	18-25
Multifunction control unit	Has functions for monitoring and predictive maintenance	18-25
Function modules	Fault differentiation, thermal overload, motor load indication	18-25
Communication modules	Integrates into existing networks, major protocols available	18-26
Soft starter + TeSys™ Ultra	Use Altistart U01Soft Starter with TeSys™ Ultra	18-42
Power bus bars	TeSys™ Ultra cabling accessory	18-26
Control circuit accessories	Control circuit contact block, external handles, and control circuit filters	18-26

Accessories and Dimensions: See Section 18.

E164862
CCN NLDX


LR43364
Class 3211 08

[1] DC voltage with range of 0.90 to 1.10 of nominal.
[2] 48–72 Vdc; 48 Vac.
[3] The control unit contains solid-state overload relay and control power source for TeSys Ultra. For more details on the different control units, their functions, and placement on the power base see Section 18.
[4] Complete the catalog number by adding the appropriate voltage code from Table 16.28. For example: LUCAX6FU.
[5] I = closed contact; O = open contact.
[6] Requires a multifunction or advanced control unit, plus fault differentiation module LUFDDA10.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Interpreting the Catalog Number

Table 16.33: TeSys N Catalog Numbering System

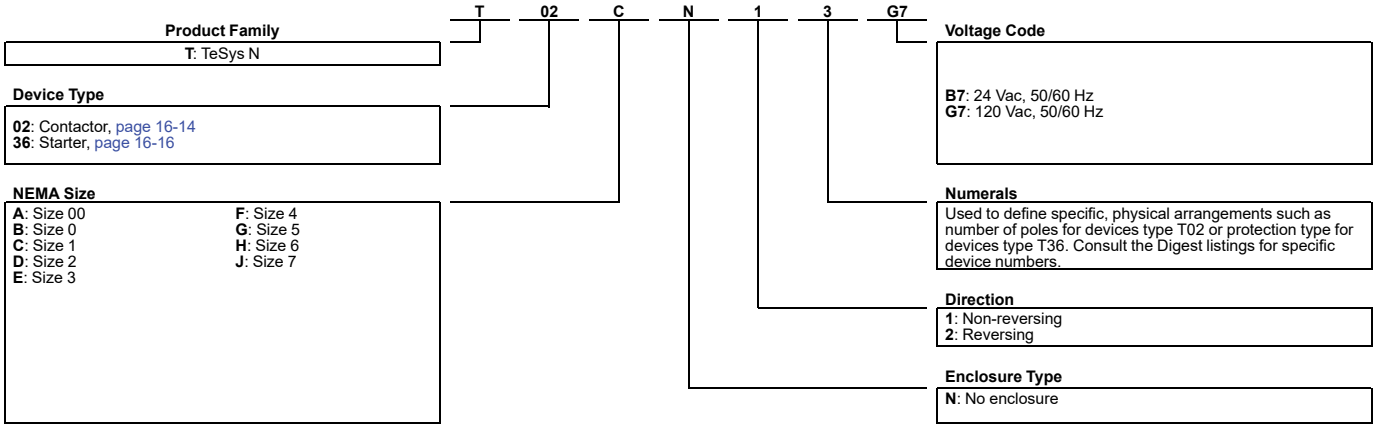

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



TeSys N non-reversing contactor, Size 1



TeSys N non-reversing contactor, Size 3

New!

TeSys N Non-Reversing Contactors

TeSys N contactors are used to switch heating loads, capacitors, transformers and electric motors where overload protection is provided separately. TeSys N contactors are available in NEMA Sizes 00–7. Target market segments include hospitals; retail; food and beverage; marine; oil and gas; and mining, metals, and minerals.

Table 16.34: TeSys N Non-Reversing Contactors, 3-Pole Polyphase, 600 Vac Max. (replace ●● with the coil voltage code)

NEMA Size	Continuous Current Rating (A)	Motor Voltage	Max HP	Open Catalog No. *[1]*
00	9	200	1.5	T02AN13●●
		230	1.5	
		460	2	
		575	2	
0	18	200	3	T02BN13●●
		230	3	
		460	5	
		575	5	
1	27	200	7.5	T02CN13●●
		230	7.5	
		460	10	
		575	10	
2	45	200	10	T02DN13●●
		230	15	
		460	25	
		575	25	
3	90	200	25	T02EN13●●*[2]*
		230	30	
		460	50	
		575	50	
4	135	200	40	T02FN13●●*[2]*
		230	50	
		460	100	
		575	100	
5	270	200	75	T02GN13●●*[2]*
		230	100	
		460	200	
		575	200	
6	540	200	150	T02HN13●●*[2]*
		230	200	
		460	400	
		575	400	
7	810	200	—	T02JN13●●*[2]*
		230	300	
		460	600	
		575	600	

Table 16.35: TeSys N Non-Reversing Contactors, 3-Pole Single Phase, 600 Vac Max.
(replace ●● with the coil voltage code)

NEMA Size	Continuous Current Rating (A)	Motor Voltage	Max HP	Open Catalog Number
00	9	115	1/3	T02AN13●●
		230	1	
0	18	115	1	T02BN13●●
		230	2	
1	27	115	2	T02CN13●●
		230	3	
2	45	115	3	T02DN13●●
		230	7.5	

Table 16.36: TeSys N Coil Voltage Codes

Voltage	Voltage Code by NEMA Size								
	Size 00	Size 0	Size 1	Size 2	Size 3	Size 4	Size 5	Size 6	Size 7
24 Vac	B7	B7	B7	n/a					
120 Vac	G7	G7	G7	G7	G7	G7	G7	F7	F7

Dimensions: page 16-23 to page 16-27
Accessories: page 16-18 to page 16-21
Replacement Parts: page 16-22
Lugs: page 16-21

[1] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to voltage codes shown in Table 16.36.
[2] Order lugs separately. See Table 16.59. The mounting hardware (screws, washers, and nuts) comes with the contactors, not the lugs. Starters Sizes 3–7 come with lugs.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



TeSys N reversing contactor, Size 00



TeSys N reversing contactor, Size 4

New!

TeSys N Reversing Contacts

TeSys N reversing contactors are used for starting, stopping and reversing AC motors where overload protection is provided separately. TeSys N reversing contactors are mechanically and electrically interlocked and are available in NEMA Sizes 00–7. Target market segments include hospitals; retail; food and beverage; marine; oil and gas; and mining, metals, and minerals.

Table 16.37: TeSys N Reversing Contactors, 3-Pole Polyphase, 600 Vac Max. (replace ●● with the coil voltage code)

NEMA Size	Continuous Current Rating (A)	Motor Voltage	Max HP	Open Catalog No. *[3]*
00	9	200	1.5	T02AN23●●
		230	1.5	
		460	2	
		575	2	
0	18	200	3	T02BN23●●
		230	3	
		460	5	
		575	5	
1	27	200	7.5	T02CN23●●
		230	7.5	
		460	10	
		575	10	
2	45	200	10	T02DN23●●
		230	15	
		460	25	
		575	25	
5	270	200	75	T02GN23●●*[4]*
		230	100	
		460	200	
		575	200	
6	540	200	150	T02HN23●●*[4]*
		230	200	
		460	400	
		575	400	
7	810	200	—	T02JN23●●*[4]*
		230	300	
		460	600	
		575	600	

Table 16.38: TeSys N Reversing Contactors, 3-Pole Single Phase, 600 Vac Max. (replace ●● with the coil voltage code)

NEMA Size	Continuous Current Rating (A)	Motor Voltage	Max HP	Open Catalog No. *[3]*
00	9	115	1/3	T02AN23●●
		230	1	
0	18	115	1	T02BN23●●
		230	2	
1	27	115	2	T02CN23●●
		230	3	
2	45	115	3	T02DN23●●
		230	7.5	

Table 16.39: TeSys N Coil Voltage Codes

Voltage	Voltage Code by NEMA Size								
	Size 00	Size 0	Size 1	Size 2	Size 3	Size 4	Size 5	Size 6	Size 7
120 Vac	G7	G7	G7	G7	G7	n/a	n/a	F7	F7

Dimensions: page 16-23 to page 16-27
Accessories: page 16-18 to page 16-21
Replacement Parts: page 16-22
Lugs: page 16-21

[3] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to the voltage codes shown in Table 16.39.
[4] Order lugs separately. See Table 16.59. The mounting hardware (screws, washers, and nuts) comes with the contactors, not the lugs. Starters Sizes 3–7 come with lugs.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

New!

TeSys N Non-Reversing Starters

TeSys N starters are used for full-voltage starting and stopping of AC squirrel-cage motors. Starters are available in NEMA Sizes 00–7 and come standard with Motor Logic Class 10/20 selectable solid-state overload relays. Starters with bimetal overload protection can be assembled from TeSys N contactors and TeSys Deca overload relays.



TeSys N non-reversing starter, Size 1



TeSys N Size 1 Contactor + TeSys LRD Bimetallic Overload Relay



TeSys N non-reversing starter, Size 3



TeSys N Size 1 Contactor + TeSys LR9D Electronic Overload Relay

For more information on TeSys Deca relays, see Section 18.

Dimensions: page 16-23
TeSys N Accessories: pages page 16-18

Table 16.40: 3-Pole Polyphase, 600 Vac Max. (replace ●● with the coil voltage code)

NEMA Size	Continuous Current Rating (A)	Motor Voltage	Max HP	Open Catalog No. [5]
00	9	200	1.5	T36AN13●●
		230	1.5	
		460	2	
		575	2	
0	18	200	3	T36BN13●●
		230	3	
		460	5	
		575	5	
1 [6]	27	200	7.5	T36CN13●●
		230	7.5	
		460	10	
		575	10	
2	45	200	10	T36DN13●●
		230	15	
		460	25	
		575	25	
3	90	200	25	T36EN13●●
		230	30	
		460	50	
		575	50	
4	135	200	40	T36FN13●●
		230	50	
		460	100	
		575	100	
5	270	200	75	T36GN13●●
		230	100	
		460	200	
		575	200	
6	540	200	150	T36HN13●●
		230	200	
		460	400	
		575	400	

Table 16.41: TeSys N Coil Voltage Codes

Voltage	Voltage Code by NEMA Size							
	Size 00	Size 0	Size 1	Size 2	Size 3	Size 4	Size 5	Size 6
120 Vac [7]	G7	G7	G7	G7	G7	G7	G7	F7

Table 16.42: TeSys LR9D Electronic Overload Relays

Current Setting Range (A)	For Direct Mounting to TeSys N Contactors	Class 5/10/20/30 Selectable
0.1–0.5	Size 00–1	LR9D01
0.4–2.0		LR9D02
1.6–8.0		LR9D08
6.4–32		LR9D32

Table 16.43: TeSys Deca Overload Relays—Ambient Compensated, Bimetallic, Direct Mounting

Current Setting Range (A)	For Direct Mounting to TeSys N Contactors	Class 10 with Single-Phase Sensitivity	Class 10 without Single-Phase Sensitivity	Class 20 with Single-Phase Sensitivity	Class 20 without Single-Phase Sensitivity
0.10–0.16	Size 00–1	LRD01	LR3D01	—	—
0.16–0.25	Size 00–1	LRD02	LR3D02	—	—
0.25–0.40	Size 00–1	LRD03	LR3D03	—	—
0.40–0.63	Size 00–1	LRD04	LR3D04	—	—
0.63–1	Size 00–1	LRD05	LR3D05	LRD05L	—
1–1.6	Size 00–1	LRD06	LR3D06	LRD06L	—
1.6–2.5	Size 00–1	LRD07	LR3D07	LRD07L	LR3D07L
2.5–4	Size 00–1	LRD08	LR3D08	LRD08L	LR3D08L
4–6	Size 00–1	LRD10	LR3D10	LRD10L	LR3D10L
5.5–8	Size 00–1	LRD12	LR3D12	LRD12L	LR3D12L
7–10	Size 00–1	LRD14	LR3D14	LRD14L	LR3D14L
9–13	Size 0–1	LRD16	LR3D16	LRD16L	LR3D16L
12–18	Size 0–1	LRD21	LR3D21	LRD21L	LR3D21L
16–24	Size 0–1	LRD22	LR3D22	—	—
17–24	Size 0–1	—	—	LRD22L	LR3D22L
23–32	Size 1	LRD32	LR3D32	LRD32L	LR3D32L
9–13	Size 2	LRD313	LR3D313	LRD313L	—
12–18	Size 2	LRD318	LR3D318	LRD318L	—
16–25	Size 2	LRD325	LR3D325	LRD325L	—
23–32	Size 2	LRD332	LR3D332	LRD332L	—
30–40	Size 2	LRD340	LR3D340	LRD340L	—
37–50	Size 2	LRD350	LR3D350	LRD350L	—

[5] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to the coil voltage codes shown in Table 16.41.


[6] Special size combinations of the contactor and Motor Logic overload relay are available. Add **0** to the catalog number before the coil voltage for a Size 0 overload relay (6–18 A); **9** for a Size 00C (3–9 A); and **8** for a Size 00B (1.5–4.5 A)—for example, T36CN13**0**G7.

[7] The 24 and 120 Vac coils are available with optional separate control; add **Form S** to the catalog number (for example, T36AN13B7**S**).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



TeSys N reversing starter, Size 00



TeSys N reversing starter, Size 4

E164862
CCN NLDX

LR43364
Class 3211 04

New!

TeSys N Reversing Starters

TeSys N reversing starters are used for full-voltage starting, stopping, and reversing of AC squirrel cage motors. Reversing starters are mechanically and electrically interlocked and are available in NEMA Sizes 00 through 5. Starters come with Motor Logic Class 10/20 selectable solid-state overload relays as standard. Reversing starters with bimetal overload protection can be assembled from TeSys N reversing contactors and TeSys Deca overload relays. For more information on TeSys Deca overload relays, see Section 18.

Table 16.44: TeSys N Reversing Starters, 3-Pole Polyphase, 600 Vac Max. (replace ●● with the coil voltage code)

NEMA Size	Continuous Current Rating (A)	Motor Voltage	Max HP	Open Catalog No. *[8]*
00	9	200	1.5	T36AN23●●
		230	1.5	
		460	2	
		575	2	
2	45	200	10	T36DN23●●
		230	15	
		460	25	
		575	25	
3	90	200	25	T36EN23●●
		230	30	
		460	50	
		575	50	
4	135	200	40	T36FN23●●
		230	50	
		460	100	
		575	100	

Table 16.45: TeSys N Coil Voltage Codes

Voltage	Voltage Code by NEMA Size			
	Size 00	Size 2	Size 3	Size 4
120 Vac*[9]*	G7	G7	G7	G7

Dimensions: page 16-23 to page 16-27
Accessories: page 16-18 to page 16-21
Replacement Parts: page 16-22
Lugs: page 16-21

[8] Replace the bullets (●●) in the catalog number with the coil voltage code. Refer to the coil voltage codes shown in Table 16.45.
[9] The 24 and 120 Vac coils are available with optional separate control; add **Form S** to the catalog number (for example, T36AN13B7**S**).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Front Mounted Auxiliary Blocks

Auxiliary Contacts, Time Delay, Mechanical Latch

Table 16.46: Standard, Instantaneous Auxiliary Contact Blocks

Snap-On Mounting	Number of Contacts	Composition		Catalog Number
		N.O.	N.C.	
To front of Size 00–2 or **To right side of** Size 3–7	4	2	2	LADN22 *[10]*
		1	3	LADN13 *[10]*
		4	0	LADN40 *[10]*
		0	4	LADN04 *[10]*
		3	1	LADN31 *[10]*
		2 *[11]*	2 *[11]*	LADC22 *[11]*
	2	1	1	LADN11 *[10]*
		2	0	LADN20 *[10]*
		0	2	LADN02 *[10]*
To left side of Size 3–7	1	1	0	LADN10
		0	1	LADN01
To side of Size 00–2	2	1	1	LAD8N11 *[12]*
		2	0	LAD8N20 *[12]*

Table 16.47: Instantaneous Blocks with Dust-Tight Auxiliary Contacts (IP54) NEMA 12

Snap-On Mounting	Standard Contacts		Dust-Tight Contacts		Catalog Number
	N.O.	N.C.	N.O.	N.C.	
To front of Size 00–2 or **To right side of** Size 3–7	—	—	2	—	LA1DX20
	2	—	2	—	LA1DZ40
	1	1	2	—	LA1DZ31
	—	—	2	—	LA1DY20 *[13]*

Table 16.48: Pneumatic Time Delay Contact Blocks

Snap-On Mounting	Time Delay Contacts		Type	Range of Time Delay	Catalog Number *[14]*
	N.O.	N.C.			
To front of Size 00–2 or **To right side of** Size 3–7	1	1	On energization (on delay)	0.1 to 3 s *[15]*	LADT0
				0.1 to 30 s	LADT2
				10 to 180 s	LADT4
				1 to 30 s *[16]*	LADS2
	1	1	On de-energization (off-delay)	0.1 to 3 s *[15]*	LADR0
				0.1 to 30 s	LADR2
				10 to 180 s	LADR4

Table 16.49: Mechanical Latch Blocks with Manual or Electrical Unlatch

Front snap-on mounting onto	Application	Catalog Number
Size 00–2	For silent operation and energy conservation	LAD6K10 *[17][18]*

Table 16.50: Coil Voltage Codes for LA6DK Mechanical Latch Blocks








Volts	24	120	208	240	480
AC or DC *[19]*	B	F	L	M	R

[10] For spring terminal versions of these blocks, add a **3** to the end of the catalog number (for example, LADN22**3**).
[11] Including 1 N.O. + 1 N.C. make-before-break overlapping contacts.
[12] 1 block may be added to the left side of Size 00–1, AC coils only; only 1 block may be added to either side of the Size 2 contactor, AC coil only. Cannot be installed on Size 00–2 contactors with DC coils.
[13] Device comes with 4 ground terminal points.
[14] For spring terminal versions of these blocks, add a **3** to the end of the catalog number (for example, LADT2**3**). There is no charge for this modification.
[15] Scale range is expanded between 0.1 and 0.6 seconds on the dial for more accurate settings at the lower end of the range.
[16] Switching time between the opening of the N.C. contact and the closing of the N.O. contact: 40 ms ± 15 ms .
[17] Complete the catalog number by adding the coil voltage code (for example, LAD6K10F).
[18] Does not include internal coil clearing contact.
[19] DC available at 24 V only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

TeSys™ N Reversing Contactors: Field Assembly

Table 16.51: Contactors

For assembly of reversing contactors comprising two identical, horizontally mounted contactors without common baseplate:	Mechanical interlock		Set of power connections
	Without electrical interlock	With incorporated electrical interlock (2 N. C. contacts)	Reversing contactors for motor control
			
	Catalog Number	Catalog Number	Catalog Number
Size 00-1	LAD9R1 *[20]*	LAD9R1V *[20]*	Included with kit
			
	Catalog Number	Catalog Number	Catalog Number
LC1D40A, D50A, D65A	LAD4CM	—	LA9D65A69
	LAD9R3 *[21]*	—	—
			
Reversing contactors comprising two identical, horizontally mounted contactors			
	Catalog Number	Catalog Number	Catalog Number
Size 3	LA9FF970	—	LA9FF976
Size 4		—	LA9F15076
Size 5	LA9FJ970	—	LA9FJ976
Size 6		—	LA9FK976
Size 7	LA9FL970	—	LA9FL976
	 LA9F●970		 LA9F●976

[20] Kit including mechanical interlock and wiring.
[21] Kit combines both LAD4CM and LA9D65A69

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Coil Suppressors and Cabling Accessories

RC Coil Suppressor



LA4DA1U

- Transient voltage limited to 300% of nominal voltage, maximum.
- Oscillating frequency is limited to 400 Hz maximum. Slight increase in drop-out time (1.2 to 2 times normal).

Table 16.52: Resistor/Capacitor Circuit (RC) for Reduction of Electrical Noise in AC Contactor Coils

Installed by	Mounting on	Operating Voltage 50/60 Hz	Catalog Number
Snapping into the cavity on the right side without tools *[22]*	Size 00–1	24 V	LAD4RCE
		120 V	LAD4RCG
		120–240 V	LAD4RCU
Snap-on mounting, and connection without tools to the contactor coil terminals	Size 2	24 V	LAD4RC3E
		120 V	LAD4RC3G
		120-240 V	LAD4RC3U

Varistor Coil Suppressor

- Transient voltage value limited to 200% of nominal voltage, maximum.
- Maximum reduction of transient voltage peaks. Slight increase in drop-out time (1.1 to 1.5 times normal).

Table 16.53: Varistor (Peak Limiting) for Reduction of Electrical Noise in AC Contactor Coils

Installed by	Mounting on	Operating Voltage 50/60 Hz	Catalog Number
Snapping into the cavity on the right side without tools*[22]*	Size 00–1	24 V	LAD4VE
		120 V	LAD4VG
		120–240 V	LAD4VU
Snap-on mounting, and connection without tools to the contactor coil terminals	Size 2	24 V	LAD4V3E
		120 V	LAD4V3G
		120-240 V	LAD4V3U

Diode Coil Suppressor




LAD4T3B

- No overvoltage or oscillating frequency.
- Polarized component. Increased drop-out time (6–10 times normal).

Table 16.54: Diode for Reduction of Electrical Noise in DC Contactor Coils

Installed on the upper part by	Mounting on	Operating Voltage, DC	Catalog Number
Snap-on mounting and connection w/o tools to the contactor coil terminals	Size 00–1	24 Vdc	LAD4DDL
Clip-on front mounting	Size 2	24 Vdc	LAD4D3U

Bidirectional Diode Coil Suppressor



LAD4BB• •

- Protection provided by limiting the transient voltage to 2 Uc max.
- Maximum reduction of transient voltage peaks.

Table 16.55: Bidirectional Peak Limiting Diode

Installed by	Mounting on	Operating Voltage 50/60 Hz and DC	Catalog Number
Snapping into the cavity on the right side of the contactor *[22]*	Size 00–1*[23]*	24 (AC only)	LAD4TB
Clip-on front mounting and connection without tools to the contactor coil terminals *[23]*	Size 2	24 V	LAD4T3B
		120 V	LAD4T3G
		208–240 V	LAD4T3U

TeSys N Cabling Accessories

Table 16.56: Cabling Accessories

Usage	Mounting on	Operating Voltage 50/60 Hz		Catalog Number
For adapting existing wiring to a new product or for use with top-mounting accessory.	Size 00–1, AC only	Without coil suppression		LAD4BB
		With coil suppression (varistor)	24 V	LAD4BBVE
			120 V	LAD4BBVG
			120-240 V	LAD4BBVU
For adapting existing wiring to a new product or for use with top-mounting accessory	Size 2, AC only	—		LAD4BB3

[22] Installing the suppressor into the cavity makes the electrical connection. The overall width of the contactor remains the same.
[23] For Size 00–2 with DC coils, 3-pole contactors are fitted with built-in bidirectional diode suppression as standard.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Electronic Timers and Interface Modules

The following accessories require use of cabling accessories (LAD4BB●●) for proper mounting. See page 16-20 for illustration.

The solid-state **Electronic Serial Timer Modules** in Table 16.57 delay the energizing of the contactor coil, and feature built-in varistor surge suppression.

Table 16.57: Electronic Serial Timer Modules

Type	Operational Voltage 24–250 Vac	Time Delay	Catalog Number
On-delay	Size 00–2	0.1–2 s	LA4DT0U
		1.5–30 s	LA4DT2U
		25–500 s	LA4DT4U

The **Interface Modules** in Table 16.58 allow the contactor coils to be energized from low voltage and low current level signals. They come in mechanical relay and solid-state versions. The relay plus manual operation versions include a lever for manually turning the contactor on and off. When a module receives a low-level signal, it allows the separate-sourced control voltage to flow to the contactor coil. It saves space and wiring time compared to conventional interposing relays.

Table 16.58: Interface Modules *[24]*

Interface Type	Operational Voltage 24–250 Vac	Input Voltage	Catalog Number
Relay	Size 00–2	24 Vdc	LA4DFB
Relay Plus Manual Operation	Size 00–2	24 Vdc	LA4DLB
Solid State	Size 00–2	24 Vdc	LA4DWB

Table 16.59: Lugs and Lug Kits *[25]*

TeSys N Contactor	Lugs		Lug Kits*[26]*	Cable size AWG range
	Line Size	Load Side		
Size 3	3 each DZ2FF1	3 each DZ2FF1	DZ2FF6	14 to 2/0
Size 4	3 each DZ2FG1	3 each DZ2FG1	DZ2FG6	6 to 3/0
Size 5	3 each DZ2FJ1	3 each DZ2FJ1	DZ2FJ6	4 to 500 MCM
Size 6	3 each DZ2FK1	3 each DZ2FK1	DZ2FK6	2 x 2 to 600 MCM
Size 7	1 each DZ2FL1 DZ2FL2 DZ2FL3	1 each DZ2FL1 DZ2FL2 DZ2FL3	DZ2FL6	3 x 2 to 600 MCM

Table 16.60: TeSys Safety-Chain Identification System

Description	Compatibility	Package Qty	Catalog Number
Red retrofit contactor safety cover	Size 00–2	10	LAD9ET1S
Red auxiliary contact block, 2 N.O. + 2 N.C.	Size 00–2	1	LADN22S



LA4DFB



LAD9ET1S



LADN22S

[24] Adapter required. See Table 16.56.
[25] The mounting hardware (screws, washers, and nuts) comes with the contactors, not the lugs. Starters Sizes 3–7 come with lugs.
[26] Lug kits incude 6 lugs.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Replacement Contacts and Coils

Table 16.61: Replacement Contact Sets *[27]*

For use on contactors	Number of Poles	Catalog Number
Size 3–4	3 poles	LA5FF431
Size 5	3 poles	LA5F400803
Size 6	3 poles	LA5F500803
Size 7	3 poles	LA5F630803

TeSys N Magnet Coils

Table 16.62: Size 00–1 AC Coils

Rated Nominal Voltage	Catalog Number 50/60 Hz
24	LXD1B7
32	LXD1C7
36	LXD1CC7
42	LXD1D7
48	LXD1E7
60	LXD1EE7
100	LXD1K7
110	LXD1F7
115	LXD1FE7
120	LXD1G7
127	LXD1FC7
200	LXD1L7
208	LXD1LE7
220/230	LXD1M7
230	LXD1P7
230/240	LXD1U7
277	LXD1W7
380/400	LXD1Q7
400	LXD1V7
415	LXD1N7
440	LXD1R7
480	LXD1T7
575	LXD1SC7
600	LXD1X7
Specifications	50/60 Hz
Average consumption - Inrush (inductance 0.75) - Sealed (inductance 0.3)	 70 VA 7 VA
Operating range@ 60 °C	50 Hz: 80–110% of nominal 60 Hz: 85–110% of nominal

Table 16.63: Size 2 AC Coils

Rated Nominal Voltage V	Catalog Number 50/60 Hz
24	LXD3B7
32	LXD3C7
42	LXD3D7
48	LXD3E7
100	LXD3K7
110	LXD3F7
115	LXD3FE7
120	LXD3G7
127	LXD3FC7
200	LXD3L7
208	LXD3LE7
220	LXD3M7
230	LXD3P7
240	LXD3U7
277	LXD3W7
380	LXD3Q7
400	LXD3V7
415	LXD3N7
440	LXD3R7
480	LXD3T7
500	LXD3S7
575	LXD3SC7
600	LXD3X7
Specification	**50/60 Hz**
Average consumption: - Inrush (inductance 0.3) - Sealed (inductance 0.3)	 140 VA (inductance: 0.9) 7.5 VA (inductance: 0.9)
Operating range at θ < 55 °C / 131 °F	80–115% of nominal voltage

Table 16.64: Size 3–7 AC Coils

Contactor Size	Hz	Catalog Number	Catalog Number Suffix *[28]*											
			24 V	48 V	110 V	120 V	208 V	220 V	240 V	277 V	380 V	415 V	440 V	480 V	600 V
Size 3–4	40–400	LX9FF●	— *[29]*	048	110	127	200	220	240	280	380	415	415	500	— *[29]*
Size 5	40–400	LX1FH●	0242	0482	1102	1272	2002	2202	2402	2772	3802	3802	4402	5002	6002
Size 6*[30]*	40–400	LX1FK●	—	048	110	110	200	220	240	280	380	415	415	415	600
Size 7*[30]*	40–400	LX1FL●	—	048	110	110	200	220	240	260	380	415	415	415	600

Table 16.65: Size 3–4 DC Coils

Device Type	Catalog Number	Catalog Number Suffix *[31]*									
		24 V	36 V	48 V	60 V	72 V	110 V	125 V	220 V	250 V	440 V
Size 3–4	LX4FF●	024	035	048	060	070	110	125	220	250	440

[27] Provided per pole: 2 fixed contacts, 1 movable contact, 2 deflectors, 1 backplate, and the mounting screws and washers.
[28] Complete the catalog number by adding the suffix (for example, LX9FF020).
[29] LX1FF020 coil will be available for replacement **only**.
[30] The 600 V coils for Sizes 6 and 7 do not include an auxiliary contact for holding circuits. If required, select the appropriate contacts from page 16-18.
[31] Complete the catalog number by adding the suffix (for example, LX4FF024).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

TeSys™ N Non-Reversing Contactors

Table 16.66: TeSys N Contactors, Size 00–1, Non-Reversing *[32]*


Dimensional Diagram	Dimension	Description	Dimensions			
			AC Coil		DC Coil	
			in.	mm	in.	mm
	b	Without add-on accessories	3.35	85	3.35	85
	b1	With LAD4BB	3.86	98	n/a	n/a
		With LA4D•2	4.49	114	n/a	n/a
		With LA4DF, DT	4.84	123	n/a	n/a
		With LA4DR, DW, DL	5.12	130	n/a	n/a
	c	Without cover or add-on blocks	3.54	90	3.90	99
		With cover, without add-on blocks	3.62	92	3.98	101
	c1	With LADN or LADC	4.84	123	5.20	132
	c2	With LAD6K10	5.31	135	5.67	144
	c3	With LADT, R, S	5.63	143	5.98	152
		With LADT, R, S and sealing cover	5.79	147	6.14	156

Table 16.67: TeSys N Contactors, Size 2, Non-Reversing *[32]*

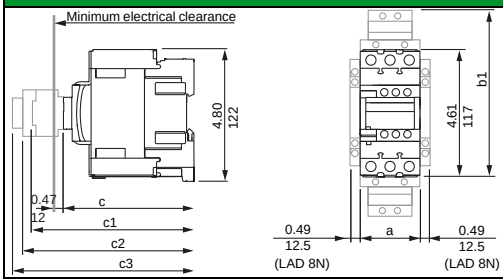
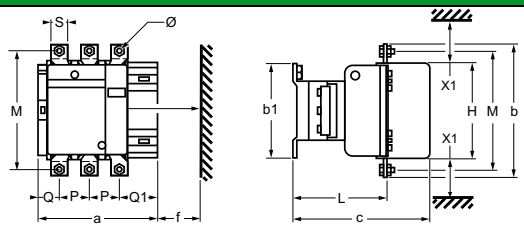
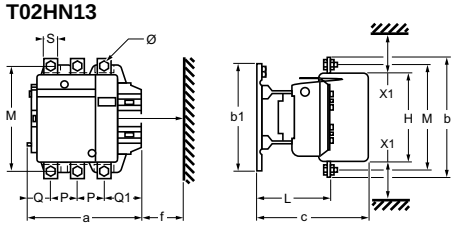
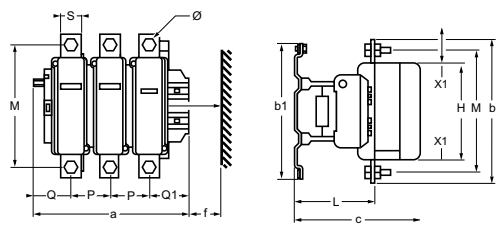
Dimensional Diagram	Dimension	Description	Dimensions	
			AC or DC Coils	
			in.	mm
	a	Contactor	2.17	55
	b1	With LA4 DB3 or LAD 4BB3	5.35	136
		With LA4 DF, DT	6.18	157
		With LA4 DM, DW, DL	6.54	166
	c	Without cover or add-on blocks	4.65	118
		With cover, without add-on blocks	4.72	120
	c1	With LAD N or C (2 or 4 contacts)	5.91	150
	c2	With LAD 6K10 or LA6 DK	6.42	163
	c3	With LAD T, R, S	6.73	171
		With LAD T, R, S and sealing cover	6.89	175

Table 16.68: TeSys N Contactors, Size 3–7, Non-Reversing

Dimensional Diagram, Size 3–5	Dimension	Dimensions					
		T02EN13		T02FN13		T02GN13	
		in.	mm	in.	mm	in.	mm
T02EN13 **T02FN13** **T02GN13** 	a	6.4	163.5	6.4	163.5	8.4	213
	P	1.5	37	1.6	40	1.9	48
	Q	1.2	29.5	1	26	1.7	43
	Q1	2.4	60	2.3	57.5	2.9	74
	S	0.8	20	0.8	20	1	25
	ø	M6		M8		M10	
	f	5.2	131	5.2	131	5.8	147
	b	6.4	162	6.7	170	8.1	206
	b1	5.4	137	5.4	137	5.7	145
	M	5.8	147	5.9	150	7.1	181
	H	4.9	124	4.9	124	6.2	158
	c	6.7	171	6.7	171	8.6	219
	L	4.2	107	4.2	107	5.7	145
	X1 220–500 V	0.4	10	0.4	10	0.4	10

Dimensional Diagram, Size 6	Dimension	T02HN13	
		in.	mm
T02HN13 	a	9.2	233
	P	2.2	55
	Q	1.8	46
	Q1	3	77
	S	1.2	30
	ø	M10	
	f	5.9	150
	b	9.4	238
	b1	8.2	209
	M	8.2	208
	H	6.8	172
	c	9.1	232
	L	5.7	146
	X1 220–500 V	0.6	15

Dimensional Diagram, Size 7	Dimension	T02JN13	
		in.	mm
T02JN13 	a	12.2	309
	P	3.2	80
	Q	2.4	60
	Q1	3.5	89
	S	1.6	40
	ø	M12	
	f	7.1	181
	b	12	304
	b1	11	280
	M	10.4	264
	H	8	202
	c	10	255
	L	6.1	155
	X1 220–500 V	0.8	20

[32] DIN rail and panel mountable.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

TeSys™ N Reversing Contactors

Table 16.69: TeSys N Size 00–1, Reversing Contactors *[33]*

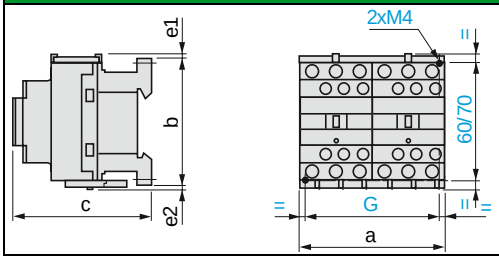
Dimensional Diagram	Dimension	Dimensions			
		AC Coil		DC Coil	
		in.	mm	in.	mm
	**a**: Without side-mount accessories	3.54	90	3.54	90
	b: Contactor base	3.35	85	3.35	85
	c: With cover, without add-on blocks	3.62	92	3.98	101
	e1	0.35	9	0.35	9
	e2	0.20	5	0.20	5
	G: Mounting holes	3.15	80	3.15	80

Table 16.70: TeSys N Size 2, Reversing Contactors *[33]*

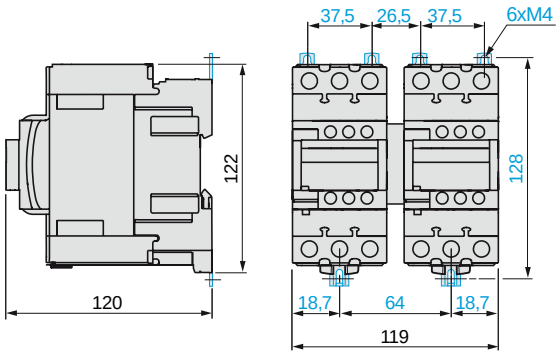
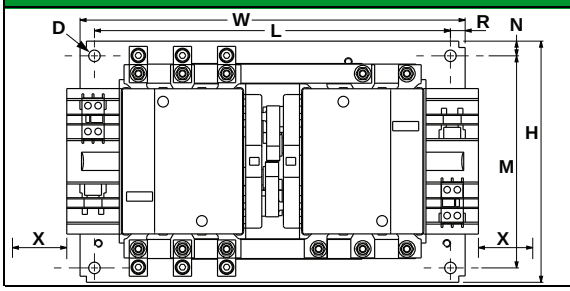
Dimensional Diagram	Description	Dimensions	
		AC and DC Coils	
		in.	mm
	Width	4.69	119
	Height	4.80	122
	Depth with cover, without add-on blocks	4.72	120
	Load side mounting hole width	2.52	64
	Line side mounting hole width	3.40	101.5
	Mounting hole height	5.04	128

Table 16.71: TeSys N Size 3–7, Reversing Contactors

Dimensional Diagram	Dimension	Dimensions									
		T02EN23		T02FN23		T02GN23		T02HN23		T02JN23	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
	D	0.38	9.7	0.38	9.7	0.56	14.2	0.56	14.2	0.56	14.2
	H	7.96	202.2	7.96	202.2	15.27	387.9	15.27	387.9	22.25	565.2
	L	11.75	298.5	11.75	298.5	18	457.2	18	457.2	30	762.0
	M	7	177.8	7	177.8	14	355.6	14	355.6	19.75	501.7
	N	0.49	12.5	0.49	12.5	0.62	15.8	0.62	15.8	1.25	31.8
	R	0.49	12.5	0.49	12.5	0.62	15.8	0.62	15.8	0.69	17.5
	W	12.71	322.8	12.71	322.8	19.27	489.5	19.27	489.5	31.38	797.0
	X	5.16	131.0	5.16	131.0	5.79	147.0	5.91	150.0	7.13	181.0


[33] DIN rail and panel mountable.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025


TeSys N Starters, Size 00–2

Table 16.72: TeSys N Size 00–2 Dimensions

Non-reversing
T36AN13 / T36BN13 / T36CN13 / T36DN13

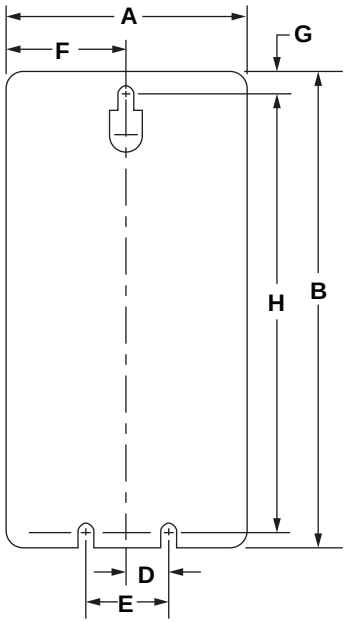

Reversing
T36AN23 / T36BN23 / T36CN23 / T36DN23

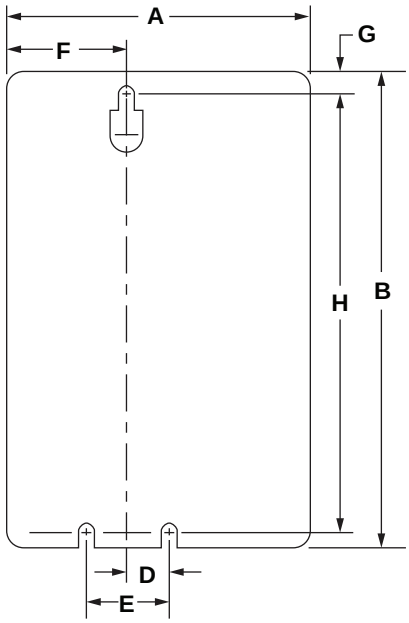

Depth

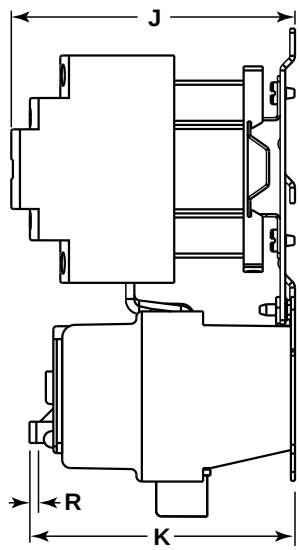


Table 16.73: TeSys N Size 00–2, Non-Reversing and Reversing Starters

Dimension	Non-Reversing								Reversing							
	Size 00 T36AN13		Size 0 T36BN13		Size 1 T36CN13		Size 2 T36DN13		Size 00 T36AN23		Size 0 T36BN23		Size 1 T36CN23		Size 2 T36DN23	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
A	3.19	81.0	3.19	81.0	3.19	81.0	3.19	81.0	43.9	111.5	43.9	111.5	43.9	111.5	5.19	131.8
B	6.64	168.7	6.64	168.7	6.64	168.7	8.61	218.7	6.64	168.7	6.64	168.7	6.64	168.7	8.61	218.7
D	0.5	12.7	0.5	12.7	0.5	12.7	0.5	12.7	0.5	12.7	0.5	12.7	0.5	12.7	0.5	12.7
E	1.0	25.4	1.0	25.4	1.0	25.4	1.0	25.4	1.0	25.4	1.0	25.4	1.0	25.4	1.0	25.4
F	1.59	40.5	1.59	40.5	1.59	40.5	1.59	40.5	1.59	40.5	1.59	40.5	1.59	40.5	1.59	40.5
G	0.20	5.2	0.20	5.2	0.20	5.2	0.20	5.2	0.20	5.2	0.20	5.2	0.20	5.2	0.20	5.2
H	6.16	156.5	6.16	156.5	6.16	156.5	8.22	208.8	6.16	156.5	6.16	156.5	6.16	156.5	8.22	208.8
J (AC Coil)	4.17	105.9	4.17	105.9	4.17	105.9	4.94	125.4	4.17	105.9	4.17	105.9	4.17	104.9	4.94	125.4
J (DC Coil)	4.52	114.9	4.52	114.9	4.52	114.9			4.52	114.9	4.52	114.9	4.52	114.9		
K	3.90	99.0	3.90	99.0	3.90	99.0	3.90	99.0	3.90	99.0	3.90	99.0	3.90	99.0	3.90	99.0
R*[34]*	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1


[34] Reset travel.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025


TeSys N Starters, Size 3–4

Table 16.74: TeSys N Size 3–4 Dimensions

Non-Reversing
T36EN13 / T36FN13

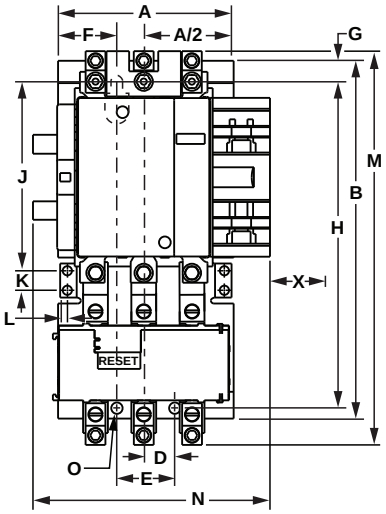

Reversing
T36EN23 / T36FN23

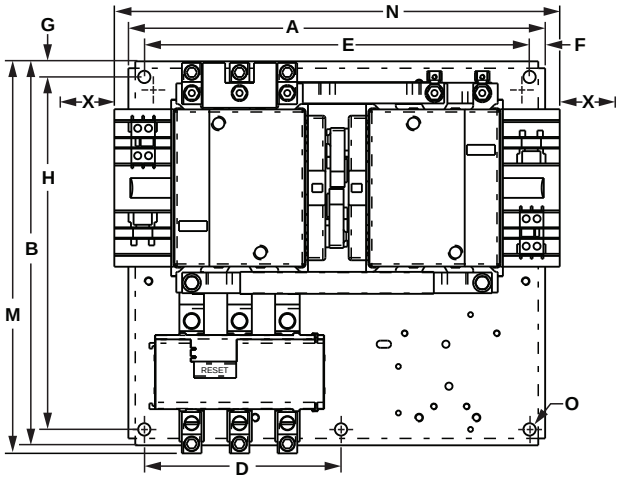

Depth

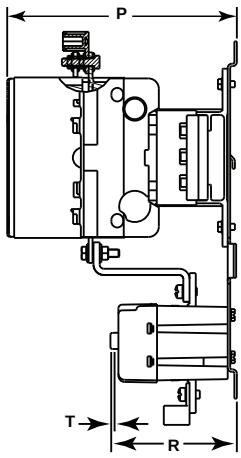


Table 16.75: TeSys N Size 3–4, Non-Reversing and Reversing Starters

Dimension	Non-Reversing				Reversing			
	Size 3 T36EN13		Size 4 T36FN13		Size 3 T36EN23		Size 4 T36FN23	
	in.	mm	in.	mm	in.	mm	in.	mm
A	5.31	134.9	5.31	134.9	12.71	322.8	12.71	322.8
B	10.82	274.8	10.82	274.8	11.71	297.4	11.71	297.4
D	0.88	22.4	0.88	22.4	6.0	152.4	6.0	152.4
E	1.75	44.5	1.75	44.5	11.75	298.5	11.75	298.5
F	1.78	45.0	1.78	45.0	0.48	12.2	0.48	12.2
G	0.32	8.1	0.32	8.1	0.48	12.2	0.48	12.2
H	10.19	258.8	10.19	258.8	10.75	273.1	10.75	273.1
J	6.03	153.2	6.03	153.2	—	—	—	—
K	0.59	15.0	0.59	15.0	—	—	—	—
L	0.22	5.6	0.22	5.6	—	—	—	—
M	11.91	302.4	11.91	302.4	11.96	303.8	11.96	303.8
N	6.57	166.8	6.57	166.8	13.58	344.9	13.58	344.9
O	0.375	9.5	0.375	9.5	0.375	9.5	0.375	9.5
P	6.96	176.7	6.96	176.7	7.18	182.4	7.18	182.4
R	3.8	97	3.8	97	3.8	97	3.8	97
T*[35]*	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1
X*[36]*	5.16	131.0	5.16	131.0	5.16	131.0	5.16	131.0


[35] Reset travel.
[36] Minimum distance for coil removal.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025


TeSys N Starters, Size 5–7

Table 16.76: TeSys N Size 5–7 Dimensions

Non-reversing
T36GN13 / T36HN13 / T36JN13

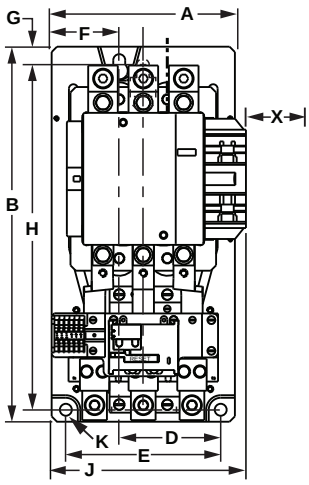

Reversing
T36GN23

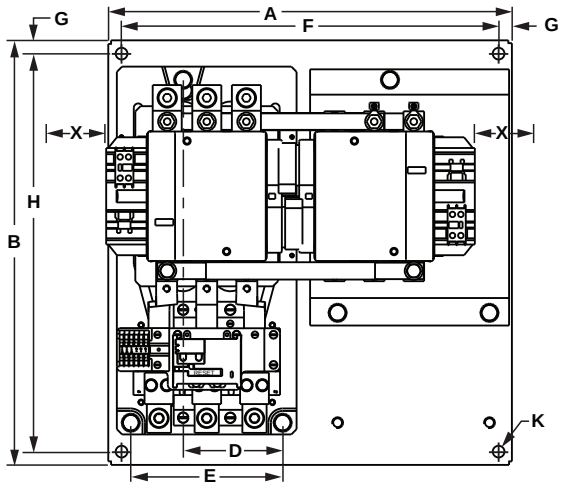

Depth

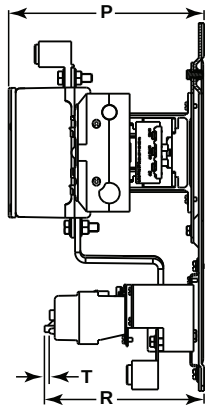


Table 16.77: TeSys N Size 5–7, Non-Reversing and Reversing Starters

Dimension	Non-Reversing						Reversing	
	Size 5 T36GN13		Size 6 T36HN13		Size 7 T36JN13		Size 5 T36GN23	
	in.	mm	in.	mm	in.	mm	in.	mm
A	8.58	217.9	8.58	217.9	8.58	217.9	19.3	489.4
B	17.56	446.0	19.75	501.7	23.58	598.9	20.3	514.8
D	4.75	120.7	4.75	120.7	4.75	120.7	4.75	120.7
E	7.25	184.2	7.25	184.2	7.25	184.2	7.25	184.2
F	3.17	80.4	3.17	80.4	3.17	80.4	18.0	457.2
G	0.63	16.0	0.63	16.0	0.63	16.0	0.63	16.1
H	16.37	415.8	18.56	463.6	22.38	565.9	19.0	482.6
J	9.91	251.6	9.91	251.6	9.91	251.6	—	—
K	0.56	14.2	0.56	14.2	0.56	14.2	0.56	14.2
P	9.32	236.8	9.32	236.8	9.32	236.8	9.95	252.7
R	7.38	187.0	9.16	232.7	8.07	205.0	7.38	187.0
T*[37]*	0.24	6.1	0.24	6.1	0.24	6.1	0.24	6.1
X*[37]*	5.79	147 1	5.91	150.1	7.13	181.1	5.79	147.1

[37] Minimum distance for coil removal.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Catalog Numbering System

Class 8536 **Type S C G 3 V02** **Form S**

General Classification

8502	Contactor
8536	Starter
8538	Combination Starter with Disconnect Switch
8539	Combination Starter with Circuit Breaker
8702	Reversing Contactor
8736	Reversing Starter
8738	Reversing Combination Starter with Disconnect Switch
8739	Reversing Combination Starter with Circuit Breaker
8810	Two Speed Starter ▲
8903	Type SLighting Contactors ▲
8940	Pumping Plant Panel ▲
8941	Duplex Controller ▲

▲Consult the Table of Contents for page numbers.

Design

Type S NEMA Contactors and Starters

NEMA Size		Rating (8903 only)	
A	Size 00		
B	Size 0	M	30 A
C	Size 1	P	60 A
D	Size 2	Q	100 A
E	Size 3	V	200 A
F	Size 4	X	300 A
G	Size 5	Y	400 A
H	Size 6	Z	600 A

Enclosure

A	NEMA 12 Industrial Use
F	NEMA 1 Flush Mounting General Purpose
G	NEMA 1 General Purpose Surface Mounting
H	NEMA 3R Rainproof
O	Open Style Device (no enclosure)
W	NEMA 4X Corrosion Resistant

Numerals

Used to designate specific physical arrangements, such as the number of poles, fuse clip size, etc.; but the numbering varies with the Class of the equipment. Consult the Digest listings for the specific device numbers

Voltage Code

AC operated devices without control transformer

Code	Voltage/Frequency
V01	24/60
V02	120/60 or 110/50
V06	480/60 or 440/50
V07	600/60 or 550/50
V08	208/60

V81: 480V Primary, 120 V Secondary for units using a fused transformer control circuit (Form F4T)

This is only a partial listing. Consult the Digest page for each product for more options.

Common Forms (factory modifications)

A	Start-Stop pushbuttons in the enclosure cover
C	Hand-Off-Auto selector switch in the enclosure cover
E	Bimetallic overload relays
F4T	Fused transformer control circuit (primary fuses only)
FF4T	Fused transformer control circuit (primary & secondary fuses)
H	Solid-state overload relay (SSOLR)
P1	Red ON pilot light in the enclosure cover
P2	Green OFF pilot light in the enclosure cover
S	Separate control circuit
X01	One normally closed auxiliary contact N.C.
X10	One normally open auxiliary contact N.O.

Consult "Factory Modifications (Forms)" for additional Form designations. When more than one Form is applied to a single device, arrange the Forms in alphanumerical order.

See Motor Overload Protection—Factory Modifications (Forms), page for additional Form designations and Solid-State Overload Relay Forms, page 16-121 for more information about Motor Logic SSOLRs.

Table 16.78: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[1]*	—	V01
120	110	V02
208	—	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: These are the common voltages, more are available. Contact Schneider Electric at www.schneider-electric.com/us/ for information about other voltage codes.

[1] 24 V coils are not available on Sizes 4–7. On sizes 00–3, **Form S** (separate control) must be specified.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.79: How to Order

To Order Specify:	Catalog Number			
	Class	Type	Voltage Code	Form(s)
• Class Number • Type Number • Voltage Code • Form(s)	8539	SCG44	V06	AH30P1X11
Description: NEMA Size 1 (10 hp) electronic motor circuit protector (MCP) combo starter in a NEMA 1 enclosure with a 480 V coil, start/stop push button (A), trip-class selectable SSOLR (H30), red pilot light (P1), and 1 N.O. and 1 N.C. auxiliary contact (X11).				

IMPORTANT: This information is intended for general interpretation of the catalog numbers. Do not use it to create catalog numbers for this product line.

For more ordering information, refer to the Product Selector at www.schneider-electric.com/us/.

NOTE: The terms *Class, Type,* and *Form* do not appear in the catalog number.

Devices are wired from the factory according to customer preference as follows:

- Common control
- Separate control (Form S)
- Control power transformer (CPT)

NOTE: TeSys™ T devices are unwired.

Factory Modifications (Forms): Refer to Motor Overload Protection —Factory Modifications (Forms), page
Application Data: Refer to Application Data, page
Dimensions: Refer to Dimensions, page
Separate Enclosures (Class 9991): Refer to Catalog 9999CT9701
Replacement Parts (Class 9998) : Refer to Catalog 9999CT9701
Type S Accessories (Class 9999): Refer to Catalog 9999CT9701

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SCO2 Size 1, 3-Pole Contactor

General Information

Class 8502 Type S magnetic contactors are used to switch heating loads, capacitors, transformers, and electric motors where overload protection is provided separately. Class 8502 contactors are available in NEMA Sizes 00–6. Type S contactors are designed for operation up to 600 Vac, 50–60 Hz.

NOTE: In Table 16.80, replace ●●● with the voltage code shown in Table 16.81.

Table 16.80: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Type	NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure[2]
				Type	Type	Type
00	9	200	1.5	SAO12●●●	SAG12●●●	Use Size 0
		230	1.5			
		460	2			
		575	2			
0	18	200	3	SBO2●●●	SBG2●●●	SBW12●●●
		230	3			
		460	5			
		575	5			
1	27	200	7.5	SCO2●●●	SCG2●●●	SCW12●●●
		230	7.5			
		460	10			
		575	10			
2	45	200	10	SDO2●●●	SDG2●●●	SDW12●●●
		230	15			
		460	25			
		575	25			
3	90	200	25	SEO2●●●	SEG2●●●	SEW12●●●
		230	30			
		460	50			
		575	50			
4	135	200	40	SFO2●●●	SFG2●●●	SFW12●●●
		230	50			
		460	100			
		575	100			
5	270	200	75	SGO2●●●	SGG2●●●	SGW12●●●
		230	100			
		460	200			
		575	200			
6	540	200	150	SHO2●●●	SHG2●●●	—
		230	200			
		460	400			
		575	400			

[2] Stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.81: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[3]*	—	V01
120 *[4]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see Table 16.313.
Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Available at no charge.

Dimensions: page 16-41
Factory Modifications (Forms) page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[3] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8502SBO2V01S).
[4] 120 V polyphase contactors are wired for separate control. **Form S** must be specified (i.e., order as 8502SCO2V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

3-Pole Polyphase—NEMA 4X and 12/3R

NOTE: In Table 16.82, replace ●●● with the voltage code shown in Table 16.81.

For information on field modification of NEMA 12 enclosures, see page 16-114.

Table 16.82: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure Type	NEMA 12/3R *[5]* Dusttight & Driptight Industrial Use Enclosure Type
00	9	200 230 460 575	1-1/2 1-1/2 2 2	Use Size 0	Use Size 0
0	18	200 230 460 575	3 3 5 5	SBW22●●●	SBA2●●●
1	27	200 230 460 575	7-1/2 7-1/2 10 10	SCW22●●●	SCA2●●●
2	45	200 230 460 575	10 15 25 25	SDW22●●●	SDA2●●●
3	90	200 230 460 575	25 30 50 50	SEW22●●●	SEA2●●●
4	135	200 230 460 575	40 50 100 100	SFW22●●●	SFA2●●●
5	270	200 230 460 575	75 100 200 200	—	SGA2●●●
6	540	200 230 460 575	150 200 400 400	—	SHA2●●●

Auxiliary Units

Auxiliary contacts and power poles can be added in the factory or the field on all Type S starters and contactors. Table 16.83 shows the maximum number of auxiliary units, **in addition to the holding circuit contact,** that can be added to a given size starter or contactor. In addition, it is possible to add a second internal contact on NEMA Size 0, 1, and 2 contactors and starters.

Table 16.83: Auxiliary Units—Class 8502 and 8536

NEMA Size	Type	Number of Poles—Basic Contactor	Maximum Number of External Auxiliary Units (in addition to holding circuit contact)
00	SA	2–3	Four single-circuit auxiliary contacts (N.O. or N.C.) if second internal auxiliary contact is not used.
0–2	SB–SD	1–3	Four single-circuit auxiliary contacts (N.O. or N.C.) *[6]*
			Two single-circuit auxiliary contacts (N.O. or N.C.) plus one power pole adder (1 or 2 poles, N.O. or N.C.)
		4–5	Two single-circuit auxiliary contacts (N.O. or N.C.)
3–4	SE–SF	2–5	Three single-circuit auxiliary contacts (N.O. or N.C.)
5	SG	2–3	Two single-circuit auxiliary contacts (N.O. or N.C.) plus 1 NEMA Size 0–1 or Size 2 power pole adder (1 or 2 poles, N.O. or N.C.)
6	SH–SJ	2–3	Three single-circuit auxiliary contacts (N.O. or N.C.)
			Two single-circuit auxiliary contacts (N.O. or N.C.) plus one NEMA Size 0–1 or Size 2 power pole adder (1 or 2 poles, N.O. or N.C.)

Dimensions page 16-41
Factory Modifications (Forms) page 16-118
Separate Enclosures (Class 9991) page 16-112
Replacement Parts (Class 9998) page 16-94
Type S Accessories (Class 9999) page 16-128

For How to Order Information, see page 16-28.

[5] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[6] When adding four external auxiliary contacts to one Size 0 or 1 contactor, remove one of the return springs.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Single-Phase, 4- and 5-Pole Polyphase—Open Style or NEMA 1 and 4X Enclosures

NOTE: In Table 16.84, replace ●●● with the voltage code shown in Table 16.81.

Table 16.84: 600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Type	NEMA 1 General Purpose Enclosure	NEMA 4X –Watertight, Dusttight, Brushed Stainless Steel Enclosure[7]
				Type	Type	Type
1-Pole Single Phase						
0	18	115	1	SBO5●●●	SBG5●●●	SBW15●●●
		230	2			
1	27	115	2	SCO5●●●	SCG5●●●	SCW15●●●
		230	3			
2-Pole Single Phase						
00	9	115	1/3	SAO11●●●	SAG11●●●	Use Size 0
		230	1			
0	18	115	1	SBO1●●●	SBG1●●●	SBW11●●●
		230	2			
1	27	115	2	SCO1●●●	SCG1●●●	SCW11●●●
		230	3			
2	45	115	3	SDO1●●●	SDG1●●●	SDW11●●●
		230	7-1/2			
3	90	—	—	SEO1●●●	SEG1●●●	SEW11●●●
		—	—			
4	135	—	—	SFO1●●●	SFG1●●●	SFW11●●●
5	270	—	—	SGO1●●●	SGG1●●●	SGW11●●●
6	540	—	—	SHO1●●●	SHG1●●●	—
4-Pole Polyphase						
0	18	200	3	SBO3●●●	SBG3●●●	SBW13●●●
		230	3			
		460	5			
		575	5			
1	27	200	7-1/2	SCO3●●●	SCG3●●●	SCW13●●●
		230	7-1/2			
		460	10			
		575	10			
2	45	200	10	SDO3●●●	SDG3●●●	SDW13●●●
		230	15			
		460	25			
		575	25			
3	90	200	25	SEO3●●●	SEG3●●●	SEW13●●●
		230	30			
		460	50			
		575	50			
4	135	200	40	SFO3●●●	SFG3●●●	SFW13●●●
		230	50			
		460	100			
		575	100			
5-Pole Polyphase						
0	18	200	3	SBO4●●●	SBG4●●●	SBW14●●●
		230	3			
		460	5			
		575	5			
1	27	200	7-1/2	SCO4●●●	SCG4●●●	SCW14●●●
		230	7-1/2			
		460	10			
		575	10			
2	45	200	10	SDO4●●●	SDG4●●●	SDW14●●●
		230	15			
		460	25			
		575	25			
3	90	200	25	SEO4●●●	SEG4●●●	SEW14●●●
		230	30			
		460	50			
		575	50			
4	135	200	40	SFO4●●●	SFG4●●●	SFW14●●●
		230	50			
		460	100			
		575	100			

Dimensions: page 16-41
Factory Modifications (Forms): page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-94
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[7] Stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Single-Phase and 4- and 5-Pole Polyphase—NEMA 4X and 12/3R Enclosures

NOTE: In Table 16.85, replace ●●● with the voltage code shown in Table 16.81.

For information on field modification of NEMA 12 enclosures, see page 16-114.

Table 16.85: 600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	NEMA 4X Watertight, Dusttight Corrosion-Resistant Glass-Polyester Enclosure Type	NEMA 12/3R *[8]* Dusttight and Driptight Industrial Use Enclosure Type
1-Pole Single Phase					
0	18	115	1	—	SBA5●●●
		230	2	—	
1	27	115	2	—	SCA5●●●
		230	3	—	
2-Pole Single Phase					
00	9	115	1/3	Use Size 0	Use Size 0
		230	1		
0	18	115	1	SBW21●●●	SBA1●●●
		230	2		
1	27	115	2	SCW21●●●	SCA1●●●
		230	3		
2	45	115	3	SDW21●●●	SDA1●●●
		230	7-1/2		
3	90	—	—	—	SEA1●●●
4	135	—	—	—	SFA1●●●
5	270	—	—	—	SGA1●●●
6	540	—	—	—	SHA1●●●
4-Pole Polyphase					
0	18	200	3	SBW23●●●	SBA3●●●
		230	3		
		460	5		
		575	5		
1	27	200	7-1/2	SCW23●●●	SCA3●●●
		230	7-1/2		
		460	10		
		575	19		
2	45	200	10	SDW23●●●	SDA3●●●
		230	15		
		460	25		
		575	25		
3	90	200	25	—	SEA3●●●
		230	30		
		460	50		
		575	50		
4	135	200	40	—	SFA3●●●
		230	50		
		460	100		
		575	100		
5-Pole Polyphase					
0	18	200	3	—	SBA4●●●
		230	3		
		460	5		
		575	5		
1	27	200	7-1/2	—	SCA4●●●
		230	7-1/2		
		460	10		
		575	10		
2	45	200	10	—	SDA4●●●
		230	15		
		460	25		
		575	25		
3	90	200	25 50	—	SEA4●●●
		230	30		
		460	50		
		575			
4	135	200	40	—	SFA4●●●
		230	50		
		460	100		
		575	100		

Coil voltage codes and page number reference for additional information are shown on page 16-30.

For How to Order Information, see page 16-28.

[8] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SCO3…H30
Size 1, Three-Pole Starter with Motor Logic™ SSOLR

3or5 Days Laser Delivery

Schneider Electric offers express shipping for factory modified NEMA Type 1 and Type 12/3R Enclosed Starters. When you need them fast, our Laser™ Delivery program is the answer to getting your product when you need it most. Ask for Laser™ Delivery, then select the product and the modifications you need when you place your order. It's as easy as that!

General Information

Type S magnetic starters are used for full-voltage starting and stopping of AC squirrel cage motors. Motor overload protection for three-phase starter applications can be provided through one of four options, as follows:

- **Solid-State Overload Relay Protection (Motor Logic™ SSOLR)**
  These ambient insensitive overload relays are available on Sizes 00 through 6. They provide phase loss and phase unbalance protection. To order, add Form **H30** (for selectable trip class 10 or 20 protection). For more information about Motor Logic SSOLRs, see page 16-103 and page 16-121. (Catalog no. example: 8536SCO3V06H30)

- **Adapted Bimetallic or Solid-State Overload Relay (NEMA Sizes 00–1)**
  The Adapted Bimetallic or Solid-State relay option includes a specially designed adapter that attaches with bus bars to the Type S NEMA contactor. This adapter allows direct mounting of the IEC Style bimetallic (LRD or LR3D) or solid-state (LR9D) overload relay. To order this starter configuration, add **Form E** (adapter only) to the standard catalog number. The LRD, LR3D, or LR9D overload relay must be purchased separately, based on the FLA of the motor, and installed in the field to properly operate the starter. For the Adapted Bimetallic device only, if the FLA is known at the time of purchase, you can order the starter with the overload relay installed. For more information and a list of options, see Adapted Bimetallic Overload Relay Forms, page 16-121. (Catalog no. example: 8536SCO3V06E—without overload relay).

- **TeSys™ T Motor Management System (NEMA Sizes 1–6)**
  TeSys™ T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T can predict what will happen in the process, as it accurately monitors current, voltage, and power over a wide range. For additional information about TeSys T Motor Management System, see page 16-105 and page 16-122. NOTE: The full catalog number contains a four-character Form number (for example, 8536SCO3V06**H616**).

- **Melting Alloy Type Thermal Overload Relays (NEMA Sizes 00–6)**
  Melting alloy type thermal overload relays utilize the use of replaceble thermal units. These thermal units must be ordered separately and installed to operate the starter. Thermal unit selection begins on page 16-135. The catalog number includes no Form number (for example, 8536SCO3V06).

3-Pole Polyphase—NEMA 1 and 4X

NOTE: In Table 16.86, replace ●●● with the voltage code shown in Table 16.88.

Table 16.86: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz, with Motor Logic™ SSOLR*[9]*

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Type	NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure*[10]*	NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure
				Type	Type	Type	Type
00	9	200	1.5	SAO12●●●H30	SAG12●●●H30	Use Size 0	Use Size 0
		230	1.5				
		460	2				
		575	2				
0	18	200	3	SBO2●●●H30	SBG2●●●H30	SBW12●●●H30	SBW22●●●H30
		230	3				
		460	5				
		575	5				
1	27	200	7.5	SCO3●●●H30	SCG3●●●H30	SCW13●●●H30	SCW23●●●H30
		230	7.5				
		460	10				
		575	10				
2	45	200	10	SDO1●●●H30	SDG1●●●H30	SDW11●●●H30	SDW21●●●H30
		230	15				
		460	25				
		575	25				
3	90	200	25	SEO1●●●H30	SEG1●●●H30	SEW11●●●H30	SEW21●●●H30
		230	30				
		460	50				
		575	50				
4	135	200	40	SFO1●●●H30	SFG1●●●H30	SFW11●●●H30	SFW21●●●H30
		230	50				
		460	100				
		575	100				
5	270	200	75	SGO1●●●H30	SGG1●●●H30	SGW11●●●H30	—
		230	100				
		460	200				
		575	200				
6	540	200	150	SHO2●●●H30	SHG2●●●H30	—	—
		230	200				
		460	400				
		575	400				

[9] To order melting alloy overload relay, remove form "H30" from part number.
[10] Stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

3-Pole Polyphase—NEMA 12/3R

NOTE: In Table 16.87, replace ●●● with the voltage code shown in Table 16.88.

For information on field modification of NEMA 12 enclosures, see page 16-114.

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.87: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz *[11]*

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	NEMA 12/3R *[12]* Dusttight and Driptight Industrial Use Enclosure Type
00	9	200	1.5	Use Size 0
		230	1.5	
		460	2	
		575	2	
0	18	200	3	SBA2●●●H30
		230	3	
		460	5	
		575	5	
1	27	200	7.5	SCA3●●●H30
		230	7.5	
		460	10	
		575	10	
2	45	200	10	SDA1●●●H30
		230	15	
		460	25	
		575	25	
3	90	200	25	SEA1●●●H30
		230	30	
		460	50	
		575	50	
4	135	200	40	SFA1●●●H30
		230	50	
		460	100	
		575	100	
5	270	200	75	SGA1●●●H30
		230	100	
		460	200	
		575	200	
6	540	200	150	SHA2●●●H30
		230	200	
		460	400	
		575	400	

3or5 Days Laser Delivery

Schneider Electric offers express shipping for factory modified NEMA Type 1 and Type 12/3R Enclosed Starters. When you need them fast, our Laser™ Delivery program is the answer to getting your product when you need it most. Ask for Laser™ Delivery, then select the product and the modifications you need when you place your order. It's as easy as that!

Table 16.88: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[13]*	—	V01
120 *[14]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage.

Dimensions: page 16-41
Factory Modifications (Forms): page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[11] To order melting alloy overload relay, remove form "H30" from part number.
[12] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[13] 24 V coils are not available on Sizes 4–6. On Sizes 00-3, where 24 V coils are available, **Form S** (separate control) must be specified (i.e., order as 8536SBO2V01S).
[14] 120 V Polyphase contactors are wired for separate control. **Form S** must be specified (ordered as 8502SCO2V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

2-Pole Single Phase—Open or NEMA 1 and 4X

NOTE: In Table 16.89, replace ●●● with the voltage code shown in Table 16.91.

For melting alloy thermal units, see page 16-135.

Table 16.89: 2-Pole Single Phase—600 Vac Maximum—50–60 Hz (require one melting alloy thermal unit)

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Type	NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure*[15]*	NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure
				Type	Type	Type	Type
00	9	115	1/3	SAO11●●●	SAG11●●●	Use Size 0	Use Size 0
		230	1				
0	18	115	1	SBO1●●●	SBG1●●●	SBW11●●●	SBW21●●●
		230	2				
1	27	115	2	SCO1●●●	SCG1●●●	SCW11●●●	SCW21●●●
		230	3				
1P	36	115	3	SCO2●●●	SCG2●●●	SCW12●●●	SCW22●●●
		230	5				
2	45	115	3	SDO6●●●	SDG6●●●	SDW16●●●	SDW26●●●
		230	7-1/2				

4-Pole, 2-Phase—Open and NEMA 1 and 4X

NOTE: In Table 16.90, replace ●●● with the voltage code shown in Table 16.91.

For melting alloy thermal units, see page 16-135.

Table 16.90: 4-Pole, 2-Phase—600 Vac Maximum—50–60 Hz (require two melting alloy thermal units)

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Type	NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure*[15]*	NEMA 4X Watertight, Dusttight, Corrosion-Resistant Glass-Polyester Enclosure
				Type	Type	Type	Type
0	18	200	3	SBO3●●●	SBG3●●●	SBW13●●●	SBW23●●●
		230	3				
		460	5				
		575	5				
1	27	200	7-1/2	SCO4●●●	SCG4●●●	SCW14●●●	SCW24●●●
		230	7-1/2				
		460	10				
		575	10				
2	45	200	10	SDO2●●●	SDG2●●●	SDW12●●●	SDW22●●●
		230	15				
		460	25				
		575	25				
3	90	200	25	SEO2●●●	SEG2●●●	SEW12●●●	—
		230	30				
		460	50				
		575	50				
4	135	200	40	SFO2●●●	SFG2●●●	SFW12●●●	—
		230	50				
		460	100				
		575	100				

Table 16.91: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[16]*	—	V01
120 *[17]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is provided at no charge.

Dimensions: page 16-41
Factory Modifications (Forms): page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999) page 16-128

For How to Order Information, see page 16-28.

[15] Stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.
[16] 24 V coils are not available on Sizes 4–6. On sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (i.e., order as 8536SBO2V01S).
[17] 120 V polyphase starters are wired for separate control. **Form S** (separate control) must be specified (for example, order as 8536SCO2V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

2-Pole Single Phase—NEMA 12/3R

NOTE: In Table 16.92, replace ●●● with the voltage code shown in Table 16.91.

For melting alloy thermal units, see page 16-135.

Table 16.92: 2-Pole Single Phase—600 Vac Maximum—50–60 Hz (require one melting alloy thermal unit)

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	NEMA 12/3R*[18]* Dusttight and Driptight Industrial Use Enclosure Type
00	9	115	1/3	Use Size 0
		230	1	
0	18	115	1	SBA1●●●
		230	2	
1	27	115	2	SCA1●●●
		230	3	
1P	36	115	3	SCA2●●●
		230	5	
2	45	115	3	SDA6●●●
		230	7-1/2	

4-Pole, 2-Phase—NEMA 12/3R

NOTE: In Table 16.93, replace ●●● with the voltage code shown in Table 16.91.

For melting alloy thermal units, see page 16-135.

Table 16.93: 4-Pole 2-Phase—600 Vac Maximum—50–60 Hz (require two melting alloy thermal units)

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Coil Voltage	NEMA 12/3R Dusttight & Driptight Industrial Use Enclosure Type
0	18	200	3	208	SBA3●●●
		230	3	240	
		460	5	480	
		575	5	600	
1	27	200	7-1/2	208	SCA4●●●
		230	7-1/2	240	
		460	10	480	
		575	10	600	
2	45	200	10	208	SDA2●●●
		230	15	240	
		460	25	480	
		575	25	600	
3	90	200	25	208	SEA2●●●
		230	30	240	
		460	50	480	
		575	50	600	
4	135	200	40	208	SFA2●●●
		230	50	240	
		460	100	480	
		575	100	600	

Dimensions: page 16-41
Factory Modifications (Forms): page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[18] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SB–SD starters

Types SB–SD With Auxiliary Load Terminals

Capacitors are sometimes used in motor branch circuits to improve power factor. The Size 0–2 Type SB–SD starters listed in Table 16.94 include three auxiliary terminals to allow easy connection of power factor correction capacitors. When capacitors are connected using these terminals, no adjustment to the selection of thermal units is necessary. The auxiliary terminals accept 12–16 AWG solid or stranded wire. NEMA Size 3 and 4 starters have provisions for auxiliary connections as a standard. You must supply lugs as necessary.

The Type S starters with auxiliary load terminals can also be used to control two motors simultaneously from a single starter. However, this application is tightly restricted by Section 430-53 of the National Electrical Code. Refer to the NEC for restrictions regarding overload protection, size of controller and motor branch circuit protection.

NOTE: In Table 16.94, replace ●●● with the voltage code shown in Table 16.96.

For melting alloy thermal units, see page 16-135.

Table 16.94: 3-Pole Polyphase—600 Vac Maximum—50–60 Hz (devices require three melting alloy thermal units)

NEMA Size	Motor Voltage	Max. Hp	Open Style Type
0	200	3	SBTO2●●●
	230	3	
	460	5	
	575	5	
1	200	7-1/2	SCTO3●●●
	230	7-1/2	
	460	10	
	575	10	
2	200	10	SDTO1●●●
	230	15	
	460	25	
	575	25	

Extra Capacity Single Phase Starters (Not NEMA Style)

NOTE: In Table 16.95, replace ●●● with the voltage code shown in Table 16.96.

For melting alloy thermal units, see page 16-135.

For information on field modification of NEMA 12 enclosures, see page 16-114.

Table 16.95: 2-Pole Single Phase—250 Vac Maximum—50–60 Hz (require one melting alloy thermal unit)

Motor Voltage	Max. Hp	Open Style	NEMA 1 General Purpose Enclosure	NEMA 3R Rainproof, Sleet Resistant, Outdoor Use Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure[19]	NEMA 4X Watertight Corrosion Resistant Glass-Polyester Enclosure	NEMA 12/3R [20] Dusttight and Driptight Industrial Use Enclosure
		Type	Type	Type	Type	Type	Type
115 230	5 10	SDO8●●● [21]	—	SDH8●●● [21]	—	—	—
115 230	7-1/2 15	SEO6●●●	SEG6●●●	SEH6●●●	SEW16●●●	SEW26●●●	SEA6●●●

Table 16.96: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 [22]	—	V01
120 [23]	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is supplied at no charge.

Dimensions: page 16-41
Factory Modifications (Forms): page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[19] Stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.
[20] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[21] Uses a Size 3 overload relay.
[22] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified.
[23] 120 Volt Polyphase starters are wired for separate control and must be ordered with Form S (i.e., 8536SCO2V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Application Data for Selection

Table 16.97: Application Data per NEMA Standards ICS-1 and ICS-2

NEMA Size	Load Voltage	Max. Hp Rating: Nonplugging and Nonjogging Duty		Max. Hp Rating: Plugging and Jogging Duty *[24]*		Continuous Current Rating (A) 600 V Max.	Service-Limit Current Rating (A) *[25]*	Tungsten and Infrared Lamp Load (A), 250 V Max. *[26]*	Resistance Heating Loads (KW) other than Infrared Lamp Loads *[27]*		KVA Rating for Switching Transformer Primaries at 50 or 60 Cycles				3 Ø Rating for Switching Capacitors *[28]*
											Inrush Currents (Worst Case Peak)				
											≤20 Times Peak of Continuous Current Rating		>20 to 40 Times Peak of Continuous Current Rating		
		Single Phase	Poly-phase	Single Phase	Poly-phase				Single Phase	Poly-phase	Single Phase	Poly-phase	Single Phase	Poly-phase	KVAR
00	115	0.5	—	—	—	9	11	5	—	—	—	—	—	—	—
	200	—	1.5	—	—	9	11	5	—	—	—	—	—	—	—
	230	1	1.5	—	—	9	11	5	—	—	—	—	—	—	—
	380	—	1.5	—	—	9	11	—	—	—	—	—	—	—	—
	460	—	2	—	—	9	11	—	—	—	—	—	—	—	—
	575	—	2	—	—	9	11	—	—	—	—	—	—	—	—
0	115	1	—	0.5	—	18	21	10	—	—	0.6	—	0.3	—	—
	200	—	3	—	1.5	18	21	10	—	—	—	1.8	—	0.9	—
	230	2	3	1	1.5	18	21	10	—	—	1.2	2.1	0.6	1.0	—
	380	—	5	—	1.5	18	21	—	—	—	—	—	—	—	—
	460	—	5	—	2	18	21	—	—	—	2.4	4.2	1.2	2.1	—
	575	—	5	—	2	18	21	—	—	—	3.0	5.2	1.5	2.6	—
1	115	2	—	1	—	27	32	15	3	5	1.2	—	0.6	—	—
	200	—	7.5	—	3	27	32	15	—	9.1	—	3.6	—	1.8	—
	230	3	7.5	2	3	27	32	15	6	10	2.4	4.3	1.2	2.1	—
	380	—	10	—	5	27	32	—	—	16.5	—	—	—	—	—
	460	—	10	—	5	27	32	—	12	20	4.9	8.5	2.5	4.3	—
	575	—	10	—	5	27	32	—	15	25	6.2	11.0	3.1	5.3	—
1P	115	3	—	1.5	—	36	42	24	—	—	—	—	—	—	—
	230	5	—	3	—	36	42	24	—	—	—	—	—	—	—
2	115	3	—	2	—	45	52	30	5	8.5	2.1	—	1.0	—	—
	200	—	10	—	7.5	45	52	30	—	15.4	—	6.3	—	3.1	—
	230	7.5	15	5	10	45	52	30	10	17	4.1	7.2	2.1	3.6	8
	380	—	25	—	15	45	52	—	—	28	—	—	—	—	—
	460	—	25	—	15	45	52	—	20	34	8.3	14	4.2	7.2	16
	575	—	25	—	15	45	52	—	25	43	10.0	18	5.2	8.9	20
3	115	—	—	—	—	90	104	60	10	17	4.1	—	2.0	—	—
	200	—	25	—	15	90	104	60	—	31	—	12	—	6.1	—
	230	—	30	—	20	90	104	60	20	34	8.1	14	4.1	7.0	27
	380	—	50	—	30	90	104	—	—	56	—	—	—	—	—
	460	—	50	—	30	90	104	—	40	68	16	28	8.1	14	53
	575	—	50	—	30	90	104	—	50	86	20	35	10	18	67
4	200	—	40	—	25	135	156	120	—	45	—	20	—	10	—
	230	—	50	—	30	135	156	120	30	52	14	23	6.8	12	40
	380	—	75	—	50	135	156	—	—	86.7	—	—	—	—	—
	460	—	100	—	60	135	156	—	60	105	27	47	14	23	80
	575	—	100	—	60	135	156	—	75	130	34	59	17	29	100
5 *[24]*	200	—	75	—	60	270	311	240	—	91	—	41	—	20	—
	230	—	100	—	75	270	311	240	60	105	27	47	14	24	80
	380	—	150	—	125	270	311	—	—	173	—	—	—	—	—
	460	—	200	—	150	270	311	—	120	210	54	94	27	47	160
	575	—	200	—	150	270	311	—	150	260	68	117	34	59	200
6 *[29]*	200	—	150	—	125	540	621	480	—	182	—	81	—	41	—
	230	—	200	—	150	540	621	480	120	210	54	94	27	47	160
	380	—	300	—	250	540	621	—	—	342	—	—	—	—	—
	460	—	400	—	300	540	621	—	240	415	108	188	54	94	320
	575	—	400	—	300	540	621	—	300	515	135	234	68	117	400

Table 16.98: Maximum Allowable Motor Code Letter

Motor Hp Rating	Maximum Allowable Motor Code Letter
1.5–2	L
3–5	K
7.5 and above	H

The motor ratings in Application Data, page are NEMA standard ratings and apply only when the code letter of the motor is the same as or occurs earlier in the alphabet than what is shown in the table Table 16.98. Motors with code letters occurring later in the alphabet may require a larger controller. Consult the Customer Care Center at 1-888-778-2733.

The ratings for capacitor switching in Application Data, page assume the following maximum available fault currents (rms symmetrical amperes):

- NEMA Size 00–3: 5,000 A
- NEMA Size 4–5: 10,000 A
- NEMA Size 6: 18,000 A

If the available fault current is greater than these values, connect sufficient impedance in series.

Refer to the instruction material for the actual tested SCCR values.

NOTE: Tables and footnotes are taken from NEMA Standards.

[24] Ratings shown are for applications requiring repeated interruptions of stalled motor current or repeated closing of high transient currents encountered in rapid motor reversal, involving more than five openings or closings per minute and more than ten in a ten-minute period, such as plug-stop, plug-reverse or jogging duty. Ratings apply to single speed and multi-speed controllers.

[25] Per NEMA Standards paragraph ICS 2-321.20, the service-limit current represents the maximum rms current, in Amperes, which the controller may be expected to carry for protracted periods in normal service. At service-limit current ratings, temperature rises may exceed those obtained by testing the controller at its continuous current rating. The ultimate trip current of over-current (overload) relays or other motor protective devices shall not exceed the service-limit current ratings of the controller.

[26] **Fluorescent Lamp Loads—300 V and Less—**The characteristics of fluorescent lamps are such that it is not necessary to derate Class 8502 contactors below their normal continuous current rating. Class 8903 contactors may also be used with fluorescent lamp loads. For controlling tungsten and infrared lamp loads, and resistance heating loads, Class 8903 AC lighting contactors are recommended. These contactors are specifically designed for such loads and are applied at their full rating as listed in the Class 8903 (lighting contactors) section.

[27] Ratings apply to contactors which are employed to switch the load at the utilization voltage of the heat producing element with a duty which requires continuous operation of not more than five openings per minute. Class 8903 Types L and S lighting contactors are rated for resistance heating loads.

[28] When discharged, a capacitor has essentially zero impedance. For repetitive switching by a contactor, sufficient impedance should be connected in series to limit inrush current to not more than 6 times the contactor rated continuous current. In many installations, the impedance of connecting conductors may be sufficient for this purpose. When switching to connect additional banks, the banks already on the line may be charged and can supply additional available short-circuit current which should be considered when selecting the impedance to limit the current.

[29] For NEMA Size 5 (series B), 6, the operation rate is as follows: Continuous operation rate is 3 operations per minute maximum; Jogging or Plugging Duty operation rate is 15 operations per minute for a maximum of three minutes.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Dimensions for Open Type and NEMA 1 Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.99: Dimensions for Class 8502 Open Type

NEMA Size	Type	No. of Poles	Fig. No.	Dimensions, in. (Refer to Figure 1)									Wt
				A	B	C	D	E	F	G	H	I	
				in.	in.	in.	in.	in.	in.	in.	in.	in.	(lb)
00	SAO	2–3	1	3.22	4.34	4.22	1.63	1.63	0.22	3.94	—	—	4
0	SBO	1–3	1	3.22	4.34	4.22	1.63	1.63	0.22	3.94	—	—	4
1	SCO	4–5		4.25	4.34	4.22	1.63	2.63	0.22	3.94	—	—	4.5
2	SDO	2–3	1	4.31	5.13	4.94	2.16	2.16	0.22	4.59	0.53	1.06	6.75
		4–5		5.63	5.13	4.94	2.16	3.47	0.22	4.59	0.53	1.06	8.25
3	SEO	2–3	1	5.47	7.09	6.5	1.88	3.53	0.31	6.03	3.25	4.75	14
		4–5		9.75	7.88	6.5	3.94	5.81	0.31	7	4.53	9.06	22
4	SFO	2–3	1	6	8.19	6.5	2.06	3.94	0.31	7	3.59	5.31	18
		4–5		9.75	8.19	6.5	3.94	5.81	0.31	7	4.53	9.06	22
5	SGO	2–3	1	8.67	12.31	8.75	3.25	5.81	0.63	11.13	4.75	7.25	45
6	SHO	2–3	1	10.55	28.06	9	3.53	7.03	5.06	18.56	4.75	7.25	80

Table 16.100: Dimensions for 8536 Open Type

NEMA Size	Type	No. of Poles	Fig. No.	Dimensions, in. (Refer to Figure 2)									Wt
				A	B	C	D	E	F	G	H	I	
				in.	in.	in.	in.	in.	in.	in.	in.	in.	(lb)
00, 0, 1, 1P	SAO – SCO	2–3	2	3.5	6.77	4.22	0.5	1	1.61	0.2	6.25	3.97	5
0, 1	SBO–SCO	4	2	4.53	6.77	4.22	0.5	1	2.67	0.2	6.25	3.97	5.5
2	SDO	2–3	2	4.31	7.81	4.94	0.5	1	2.16	0.2	7.34	4.06	7.75
		4		5.63	7.81	4.94	0.5	1	3.47	0.2	7.34	4.06	9.25
3	SEO	2–3	2	5.47	11.09	6.5	0.88	1.75	3.59	0.31	10.19	5.75	17
		4		9.75	12.13	6.5	1.81	1.75	5.81	0.31	11.19	5.75	25
4	SFO	3	2	6	12.88	6.5	1.81	1.75	3.94	0.31	11.19	5.75	22
		4		9.75	12.88	6.5	1.81	1.75	5.91	0.31	11.19	5.75	25
5	SGO	3	2	8.56	17.56	8.75	4.75	7.25	5.38	0.63	16.38	6	62
6	SHO	3	2	12.34	28.06	9	4.75	7.25	5.78	5.06	18.56	8.69	85

Table 16.101: Dimensions for NEMA 1 General Purpose Enclosure

NEMA Size	Type	No. of Poles	Fig. No.	Dimensions, in.												
				A	B	C		D	E	F	G	H	I	J	K	L
						8502	8536									
00 0 1	SAG SBG SCG	All All All	3 3 3	6	10	5.28	5.56	3	0.88	8.13	1	0.94	4.13	5	—	—
2	SDG	All	3	7.81	12.69	6.03	6.31	—	1.09	10.5	1.09	1.09	5.63	5.75	1.09	5.63
3	SEG	All	3	11.44	21.81	8	8.38	—	1.53	18.75	1.53	1.53	8.38	7.75	1.53	8.38
4	SFG	All	5	11.25	25.16	9	9	8.59	1.25	1.25	22.31	1.44	0.44	—	—	—
5	SGG	All	5	17.22	44.22	12.81	12.94	13	2.13	2.13	40	2.13	0.56	—	—	—
6	SHG	All	4	65.75	20.22	13.13	13.13	—	11	64.5	2.31	5.5	—	—	—	—




Figure 1
Class 8502




Figure 2
Class 8536




Figure 3




Figure 4




Figure 5

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Dimensions for NEMA 4X Enclosures

For the dimensions in Table 16.102 and Table 16.103, see **Figure 6**.

Table 16.102: NEMA 4X—Stainless Steel Watertight Enclosure

NEMA Size	Class	Type	No. of Poles	Dimensions, in.												Hub Dia.	
				A	B	C	D	E	F	G	H	I	J	K	L	Bot. Only W	Top & Bot. X
0 and 1	8502	SBW	All	6.38	7.13	13.19	1.56	3.25	12	0.59	1.19	11.78	1.63	2.31	0.31	3/4"	1"
		SCW															
	8536	SBW	All	6.38	7.81	13.19	1.56	3.25	12	0.59	1.88	11.78	1.63	2.31	0.31		
		SCW															
2	8502	SDW	All	8.13	7.88	16.19	1.56	5	15	1.09	1.94	14.75	2	2.63	0.31	3/4"	1-1/2"
	8536	SDW	All	8.13	8.56	16.19	1.56	5	15	1.09	2.88	14.75	2	2.63	0.31		
3 and 4	8502	SEW	All	18.16	8.75	32.22	3.08	12	30.5	0.88	3.69	26.72	2.56	3.19	0.44	3/4"	2-1/2"
		SFW															
	8536	SEW	All	18.16	9.56	32.22	3.08	12	30.5	0.88	4.5	26.72	2.56	3.19	0.44	3/4"	2-1/2"
		SFW															
5	8502 & 8536	SGW	All	17.22	12.63	47.22	4.13	9	46	0.63	4.59	28.31	3.13	5.75	0.56	3/4"	3-1/2"

Table 16.103: NEMA 4X—Stainless Steel Watertight Enclosure with Form FF4T

NEMA Size	Class	Type	No. of Poles	Dimensions, in.											
				A	B	C	D	E	F	G	H	I	J	K	L
0 and 1	8502	SBW	All	12.63	7.13	14.69	2.56	7.5	13.5	0.59	3.19	18.81	1.66	2.31	0.31
		SCW													
	8536	SBW	All	12.63	7.81	14.69	2.56	7.5	13.5	0.59	3.88	18.41	1.66	2.31	0.31
		SCW													
2	8502	SDW	All	14.88	7.56	16.31	2.56	9.75	15	0.66	3.19	20.88	2	2.63	0.31
	8536	SDW	All	14.88	8.25	16.31	2.56	9.75	15	0.66	3.88	20.88	2	2.63	0.31
3 and 4	8502	SEW	2–3	Same as Standard NEMA 4 dimensions, see above.											
		SFW	2–3												
	8536	SEW	2–3	Same as Standard NEMA 4 dimensions, see above.											
		SFW	2–3												
5	8502 & 8536	SGW	All	Same as Standard NEMA 4 dimensions, see above.											

For the dimensions in Table 16.104, see **Figure 7**.

Table 16.104: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures, Sizes 00–2, without Form FF4T

Size	Type	No. of Poles	Dimensions, in.												Hub		Weight (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	Bot. Only W	Top & Bot. X	
0, 1	SBW	All	6.5	6.44	12.13	0.75	5	8.75	1.69	3.34	10.06	1.31	2.13	0.31	0.75	1	17
	SCW																
2	SDW	All	8.5	7.06	13.88	0.75	7	10.5	1.69	3.91	11.94	1.63	2.38	0.31	0.75	1.5	22

For the dimensions in Table 16.105, see **Figure 8**.

Table 16.105: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures

NEMA Size	Type	No. of Poles	Dimensions, in.				
			A	B	C	E	F
0–2 with Form FF4T	SBW	All	16.88	9.78	22.75	10.13	21.5
	SCW						
	SDW						
3–4	SEW	All	25.81	11.94	33.5	18.5	32.25
	SFW						

NOTE: Devices with Form FF4T may use a larger enclosure. Consult the Customer Care Center at 1-888-778-2733 for dimensions.

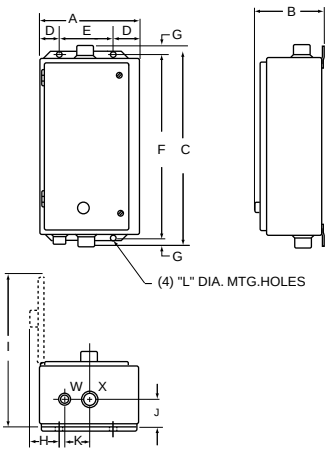


Figure 6: NEMA 4X—Stainless Steel Watertight Enclosure

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

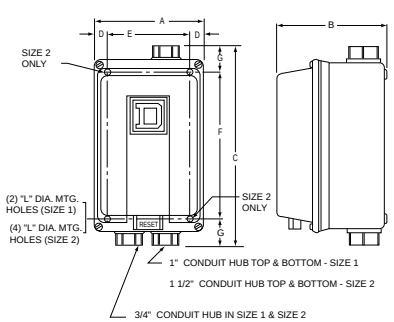


Figure 7: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures, Sizes 0–2, without Form FF4T




Figure 8: NEMA 4X—Watertight and Corrosion Resistant Glass Polyester Enclosures

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Dimensions for NEMA 12/3R Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.106: NEMA 12/3R—Dusttight Enclosure

NEMA Size	Type	No. of Poles	Dimensions, in.										Weight (lb)	
			A	B	C	D	E	F	G	H	I	J	Class 8502	Class 8536
0	SBA	All	6.38	8.53	12.75	1.56	3.25	12	0.38	3.56	12.25	0.31	15	16
1	SCA	All												
2	SDA	All	8.13	9.28	16	1.56	5	15	0.5	3.56	15.38	0.31	22	23
3	SEA	All	18.16	9.56	31.5	3.08	12	30.5	0.5	4.5	26.72	0.44	65	68
4	SFA	All											69	73
5	SGA	All	17.22	13.44	47	4.13	9	46	0.5	5.41	28.31	0.56	160	177
6	SHA	All	20.22	13	65	4.13	12	64	0.5	6.44	30.88	0.69	228	233
7	SJA	All	34.5	23.5	93	Floor Mounting							—	—

Table 16.107: NEMA 12/3R—Dusttight Enclosure With Form FF4T

NEMA Size	Type	No. of Poles	Dimensions, in.									
			A	B	C	D	E	F	G	H	I	J
0	SBA	All	11.88	8	13.5	2.81	6.75	12.75	0.38	3.91	18.38	0.31
1	SCA	All										
2	SDA	All	14.88	8.13	16	2.56	9.75	15	0.38	3.66	21.5	0.31
3	SEA	2–3	Same as Standard NEMA 12 dimensions, see above.									
4	SFA	2–3										
5	SGA	All	Same as Standard NEMA 12 dimensions, see above.									
6	SHA	All	Form FF4T comes standard. Refer to page 16-119.									
7	SJA	All										

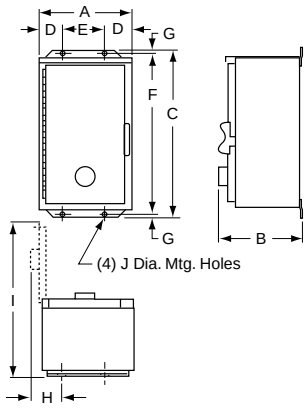


Figure 16.1: NEMA 12/3R

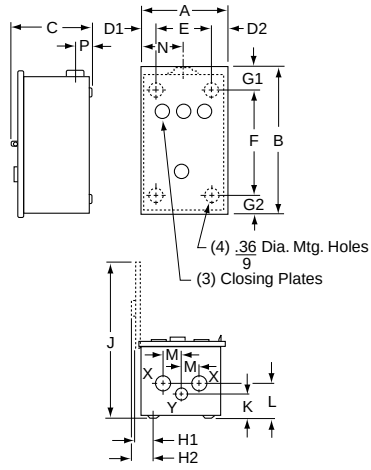


Figure 16.2: NEMA 3R

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Class 8502 Type WH

General Information

Class 8502 Type W non-reversing vacuum contactors used to switch capacitors, transformers and electric motors where overload protection is separately provided. Type W vacuum contactors are designed for operation at 600 Volts, 50/60 Hz. (See page 16-67 for Class 8702 Reversing Vacuum Contactors.)

NOTE: In Table 16.108, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.111.

Table 16.108: Class 8502—Full Voltage, 3–Pole Vacuum Contactors

NEMA Size	Enclosed Ampere Rating	Locked Rotor Current (A)	Motor Voltage	Max. Hp	Open Style Type
4	135	1080	200	40	WFO3●●●
			230	50	
			460	100	
			575	100	
5	270	2160	200	75	WGO3●●●
			230	100	
			460	200	
			575	200	
6	540	4320	200	150	WHO3●●●
			230	200	
			460	400	
			575	400	

Table 16.109: Class 9998—Replacement Coils for Class 8502 and 8702 Vacuum Contactors (Includes Rectifier)

Size	Type	Poles	Class and Type	Suffix Number (Complete Coil Number Consists of Class and Type Followed by Suffix Number)			
				120 V 110 V	240 V 220 V	480 V 440 V	600 V 550 V
4	WF	3	9998WF	120	240	480	600
5	WG	3	9998WG				
6	WH	3	9998WH				


Table 16.110: Class 9999—Vacuum Contactor Kits

Kit Description		For Use With Type	For Use With Size	Class 9999 Type
Auxiliary Contacts, Non-Convertible 1-N.O. & 1-N.C. Isolated Contacts		WF, WG	4, 5	WX11
		WH	6	
Coil Circuit Auxiliary Contacts	1-N.O. & 1-N.C. Isolated Contacts, Delayed Break 1-N.C. Isolated Contact	WF	4	—
		WG, WH	5, 6	WLX01
Lug Kits (include 6 lugs)		WG	5	LUW5
		WH	6	—


Table 16.111: Coil Voltage Codes

Volts	110	120	220	240	440	480	550	600
50 Hz	V02	—	V03	—	V06	—	V07	—
60 Hz	—	V02	—	V03	—	V06	—	V07


Table 16.112: Dimensions, Class 8502

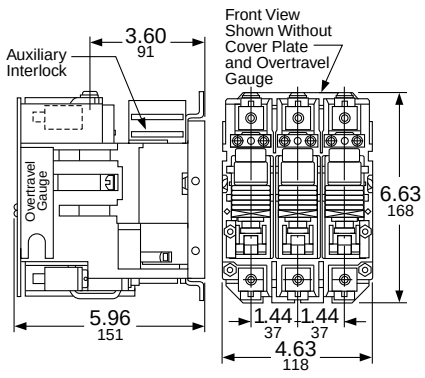

Type WF Size 4

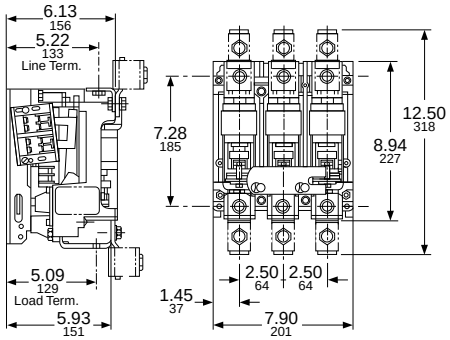

Type WG Size 5

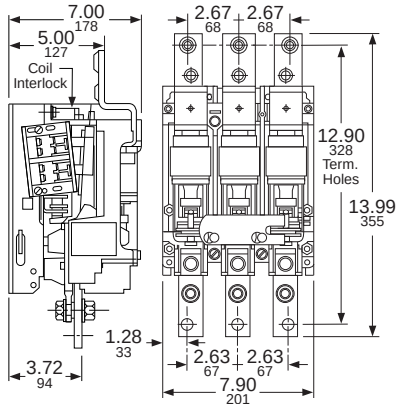

Type WH Size 6

For How to Order Information, see page 16-28.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

General Information

Figure 16.3: Class 8502 Type VF



The Class 8502 Type V vacuum contactor is a 3-pole device rated 1500 V that meets UL508 (1.5 kV) and CSA standards. Vacuum technology offers long life and low maintenance in a compact, lightweight design. The contactor is suitable for contaminated atmospheres because the main contacts are sealed in vacuum bottles. In addition, since gravity is not used to assist contactor operation, the Class 8502 contactor can be mounted in any plane without special modifications. Type V vacuum contactors are designed for the control of inductive or non-inductive loads at voltages from 200–1500 Vac.

For How to Order Information, see page 16-28.

NOTE: In Table 16.113, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.78 Coil Voltage Codes, page 16-28.

Table 16.113: Class 8502—Full Voltage 3 Pole Vacuum Contactors

NEMA Size	Enclosed Ampere Rating	Locked Rotor Current (A)	Motor Voltage	Max. Hp	Open Style Type
4	160	1080	200	50	VFO3●●●
			230	60	
			460	125	
			575	150	
			800	200	
			1000	250	
			1500	400	
5	320	2160	200	100	VGO3●●●
			230	125	
			460	250	
			575	300	
			800	400	
			1000	—	
			1500	800	
6	540	4320	200	150	VHO3●●●
			230	200	
			460	400	
			575	400	
			800	—	
			1000	—	
			1500	1300	

Table 16.114: Class 9998—Replacement Coils for Class 8502/8702 (contains rectifier)

Size	Type	Poles	Class and Type	Suffix (the complete coil number consists of the Class, Type, and suffix)			
				110/120 V	220/240 V	440/480 V	550/600 V
4	VF	3	9998WF	120	240	480	600
5	VG	3	9998WG	120	240	480	600
6	VH	3	9998WH	120	240	480	600

Table 16.115: Class 9999—Vacuum Starter Kits

For Use With		Kit Description	Class 9999 Type
Type	Size		
VF, VG	4, 5	Auxiliary Contacts, Non-Convertible 1 N.O. & 1 N.C. Isolated Contacts	WX11
VH	6		
VF	4	Coil Circuit Auxiliary Contacts 1 N.O. & 1 N.C. Isolated Contacts, Delayed Break 1 N.C. Isolated Contact	—
VG, VH	5, 6		WLX01
VG	5	Lug Kits, 6 lugs included	LUW5
VH	6		—

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

General Information

Class 8536 Type W non-reversing vacuum starters are used to switch electric motors where overload protection is not separately provided.

Type W vacuum starters are designed for operation at 600 V, 50/60 Hz. Starters are available exclusively with Motor Logic™ solid-state overload relay (SSOLR), Class 10/20 selectable.

For How to Order Information, see page 16-28 and Table 16.79 How to Order, page 16-29.

NOTE: In Table 16.116, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.78 Coil Voltage Codes, page 16-28.

Table 16.116: Class 8536—Full Voltage Vacuum Starters

NEMA Size	Enclosed Ampere Rating	Locked Rotor Current (A)	Motor Voltage	Max. Hp	Open Style Type
4	135	1080	200	40	WFO3●●●
			230	50	
			460	100	
			575	100	
5	270	2160	200	75	WGO3●●●
			230	100	
			460	200	
			575	200	
6	540	4320	200	150	WHO3●●●
			230	200	
			460	400	
			575	400	

Table 16.117: Class 9998—Replacement Coils for Class 8536 Vacuum Starters

Size	Type	Poles	Class and Type	Suffix Number (Complete Coil Number Consists of Class and Type Followed by Suffix Number)			
				120 V 110 V	240 V 220 V	480 V 440 V	600 V 550 V
4	WF	All	9998WF	120	240	480	600
5	WG		9998WG	120	240	480	600
6	WH		9998WH	120	240	480	600

Table 16.118: Class 9999—Vacuum Starter Kits

For Use With		Kit Description	Class 9999 Type
Type	Size		
WF, WG	4, 5	Auxiliary Contacts, Non-Convertible 1 N.O. & 1 N.C. Isolated Contacts	WX11
WH	6		
WF	4	Coil Circuit Auxiliary Contacts 1 N.O. & 1 N.C. Isolated Contacts, Delayed Break 1 N.C. Isolated Contact	—
WG, WH	5, 6		WLX01
WG	5	Lug Kits (6) lugs included	LUW5

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Pre-Configured NEMA™ Combination Motor Starters

Save time with these simple and easy pre-configured fusible or motor circuit protector combination starters. These combination starters have the most commonly used accessories, pre-installed for quick installation. With the NEMA™ 12/3R enclosure, these combination starters are ready for use in most common indoor and outdoor applications. The Motor Logic™ electronic overload provides a wide selection range of FLA without the need for additional melting alloys.

These combination starters contain the most common features, saving you time and money:

- Fusible Disconnect (class H/K) or Motor Circuit Protector
- Ideal for indoor or outdoor applications (3R/12 enclosure)
- Trusted Square D™ Type S Starter with Electronic Overload
- Hand-Off-Auto with Green ON, Red OFF LED lights
- Auxiliary contacts
- SPDT Aux on disconnect

Table 16.119: Fusible Disconnect Switch

Voltage (Vac)	Horsepower	NEMA Size	Fuse Clip Size (A)	Overload Range (FLA)	Catalog No.
208/240	0.75–2	0 or 1	30	3–9	8538SCASP4
208/240	3–7.5	1	60	9–27	8538SCASP5
480/600	5–10	0 or 1	30	6–18	8538SCASP6
208/240	5–10 (208) 5–15 (240)	1 or 2	60	15–45	8538SDASP4
480/600	15–25	2	60	15–45	8538SDASP6

Table 16.120: Motor Circuit Protector

Voltage (Vac)	Horsepower	NEMA Size	Fuse Clip Size (A)	Overload Range (FLA)	Catalog No.
240/480	0.75–2 (240) 1.5–5 (480)	1	30	3–9	8539SCASP6
240/480	3–7.5 (240) 7.5–15 (480)	2	30	9–27	8539SDASP5
240/480	5–10 (240) 15–25 (480)	2	50	15–45	8539SDASP6

NOTE: For melting alloy overload relay options for the above, please consult your local Schneider Electric representative.

If 120 V is not available, add a transformer:

- 480/240 V to 120 V: 9070TF100D1
- 208 V to 120 V: 9070TF100D3



If Class R fuses are used, add fuse clips:

- Class R 250 V, 30 A:: RFK03
- Class R 250 V, 60 A: RFK06
- Class R 600 V, 30 A: RFK06
- Class R 600 V, 60 A: RFK06H



© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Fusible Disconnect Switch Type

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

Class 8538 and 8539 Type S combination starters combine the requirements of motor overload and short circuit protection into one package. These starters are manufactured according to NEMA standards and are UL Listed (some Form numbers may not be listed—contact the Customer Care Center). Class 8538 and 8539 combination starters operate at 600 Vac maximum, 50–60 Hz, and can be provided with one of four overloaded relay styles (refer to page 16-35).

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.121: Class 8538 Fusible Full Voltage Type (Class H Fuse Clips), with Motor Logic SSOLR (replace ●●● with the voltage code) *[1]*

Ratings			Fuse Clip Size (A)	NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[2]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size					With External Reset	Without External Reset
				Type *[3]*	Type *[3]*	Type *[3]*	Type *[3]*	Type *[3]*
200 (208)	3	0	30	SBG12●●●H30 *[4]*	SBW12●●●H30 *[4]*	SBW22●●●H30 *[4]*	SBA22●●●H30 *[4]*	SBA12●●●H30 *[4]*
	5	1	30	SCG12●●●H30 *[4]*	SCW12●●●H30 *[4]*	SCW22●●●H30 *[4]*	SCA22●●●H30 *[4]*	SCA12●●●H30 *[4]*
	7-1/2		60	SCG13●●●H30 *[4]*	SCW13●●●H30 *[4]*	SCW23●●●H30 *[4]*	SCA23●●●H30 *[4]*	SCA13●●●H30 *[4]*
	10	2	60	SDG12●●●H30 *[4]*	SDW12●●●H30 *[4]*	SDW22●●●H30 *[4]*	SDA22●●●H30 *[4]*	SDA12●●●H30 *[4]*
	20	3	100	SEG15●●●H30	SEW15●●●H30	SEW25●●●H30	SEA25●●●H30	SEA15●●●H30
	25		200	SEG12●●●H30	SEW12●●●H30	—	SEA22●●●H30	SEA12●●●H30
	40	4	200	SFG15●●●H30	SFW15●●●H30	—	SFA25●●●H30	SFA15●●●H30
	75	5	400	SGG15●●●H30	SGW15●●●H30	—	SGA25●●●H30	SGA15●●●H30
	150	6	600	SHG13●●●H30	—	—	SHA23●●●H30	SHA13●●●H30
230 (240)	3	0	30	SBG12●●●H30 *[4]*	SBW12●●●H30 *[4]*	SBW22●●●H30 *[4]*	SBA22●●●H30 *[4]*	SBA12●●●H30 *[4]*
	5	1	30	SCG12●●●H30 *[4]*	SCW12●●●H30 *[4]*	SCW22●●●H30 *[4]*	SCA22●●●H30 *[4]*	SCA12●●●H30 *[4]*
	7-1/2		60	SCG13●●●H30 *[4]*	SCW13●●●H30 *[4]*	SCW23●●●H30 *[4]*	SCA23●●●H30 *[4]*	SCA13●●●H30 *[4]*
	15	2	60	SDG12●●●H30	SDW12●●●H30 *[4]*	SDW22●●●H30 *[4]*	SDA22●●●H30 *[4]*	SDA12●●●H30 *[4]*
	25	3	100	SEG15●●●H30	SEW15●●●H30	SEW25●●●H30	SEA25●●●H30	SEA15●●●H30
	30		200	SEG12●●●H30	SEW12●●●H30	—	SEA22●●●H30	SEA12●●●H30
	50	4	200	SFG15●●●H30	SFW15●●●H30	—	SFA25●●●H30	SFA15●●●H30
	100	5	400	SGG15●●●H30	SGW15●●●H30	—	SGA25●●●H30	SGA15●●●H30
	200	6	600	SHG13●●●H30	—	—	SHA23●●●H30	SHA13●●●H30
460 (480)	5	0	30	SBG13●●●H30 *[4]*	SBW13●●●H30 *[4]*	SBW23●●●H30 *[4]*	SBA23●●●H30 *[4]*	SBA13●●●H30 *[4]*
	10	1	30	SCG14●●●H30 *[4]*	SCW14●●●H30 *[4]*	SCW24●●●H30 *[4]*	SCA24●●●H30 *[4]*	SCA14●●●H30 *[4]*
	15	2	30	SDG16●●●H301	SDW16●●●H301	SDW26●●●H301	SDA26●●●H301	SDA16●●●H301
	25		60	SDG14●●●H30 *[4]*	SDW14●●●H30 *[4]*	SDW24●●●H30 *[4]*	SDA24●●●H30 *[4]*	SDA14●●●H30 *[4]*
	50	3	100	SEG13●●●H30	SEW13●●●H30	SEW23●●●H30	SEA23●●●H30	SEA13●●●H30
	100	4	200	SFG13●●●H30	SFW13●●●H30	—	SFA23●●●H30	SFA13●●●H30
	200	5	400	SGG13●●●H30	SGW13●●●H30	—	SGA23●●●H30	SGA13●●●H30
	400	6	600	SHG12●●●H30	—	—	SHA22●●●H30	SHA12●●●H30
575 (600)	5	0	30	SBG13●●●H30	SBW13●●●H30	SBW23●●●H30	SBA23●●●H30	SBA13●●●H30
	10	1	30	SCG14●●●H30	SCW14●●●H30	SCW24●●●H30	SCA24●●●H30	SCA14●●●H30
	15	2	30	SDG16●●●H301	SDW16●●●H301	SDW26●●●H301	SDA26●●●H301	SDA16●●●H301
	25		60	SDG14●●●H30	SDW14●●●H30	SDW24●●●H30	SDA24●●●H30	SDA14●●●H30
	50	3	100	SEG13●●●H30	SEW13●●●H30	SEW23●●●H30	SEA23●●●H30	SEA13●●●H30
	100	4	200	SFG13●●●H30	SFW13●●●H30	—	SFA23●●●H30	SFA13●●●H30
	200	5	400	SGG13●●●H30	SGW13●●●H30	—	SGA23●●●H30	SGA13●●●H30
	400	6	600	SHG12●●●H30	—	—	SHA22●●●H30	SHA12●●●H30

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150.



3 or 5 Days *Laser Delivery*

Schneider Electric offers express shipping for factory modified NEMA Combo Starters. When you need them fast, our Laser™ Delivery program is the answer to getting your product when you need it most. Ask for Laser™ Delivery, then select the product and the modifications you need when you place your order. It's as easy as that!

Table 16.122: Class 8538 Fusible Disconnect Switch Type (Class H Fuse Clips), Single Phase, *[5][6]* **with Melting Alloy Overload Relays (see Thermal Unit Selection, page 16-135)**

Motor Voltage	Max. Hp	Coil Voltage	NEMA Size	Poles	Fuse Clip Size (A)	NEMA 1 General Purpose Enclosure	NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[2]* Dusttight and Driptight Industrial Use Enclosure	
									With External Reset	Without External Reset
						Type	Type	Type	Type	Type
120	1 2 3	120	0 1 2	2	30 30 60	SBG62V02 SCG62V02 SDG62V02	SBW62V02 SCW62V02 SDW62V02	SBW65V02 SCW65V02 SDW65V02	SBA65V02 SCA65V02 SDA65V02	SBA62V02 SCA62V02 SDA62V02
240	2 3 7-1/2	240	0 1 2	2	30 30 60	SBG62V03 SCG62V03 SDG62V03	SBW62V03 SCW62V03 SDW62V03	SBW65V03 SCW65V03 SDW65V03	SBA65V03 SCA65V03 SDA65V03	SBA62V03 SCA62V03 SDA62V03

For How to Order Information, see page 16-28.

[1] To order melting alloy overload relay, remove form "H30" from part number.
[2] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.125.
[4] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[5] Single-phase units require one thermal unit. They are not available with **Form H••** (solid-state overload relays).
[6] Not included in the Laser™ Delivery program.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Non-Fusible Disconnect Switch Type

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.123: Class 8538 Non-Fusible Full Voltage Type, Non-Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code) *[7]*

Ratings			NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0–5)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[8]* Dusttight and Driptight Industrial Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size				With External Reset	Without External Reset
			Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*
200 (208)	3 7-1/2 10 25 40 75 150	0 1 2 3 4 5 6	SBG11●●●H30 *[10]* SCG11●●●H30 *[10]* SDG11●●●H30 *[10]* SEG11●●●H30 SFG11●●●H30 SGG11●●●H30 SHG11●●●H30	SBW11●●●H30 *[10]* SCW11●●●H30 *[10]* SDW11●●●H30 *[10]* SEW11●●●H30 SFW11●●●H30 SGW11●●●H30 —	SBW21●●●H30 *[10]* SCW21●●●H30 *[10]* SDW21●●●H30 *[10]* SEW21●●●H30 — — —	SBA21●●●H30 *[10]* SCA21●●●H30 *[10]* SDA21●●●H30 *[10]* SEA21●●●H30 SFA21●●●H30 SGA21●●●H30 SHA21●●●H30	SBA11●●●H30 *[10]* SCA11●●●H30 *[10]* SDA11●●●H30 *[10]* SEA11●●●H30 SFA11●●●H30 SGA11●●●H30 SHA11●●●H30
230 (240)	3 7-1/2 15 30 50 100 200	0 1 2 3 4 5 6	SBG11●●●H30 *[10]* SCG11●●●H30 *[10]* SDG11●●●H30 *[10]* SEG11●●●H30 SFG11●●●H30 SGG11●●●H30 SHG11●●●H30	SBW11●●●H30 *[10]* SCW11●●●H30 *[10]* SDW11●●●H30 *[10]* SEW11●●●H30 SFW11●●●H30 SGW11●●●H30 —	SBW21●●●H30 *[10]* SCW21●●●H30 *[10]* SDW21●●●H30 *[10]* SEW21●●●H30 — — —	SBA21●●●H30 *[10]* SCA21●●●H30 *[11]* SDA21●●●H30 *[10]* SEA21●●●H30 SFA21●●●H30 SGA21●●●H30 SHA21●●●H30	SBA11●●●H30 *[10]* SCA11●●●H30 *[10]* SDA11●●●H30 *[10]* SEA11●●●H30 SFA11●●●H30 SGA11●●●H30 SHA11●●●H30
460 (480)	5 10 25 50 100 200 400	0 1 2 3 4 5 6	SBG11●●●H30 *[10]* SCG11●●●H30 *[10]* SDG11●●●H30 *[10]* SEG11●●●H30 SFG11●●●H30 SGG11●●●H30 SHG11●●●H30	SBW11●●●H30 *[10]* SCW11●●●H30 *[10]* SDW11●●●H30 *[10]* SEW11●●●H30 SFW11●●●H30 SGW11●●●H30 —	SBW21●●●H30 *[10]* SCW21●●●H30 *[10]* SDW21●●●H30 *[10]* SEW21●●●H30 — — —	SBA21●●●H30 *[10]* SCA21●●●H30 *[10]* SDA21●●●H30 *[10]* SEA21●●●H30 SFA21●●●H30 SGA21●●●H30 SHA21●●●H30	SBA11●●●H30 *[10]* SCA11●●●H30 *[10]* SDA11●●●H30 *[10]* SEA11●●●H30 SFA11●●●H30 SGA11●●●H30 SHA11●●●H30
575 (600)	5 10 25 50 100 200 400	0 1 2 3 4 5 6	SBG11●●●H30 SCG11●●●H30 SDG11●●●H30 SEG11●●●H30 SFG11●●●H30 SGG11●●●H30 SHG11●●●H30	SBW11●●●H30 SCW11●●●H30 SDW11●●●H30 SEW11●●●H30 SFW11●●●H30 SGW11●●●H30 —	SBW21●●●H30 SCW21●●●H30 SDW21●●●H30 SEW21●●●H30 — — —	SBA21●●●H30 SCA21●●●H30 SDA21●●●H30 SEA21●●●H30 SFA21●●●H30 SGA21●●●H30 SHA21●●●H30	SBA11●●●H30 SCA11●●●H30 SDA11●●●H30 SEA11●●●H30 SFA11●●●H30 SGA11●●●H30 SHA11●●●H30

Table 16.124: Class 8538 Non-Fusible Disconnect Switch Type, Single Phase, with Melting Alloy Overload Relay *[12] [13]*
(see Thermal Unit Selection, page 16-135)

Motor Voltage	Max. Hp	Coil Voltage	NEMA Size	Poles	NEMA 1 General Purpose Enclosure	NEMA 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[8]* Dusttight and Driptight Industrial Enclosure	
								With External Reset	Without External Reset
					Type	Type	Type	Type	Type
120	1 2 3	120	0 1 2	2	SBG61V02 SCG61V02 SDG61V02	SBW61V02 SCW61V02 SDW61V02	SBW64V02 SCW64V02 SDW64V02	SBA64V02 SCA64V02 SDA64V02	SBA61V02 SCA61V02 SDA61V02
240	2 3 7-1/2	240	0 1 2	2	SBG61V03 SCG61V03 SDG61V03	SBW61V03 SCW61V03 SDW61V03	SBW64V03 SCW64V03 SDW64V03	SBA64V03 SCA64V03 SDA64V03	SBA61V03 SCA61V03 SDA61V03

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150.

Table 16.125: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[14]*	—	V01
120 *[15]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page Table 16.313. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

For How to Order Information, see page 16-28.



[7] To order melting alloy overload relay, remove form "H30" from part number.
[8] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[9] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.125.
[10] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[11] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121
[12] Single-phase units require one thermal unit. They are not available with **Form H••** (solid-state overload relays).
[13] Not included in the Laser™ Delivery program.
[14] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8538SBG11V01S).
[15] These voltage codes must include **Form S** (furnished at no charge).
When specifying **Form S**, please include the motor voltage when ordering (for example, order as 8538SCG11V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Fusible Disconnect Switch Type with Class R Fuse Clips

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.126: Class 8538 Fusible (with Class R Fuse Clips) Full Voltage Type, Non-Reversing, with Motor Logic SSOLR (100,000 AIC Rated) (replace ●●● with the voltage code) *[16]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0–5)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[17]* Dusttight and Driptight Industrial Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Fuse Clip Size (A)				With External Reset	Without External Reset
				Type *[18]*	Type *[18]*	Type *[18]*	Type *[18]*	Type *[18]*
200 (208)	3	0	30	SBG32●●●H30 *[19]*	SBW32●●●H30 *[19]*	SBW42●●●H30 *[19]*	SBA42●●●H30 *[19]*	SBA32●●●H30 *[19]*
	5	1	30	SCG32●●●H30 *[19]*	SCW32●●●H30 *[19]*	SCW42●●●H30 *[19]*	SCA42●●●H30 *[19]*	SCA32●●●H30 *[19]*
	7-1/2	1	60	SCG33●●●H30 *[19]*	SCW33●●●H30 *[19]*	SCW43●●●H30 *[19]*	SCA43●●●H30 *[19]*	SCA33●●●H30 *[19]*
	10	2	60	SDG32●●●H30 *[19]*	SDW32●●●H30 *[19]*	SDW42●●●H30 *[19]*	SDA42●●●H30 *[19]*	SDA32●●●H30 *[19]*
	20	3	100	SEG35●●●H30	SEW35●●●H30	SEW45●●●H30	SEA45●●●H30	SEA35●●●H30
	25	3	200	SEG32●●●H30	SEW32●●●H30	—	SEA42●●●H30	SEA32●●●H30
	40	4	200	SFG35●●●H30	SFW35●●●H30	—	SFA45●●●H30	SFA35●●●H30
	75	5	400	SGG35●●●H30	SGW35●●●H30	—	SGA45●●●H30	SGA35●●●H30
	150	6	600	SHG33●●●H30	—	—	SHA43●●●H30	SHA33●●●H30
230 (240)	3	0	30	SBG32●●●H30 *[19]*	SBW32●●●H30 *[19]*	SBW42●●●H30 *[19]*	SBA42●●●H30 *[19]*	SBA32●●●H30 *[19]*
	5	1	30	SCG32●●●H30 *[19]*	SCW32●●●H30 *[19]*	SCW42●●●H30 *[19]*	SCA42●●●H30 *[19]*	SCA32●●●H30 *[19]*
	7-1/2	1	60	SCG33●●●H30 *[19]*	SCW33●●●H30 *[19]*	SCW43●●●H30 *[19]*	SCA43●●●H30 *[19]*	SCA33●●●H30 *[19]*
	15	2	60	SDG32●●●H30 *[19]*	SDW32●●●H30 *[19]*	SDW42●●●H30 *[19]*	SDA42●●●H30 *[19]*	SDA32●●●H30 *[19]*
	25	3	100	SEG35●●●H30	SEW35●●●H30	SEW45●●●H30	SEA45●●●H30	SEA35●●●H30
	30	3	200	SEG32●●●H30	SEW32●●●H30	—	SEA42●●●H30	SEA32●●●H30
	50	4	200	SFG35●●●H30	SFW35●●●H30	—	SFA45●●●H30	SFA35●●●H30
	100	5	400	SGG35●●●H30	SGW35●●●H30	—	SGA45●●●H30	SGA35●●●H30
	200	6	600	SHG33●●●H30	—	—	SHA43●●●H30	SHA33●●●H30
460 (480)	5	0	30	SBG33●●●H30 *[19]*	SBW33●●●H30 *[19]*	SBW43●●●H30 *[19]*	SBA43●●●H30 *[19]*	SBA33●●●H30 *[19]*
	10	1	30	SCG34●●●H30 *[19]*	SCW34●●●H30 *[19]*	SCW44●●●H30 *[19]*	SCA44●●●H30 *[19]*	SCA34●●●H30 *[19]*
	15	2	30	SDG36●●●H301	SDW36●●●H301	SDW46●●●H301	SDA46●●●H301	SDA36●●●H301
	25	2	60	SDG34●●●H30 *[19]*	SDW34●●●H30 *[19]*	SDW44●●●H30 *[19]*	SDA44●●●H30 *[19]*	SDA34●●●H30 *[19]*
	50	3	100	SEG33●●●H30	SEW33●●●H30	SEW43●●●H30	SEA43●●●H30	SEA33●●●H30
	100	4	200	SFG33●●●H30	SFW33●●●H30	—	SFA43●●●H30	SFA33●●●H30
	200	5	400	SGG33●●●H30	SGW33●●●H30	—	SGA43●●●H30	SGA33●●●H30
	400	6	600	SHG32●●●H30	—	—	SHA42●●●H30	SHA32●●●H30
575 (600)	5	0	30	SBG33●●●H30 *[19]*	SBW33●●●H30 *[19]*	SBW43●●●H30 *[19]*	SBA43●●●H30 *[19]*	SBA33●●●H30 *[19]*
	10	1	30	SCG34●●●H30 *[19]*	SCW34●●●H30 *[19]*	SCW44●●●H30 *[19]*	SCA44●●●H30 *[19]*	SCA34●●●H30 *[19]*
	15	2	30	SDG36●●●H301	SDW36●●●H301	SDW46●●●H301	SDA46●●●H301	SDA36●●●H301
	25	2	60	SDG34●●●H30 *[19]*	SDW34●●●H30 *[19]*	SDW44●●●H30 *[19]*	SDA44●●●H30 *[19]*	SDA34●●●H30 *[19]*
	50	3	100	SEG33●●●H30	SEW33●●●H30	SEW43●●●H30	SEA43●●●H30	SEA33●●●H30
	100	4	200	SFG33●●●H30	SFW33●●●H30	—	SFA43●●●H30	SFA33●●●H30
	200	5	400	SGG33●●●H30	SGW33●●●H30	—	SGA43●●●H30	SGA33●●●H30
	400	6	600	SHG32●●●H30	—	—	SHA42●●●H30	SHA32●●●H30

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150.

Table 16.127: Class 8538 Fusible Disconnect Switch Type (Class R Fuses), Single Phase with Melting Alloy Overload Relay *[20][21]* **(see Thermal Unit Selection, page 16-135)**

Motor Voltage	Max. Hp	Coil Voltage	NEMA Size	Poles	Fuse Clip Size (A)	NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure Stainless Steel	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R Dusttight and Driptight Industrial Use Enclosure	
									With External Reset	Without External Reset
						Type	Type	Type	Type	Type
120	1	120	0	2	30	SBG63V02	SBW63V02	SBW66V02	SBA66V02	SBA63V02
	2		1		30	SCG63V02	SCW63V02	SCW66V02	SCA66V02	SCA63V02
	3		2		60	SDG63V02	SDW63V02	SDW66V02	SDA66V02	SDA63V02
240	2	240	0	2	30	SBG63V03	SBW63V03	SBW66V03	SBA66V03	SBA63V03
	3		1		30	SCG63V03	SCW63V03	SCW66V03	SCA66V03	SCA63V03
	7-1/2		2		60	SDG63V03	SDW63V03	SDW66V03	SDA66V03	SDA63V03



Table 16.128: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[22]*	—	V01
120 *[23]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see Table 16.313. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

For How to Order Information, see page 16-28.

[16] To order melting alloy overload relay, remove form "H30" from part number.
[17] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[18] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.128.
[19] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121
[20] Single-phase units require one thermal unit. They are not available with **Form H••** (solid-state overload relays).
[21] Not included in the Laser™ Delivery program.
[22] 24 V coils are not available on Sizes 4–7. On Sizes 00-3, where 24 V coils are available, **Form S** (separate control) must be specified (i.e., order as 8538SBG32V01S).
[23] These voltage codes must include **Form S** (provided at no charge). When specifying **Form S**, please include the motor voltage when ordering (for example, order as 8538SCG32V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Full Voltage Type with Motor Logic™ Solid-State Overload Relays

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.129: Class 8538 with Oversized Enclosures (replace ●●● with the voltage code) *[24]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dustight Enclosure Stainless Steel (304)	NEMA 12/3R *[25]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Fuse Clip Size (A)			With External Reset	Without External Reset
				Type *[26]*	Type *[26]*	Type *[26]*	Type *[26]*
Class 8538 Non-Fusible Disconnect Switch Type—NEMA Size 0–2 *[27][28]*							
200 (208)	3	0	N/A	SBG11S8●●●H30 *[29]*	SBW11S8●●●H30 *[29]*	SBA21S8●●●H30 *[29]*	SBA11S8●●●H30 *[29]*
	7-1/2	1	N/A	SCG11S8●●●H30 *[29]*	SCW11S8●●●H30 *[29]*	SCA21S8●●●H30 *[29]*	SCA11S8●●●H30 *[29]*
	10	2	N/A	SDG11S8●●●H30 *[29]*	SDW11S8●●●H30 *[29]*	SDA21S8●●●H30 *[29]*	SDA11S8●●●H30 *[29]*
230 (240)	3	0	N/A	SBG11S8●●●H30 *[29]*	SBW11S8●●●H30 *[29]*	SBA21S8●●●H30 *[29]*	SBA11S8●●●H30 *[29]*
	7-1/2	1	N/A	SCG11S8●●●H30 *[29]*	SCW11S8●●●H30 *[29]*	SCA21S8●●●H30 *[29]*	SCA11S8●●●H30 *[29]*
	15	2	N/A	SDG11S8●●●H30 *[29]*	SDW11S8●●●H30 *[29]*	SDA21S8●●●H30 *[29]*	SDA11S8●●●H30 *[29]*
460 (480)	5	0	N/A	SBG11S8●●●H30 *[29]*	SBW11S8●●●H30 *[29]*	SBA21S8●●●H30 *[29]*	SBA11S8●●●H30 *[29]*
	10	1	N/A	SCG11S8●●●H30 *[29]*	SCW11S8●●●H30 *[29]*	SCA21S8●●●H30 *[29]*	SCA11S8●●●H30 *[29]*
	25	2	N/A	SDG11S8●●●H30 *[29]*	SDW11S8●●●H30 *[29]*	SDA21S8●●●H30 *[29]*	SDA11S8●●●H30 *[29]*
575 (600)	5	0	N/A	SBG11S8●●●H30 *[29]*	SBW11S8●●●H30 *[29]*	SBA21S8●●●H30 *[29]*	SBA11S8●●●H30 *[29]*
	10	1	N/A	SCG11S8●●●H30 *[29]*	SCW11S8●●●H30 *[29]*	SCA21S8●●●H30 *[29]*	SCA11S8●●●H30 *[29]*
	25	2	N/A	SDG11S8●●●H30 *[29]*	SDW11S8●●●H30 *[29]*	SDA21S8●●●H30 *[29]*	SDA11S8●●●H30 *[29]*
Class 8538 Fusible Disconnect Switch Type—NEMA Size 0–2 *[27][28]*							
200 (208)	3	0	30	SBG12S8●●●H30 *[29]*	SBW12S8●●●H30 *[29]*	SBA22S8●●●H30 *[29]*	SBA12S8●●●H30 *[29]*
	5	1	30	SCG12S8●●●H30 *[29]*	SCW12S8●●●H30 *[29]*	SCA22S8●●●H30 *[29]*	SCA12S8●●●H30 *[29]*
	7-1/2	1	60	SCG13S8●●●H30 *[29]*	SCW13S8●●●H30 *[29]*	SCA23S8●●●H30 *[29]*	SCA13S8●●●H30 *[29]*
	10	2	60	SDG12S8●●●H30 *[29]*	SDW12S8●●●H30 *[29]*	SDA22S8●●●H30 *[29]*	SDA12S8●●●H30 *[29]*
230 (240)	3	0	30	SBG12S8●●●H30 *[29]*	SBW12S8●●●H30 *[29]*	SBA22S8●●●H30 *[29]*	SBA12S8●●●H30 *[29]*
	5	1	30	SCG12S8●●●H30 *[29]*	SCW12S8●●●H30 *[29]*	SCA22S8●●●H30 *[29]*	SCA12S8●●●H30 *[29]*
	7-1/2	1	60	SCG13S8●●●H30 *[29]*	SCW13S8●●●H30 *[29]*	SCA23S8●●●H30 *[29]*	SCA13S8●●●H30 *[29]*
	15	2	60	SDG12S8●●●H30 *[29]*	SDW12S8●●●H30 *[29]*	SDA22S8●●●H30 *[29]*	SDA12S8●●●H30 *[29]*
460 (480)	5	0	30	SBG13S8●●●H30 *[29]*	SBW13S8●●●H30 *[29]*	SBA23S8●●●H30 *[29]*	SBA13S8●●●H30 *[29]*
	10	1	30	SCG14S8●●●H30 *[29]*	SCW14S8●●●H30 *[29]*	SCA24S8●●●H30 *[29]*	SCA14S8●●●H30 *[29]*
	15	2	30	SDG16S8●●●H301	SDW16S8●●●H301	SDA26S8●●●H301	SDA16S8●●●H301
	25	2	60	SDG14S8●●●H30 *[29]*	SDW14S8●●●H30 *[29]*	SDA24S8●●●H30 *[29]*	SDA14S8●●●H30 *[29]*
575 (600)	5	0	30	SBG13S8●●●H30 *[29]*	SBW13S8●●●H30 *[29]*	SBA23S8●●●H30 *[29]*	SBA13S8●●●H30 *[29]*
	10	1	30	SCG14S8●●●H30 *[29]*	SCW14S8●●●H30 *[29]*	SCA24S8●●●H30 *[29]*	SCA14S8●●●H30 *[29]*
	15	2	30	SDG16S8●●●H301	SDW16S8●●●H301	SDA26S8●●●H301	SDA16S8●●●H301
	25	2	60	SDG14S8●●●H30 *[29]*	SDW14S8●●●H30 *[29]*	SDA24S8●●●H30 *[29]*	SDA14S8●●●H30 *[29]*
Class 8538 Fusible Disconnect Switch Type with Class R Fuse Clips—NEMA Size 0–2 *[27][28]*							
200 (208)	3	0	30	SBG32S8●●●H30 *[29]*	SBW32S8●●●H30 *[29]*	SBA42S8●●●H30 *[29]*	SBA32S8●●●H30 *[29]*
	5	1	30	SCG32S8●●●H30 *[29]*	SCW32S8●●●H30 *[29]*	SCA42S8●●●H30 *[29]*	SCA32S8●●●H30 *[29]*
	7-1/2	1	60	SCG33S8●●●H30 *[29]*	SCW33S8●●●H30 *[29]*	SCA43S8●●●H30 *[29]*	SCA33S8●●●H30 *[29]*
	10	2	60	SDG32S8●●●H30 *[29]*	SDW32S8●●●H30 *[29]*	SDA42S8●●●H30 *[29]*	SDA32S8●●●H30 *[29]*
230 (240)	3	0	30	SBG32S8●●●H30 *[29]*	SBW32S8●●●H30 *[29]*	SBA42S8●●●H30 *[29]*	SBA32S8●●●H30 *[29]*
	5	1	30	SCG32S8●●●H30 *[29]*	SCW32S8●●●H30	SCA42S8●●●H30	SCA32S8●●●H30
	7-1/2	1	60	SCG33S8●●●H30	SCW33S8●●●H30 *[29]*	SCA43S8●●●H30 *[29]*	SCA33S8●●●H30 *[29]*
	15	2	60	SDG32S8●●●H30 *[29]*	SDW32S8●●●H30 *[29]*	SDA42S8●●●H30 *[29]*	SDA32S8●●●H30 *[29]*
460 (480)	5	0	30	SBG33S8●●●H30 *[29]*	SBW33S8●●●H30 *[29]*	SBA43S8●●●H30 *[29]*	SBA33S8●●●H30 *[29]*
	10	1	30	SCG34S8●●●H30 *[29]*	SCW34S8●●●H30 *[29]*	SCA44S8●●●H30 *[29]*	SCA34S8●●●H30 *[29]*
	15	2	30	SDG36S8●●●H301	SDW36S8●●●H301	SDA46S8●●●H301	SDA36S8●●●H301
	25	2	60	SDG34S8●●●H30 *[29]*	SDW34S8●●●H30 *[29]*	SDA44S8●●●H30 *[29]*	SDA34S8●●●H30 *[29]*
575 (600)	5	0	30	SBG33S8●●●H30 *[29]*	SBW33S8●●●H30 *[29]*	SBA43S8●●●H30 *[29]*	SBA33S8●●●H30 *[29]*
	10	1	30	SCG34S8●●●H30 *[29]*	SCW34S8●●●H30 *[29]*	SCA44S8●●●H30 *[29]*	SCA34S8●●●H30 *[29]*
	15	2	30	SDG36S8●●●H301	SDW36S8●●●H301	SDA46S8●●●H301	SDA36S8●●●H301
	25	2	60	SDG34S8●●●H30 *[29]*	SDW34S8●●●H30 *[29]*	SDA44S8●●●H30 *[29]*	SDA34S8●●●H30 *[29]*

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150

Table 16.130: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[30]*	—	V01
120 *[31]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see Table 16.313.

Table 16.131: Class 8538 Fusible Disconnect Switch Type for Horizontal Mounting *[28]* **(replace ●●● with the voltage code)** *[24]*

Ratings				NEMA 12/3R *[25]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Fuse Clip Size (A)	With External Reset	Without External Reset
				Type *[26]*	Type *[26]*
200 (208)	2	1	30	SCA22S1●●●H30	SCA12S1●●●H30
	7-1/2	1	60	SCA23S1●●●H30	SCA13S1●●●H30
230 (240)	2	1	30	SCA22S1●●●H30	SCA12S1●●●H30
	7-1/2	1	60	SCA23S1●●●H30	SCA13S1●●●H30
460 (480)	10	1	30	SCA24S1●●●H30	SCA14S1●●●H30
575 (600)	10	1	30	SCA24S1●●●H30	SCA14S1●●●H30

[24] To order melting alloy overload relay, remove form "H30" from part number.
[25] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[26] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.130.
[27] For Size 3–5 starters in oversized NEMA 1, 4 or 12 enclosures, contact the factory for pricing and TAG number.
[28] Not included in the Laser™ Delivery program.
[29] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[30] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8538SBG1158V01S).
[31] These voltage codes must include **Form S** (provided at no charge). When specifying **Form S,** supply motor voltage when ordering (for example, order as 8538SCG1158V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

16 NEMA AND DEFINITE PURPOSE CONTACTORS AND STARTERS

For How to Order Information, see page 16-28.

Electronic Motor Circuit Protector (MCP)

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.132: Class 8539 Full Voltage Type, Non-Reversing, 200–240 V, with Motor Logic SSOLR (replace ●●● with the voltage code) *[32]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Stainless Steel (304) Enclosure (Sizes 0–5)	NEMA 4X Watertight, Dusttight, and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[33]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Hp Range Polyphase	NEMA Size	Circuit Breaker (See Page 7-32 for Breaker Adjustment Range)	Type *[34]*	Type *[34]*	Type *[34]*	With External Reset Type *[34]*	Without External Reset Type *[34]*
200 (208)	0.25–3	0	HLL36030M71	SBG43●●●H30 *[35]*	SBW43●●●H30 *[35]*	SBW53●●●H30 *[35]*	SBA53●●●H30 *[35]*	SBA43●●●H30 *[35]*
	0.25–5 7.5	1	HLL36030M71 HLL36050M72	SCG44●●●H30 *[35]* SCG45●●●H30 *[35]*	SCW44●●●H30 *[35]* SCW45●●●H30 *[35]*	SCW54●●●H30 *[35]* SCW55●●●H30 *[35]*	SCA54●●●H30 *[35]* SCA55●●●H30 *[35]*	SCA44●●●H30 *[35]* SCA45●●●H30 *[35]*
	1.5–5 7.5–10	2	HLL36030M71 HLL36050M72	SDG42●●●H301 SDG43●●●H30 *[35]*	SDW42●●●H301 SDW43●●●H30 *[35]*	SDW52●●●H301 SDW53●●●H30 *[35]*	SDA52●●●H301 SDA53●●●H30 *[35]*	SDA42●●●H301 SDA43●●●H30 *[35]*
	15–25	3	HLL36100M73	SEG42●●●H30	SEW42●●●H30	SEW52●●●H30	SEA52●●●H30	SEA42●●●H30
	30–40	4	JLL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	50–60 75	5	JLL36250M75 LJL36400M36	SGG44●●●H30 SGG45●●●H30	SGW44●●●H30 SGW45●●●H30	— —	SGA54●●●H30 SGA55●●●H30	SGA44●●●H30 SGA45●●●H30
	100 125–150	6	LJL36400M36 LJL36600M42	SHG43●●●H30 SHG45●●●H30	— —	— —	SHA53●●●H30 SHA55●●●H30	SHA43●●●H30 SHA45●●●H30
230 (240)	0.25–3	0	HLL36030M71	SBG43●●●H30 *[35]*	SBW43●●●H30 *[35]*	SBW53●●●H30 *[35]*	SBA53●●●H30 *[35]*	SBA43●●●H30 *[35]*
	0.25–7.5	1	HLL36030M71	SCG44●●●H30 *[35]*	SCW44●●●H30 *[35]*	SCW54●●●H30 *[35]*	SCA54●●●H30 *[35]*	SCA44●●●H30 *[35]*
	1.5–7.5 10 15	2	HLL36030M71 HLL36050M72 HLL36100M73	SDG42●●●H301 SDG43●●●H30 *[35]* SDG44●●●H30 *[35]*	SDW42●●●H301 SDW43●●●H30 *[35]* SDW44●●●H30 *[35]*	SDW52●●●H301 SDW53●●●H30 *[35]* SDW54●●●H30 *[35]*	SDA52●●●H301 SDA53●●●H30 *[35]* SDA54●●●H30 *[35]*	SDA42●●●H301 SDA43●●●H30 *[35]* SDA44●●●H30 *[35]*
	15–30	3	HLL36100M73	SEG42●●●H30	SEW42●●●H30	SEW52●●●H30	SEA52●●●H30	SEA42●●●H30
	40–50	4	JLL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	60 75–100	5	JLL36250M75 LJL36400M36	SGG44●●●H30 SGG46●●●H30	SGW44●●●H30 SGW45●●●H30	— —	SGA54●●●H30 SGA55●●●H30	SGA44●●●H30 SGA45●●●H30
	125–150 200	6	LJL36600M42 PLL34080M68	SHG45●●●H30 SHG46●●●H30	— —	— —	SHA55●●●H30 SHA56●●●H30	SHA45●●●H30 SHA46●●●H30



NEMA Type 1 Enclosure with 30 mm Operators

3 or 5 Days Laser Delivery

Refer to page 16-31 for details.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150 Control Transformer Selection, page 16-58.

Table 16.133: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[36]*	—	V01
120 *[37]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-120. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-59
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[32] To order melting alloy overload relay, remove form "H30" from part number.
[33] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[34] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.133.
[35] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121
[36] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8539SBG41V01S).
[37] These voltage codes must include **Form S** (supplied at no charge). When specifying **Form S,** please supply motor voltage when ordering (for example, order as 8539SCG41V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.134: Class 8539 Full Voltage Type, Non-Reversing, 460–600 V, with Motor Logic SSOLR and Electronic Motor Circuit Protector (MCP) (replace ●●● with the voltage code)*[38]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure, Stainless Steel (304) (Sizes 0–5)	NEMA 4X Watertight, Dusttight, and Corrosion Resistant Polyester Enclosure	NEMA 12/3R*[39]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Hp Range Polyphase	NEMA Size	Circuit Breaker (See Page 7-32 for Breaker Adjustment Range)	Type *[40]*	Type *[40]*	Type *[40]*	With External Reset Type *[40]*	Without External Reset Type *[40]*
460 (480)	0.25–5	0	HLL36030M71	SBG43●●●H30 *[41]*	SBW43●●●H30 *[41]*	SBW53●●●H30 *[41]*	SBA53●●●H30 *[41]*	SBA43●●●H30 *[41]*
	0.25–10	1	HLL36030M71	SCG44●●●H30 *[41]*	SCW44●●●H30 *[41]*	SCW54●●●H30 *[41]*	SCA54●●●H30 *[41]*	SCA44●●●H30 *[41]*
	5–15 20–25	2	HLL36030M71 HLL36050M72	SDG42●●●H301 SDG43●●●H30	SDW42●●●H301 SDW43●●●H30 *[41]*	SDW52●●●H301 SDW53●●●H30 *[41]*	SDA52●●●H301 SDA53●●●H30 *[41]*	SDA42●●●H301 SDA43●●●H30 *[41]*
	20–25 30–50	3	HLL36050M72 HLL36100M73	SEG41●●●H30 SEG42●●●H30	SEW41●●●H30 SEW42●●●H30	SEW51●●●H30 SEW52●●●H30	SEA51●●●H30 SEA52●●●H30	SEA41●●●H30 SEA42●●●H30
	60–100	4	JLL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	125 150–200	5	JLL36250M75 LJL36400M36	SGG44●●●H30 SGG45●●●H30	SGW44●●●H30 SGW45●●●H30	— —	SGA54●●●H30 SGA55●●●H30	SGA44●●●H30 SGA45●●●H30
	250–350 400	6	LJL36600M42 PLL34080M68	SHG45●●●H30 SHG46●●●H30	— —	— —	SHA55●●●H30 SHA56●●●H30	SHA45●●●H30 SHA46●●●H30
575 (600)	0.25–5	0	HLL36030M71	SBG43●●●H30 *[41]*	SBW43●●●H30 *[41]*	SBW53●●●H30 *[41]*	SBA53●●●H30 *[41]*	SBA43●●●H30 *[41]*
	0.25–10	1	HLL36030M71	SCG44●●●H30 *[41]*	SCW44●●●H30 *[41]*	SCW54●●●H30 *[41]*	SCA54●●●H30 *[41]*	SCA44●●●H30 *[41]*
	5–20 25	2	HLL36030M71 HLL36050M72	SDG42●●●H301 SDG43●●●H30 *[41]*	SDW42●●●H301 SDW43●●●H30 *[41]*	SDW52●●●H301 SDW53●●●H30 *[41]*	SDA52●●●H301 SDA53●●●H30 *[41]*	SDA42●●●H301 SDA43●●●H30 *[41]*
	25–30 40–50	3	HLL36050M72 HLL36100M73	SEG41●●●H30 SEG42●●●H30	SEW41●●●H30 SEW42●●●H30	SEW51●●●H30 SEW52●●●H30	SEA51●●●H30 SEA52●●●H30	SEA41●●●H30 SEA42●●●H30
	60–100	4	JLL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	125–150 200	5	JLL36250M75 LJL36400M36	SGG44●●●H30 SGG45●●●H30	SGW44●●●H30 SGW45●●●H30	— —	SGA54●●●H30 SGA55●●●H30	SGA44●●●H30 SGA45●●●H30
	250 300–400	6	LJL36400M36 LJL36600M42	SHG43●●●H30 SHG45●●●H30	— —	— —	SHA53●●●H30 SHA55●●●H30	SHA43●●●H30 SHA45●●●H30

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150.



Table 16.135: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24*[42]*	—	V01
120*[43]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see Table 16.313.
Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-59
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-94
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[38] To order melting alloy overload relay, remove form "H30" from part number.
[39] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[40] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.135.
[41] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121
[42] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (i.e., order as 8539SBG41V01S).
[43] These voltage codes must include **Form S** (furnished at no charge). When specifying **Form S,** please include the motor voltage when ordering (for example, order as 8539SCG41V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA Size 0–2 in Oversized Enclosure

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.136: Class 8539 Electronic Motor Circuit Protectors (MCP) in Oversized Enclosure, NEMA Size 0–2*[44][45][46]*
Full Voltage Type, Non-Reversing with Motor Logic SSOLR (replace ●●● with the voltage code)

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Stainless Steel (304) Enclosure	NEMA 12/3R*[47]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Hp Range Polyphase	NEMA Size	Circuit Breaker (See Page 7-32 for Breaker Adjustment Range)			With External Reset	Without External Reset
				Type *[48]*	Type *[48]*	Type *[48]*	Type *[48]*
200 (208)	0.25–3	0	HLL36030M71	SBG43S8●●●H30*[49]*	SBW43S8●●●H30*[49]*	SBA53S8●●●H30*[49]*	SBA43S8●●●H30*[49]*
	0.25–5 7.5	1	HLL36030M71 HLL36050M72	SCG44S8●●●H30*[49]* SCG45S8●●●H30*[49]*	SCW44S8●●●H30*[49]* SCW45S8●●●H30*[49]*	SCA54S8●●●H30*[49]* SCA55S8●●●H30*[49]*	SCA44S8●●●H30*[49]* SCA45S8●●●H30*[49]*
	1.5–5 7.5–10	2	HLL36030M71 HLL36050M72	SDG42S8●●●H301 SDG43S8●●●H30*[49]*	SDW42S8●●●H301 SDW43S8●●●H30*[49]*	SDA52S8●●●H301 SDA53S8●●●H30*[49]*	SDA42S8●●●H301 SDA43S8●●●H30*[49]*
230 (240)	0.25–3	0	HLL36030M71	SBG43S8●●●H30*[49]*	SBW43S8●●●H30*[49]*	SBA53S8●●●H30*[49]*	SBA43S8●●●H30*[49]*
	0.25–7.5	1	HLL36030M71	SCG44S8●●●H30*[49]*	SCW44S8●●●H30*[49]*	SCA54S8●●●H30*[49]*	SCA44S8●●●H30*[49]*
	1.5–7.5 10 15	2	HLL36030M71 HLL36050M72 HLL36100M73	SDG42S8●●●H301 SDG43S8●●●H30*[49]* SDG44S8●●●H30*[49]*	SDW42S8●●●H301 SDW43S8●●●H30*[49]* SDW44S8●●●H30*[49]*	SDA52S8●●●H301 SDA53S8●●●H30*[49]* SDA54S8●●●H30*[49]*	SDA42S8●●●H301 SDA43S8●●●H30*[49]* SDA44S8●●●H30*[49]*
460 (480)	0.25–5	0	HLL36030M71	SBG43S8●●●H30*[49]*	SBW43S8●●●H30*[49]*	SBA53S8●●●H30*[49]*	SBA43S8●●●H30*[49]*
	0.25–10	1	HLL36030M71	SCG44S8●●●H30*[49]*	SCW44S8●●●H30*[49]*	SCA54S8●●●H30*[49]*	SCA44S8●●●H30*[49]*
	5–15 20–25	2	HLL36030M71 HLL36050M72	SDG42S8●●●H301 SDG43S8●●●H30*[49]*	SDW42S8●●●H301 SDW43S8●●●H30*[49]*	SDA52S8●●●H301 SDA53S8●●●H30*[49]*	SDA42S8●●●H301 SDA43S8●●●H30*[49]*
575 (600)	0.25–5	0	HLL36060M71	SBG43S8●●●H30*[49]*	SBW43S8●●●H30*[49]*	SBA53S8●●●H30*[49]*	SBA43S8●●●H30*[49]*
	0.25–10	1	HLL36030M71	SCG44S8●●●H30*[49]*	SCW44S8●●●H30*[49]*	SCA54S8●●●H30*[49]*	SCA44S8●●●H30*[49]*
	5–20 25	2	HLL36030M71 HLL36050M72	SDG42S8●●●H301 SDG43S8●●●H30*[49]*	SDW42S8●●●H301 SDW43S8●●●H30*[49]*	SDA52S8●●●H301 SDA53S8●●●H30*[49]*	SDA42S8●●●H301 SDA43S8●●●H30*[49]*

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150.

Table 16.137: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24*[50]*	—	V01
120*[51]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-120. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-59
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[44] To order melting alloy overload relay, remove form "H30" from part number.
[45] Not included in the Laser™ Delivery program
[46] For NEMA Size 3–5 starters in oversized NEMA 1 or 12 enclosures, contact factory for pricing and TAG number.
[47] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[48] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.137.
[49] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[50] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8539SBG41S8V01S).
[51] These voltage codes must include **Form S** (provided at no charge). When specifying **Form S,** please include the motor voltage when ordering (for example, order as 8539SCG41S8V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Magnetic Circuit Breaker

Full Voltage Type

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.138: Class 8539 Full Voltage, Thermal-Magnetic Circuit Breaker Type, Non-Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code) *[52]*

Ratings					NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0–5)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[53]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Circuit Breaker		Type *[54]*	Type *[54]*	Type *[54]*	With External Reset	Without External Reset
			Type	Ampere Rating				Type *[54]*	Type *[54]*
200 (208)	2 3	0	HLL36015 HLL36020	15 20	SBG1●●●H30 *[55]* SBG3●●●H30 *[55]*	SBW1●●●H30 *[55]* SBW3●●●H30 *[55]*	SBW11●●●H30 *[55]* SBW13●●●H30 *[55]*	SBA11●●●H30 *[55]* SBA13●●●H30 *[55]*	SBA1●●●H30 *[55]* SBA3●●●H30 *[55]*
	5 7-1/2	1	HLL36035 HLL36050	35 50	SCG5●●●H30 *[55]* SCG2●●●H30 *[55]*	SCW5●●●H30 *[55]* SCW2●●●H30 *[55]*	SCW15●●●H30 *[55]* SCW12●●●H30 *[55]*	SCA15●●●H30 *[55]* SCA12●●●H30 *[55]*	SCA5●●●H30 *[55]* SCA2●●●H30 *[55]*
	10	2	HLL36060	60	SDG1●●●H30 *[55]*	SDW1●●●H30 *[55]*	SDW11●●●H30 *[55]*	SDA11●●●H30 *[55]*	SDA1●●●H30 *[55]*
	15 20 25	3	HLL36100 HLL36125 HLL36150	100 125 150	SEG3●●●H30 SEG1●●●H30 SEG5●●●H30	SEW3●●●H30 SEW1●●●H30 SEW5●●●H30	SEW13●●●H30 SEW11●●●H30 SEW15●●●H30	SEA13●●●H30 SEA11●●●H30 SEA15●●●H30	SEA3●●●H30 SEA1●●●H30 SEA5●●●H30
	30 40	4	JLL36200 JLL36250	200 250	SFG3●●●H30 SFG4●●●H30	SFW3●●●H30 SFW4●●●H30	SFW13●●●H30 SFW14●●●H30	SFA13●●●H30 SFA14●●●H30	SFA3●●●H30 SFA4●●●H30
	50 60–75	5	JLL36250 LLL36400U33X	250 400	SGG6●●●H30 SGG4●●●H30	SGW6●●●H30 SGW4●●●H30	— —	SGA16●●●H30 SGA14●●●H30	SGA6●●●H30 SGA4●●●H30
	100–125 150	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	— —	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30
230 (240)	2 3	0	HLL36015 HLL36020	15 20	SBG1●●●H30 *[55]* SBG3●●●H30 *[55]*	SBW1●●●H30 *[55]* SBW3●●●H30 *[55]*	SBW11●●●H30 *[55]* SBW13●●●H30 *[55]*	SBA11●●●H30 *[55]* SBA13●●●H30 *[55]*	SBA1●●●H30 *[55]* SBA3●●●H30 *[55]*
	5 7-1/2	1	HLL36035 HLL36045	35 45	SCG5●●●H30 *[55]* SCG6●●●H30 *[55]*	SCW5●●●H30 *[55]* SCW6●●●H30 *[55]*	SCW15●●●H30 *[55]* SCW16●●●H30 *[55]*	SCA15●●●H30 *[55]* SCA16●●●H30 *[55]*	SCA1●●●H30 *[55]* SCA6●●●H30 *[55]*
	10 15	2	HLL36060 HLL36090	60 90	SDG1●●●H30 *[55]* SDG7●●●H30 *[55]*	SDW1●●●H30 *[55]* SDW7●●●H30 *[55]*	SDW11●●●H30 *[55]* SDW17●●●H30 *[55]*	SDA11●●●H30 *[55]* SDA17●●●H30 *[55]*	SDA1●●●H30 *[55]* SDA7●●●H30 *[55]*
	20 25–30	3	HLL36100 HLL36150	100 150	SEG3●●●H30 SEG5●●●H30	SEW3●●●H30 SEW5●●●H30	SEW13●●●H30 SEW15●●●H30	SEA13●●●H30 SEA15●●●H30	SEA3●●●H30 SEA5●●●H30
	40 50	4	JLL36225 JLL36250	225 250	SFG1●●●H30 SFG4●●●H30	SFW1●●●H30 SFW4●●●H30	SFW11●●●H30 SFW14●●●H30	SFA11●●●H30 SFA14●●●H30	SFA1●●●H30 SFA4●●●H30
	60 75 100	5	JLL36250 LLL36400U33X LLL36600U33X	250 400 600	SGG6●●●H30 SGG4●●●H30 SGG2●●●H30	SGW6●●●H30 SGW4●●●H30 SGW2●●●H30	— — —	SGA16●●●H30 SGA14●●●H30 SGA12●●●H30	SGA6●●●H30 SGA4●●●H30 SGA2●●●H30
	125 150–200	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	— —	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30

NOTE: Some control transformers may require the use of oversized enclosures. Refer to Table 16.150.

Table 16.139: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[56]*	—	V01
120 *[57]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-120. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is provided at no charge.

Dimensions: page 16-59
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

3 or 5 Days Laser Delivery

[52] To order melting alloy overload relay, remove form "H30" from part number.
[53] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[54] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.139.
[55] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[56] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8539SBG1V01S).
[57] These voltage codes must include **Form S** (provided at no charge). When specifying **Form S,** please include the motor voltage when ordering (for example, order as 8539SCG5V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Line Voltage Type

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.140: Class 8539 Line Voltage, Thermal-Magnetic Circuit Breaker Type, Non-Reversing, with Motor Logic SSOLR (replace ●●● with the voltage code) *[58]*

Ratings					NEMA® 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Stainless Steel (304) Enclosure (Sizes 0–5)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[59]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Circuit Breaker		Type *[60]*	Type *[60]*	Type *[60]*	With External Reset	Without External Reset
			Type	Ampere Rating				Type *[60]*	Type *[60]*
460 (480)	5	0	HLL36015	15	SBG1●●●H30 *[61]*	SBW1●●●H30 *[61]*	SBW11●●●H30 *[61]*	SBA11●●●H30 *[61]*	SBA1●●●H30 *[61]*
	7.5 10	1	HLL36025 HLL36030	25 30	SCG3●●●H30 *[61]* SCG7●●●H30 *[61]*	SCW3●●●H30 *[61]* SCW7●●●H30 *[61]*	SCW13●●●H30 *[61]* SCW17●●●H30 *[61]*	SCA13●●●H30 *[61]* SCA17●●●H30 *[61]*	SCA3●●●H30 *[61]* SCA7●●●H30 *[61]*
	15 20 25	2	HLL36045 HLL36060 HLL36070	45 60 70	SDG3●●●H30 *[61]* SDG1●●●H30 *[61]* SDG5●●●H30 *[61]*	SDW3●●●H30 *[61]* SDW1●●●H30 *[61]* SDW5●●●H30 *[61]*	SDW13●●●H30 *[61]* SDW11●●●H30 *[61]* SDW15●●●H30 *[61]*	SDA13●●●H30 *[61]* SDA11●●●H30 *[61]* SDA15●●●H30 *[61]*	SDA3●●●H30 *[61]* SDA1●●●H30 *[61]* SDA5●●●H30 *[61]*
	30 40 50	3	HLL36080 HLL36100 HLL36150	80 100 150	SEG7●●●H30 SEG3●●●H30 SEG5●●●H30	SEW7●●●H30 SEW3●●●H30 SEW5●●●H30	SEW17●●●H30 SEW13●●●H30 SEW15●●●H30	SEA17●●●H30 SEA13●●●H30 SEA15●●●H30	SEA7●●●H30 SEA3●●●H30 SEA5●●●H30
	60 75 100	4	JLL36150 JLL36200 JLL36250	150 200 250	SFG5●●●H30 SFG3●●●H30 SFG4●●●H30	SFW5●●●H30 SFW3●●●H30 SFW4●●●H30	SFW15●●●H30 SFW13●●●H30 SFW14●●●H30	SFA15●●●H30 SFA13●●●H30 SFA14●●●H30	SFA5●●●H30 SFA3●●●H30 SFA4●●●H30
	125–150 200	5	LLL36400U33X LLL36600U33X	400 600	SGG4●●●H30 SGG2●●●H30	SGW4●●●H30 SGW2●●●H30	— —	SGA14●●●H30 SGA12●●●H30	SGA4●●●H30 SGA2●●●H30
	250 300–400	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	— —	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30
575 (600)	5	0	HLL36015	15	SBG1●●●H30 *[61]*	SBW1●●●H30 *[61]*	SBW11●●●H30 *[61]*	SBA11●●●H30 *[61]*	SBA1●●●H30 *[61]*
	7.5 10	1	HLL36020 HLL36025	20 25	SCG8●●●H30 *[61]* SCG3●●●H30 *[61]*	SCW8●●●H30 *[61]* SCW3●●●H30 *[61]*	SCW18●●●H30 *[61]* SCW13●●●H30 *[61]*	SCA18●●●H30 *[61]* SCA13●●●H30 *[61]*	SCA8●●●H30 *[61]* SCA3●●●H30 *[61]*
	15 20 25	2	HLL36035 HLL36045 HLL36060	35 45 60	SDG8●●●H301 SDG3●●●H30 *[61]* SDG1●●●H30 *[61]*	SDW8●●●H301 SDW3●●●H30 *[61]* SDW1●●●H30 *[61]*	SDW18●●●H301 SDW13●●●H30 *[61]* SDW11●●●H30 *[61]*	SDA18●●●H301 SDA13●●●H30 *[61]* SDA11●●●H30 *[61]*	SDA8●●●H301 SDA3●●●H30 *[61]* SDA1●●●H30 *[61]*
	30 40 50	3	HLL36070 HLL36090 HLL36100	70 90 100	SEG4●●●H30 SEG6●●●H30 SEG3●●●H30	SEW4●●●H30 SEW6●●●H30 SEW3●●●H30	SEW14●●●H30 SEW16●●●H30 SEW13●●●H30	SEA14●●●H30 SEA16●●●H30 SEA13●●●H30	SEA4●●●H30 SEA6●●●H30 SEA3●●●H30
	60–75 100	4	JLL36150 JLL36250	150 250	SFG5●●●H30 SFG4●●●H30	SFW5●●●H30 SFW4●●●H30	SFW15●●●H30 SFW14●●●H30	SFA15●●●H30 SFA14●●●H30	SFA5●●●H30 SFA4●●●H30
	125–150 200	5	JLL36250 LLL36400U33X	250 400	SGG6●●●H30 SGG4●●●H30	SGW6●●●H30 SGW4●●●H30	— —	SGA16●●●H30 SGA14●●●H30	SGA6●●●H30 SGA4●●●H30
	250–350 400	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	— —	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30

Table 16.141: Class 8539 Thermal Magnetic Circuit Breaker Type, Single Phase *[62][63]* **with Melting Alloy Overload Relays**

Motor Voltage	Max. Hp	Coil Voltage	NEMA Size	Poles	Circuit Breaker (Type)	Ampere Rating	NEMA 1 General Purpose Enclosure	NEMA 4 & 4X Watertight and Dusttight Stainless Steel (304) Enclosure (Sizes 0–2)	NEMA 4 & 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[59]*= Dusttight and Driptight Industrial Use Enclosure	
										With External Reset	Without External Reset
							Type	Type	Type	Type	Type
120	1 2 3	120	0 1 2	2	HLL26030 HLL26050 HLL26080	30 50 80	SBG72V02 SCG72V02 SDG71V02	SBW72V02 SCW72V02 SDW71V02	SBW75V02 SCW75V02 SDW74V02	SBA75V02 SCA75V02 SDA74V02	SBA72V02 SCA72V02 SDA71V02
240	2 3 7.5	240	0 1 2	2	HLL26025 HLL26035 HLL26080	25 35 80	SBG71V03 SCG71V03 SDG71V03	SBW71V03 SCW71V03 SDW71V03	SBW74V03 SCW74V03 SDW74V03	SBA74V03 SCA74V03 SDA74V03	SBA71V03 SCA71V03 SDA71V03



NOTE: Some control transformers may require the use of oversized enclosures.
Refer to page 16-58.
For How to Order Information, see page 16-28.

[58] To order melting alloy overload relay, remove form "H30" from part number.
[59] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[60] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.139.
[61] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[62] Not included in the Laser™ Delivery program.
[63] Single-phase units require one thermal unit and are not available with Form H●● (solid-state overload relay).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Application Data

Table 16.142: Class 8539—UL Listed Short Circuit Ratings

Motor Circuit Protector Type			
NEMA Size	Enclosure	AIC at 480 Vac (RMS)	AIC at 600 Vac (RMS)
0, 1	Standard*[64]*	100,000	35,000
2 thru 5	Standard*[64]*	100,000	50,000
6	Standard*[64]*	65,000	18,000

Table 16.143: Electronic Motor Circuit Protector (MCP) Selection by HP Ratings of Induction-type Squirrel-Cage Motors

3Ø, 60 Hz Voltages				Full-Load (A)	Suffix
200 Vac	230 Vac	460 Vac	575 Vac		
.5–5	.5–7.5	.75–15	1–20	1.5–25	M71
5–10	5–15	10–30	15–40	14–42	M72
10–25	15–30	25–60	30–75	30–80	M73
20–40	25–50	50–100	60–125	58–130	M74
40–60	50–75	100–150	125–200	114–217	M75

NOTE: The MCP adjustable trip range is determined by the suffix of the circuit breaker catalog number. This table indicates the trip range which corresponds to a given suffix number. The MCP motor circuit protector should be adjusted to a level just above locked-rotor current of the motor. This setting will provide optimum overcurrent protection for the motor. For more information on MCP instantaneous-trip circuit breakers, refer to the MCP circuit breaker section of this catalog.

Table 16.144: Class 8539, UL Listed Short Circuit Ratings

Thermal Magnetic Circuit Breaker Type			
NEMA Size	Enclosure	AIC at 480 Vac (RMS)	AIC at 600 Vac (RMS)
0, 1	Standard *[64]*	100,000	35,000
2 thru 5	Standard *[64]*	100,000	50,000
6	Standard *[64]*	65,000	18,000

Table 16.145: Class 8538—UL Listed Short Circuit Ratings

NEMA Size	NEMA Fuse Class	Enclosure	Available Amperes RMS Symmetrical
0–3	Class H or K	Standard *[65]*	5,000
0–3	Class R/J	Standard*[65]*	100,000
0–2	Class H or K	Oversize	5,000
0–2	Class R/J	Standard	100,000
4–5	Class H or K	Standard *[65]*	10,000
4–5	Class R/J	Standard *[65]*	100,000
6	Class H or K	Standard *[65]*	18,000
6	Class R/J	Standard*[65]*	100,000

Table 16.146: 2: Motor Code Letter Table

Horsepower	Motor Code Letters
1/2 or less	A-L
3/4–1-1/2	A-K
2–3	A-J
5–25	A-H
30–125	A-G
150 or more	A-F

NOTE: The combination starter selection tables on page 16-52 to page 16-54 are suitable for motors with locked-rotor current letters according to NEC Table 430-7(b) as listed in Table 16.146. For other motors, a special thermal-magnetic circuit breaker with adjustable magnetic trip settings for the specific motor is required. When ordering for these special applications, specify the motor horsepower, voltage, frequency, full-load current, and code letter (or locked rotor current) to help ensure proper protection.

Table 16.147: Terminals

NEMA Size	Type	Line Terminals on Disconnect			Power Terminals On Magnetic Starter			Control Terminals On Magnetic Starter		
		Type of Lug	Wire Range		Type of Lug	Wire Range	Wires Per Terminal	Type of Lug	Wire Range	Wires Per Terminal
			Switch	Circuit Breaker						
0 & 1	SB & SC	Box Lug	14–1/0 Cu/Al	(1) 14-3/0 Al or Cu	Pressure Wire	14–8 Cu	1 or 2	Pressure Wire	16–12 Cu	2
2	SD	Box Lug	14–1/0 Cu/Al	(1) 14-3/0 Al or Cu	Box Lug	14–4 Cu	1	Pressure Wire	16–12 Cu	2
3	SE	Box Lug	14–1/0 Cu/Al	(1) 14-3/0 Al or Cu	Box Lug	14–0 Cu	1	Pressure Wire	16–12 Cu	2
4	SF	Box Lug	6–300 MCM Cu/Al	(1) 4-4/0 Al or Cu (JLL Breaker 150 A - 175 A) (1) 3/0 - 350 MCM Al or Cu (JLL Breaker 200 A - 250 A)	Box Lug	8–250 MCM Cu	1	Pressure Wire	16–12 Cu	2
5	SG	Box Lug	One 4–500 MCM Cu	(1) 2 - 500 MCM Al or (1) 2 - 350 MCM Cu (DJL36400 Breaker) (2) 2/0 - 500 MCM Al or (2) 2/0 - 350 MCM Cu (DLL36600 Breaker) (1) 3/0 - 350 MCM Al or (1) 3/0 - 350 MCM Cu (JLL36250 Breaker)	Box Lug	4–500 MCM Cu	1	Pressure Wire	16–12 Cu	2
6	SH	Box Lug	—	(2) 2/0 - 500 MCM Al or (2) 2/0 - 350 MCM Cu (DJL36600 Breaker, DLL Breaker) (1) 2 - 600 MCM Al or (1) 2 - 350 MCM Cu (DJL36400 Breaker) (3) 3/0 - 500 MCM Al or (3) 3/0 - 350 MCM Cu (MJL36800 Breaker) (3) 3/0 - 500 MCM Al or (3) 3/0 - 350 MCM Cu (PLL34080M68 Breaker)	Parallel Groove	250–500 MCM Cu *[66]*	1 or 2	Pressure Wire	16–12 Cu *[67]*	2

[64] Standard enclosure includes: NEMA 1 and 4X stainless, and 12/3R.
[65] Standard enclosure includes non-oversize NEMA 1 and 4X stainless, and 12.
[66] Order Class 9999 Type SCU6 parts kit to convert power terminals to accept sizes 2/0–300 MCM wire.
[67] Terminal block range limited to 16–14.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Accessories—Interlocks and Control Transformers

A one or twopole electrical interlock can be added to the disconnect switch or circuit breaker. So if a separate control circuit is used, the magnetic starter can be de-energized when the disconnect is switched to the Off position. See Table 16.148 for proper interlock selection.

For electrical ratings of disconnect and circuit breaker interlocks, see Table 16.149.

An electrical interlock may also be factory installed in either a disconnect switch or circuit breaker combination starter. Specify **Form Y74** for single-pole or **Form Y75** for two-pole interlocks.

Table 16.148: Disconnect Switch and Breaker Interlocks

Class	Type	SPDT (Y74)	DPDT (Y75)
		Class 9999 Type	Class 9999 Type
8538 *[68]*	SB, SC, SD (Series B)	R6	R7
8538, 8738	SD (Series C)	R43	R44
	SB, SC (Series C)	R45	R46
	SE, SF (Series A)	R8	R9
	SE (Series B & C)	R41	R42
	SF (Series B & C)	R39	R40
	SG	R35	R36
8539, 8739	SB, SC, SD, SE, SF, SG (Series K)	R26	R27
8538	SBA, SCA, SBG, SCG (Series D and above)	TC11	TC21
8538	SBAS8, SCAS8, SBGS8, SCGS8 (Series D and above)	TC10	TC20
8738	SBAS8, SCAS8, SBGS8, SCGS8 (Series E and above)	TC10	TC20
8738	SBA, SCA, SBG, SCG (Series E and above)	TC11	TC21
8538	SDA, SDA*[68]*, SDG, SDG*[68]* (Series D and above)	TC10	TC20
8738	SDA, SDG (Series E and above)	TC10	TC20
8538, 8738	SEA, SEG (Series D and above)	TC10	TC20

Table 16.149: Disconnect Switch and Breaker Interlock Electrical Ratings

Class 9999 Type R6, 8, 26, 35, 39, 41, 43, 45, TC10, & TC11				Class 9999 Type R7, 9, 27, 36, 40, 42, 44, 46 & TC 20, 21					
AC—50 or 60 Hz				AC—50 or 60 Hz					
Volts	Maximum Current			Volts	Maximum Current				
	Make	Break	Continuous Carrying Current		Make		Break		Continuous Carrying Current
	(A)	(A)	(A)		(A)	VA	(A)	VA	(A)
120	40	15	15	120	30	3450	3	345	10
240	20	10	15	240	15	3450	1.5	345	10
480	10	6	15	480	7.5	3450	0.75	345	10
600	8	5	15	600	6	3450	0.6	345	10

Table 16.150: Control Transformer Selection

NEMA Size	Starter Type	Standard Capacity (Form FF4T)	Additional Capacity		
			50 VA (Form FF4T10)	100 VA (Form FF4T11)	200 VA (Form FF4T12)
		Class 9070 Type *[69]*			
0, 1	SB & SC	TF100	TF150	TF200	TF300 *[70][71]*
2	SD	TF100	TF150	TF200	TF300
3	SE	TF150	TF200	TF300	TF500
4	SF	TF300	TF300	TF500	T500
5	SG	TF100 and 8501XO20	TF100 and 8501XO20	TF150 and 8501XO20	TF300 and 8501XO20
6	SH	EO3S2 is standard	N/A	EO3FS2 and T100	EO3S2 and TF200

NOTE: 9070TF transformers are now standard in Series K combination starters.

Internal Auxiliary Switch—Circuit breakers can be supplied with a factory installed auxiliary switch for remote indication of an open and/or tripped or a closed breaker. One (specify **Form Y741**) or two (specify **Form Y751**) auxiliary switches can be supplied. The switches are supplied with normally open and normally closed circuits with a common connection. Contacts must be used on the same polarity and are rated 15 A at 240 Vac. The auxiliary switches are located internally and are furnished with 19-20 inch long leads.

Alarm Switch—The alarm switch only operates when the breaker is tripped. It is used to actuate bell alarms and warning lights. The alarm switch is factory installed only (specify **Form Y742**) and consists of a single pole single throw switch which is normally open except when the breaker is tripped. The contacts are rated 4 A at 240 Vac. This switch is located in the breaker and is supplied with 19-20 inch long leads.

Transformer Selection—Space and drilling are provided in all disconnect switch and circuit breaker combination starters in NEMA® 1 and 4X stainless and polyester for the field addition (or factory installation) of a Class 9070 control circuit transformer and Class 9999 Type SFR4 fuse holder. This kit can be either panel mounted or side mounted on the Type S starter. For standard control transformer selection in combination starters, see Table 16.150. For secondary fuse holder, order 9080PF1.

Fuse Block Mounting Brackets—The standard capacity transformer, Class 9070 Type T100, for the Size 0 and 1 starters mounts to the right of the magnetic starter.

Standards—Most combination starters and forms are UL Listed in file E152395, Category NKJH, and CSA File CR 584.

[68] Class 8538 type numbers ending in suffix **S8**.
[69] Complete the contactor or starter Class and Type with the voltage code. See the transformer section of the current *Digest* for information.
[70] Requires oversized enclosure. (Size 2 reversing enclosure.)
[71] Available in standard enclosure with Mag-Gard™ circuit-breaker and non-fusible disconnect switch. Requires oversized enclosure with thermal-magnetic circuit-breakers and fusible disconnect switches. (Size 2 reversing enclosure.)

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Approximate Dimensions

Table 16.151: See Figure: NEMA 1 Enclosure, Sizes 0–2

NEMA Size	Class	Type	Dimensions, in. *[72]*																Top & Bottom		Sides	Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
0–1	8538	SBG , SCG	9.5	22.5	8.34	6.38	20.5	14.66	1.81	1.69	3	2.31	1.06	3.25	2.19	1.25	0.88	—	0.5–0.75	0.5–0.75	0.5	38
	8539	SBG, SCG	9.5	22.5	9.84	6.38	20.5	14.66	1.81	1.69	3	2.31	1.06	3.25	2.19	1.25	0.88	—	0.5–0.75	0.5–0.75	0.5	38
2	8538, 8539	SDG	10.5	26	9.59	7.38	24	16.91	2.13	2	4	2.31	1.06	3.25	2.19	1.25	0.88	—	1–1.25	0.5–0.75	0.5	54

Table 16.152: See Figure: NEMA 1 Enclosure, Sizes 3–6

NEMA Size	Class	Type	Dimensions, in. *[72]*																Top & Bottom		Sides	Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
3 *[73]*	8538, 8539	SEG	15.25	42	10.59	9.25	3	22.72	41	0.5	—	2.83	3.53	5	2.69	5.38	1.28	0.91	1–1.25 2–2.5	0.5–0.75	0.5	102
4	8538	SFG	16	52.5	10.53	10	3	23.66	51.5	0.5	—	2.83	3.53	5	2.69	5.38	1.28	0.91	2.5	0.5–0.75	0.5	163
	8539	SFG	16	52.5	10.53	10	3	23.66	51.5	0.5	—	2.83	3.53	5	2.69	5.38	1.28	0.91	2.5	0.5–0.75	0.5	163
5	8538	SGG	20	78	15.5	12	4	29.41	77	0.5	—	3.52	4.61	9.25	3.19	—	—	—	0.5–0.75 *[74]*	3	—	450
	8539	SGG	20	66	13.72	12	4	29.41	65	0.5	—	3.52	4.61	5	3.19	—	—	—	0.5–0.75	3	—	420
6 *[75]*	8538, 8539	SHG	36	90	21.03	—	—	41.38	—	—	—	—	—	5	—	—	—	—	—	—	—	—

Table 16.153: See Figure: NEMA 12/3R Enclosure

NEMA Size	Class	Type	Dimensions, in. *[76]*										Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	
0–1	8538	SBA SCA	9.5	8.34	24	3.25	2.5	4.5	23.5	0.59	4.44	14.31	40
	8539	SBA SCA	9.5	9.84	24	3.25	2.5	4.5	23.5	0.59	4.44	14.31	40
2	8538, 8539	SDA	10.5	9.59	27.75	3.25	2.5	5.5	27	0.38	4.13	16.56	55
3 *[73]*	8538, 8539	SEA	15.25	10.59	42	5	3	9.25	41	0.5	5.06	22.31	111
4	8538	SFA	16	10.53	52.5	5	3	10	51.5	0.5	4.19	22.97	170
	8539	SFA	16	10.53	52.5	5	3	10	51.5	0.5	5.19	22.97	170
5	8538	SGA	20	13.72	78	9.25	4	12	77	0.5	7.78	29.41	—
	8539	SGA	20	13.72	66	5	4	12	65	0.5	7.78	27.41	440
6 *[75]*	8538, 8539	SHA	36	17	90	5	—	—	—	—	—	47.38	—

Table 16.154: See Figure: NEMA 4X Stainless Steel Enclosure

NEMA Size	Class	Type	Dimensions, in. *[72]*											Bottom	Top & Bot.	Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	W	X	
0–1	8538	SBW SCW	9.5	8.34	24.06	3.25	2.5	4.5	23.5	0.59	3.03	1.31	2.31	14.28	0.75 Hub	1 Hub	40
	8539	SBW SCW	9.5	9.84	24.06	3.25	2.5	4.5	23.5	0.59	3.03	1.31	2.31	14.28	0.75 Hub	1 Hub	40
2	8538, 8539	SDW	10.5	9.59	27.75	3.25	2.5	5.5	27	0.59	3	2	2.63	16.53	0.75 Hub	1.5 Hub	55
3 *[73]*	8538, 8539	SEW	15.25	10.59	42	5	3.19	10.25	40.5	0.59	3	2.56	3.19	22.19	0.75 Hub	2.5 Hub	111
4	8538	SFW	16	10.53	52.5	5	3.56	11	51	0.59	3	2.56	3.19	22.47	0.75 Hub	2.5 Hub	158
	8539	SFW	16	10.53	52.5	3.25	2.5	11	51	0.59	3	2.56	3.19	22.47	0.75 Hub	2.5 Hub	120
5	8538	SGW	20	13.72	78	9.25	4	12	77	0.56	4.5	3	3.5	29.41	0.75 Hub	3.5 Hub	—
	8539	SGW	20	13.72	66	5	4	12	65	0.56	4.5	3	3.5	29.41	0.75 Hub	3.5 Hub	440
6 *[75]*	8538, 8539	SHW	36	17	90	—	—	—	—	—	—	—	—	47.88	—	—	—

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

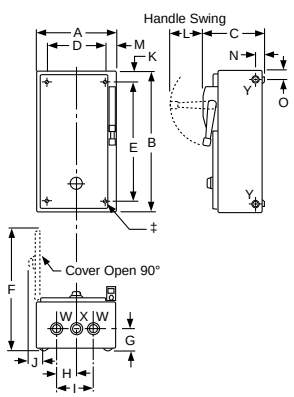


Figure 16.4: NEMA 1 Enclosure, Size 0–2

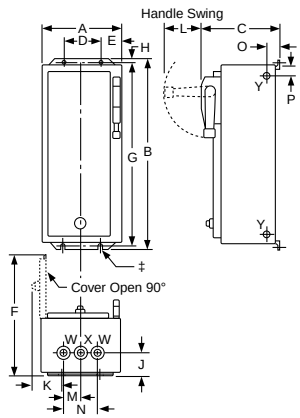


Figure 16.5: NEMA 1 Enclosure, Size 3–6

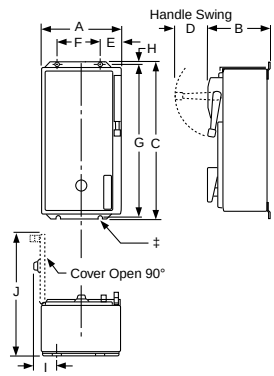


Figure 16.6: NEMA 12 Enclosure

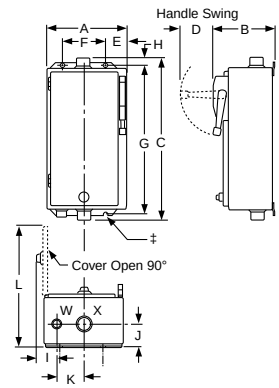


Figure 16.7: NEMA 4X Stainless Steel Enclosure

‡ = 4 mounting holes: 0.31 in. (8 mm) dia. for Sizes 0, 1, and 2; 0.44 in. (11 mm) dia. for Sizes 3 and 4; 0.56 in. (14 mm) dia., located on external flanges, for Size 5.

NOTE: Illustrations may not represent the actual enclosure. They are intended for dimensional information only.

[72] Dimensions also for **Form FF4T** (standard control transformer). **Form FF4T11** (100 VA extra capacity) and **Form FF4T12** (200 VA extra capacity) could require the use of an oversized enclosure. Refer to Table 16.150.
[73] Class 8538 Size 3 devices with 200 A fuse clips use dimensions for Class 8538 Size 4.
[74] Left side only.
[75] Size 6 enclosures are floor mounting.
[76] Dimensions include space for control circuit transformers.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025




Figure 16.8: NEMA 4X Polyester Enclosure




Figure 16.9: Class 8538 and 8539 in Oversize Enclosures—NEMA 1 and 4X Stainless, and 12/3R

Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.155: See Figure: NEMA 4X Polyester Enclosure, page 16-60 *[77]*

NEMA Size	Class	Dimensions, in.					
		Type	A	B	C	E	F
0, 1	8538	SBW	13.72	11.4	26.94	6.25	25.75
0, 1	8539	SCW SDW					
0, 1, & 2	8738, 8739	SBW	25.25	11.4	27.00	17.88	25.75
2	8538, 8539	SCW SDW					
3–4	8538, 8738 8539, 8739	SEW SFW *[78]*	26.31	11.4	33.50	18.50	32.25

Table 16.156: See Figure: Class 8538 and 8539 in Oversize Enclosures—NEMA 1 and 4X Stainless, and 12/3R, page 16-60

NEMA Size	NEMA Type Encl.	Dimensions, in.					
		Wide A	High B	Deep C	Handle L	Mounting	
						D	E
0–2	1	15	28.33	9.59	3.25	11.625	26.25
	4	15	30.03	9.59	3.25	10	29.75
	12	15	31	10.97	3.25	9	30.25

Information on Hubs

Hubs are supplied with each NEMA Type 4X combination starter as shown in Table 16.157.

Note that hubs are only installed in stainless steel enclosures; they are not installed in polyester enclosures.

Table 16.157: Hub Sizes

NEMA Size	Quantity	Hub Size (in.)
0 and 1	1 2	0.75 1.00
2	1 2	0.75 1.50
3 and 4	1 2	0.75 2.50

NOTE: Illustrations may not represent the actual enclosure—they are intended for dimensional information only.

Table 16.158: Conduit Sizes LOC A, B, C and D

NEMA Size	Standard
0–1	1.25
2	1.5
3–4	2.5
5	4

[77] Dimensions also for **Form F4T** (standard control transformer) and **Form F4T10** (50 VA additional capacity). Other control transformers may require the use of oversized enclosures. Refer to Table 16.150.

[78] 8539 Size 4 only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



NEMA 00, 0, and 1
Reversing Contactor

General Information

Class 8702 Type S reversing magnetic contactors are used for starting, stopping, and reversing AC motors where overload protection is separately provided. Class 8702 reversing contactors consist of two Class 8502 contactors mechanically and electrically interlocked. Open type devices, Sizes 0–5, are available in either horizontal or vertical arrangements. Sizes 00 and 6 are available as horizontal only. Enclosed devices, Size 00–6, use horizontally arranged components. Type S reversing contactors are designed for operation at up to 600 Vac, 50/60 Hz.

NOTE: In Table 16.159, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.160.

For information on field modification of NEMA 12 enclosures, see page 16-114 .

Table 16.159: 600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Type		NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure (Sizes 0–5)*[1] [2]*	NEMA 12/3R*[3]* Dusttight & Driptight Industrial Use Enclosure
				Vertical Type	Horizontal Type	Type	Type	Type
00	9	200	1.5	—	SAO4●●●	SAG4●●●	Use Size 0	Use Size 0
		230	1.5					
		460	2					
		575	2					
0	18	200	3	SBO12●●●	SBO4●●●	SBG4●●●	SBW14●●●	SBA4●●●
		230	3					
		460	5					
		575	5					
1	27	200	7.5	SCO7●●●	SCO8●●●	SCG8●●●	SCW14●●●	SCA4●●●
		230	7.5					
		460	10					
		575	10					
2	45	200	10	SDO1●●●	SDO2●●●	SDG2●●●	SDW11●●●	SDA1●●●
		230	15					
		460	25					
		575	25					
3	90	200	25	SEO1●●●	SEO2●●●	SEG2●●●	SEW11●●●	SEA1●●●
		230	30					
		460	50					
		575	50					
4	135	200	40	SFO1●●●	SFO3●●●	SFG3●●●	SFW11●●●	SFA1●●●
		230	50					
		460	100					
		575	100					
5	270	200	75	SGO1●●●	SGO3●●●	SGG3●●●	SGW11●●●	SGA1●●●
		230	100					
		460	200					
		575	200					
6	540	200	150	—	SHO1●●●	SHG1●●●	—	SHA1●●●
		230	200					
		460	400					
		575	400					

Table 16.160: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24*[4]*	—	V01
120 *[5]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page page 16-119. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-65
Factory Modifications (Forms) page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[1] NEMA 4X stainless steel enclosures (sizes 0–5) have a brushed finish.
[2] NEMA 4X stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.
[3] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[4] 24 V coils are not available on Sizes 4-6. On Sizes 00-3, where 24 V coils are available, **Form S** (separate control) can be specified (i.e., order as 8702SAO4V01S).
[5] This voltage code can include **Form S** for separate control (provided at no charge) (for example, order as 8702SAO4V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Single-Phase and 4–Pole Polyphase

NOTE: In Table 16.161, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.160.

For information on field modification of NEMA 12 enclosures, see page 16-114 .

Table 16.161: 600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Type of Motor	Open Type		NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure	NEMA 12/3R*[6]* Dusttight & Driptight Industrial Use Enclosure
					Vertical Type	Horizontal Type	Type	Type	Type
2-Pole Single Phase									
00	9	115 230	1/3 1	Single Phase 3-Wire	—	SAO1●●●	SAG1●●●	Use Size 0	Use Size 0
0	18	115 230	1 2		SBO9●●●	SBO1●●●	SBG1●●●	SBW11●●●	SBA1●●●
1	27	115 230	2 3		SCO1●●●	SCO2●●●	SCG2●●●	SCW11●●●	SCA1●●●
3-Pole Single Phase									
00	9	115 230	1/3 1	4-Wire Rep.-Ind.	—	SAO2●●●	SAG2●●●	Use Size 0	Use Size 0
		115 230	1/3 1	4-Wire Split Ph.	—	SAO3●●●	SAG3●●●	Use Size 0	Use Size 0
0	18	115 230	1 2	4-Wire Rep.-Ind.	SBO10●●●	SBO2●●●	SBG2●●●	SBW12●●●	SBA2●●●
		115 230	1 2	4-Wire Split Ph.	SBO11●●●	SBO3●●●	SBG3●●●	SBW13●●●	SBA3●●●
1	27	115 230	2 3	4-Wire Rep.Ind.	SCO3●●●	SCO4●●●	SCG4●●●	SCW12●●●	SCA2●●●
		115 230	2 3	4-Wire Split Ph.	SCO5●●●	SCO6●●●	SCG6●●●	SCW13●●●	SCA3●●●
4-Pole Polyphase									
0	18	200 230 460 575	3 3 5 5	2 Phase 4-Wire	SBO13●●●	SBO5●●●	SBG5●●●	SBW15●●●	SBA5●●●
1	27	200 230 460 575	7.5 7.5 10 10		SCO9●●●	SCO10●●●	SCG10●●●	SCW15●●●	SCA5●●●
2	45	200 230 460 575	10 15 25 25		—	SDO4●●●	SDG4●●●	SDW12●●●	SDA2●●●
3	90	200 230 460 575	25 30 50 50		—	SEO4●●●	SEG4●●●	SEW12●●●	SEA2●●●
4	135	200 230 460 575	40 50 100 100		—	SFO4●●●	SFG4●●●	SFW12●●●	SFA2●●●

Auxiliary Units

Table 16.162 shows the maximum number of auxiliary units **(in addition to the holding circuit and interlocking contacts)** that can be added to either the forward or reverse contactor or starter.

Table 16.162: Auxiliary Units—Class 8702, 8736, and 8810

NEMA Size (Type)	No. of Poles—Basic Contactor	Maximum number of auxiliary units on each contactor, forward or reverse (in addition to internal holding circuit and interlocking contacts)
00 (SA)	2–3	2 single circuit auxiliary contacts (N.O. or N.C.)
0–2 (SB–SD)	2–3	4 single circuit auxiliary contacts (N.O. or N.C.) *[7]*
	4	2 single circuit auxiliary contacts (N.O. or N.C.)
3–6 (SE–SJ)	Any	2 single circuit auxiliary contacts (N.O. or N.C.)

Dimensions: page 16-65
Factory Modifications (Forms): page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128
For How to Order Information, see page 16-28.

[6] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[7] When adding 4 external auxiliary contacts to one Size 0 or 1 contactor, remove one of the return springs.


© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Introduction and Overload Relays

NEMA Sizes 00, 0, 1 Reversing Starter



Horizontal Type



Vertical Type

Class 8736 Type S reversing magnetic starters are used for full-voltage starting, stopping, and reversing AC squirrel cage motors. Class 8736 starters consist of one Class 8502 contactor and one Class 8536 starter mechanically and electrically interlocked. Open type devices, Sizes 0–5, are available in either horizontal or vertical arrangements. Sizes 00 and 6 are available as horizontal only. Enclosed devices use horizontally arranged components. Type S starters are designed for operation at up to 600 Vac, 50/60 Hz.
For How to Order Information, see page 16-28

Motor Logic™ Solid-State Overload Relay (SSOLR) Protection
These ambient insensitive overload relays are available on three phase sizes 00 through 6. They provide phase loss, phase unbalance protection. To order, add Form **H30** (for selectable trip class 10 or 20 protection). For more information about Motor Logic solid-state overload relays (SSOLRs), see pages page 16-103 and page 16-121. (Catalog no. example: 8736SCO8V06H30)

New! **Adapted Bimetallic or Solid-State Overload Relay (NEMA Sizes 00–1)**
The Adapted Bimetallic or Solid-State starter includes a specially designed adapter that attaches with bus bars to the Type S NEMA contactor. This adapter allows direct mounting of the IEC Style bimetallic (LRD or LR3D) or solid-state (LR9D) overload relay (OLR). To order this starter configuration, add **Form E** (adapter only) to the standard catalog number. The LRD, LR3D, or LR9D OLR must be purchased separately, based on the FLA of the motor, and installed in the field to properly operate the starter. For the Adapted Bimetallic device only, if the FLA is known at the time of purchase, you can order the starter with the OLR installed. For more information and a list of options, see Adapted Bimetallic Overload Relay Forms, page 16-121. (Catalog no. example: 8736SCO8V06E—without OLR)

New! **TeSys™ T Motor Management System (NEMA Sizes 1–6)**
TeSys™ T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T can predict what will happen in the process, as it accurately monitors current, voltage, and power over a wide range. For additional information about the TeSys T Motor Management System, see page 16-105 (for example, 8736SCO8V06**H616**).

Melting Alloy Overload Relays
Melting alloy type thermal overload blocks are installed as part of the starter, and thermal elements must be selected and installed separately in order to operate the starter. For a three-phase motor, three thermal units must be ordered using the tables beginning under page 16-136. The catalog number includes no Form number (for example, 8736SCO8V06).

Type S Reversing Starters, 3–Pole Polyphase

NOTE: In Table 16.163, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.165. For information on field modification of NEMA 12 enclosures, see page 16-114. For Form H30•, special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection are available for certain sizes. See Solid-State Overload Relay Forms, page 16-121 for more information.

Table 16.163: 3–Pole Polyphase, 600 Vac Maximum, 50–60 Hz, with Motor Logic™ SSOLR *[8]*

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Open Style		NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure*[9]*	NEMA 12/3R *[10]* Dusttight, Driptight Industrial Use Enclosure
				Vertical	Horizontal			
				Type	Type	Type	Type	Type
00	9	200	1.5	—	SAO16●●●H30	SAG16●●●H30	Use Size 0	Use Size 0
		230	1.5					
		460	2					
		575	2					
0	18	200	3	SBO10●●●H30	SBO4●●●H30	SBG4●●●H30	SBW14●●●H30	SBA4●●●H30
		230	3					
		460	5					
		575	5					
1	27	200	7.5	SCO7●●●H30	SCO8●●●H30	SCG8●●●H30	SCW14●●●H30	SCA4●●●H30
		230	7.5					
		460	10					
		575	10					
2	45	200	10	SDO1●●●H30	SDO2●●●H30	SDG2●●●H30	SDW11●●●H30	SDA1●●●H30
		230	15					
		460	25					
		575	25					
3	90	200	25	SEO1●●●H30	SEO2●●●H30	SEG2●●●H30	SEW11●●●H30	SEA1●●●H30
		230	30					
		460	50					
		575	50					
4	135	200	40	SFO1●●●H30	SFO3●●●H30	SFG3●●●H30	SFW11●●●H30	SFA1●●●H30
		230	50					
		460	100					
		575	100					
5	270	200	75	SGO1●●●H30	SGO3●●●H30	SGG3●●●H30	SGW11●●●H30	SGA1●●●H30
		230	100					
		460	200					
		575	200					
6	540	200	150	—	SHO1●●●H30	SHG1●●●H30	—	SHA1●●●H30
		230	200					
		460	400					
		575	400					

[8] To order melting alloy overload relay, remove form "H30" from part number.
[9] NEMA 4X stainless steel enclosures are shipped with hubs installed in the top and bottom of the enclosure.
[10] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Type S, 2- and 3-Pole Single Phase, 4-Pole Polyphase

Devices require melting alloy thermal units, page 16-135.

NOTE: In Table 16.164, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.165.

For information on field modification of NEMA 12 enclosures, see page 16-114 .

Table 16.164: 2- and 3-Pole Single Phase, 4-Pole Polyphase, 600 Vac Maximum—50–60 Hz

NEMA Size	Continuous Current Ratings	Motor Voltage	Max. Hp	Type of Motor	Open Type		NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure	NEMA 12/3R*[11]* Dusttight, Driptight Industrial Use Enclosure
					Vertical Type	Horizontal Type	Type	Type	Type
2-Pole Single Phase—1 Thermal Unit Required									
00	9	115 230	1/3 1	Single Phase 3-Wire	—	SAO13●●●	SAG13●●●	Use Size 0	Use Size 0
0	18	115 230	1 2		SBO7●●●	SBO1●●●	SBG1●●●	SBW11●●●	SBA1●●●
1	27	115 230	2 3		SCO1●●●	SCO2●●●	SCG2●●●	SCW11●●●	SCA1●●●
3-Pole Single Phase—1 Thermal Unit Required									
00	9	115 230	1/3 1	4-Wire Rep.-Ind.	—	SAO14●●●	SAG14●●●	Use Size 0	Use Size 0
		115 230	1/3 1	4-Wire Split Ph.	—	SAO15●●●	SAG15●●●	Use Size 0	Use Size 0
0	18	115 230	1 2	4-Wire Rep.-Ind.	SBO8●●●	SBO2●●●	SBG2●●●	SBW12●●●	SBA2●●●
		115 230	1 2	4-Wire Split Ph.	SBO9●●●	SBO3●●●	SBG3●●●	SBW13●●●	SBA3●●●
1	27	115 230	2 3	4-Wire Rep.-Ind.	SCO3●●●	SCO4●●●	SCG4●●●	SCW12●●●	SCA2●●●
		115 230	2 3	4-Wire Split Ph.	SCO5●●●	SCO6●●●	SCG6●●●	SCW13●●●	SCA3●●●
4-Pole Polyphase—2 Thermal Units Required									
0	18	200 230 460 575	3 3 5 5	2 Phase 4-Wire	SBO11●●●	SBO5●●●	SBG5●●●	SBW15●●●	SBA5●●●
1	27	200 230 460 575	7.5 7.5 10 10		SCO9●●●	SCO10●●●	SCG10●●●	SCW15●●●	SCA5●●●
2	45	200 230 460 575	10 15 25 25		—	SDO4●●●	SDG4●●●	SDW12●●●	SDA2●●●
3	90	200 230 460 575	25 30 50 50		—	SEO4●●●	SEG4●●●	SEW12●●●	SEA2●●●
4	135	200 230 460 575	40 50 100 100		—	SFO4●●●	SFG4●●●	SFW12●●●	SFA2●●●

Table 16.165: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24*[12]*	—	V01
120*[13]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page page 16-119. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is supplied at no charge.

Dimensions: page 16-65
Factory Modifications (Forms) page 16-118
Separate Enclosures (Class 9991): page 16-112
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[11] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[12] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8736SCO1V01S).
[13] This voltage code can include **Form S** for separate control (provided at no charge) (for example, order as 8736SBO7V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Open and NEMA® 1 Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.166: Open Style, 2 or 3-Pole Only (Mounting: H = Horizontal; V = Vertical)
See Figures: Class 8702 Contactor, Open Type and Class 8736 Starter, Open Type

NEMA Size	Type	Mtg.	Fig. No.	Dimensions, in.													Wt. (lb)
				A	B	C	D	E	F	G	H	I	J	K	L	M	
Class 8702 Contactors																	
00	SAO	H	1	7.13	5	5.31	—	—	3.41	0.47	4.34	0.19	5.5	0.91	—	—	12
0, 1	SBO, SCO	H V	1 1*[14]*	7.13 5.47	5 9.22	5.31 5.31	— 5.5	— 0.22	3.41 —	0.47 0.61	4.34 8	0.19 0.61	5.5 5.03	0.91 0.22	— —	— —	12 12
2	SDO	H V	1 1*[14]*	9 6.75	6.88 11.38	6.03 6.03	— 6.25	— 0.25	4.5 —	0.38 0.5	5.63 10.38	0.25 0.5	6 0.25	1.5 0.25	— —	— —	16 16
3	SEO	H V	1 1*[14]*	12.72 7.20	7.97 19	7 7	11.75 6.25	0.48 0.48	—	0.48 1.02	7 17	0.48 0.98	11.75 6.25	0.48 0.48	— —	— —	35 35
4	SFO	H V	1 1*[14]*	14.25 7.97	11.69 23.91	7 7	13.25 7	0.5 0.48	—	0.5 1.81	8 20.25	1.84 1.19	13.25 7	0.5 0.48	— —	— —	45 45
5	SGO	H V	1 1*[14]*	19.31 10.75	16.19 34.41	9.38 9.38	18 9.5	0.66 0.63	—	1.03 1.25	14 32	1.16 1.16	18 9.5	0.66 0.63	— —	— —	98 98
6	SHO	H	1	22.38	28.05	9.52	18	0.63	—	3.83	21.19	3.03	18	0.77	—	—	195
Class 8736 Starters																	
00	SAO		2	7.13	6.91	5.31	—	—	3.41	0.47	4.34	6.22	4.53	5.06	0.66	—	13
0, 1	SBO, SCO	H V	2 2*[14]*	7.13 5.47	6.91 11.52	5.31 5.31	— 5.03	— 0.22	3.41 —	0.47 0.61	4.34 8	6.22 10.70	4.53 2.52	5.06 5.06	0.66 0.22	— 5.03	13 13
2	SDO	H V	2 2*[14]*	9 6.75	8.5 13.48	6.03 6.03	— 6.25	— 0.25	4.5 —	0.38 0.78	5.63 10.38	7.5 12.97	5 3.13	5.16 5.16	1.5 0.25	— 6	18 18
3	SEO	H V	2 2*[14]*	12.72 7.31	11.72 22.25	7 7	11.75 6.25	0.48 0.48	—	0.48 1.02	10.75 20.75	10.75 —	11.75 6.25	6.25 6.25	0.48 0.48	11.75 6.25	38 38
4	SFO	H V	2 2*[14]*	14.25 7.97	14.59 26.81	7 7	13.25 7	0.5 0.48	—	1.84 1.84	12.25 24.5	12.25 —	13.25 4.05	6.25 6.25	0.5 0.48	13.25 7	48 48
5	SGO	H V	2 2*[14]*	19.31 10.75	20.91 39.16	9.38 9.38	18 9.5	0.66 0.66	—	1.28 1.28	19 37.25	19 37.25	18 9.5	6.63 6.63	0.63 0.63	18 9.5	115 115
6	SHO	H	2	22.38	28.05	9.52	18	0.69	—	3.83	21.19	3.03	18	0.77	—	—	200

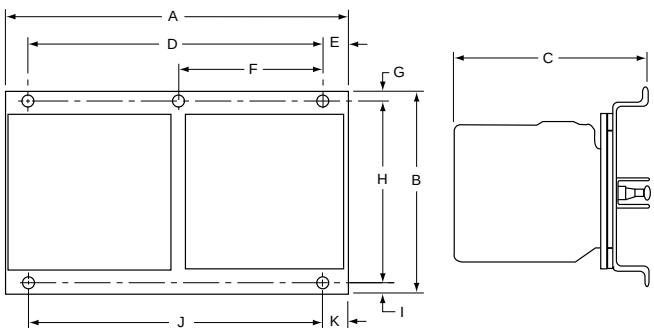


Figure 16.10: Class 8702 Contactor, Open Type

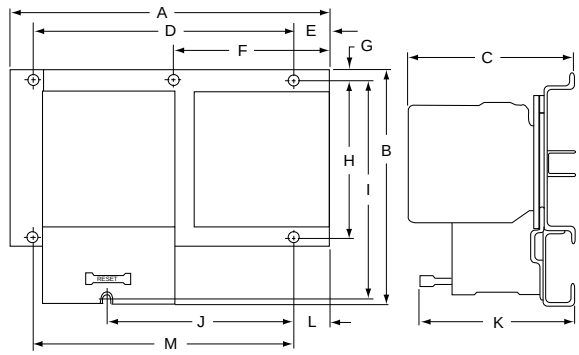


Figure 16.11: Class 8736 Starter, Open Type

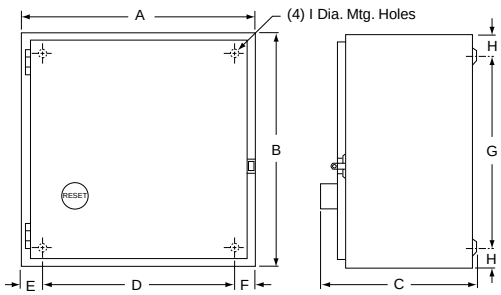


Figure 16.12: NEMA 1

Table 16.167: NEMA 1, Class 8702 and 8736 (see Figure: NEMA 1)

NEMA Size	Dimensions—in.										Weight (lb)	
	A	B	C		D	E	F	G	H	I	8702	8736
			8702	8736								
00, 0 *[15]* 1 *[16]*	11.88	11.88	7.41	7.53	9.75	1.06	1.06	9.75	1.06	0.31	16	17
2 *[16]*	14.88	14.13	7.56	7.66	12.75	1.06	1.06	12	1.06	0.31	24	25
3 *[15]* 4 *[15]*	18.16	29.16	9.25	9.25	15.5	1.33	1.33	26.5	1.33	0.44	95	98
5	35.22	46.22	12.81	12.94	31	2.11	2.11	42	2.11	0.56	298	315
6	36.22	62.22	19.47		Floor Mounting.						400	405

[14] The vertical design differs from the horizontal design figure shown for the corresponding NEMA size, but the dimensions listed apply.
[15] 3-Pole only.
[16] The standard enclosure has space for a fused control transformer, **Form FF4T**, on Sizes 0-2 (except 4-pole devices, Size 0 and 1).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 4X and 12/3R Enclosures

Table 16.168: See Figure: NEMA 4 and 4X—Stainless Steel *[17]*

NEMA Size	Class Number	Dimensions, in.												Hub Dia.		Weight (lb)	
		A	B	C	D	E	F	G	H	I	J	K	L	W Bot. Only	X Top & Bot.	8702	8736
0*[18]* 1*[18]*	8702, 8736	12.63	7.81	14.69	2.56	7.5	13.5	0.59	3.88	18.41	1.66	2.31	0.31	0.75	1	25	26
2*[18]*	8702, 8736	14.88	8.25	15.75	2.56	9.75	15	0.38	3.88	20.88	1.72	2.63	0.31	0.75	1.5	33	35
3*[19]* 4*[19]*	8702	18.16	8.75	32.22	3.08	12	30.5	0.88	3.69	26.72	2.56	3.19	0.44	0.75	2.5	96	—
	8736	18.16	9.56	32.22	3.08	12	30.5	0.88	4.5	26.72	2.56	3.19	0.44	0.75	2.5	—	99
5	8702	35.22	12.13	49.22	4.11	27	48	0.63	4.59	45.81	2.97	3.5	0.56	0.75	3.5	300	—
	8736	35.22	12.94	49.22	4.11	27	48	0.63	5.41	45.81	2.97	3.5	0.56	0.75	3.5	—	317
6	8702, 8736	36.22	19.47	70.13	Floor Mounting											500	505

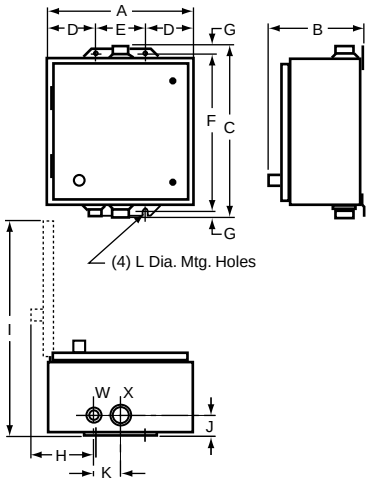


Figure 16.13: NEMA 4X—Stainless Steel

Table 16.169: See Figure: NEMA 12/3R

NEMA Size	Class	Dimensions, in.										Weight (lb)	
		A	B	C	D	E	F	G	H	I	J	8702	8736
0*[18]* 1*[18]*	8702 8736	11.88	7.75	13.75	2.56	6.75	12.75	0.5	3.66	18.13	0.31	23	24
2*[18]*	8702 8736	14.88	7.88	16	2.56	9.75	15	0.5	3.66	21.25	0.31	31	32
3*[19]* 4*[19]*	8702	18.16	9.25	31.5	3.08	12	30.5	0.5	3.69	26.72	0.44	96	—
	8736	18.16	9.56	31.5	3.08	12	30.5	0.5	4.5	26.72	0.44	—	99
5	8702	35.22	13.13	49	4.13	27	48	0.5	5.31	45.88	0.56	302	—
	8736	35.22	13.94	49	4.13	27	48	0.5	6.13	45.88	0.56	—	319
6	8702 8736	36.22	19.47	62.22	Floor Mounting							490	495

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

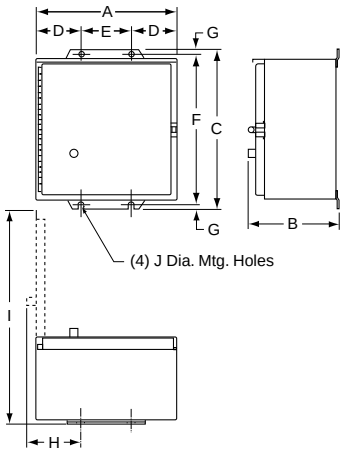


Figure 16.14: NEMA 12/3R

[17] Size 6 is NEMA 4 sheet steel enclosures.
[18] The standard enclosure has space for a fused control transformer, **Form FF4T**, on Sizes 0-2 (except 4-pole devices, Size 0 and 1).
[19] 3-Pole only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Class 8702 Type W
Reversing Vacuum Contactor

Class 8702 Type W

Class 8702 Type W Reversing Vacuum Contactors are used to switch capacitors, transformers and electric motors where overload protection is separately provided. Type W reversing vacuum contactors are designed for operation at 600 V, 50/60 Hz.

Auxiliary Contacts—An auxiliary contact block, Class 9999 Type WX11, with one normally open contact and one normally closed contact, is used with Size 4, 5 and 6 vacuum contactors. Additional auxiliary contact units may be added to the Size 4 and 5 reversing contactors in the field. A maximum of 2 units may be added to the Size 4; a maximum of 1 unit may be added to the Size 5.

Termination Means—The Size 4 reversing vacuum contactor is supplied with line and load side lugs. The Size 5 and 6 reversing vacuum contactors are supplied without line and load side lugs.

NOTE: In Table 16.170, replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes listed in Table 16.172. Replacement coils are listed in Table 16.171.

Table 16.170: Class 8702 Full Voltage Reversing Vacuum Contactors (Horizontal Only) 3-Pole Polyphase—600 Vac Maximum—50–60 Hz

NEMA® Size	Enclosed Ampere Rating	Motor Voltage	Maximum Horsepower	Open Style Type
4	135	200	40	WFO3●●●
		230	50	
		380	75	
		460	100	
		575	100	
5	270	200	75	WGO3●●●
		230	100	
		380	150	
		460	200	
		575	200	
6	540	200	150	WHO3V●●●
		230	200	
		380	300	
		460	400	
		575	400	


Table 16.171: Class 9998—Replacement Coils for Class 8702 Reversing Contactors

Size	Type	Poles	Class and Type	Suffix Number (Complete Coil Number Consists of Class and Type Followed by Suffix Number)			
				120 V 110 V	240 V 220 V	480 V 440 V	600 V 550 V
4	WF	All	9998WF	120	240	480	600
5	WG		9998WG	120	240	480	600
6	WH		9998WH	120	240	480	600

Table 16.172: Coil Voltage Codes

Voltage	110	120	220	240	440	480	550	600
50 Hz	V02	—	V03	—	V06	—	V07	—
60 Hz	—	V02	—	V03	—	V06	—	V07


Table 16.173: Approximate Dimensions

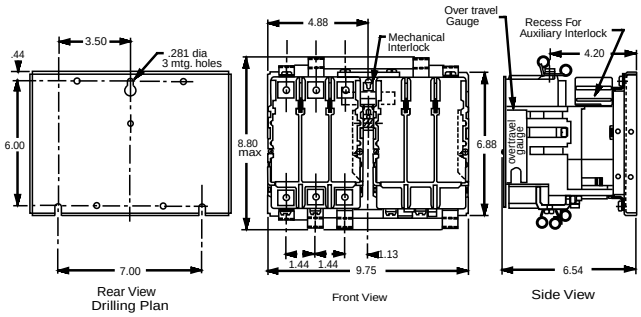


Size 4 Reversing Contactor Outline with Lugs, Class 8702 WF

Table 16.174: Class 9999—Vacuum Starter Kits

For Use With Type	For Use With Size	Kit Description	Class 9999 Type
WF–WG WH	4–5 6	Auxiliary Contacts, Non-Convertible 1 N.O. & 1 N.C. Isolated Contacts	WX11
WF WG–WH	4 5–6	Coil Circuit Auxiliary Contacts 1 N.O. & 1 N.C. Isolated Contacts, Delayed Break 1 N.C. Isolated Contact	WCX11 WLX01
WG	5	Lug Kits 6 lugs included	LUW5

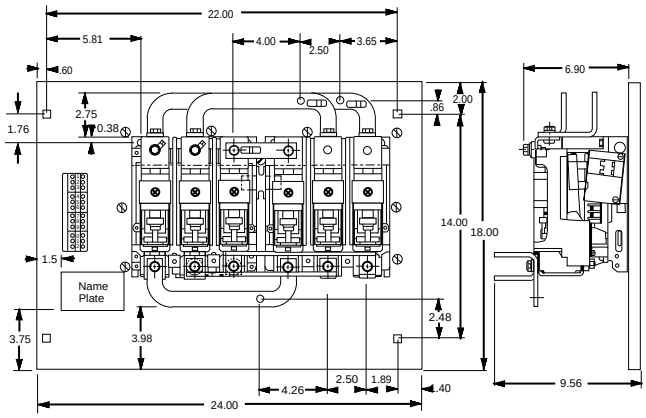

Size 5 Reversing Contactor Outline without Lugs, Class 8702 WG

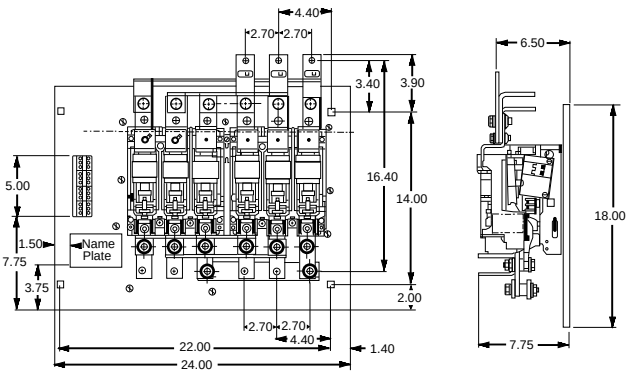

Size 6 Reversing Contactor Outline without Lugs, Class 8702 WH

For How to Order Information, see page 16-28.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Class 8738 Fusible Disconnect Switch Type

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

Class 8738 and 8739 Type S reversing combination starters combine the requirements of motor overload and short circuit protection into one convenient package. Type S reversing combination starters are manufactured in accordance with NEMA standards, and are UL Listed (although some Form numbers may not be listed—contact your nearest Square D™/Schneider Electric sales office for further information). Class 8738 and 8739 reversing combination starters are designed to operate at 600 Vac, 50–60 Hz, and are available with one of four types of overload relays. See page 16-63 for more information. For Class J fuses, use Form Y1072 (no charge).

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection), see Solid-State Overload Relay Forms, page 16-121

Table 16.175: Class 8738 Full-Voltage Type, Fusible (With Class H Fuse Clips) Reversing with Motor Logic™ SSOLR (replace ●●● with the voltage code) *[1]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight Stainless Steel (304) Enclosure	NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[2]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Fuse Clip Size (A)				With External Reset	Without External Reset
				Type *[3]*	Type *[3]*	Type *[3]*	Type *[3]*	Type *[3]*
200 (208)	3	0	30	SBG12●●●H30 *[4]*	SBW12●●●H30 *[4]*	SBW22●●●H30 *[4]*	SBA22●●●H30 *[4]*	SBA12●●●H30 *[4]*
	5	1	30	SCG12●●●H30 *[4]*	SCW12●●●H30 *[4]*	SCW22●●●H30 *[4]*	SCA22●●●H30 *[4]*	SCA12●●●H30 *[4]*
	7.5		60	SCG13●●●H30 *[4]*	SCW13●●●H30 *[4]*	SCW23●●●H30 *[4]*	SCA23●●●H30 *[4]*	SCA13●●●H30 *[4]*
	10	2	60	SDG12●●●H30 *[4]*	SDW12●●●H30 *[4]*	SDW22●●●H30 *[4]*	SDA22●●●H30 *[4]*	SDA12●●●H30 *[4]*
	20	3	100	SEG15●●●H30	SEW15●●●H30	—	SEA25●●●H30	SEA15●●●H30
	40	4	200	SFG15●●●H30	SFW15●●●H30	—	SFA25●●●H30	SFA15●●●H30
	75	5	400	SGG15●●●H30	SGW15●●●H30	—	SGA25●●●H30	SGA15●●●H30
230 (240)	3	0	30	SBG12●●●H30 *[4]*	SBW12●●●H30 *[4]*	SBW22●●●H30 *[4]*	SBA22●●●H30 *[4]*	SBA12●●●H30 *[4]*
	5	1	30	SCG12●●●H30 *[4]*	SCW12●●●H30 *[4]*	SCW22●●●H30 *[4]*	SCA22●●●H30 *[4]*	SCA12●●●H30 *[4]*
	7.5		60	SCG13●●●H30 *[4]*	SCW13●●●H30 *[4]*	SCW23●●●H30 *[4]*	SCA23●●●H30 *[4]*	SCA13●●●H30 *[4]*
	15	2	60	SDG12●●●H30 *[4]*	SDW12●●●H30 *[4]*	SDW22●●●H30 *[4]*	SDA22●●●H30 *[4]*	SDA12●●●H30 *[4]*
	25	3	100	SEG15●●●H30	SEW15●●●H30	—	SEA25●●●H30	SEA15●●●H30
	50	4	200	SFG15●●●H30	SFW15●●●H30	—	SFA25●●●H30	SFA15●●●H30
	100	5	400	SGG15●●●H30	SGW15●●●H30	—	SGA25●●●H30	SGA1●●●H30
460 (480)	5	0	30	SBG13●●●H30 *[4]*	SBW13●●●H30 *[4]*	SBW23●●●H30 *[4]*	SBA23●●●H30 *[4]*	SBA13●●●H30 *[4]*
	10	1	30	SCG14●●●H30 *[4]*	SCW14●●●H30 *[4]*	SCW24●●●H30 *[4]*	SCA24●●●H30 *[4]*	SCA14●●●H30 *[4]*
	15	2	30	SDG16●●●H301	SDW16●●●H301	SDW26●●●H301	SDA26●●●H301	SDA16●●●H301
	25		60	SDG14●●●H30 *[4]*	SDW14●●●H30 *[4]*	SDW24●●●H30 *[4]*	SDA24●●●H30 *[4]*	SDA14●●●H30 *[4]*
	50	3	100	SEG13●●●H30	SEW13●●●H30	—	SEA23●●●H30	SEA13●●●H30
	100	4	200	SFG13●●●H30	SFW13●●●H30	—	SFA23●●●H30	SFA13●●●H30
	200	5	400	SGG13●●●H30	SGW13●●●H30	—	SGA23●●●H30	SGA13●●●H30
575 (600)	5	0	30	SBG13●●●H30	SBW13●●●H30	SBW23●●●H30	SBA23●●●H30	SBA13●●●H30
	10	1	30	SCG14●●●H301	SCW14●●●H301	SCW24●●●H301	SCA24●●●H301	SCA14●●●H301
	15	2	30	SDG16●●●H30	SDW16●●●H30	SDW26●●●H30	SDA26●●●H30	SDA16●●●H30
	25		60	SDG14●●●H30	SDW14●●●H30	SDW24●●●H30	SDA24●●●H30	SDA14●●●H30
	50	3	100	SEG13●●●H30	SEW13●●●H30	—	SEA23●●●H30	SEA13●●●H30
	100	4	200	SFG13●●●H30	SFW13●●●H30	—	SFA23●●●H30	SFA13●●●H30
	200	5	400	SGG13●●●H30	SGW13●●●H30	—	SGA23●●●H30	SGA13●●●H30

Table 16.176: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24*[5]*	—	V01
120*[6]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119.
Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-73
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[1] To order melting alloy overload relay, remove form "H30" from part number.
[2] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.176.
[4] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[5] 24 V coils are not available on Sizes 4–7. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8738SBG12V01S).
[6] These voltage codes must include **Form S** (supplied at no charge) (for example, order as 8738SC13V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Non-Fusible and Fusible Disconnect Switch Type

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection), see Solid-State Overload Relay Forms, page 16-121.

Table 16.177: Class 8738 Non-Fusible Disconnect Switch Type—Full-Voltage, Reversing, with Motor Logic™ SSOLR (replace ●●● with the voltage code) *[7]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight, Stainless Steel (304) Enclosure	NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[8]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Fuse Clip Size (A)				With External Reset	Without External Reset
				Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*
200 (208)	3	0	None	SBG11●●●H30 *[10]*	SBW11●●●H30 *[10]*	SBW21●●●H30 *[10]*	SBA21●●●H30 *[10]*	SBA11●●●H30 *[10]*
	7-1/2	1	None	SCG11●●●H30 *[10]*	SCW11●●●H30 *[10]*	SCW21●●●H30 *[10]*	SCA21●●●H30 *[10]*	SCA11●●●H30 *[10]*
	10	2	None	SDG11●●●H30 *[10]*	SDW11●●●H30 *[10]*	SDW21●●●H30 *[10]*	SDA21●●●H30 *[10]*	SDA11●●●H30 *[10]*
	25	3	None	SEG11●●●H30	SEW11●●●H30	—	SEA21●●●H30	SEA11●●●H30
	40	4	None	SFG11●●●H30	SFW11●●●H30	—	SFA21●●●H30	SFA11●●●H30
	75	5	None	SGG11●●●H30	SGW11●●●H30	—	SGA21●●●H30	SGA11●●●H30
230 (240)	3	0	None	SBG11●●●H30 *[10]*	SBW11●●●H30 *[10]*	SBW21●●●H30 *[10]*	SBA21●●●H30 *[10]*	SBA11●●●H30 *[10]*
	7-1/2	1	None	SCG11●●●H30 *[10]*	SCW11●●●H30 *[10]*	SCW21●●●H30 *[10]*	SCA21●●●H30 *[10]*	SCA11●●●H30 *[10]*
	15	2	None	SDG11●●●H30 *[10]*	SDW11●●●H30 *[10]*	SDW21●●●H30 *[10]*	SDA21●●●H30 *[10]*	SDA11●●●H30 *[10]*
	30	3	None	SEG11●●●H30	SEW11●●●H30	—	SEA21●●●H30	SEA11●●●H30
	50	4	None	SFG11●●●H30	SFW11●●●H30	—	SFA21●●●H30	SFA11●●●H30
	100	5	None	SGG11●●●H30	SGW11●●●H30	—	SGA21●●●H30	SGA11●●●H30
460 (480)	5	0	None	SBG11●●●H30 *[10]*	SBW11●●●H30 *[10]*	SBW21●●●H30 *[10]*	SBA21●●●H30 *[10]*	SBA11●●●H30 *[10]*
	10	1	None	SCG11●●●H30 *[10]*	SCW11●●●H30 *[10]*	SCW21●●●H30 *[10]*	SCA21●●●H30 *[10]*	SCA11●●●H30 *[10]*
	25	2	None	SDG11●●●H30 *[10]*	SDW11●●●H30 *[10]*	SDW21●●●H30 *[10]*	SDA21●●●H30 *[10]*	SDA11●●●H30 *[10]*
	50	3	None	SEG11●●●H30	SEW11●●●H30	—	SEA21●●●H30	SEA11●●●H30
	100	4	None	SFG11●●●H30	SFW11●●●H30	—	SFA21●●●H30	SFA11●●●H30
	200	5	None	SGG11●●●H30	SGW11●●●H30	—	SGA21●●●H30	SGA11●●●H30
575 (600)	5	0	None	SBG11●●●H30 *[10]*	SBW11●●●H30 *[10]*	SBW21●●●H30 *[10]*	SBA21●●●H30 *[10]*	SBA11●●●H30 *[10]*
	10	1	None	SCG11●●●H30 *[10]*	SCW11●●●H30 *[10]*	SCW21●●●H30 *[10]*	SCA21●●●H30 *[10]*	SCA11●●●H30 *[10]*
	25	2	None	SDG11●●●H30 *[10]*	SDW11●●●H30 *[10]*	SDW21●●●H30 *[10]*	SDA21●●●H30 *[10]*	SDA11●●●H30 *[10]*
	50	3	None	SEG11●●●H30	SEW11●●●H30	—	SEA21●●●H30	SEA11●●●H30
	100	4	None	SFG11●●●H30	SFW11●●●H30	—	SFA21●●●H30	SFA11●●●H30
	200	5	None	SGG11●●●H30	SGW11●●●H30	—	SGA21●●●H30	SGA11●●●H30

Table 16.178: Class 8738 Fusible Disconnect Switch Type with Class R Fuse Clips—100,000 AIC Rating (replace ●●● with the voltage code) *[7]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4 & 4X Watertight, Dusttight, Stainless Steel (304) Enclosure	NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure *[11]*	NEMA 12/3R *[8]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Fuse Clip Size (A)				With External Reset	Without External Reset
				Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*
200 (208)	3	0	30	SBG32●●●H30 *[10]*	SBW32●●●H30 *[10]*	SBW42●●●H30 *[10]*	SBA42●●●H30 *[10]*	SBA32●●●H30 *[10]*
	5	1	30	SCG32●●●H30 *[10]*	SCW32●●●H30 *[10]*	SCW42●●●H30 *[10]*	SCA42●●●H30 *[10]*	SCA32●●●H30 *[10]*
	7-1/2		60	SCG33●●●H30 *[10]*	SCW33●●●H30 *[10]*	SCW43●●●H30 *[10]*	SCA43●●●H30 *[10]*	SCA33●●●H30 *[10]*
	10	2	60	SDG32●●●H30 *[10]*	SDW32●●●H30 *[10]*	SDW42●●●H30 *[10]*	SDA42●●●H30 *[10]*	SDA32●●●H30 *[10]*
	20	3	100	SEG35●●●H30	SEW35●●●H30	—	SEA45●●●H30	SEA35●●●H30
	40	4	200	SFG35●●●H30	SFW35●●●H30	—	SFA45●●●H30	SFA35●●●H30
	75	5	400	SGG35●●●H30	SGW35●●●H30	—	SGA45●●●H30	SGA35●●●H30
230 (240)	3	0	30	SBG32●●●H30 *[10]*	SBW32●●●H30 *[10]*	SBW42●●●H30 *[10]*	SBA42●●●H30 *[10]*	SBA32●●●H30 *[10]*
	5	1	30	SCG32●●●H30 *[10]*	SCW32●●●H30 *[10]*	SCW42●●●H30 *[10]*	SCA42●●●H30 *[10]*	SCA32●●●H30 *[10]*
	7-1/2		60	SCG33●●●H30 *[10]*	SCW33●●●H30 *[10]*	SCW43●●●H30 *[10]*	SCA43●●●H30 *[10]*	SCA33●●●H30 *[10]*
	15	2	60	SDG32●●●H30 *[10]*	SDW32●●●H30 *[10]*	SDW42●●●H30 *[10]*	SDA42●●●H30 *[10]*	SDA32●●●H30 *[10]*
	25	3	100	SEG35●●●H30	SEW35●●●H30	—	SEA45●●●H30	SEA3●●●H30
	50	4	200	SFG35●●●H30	SFW35●●●H30	—	SFA45●●●H30	SFA35●●●H30
	100	5	400	SGG35●●●H30	SGW35●●●H30	—	SGA45●●●H30	SGA35●●●H30
460 (480)	5	0	30	SBG33●●●H30 *[10]*	SBW33●●●H30 *[10]*	SBW43●●●H30 *[10]*	SBA43●●●H30 *[10]*	SBA33●●●H30 *[10]*
	10	1	30	SCG34●●●H30 *[10]*	SCW34●●●H30 *[10]*	SCW44●●●H30 *[10]*	SCA44●●●H30 *[10]*	SCA34●●●H30 *[10]*
	15	2	30	SDG36●●●H301	SDW36●●●H301	SDW46●●●H301	SDA46●●●H301	SDA36●●●H301
	25		60	SDG34●●●H30 *[10]*	SDW34●●●H30 *[10]*	SDW44●●●H30 *[10]*	SDA44●●●H30 *[10]*	SDA34●●●H30 *[10]*
	50	3	100	SEG33●●●H30	SEW33●●●H30	—	SEA43●●●H30	SEA33●●●H30
	100	4	200	SFG33●●●H30	SFW33●●●H30	—	SFA43●●●H30	SFA33●●●H30
	200	5	400	SGG33●●●H30	SGW33●●●H30	—	SGA43●●●H30	SGA33●●●H30
575 (600)	5	0	30	SBG33●●●H30 *[10]*	SBW33●●●H30 *[10]*	SBW43●●●H30 *[10]*	SBA43●●●H30 *[10]*	SBA33●●●H30 *[10]*
	10	1	30	SCG34●●●H30 *[10]*	SCW34●●●H30 *[10]*	SCW44●●●H30 *[10]*	SCA44●●●H30 *[10]*	SCA34●●●H30 *[10]*
	15	2	30	SDG36●●●H301	SDW36●●●H301	SDW46●●●H301	SDA46●●●H301	SDA36●●●H301
	25		60	SDG34●●●H30 *[10]*	SDW34●●●H30 *[10]*	SDW44●●●H30 *[10]*	SDA44●●●H30 *[10]*	SDA34●●●H30 *[10]*
	50	3	100	SEG33●●●H30	SEW33●●●H30	—	SEA43●●●H30	SEA33●●●H30
	100	4	200	SFG33●●●H30	SFW33●●●H30	—	SFA43●●●H30	SFA33●●●H30
	200	5	400	SGG33●●●H30	SGW33●●●H30	—	SGA43●●●H30	SGA33●●●H30

For How to Order Information, see page 16-28.

Electronic Motor Circuit Protector (MCP)

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

[7] To order melting alloy overload relay, remove form "H30" from part number.
[8] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[9] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.180.
[10] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[11] 5,000 AIC Rating

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection), see Solid-State Overload Relay Forms, page 16-121

Table 16.179: Class 8739 Full-Voltage Type, Reversing with Motor Logic SSOLR (replace ●●● with the voltage code) *[12]*

Ratings				NEMA 1 General Purpose Enclosure	NEMA 4X Watertight, Dusttight, Stainless Steel (304) Enclosure (Sizes 0-5)	NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[13]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	NEMA Size	Hp Range Polyphase	Circuit Breaker (See Page 7-32 for Breaker Adjustment Range)				With External Reset	Without External Reset
				Type *[14]*	Type *[14]*	Type *[14]*	Type *[14]*	Type *[14]*
200 (208)	0	0.25–3	HLL36030M71	SBG43●●●H30 *[15]*	SBW43●●●H30 *[15]*	SBW53●●●H30 *[15]*	SBA53●●●H30 *[15]*	SBA43●●●H30 *[15]*
	1	0.25–5	HLL36030M71	SCG44●●●H30 *[15]*	SCW44●●●H30 *[15]*	SCW54●●●H30 *[15]*	SCA54●●●H30 *[15]*	SCA44●●●H30 *[15]*
		7.5	HLL36050M72	SCG45●●●H30 *[15]*	SCW45●●●H30 *[15]*	SCW55●●●H30 *[15]*	SCA55●●●H30 *[15]*	SCA45●●●H30 *[15]*
	2	1.5–5	HLL36030M71	SDG42●●●H301	SDW42●●●H301	SDW52●●●H301	SDA52●●●H301	SDA42●●●H301
		7.5–10	HLL36050M72	SDG43●●●H30 *[15]*	SDW43●●●H30 *[15]*	SDW53●●●H30 *[15]*	SDA53●●●H30 *[15]*	SDA43●●●H30 *[15]*
	3	15–25	HLL36100M73	SEG42●●●H30	SEW42●●●H30	SEW52●●●H30	SEA52●●●H30	SEA42●●●H30
	4	30–40	JJL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	5	50–60	JLL36250M75	SGG44●●●H30	SGW44●●●H30	—	SGA54●●●H30	SGA44●●●H30
		75	LJL36400M36	SGG45●●●H30	SGW45●●●H30	—	SGA55●●●H30	SGA45●●●H30
	6	100	LJL36400M36	SHG43●●●H30	SHW43●●●H30	—	SHA53●●●H30	SHA43●●●H30
		125–150	LJL36600M42	SHG45●●●H30	SHW45●●●H30	—	SHA55●●●H30	SHA45●●●H30
230 (240)	0	0.25–3	HLL36030M71	SBG43●●●H30 *[15]*	SBW43●●●H30 *[15]*	SBW53●●●H30 *[15]*	SBA53●●●H30 *[15]*	SBA43●●●H30 *[15]*
	1	0.25–7.5	HLL36030M71	SCG44●●●H30 *[15]*	SCW44●●●H30 *[15]*	SCW54●●●H30 *[15]*	SCA54●●●H30 *[15]*	SCA44●●●H30 *[15]*
	2	1.5–7.5	HLL36030M71	SDG42●●●H301	SDW42●●●H301	SDW52●●●H301	SDA52●●●H301	SDA42●●●H301
		10	HLL36050M72	SDG43●●●H30 *[15]*	SDW43●●●H30 *[15]*	SDW53●●●H30 *[15]*	SDA53●●●H30 *[15]*	SDA43●●●H30 *[15]*
		15	HLL36100M73	SDG44●●●H30 *[15]*	SDW44●●●H30 *[15]*	SDW54●●●H30 *[15]*	SDA54●●●H30 *[15]*	SDA44●●●H30 *[15]*
	3	15–30	HLL36100M73	SEG42●●●H30	SEW42●●●H30	SEW52●●●H30	SEA52●●●H30	SEA42●●●H30
	4	40–50	JJL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	5	60	JLL36250M75	SGG44●●●H30	SGW44●●●H30	—	SGA54●●●H30	SGA44●●●H30
		75–100	LJL36400M36	SGG45●●●H30	SGW45●●●H30	—	SGA55●●●H30	SGA45●●●H30
	6	125–150	LJL36600M42	SHG45●●●H30	SHW45●●●H30	—	SHA55●●●H30	SHA45●●●H30
		200	PLL34080M68	SHG46●●●H30	SHW46●●●H30	—	SHA56●●●H30	SHA46●●●H30
460 (480)	0	0.25–5	HLL36030M71	SBG43●●●H30 *[15]*	SBW43●●●H30 *[15]*	SBW53●●●H30 *[15]*	SBA53●●●H30 *[15]*	SBA43●●●H30 *[15]*
	1	0.25–10	HLL36030M71	SCG44●●●H30 *[15]*	SCW44●●●H30 *[15]*	SCW54●●●H30 *[15]*	SCA54●●●H30 *[15]*	SCA44●●●H30 *[15]*
	2	5–15	HLL36030M71	SDG42●●●H301	SDW42●●●H301	SDW52●●●H301	SDA52●●●H301	SDA42●●●H301
		20–25	HLL36050M72	SDG43●●●H30 *[15]*	SDW43●●●H30 *[15]*	SDW53●●●H30 *[15]*	SDA53●●●H30 *[15]*	SDA43●●●H30 *[15]*
	3	20–25 30–50	HLL36050M72 HLL36100M73	SEG41●●●H30 SEG42●●●H30	SEW41●●●H30 SEW42●●●H30	SEW51●●●H30 SEW52●●●H30	SEA51●●●H30 SEA52●●●H30	SEA41●●●H30 SEA42●●●H30
	4	60–100	JLL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	5	125 150–200	JLL36250M75 LJL36400M36	SGG44●●●H30 SGG45●●●H30	SGW44●●●H30 SGW45●●●H30	— —	SGA54●●●H30 SGA55●●●H30	SGA44●●●H30 SGA45●●●H30
	6	250–350 400	LJL36600M42 PLL34080M68	SHG45●●●H30 SHG46●●●H30	SHW45●●●H30 SHW46●●●H30	— —	SHA55●●●H30 SHA56●●●H30	SHA45●●●H30 SHA46●●●H30
575 (600)	0	0.25–5	HLL36030M71	SBG43●●●H30 *[15]*	SBW43●●●H30 *[15]*	SBW53●●●H30 *[15]*	SBA53●●●H30 *[15]*	SBA43●●●H30 *[15]*
	1	0.25–10	HLL36030M71	SCG44●●●H30 *[15]*	SCW44●●●H30 *[15]*	SCW54●●●H30 *[15]*	SCA54●●●H30 *[15]*	SCA44●●●H30 *[15]*
	2	5–20	HLL36030M71	SDG42●●●H301	SDW42●●●H301	SDW52●●●H301	SDA52●●●H301	SDA42●●●H301
		25	HLL36050M72	SDG43●●●H30 *[15]*	SDW43●●●H30 *[15]*	SDW53●●●H30 *[15]*	SDA53●●●H30 *[15]*	SDA43●●●H30 *[15]*
	3	25–30 40–50	HLL36050M72 HLL36100M73	SEG41●●●H30 SEG42●●●H30	SEW41●●●H30 SEW42●●●H30	SEW51●●●H30 SEW52●●●H30	SEA51●●●H30 SEA52●●●H30	SEA41●●●H30 SEA42●●●H30
	4	60–100	JLL36250M75	SFG44●●●H30	SFW44●●●H30	SFW54●●●H30	SFA54●●●H30	SFA44●●●H30
	5	125–150 200	JLL36250M75 LJL36400M36	SGG44●●●H30 SGG45●●●H30	SGW44●●●H30 SGW45●●●H30	— —	SGA54●●●H30 SGA55●●●H30	SGA44●●●H30 SGA45●●●H30
	6	250 300–400	LJL36400M36 LJL36600M42	SHG43●●●H30 SHG45●●●H30	SHW43●●●H30 SHW45●●●H30	— —	SHA53●●●H30 SHA55●●●H30	SHA43●●●H30 SHA45●●●H30

Table 16.180: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[16]*	—	V01
120 *[17]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119.
Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-73
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[12] To order melting alloy overload relay, remove form "H30" from part number.
[13] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[14] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown inTable 16.180.
[15] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[16] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8739SBG41V01S).
[17] These voltage codes must include **Form S** (provided at no charge) (for example, order as 8739SCG41V02S).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Magnetic Circuit Breaker

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic™ SSOLR protection), see Solid-State Overload Relay Forms, page 16-121

Table 16.181: Class 8739 Full-Voltage Type, Reversing, 200–240 V, with Motor Logic SSOLR (replace ●●● with the voltage code) *[18]*

Ratings					NEMA 1 General Purpose Enclosure	NEMA 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)	NEMA 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[19]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Circuit Breaker		Type *[20]*	Type *[20]*	Type *[20]*	With External Reset	Without External Reset
			Type	Ampere Rating				Type *[20]*	Type *[20]*
200 (208)	2 3	0	HLL36015 HLL36020	15 20	SBG1●●●H30 *[21]* SBG3●●●H30 *[21]*	SBW1●●●H30 *[21]* SBW3●●●H30 *[21]*	SBW11●●●H30 *[21]* SBW13●●●H30 *[21]*	SBA11●●●H30 *[21]* SBA13●●●H30 *[21]*	SBA1●●●H30 *[21]* SBA3●●●H30 *[21]*
	5 7.5	1	HLL36035 HLL36050	35 50	SCG5●●●H30 *[21]* SCG2●●●H30 *[21]*	SCW5●●●H30 *[21]* SCW2●●●H30 *[21]*	SCW15●●●H30 *[21]* SCW12●●●H30 *[21]*	SCA15●●●H30 *[21]* SCA12●●●H30 *[21]*	SCA5●●●H30 *[21]* SCA2●●●H30 *[21]*
	10	2	HLL36060	60	SDG1●●●H30 *[21]*	SDW1●●●H30 *[21]*	SDW11●●●H30 *[21]*	SDA11●●●H30 *[21]*	SDA1●●●H30 *[21]*
	15 20 25	3	HLL36100 HLL36125 HLL36150	100 125 150	SEG3●●●H30 SEG1●●●H30 SEG5●●●H30	SEW3●●●H30 SEW1●●●H30 SEW5●●●H30	SEW13●●●H30 SEW11●●●H30 SEW15●●●H30	SEA13●●●H30 SEA11●●●H30 SEA15●●●H30	SEA3●●●H30 SEA1●●●H30 SEA5●●●H30
	30 40	4	JLL36200 JLL36250	200 250	SFG3●●●H30 SFG4●●●H30	SFW3●●●H30 SFW4●●●H30	SFW13●●●H30 SFW14●●●H30	SFA13●●●H30 SFA14●●●H30	SFA3●●●H30 SFA4●●●H30
	50 60–75	5	JLL36250 LLL36400U33X	250 400	SGG6●●●H30 SGG4●●●H30	SGW6●●●H30 SGW4●●●H30	— —	SGA16●●●H30 SGA14●●●H30	SGA6●●●H30 SGA4●●●H30
	100–125 150	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	SHW4●●●H30 SHW5●●●H30	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30
230 (240)	2 3	0	HLL36015 HLL36020	15 20	SBG1●●●H30 *[21]* SBG3●●●H30 *[21]*	SBW1●●●H30 *[21]* SBW3●●●H30 *[21]*	SBW11●●●H30 *[21]* SBW13●●●H30 *[21]*	SBA11●●●H30 *[21]* SBA13●●●H30 *[21]*	SBA1●●●H30 *[21]* SBA3●●●H30 *[21]*
	5 7.5	1	HLL36035 HLL36045	35 45	SCG5●●●H30 *[21]* SCG6●●●H30 *[21]*	SCW5●●●H30 *[21]* SCW6●●●H30 *[21]*	SCW15●●●H30 *[21]* SCW16●●●H30 *[21]*	SCA15●●●H30 *[21]* SCA16●●●H30 *[21]*	SCA5●●●H30 *[21]* SCA6●●●H30 *[21]*
	10 15	2	HLL36060 HLL36090	60 90	SDG1●●●H30 *[21]* SDG7●●●H30 *[21]*	SDW1●●●H30 *[21]* SDW7●●●H30 *[21]*	SDW11●●●H30 *[21]* SDW17●●●H30 *[21]*	SDA11●●●H30 *[21]* SDA17●●●H30 *[21]*	SDA1●●●H30 *[21]* SDA7●●●H30 *[21]*
	20 25–30	3	HLL36100 HLL36150	100 150	SEG3●●●H30 SEG5●●●H30	SEW3●●●H30 SEW5●●●H30	SEW13●●●H30 SEW15●●●H30	SEA13●●●H30 SEA15●●●H30	SEA3●●●H30 SEA5●●●H30
	40 50	4	JLL36225 JLL36250	225 250	SFG1●●●H30 SFG4●●●H30	SFW1●●●H30 SFW4●●●H30	SFW11●●●H30 SFW14●●●H30	SFA11●●●H30 SFA14●●●H30	SFA1●●●H30 SFA4●●●H30
	60 75 100	5	JLL36250 LLL36400U33X LLL36600U33X	250 400 600	SGG6●●●H30 SGG4●●●H30 SGG2●●●H30	SGW6●●●H30 SGW4●●●H30 SGW2●●●H30	— — —	SGA16●●●H30 SGA14●●●H30 SGA12●●●H30	SGA6●●●H30 SGA4●●●H30 SGA2●●●H30
	125 150–200	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	SHW4●●●H30 SHW5●●●H30	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30

Table 16.182: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[22]*	—	V01
120 *[23]*	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119.
Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

Dimensions: page 16-73
Factory Modifications (Forms): page 16-118
Replacement Parts (Class 9998): page 16-124
Type S Accessories (Class 9999): page 16-128

For How to Order Information, see page 16-28.

[18] To order melting alloy overload relay, remove form "H30" from part number.
[19] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[20] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.182.
[21] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[22] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8739SBG1V01**S**).
[23] These voltage codes must include **Form S** (provided at no charge) (for example, order as 8739SCG5V02**S**).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Magnetic Circuit Breaker

3-Pole Polyphase—600 Vac Maximum—50–60 Hz

For Form H30• (special lower-FLA factory-assembled starter combinations with Motor Logic SSOLR protection), see Solid-State Overload Relay Forms, page 16-121

Table 16.183: Class 8739 Full-Voltage Type, Reversing, 460–600 V, with Motor Logic™ SSOLR (replace ●●● with the voltage code) *[24]*

Ratings					NEMA 1 General Purpose Enclosure	NEMA 4X Watertight Dusttight, Stainless Steel (304) Enclosure (Sizes 0–5)	NEMA 4X Watertight, Dusttight, Corrosion Resistant Polyester Enclosure	NEMA 12/3R *[25]* Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. Hp Polyphase	NEMA Size	Circuit Breaker		Type *[26]*	Type *[26]*	Type *[26]*	With External Reset	Without External Reset
			Type	Ampere Rating				Type *[26]*	Type *[26]*
460 (480)	5	0	HLL36015	15	SBG1●●●H30 *[27]*	SBW1●●●H30 *[27]*	SBW11●●●H30 *[27]*	SBA11●●●H30 *[27]*	SBA1●●●H30 *[27]*
	7-1/2 10	1	HLL36025 HLL36030	25 30	SCG3●●●H30 *[27]* SCG7●●●H30 *[27]*	SCW3●●●H30 *[27]* SCW7●●●H30 *[27]*	SCW13●●●H30 *[27]* SCW17●●●H30 *[27]*	SCA13●●●H30 *[27]* SCA17●●●H30 *[27]*	SCA3●●●H30 *[27]* SCA7●●●H30 *[27]*
	15 20 25	2	HLL36045 HLL36060 HLL36070	45 60 70	SDG3●●●H30 *[27]* SDG1●●●H30 *[27]* SDG5●●●H30 *[27]*	SDW3●●●H30 *[27]* SDW1●●●H30 *[27]* SDW5●●●H30 *[27]*	SDW13●●●H30 *[27]* SDW11●●●H30 *[27]* SDW15●●●H30 *[27]*	SDA13●●●H30 *[27]* SDA11●●●H30 *[27]* SDA15●●●H30 *[27]*	SDA3●●●H30 *[27]* SDA1●●●H30 *[27]* SDA5●●●H30 *[27]*
	30 40 50	3	HLL36080 HLL36100 HLL36150	80 100 150	SEG6●●●H30 SEG3●●●H30 SEG5●●●H30	SEW6●●●H30 SEW3●●●H30 SEW5●●●H30	SEW16●●●H30 SEW13●●●H30 SEW15●●●H30	SEA16●●●H30 SEA13●●●H30 SEA15●●●H30	SEA6●●●H30 SEA3●●●H30 SEA5●●●H30
	60 75 100	4	JJL36105 JJL36200 JJL36250	150 200 250	SFG5●●●H30 SFG3●●●H30 SFG4●●●H30	SFW5●●●H30 SFW3●●●H30 SFW4●●●H30	SFW15●●●H30 SFW13●●●H30 SFW14●●●H30	SFA15●●●H30 SFA13●●●H30 SFA14●●●H30	SFA5●●●H30 SFA3●●●H30 SFA4●●●H30
	125–150 200	5	LLL36400U33X LLL36600U33X	400 600	SGG4●●●H30 SGG2●●●H30	SGW4●●●H30 SGW2●●●H30	— —	SGA14●●●H30 SGA12●●●H30	SGA4●●●H30 SGA2●●●H30
	250 300–400	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	SHW4●●●H30 SHW5●●●H30	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30
575 (600)	5	0	HLL36015	15	SBG1●●●H30	SBW1●●●H30	SBW11●●●H30	SBA11●●●H30	SBA1●●●H30
	7-1/2 10	1	HLL36020 HLL36025	20 25	SCG8●●●H30 SCG3●●●H30	SCW8●●●H30 SCW3●●●H30	SCW18●●●H30 SCW13●●●H30	SCA18●●●H30 SCA13●●●H30	SCA8●●●H30 SCA3●●●H30
	15 20 25	2	HLL36035 HLL36045 HLL36060	35 45 60	SDG8●●●H301 SDG3●●●H30 SDG1●●●H30	SDW8●●●H301 SDW3●●●H30 SDW1●●●H30	SDW18●●●H301 SDW13●●●H30 SDW11●●●H30	SDA18●●●H301 SDA13●●●H30 SDA12●●●H30	SDA8●●●H301 SDA3●●●H30 SDA1●●●H30
	30 40 50	3	HLL36070 HLL36090 HLL36100	70 90 100	SEG4●●●H30 SEG6●●●H30 SEG3●●●H30	SEW4●●●H30 SEW6●●●H30 SEW3●●●H30	SEW14●●●H30 SEW16●●●H30 SEW13●●●H30	SEA14●●●H30 SEA16●●●H30 SEA13●●●H30	SEA4●●●H30 SEA6●●●H30 SEA3●●●H30
	60–75 100	4	JLL36150 JLL36250	150 250	SFG5●●●H30 SFG4●●●H30	SFW5●●●H30 SFW4●●●H30	SFW15●●●H30 SFW14●●●H30	SFA15●●●H30 SFA14●●●H30	SFA5●●●H30 SFA4●●●H30
	125–150 200	5	JLL36250 LLL36400U33X	250 400	SGG6●●●H30 SGG4●●●H30	SGW6●●●H30 SGW4●●●H30	— —	SGA16●●●H30 SGA14●●●H30	SGA6●●●H30 SGA4●●●H30
	250–350 400	6	LLL36600U33X MJL36800	600 800	SHG4●●●H30 SHG5●●●H30	SHW4●●●H30 SHW5●●●H30	— —	SHA14●●●H30 SHA15●●●H30	SHA4●●●H30 SHA5●●●H30

Table 16.184: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[28]*	—	V01
120 *[29]*	110	V02
208	—	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

NOTE: For voltage codes used with control transformers, see page 16-119. Form S (separate control) is used when a separate source of power is available for the control (coil) voltage. Form S is available at no charge.

For How to Order Information, see page 16-28.

Table 16.185: Class 8738 UL Listed Short Circuit Ratings

NEMA Size	Fuse Clip Type	Enclosure *[30]*	Ampere Interrupting Capability Rating (AIC)
0–3	Standard	Standard	5,000
0–3	Class R	Standard	100,000
4–5	Standard	Standard	10,000
4–5	Class R	Standard	100,000

Table 16.186: Class 8739 UL Listed Short Circuit Ratings

Motor Circuit Protector Type			
NEMA Size	Voltage	Enclosure *[30]*	Ampere Interrupting Capability Rating (AIC)
0–1	480	Standard	100,000
0–1	481 – 600	Standard	35,000
2–5	480	Standard	100,000
2–5	481 – 600	Standard	50,000
6	480	Standard	65,000
6	600	Standard	18,000
Thermal Magnetic Circuit Breaker Type			
0–1	480	Standard	100,000
0–1	481–600	Standard	35,000
2–5	480	Standard	100,000
2–5	481–600	Standard	50,000
6	480	Standard	65,000
6	600	Standard	18,000

[24] To order melting alloy overload relay, remove form "H30" from part number.
[25] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[26] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard coil voltage codes shown in Table 16.184.
[27] **Form H30**, with the possibility of a fourth character to select a lower FLA range (for example, **H308**). See "Solid-State Overload Relay Forms" on page 16-121.
[28] 24 V coils are not available on Sizes 4–6. On Sizes 00–3, where 24 V coils are available, **Form S** (separate control) must be specified (for example, order as 8739SBG2V01S).
[29] These voltage codes must include **Form S** (provided at no charge) (for example, order as 8739SDG3V02S).
[30] Standard enclosures include NEMA 1; 4 and 4X stainless; and 12/3R.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 1, 12, and 3R Dimensions

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.187: See Figure: NEMA 1 Enclosure (Sizes 0–2), page 16-73

NEMA Size	Class	Type	Dimensions (in.) *[31]*															Top & Bottom		Sides	Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
0–1	8738, 8739	SBG SCG	13.75	23	8.34	10.63	21	18.91	1.88	1.88	3.75	2.31	1.06	3.25	2.19	1.25	0.88	—	0.25–0.75–1	0.25–0.75–1	0.25	49
2	8738, 8739	SDG	15	28.75	9.59	11.63	26.25	21.47	2.19	2	4	2.56	1.25	3.25	2.19	1.25	0.91	—	1–1.25	1–1.25	0.25	80

Table 16.188: See Figure: NEMA 1 Enclosure (Sizes 3–6), page 16-73

NEMA Size	Class	Type	Dimensions (in.) *[31]*																Top & Bottom		Sides	Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
3	8738, 8739	SEG	18.5	44	10.59	12.5	3	25.97	43.5	0.25	—	2.81	3.5	5	2.69	5.38	1.22	0.91	1–1.25 2–2.25	0.25–0.75	0.25	245
4	8738	SFG	21	51.5	10.53	15	3	30.72	51	0.25	—	2.81	3.5	5	2.69	5.38	1.22	0.91	2.5	0.25–0.75	0.25	—
	8739	SFG	18.5	44	10.59	12.5	3	25.97	43.5	0.25	—	2.81	3.5	5	2.69	5.38	1.22	0.91	1–1.25 2–2.25	0.25–0.75	0.25	—
5	8738	SGG	30	77	15.5	22	4	39.41	76	0.25	—	3.5	6.28	9.25	3.19	—	—	—	0.25–0.75	3	—	—
	8739	SGG	30	65	13.72	22	4	39.41	64	0.25	—	3.5	6.28	5	3.19	—	—	—	0.25–0.75	3	—	—
6	8738, 8739	SHG	36	90	17.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Table 16.189: See Figure: NEMA 12/3R Enclosure, page 16-73

NEMA Size	Class	Type	Dimensions (in.) *[31]*										Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	
0–1	8738, 8739	SBA SCA	13.75	10.09	24.75	3.25	2.5	8.75	24	0.38	3.75	20.31	52
2	8738, 8739	SDA	15	10.97	31	3.25	3	9	30.25	0.38	3.75	23.44	95
3	8738, 8739	SEA	18.5	10.59	45	5	3	12.5	44	0.25	3.75	25.59	255
4	8738	SFA	21	10.59	52.5	5	3	15	51.5	0.25	3.75	30.34	—
	8739	SFA	18.5	10.59	45	3.25	3	12.5	44	0.25	3.75	25.59	—
5	8738	SGA	30	15.5	78	9.25	4	22	77	0.25	7.5	39.41	—
	8739	SGA	30	15.5	66	—	4	22	65	0.25	7.5	37.88	—
6 *[32]*	8739	SHA	36	17.03	90	—	—	—	—	—	—	—	—

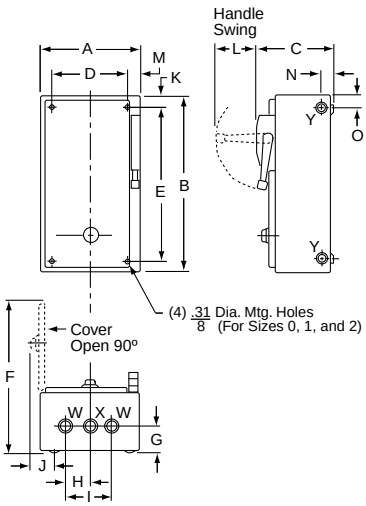


Figure 16.15: NEMA 1 Enclosure (Sizes 0–2)

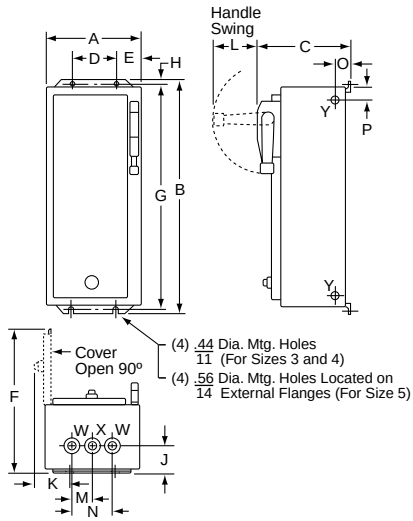


Figure 16.16: NEMA 1 Enclosure (Sizes 3–6)

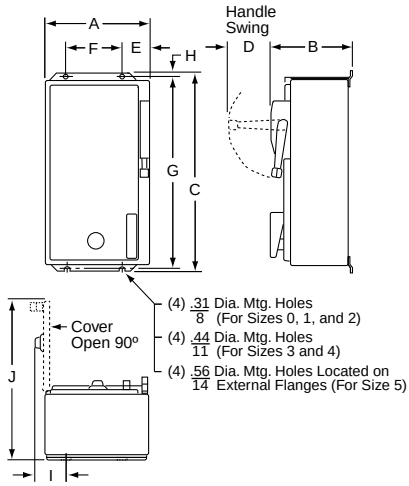


Figure 16.17: NEMA 12/3R Enclosure

NOTE: Illustrations may not represent the actual enclosure; they are intended for dimensional information only.

[31] The dimensions shown in all tables above are also for **Form FF4T** (standard control transformer), **Form FF4T11** (100 VA extra-capacity), and **Form FF4T12** (200 VA extra-capacity).
[32] Size 6 enclosures are floor mounting.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 4X Dimensions

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.190: See Figure: NEMA 4X Polyester Enclosure, page 16-74 *[33]*

NEMA Size	Class	Dimensions (in inches)*[34]*					
		Type	A	B	C	E	F
0-2	8738 & 8739	SBW SCW SDW	25.25	11.4	27.00	17.88	25.75
3-4	8739	SEW SFW	26.31	11.4	33.50	18.50	32.25

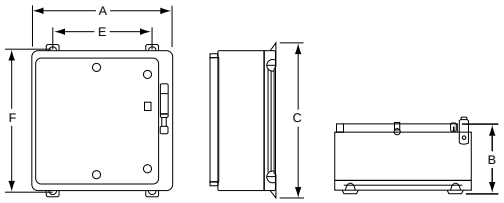


Figure 16.18: NEMA 4X Polyester Enclosure

Table 16.191: See Figure: NEMA 4X Stainless Steel Enclosure, page 16-74

NEMA Size	Class	Type	Dimensions (in inches) *[35]*												Bottom	Top & Bot.	Wt. (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	W	X	
0–1	8738, 8739	SBW SCW	13.75	8.34	25.19	3.25	2.5	8.75	24	0.59	3	1.63	2.31	18.53	0.75 Hub	1 Hub	52
2	8738, 8739	SDW	15	9.59	30.03	3.25	2.5	10	29.75	0.63	3	2	2.63	21.03	0.75 Hub	1.5 Hub	95
3	8738, 8739	SEW	18.5	10.56	45.19	5	3	12.5	44	0.59	3.5	2.63	3.19	25.5	0.75 Hub	2.5 Hub	255
4	8738	SFW	21	10.53	52.69	5	3	15	51.5	0.59	3.5	2.63	3.19	30.25	0.75 Hub	2.5 Hub	—
	8739	SFW	18.5	10.56	45.19	5	3	12.5	44	0.59	3.5	2.63	3.19	25.5	0.75 Hub	2.5 Hub	—
5	8738	SGW	30	15.5	78.09	9.25	4	22	77	0.56	6.09	3	3.5	39.41	0.75 Hub	3.5 Hub	—
	8739	SGW	30	13.89	66.09	5	4	22	65	0.56	6.09	3	3.5	37.88	0.75 Hub	3.5 Hub	—
6	8739	SHW	36	17.03	98	—	—	—	—	—	—	—	—	—	—	—	—

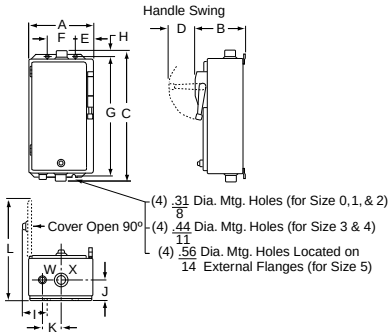


Figure 16.19: NEMA 4X Stainless Steel Enclosure

NOTE: Illustrations may not represent the actual enclosure; they are intended for dimensional information only.

Information on Hubs

Hubs are supplied with each NEMA 4X combination starter as shown in Table 16.192.

Note that hubs are only installed in stainless steel enclosures; they are supplied but not installed in polyester enclosures.

Table 16.192: Hubs

NEMA Size	Quantity	Hub Size (in.)
0–1	1 2	0.75 1.00
2	1 2	0.75 1.50
3–4	1 2	0.75 2.50

[33] See Table 16.192 for important information on hubs for NEMA 4X enclosures.
[34] The dimensions shown in all tables above are also for **Form FF4T** (standard control transformer), **Form FF4T11** (100 VA extra-capacity), and **Form FF4T12** (200 VA extra-capacity).
[35] Dimensions also for **Form F4T** (standard control transformer), **Form F4T11** (100 VA extra capacity) and **Form F4T12** (200 VA extra capacity).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Multipole Lighting Contactors, Type L and LX

Class **8903** / Refer to Catalog **8903CT9701**



Type L



Type LX

Features

- LED ready *[1]*
- 30 A fluorescent lighting rating, 20 A tungsten lighting rating
- Electrically and mechanically held
- 2 through 12-pole versions
- Field-convertible contacts with N.O. and N.C. indicators (8 N.C. contacts maximum *[2]*)
- Silver-Cadmium-Oxide double break contacts

NOTE: When ordering contactors with more than 8 poles, the catalog number configuration is the number of normally open contacts followed by a 0 and then the number of normally closed contacts (i.e. for 4 N.O. and 6 N.C. on a 10-pole contactor, order 8903LG406V02).

File E78427 CCN NRNT | File LR60905 Class 3211 07

Table 16.193: Multipole Lighting Contactors (50–60 Hz) (replace ●●● with the voltage code)

Contact Ampere Ratings	No. of Poles	NEMA 1 General Purpose Enclosure	NEMA 1 Flush Mounting General Purpose Enclosure with Plaster Adjustment	NEMA 3R Rainproof Enclosure*[3]*	NEMA 4X Watertight, Dusttight, and Corrosion-Resistant Glass-Polyester Enclosure	NEMA 4X Watertight, Dusttight Brushed Stainless Steel Enclosure	NEMA 12/3R*[4]* Dusttight and Driptight Industrial Use Enclosure	Open Type *[5]*
		Type *[6]*	Type *[6]*	Type *[6]*	Type *[6]*	Type *[6]*	Type *[6]*	Type *[6]*
Electrically Held*[2]*								
30 *[6]*	2 3 4	LG20●●● LG30 ●●● LG40 ●●●	LF20●●● LF30 ●●● LF40 ●●●	LH20 ●●● LH30 ●●● LH40 ●●●	LWW20●●● LWW30 ●●● LWW40 ●●●	LW20●●● LW30 ●●● LW40 ●●●	LA20●●● LA30 ●●● LA40 ●●●	LO20 ●●● LO30 ●●● LO40 ●●●
	6 8 10	LG60●●● LG80 ●●● LG1000 ●●●	LF60●●● LF80 ●●● LF1000 ●●●	LH60 ●●● LH80 ●●● LH1000 ●●●	LWW60 ●●● LWW80 ●●● LWW1000 ●●●	LW60 ●●● LW80 ●●● LW1000●●●	LA60 ●●● LA80●●● LA1000 ●●●	LO60 ●●● LO80 ●●● LO1000 ●●●
	12	LG1200 ●●●	LF1200 ●●●	LH1200 ●●●	LWW1200 ●●●	LW1200 ●●●	LA1200●●●	LO1200 ●●●
Mechanically Held *[2] [7]*								
30 *[6]*	2 3 4	LXG20 ●●● LXG30 ●●● LXG40 ●●●	LXF20 ●●● LXF30 ●●● LXF40 ●●●	— — —	LXWW20 ●●● LXWW30●●● LXWW40 ●●●	LXW20 ●●● LXW30 ●●● LXW40 ●●●	LXA20 ●●● LXA30 ●●● LXA40 ●●●	LXO20 ●●● LXO30 ●●● LXO40 ●●●
	6 8 10	LXG60 ●●● LXG80 ●●● —	LXF60 ●●● LXF80 ●●● LXF1000 ●●●	— — —	LXWW60 ●●● LXWW80 ●●● LXWW1000 ●●●	LXW60 ●●● LXW80 ●●● LXW1000 ●●●	LXA60 ●●● LXA80 ●●● LXA1000 ●●●	LXO60 ●●● LXO80●●● LXO1000 ●●●
	12	LXG1200 ●●●	LXF1200 ●●●	—	LXWW1200 ●●●	LXW1200 ●●●	LXA120 0●●●	LXO1200 ●●●

NOTE: If a holding circuit contact is required for proper operation, order an additional contact.



Type L3L



Type LO80



Type L3R



Type LO60



Type L1R

Power Pole Kits

The kits in Table 16.194 are used to add 30 A power poles to existing Type L contactors when additional circuits are required. Type L lighting contactors come with mounting brackets, so that adder poles may be mounted from the front by a single captive screw. Adder poles come standard with N.O. contacts which are convertible to N.C.

For How to Order Information, see page 16-28.

NOTE: 12 N.C. poles are only available with a 120 V coil (V02).

Table 16.194: Power Poles for Type L or LX

Power Pole Adder Kit*[8]* Class 8903 Type		Can Only Be Added to Contactor Type*[9]*
Single Pole	—	LO60 , LXO60, LO80, LXO80, LO1000, LXO1000
	L1R	
Double Pole	L3L	
	L3R	

Table 16.195: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24	—	V01
120	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
Specify	Specify	V99

Table 16.196: How to Order

To Order Specify:		Catalog Number			
• Class Number • Type Number	• Voltage Code • Form(s)	Class	Type	Voltage Code	Form(s)
		8903	LXG60	VO4	CF4R6

Factory Modifications (Forms): page 16-81
Replacement Coils: page 16-124
Replacement Contacts: page 16-126

[1] Conforms to NEMA -410 -2015 and UL508: Table 46.1 and Section 61C test procedures for LED loads up to 16 A at 120 V. Devices were tested to 20 A at 120 V and conform to the test requirements.

[2] Factory conversion of N.O. contacts to N.C., order by catalog number (for example, for 6 N.O. and 2 N.C. poles on an 8 pole contactor, order as 8903LG62V02). Versions are available from the factory with up to 12 N.C. poles for Type L (electrically held) or 2, 4, or 6 N.C. poles for Type LX (mechanically held). For field conversion, there is a maximum of eight N.C. poles for Type L (electrically held) and a maximum of six N.C. poles for Type LX (mechanically held) contactors.

[3] Cannot support control transformer Forms.

[4] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.

[5] Separate enclosures are available for these devices. It may be possible to improve delivery by ordering an open type contactor and separate Class 9991 enclosure.

[6] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.195. All lighting contactors come with separate control as standard.

[7] When ordering **Form C** on mechanically held devices, you must also include**Form R6**.

[8] 8903LO (electrically held) devices can accommodate 10 or 12 N.C. contacts use **only** 120 V 60Hz coils.

[9] LO60 and LXO60: add single-pole kits only, 1 on each side, for converting to 8-pole. To maintain proper operation, the contactor cannot be converted to more than 8 poles.
LO80 and LXO80: use single-pole kits, 1 on each side, for converting to 10-pole and use two-pole kits, 1 on each side, for converting to 12-pole.
LO1000 and LXO1000: remove the existing single-pole kit and install two-pole kits, 1 on each side, for converting to 12-pole.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Electrically Held



Mechanically Held

Features

- Electrically and mechanically held
- 30–800 A lighting ratings
- LED ready *[10]*
- 2- through 5-pole versions (5-poles through 200 A)
- UL Listed short-circuit rating up to 100,000 Amperes
- Factory wired controls and clearly marked termination points
- Quick ship on most items in 5–7 days

Table 16.197: Coil Voltage Codes

Voltage *[11]*		Code
60 Hz	50 Hz	
24 *[12]*	—	V01
120	110	V02
208	—	V08
240	220	V03
277	—	V04 *[13]*
480	440	V06
Specify	Specify	V99

Table 16.198: Multi-pole Lighting Contactors—Type S, 50–60 Hz (replace ●●● with the voltage code)

Contact Ampere Ratings	No. of Poles	NEMA 1 General Purpose Enclosure	NEMA 1 Flush Mounting General Purpose Enclosure with Plaster Adjustment	NEMA Type 3R Rainproof Enclosure *[14]*	NEMA 4X Watertight, Dusttight and Corrosion-Resistant Glass-Polyester Enclosure	NEMA Type 4X *[15]* Watertight and Dusttight Enclosure	NEMA Type 12/3R *[16]* Dusttight and Driptight Industrial Use Enclosure	Open Type
		Type *[17]*	Type *[17]*	Type *[17]*	Type *[17]*	Type *[17]*	Type *[17]*	Type *[17]*
Electrically Held *[11]*								
30	2 3 4 5	SMG1●●● SMG2●●● SMG3●●● SMG4●●●	SMF1●●● SMF2●●● SMF3●●● SMF4●●●	SMH1●●● SMH2●●● SMH3●●● SMH4●●●	SMW21●●● SMW22●●● SMW23●●● SMW24●●●	SMW1●●● SMW2●●● SMW3●●● SMW4●●●	SMA1●●● SMA2●●● SMA3●●● SMA4●●●	SMO1●●● *[18]* SMO2●●● *[18]* SMO3●●● *[18]* SMO4●●● *[18]*
60	2 3 4 5	SPG1●●● SPG2●●● SPG3●●● SPG4●●●	SPF1●●● SPF2●●● SPF3●●● SPF4●●●	SPH1●●● SPH2●●● SPH3●●● SPH4●●●	SPW21●●● SPW22●●● SPW23●●● SPW24●●●	SPW1●●● SPW2●●● SPW3●●● SPW4●●●	SPA1●●● SPA2●●● SPA3●●● SPA4●●●	SPO1●●● *[18]* SPO2●●● *[18]* SPO3●●● *[18]* SPO4●●● *[18]*
100	2 3 4 5	SQG1●●● SQG2●●● SQG3●●● SQG4●●●	SQF1●●● SQF2●●● — —	SQH1●●● SQH2●●● SQH3●●● SQH4●●●	SQW21●●● SQW22●●● — —	SQW1●●● SQW2●●● SQW3●●● SQW4●●●	SQA1●●● SQA2●●● SQA3●●● SQA4●●●	SQO1●●● *[18]* SQO2●●● *[18]* SQO3●●● *[18]* SQO4●●● *[18]*
200	2 3 4 5	SVG1●●● SVG2●●● SVG3●●● SVG4●●●	— — — —	SVH1●●● SVH2●●● — —	— — — —	SVW1●●● SVW2●●● SVW3●●● SVW4●●●	SVA1●●● SVA2●●● SVA3●●● SVA4●●●	SVO1●●● SVO2●●● SVO3●●● SVO4●●●
300	2 3	SXG1●●● SXG2●●●	— —	— —	— —	SXW1●●● SXW2●●●	SXA1●●● SXA2●●●	SXO1●●● SXO2●●●
400 *[19]*	2 3	SYG1●●● SYG2●●●	— —	— —	— —	SYW1●●● SYW2●●●	SYA1●●● SYA2●●●	SYO1●●● SYO2●●●
600 *[19]*	2 3	SZG1●●● SZG2●●●	— —	— —	— —	SZW1●●● SZW2●●●	SZA1●●● SZA2●●●	SZO1●●● SZO2●●●
800 *[19]*	2 3	SJG1●●● SJG2●●●	— —	— —	— —	SJW1●●● SJW2●●●	SJA1●●● SJA2●●●	SJO1●●● SJO2●●●
Mechanically Held *[11]*								
30	2 3 4 5	SMG10●●● SMG11●●● SMG12●●● SMG13●●●	SMF10●●● SMF11●●● SMF12●●● SMF13●●●	— — — —	SMW31●●● SMW32●●● SMW33●●● SMW34●●●	SMW10●●● SMW11●●● SMW12●●● SMW13●●●	SMA10●●● SMA11●●● SMA12●●● SMA13●●●	SMO10●●● *[18]* SMO11●●● *[18]* SMO12●●● *[18]* SMO13●●● *[18]*
60	2 3 4 5	SPG10●●● SPG11●●● SPG12●●● SPG13●●●	SPF10●●● SPF11●●● SPF12●●● SPF13●●●	— — — —	SPW31●●● SPW32●●● SPW33●●● SPW34●●●	SPW10●●● SPW11●●● SPW12●●● SPW13●●●	SPA10●●● SPA11●●● SPA12●●● SPA13●●●	SPO10●●● *[18]* SPO11●●● *[18]* SPO12●●● *[18]* SPO13●●● *[18]*
100	2 3 4 5	SQG10●●● SQG11●●● SQG12●●● SQG13●●●	SQF10●●● SQF11●●● — —	— — — —	SQW31●●● SQW32●●● — —	SQW10●●● SQW11●●● SQW12●●● SQW13●●●	SQA10●●● SQA11●●● SQA12●●● SQA13●●●	SQO10●●● Separate enclosures are available for these devices. It may be possible to improve delivery time by ordering an open type contactor and a separate Class 9991 enclosure from the section, Separate Enclosures, page 16-112. SQO11●●● Separate enclosures are available for these devices. It may be possible to improve delivery time by ordering an open type

[10] Conforms to NEMA -410 -2015 and UL508: Table 46.1 and Section 61C test procedures for LED loads up to 16 A at 120 V. Devices were tested to 20 A at 120 V and conform to the test requirements.
[11] Lighting contactors come with separate control as standard—except electrically held 400, 600, and 800 A devices, which come with common control as standard.
[12] 24 V coils are not available for 200–800 A devices. Contact your local sales office for more information.
[13] On 400–800 A electrically held contactors, for voltage code V04, you must select Form S (separate control).
[14] Cannot support control transformer forms.
[15] **For contactor sizes 30–300 A, NEMA 4X** enclosures are brush finished stainless steel.
[16] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[17] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes in Table 16.197.
[18] Separate enclosures are available for these devices. It may be possible to improve delivery time by ordering an open type contactor and a separate Class 9991 enclosure from the section, Separate Enclosures, page 16-112.
[19] **Form FF4T** comes standard; include the line voltage when ordering. Control voltage is 120–60.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.198 Multi-pole Lighting Contactors—Type S, 50–60 Hz (replace ●●● with the voltage code) (cont'd.)

Contact Ampere Ratings	No. of Poles	NEMA 1 General Purpose Enclosure	NEMA 1 Flush Mounting General Purpose Enclosure with Plaster Adjustment	NEMA Type 3R Rainproof Enclosure *[20]*	NEMA 4X Watertight, Dusttight and Corrosion-Resistant Glass-Polyester Enclosure	NEMA Type 4X *[21]* Watertight and Dusttight Enclosure	NEMA Type 12/3R *[22]* Dusttight and Driptight Industrial Use Enclosure	Open Type
		Type *[23]*	Type *[23]*	Type *[23]*	Type *[23]*	Type *[23]*	Type *[23]*	Type *[23]*
								contactor and a separate Class 9991 enclosure from the section,Separate Enclosures, page 16-112. SQO12●●● Separate enclosures are available for these devices. It may be possible to improve delivery time by ordering an open type contactor and a separate Class 9991 enclosure from the section,Separate Enclosures, page 16-112. SQO13●●● Separate enclosures are available for these devices. It may be possible to improve delivery time by ordering an open type contactor and a separate Class 9991 enclosure from the section,Separate Enclosures, page 16-112.
200	2 3 4	SVG10●●● SVG11●●● SVG12●●●	— — —	— — —	— — —	SVW10●●● SVW11●●● SVW12●●●	SVA10●●● SVA11●●● SVA12●●●	SVO10●●● SVO11●●● SVO12●●●
300	2 3	SXG13●●● SXG14●●●	— —	— —	— —	SXW13●●● SXW14●●●	SXA13●●● SXA14●●●	SXO13●●● SXO14●●●
400	2 3	SYG16●●● SYG17●●●	— —	— —	— —	SYW16●●● SYW17●●●	SYA16●●● SYA17●●●	SYO16●●● SYO17●●●
600	2 3	SZG18●●● SZG19●●●	— —	— —	— —	SZW18●●● SZW19●●●	SZA18●●● SZA19●●●	SZO18●●● SZO19●●●

NOTE: If a holding circuit contact is required for proper operation, order an additional contact.

[20] Cannot support control transformer forms.
[21] **For contactor sizes 30–300 A, NEMA 4X** enclosures are brush finished stainless steel.
[22] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[23] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes in Table 16.197.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Power Pole Kits for Type S Only

A single-pole or double-pole kit can be added to any 2- or 3-pole 30 or 60 A Type S lighting contactor to make a 4- or 5-pole device. Factory assembled 4- and 5-pole contactors utilize the basic 3-pole device with a single or double-pole kit installed. Only one power pole can be added per contactor. Sufficient room is provided in all enclosure styles for the addition of a power pole kit.

Table 16.199: Power Pole Kits for Type S Only

Ampere Rating	Description	Class 9999 Type
30	One N.O. One N.C. One N.O. and One N.C. Two N.O. Two N.C.	9999SB6 9999SB7 9999SB8 9999SB9 9999SB10
60	One N.O. One N.C. One N.O. and One N.C. Two N.O. Two N.C.	9999SB21 *[20]* 9999SB22 *[20]* 9999SB23 *[20]* 9999SB24 *[20]* 9999SB25 *[20]*

Factory Modifications (Forms): page 16-81
Replacement Coils: page 16-124
Replacement Contacts: page 16-126
Dimensions: page 16-85

For How to Order Information, see page 16-28.

[20] When power pole is added to 60 Ampere contactor, a 4-pole coil is also required. Order from Table 16.321. 60 A power poles are suitable for use with copper or aluminum wire.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



File E16151
CCN NRNT

NOTE: If a holding circuit contact is required for proper operation, order an additional contact.

Features

The features include: disconnect switch and circuit breaker versions; rugged flange-mounted handle; easy installation; occupation of less space; increased operator protection; room to spare for modifications; Class R fuse clips standard; electrically and mechanically held; 30–600 A.

It is desirable to install the branch-circuit protective device and lighting contactor, combining switching and over-current protection, in one enclosure. Combination lighting contactors are well suited for industrial, highway and area lighting applications, or where a lighting circuit may have to be disconnected for periodic maintenance. They may also be used for resistance heating loads.

Table 16.200: Fusible or Non-Fusible Disconnect Switch—3-Pole, 50–60 Hz (replace ●●● with the voltage code)

Contactor Ampere Rating	Fuse Clip Size (A)	Fuse Clip Spacing (V)	NEMA 1 General Purpose Enclosure	NEMA 4 & 4X *[21]* Watertight and Dusttight Enclosure Stainless Steel	NEMA 12/3R*[22]* Dusttight, Oiltight Driptight, Industrial Use Enclosure
			Type *[23]*	Type *[23]*	Type *[23]*
Electrically Held*[24]*					
30	None 30 30	— 600 250	SMG60●●● SMG61●●● SMG62●●●	SMW60●●● SMW61●●● SMW62●●●	SMA60●●● SMA61●●● SMA62●●●
60	None 60 60	— 600 250	SPG60●●● SPG61●●● SPG62●●●	SPW60●●● SPW61●●● SPW62●●●	SPA60●●● SPA61●●● SPA62●●●
100	None 100 100	— 600 250	SQG60●●● SQG61●●● SQG62●●●	SQW60●●● SQW61●●● SQW62●●●	SQA60●●● SQA61●●● SQA62●●●
200	None 200 200	— 600 250	SVG60●●● SVG61●●● SVG62●●●	SVW60●●● SVW61●●● SVW62●●●	SVA60●●● SVA61●●● SVA62●●●
300	None 400 400	— 600 250	SXG60●●● SXG61●●● SXG62●●●	SXW60●●● SXW61●●● SXW62●●●	SXA60●●● SXA61●●● SXA62●●●
Mechanically Held*[24]*					
30	None 30 30	— 600 250	SMG70●●● SMG71●●● SMG72●●●	SMW70●●● SMW71●●● SMW72●●●	SMA70●●● SMA71●●● SMA72●●●
60	None 60 60	— 600 250	SPG70●●● SPG71●●● SPG72●●●	SPW70●●● SPW71●●● SPW72●●●	SPA70●●● SPA71●●● SPA72●●●
100	None 100 100	— 600 250	SQG70●●● SQG71●●● SQG72●●●	SQW70●●● SQW71●●● SQW72●●●	SQA70●●● SQA71●●● SQA72●●●
200	None 200 200	— 600 250	SVG70●●● SVG71●●● SVG72●●●	SVW70●●● SVW71●●● SVW72●●●	SVA70●●● SVA71●●● SVA72●●●
300	None 400 400	— 600 250	SXG70●●● SXG71●●● SXG72●●●	SXW70●●● SXW71●●● SXW72●●●	SXA70●●● SXA71●●● SXA72●●●

Table 16.201: Coil Voltage Codes *[24]*

Voltage		Code
60 Hz	50 Hz	
24 *[25]*	—	V01
120	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
Specify	Specify	V99

Table 16.202: Circuit Breaker—3-Pole, 50–60 Hz (replace ●●● with the voltage code)

Contactor Ampere Rating	Circuit Breaker		NEMA 1 General Purpose Enclosure	NEMA 4 & 4X*[21]* Watertight and Dusttight Enclosure Stainless Steel (30-300 A)	NEMA 12/3R*[22]* Dusttight, Oiltight, Driptight, Industrial Use Enclosure
	Ampere Rating	Maximum Volts	Type *[23]*	Type *[23]*	Type *[23]*
Electrically Held*[24]*					
30	30	600	SMG81●●●	SMW81	SMA81●●●
60	60	600	SPG81●●●	SPW81●●●	SPA81●●●
100	100	600	SQG81●●●	SQW81●●●	SQA81●●●
200	200	600	SVG81●●●	SVW81●●●	SVA81●●●
300	300	600	SXG81●●●	SXW81●●●	SXA81●●●
400	400	600	SYG81●●●	SYW81●●●	SYA81●●●
600	600	600	SZG81●●●	SZW81●●●	SZA81●●●
Mechanically Held*[24]*					
30	30	600	SMG91●●●	SMW91●●●	SMA91●●●
60	60	600	SPG91●●●	SPW91●●●	SPA91●●●
100	100	600	SQG91●●●	SQW91●●●	SQA91●●●
200	200	600	SVG91●●●	SVW91●●●	SVA91●●●
300	300	600	SXG91●●●	SXW91●●●	SXA91●●●
400	400	600	SYG91●●●	SYW91●●●	SYA91●●●
600	600	600	SZG91●●●	SZW91●●●	SZA91●●●

For How to Order Information, see page page 16-28.

[21] For **NEMA 4 and 4X** watertight, dusttight ,and corrosion-resistant glass-polyester enclosures, add **Form G18** (limited to 100 A max.). 400 and 600 A enclosures are painted sheet steel **(NEMA Type 4 & 4X).**
[22] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[23] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes shown in Table 16.197.
[24] The control/coil voltage must be specified.
[25] 24 V coils are not available for 200 A or larger devices. Contact the Customer Care Center for additional information.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NIGHT-MASTER®



Long Version



Short Version

UL Approved for
Service Entrance

File E16151
CCN NRNT

Night-Master™ Combination Lighting Contactors

The Class 8903 Night-Master Outdoor Combination Lighting Contactor is the only product on the market that is UL Listed for Service Entrance. This allows the contactor to be pole mounted when used to control lighting in remote locations such as parks, monuments, group sports facilities, and streets and highways.

Factory modifications such as photocells, time switches, key operated selector switches, and the combination of photocells and time switches (photocell on, time switch off) allow the Night-Master™ to be located in applications where manual operation of lights is not practical.

Night-Master comes in long and short versions in sizes 30 through 200 Amperes. Most common modifications can be provided from the factory, or added in the field to the pre-drilled and pre-tapped panels.

NIGHT-MASTER™ Outdoor Combination Lighting Contactors offer a disconnecting means, overcurrent protection, and a lighting contactor in one NEMA 3R Rainproof enclosure. These combination units satisfy the requirements of the National Electrical Code and UL 508 for service entrance equipment.

Features

- Solid neutral standard
- Grounding lug standard
- Padlocking provisions
- Short and long versions available
- Electrically held Type S lighting contactor
- Eliminates the need for separate mounted safety switches
- Additional panel space eliminates the need for external mounting of time clocks
- Separate control comes standard on all lighting contactors

NOTE: If a holding circuit contact is required for proper operation, order an additional contact.

Table 16.203: Disconnect Switch Type—3-Pole (replace ●●● with the voltage code)

Contactor Ampere Rating	Fuse Clip Size (A)	Fuse Clip Spacing (V)	Short Version	Long Version
			Class 8903 Type 3R *[26]*	Class 8903 Type 3R Stainless Steel *[26]*
30	30 30	600 250	SMC61●●● SMC62●●●	SMH63●●● SMH64●●●
60	60 60	600 250	SPC61●●● SPC62●●●	SPH63●●● SPH64●●●
100	100 100	600 250	SQC61●●● SQC62●●●	SQH63●●● SQH64●●●
200	200 200	600 250	SVC61●●● SVC62●●●	SVH63●●● SVH64●●●

Table 16.204: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[27]*	—	V01
120	110	V02
208	—	V08
240	220	V03
277	—	V04
480	440	V06
Specify	Specify	V99

Table 16.205: Circuit Breaker Type—3-Pole (replace ●●● with the voltage code)

Contactor Ampere Rating	Circuit Breaker		Short Version	Long Version
	Ampere Rating	Maximum Volts	Class 8903 Type 3R *[26]*	Class 8903 Type 3R Stainless Steel *[26]*
30	30	600	SMC81●●●	SMH83●●●
60	60	600	SPC81●●●	SPH83●●●
100	100	600	SQC81●●●	SQH83●●●
200	200	600	SVC81●●●	SVH83●●●

For How to Order Information, see page 16-28.

[26] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.204.
[27] 24 V coils are not available for 200 A devices. Contact your local sales office for additional information.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Factory Modifications (Forms)

NOTE: If a UL label is required, consult the Customer Care Center at 1-888-778-2733. Some Forms **are not** UL Listed.

Standard Equipment dimensions and enclosure construction may not apply when certain special features are added. Such cases should be referred to the factory with a complete description when precise dimensions are required.

Table 16.206: Lighting Contactor Forms (Factory Modifications)

Description	Form Letter	NEMA Enclosure Type	Used On					Rating (A)						
			Std.		Combo		Night-Master 30–200 A	30 Type L	30	60	100	200	300	400, 600, 800
			Elec. Held	Mech. Held	Elec. Held	Mech. Held								
On-Off push button(momentary contact)	A3	1	—	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y
	A3	3R, 4, 12	—	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y
On-Off push button (with holding circuit interlock)	A12	Any	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y	Y
Hand-Off-Auto selector switch. To substitute a key operated selector switch, use Form C33 and specify positions, legend marking, and key removal. This form must be used with another selector switch form (example: CC33).	C	1	Y	Y *[28]*	Y	Y *[28]*	—	Y	Y	Y	Y	Y	Y	Y
	C	3R, 4, 12	Y	Y *[28]*	Y	Y *[28]*	Y	Y	Y	Y	Y	Y	Y	Y
On-Off selector switch. To substitute a key operated selector switch, use Form C33 and specify positions, legend marking, and key removal. This form must be used with another selector switch form (example: C33C6).	C6	1	Y	Y	Y	Y	—	Y	Y	Y	Y	Y	Y	Y
	C6	3R, 4, 12	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Control circuit fuse (1 fuse)	F	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Control circuit fuses (2 fuses)	F4	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Control circuit transformer standard capacity 50/60 Hz														
Primary Fuses / Secondary Fuses / Transformer capacity														
2 *[29]* / 0 / Std.	F4T	1, 4, 12	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y *[30]*	Y *[31]*
2 / 1 / Std.	FF4T	1, 4, 12	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y *[30]*	Y *[31]*
2 / 1 / 100 VA Additional	FF4T11	1, 4, 12	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y *[30]*	Y *[30]*	Y *[31]*
2 / 1 / 200 VA Additional	FF4T12	1, 4, 12	Y	Y	Y	Y	Y	Y*[30]*	Y	Y	Y *[30]*	Y *[30]*	Y *[30]*	Y *[31]*
2 / 1 / 300 VA Additional	FF4T13	1, 4, 12	Y	Y	Y	Y	Y	Y	Y *[30]*	Y *[30]*	Y *[30]*	Y *[30]*	Y *[30]*	Y *[31]*
Noise reduced enclosure and shock mounted panel	G4	Any	—	Y	—	—	—	Y	Y	Y	Y	Y	Y	Y
Addition of photoelectric receptacle	G10	1 *[32]*, 3R, 12	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y	Y
Addition of photoelectric receptacle with photo-cell	G101	1 *[32]*, 3R, 12	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y	Y
Addition of photoelectric receptacle and relay (R6)*[33]*	G10R6	1 *[32]*, 12	—	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y
With photo-cell installed *[33]*	G101R6	1 *[32]*, 12	—	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y
Addition of terminal blocks (other than standard). The designation *xx* represents the number of terminals needed. Available in multiples of 5 only.														
Wired	G56xx	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Unwired	G50xx	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Addition of 24 hour time clock (120–277 V only)	K14	1, 4, 12	Y	Y	Y	Y	—	Y	Y	Y	Y	Y	Y	Y
Addition of 24 hour time clock w/day omission (120–277 V)	K141	1, 4, 12	Y	Y	Y	Y	—	Y	Y	Y	Y	Y	Y	Y
Addition of 7 day time clock (120–277 V)	K142	1, 4, 12	Y	Y	Y	Y	—	Y	Y	Y	Y	Y	Y	Y
Addition of 24 hour time clock (120–277 V only)	K14	3R	—	—	—	—	Y	—	Y	Y	Y	Y	—	—
Addition of 24 hr time clock w/skip day (120–277 V)	K141	3R	—	—	—	—	Y	—	Y	Y	Y	Y	—	—
Addition of 7 day time clock (120–277 V)	K142	3R	—	—	—	—	Y	—	Y	Y	Y	Y	—	—
Addition of solid neutral terminal block	N	1, 4, 12	Y	Y	Y	Y	Std.	Y	Y	Y	Y	Y	Y	Y
Red pilot light	P1	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Two or more lights *[34]* (each)	P	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Red push-to-test pilot light	P21	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Interlock necessary for pilot light one needed for each additional pilot light	*[35]*	Any	Y	Y	Y	Y	Y	*[36]*	Y	Y	Y	Y	Y	Y
Two-wire interface for mechanically held *[33]*	R6	Any	—	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y
Addition of undervoltage and overvoltage relay	R46	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Three wire control for long distance applications*[33]*	R62	Any	—	Y	—	Y	—	Y	Y	Y	Y	Y	Y	Y
Auxiliary contacts (specify number of N.O. + N.C.)	X	Any	Y	Y	Y	Y	Y	*[36]*	Y	Y	Y	Y	Y	Y
Auxiliary electrical interlock installed on disconnect switch or circuit breaker operating mechanism	Y74	Any	—	—	Y	Y	Y	—	Y	Y	Y	Y	Y	Y
Coil transient suppressor (120 Vac only)	Y145	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	—	—
Addition of lightning arrestor	Y1532	Any	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Substitute copper only lugs for standard	Y157	Any	Y	Y	Y	Y	Y	—	—	Y	Y	Y	Y	Y

[28] When ordering **Form C** on mechanically held devices, you must also include**Form R6**.
[29] Transformer voltage codes.
[30] Single primary voltage must be specified using the codes shown in Table 16.207.
[31] Mechanically held only. Electrically held device has a control circuit requiring a 120 V secondary, therefore, a transformer is supplied. The transformer comes wired to L1 and L2 unless **Form S** is called for. It is supplied with two primary and one secondary fuse.
[32] Photocell mounted on a NEMA 1 enclosure is designed for indoor areas which rely on natural light. Addition of the photocell does not make the enclosure suitable for outdoor (NEMA Type 3R) installations.
[33] Available for 24 V, 120 V, 240 V, 277 V and 480 V applications only.
[34] For electrically held enclosed devices, the first pilot is wired in parallel with the coil. Operating interlocks are required for all additional pilot lights. Mechanically held devices require operating interlocks for all pilot lights.
[35] **Do not** use Form X for any interlock wired in series with a pilot light, but **do** specify how the pilot light and interlock are to be wired into the circuit.
[36] Electrically held 20 A multipole contactors cannot add interlocks. Additional poles can be used for the same function, however. Mechanically held (Type LX) provide one double throw auxiliary (or status) contact as standard.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.207: Voltage Codes

Voltage at 60 Hz (primary–secondary)	Code
120–24	V89
208–120	V84
240–24	V82
240–120	V80
277–120	V85
480–24	V83
480–120	V81
480–240	V87
600–120	V86

Order Example

You have device 8903SMG2V02. V02 means that you need a coil voltage of 120-60/110-50, wired for separate control.
You want to add Form FF4T, with transformer voltages of 480 V primary, 120 V secondary. The new and complete Class, Type, Voltage Code and Form number are:

Class	Type	Voltage Code	Form *[37]*
8903	SMG2	V81	FF4T

Table 16.208: Lighting Contactor Field Modifications

Description	Types L & LX	Type S						Form No.
	30 A	30 A	60 A	100 A	200 A	300 A	400, 600, 800 A	
	Kit	Kit	Kit	Kit	Kit	Kit	Kit	
Auxiliary Contacts								
1 N.O. LH or RH Mounting	—	9999SX6	9999SX6	9999SX6	9999SX6	9999SX6	9999SX6	X
1 N.C. LH or RH Mounting	—	9999SX7	9999SX7	9999SX7	9999SX7	9999SX7	9999SX7	
1 N.C. & 1 N.O. Isolated LH or RH	—	9999SX8	9999SX8	9999SX8	9999SX8	9999SX8	9999SX8	
1 N.O. Overlapping LH or RH	—	—	—	—	—	—	—	
1 N.C. Overlapping LH or RH	—	9999SX10	9999SX10	9999SX10	9999SX10	9999SX10	9999SX10	
Control Circuit Fuse Holder								
Single Fuse Unit	—	—	—	—	—	—	—	F
Two Fuse Unit	—	—	—	—	—	—	—	F4
Transformers	9070TF50	9070TF100	9070TF100	9070TF150	9070TF300	9070TF500	9070TF750	T
Oversized Enclosures (Non-Combo)								
NEMA 1	—	—	—	—	—	—	—	—
NEMA 4	9991SDW3	9991SDW3	9991SDW3	—	—	—	—	—
NEMA 12	—	—	—	—	—	—	—	—
Standard Enclosures								
NEMA 1–Surface Mount	9991LXG1	—	—	—	—	—	—	—
NEMA 3R	9991SDH1	9991SCH2	9991SDH1	9991SEH1	—	—	—	—
NEMA 4–Standard	9991SDW1	9991SCW1	9991SDW1	—	—	—	—	—
NEMA 4–With 2 Cvr Mtd. Clsng Plts	9991SDW11	—	9991SDW11	9991SEW11	—	—	—	—
NEMA 4X–Glass Polyester	9991SDW20	9991SCW20	9991SDW20	—	—	—	—	—
NEMA 12	9991SDA11	9991SCA11	9991SDA11	—	—	—	—	—
NEMA 1–Flushmount–Complete	—	—	—	9991SEF11	—	—	—	—
NEMA 1–Flush Mount Parts	—	—	—	—	—	—	—	—
FLUSH PARTS	—	—	—	—	—	—	—	—
Standard–Elec. held	—	—	—	—	—	—	—	—
Standard–Mech. held	—	—	—	—	—	—	—	—
Mounting Strap	9991SDF2	—	9991SDF2	—	—	—	—	—
Pull Box	—	—	—	—	—	—	—	—
Internal Operator Mounting Bracket	3010215901	3010215901	3010215901	3010215901	3010215901	3010215901	3010215901	G53
Solid Neutral	9999SN1	9999SN1	9999SN1	9999SN1	9999SN2	9999SN2	—	N
Combination Lighting Contactor Disconnect Interlock Kit								
Breaker Type	—	9999R26	9999R26	9999R26	9999R26	9999R26	9999R26	
1-Pole	—	9999R27	9999R27	9999R27	9999R27	9999R27	9999R27	
2-Pole								
Disconnect Type	—	—	9999TC10	9999TC10	9999R8	—	9999R26	Y74
1-Pole	—	9999TC21	9999TC20	9999TC20	9999R9	—	9999R27	
2-Pole								
Lightning Arrestor								
175 Vac to Ground Max 2 or 3 wire Grounded	SDSA1175	SDSA1175	SDSA1175	SDSA1175	SDSA1175	SDSA1175	SDSA1175	Y1532
650 Vac to Ground Max 3 or 4 wire Grounded	SDSA3650	SDSA3650	SDSA3650	SDSA3650	SDSA3650	SDSA3650	SDSA3650	

[37] Form numbers should always be shown in alphabetical order.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Cover Mounted Control Units

Table 16.209: Mechanically Held

Description	Form No.	TYPE LX	TYPE S					
		30 A	30 A	60 A	100 A	200 A	300 A	400, 600, 800 A
		Kit	Kit	Kit	Kit	Kit	Kit	Kit
Push Button (On-Off) NEMA 1 Enclosure	A3	9999BLX —	*[38]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*
NEMA 3R, 4 or 12 Enclosure		9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*	9001KA2 9999SA3 *[39]*
Selector Switch (2 Position) NEMA 1 Enclosure	C6	9999BLX —	9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —
NEMA 3R, 4 or 12 Enclosure		9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —	9001KN244 —
Selector Switch (3 Position) NEMA 1 Enclosure (must include two wire control relay, Form R6	C	9999BLX 9999SC2	9001KN260 —	9001KN260 —	9001KN260 —	9001KN260 —	9001KN260 —	9001KN260 —
NEMA 3R, 4 or 12 Enclosure		9001KN260 —						
Two Wire Control Relay (Form R6) *[40]*	R6	—	8501XO11	8501XO11	8501XO11	8501XO11	8501XO11	8501XO11

Table 16.210: Electrically Held

Description	Form No.	TYPE L	TYPE S					
		30 A	30 A	60 A	100 A	200 A	300 A	400, 600, 800 A
		Kit	Kit	Kit	Kit	Kit	Kit	Kit
Pilot Lights (Red and Green) NEMA 1 Enclosure NEMA 3R, 4 or 12 Enclosure	P1	9999SP28R	9999SP2R 9999SP28R	— 9999SP28R	*[41]* 9999SP14R 9999SP28R	*[42]* 9999SP28R 9999SP28R	*[42]* 9999SP28R 9999SP28R	9999SP28R 9999SP28R
Push Buttons *[43]* NEMA 1 Enclosure	A12	9999BLX 9999SA10	9999SA10	9999SA10	9999SA3	9999SA3	9999SA3	9999SA3
NEMA 3R, 4 or 12 Enclosure		9999SA3	9999SA3	9999SA3	9999SA3	9999SA3	9999SA3	9999SA3
Selector Switch (2 Position) NEMA 1 Enclosure	C6	9999BLX 9999SC22	9999SC22	9999SC22	9999SC22	9001KN244	9001KN244	9001KN244
NEMA 3R, 4 or 12 Enclosure		9001KN244	9001KN244	9001KN244	9001KN244	9001KN244	9001KN244	9001KN244
Selector Switch (3 Position) NEMA 1 Enclosure	C	9999BLX 9999SC2	9999SC2	9999SC2	9999SC2	9999SC8	9999SC8	9999SC8
NEMA 3R, 4 or 12 Enclosure		9999SC8	9999SC8	9999SC8	9999SC8	9999SC8	9999SC8	9999SC8


[38] No field installed kit available.
[39] Mechanically held contactors need two distinct signals to operate. An N.O. contact block must be added to the Class 9999 Type SA3 push button kit.
[40] Form R6 available for 24 V, 120 V, 240 V and 277 V only.
[41] 2- or 3-pole only. For 4- or 5-pole use Class 9999SP15R.
[42] The coil voltage must be the same as the pilot light rating. Kit contains one (1) Class 9001, Type KP1R6 120 V/60 Hz red pilot light control unit. For other voltages, refer to the Class 9001, Type KP Control Section.
[43] Requires holding circuit interlock for Type S or additional power pole on Type L devices.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025


Open Type

Table 16.211: Open Type

Electrically Held							Mechanically Held						
Rating (A)	Type	No. of Poles	Dimensions				Type	Dimensions					
			A	B	C	E		A	B	C	D	E	F
30	LO	2–4	**2.88** 73	**5** 127	**4.62** 117	**3.12** 79	LXO	**2.88** 73	—	—	**8.81** 224	**3.25** 83	**7.70** 196
		6	**4.25** 108	**5** 127	**4.62** 117	**3.12** 79		**4.25** 108	—	—	**8.81** 224	**3.25** 83	**7.70** 196
		8–12	**5.63** 143	**5** 127	**4.62** 117	**3.12** 79		**5.63** 143	—	—	**8.81** 224	**3.25** 83	**7.70** 196
30	SMO	2–3	**4.34** 110	**3.22** 82	**4.22** 107	**3.50** 89	—	**7.15** 182	**3.79** 96	**4.68** 119	—	**6.04** 153	—
		4–5	**4.34** 110	**4.25** 108	**4.22** 107	**3.50** 89	—	**7.15** 182	**4.54** 115	**4.68** 119	—	**6.04** 153	—
60	SPO	2–3	**5.33** 135	**4.31** 110	**4.94** 125	**5.50** 140	—	**8.25** 210	**4.61** 117	**5.23** 133	—	**7.81** 198	—
		4–5	**6.22** 158	**5.61** 142	**4.94** 125	**5.50** 140	—	**8.70** 221	**5.90** 150	**5.23** 133	—	**7.81** 198	—
100	SQO	2–3	**7.09** 180	**5.45** 138	**6.50** 165	**7.26** 184	—	**10.13** 257	**5.94** 151	**6.72** 171	—	**7.26** 184	—
		4–5	**7.82** 199	**9.75** 248	**6.50** 165	**7.26** 184	—	**10.56** 268	**9.75** 248	**6.72** 171	—	**7.26** 184	—
200	SVO	2–3	**9.14** 232	**6.00** 152	**6.50** 165	**9.14** 232	SVO	**11.35** 288	**6.00** 152	**6.72** 171	—	**9.14** 232	—
		4, 5*[44]*	**9.14** 232	**9.75** 248	**6.50** 165	**9.14** 232		**11.55** 293	**9.75** 248	**6.72** 171	—	**9.14** 232	—
300	SXO	2–3	**12.31** 313	**8.66** 220	**8.74** 222	**12.25** 311	SXO	**12.31** 313	**8.66** 220	**10.50** 267	—	**12.31** 313	—
400	SYO	2–3	—	**12.33** 313	**9.00** 229	**27.78** 706	SYO	—	**8.66** 220	**10.50** 267	—	**21.00** 533	—
600	SZO						SZO						
800	SJO	2–3	—	**12.33** 313	**11.94** 303	**42.70** 1085	—	—	—	—	—	—	—

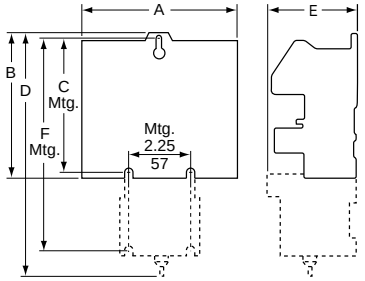

Open Type L and LX



Open Type S

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

[44] 5-Pole, electrically held only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 1

Table 16.212: NEMA 1 Non-Combination Lighting Contactors, Electrically Held (EH) and Mechanically Held (MH)

Rating (A)	Type	No. of Poles	Form(s)		Fig.	Dimensions, in. (mm)											
						A	B	C	D	E	F	G	H	I	J	K	L
30	LG, LXG	Any	Standard, A3, A12, C, C6, F, P, R6, Y48		A	**7.81** (198)	**12.69** (322)	**6.03** (153)	—	**1.09** (28)	**10.50** (267)	**1.09** (28)	**1.09** (28)	**5.63** (143)	**5.75** (146)	**1.09** (28)	**5.63** (143)
			P, T		B	**11.88** (302)	**11.88** (302)	**7.44** (189)	**9.75** (248)	**1.06** (27)	**1.06** (27)	**9.75** (248)	**1.06** (27)	**1.06** (27)	**0.31** (8)	—	—
			K14, K141, K142		A	**16.00** (406)	**22.00** (559)	**7.38** (188)	**8.00** (203)	**1.00** (25)	**20.00** (508)	**1.00** (25)	**1.00** (25)	**14.00** (356)	**7.38** (188)	**1.00** (25)	**7.00** (178)
30	SMG	2-5	EH	Standard, A12, C, C6, P, X	A	**6.00** (152)	**10.00** (254)	**5.28** (134)	**3.00** (76)	**0.88** (22)	**8.13** (206)	**1.00** (25)	**0.94** (24)	**4.13** (105)	**5.00** (127)	—	—
			MH	Standard, X													
			EH	T	A	**6.34** (161)	**15.88** (403)	**5.19** (132)	**14.38** (365)	**4.66** (118)	**0.28** (7)	**0.75** (19)	**0.84** (21)	—	—	—	—
				N	B	**14.88** (378)	**14.12** (359)	**7.56** (192)	**12.75** (324)	**1.06** (27)	**1.06** (27)	**12.00** (305)	**1.06** (27)	**1.06** (27)	**0.31** (8)	—	—
			MH	T, N, R6													
				A3, C, C6, P	B	**8.12** (206)	**14.12** (359)	**9.73** (247)	**6.00** (152)	**1.06** (27)	**1.06** (27)	**12.00** (305)	**1.06** (27)	**1.06** (27)	**0.31** (8)	—	—
60	SPG	2-3	EH	Standard, A12, C, C6, P, X	A	**7.81** (198)	**12.69** (322)	**6.03** 153)	—	**1.09** (28)	**10.50** (267)	**1.09** (28)	**1.09** (28)	**5.63** (143)	**5.75** (146)	**1.09** (28)	**5.63** (143)
		4-5	EH	Standard, A12, C, C6, P, X	B	**8.12** (206)	**14.12** (359)	**9.73** (247)	**6.00** (152)	**1.06** (27)	**1.06** (27)	**12.00** (305)	**1.06** (27)	**1.06** (27)	**0.31** (8)	—	—
		2-5	EH, MH	T, N, R6	B	**14.88** (378)	**14.12** (359)	**7.56** (192)	**12.75** (324)	**1.06** (27)	**1.06** (27)	**12.00** (305)	**1.06** (27)	**1.06** (27)	**0.31** (8)	—	—
		2-5	MH	Standard, A3, C, C6, P, X	B	**8.12** (206)	**14.12** (359)	**9.73** (247)	**6.00** (152)	**1.06** (27)	**1.06** (27)	**12.00** (305)	**1.06** (27)	**1.06** (27)	**0.31** (8)	—	—
100	SQG	2, 3 *[45]*	EH	Standard, A12, C, C6, F, P, X, T	B	**11.25** (286)	**25.15** (639)	**8.99** (288)	**8.60** (218)	**1.25** (32)	**1.25** (32)	**22.32** (567)	**1.42** (36)	**1.42** (36)	**0.44** (11)	—	—
			MH	Standard, F, X, T													
		2, 3	EH	N, R6, T, T10-T13 *[46]*	B	**18.15** (461)	**29.15** (740)	**9.24** (234)	**15.50** (394)	**9.24** (234)	**1.33** (34)	**26.50** (673)	**1.33** (34)	**1.33** (34)	**0.44** (11)	—	—
			MH	A3, C, C6, N, R6, T, T10-T13 *[46]*													
		4, 5	EH	Standard, A12, C, C6, F, P, X	B	**11.25** (286)	**25.15** (639)	**8.99** (288)	**8.60** (218)	**1.25** (32)	**1.25** (32)	**22.32** (567)	**1.42** (36)	**1.42** (36)	**0.44** (11)	—	—
			MH	Standard, F, X													
			EH	*[46]*	B	**18.15** (461)	**29.15** (740)	**9.24** (234)	**15.50** (394)	**9.24** (234)	**1.33** (34)	**26.50** (673)	**1.33** (34)	**1.33** (34)	**0.44** (11)	—	—
			MH	A3, C, C6 *[46]*													
			EH, MH	N, R6, T, T10-T13	B	**22.15** (563)	**39.15** (994)	**10.24** (260)	**19.50** (495)	**1.33** (34)	**1.33** (34)	**36.50** (927)	**1.33** (34)	**1.33** (34)	**0.44** (11)	—	—
200	SVG	All	EH, MH	Standard and All Forms	B	**22.15** (563)	**39.15** (994)	**10.24** (260)	**19.50** (495)	**1.33** (34)	**1.33** (34)	**36.50** (927)	**1.33** (34)	**1.33** (34)	**0.44** (11)	—	—
300	SXG	All	EH, MH	Standard and All Forms	B	**17.21** (437)	**44.21** (1123)	**12.83** (325)	**13.00** (330)	**2.11** (54)	**2.11** (54)	**40.00** (1016)	**2.11** (54)	**2.11** (54)	**0.56** (14)	—	—
400, 600	SYG, SZG	All	EH, MH	Standard and All Forms	B	**20.21** (513)	**65.75** (1670)	**13.10** (333)	**11.00** (972)	**4.61** (117)	**4.61** (117)	**64.50** (1638)	**0.63** (16)	**0.63** (16)	**0.69** (18)	—	—
800	SJG	2-3	With or Without Any Forms		C	**34.50** (876)	**93.00** (2362)	**23.50** (597)	Floor Mounting								

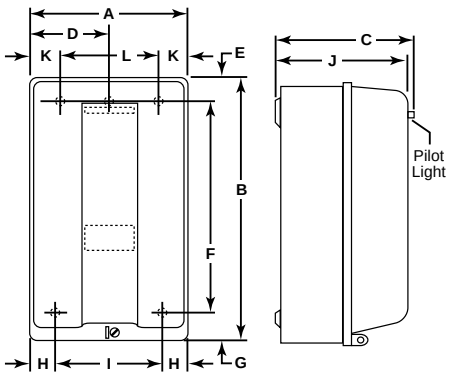


Figure A

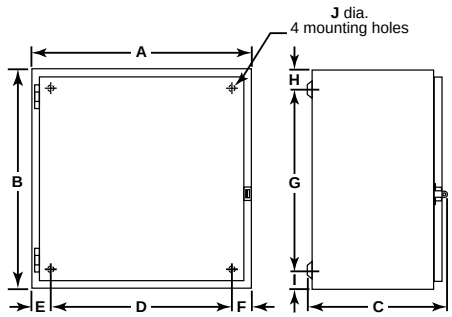


Figure B

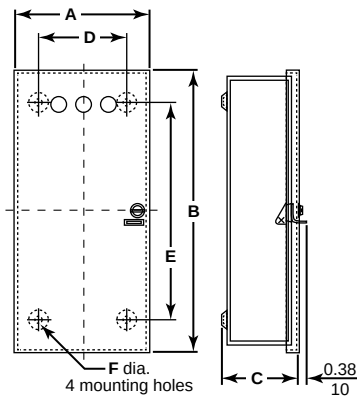


Figure C

[45] Factory transformer only.
[46] All Type K Forms.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 1 Flush Mounting

Table 16.213: NEMA 1 Flush Mounted Enclosures

Rating (A)	Type	Form(s)		Dimensions						
				A	B	C	D	E	F	G
30	LF	Standard, F, Y48, R6		**15.19** 386	**8.94** 227	**7.63** 194	**12.88** 327	**5.44** 138	**10.94** 278	**5.13** 130
	LXF	A3, A12, C, C6, T, P		**24.00** 610	**17.50** 445	**15.00** 381	**19.25** 489	**7.12** 181	—	—
30	SMF	EH	Std., A12, C, C6, P, X	**13.44** 341	**7.19** 183	**5.88** 149	**11.13** 283	**4.75** 121	**9.19** 233	**4.50** 114
		MH	Std., X							
		EH	T, N	**24.00** 610	**17.50** 445	**15.00** 381	**19.25** 489	**5.75** 146	—	—
		MH	A3, C, C6, T, N, P, R6							
60	SPF	EH	Std., A12, C, C6, P, X	**15.19** 386	**8.94** 227	**7.63** 194	**12.88** 327	**5.44** 138	**10.94** 278	**5.13** 130
		MH	Std., X							
		EH	T, N	**24.00** 610	**17.50** 445	**15.00** 381	**19.25** 489	**5.75** 146	—	—
		MH	A3, C, C6, T, N, P, R6							
100	SQF	With or without any Forms		**31.00** 787	**16.75** 425	**14.25** 362	**26.25** 667	**8.00** 203	—	—

EH = Electrically Held. MH = Mechanically Held.

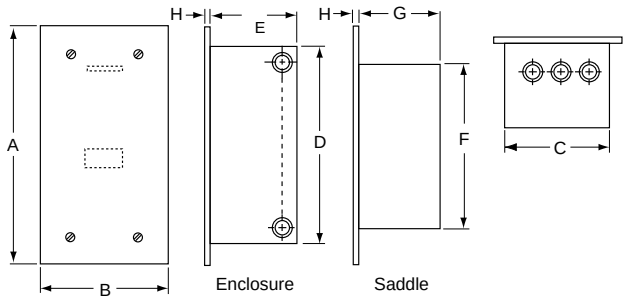


Figure 16.20: NEMA 1 Flush Mounted

Dimensions: **in.** mm

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 3R, 4, and 4X

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.214: NEMA 3R Enclosures


Rating (A)	Type	No. of Poles	A	B	C	D1	D2	E	F	G1	G2	H1	H2	J	K	L	M	N	P	K.O. X	K.O. Y
30	SMH	All	8.83 224	12.30 312	7.12 181	1.39 35	1.44 37	6.00 152	7.50 191	2.64 67	2.16 55	2.08 53	2.62 66	14.28 363	1.37 35	1.37 35	1.88 48	4.38 111	1.83 46	0.5 0.75 1	0.5 0.75 1
30	LH	All	9.83 250	16.30 414	8.62 219	1.39 35	1.44 37	7.00 178	11.50 292	2.64 67	2.16 55	2.08 53	2.62 66	16.78 426	1.31 33	1.75 44	2.13 54	4.88 124	1.83 46	1 1.25 1.5	0.5 0.75
60	SPH																				
100	SQH	All	12.83 326	25.30 643	8.62 219	1.39 35	1.44 37	10.00 254	20.50 521	2.64 67	2.16 55	2.08 53	2.62 66	19.78 502	1.31 33	1.94 49	2.44 62	6.38 162	1.83 46	1 1.25 2 2.5	0.5 0.75
200	SVH	All	12.83 326	40.30 1024	9.12 232	1.39 35	1.44 37	10.00 254	35.50 902	2.64 67	2.16 55	2.08 53	2.62 66	20.28 515	1.31 33	2.31 59	2.69 68	6.38 162	1.83 46	1 1.25 2 2.5	0.5 0.75

Table 16.215: NEMA 4 and 4X Stainless Steel Only Enclosures *[47]*


Rating (A)	Type	No. of Poles	Forms		Dimensions for Stainless Steel Enclosures												Bottom Hub Only	Top & Bottom Hub
					A	B	C	D	E	F	G	H	I	J	K	L	W	X
30	LW LXW	Any	Standard, F, R6, Y48		8.13 206	7.88 200	16.19 411	1.56 40	5.00 127	15.00 381	0.60 15	1.94 49	14.75 375	2.00 51	2.63 67	0.31 8	0.75	1.5
			A3, A12, C, C6, P, T		12.62 321	7.81 198	14.69 373	2.56 65	7.50 191	13.50 343	0.63 16	3.38 86	18.44 468	1.69 43	2.31 59	0.31 8	0.75	1
30	SMW	2–5	EH	Std., A12, C, C6, P, X	6.38 162	7.13 181	13.19 335	1.56 40	3.25 83	12.00 305	0.63 16	1.19 30	11.81 300	1.63 41	2.31 59	0.31 8	0.75	1
			MH	Std., F, X														
			EH	T	12.63 321	7.11 181	14.69 373	2.56 65	7.50 191	13.50 343	0.63 16	3.19 81	18.50 470	1.64 42	2.31 59	0.31 8	0.75	1
			EH	N, R6	14.88 378	7.25 184	16.31 414	2.56 65	9.75 248	15.00 381	0.63 16	3.19 81	20.88 530	2.06 52	2.63 67	0.31 8	0.75	1.5
			MH	A3, C, C6, T, N, P, R6														
60	SPW	2–5	EH	Std., A12, C, C6, P, X	8.13 206	7.88 200	16.19 411	1.56 40	5.00 127	15.00 381	0.60 15	1.94 49	14.75 375	2.00 51	2.63 67	0.31 8	0.75	1.5
			MH	Std., A3, C, C6, P, X														
			EH	T, N, R6	14.88 378	7.25 184	16.31 414	2.56 65	9.75 248	15.00 381	0.63 16	3.88 98	20.88 530	2.06 52	2.63 67	0.31 8	0.75	1.5
			MH	A3, C, C6, T, N, P, R6														
100	SQW	2–3	EH	Std., A12, C, C6, F, N, R6, P, T, T10-13, X	18.15 461	8.77 223	32.21 818	3.08 78	12.00 305	30.50 775	0.61 15	3.67 93	26.71 678	2.58 66	3.19 81	0.44 11	0.75	2.5
			MH	Std., A3, C, C6, F, N, P, R6, T, T10-13, X														
		4–5	EH	Std., A12, C, C6, F, P *[48]*	18.15 461	8.77 223	32.21 818	3.08 78	12.00 305	30.50 775	0.61 15	3.67 93	26.71 678	2.58 66	3.19 81	0.44 11	0.75	2.5
			MH	Std., A3, C, C6, P *[48]*														
			EH	N, R6, T, T10-13	22.15 563	9.77 248	42.21 1072	3.08 78	16.00 406	40.50 1029	0.61 15	3.67 93	31.71 805	2.33 59	2.88 73	0.44 11	0.75	2.5
			MH	N, R6, T, T10-13														
200	SVW	All	EH, MH	Standard and All Forms	22.15 563	9.77 248	42.21 1072	3.08 78	16.00 406	40.50 1029	0.61 15	3.67 93	31.71 805	2.33 59	2.88 73	0.44 11	0.75	2.5
300	SXW	All	EH, MH	Standard and All Forms	17.21 437	12.63 321	47.21 1199	4.11 104	9.00 229	46.00 1168	0.61 15	4.59 117	28.32 719	3.11 79	5.75 146	0.56 14	0.75	3.5
400, 600	SYW SZW	All	EH, MH	Standard and All Forms	20.21 513	12.13 308	65.21 1656	4.11 104	12.00 305	64.00 1626	0.61 15	4.59 117	30.82 783	2.67 68	4.50 114	0.56 14	0.75 *[49]*	Two 3 *[49]*
800	SJW	2–3	With or without any Forms		34.50 876	23.50 597	101.00 2565	Floor Mounting										

EH = Electrically Held. MH = Mechanically Held.

NEMA 3R Enclosures

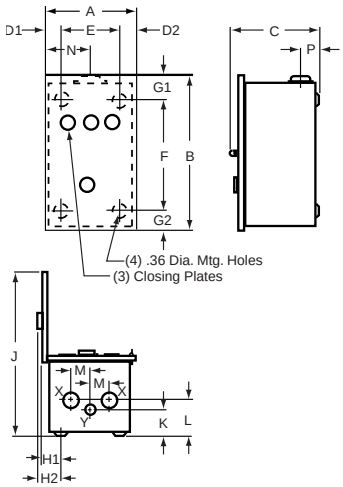

NEMA 4 and 4X Enclosures

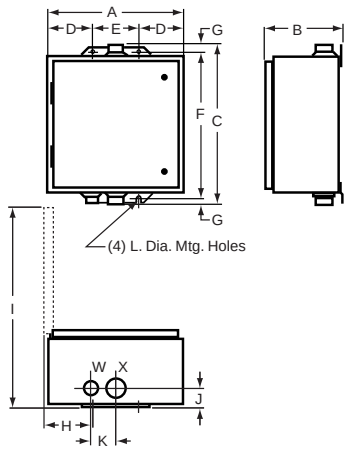

Dimensions: **in.** mm

[47] For glass polyester enclosures (through 100 A), see Table 16.104.
[48] All Type K Forms.
[49] X hub is 1/4 in. left of center. W hub shown is another X hub. K dimension is distance between two X hubs. Actual W hub is located 3-3/16 in. to the right of X hub shown.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 12/3R and Night-Master™, NEMA 3R

Table 16.216: See Figures: NEMA 12/3R (30–600 A) and NEMA 12/3R (800 A) (EH = Electrically Held; MH = Mechanically Held)

Ampere Rating	Type	Number of Poles	Form(s)		Dimensions A	B	C	D	E	F	G	H	I	J
30	LA LXA	Any	Standard, F, R6, Y48		**8.13** 206	**8.50** 216	**15.75** 400	**1.56** 40	**5.00** 127	**15.00** 381	**0.31** 8	**2.13** 54	**14.75** 375	**0.31** 8
			A3, A12, C, C6, P, T		**14.88** 378	**7.88** 200	**16.00** 406	**2.56** 65	**9.75** 248	**15.00** 381	**0.5** 13	**3.66** 93	**21.25** 540	**0.31** 8
30	SMA	2-5	EH	Std., A12, C, C6, P, X	**6.38** 162	**8.53** 217	**12.75** 324	**1.56** 40	**3.25** 83	**12.00** 305	**0.38** 10	**3.56** 90	**12.50** 318	**0.31** 8
			MH	Std., F, P, X										
			EH	T	**11.88** 302	**7.75** 197	**13.50** 343	**2.56** 65	**6.75** 171	**12.75** 324	**0.38** 10	**3.66** 93	**18.12** 460	**0.31** 8
			EH	N, R6	**14.88** 378	**7.88** 200	**16.00** 406	**2.56** 65	**9.75** 248	**15.00** 381	**0.50** 13	**3.66** 93	**21.25** 540	**0.31** 8
			MH	A3, C, C6, T, N, P, R6										
60	SPA	2-5	EH	Std., A12, C, C6, P, X	**8.13** 206	**9.28** 236	**16.00** 406	**1.56** 40	**5.00** 127	**15.00** 381	**0.50** 13	**3.66** 93	**15.38** 391	**0.31** 8
			MH	Std., A3, C, C6, P, X										
			EH	T, N, R6	**14.88** 378	**7.88** 200	**15.75** 400	**2.56** 65	**9.75** 248	**15.00** 381	**0.38** 10	**3.66** 93	**21.25** 540	**0.31** 8
			MH	A3, C, C6, T, N, P, R6										
100	SQA	2, 3	EH	Std., A12, C, C6, F, N, R6, P, T, T10-13, X	**18.15** 461	**9.24** 235	**31.50** 800	**3.08** 78	**12.00** 305	**30.50** 775	**0.50** 13	**3.67** 93	**26.71** 678	**0.44** 11
			MH	Std., A3, C, C6, F, N, P, R6, T, T10-13, X										
		4, 5	EH	Std., A12, C, C6, F, N, P, *[50]*										
			MH	Std., A3, C, C6, P, *[50]*										
			EH	N, R6, T, T10-13, *[50]*	**22.15** 563	**10.24** 260	**41.50** 1054	**3.08** 78	**16.00** 406	**40.50** 1029	**0.50** 13	**3.67** 93	**31.71** 805	**0.44** 11
			MH	N, R6, T, T10-13, *[50]*										
200	SVA	All	EH and MH	Standard and All Forms	**22.15** 563	**10.24** 260	**41.50** 1054	**3.08** 78	**16.00** 406	**40.50** 1029	**0.50** 13	**3.67** 93	**31.71** 805	**0.44** 11
300	SXA	All	EH and MH	Standard and All Forms	**17.21** 437	**13.33** 339	**47.00** 1194	**4.11** 104	**9.00** 229	**46.00** 1168	**0.50** 13	**4.59** 117	**28.32** 719	**0.56** 14
400, 600	SYA, SZA	All	EH and MH	Standard and All Forms	**20.21** 513	**13.00** 330	**65.00** 1651	**4.11** 104	**12.00** 305	**64.00** 1626	**0.50** 13	**5.31** 135	**30.87** 784	**0.69** 18
800	SJA	2-3	With or without any Forms		**93.00** 2362	**34.50** 876	**23.50** 597	Floor Mounting						

Table 16.217: Night-Master™ Outdoor Lighting Contactors (Short Version)—NEMA 3R Enclosures (see Figure: Night-Master Style)

Ampere Rating	Description	Type Number	A	B	C	D	E	F	G	H	J *[51]*	K	L	M	Knockouts N	P	Q
30	Disconnect Switch and Circuit Breaker Types	SMC61, 62, 81	**23.50** 597	**15.00** 381	**8.42** 214	**10.50** 267	**19.00** 483	**22.38** 568	**7.00** 178	**2.18** 55	1.50 38	**2.13** 54	**2.13** 54	**2.13** 54	0.50– 0.75	1–1.25 1.50	0.50– 0.75
60		SPC61, 62, 81															
100		SQC61, 62, 81	**34.53** 877	**20.00** 508	**8.42** 214	**10.50** 267	**30.04** 763	**33.41** 849	**7.00** 178	**2.18** 55	**2.0** 51	**2.68** 68	**2.68** 68	**3.44** 87	0.50– 0.75	1–1.25 2–2.50	1–1.25 1.5-2.0
200	Disconnect Switch Type	SVC61, 62	**48.37** 1229	**19.00** 483	**9.12** 232	**10.53** 267	**44.00** 1118	**47.25** 1200	**7.00** 178	**2.18** 55	**2.50** 64	**2.68** 68	**2.68** 68	**3.44** 87	0.50– 0.75	1–1.25 2–2.50	1–1.25 1.5–2.0
	Circuit Breaker Type	SVC81															

Table 16.218: Night-Master™ Outdoor Lighting Contactors (Long Version)—NEMA 3R Enclosures (see Figure: Night-Master Style)

Ampere Rating	Description	Type Number	A	B	C	D	E	F	G	H	J *[51]*	K	L	M	Knockouts N	P	Q
30	Disconnect Switch and Circuit Breaker Types	SMC63, 64, 83	**38.88** 987	**15.00** 381	**8.42** 214	**10.42** 265	**34.38** 873	**37.76** 959	**7.00** 178	**2.18** 55	**1.50** 38	**2.13** 54	**2.13** 54	**2.13** 54	0.50– 0.75	1–1.25 1.50	0.50– 0.75
60		SPC63, 64, 83															
100		SQC63, 64, 83	**42.53** 1080	**20.00** 508	**8.42** 214	**10.42** 265	**38.04** 966	**41.41** 1052	**7.00** 178	**2.18** 55	**2.0** 51	**2.68** 68	**2.68** 68	**3.44** 87	0.50– 0.75	1–1.25 2–2.50	1.–1.25 1.5–2.0
200	Disconnect Switch Type	SVC63, 64	**56.37** 1432	**19.00** 483	**9.12** 232	**10.53** 267	**52.00** 1321	**55.25** 1403	**7.00** 178	**2.18** 55	**2.50** 64	**2.68** 68	**2.69** 68	**3.44** 87	0.50– 0.75	1–1.25 2–2.50	1–1.25 1.5–2.0
	Circuit Breaker Type	SVC83															

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

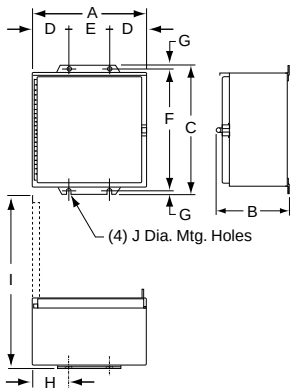


Figure 16.21: NEMA 12/3R (30–600 A)

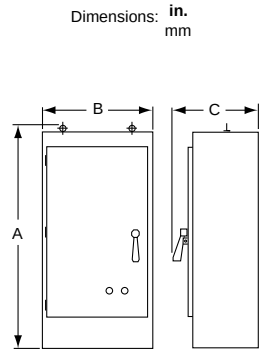


Figure 16.22: NEMA 12/3R (800 A)

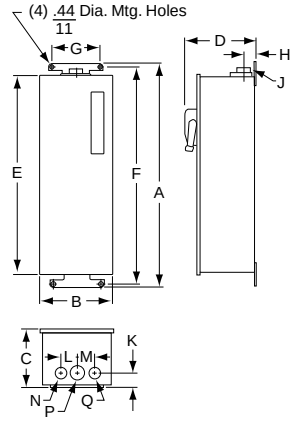


Figure 16.23: Night-Master Style

[50] All Type K Forms using Class 9001 Type K control units.
[51] Conduit size.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Combination Lighting Contactors

Table 16.219: See Figure: NEMA 1 Enclosure, Combination Devices

Ampere Rating	Type	Dimensions *[52]*															Top & Bot.		Sides
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	W	X	Y
30	SMG6_, SMG8_	**9.50** 241	**22.50** 572	**8.37** 213	**6.38** 162	**20.50** 521	**14.68** 373	**1.81** 46	**1.69** 43	**3.37** 86	**3.38** 86	**1.06** 27	**3.25** 83	**2.18** 55	**1.25** 32	**0.87** 22	0.50-0.75	0.50-0.75	.50
	SMG7_, SMG9_	**13.75** 349	**23.00** 584	**8.36** 212	**10.63** 270	**21.00** 533	**20.07** 510	**1.87** 47	**1.88** 48	**3.76** 96	**2.06** 52	**1.06** 27	**3.25** 83	**2.18** 55	**1.25** 32	**0.87** 22	0.50-0.75-1.0	0.50-0.75-1.0	.50
60	SPG6_, SPG8_	**10.50** 267	**26.00** 660	**9.62** 244	**7.37** 187	**24.00** 610	**17.00** 432	**2.12** 54	**2.00** 51	**4.00** 102	**2.06** 52	**1.06** 27	**3.25** 83	**2.18** 55	**1.25** 32	**0.87** 22	1.0-1.25	0.50-0.75	.50
	SPG7_, SPG9_	**15.00** 381	**28.75** 730	**9.62** 244	**11.62** 295	**26.25** 667	**21.50** 546	**2.18** 55	**2.00** 51	**4.00** 102	**2.56** 65	**1.31** 33	**3.25** 83	**2.18** 55	**1.25** 32	**0.87** 22	1.0-1.25	0.50-0.75	.50

Table 16.220: See Figure: NEMA 1 Enclosure

Ampere Rating	Type	Dimensions *[52]*															Top & Bot.		Sides
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	W	X	Y
100	SQG6_, SQG7_ SQG81, SQG91	**15.25** 387	**39.50** 1003	**10.60** 269	**9.25** 235	**3.00** 76	**22.68** 576	**41.00** 1041	**2.69** 68	**5.38** 137	**2.83** 72	**3.74** 95	**5.00** 127	—	**1.21** 31	**0.90** 23	1.-1.25 2.-2.50	0.50-0.75	0.50
200	SVG6_, SVG7_ SVG81, SVG91	**16.00** 406	**50.00** 1270	**10.68** 271	**10.00** 254	**3.00** 76	**23.68** 601	**51.50** 1308	**2.69** 68	**5.38** 137	**2.83** 72	**3.74** 95	**5.00** 127	—	**1.21** 31	**0.90** 23	2.50	0.50-0.75	0.50
300	SXG6_, SXG7_	**20.00** 508	**75.00** 1905	**14.37** 365	**12.00** 305	**4.00** 102	**29.43** 748	**77.00** 1956	**3.19** 81	—	**3.52** 89	**7.00** 178	**9.25** 235	—	—	—	0.50-0.75	3.00	—
	SXG81, SXG91	**20.00** 508	**63.00** 1600	**14.37** 365	**12.00** 305	**4.00** 102	**27.43** 697	**65.00** 1651	**3.19** 81	—	**3.52** 89	**7.00** 178	**5.00** 127	—	—	—	0.50-0.75	3.00	—
400	SYG81, SYG91	**36.00** 914	**90.00** 2286	**17.00** 432	Floor Mounting Enclosure												—	—	—
600	SZG81, SZG91																		

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

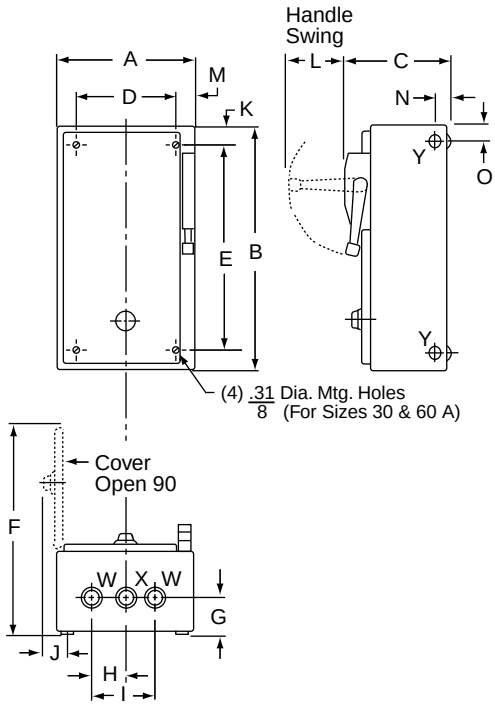


Figure 16.24: NEMA 1 Enclosure, Combination Devices

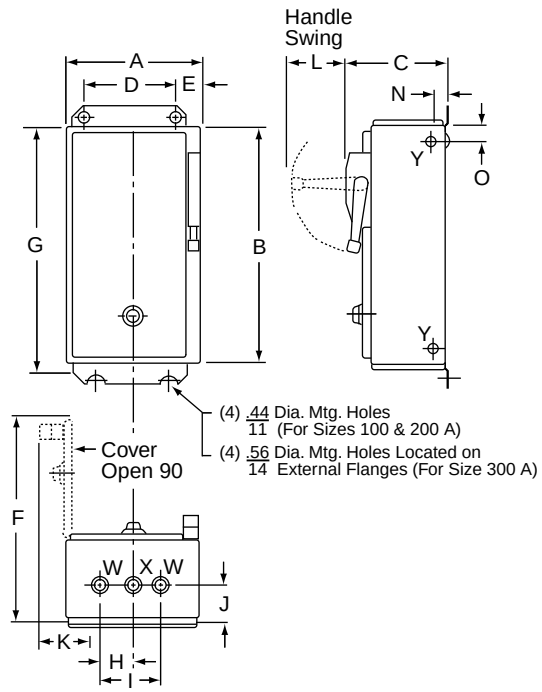


Figure 16.25: NEMA 1 Enclosure

[52] Dimensions are the same for **Form FF4T** (standard control transformer), **Form FF4T11** (100 VA extra capacity) and **Form FF4T12** (200 VA extra capacity).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.221: See Figure: NEMA 4, 4X Enclosure

Ampere Rating	Type	Dimensions *[53]*													
		A	B	C	D	E	F	G	H	I	J	K	L	W	X
30	SMW6_ , SMW8_	**9.50** 241	**8.36** 212	**24.76** 629	**3.25** 83	**2.50** 64	**4.50** 114	**23.50** 597	**0.63** 16	**3.00** 76	**1.62** 41	**2.31** 59	**14.31** 363	0.75 Hub	1.0 Hub
	SMW7_, SMW9_	**13.75** 349	**8.36** 212	**25.26** 642	**3.25** 83	**4.75** 121	**4.25** 108	**24.00** 610	**0.63** 16	**5.25** 133	**1.62** 41	**2.31** 59	**20.14** 512	0.75 Hub	1.0 Hub
60	SPW6_, SPW8_	**10.50** 267	**9.61** 244	**28.26** 718	**3.25** 83	**2.50** 64	**5.50** 140	**27.00** 686	**0.63** 16	**3.00** 76	**2.00** 51	**2.63** 67	**16.56** 421	0.75 Hub	1.50 Hub
	SPW7_, SPW9_	**15.00** 381	**9.61** 244	**31.01** 788	**3.25** 83	**5.38** 137	**4.25** 108	**29.75** 756	**0.63** 16	**5.88** 149	**2.00** 51	**2.63** 67	**21.06** 535	0.75 Hub	1.50 Hub
100	SQW6_, SQW7_ SQW81, SQW91	**15.25** 387	**10.60** 269	**41.76** 1061	**5.00** 127	**2.50** 64	**10.25** 260	**40.50** 1029	**0.63** 16	**3.24** 82	**2.61** 66	**3.19** 81	**22.18** 563	0.75 Hub	2.50 Hub
200	SVW6_, SVW7_ SVW81, SVW91	**16.00** 406	**10.56** 268	**52.26** 1327	**5.00** 127	**2.50** 64	**11.00** 279	**51.00** 1295	**0.63** 16	**3.24** 82	**2.61** 66	**3.19** 81	**23.00** 584	0.75 Hub	2.50 Hub
300	SXW6_, SXW7_	**20.00** 508	**14.21** 361	**78.12** 1984	**9.25** 235	**4.00** 102	**12.00** 305	**77.00** 1956	**0.56** 14	**4.77** 121	**2.96** 75	**3.50** 89	**29.43** 748	0.75 Hub	3.50 Hub
	SXW81, SXW91	**20.00** 508	**14.21** 361	**66.12** 1679	**5.00** 127	**4.00** 102	**12.00** 305	**65.00** 1651	**0.56** 14	**4.77** 121	**2.96** 75	**3.50** 89	**27.43** 697	0.75 Hub	3.50 Hub
400	SYW81, SYW91	**36.00** 914	**17.71** 450	**98.00** 2489	Floor Mounting Enclosure									—	—
600	SZW81, SZW91														

Table 16.222: See Figure: NEMA 12/3R Enclosure

Ampere Rating	Type	Dimensions *[53]*									
		A	B	C	D	E	F	G	H	I	J
30	SMA6_ , SMA8_	**9.50** 241	**8.36** 212	**24.26** 616	**3.25** 83	**2.50** 64	**4.50** 114	**23.50** 597	**0.38** 10	**3.25** 83	**14.31** 363
	SMA7_, SMA9_	**13.75** 349	**10.10** 257	**24.76** 629	**3.25** 83	**4.75** 121	**4.25** 108	**24.00** 610	**0.38** 10	**5.50** 140	**22.00** 559
60	SPA6_, SPA8_	**10.50** 267	**9.61** 244	**27.76** 705	**3.25** 83	**2.50** 64	**5.50** 140	**27.00** 686	**0.38** 10	**3.25** 83	**16.56** 421
	SPA7_, SPA9_	**15.00** 381	**10.98** 279	**30.51** 775	**3.25** 83	**5.38** 137	**4.25** 108	**29.75** 756	**0.38** 10	**6.13** 156	**23.43** 595
100	SQA6_, SQA7 SQA81, SQA91	**15.25** 387	**10.59** 269	**42.00** 1067	**5.00** 127	**3.00** 76	**9.25** 235	**41.00** 1041	**0.50** 13	**3.75** 95	**22.31** 567
200	SVA6_, SVA7_ SVA81, SVA91	**16.00** 406	**10.52** 267	**52.50** 1334	**5.00** 127	**3.00** 76	**10.00** 254	**51.50** 1308	**0.50** 13	**3.75** 95	**23.00** 584
300	SXA6_, SXA7_	**20.00** 508	**14.21** 361	**78.00** 1981	**9.25** 235	**4.00** 102	**12.00** 305	**77.00** 1956	**0.50** 13	**7.75** 197	**29.43** 748
	SXA81, SXA91	**20.00** 508	**14.21** 361	**66.00** 1676	**5.00** 127	**4.00** 102	**12.00** 305	**65.00** 1651	**0.50** 13	**7.75** 197	**27.43** 697
400	SYA81, SYA91	**36.00** 914	**17.71** 450	**90.00** 2286	Floor Mounting Enclosure						
600	SZA81, SZA91										

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

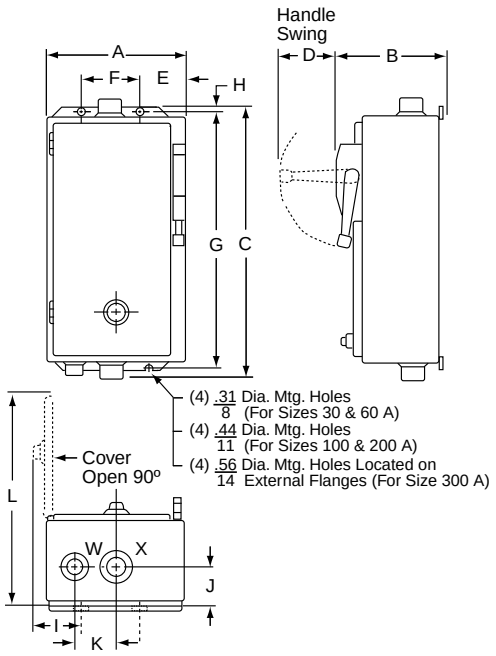


Figure 16.26: NEMA 4, 4X Enclosure

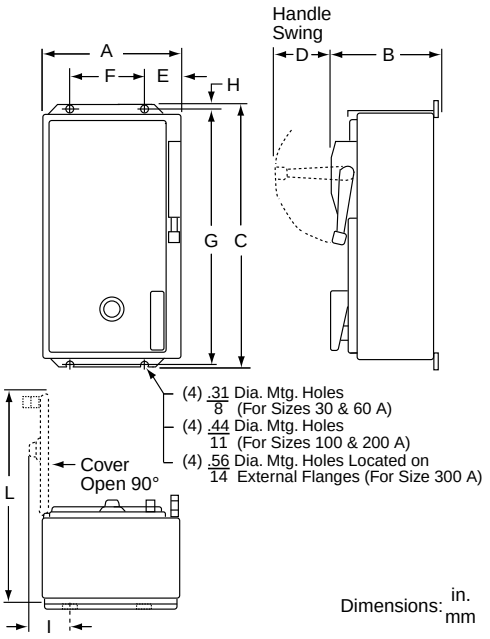


Figure 16.27: NEMA 12/3R Enclosure

[53] Dimensions are the same for **Form FF4T** (standard control transformer), **Form FF4T11** (100 VA extra capacity) and **Form FF4T12** (200 VA extra capacity).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



8910DP22V09
Definite Purpose Contactor



8910DP42V14
Definite Purpose Contactor



8910DPA33V04
Definite Purpose Contactor

Definite purpose contactors are ideal for heating, air conditioning, refrigeration, data processing, and food service equipment. New compact 1 and 2-Pole contactors are available along with standard size 2, 3, and 4-Pole devices.

They feature quick connect terminals and binder head screws for easy wiring. Box lugs are standard on 40 A contactors and larger. An exclusive DIN track mounting option may reduce installation costs. Coils can be changed on the Type DPA contactors (50 to 90 A) quickly without a tool. Auxiliary contact modules snap on either side of the Type DPA contactors.

- Compact Design
- Industry Standard Mounting
- Double Break Contacts
- Low Coil VA
- Straight-Through Wiring
- Low Cost

Table 16.223: Coil Voltage Codes

Voltage		Code Type DP, DPA
60 Hz	50 Hz	
24	24	V14
24	—	—
120	110	V02
208	—	—
208-240	220	V09
230-240	220	—
277	—	V04
480	440	V06 *[1]*
600	550	V07 *[2]*

Table 16.224: Compact 1-Pole Contactors—600 Vac Maximum (replace ●●● with the voltage code)

Full Load Amperes	Locked Rotor Amperes			Resistive Load Amperes	N.O. Poles	Type *[3]*
	277 V	460 V	575 V			
30	150	125	100	40	1	DP31●●●
40	240	200	160	50 (277 V max.) 40 (above 277 V)	1	DP41●●●

Table 16.225: Compact 2-Pole Contactors—600 Vac Maximum (above 240 V, all lines must be switched) (replace ●●● with the voltage code)

Full Load Amperes	Locked Rotor Amperes			Resistive Load Amperes	N.O. Poles	Type *[3]*
	277 V	460 V	575 V			
30	150	125	100	40	2	DP32●●●
40	240	200	160	50	2	DP42●●●

Table 16.226: 2, 3, and 4-Pole Contactors—600 Vac Maximum (above 240 V, all lines must be switched) (replace ●●● with the voltage code)

Full Load Amperes	Locked Rotor Amperes			Resistive Load Amperes	Horsepower Ratings				N.O. Poles	Class 8910 Type *[3]*
	230 V	460 V	575 V		115 V 1Ø	230 V 1Ø	230 V 3Ø	460/575 V 3Ø		
30	180	150	120	40	2	5	10	15/20	2 3 4	DPA32●●● DPA33●●● DPA34●●●
40	240	200	160	50	3	7-1/2	10	20/25	2 3 4	DPA42●●● DPA43●●● DPA44●●●
50	300	250	200	65	3	10	15	30	2 3	DPA52●●● DPA53●●●
60	360	300	240	75	5	10	25	30	2 3	DPA62●●● DPA63●●●
75	450	375	300	94	5	15	25	40	2 3	DPA72R●●● DPA73R●●●
90	540	450	360	120	7.5	20	30	50	2 3	DPA92●●● DPA93●●●

[1] Not available for Type DP11 through DP31 single-pole devices.
[2] Not available for Type DP one- and two-pole devices.
[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.223.

© 2025 Schneider Electric
All Rights Reserved
3/212025

Table 16.227: 2 Normally Open & 2 Normally Closed 4-Pole Contactors—600 Vac Maximum (replace ●●● with the voltage code)

Full Load (A)	Resistive Load (A)	N.O. Poles	N.C. Poles *[4]*	Class 8910	
				Type *[5]*	Form
30	40	2	2	DPA34●●●	Y392

NOTE: N.C. poles on outside. N.C. poles open before N.O. poles close.

Table 16.228: Auxiliary Contacts, 5 A, 600 Vac Rated

For Use with Class 8910, Type	Contact Arrangement	Class 9999 Type
		20–90 A
DPA	1 N.O. 1 N.C. 1 N.O. & 1 N.C. 2 N.O.	D10 D01 D11 D20

Table 16.229: NEMA 1 General Purpose Enclosures for Type DP, DPA Contactors

Class 8910 Type	Full Load (A)	Poles	Class 9991 Type
DP	30–40	1 & 2	DPG1
DPA	30–40	2 & 3	DPG1
DPA	50 30–40	2 & 3 4	DPG2
DPA	60–75	2 & 3	DPG3
DPA	90	2 & 3	—

Table 16.230: Terminals

Full Load (A)	Power Terminals	
	Type of Lug *[6]*	Wire Range *[7]*
30 A 40 A 50–60 A 75–90 A	Binder Head Box Lug or Ring Tongue Box Lug or Ring Tongue Box Lug or Ring Tongue	14–8 14–6 14–2 14–1/0

Table 16.231: Miscellaneous Parts

Description	Class 9999 Type
DIN mounting bracket attachment (Type DPA, 30–60 A)	DMB1
Type DP Series B Cover	DPC1

Table 16.232: Factory Modifications

Modification	Type	Form (add to the catalog number after the voltage code)
Factory installed auxiliary contacts	—	*[8]*
Pressure wire connectors (30 A)	DPA	Y122
Box lugs (30 A)	DP DPA	Y239
DIN mounting bracket attached (35 mm style), (available for 30–60 A devices only)	DP DPA	Y135
Contact cover for Type DP Series B	—	Y248
UL Listed label on device	DP	U1 *[9]*
Ring tongue terminals: 30–90 A 3 pole DPA contactors	DPA	RT

Types DP, DPA Application Data

Factory Modifications

Auxiliary contacts can be factory installed along with a DIN mounting bracket option. Special terminations are also available.

Table 16.233: Application Data

Description	Specification
Mechanical Life (depending on the application)	500,000 operations
Electrical Life (depending on the application) Type DP Type DPA	 100,000 operations 200,000 operations
Duty Cycle	Continuous
Approvals: UL Component Recognized UL Listed (Form U1) CSA Certified DPA is CE marked	 File E3190, CCN NLDX2 File E3190, CCN NLDX File LR25490, Class 321104

NOTE: See page 16-126 for replacement contacts.

Table 16.234: Type DPA Coil Voltage Codes

Voltage, 60 Hz	Voltage, 50 Hz	Voltage Code
24	24	V14
120	110	V02
208–240	220	V09
277	—	V04
480	440	V06 *[10]*
600	550	V07 *[10]*

Table 16.235: Coil Replacement



No tools required (DPA50–60A)


Table 16.236: Class 8910 Type DPA Replacement Coils (replace ●●● with the voltage code)

Full Load (A)	Poles	Class 9998 Type *[11]*	Volt-Amperes *[12]*	
			Inrush	Sealed
50–60 A	2 & 3	DA2●●●	109	10
75–90 A	2 & 3	DA3●●●	214	19


[4] Above 240 V, all lines must be switched.
[5] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes in Table 16.234.
[6] For Ring Tongue, add RT after coil voltage.
[7] Solid or stranded copper wire only.
[8] Contact your local Schneider Electric sales office.
[9] Form U1, Type DPA3• and DPA4• have lighting ratings per pole: Tungsten 250 V, 60 Hz, 30 A; and Ballast 277 V, 60 Hz, 40 A.
[10] Available for Type DPA contactors only.
[11] Append the voltage code from Table 16.234. Example: The coil for Class 8910 Type DPA53V02, 120 V, 60 Hz is Class 9998 Type DA2**V02**.
[12] For Types DP11 through DP32: Inrush 30 VA; Sealed 5 VA.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025


Types DP, DPA Approximate Dimensions

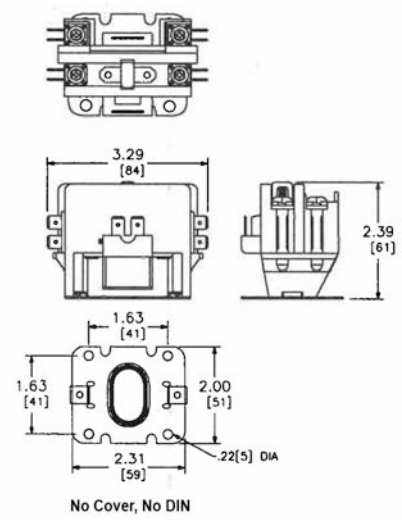


Type DP—1-Pole
30 through 40 Full Load Amperes

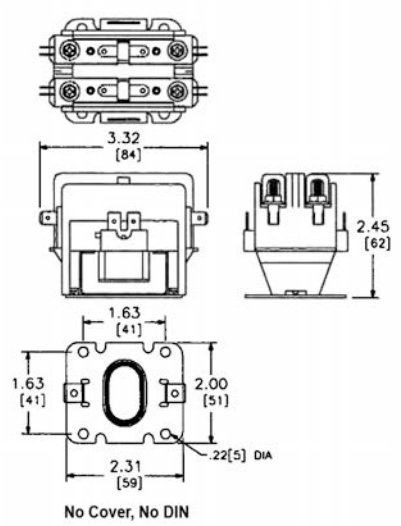


Type DP—2-Pole
30 through 40 Full Load Amperes

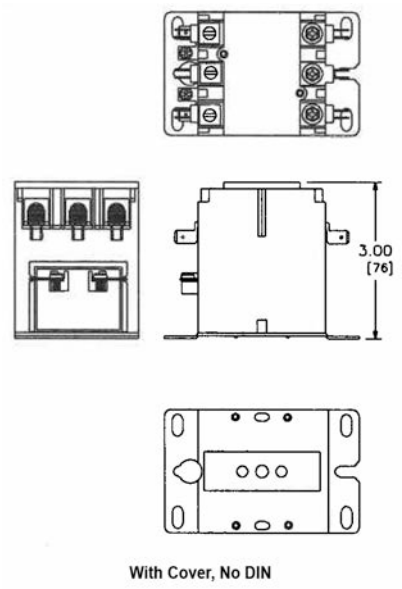


Type DPA—2 and 3-Pole
30 through 40 Full Load Amperes

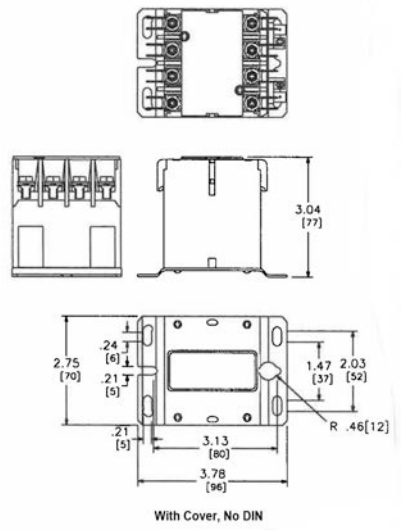

Type DPA—4-Pole
30 through 40 Full Load Amperes

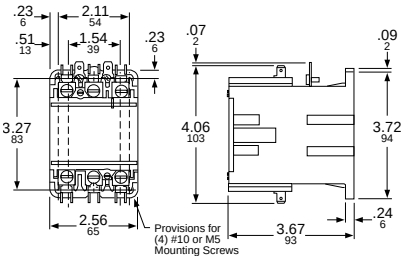

Type DPA—2 and 3-Pole
50, 60 and 75 Full Load Amperes

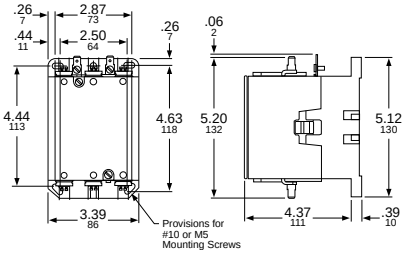

Type DPA—2 and 3-Pole
90 Full Load Amperes

Dimensions: **in.**
mm

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



8911DPSO33V09 Definite Purpose Starter



Type DPSG23V02

Types DPS and H through M

Class 8911 definite purpose starters are inexpensive starters for applications with relatively low duty cycles. Typical applications include air compressors, agricultural equipment, pumps, and HVAC equipment. Definite purpose starters offer:

- Low cost
- Small size
- Melting alloy overload block
- Trip-free reset mechanism
- Open type or enclosed
- 500,000 mechanical operations

Table 16.237: 2- and 3-Pole Starters—600 Vac Maximum

No. of Poles	Full Load (A)	Horsepower Ratings				Open Type	NEMA 1 Enclosed	No. of Thermal Units *[1]*
		115 V 1Ø	230 V 1Ø	230 V 3Ø	460/575 V 3Ø	Type *[2], [3]*	Type*[2], [3]*	
2-Pole Single Phase	30	2	5	—	—	DPSO32●●●	DPSG32●●●	1
	40	3	7.5	—	—	DPSO42●●●	DPSG42●●●	
	50	3	10	—	—	DPSO52●●●	DPSG52●●●	
3-Pole Poly-Phase	30	2	5	10	15/20	DPSO33●●●	DPSG33●●●	3
	40	3	7.5	10	20/25	DPSO43●●●	DPSG43●●●	
	50	3	10	15	30	DPSO53●●●	DPSG53●●●	

Table 16.238: Cross Reference Existing/Replacement Class 8911

Existing Device	Replacement Device
KO33	DPSO33
KG33	DPSG33
KO43	*[4]*
KG43	*[4]*
LO33	DPSO43
LG33	DPSG43
MO33	DPSO53
MG33	
MO43	DPSG53
MG43	*[4]* *[4]*

Table 16.239: Miscellaneous Parts and Kits

Description	Class & Type
Start-Stop push button kit*[5]*	8911DPB1
Hand-Off-Auto selector switch kit*[6]*	8911DSS1
Standard N.C. overload relay contact	9998SO1
N.C. and N.O. isolated overload relay alarm contacts	9999SO4
Overload relay jumper strap	9998SO31

Table 16.240: Replacement Magnet Coil for Class 8911 Type DPS


Full Load (A)	Poles	Class 9998 Type	Volt A	
			Inrush	Sealed
50 A	2 and 3	DA2*[7]*	109	10
See page 16-126 for replacement contacts for DPS devices.				

Table 16.241: Coil Voltage Codes


Voltage, 60 Hz	Voltage, 50 Hz	Voltage Code
24	24	V14
120	110	V02
208–240	220	V09
277	—	V04
480	440	V06
600	550	V07

Table 16.242: Auxiliary Contacts for Type DPS Starters

Description	20–90 A
	Class 9999 Type
1 N.O.	D10
1 N.C.	D01
1 N.O./1 N.C.	D11
2 N.O.	D20
NOTE: Auxiliary contacts must be field installed.	



Type DPSO—2 and 3-Pole and DSO 30–50 Full Load Amperes



Type DPSG—2 and 3-Pole 30–40 Full Load Amperes

Table 16.243: Ratings—Overload Contacts and Auxiliary Contacts

Device	Volts AC	Pilot Duty – AC Only (35% Power Factor)		Continuous Current Rating
		Make	Carry and Break	
9998 SO1 9999 SO4 9999 R20 & R21 9999 D10, D01, D11 & D20	120 or Less	30 A	3 A	5 A
	120–600	3600 VA	360 VA	5 A

Table 16.244: How to Order

To Order Specify:	Catalog Number			
	Class	Typse	Coil Voltage Code	Form(s)
• Class Number • Type Number • Voltage Code • Form(s)	8911	DPSG33	V02	

[1] See **Thermal Unit Selection**, page 16-136 for selection information on standard trip thermal units.
[2] Holding circuit contacts are not provided as standard; refer to Table 16.242 for kit.
[3] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.241.
[4] Type DPS 4-pole starter not available. Suggest 3-pole device with auxiliary contact.
[5] Does not include holding circuit interlock—order auxiliary contact.
[6] Use for 30 to 40 A starters. For 50 A starters, use the 9999BLX bracket.
[7] Append the coil voltage code from Table 16.241.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SSD4030



Type SSE4050

Class 8940 Type SS, XS Selection

Class 8940 Type SS and XS panels in NEMA 3R enclosures are specifically designed for pumping applications. Extra space is provided for field installation of auxiliary equipment.

- Type S Contactor provided as standard
- Approved for submersible pump applications
- Motor Logic™ Class 10/20 (Selectable) SSOLR through 200 hp–480 V, 100 hp–240 V. Included in the catalog number for Type SS (the H30 suffix is required only for eMCP units).
  (Includes rubber boot.)
- All prices include a Start push button and a Hand-Off-Auto selector switch
- Adjustable trip current
- Phase failure sensitive
- Ambient temperature compensated overload
- All devices are UL Listed, and marked “Suitable For Use As Service Equipment”

Table 16.245: 3-Pole Polyphase—480 Vac Maximum (50–60 Hz)—Fusible or Thermal-Magnetic Circuit Breaker *[1]*

Volts	Maximum Hp Polyphase	Coil Voltage	Fuse Clip (A) *[2]*	Type
240	3, 5, 7.5 10, 15 20, 25, 30 40, 50 75 100 100 200 250, 300	240–60 220–50	30 60 100 200 LLL36400U31X *[3]* 400 LLL36600U31X *[3]* MJL36800 *[3]* PLL34120 *[3]*	SSC2007 *[4][5]* SSD2015 *[4][5]* SSE2030 *[4]* SSF2050 *[4]* XSG2075 *[6]* SSG2100 *[4]* XSG2100 *[6]* XSH2200 *[6]* XSJ2300 *[6]*
480	3, 5, 7-1/2, 10 15, 20, 25 30 40, 50 60, 75, 100 150 200 200 300, 350, 400 500, 600	480–60 440–50	30 60 60 100 200 LLL36400U31X*[3]* 400 LLL36600U31X *[3]* MJL36800 *[3]* PLL34120 *[3]*	SSC4010 *[4][5]* SSD4025 *[4][5]* SSD4030 *[4][5]* SSE4050 *[4]* SSF4100 *[4]* XSG4150 *[6]* SSG4200 *[4]* XSG4200 *[6]* XSH4400 *[6]* XSJ4600 *[6]*

Table 16.246: 3-Pole Polyphase—480 Vac Maximum (50–60 Hz)—Electronic Motor Circuit Protector (MCP)

Volts	Max. Hp Polyphase	Coil Voltage *[6]*	Circuit Breaker *[7]*	Type
240	30	240–60 220–50	HLL36100M73	XSE2030V03H30
	40		JLL36250M75	XSE2040V03H309 *[8]*
	50		JLL36250M75	XSF2050V03H30
480	40	480–60 440–50	HLL36100M73	XSE4040V06H30
	50			XSE4050V06H30
	75		JLL36250M75	XSE4075V06H309 *[8]*
	100		JLL36250M75	XSF4100V06H30

Table 16.247: Class 8940—UL Listed Short Circuit Ratings

NEMA Size	NEMA Fuse Class or Voltage	Enclosure	Available Amperes RMS Symmetrical
Fusible Type			
0–3	Class H or K	Standard	5,000
0–3	Class R	Standard	100,000
0–2	Class H or K	Standard	5,000
0–2	Class R	Standard	100,000
4–5	Class H or K	Standard	10,000
4–5	Class R	Standard	100,000
6	Class H or K	Standard	18,000
6	Class R	Standard	100,000
Thermal-Magnetic Circuit Breaker Type			
0-5	0-480 V	Standard	100,000
6, 7	0-480 V	Standard	65,000
NOTE: Standard enclosures include non-oversize NEMA 1, 4 & 4X Stainless, and 12.			

For How to Order information, see page 16-28.

[1] To substitute an IEC ambient compensated bimetallic overload relay (up to size 5) for the Motor Logic SSOLR, request Form B12 and state motor hp (no charge). This applies to the above (SSx) devices only.
[2] Fuse clips are sized for use with dual-element time-delay fuses.
[3] Circuit breaker disconnect supplied. (See Section 7 for circuit breaker adjustment range.)
[4] A voltage code is not required for 240 V or 480 V common control with 8940SS controllers.
[5] To select a Motor Logic SSOLR with an FLA lower than the standard NEMA sizing, use the four-character **Form H30●**. See the section “Solid-State Overload Relay Forms.”
[6] See Table 16.248 for coil voltage codes.
[7] See page 7-32 for circuit breaker adjustment range.
[8] FLA is 45–135.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type WC3S2V06



Type XE3S2V02B12S

Class 8940 Type W, X

Class 8940 style S2 pumping plant panels in NEMA 3R enclosures are specifically designed for oil field applications. All panels are supplied with an electronic motor circuit protector (MCP) or a visible blade, fused, disconnect switch. This line of pumping plant panels features:

- Rugged spring latches for easy access without a tool
- Side mounted control units for convenient operation
- Door retainer available for windy areas
- Includes Hand-Off-Auto selector switch
- Motor Logic™ Class 10/20 (selectable) SSOLR included (the H30 suffix is required).
- UL Listed for use as service equipment for motors
- Extra panel space for additional electrical controls
- All devices are UL Listed, and marked “SUITABLE FOR USE AS SERVICE EQUIPMENT”

Table 16.250: 3-Pole Polyphase—480 Vac Maximum (50–60 Hz)

V	Max. Hp Poly-phase	Coil Voltage *[12]*	NEMA Size	Fusible Disconnect Type		Circuit Breaker Type	
				Fuse Clip (A) *[13]*	Type	Frame Size	Type
240	7-1/2	240–60 220–50	1	30	WC1S2V03H30 *[14]*	HLL36030M71	XC1S2V03H30 *[14]*
	10		2	60	WD1S2V03H30 *[14]*	HLL36050M72	XD1S2V03H30 *[14]*
	15					HLL36100M73	XD2S2V03H30 *[14]*
	30		3	100	WE1S2V03H30	HLL36100M73	XE1S2V03H30
	50		4	200	WF1S2V03H30	JLL36250M75	XF2S2V03H30
480	10	480–60 440–50	1	30	WC3S2V06H30	HLL36030M71	XC4S2V06H30
	15		2	60	WD3S2V06H30	HLL36030M71	XD3S2V06H30
	25		2			HLL36050M72	XD4S2V06H30
	50		3	100	WE3S2V06H30	HLL36100M73	XE3S2V06H30
	100		4	200	WF3S2V06H30	JLL36250M75	XF4S2V06H30

Table 16.251: Factory Modifications (Forms)

Description	Form
Substitute Class 10 IEC overload relay – state motor hp (NEMA Sizes 0–4 only)	B12
Control transformer with fused primary, Types: • NPD, NPE, NPF, SSC, WC, XC (50 VA) • NPG, SSD, XD, WD (100 VA) • NPJ, SSE, XE, WE (150 VA) • SSF, XF, WF (300 VA) • SG, NSG, XSG (50 VA and an interposing control relay)	F4T
Factory-installed door wind latch assembly in a standard Class 8940 Type SSC, SSD, SSE, SSF, XSE, and XSF	G45
Elapsed time meter	G97
Substitute Class 10/20 (selectable) Motor Logic™ SSOLR	H30
On Delay Timer	K25
Off Delay Timer	K26
Program timer with day omission feature	K141
Backspin timer (time delay upon energization)	K15
Start push button (S2 panels only)	A28
Slim panel (Types WC, WD, WE, XC, XD, XE only)	L8
Short panel (Types SSE, SSF, XE-S2 and XF-S2 only)	L9
Pilot light (specify lens color). Does not include auxiliary contact.	P *[15]*
Separate control	S
Auxiliary contacts (specify N.O. or N.C.)	X *[16]*
Special UL panel label for modified UL Listed devices on non-standard panels (requires approval by the manufacturing plant)	Y1
Lightning arrestor	Y1532
Move control operators from the enclosure side to the door	Y45
Phase failure, phase reversal relay with time delay including under and over voltage protection	R44
Substitute standard trip melting alloy overload relays	Y61
Substitute quick-trip melting alloy overload relay (Sizes 1 and 2 only)–Not available on IEC style contactors	Y611
Substitution of Class R rejection fuse clips for standard fuse clip. (8940 RD, RE, RF, RG, MD, ME, MF, MG, SSC, SSD, SSE, SSF, SSG, WC, WD, WE and WF)	Y1071

Table 16.248: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[9] [10]*	—	V01
120 *[9]*	110 *[9]*	V02
208 *[9]*	—	V08
240	220	V03
—	380	V05
480	440	V06
600 *[9]*	550 *[9]*	V07
Specify	Specify	V99

Table 16.249: Replacement Overload Relay for Square D Class 8940 Pump Panel with IEC Style Bimetallic Overload Relays Mounted on Current Transformers

Ampere Range	Number of Poles	Form	Series	Type *[11]*
40–63 A	3	B12	B	9065TJF40
63–100 A	3	B12	B	9065TJF63
100–160 A	3	B12	B	9065TJF100
160–250 A	3	B12	B	9065TJF160

For How to Order Information, see page 16-28.

Approximate Dimensions

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

[9] **Form S** required for separate control.
[10] 24 V coils are not available on Size 4–7 starters. On Size 1–3 starters, 24 V coils are available using Form S.
[11] A retro-fit reset kit is required for pre-series B pump panels. See page 16-111 for selection.
[12] Coil voltage code must be supplied to order this product. See Table 16.248 for codes.
[13] Fuse clips are sized for use with dual-element time-delay fuses.
[14] To select a Motor Logic SSOLR with an FLA lower than the standard NEMA sizing, use the four-character **Form H30●**. See the section “Solid-State Overload Relay Forms.”
[15] Indicate pilot light color as **Form P1** (red) or **Form P2** (green). See page 16-118 for more selections.
[16] To determine the maximum number of auxiliary contacts which can be added to each Type S device and for the appropriate “X Form,” refer to Table 16.83 (for non-reversing single-speed devices) or to Table 16.162 (for reversing or two-speed devices).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.252:

Type	Fig.	A in. mm	B in. mm	C in. mm	D in. mm	E in. mm	F in. mm	G in. mm	H in. mm	J in. mm	K in. mm	L Conduit	M in. mm	Knockouts R	 S	 T	V in. mm
NPD/E/F SSC SSD	1	**39.05** 992	**13.73** 349	**6.67** 169	**9.70** 246	**33.05** 839	**37.93** 963	**7.00** 178	**2.41** 61	**3.00** 76	**3.00** 76	2.5	**2.41** 61	0.5–0.75	1.25–1.5	0.5–0.75	**1.41** 36
NPG/J SSE/F XSE/F	1	**49.00** 1245	**19.15** 486	**8.81** 224	**10.37** 263	**44.07** 1119	**47.88** 1216	**7.00** 178	**2.17** 55	**2.69** 68	**3.44** 87	2.5	**2.57** 65	0.5–0.75	1–1.25 1–2.5	1–1.25 1.5–2	**1.41** 36
WC—S2 WD—S2 XC—S2 XD—S2	1	**38.50** 978	**19.00** 483	**7.29** 185	**9.39** 239	**34.00** 864	**37.38** 949	**7.00** 178	**2.18** 55	**2.13** 54	**2.13** 54	1.5	**2.12** 54	0.5–0.75	1–1.25 1.5	0.5–0.75	—
WE—S2 WF—S2 XE—S2 XF—S2	1	**56.50** 1435	**23.00** 584	**8.23** 209	**10.33** 262	**52.00** 1321	**55.38** 1407	**7.00** 178	**2.18** 55	**2.69** 68	**3.44** 87	2	**2.68** 68	0.5–0.75	1–1.25 2–2.5	1–1.25 1.5–2	**1.50** 38
SSG XSG	1	**75.50** 1892	**22.00** 559	**13.80** 351	**17.55** 446	**73.00** 1854	**74.50** 13	**14.00** 356	N/A	**0.56** 14	N/A	N/A	N/A	N/A	N/A	N/A	**1.50** 38
XSH	2	**82.50** 2096	**36.00** 914	**20.00** 508	**23.25** 591	**80.00** 2032	**33.75** 857	**16.50** 419	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
XSJ	2	**92.50** 2350	**34.00** 864	**20.00** 508	**23.25** 591	**90.00** 2286	**31.75** 806	**16.50** 419	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

NOTE: Illustrations may not represent the actual enclosure. They are intended for dimensional information only.

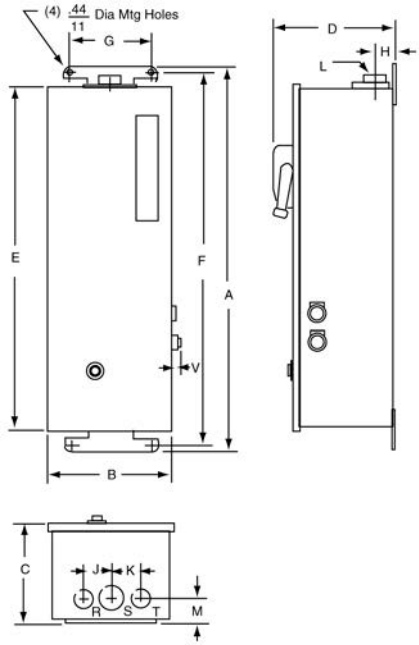


Figure 1

Dimensions: **in.**
mm

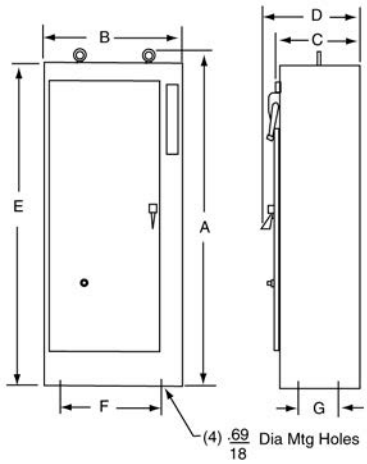


Figure 2



Selection

Duplex Motor Controllers are used to control two motors, and consist of two starters in a common enclosure. Two separate disconnect switches or circuit breakers with operators are included with all combination devices. Unless **Form Y68** is specified, an alternation circuit (a Class 8501 Type XO40 relay) is included, which alternately operates first one motor and then the other on each successive closing of a pilot device. Both motors will be energized should a second pilot device close. All devices incorporate a terminal block to simplify wiring of pilot devices A and B. Typical applications include pump motors where a second pump is required for peak demand periods yet alternation is desirable to equalize pump wear.

Table 16.253: 3-Pole Polyphase—600 Vac Maximum (50–60 Hz)
Non-Combination Type—Without Disconnect—With Electric Alternation
(replace ●●● with the voltage code)
(Devices require 6 thermal units. See Thermal Unit Selection, page 16-135.)

NEMA Size	Maximum Rating Each Motor		NEMA 1 General Purpose Enclosure	NEMA 4/4X Watertight and Dusttight Enclosure Stainless Steel	NEMA 12 (NEMA 3 and 3R) *[1]* Dusttight and Driptight Industrial Use Enclosure	Open Type
	Voltage	Hp Polyphase	Type *[2]*	Type *[2]*	Type *[2]*	Type *[2]*
0	200–230 460–575	3 5	NBG10●●●	NBW10●●●	NBA10●●●	NBO10●●●
1	200–230 460–575	7.5 10	NCG20●●●	NCW20●●●	NCA20●●●	NCO20●●●

[1] NEMA 12 enclosures can be field modified for outdoor applications. For details, refer to Class 9991 on page 16-114.
[2] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.264.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.253 3-Pole Polyphase—600 Vac Maximum (50–60 Hz) Non-Combination Type—Without Disconnect—With Electric Alternation (replace ●●● with the voltage code) (Devices require 6 thermal units. See Thermal Unit Selection, page .) (cont'd.)

NEMA Size	Maximum Rating Each Motor		NEMA 1 General Purpose Enclosure	NEMA 4/4X Watertight and Dusttight Enclosure Stainless Steel	NEMA 12 (NEMA 3 and 3R) *[3]* Dusttight and Driptight Industrial Use Enclosure	Open Type
	Voltage	Hp Polyphase	Type *[4]*	Type *[4]*	Type *[4]*	Type *[4]*
2	200 230 460–575	10 15 25	NDG30●●●	NDW30●●●	NDA30●●●	NDO30●●●
3	200 230 460–575	25 30 50	NEG40●●●	NEW40●●●	NEA40●●●	NEO40●●●
4	200 230 460–575	40 50 100	NFG50●●●	NFW50●●●	NFA50●●●	NFO50●●●

Table 16.254: 3-Pole Polyphase—600 Vac Maximum (50–60 Hz) Combination Thermal Magnetic Circuit Breaker Type—With Electric Alternation (replace ●●● with the voltage code) (Devices require 6 thermal units. See Thermal Unit Selection, page 16-135.)

Motor Starter Voltage	Max. Hp Polyphase	Coil Voltage	NEMA Size	Circuit Breaker		NEMA 1 General Purpose Enclosure	NEMA 4/4X Watertight and Dusttight Stainless Steel Enclosure	NEMA 12 (NEMA 3 and 3R)*[3]* Dusttight and Driptight Industrial Use Enclosure
				Frame Size	Ampere Rating	Type *[4]*	Type *[4]*	Type *[4]*
200 (208)	2 3	208–60	0	HLL36015 HLL36020	15 20	CBG06 ●●● CBG08●●●	CBW06 ●●● CBW08●●●	CBA06 ●●● CBA08●●●
	5 7.5		1	HLL36035 HLL36050	35 50	CCG12●●● CCG15●●●	CCW12●●● CCW15●●●	CCA12●●● CCA15●●●
	10		2	HLL36060	60	CDG22●●●	CDW22●●●	CDA22●●●
	15 20 25		3	HLL36100 HLL36125 HLL36150	100 125 150	CEG32●●● CEG36●●● CEG38●●●	CEW32●●● CEW36●●● CEW38●●●	CEA32●●● CEA36●●● CEA38●●●
	30 40		4	JLL36200 JLL36250	200 250	CFG41●●● CFG44●●●	CFW41●●● CFW44●●●	CFA41●●● CFA44●●●
230 (240)	2 3	240–60 220–50	0	HLL36015 HLL36020	15 20	CBG06●●● CBG08●●●	CBW06●●● CBW08●●●	CBA06●●● CBA08●●●
	5 7.5		1	HLL36035 HLL36045	35 45	CCG14●●● CCG16●●●	CCW14●●● CCW16●●●	CCA14●●● CCA16●●●
	10 15		2	HLL36060 HLL36090	60 90	CDG22●●● CDG24●●●	CDW22●●● CDW24●●●	CDA22●●● CDA24●●●
	25 30		3	HLL36150	150	CEG38●●●	CEW38●●●	CEA38●●●
	40 50		4	JLL36225 JLL36250	225 250	CFG43●●● CFG44●●●	CFW43●●● CFW44●●●	CFA43●●● CFA44●●●
460 (480)	5	480–60 440–50	0	HLL36015	15	CBG10●●●	CBW10●●●	CBA10●●●
	7.5 10		1	HLL36025 HLL36030	25 30	CCG18●●● CCG20●●●	CCW18●●● CCW20●●●	CCA18●●● CCA20●●●
	15 20 25		2	HLL36045 HLL36060 HLL36070	45 60 70	CDG26●●● CDG28●●● CDG30●●●	CDW26●●● CDW28●●● CDW30●●●	CDA26●●● CDA28●●● CDA30●●●
	30 50		3	HLL36080 HLL36150	80 150	CEG39●●● CEG40●●●	CEW39●●● CEW40●●●	CEA39●●● CEA40●●●
	75 100		4	JLL36200 JLL36250	200 250	CFG45●●● CFG47●●●	CFW45●●● CFW47●●●	CFA45●●● CFA47●●●

NOTE: For voltage codes used with control transformers, see page 16-119.

For How to Order Information, see page 16-28.

[3] NEMA 12 enclosures can be field modified for outdoor applications. For details, refer to Class 9991 on page 16-114.
[4] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed inTable 16.264.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.255: 3-Pole Polyphase—600 Vac Maximum (50–60 Hz) Combination Disconnect Switch Type—With Electric Alternation (Devices require 6 thermal units. See Thermal Unit Selection, page 16-135.)

Motor Voltage (Starter Voltage)	Max. Hp Poly-phase	Coil Voltage	NEMA Size	Fuse Clip Size (A) *[5]*	NEMA 1 General Purpose Enclosure	NEMA 4/4X Watertight and Dusttight Enclosure Stainless Steel	NEMA 12 (NEMA 3 and 3R) *[6]* Dusttight and Driptight Industrial Use Enclosure
					Type *[7]*	Type *[7]*	Type *[7]*
200 (208)	3	208-60	0	None 30	UBG10●●● DBG08●●●	UBW10●●● DBW08●●●	UBA10●●● DBA08●●●
	7.5		1	None 60	UCG20●●● DCG18●●●	UCW20●●● DCW18●●●	UCA20●●● DCA18●●●
	10		2	None 60	UDG30●●● DDG28●●●	UDW30●●● DDW28●●●	UDA30●●● DDA28●●●
230 (240)	3	240-60 220-50	0	None 30	UBG10●●● DBG08●●●	UBW10●●● DBW08●●●	UBA10●●● DBA08●●●
	7.5		1	None 60	UCG20●●● DCG18●●●	UCW20●●● DCW18●●●	UCA20●●● DCA18●●●
	15		2	None 60	UDG30●●● DDG28●●●	UDW30●●● DDW28●●●	UDA30●●● DDA28●●●
460 (480)	5	480-60 440-50 575 (600)	0	None 30	UBG10●●● DBG10●●●	UBW10●●● DBW10●●●	UBA10●●● DBA10●●●
	10		1	None 30	UCG20●●● DCG20●●●	UCW20●●● DCW20●●●	UCA20●●● DCA20●●●
	25		2	None 60	UDG30●●● DDG30●●●	UDW30●●● DDW30●●●	UDA30●●● DDA30●●●
	50		3	None 100	UEG40●●● DEG40●●●	UEW40●●● DEW40●●●	UEA40●●● DEA40●●●

Factory Modifications (Forms)

Table 16.256: Factory Modifications (Forms)

Description *[8]*	Enclosure Type	Form	NEMA Size			
			0–1	2	3	4
Pilot Devices in Cover*[9]* Start-Stop push buttons—one provided for each motor. (**Form C** or **Form Y68** required.)	1, 4, 12	A	X	X	X	X
Hand-Off-Auto selector switch—one provided for each motor.	1, 4,12	C	X	X	X	X
No. 1 Lead—No. 2 Lead selector switch for manual selection of lead pump. (**Form Y68** required.) Red On pilot light—one provided for each motor.	Any 1, 4, 12	C13 P1	X X	X X	X X	X X
Push-to-test, red On pilot light—one provided for each motor. Non-standard markings for pilot devices. Test push button for each starter.	1, 4, 12 Any Any	P21 G12 Y29	X X X	X X X	X X X	X X X
Control Circuit Modifications Fused control circuit without transformer One fuse Two fuses Fused control circuit transformer, two fuses in primary, with 600, 480, 240 or 208 V primary and 120 V secondary –one provided for each starter.	 Any Any Any	 F F4 F4T	 X X X	 X X X	 X X X	 X X X
Fused control circuit transformer, two fuses in primary, one fuse in secondary—one provided for each starter. 100 VA additional capacity 200 VA additional capacity	Any Any Any	FF4T FF4T11 FF4T12	X X X	X X X	X X X*[10]*	X X*[10]* X*[10]*
Extra capacity control circuit transformer—two fuses in primary—one provided for each starter (see Table 16.257) 100 VA additional capacity 200 VA additional capacity Elapsed time meter for each starter	Any Any Any Any	F4T11 F4T12 G97	X X X X	X X X X	X X X X	—*[11]* — X
Pressure switch for each starter (Square D pressure switch 9012GAW25) Addition of 2 relays to modify controller for operation with single pole pilot devices Addition of 3 relays to modify controller for operation with single pole mercury float switches	Any Any Any	D R7 R8	X X X	X X X	X X X	X X X
Control circuit wired for separate 120 V source	Any	S	X	X	X	X
Addition of 1 N.O. unwired interlock per starter for use by customer (1 N.O. unwired interlock per starter is provided as standard.) Addition of 1 N.C. unwired interlock per starter for customer use	Any Any	X10 X01	X X	X X	X X	X X
Modified wiring for use with double pole mercury float switches **Deduct** for omission of electrical alternating circuit Additional Control circuit terminals—per wired terminal (5 point terminal block is standard) Unwired	Any Any Any Any	Y24 Y68 G56*[12]* G50*[12]*	X X X X	X X X X	X X X X	X X X X

Table 16.257: Capacity

NEMA Size	Standard Capacity (Form F4T)	100 VA Additional Capacity (Form F4T11)	200 VA Additional Capacity (Form F4T12)
	Class 9070 Type	Class 9070 Type	Class 9070 Type
0, 1	TF100	TF200	TF300
2	TF100	TF200	TF300
3	TF150	TF300	TF500
4	TF300	TF500	TF500

For How to Order Information, see page 16-28.

[5] The hp rating applies only when dual element time delay fuses are used.
[6] NEMA 12 enclosures can be field modified for outdoor applications. For details, refer to Class 9991 on page 16-114.
[7] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.264.
[8] These Forms are most commonly used. Other Forms may be available. Consult the Customer Care Center at 1-888-778-2733 for additional information.
[9] Not available on open style devices.
[10] Single primary voltage must be specified.
[11] Not available on this size. Use **Form FF4T●●**.
[12] Addition of terminal block 9080CA or 9080GR6 only. A 5–point terminal block is provided as standard for custom connection. A wiring diagram must be provided for factory wiring.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

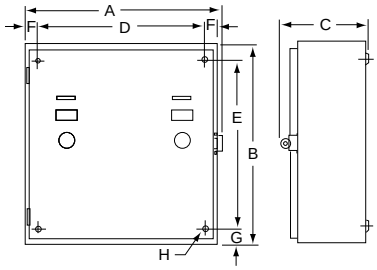


Figure 16.28: NEMA 1 Enclosure—Non-Combination

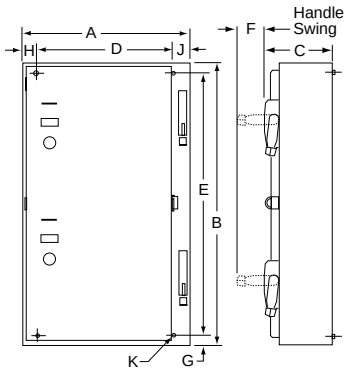


Figure 16.29: NEMA 1 Enclosure—Combination

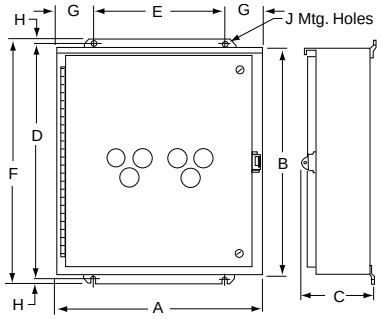


Figure 16.30: NEMA 4 and 12/3R Enclosure—Non-Combination

Table 16.264: Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24 *[13]*	—	V01
120 *[14]*	110	V02
208	—	V08
240	220	V03
—	380	V05
480	440	V06
600	550	V07
Specify	Specify	V99

Approximate Dimensions (in.)

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.258: NEMA 1 Enclosure—Non-Combination (Figure 1)

Starter Size	A	B	C	D	E	F	G	H
0, 1, or 2	20.5	24.13	8.69	17.88	21.5	1.31	1.31	0.31 Dia.
3 or 4	22.13	34	9.75	16	35.5	3.06	0.75	0.44 Dia.

Table 16.259: NEMA 1 Enclosure—Combination (Figure 2)

Starter Size	A	B	C	D	E	F	G	H	J	K
0, 1, or 2 (For Circuit Breaker and 30 A & 60 A Disconnect Switch)	20.38	35	9.63	17	32.5	3.31	1.25	1.25	1.25	0.44 Dia.
3 or 4 (For Circuit Breaker and 100 A Disconnect Switch)	32	44	10.75	24	46	4.88	1	2.5	2.5	0.56 Dia.

Table 16.260: NEMA 4 Enclosure—Non-Combination (Figure 3)

Starter Size	A	B	C	D	E	F	G	H	J
0, 1, or 2	20.5	24	8	25	15.38	26	2.56	0.5	0.31
3 or 4	22	34	9.13	35	17	36	2.5	0.5	0.56

Table 16.261: NEMA 4 Enclosure—Combination (Figure 4)

Starter Size	A	B	C	D	E	F	G	H	J	K
0, 1, or 2 (For Circuit Breaker and 30 A & 60 A Disconnect Switch)	20.5	35	9.56	36	15.38	37	2.56	0.5	0.31	3.31
3 or 4 (For Circuit Breaker and 100 A Disconnect Switch)	32	44	10.69	46	26	47	3	0.5	0.56	4.88

Table 16.262: NEMA 12/3R Enclosure—Non-Combination (Figure 3)

Starter Size	A	B	C	D	E	F	G	H	J
0, 1, or 2	20.5	24.25	8	25.5	14.38	26.5	3.06	0.5	0.44
3 or 4	22	34	9.13	35.5	16	36.5	3	0.5	0.44

Table 16.263: NEMA 12/3R Enclosure—Combination (Figure 4)

Starter Size	A	B	C	D	E	F	G	H	J	K
0, 1, or 2 (For Circuit Breaker and 30 A & 60 A Disconnect Switch)	20.5	35	9.56	36.5	14.38	37.5	3	0.5	0.44	3.31
3 or 4 (For Circuit Breaker and 100 A Disconnect Switch)	32.25	44.25	10.69	46	24	47	4.13	0.5	0.56	4.88


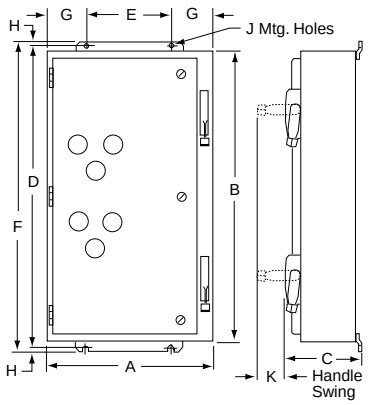


Figure 16.31: NEMA 4 and 12/3R Enclosure—Combination

NOTE: Illustrations may not represent the actual enclosure; they are intended for dimensional information only. Dimensions are in inches.

[13] 24 V coil is not available on Size 4. On Sizes 00–3, specify**Form S** (separate control).
[14] These voltage codes must include **Form S** (no additional charge).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



8965DPR33V02 Hoist Contactor
600 Vac, 25 A
DPR, Angled

Class 8965 Type DPR reversing/hoist contactors are designed for the control of motors in hoists, overhead doors, small elevators, commercial laundry equipment, and other related products which use reversing motors. They are rated to perform in the short periods of jogging experienced in hoist service.

The coils are designed to operate on line voltages of 85–110% of rated voltage, and are for applications at 50 or 60 Hz only. Coils are easily replaced with external base removed.

Auxiliary contacts can easily be fieldadded to any Class 8965 reversing contactor. Type DPR contactors accept one auxiliary contact module with up to two isolated circuits per side (two modules per device). When auxiliary contacts are ordered separately, two modules are normally used for each device; one for forward, one for reverse.

Table 16.265: Reversing/Hoist Contactors—600 Vac Maximum (replace ●●● with the voltage code)

No. of Poles	Horsepower Ratings *[1]*				Open Type
	115 V 1Ø	230 V 1Ø	230 V 3Ø	460/575 V 3Ø	Type *[2]*
3-Pole Polyphase	2 3	5 7-1/2	10 15	15 20	DPR33●●● DPR43●●●
4-Pole Polyphase	2 3	5 7-1/2	10 10	15 20	DPR34●●● DPR44●●●

Table 16.266: Auxiliary Contacts Separate Module *[3]*

Description	Class 9999 Type
1 N.O. 1 N.C. 1 N.O.–1 N.C. 2 N.O.	D10 D01 D11 D20

Table 16.267: Factory Installed

Description	Form
1 N.O. Each Side	X1010
1 N.C. Each Side	X0101
1 N.O.–1 N.C. Each Side	X1111
2 N.O. Each Side	X2020


Table 16.268: Coil Voltage Codes

Volts, 60 Hz	Volts, 50 Hz	Voltage Code
24	24	V14
120	110	V02
208–240	220	V09
277	—	V04
480	440	V06
600	550	V07


Table 16.269: Approvals

UL Component Recognized—File E42240, CCN NLDX
CSA Certified—File LR25490, Class 3211 04

Approximate Dimensions

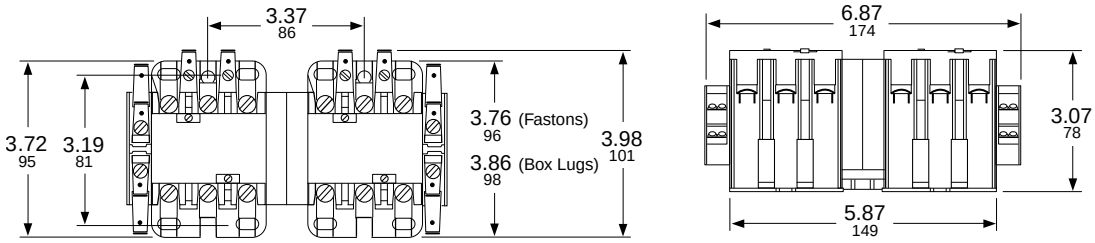

Type DPR13 through DPR43

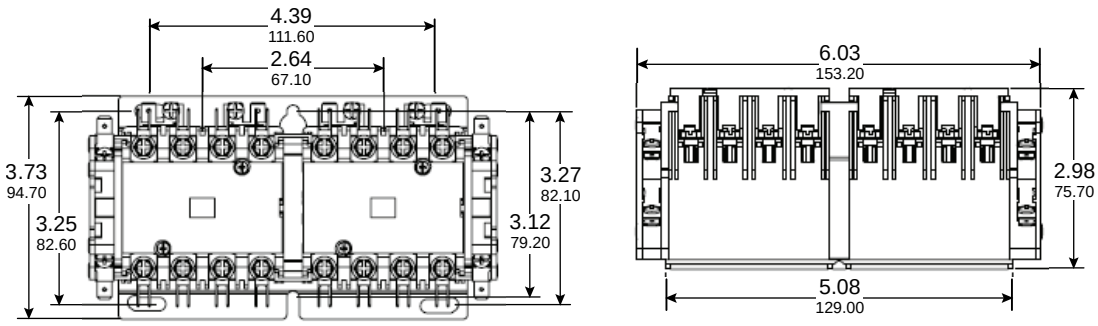


Type DPR14 through DPR44

[1] For rapid operation (jogging duty), use the next larger size contactor.
[2] Replace the three bullets (●●●) in the catalog number with the coil voltage code. Refer to the standard voltage codes listed in Table 16.268.
[3] Order two modules for Type DPR, one for each side.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SEO5

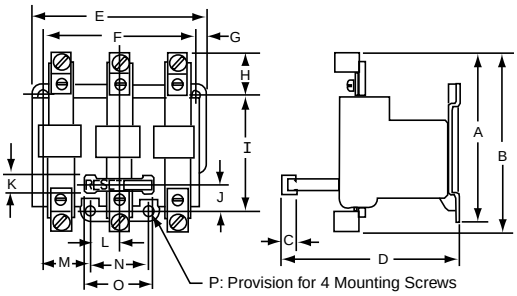

Type SEO Dimensions

Melting Alloy Overload Relay Selection

NEMA style thermal overload relays feature:

- Exclusive one-piece thermal unit
- Inverse time delay trip
- Trip free reset mechanism
- Replaceable contact units

Note that these overload relays do not include thermal units, which must be ordered and field installed separately. Slow trip (Class 30) and quick trip (Class 10) melting alloy thermal units are available for all Size 1, 2, 5 and 6, and some Size 3 applications.

Table 16.270: For Separate Mounting—Melting Alloy—600 V Maximum, AC or DC *[1]*

NEMA Size	Maximum Full Load Current (A)	Open Type for Separate Panel Mounting Left and Right Hand Types	Open Type Relay and Bracket Kit for Terminal Block Channel Mounting
			Type
Three Pole Construction (One Common N.C. Contact on Type S Only)—3 Thermal Units Required			
00–1	25	9065SEO5	—
2	45	9065SEO8	—
3	86	9065SEO12	—
4	133	9065SEO15	—

Table 16.271: Replacement Melting Alloy Overload Relays for Square D Class 8536 Starters

Locate Class 8536 Starter in this Column				Order Class 9065 Overload Relay from this Column	
NEMA Size	Type	Series	Number of Poles	Type	Number of Thermal Units Required
00	SA	A & B	2	—	1
			3	9065SDO5	3
0	SB	A	2	—	1
			3–5	9065SDO5	3 *[2]*
1	SC	A	2	—	1
			3–5	9065SDO5	3 *[2]*
1P	SC	A	2	—	1
2	SD	A	2	—	1
			3–5	9065SDO8	3 *[2]*
3	SE	A	2	—	1
			3	9065SDO12	3
			4	9065SDO13	2
			5	9065SDO14	3
4	SF	A	3	9065SDO15	3
			4	—	2
			5	9065SDO17	3
5	SG	B *[3]*	3	9065SEO5	3
6	SH	A & B	3	9065SEO5	3

Table 16.272: Special Features for Melting Alloy Overload Relays

Description	Form
Substitute 1-N.O. isolated alarm contact and 1-N.C. contact per relay. (Type S starters only) *[4]*	Y342
Substitute 2-N.C. contacts for standard N.C. contact per relay. (Type S starters only) *[4]*	Y344
Modify Type SDO12 relays to accept Type FB quick trip or SB slow trip thermal units. (Rejects Type CC standard trip units) *[5]*	Y81

Table 16.273: Approximate Dimensions, NEMA Style Melting Alloy Overload Relays

Type	Dimensions (in.)																Shipping Weight (lb)
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	
SEO5	3.31	—	0.47	3.97	3.53	2.81	0.22	0.69	2.31	0.5	0.5	0.5	0.84	1	1.38	#10	1
SEO8	3.31	—	0.47	3.97	3.5	2.81	0.19	0.69	2.31	0.5	0.5	0.13	0.84	1	1.38	#10	1.25
SEO12	—	5.59	0.56	5.75	5.31	4.75	0.28	1.44	3.56	0.75	0.56	0.88	1.5	1.75	2	#1/4	3
SEO15	—	6.97	0.56	5.75	5.31	4.75	0.28	2.13	3.56	0.75	0.56	0.88	1.5	1.75	2	#1/4	4

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

[1] The maximum power circuit rating for Type S separate-mounting overload relays is 600 Vac only. The maximum control circuit contact rating for Type S versions is 600 Vac only.
[2] For 4-pole starters used on two-phase systems, order two thermal units plus one Class 9998 Type SO31 jumper strap kit for every two starters. Each kit includes two jumper straps.
[3] Also used for Series A with Form Y500. For series A without Forms, see Table 16.275 Replacement SSOLRs, page 16-103.
[4] Field modification possible. Order 9999S04 (for **Form Y342**) or 9999S05 (for **Form Y344**).
[5] This Form cannot be field modified.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Motor Logic Solid-State Overload Relays

Motor Logic solid-state overload relays (SSOLRs) feature: 3 to 1 adjustment for trip current; phase loss and unbalance protection; direct replacement for Type S melting alloy. They are ambient insensitive and self–powered. Switch selectable trip class; Class II ground fault detection; and direct replacement for Type S melting alloy. Electrical remote reset is also available.

Table 16.274: Class 10/20 (Selectable): For Separate Mounting Solid-State Overload Relay, 600 Vac Maximum

NEMA Size*[6]* (3-Pole)	Full Load Current Range (A)	Open Type
		Trip Class 10/20
00B	1.5–4.5 *[7]*	9065SFB20
00C	3–9 *[7]*	9065SFC20
0	6–18 *[7]*	9065SF020
1	9–27 *[7]*	9065SF120
2	15–45	9065SF220
3	30–90	9065SF320
4	45–135	9065SF420


Table 16.275: Class 10/20 (Selectable): Replacement SSOLR for Retrofit of Square D Type S Starter Solid-State Overload Relay 600 Vac Maximum

Locate 8536 Starter in this column		Order Class 9065 Overload Relay from this column
NEMA Size*[6]*	Full Load Current Range (A)	Open Type
		Trip Class 10/20
00B *[7]*	1.5–4.5	9065SFB20
00C *[7]*	3–9	9065SFC20
0 *[7]*	6–18	9065SF020
1 *[7]*	9–27	9065SF120
2	15–45	9065ST220
3	30–90	9065ST320
4	45–135	9065ST420
5 *[8]*	90–270	9065ST520
5 *[9]*	90–270	9065SF520
6 *[8]*	180–540	9065ST620
7 *[8]*	270–810	9065ST720

[6] Size 00B and 00C are not actual NEMA sizes. These designations are used to differentiate the lower FLA of these devices from the NEMA Size 00 Motor Logic solid-state overload relay.
[7] Size 00B, 00C, 0, and 1 come without lugs. Lower amperage loads can be protected by looping the power wires. Lugs are available. See Table 16.348.
[8] Size 5, 6, and 7 replacement overload relays are only for existing NEMA style Type S starters with a Motor Logic overload relay. External CTs and additional components are not included.
[9] Size 5 is a complete drop-in replacement for Square D Type S melting alloy, bimetallic, and Y500 overload relays **only**.


© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Approximate Dimensions

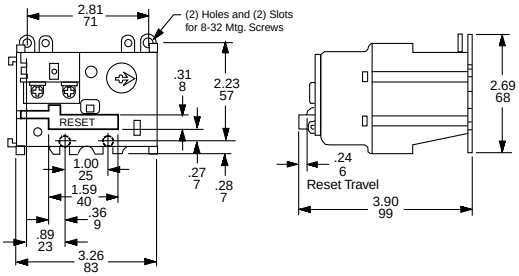


NEMA Size 00B, 00C, 0, and 1 Devices


NOTE: Sizes 00B and 00C are not actual NEMA sizes. These designations are used to differentiate the lower FLA of these devices from the NEMA Size 00 Motor Logic solid-state overload relay.

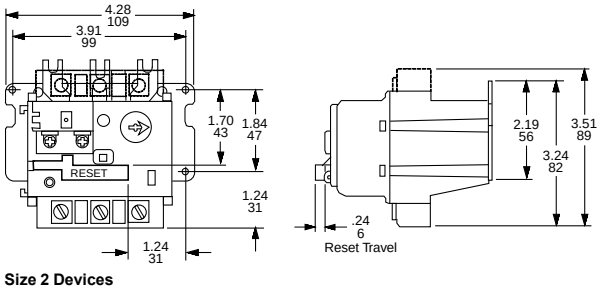


Size 2 Devices

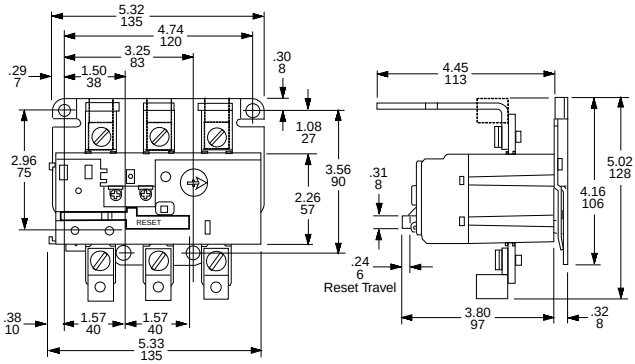


Size 3 Devices

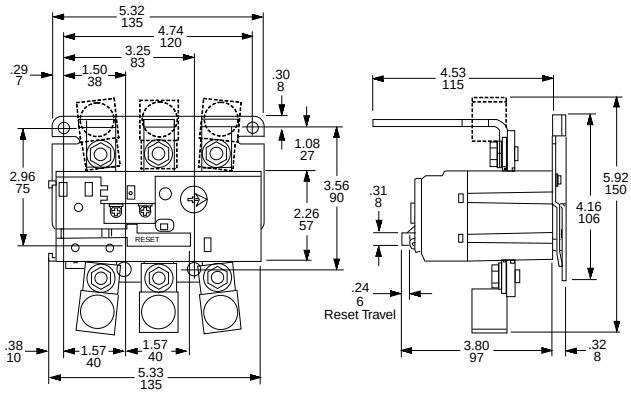

Size 4 Devices

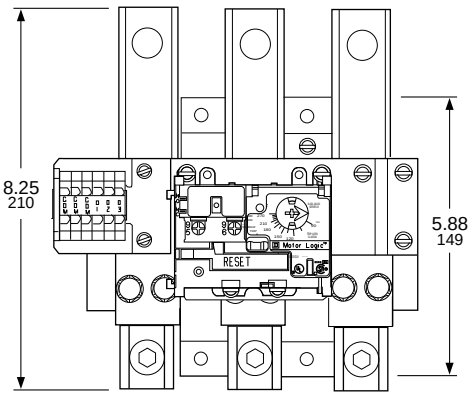

NEMA Size 5 Type S Device

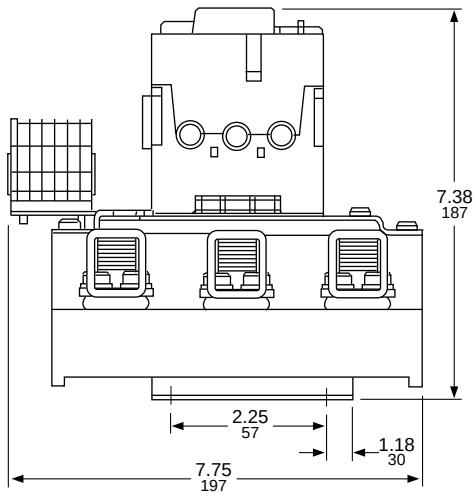


Note: The dimensions are for reference only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

New!



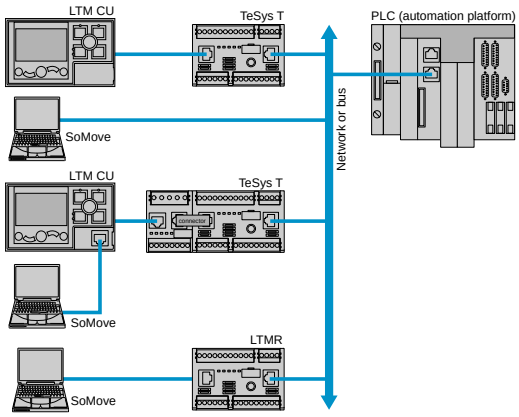

Introduction

TeSys T is a motor management system that provides full motor monitoring, control, and protection when used with short circuit protection and a contactor. TeSys T manages most critical processes while reducing downtime and increasing productivity.

TeSys T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T predicts what will happen in the process, as it accurately monitors current, voltage, and power over a wide range.

TeSys T is a green motor management system with unique power monitoring capabilities for better energy management. TeSys T carries all appropriate and necessary third party certifications.

To get detailed information about TeSys T, visit our website at www.schneider-electric.us.com.

TeSys T detailed functionalities and possible configuration:

Communication:

TeSys T is a flexible motor management system that supports six major communication protocols: Modbus™, CANopen, DeviceNet™, Profibus™, Ethernet/IP, and Modbus/TCP.

These communication protocols allow the TeSys T controller to integrate seamlessly into your automation systems.

Ethernet/IP and Modbus/TCP provide FDR to enable quick replacement of products and minimize maintenance time.

Protection functions:

- thermal overload
- phase imbalance and phase failure
- thermal motor protection via PTC probes
- phase reversal
- ground fault detection
- long starting times and motor stalling
- automatic load shedding and restarting
- load fluctuations (current, voltage, power)
- variations of Cos j (power factor)

Metering functions:

- Measurements (rms values):
  - current on the 3 phases
  - voltage on the 3 phases (shedding)
  - motor temperature
  - ground fault sensing
- Values calculated:
  - average current
  - frequency
  - Power factor, power, power consumption

Motor control functions:

A motor managed by a TeSys T controller can be controlled:

- locally, using the logic inputs present on the product, or via the human machine interface (HMI)
- remotely, via the network

Motor control modes:

10 predefined motor control modes are incorporated in the controller. Each listed mode is available as 2 or 3 wire control.

- overload mode: monitoring of motors whose control is not managed by the controller
- independent mode: starting of full voltage non-reversing motors
- reverser mode: starting of full voltage reversing motors
- 2-step mode: 2-step starting of motors (star-delta, by autotransformer and by resistor)
- 2-speed mode: 2-speed starting of motors (Dahlander, pole changer)

A custom mode is available to allow the user to create a specific motor control mode that is not predefined in the controller.

Custom Logic has the basic functions of a small programmable logic controller (PLC). Programming can be done in Structured Text mode or in Block Diagrams through SoMove™ software. To ensure consistency, the same software used to commission the TeSys T controller is used for Custom Logic programming.

Statistical and diagnostic functions:

- history of the last five detected faults
- motor statistics
- controller operations
- warning of pending faults

Table 16.276: Standards and Certifications

Product Type	LTMR Controllers	LTMEV40 Expansion Modules
Conforming to standards	IEC/EN 60947-4-1, UL 508, UL E164353 NKCR, CSA 22-2 n°14, CSA LR43364 Class 3211 03, IACS E10	
Product certifications	UL, CSA, BV, LROS, DNV, GL, RINA, ABS, RMRos, NOM, CCC, C-TIC'K, ATEX, GOST, KERI	

Possible Configurations:

TeSys T controller is a flexible motor management system using the SoMove commissioning tool. See page 16-108 for details.

TeSys T is a motor management system that provides full motor monitoring, control, and protection when used with short circuit protection and a contactor. TeSys T manages most critical processes while reducing downtime and increasing productivity.

TeSys T is a flexible system that integrates seamlessly into your automation system through five major communication protocols. TeSys T predicts what will happen in the process, as it accurately monitors current, voltage, and power over a wide range.

TeSys T is a green motor management system with unique power monitoring capabilities for better energy management.

TeSys T carries all appropriate and necessary third party certifications.

To get detailed information about TeSys T, visit our website at www.schneider-electric.us.com.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

New!

LTMR Controller



LTMR27EBD

The controller is the central component in the motor management system. It manages the basic functions such as:

- measurement of 3-phase current via integral current transformers from 0.4 to 100 A (up to 810 A by external current transformers)
- measurement of ground current internally or external ground sensors
- measurement of motor temperature
- inputs and outputs for the various motor control modes, detected fault management, and other functions

Characteristics

As standard, the controller manages the following:

Control Modes

- overload mode
- independent mode
- reverser mode
- 2-speed mode
- 2-step mode
- custom mode

Inputs/Outputs

- 6 discrete logic inputs
- 3 relay logic outputs (1 N.O. contact each)
- 1 relay output for detected fault signaling (1 N.O. + 1 N.C.) overload relay
-

Measurements

- connection for a thermistor probe
- connections for a ground sensor

Table 16.277: Controllers

Setting Range (A)	Control Voltage (V)	Current Range (A)	Catalog Number
Modbus™ Protocol			
8	24 Vdc	0.4–8	LTMR08MBD
	100–240 Vac	0.4–8	LTMR08MFM
27	24 Vdc	1.35–27	LTMR27MBD
	100–240 Vac	1.35–27	LTMR27MFM
100	24 Vdc	5–100	LTMR100MBD
	100–240 Vac	5–100	LTMR100MFM
Ethernet TCP/IP Communication (Protocols: Ethernet/IP and Modbus/TCP)			
8	24 Vdc	0.4–8	LTMR08EBD
	100–240 Vac	0.4–8	LTMR08EFM
27	24 Vdc	1.35–27	LTMR27EBD
	100–240 Vac	1.35–27	LTMR27EFM
100	24 Vdc	5–100	LTMR100EBD
	100–240 Vac	5–100	LTMR100EFM
CANopen Protocol			
8	24 Vdc	0.4–8	LTMR08CBD
	100–240 Vac	0.4–8	LTMR08CFM
27	24 Vdc	1.35–27	LTMR27CBD
	100–240 Vac	1.35–27	LTMR27CFM
100	24 Vdc	5–100	LTMR100CBD
	100–240 Vac	5–100	LTMR100CFM
DeviceNet™ Protocol			
8	24 Vdc	0.4–8	LTMR08DBD
	100–240 Vac	0.4–8	LTMR08DFM
27	24 Vdc	1.35–27	LTMR27DBD
	100–240 Vac	1.35–27	LTMR27DFM
100	24 Vdc	5–100	LTMR100DBD
	100–240 Vac	5–100	LTMR100DFM
Probibus™ DP Protocol			
8	24 Vdc	0.4–8	LTMR08PBD
	100–240 Vac	0.4–8	LTMR08PFM
27	24 Vdc	1.35–27	LTMR27PBD
	100–240 Vac	1.35–27	LTMR27PFM
100	24 Vdc	5–100	LTMR100PBD
	100–240 Vac	5–100	LTMR100PFM

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



LTMEV40FM

Table 16.278: Expansion Module

Input Control Voltage	Number of Inputs	Supply to the Electronics	Catalog Number
24 Vdc	4	via the LTMR controller	LTMEV40BD
100–240 Vac	4		LTMEV40FM



LTM9KCU
(Holder Only)



LTMCU



Magelis Display

Table 16.279: HMI Modules and Software

Description	Supply Voltage	Catalog Number
Operator Control unit	via the LTMR controller	LTMCU
Holder for LTMCU (with magnetic back)	—	LTM9KCU
Magelis compact display	24 Vdc	XBTN410
Configuration software Windows 99, 2000, XP	—	VJDSNDTMSV13M

New!

Components

LTME Expansion Module

The expansion module adds the following functionalities to the TeSys T controller:

- voltage measurement between phases up to 690 V nominal
- 4 additional inputs

Inputs

- 4 discrete logic inputs (isolated)
- 2 types of power for the inputs: 24 Vdc and 100 to 240 Vac
- A 24 Vdc LTMR controller can be assembled with a 240 Vac expansion module and vice versa

The LTMVE must be connected to the LTMR controller by a connecting cable.

HMI—Human Machine Interface

Depending on the application, two types of HMI can be used with the motor management system.

- The LTMCU operator control unit:
  - Control/monitoring of a 1 to 1 LTMR controller
- A Magelis XBTN410 terminal
  - Control/monitoring of 1 to 8 LTMR controllers

LTMCU Compact Display

- Configure the parameters
- Display information
- Monitor the alarms and detected faults
- Local control of the motor via the local control interface (keys can be customized)
- Three different languages can be loaded into the LTMCU controller at the same time: English, French, Spanish are the defaults.

A language download utility (LangTool), together with all the other languages, are available on the website www.schneider-electric.com.

This tool allows the languages present in the LTMCU control until to be adapted.

The LTMCU HMI control unit has an additional front panel RJ45 port, protected by a flexible cover.

Magelis™ Display

Two applications have been predefined for the TeSys T controller. Depending on the application loaded, the HMI terminal makes it possible to:

- Configure and monitor a motor starter (LTM_1T1_V1.dop)
- Monitor and modify certain parameters up to 8 motor starters (LTM_1T8_X_V1.dop)

Vijeo Designer programming software is needed for loading applications into the XBT HMI terminal.


© 2025 Schneider Electric
All Rights Reserved
3/21/2025



LT6CT4001



DA1TT●●

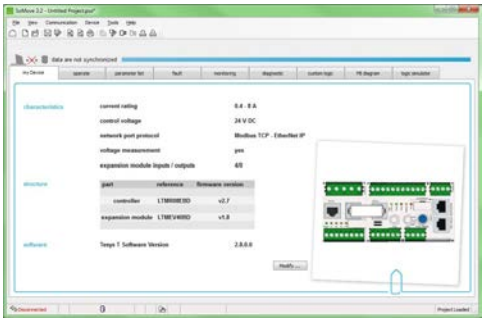

New!

Components

Table 16.280: Current Transformers

Current Transformer Ratio *[1]*	Catalog Number
100:1	LT6CT1001
200:1	LT6CT2001
400:1	LT6CT4001
800:1	LT6CT8001

Table 16.281: Ground Fault Sensors

Rated Operational Current Ie (A)	Internal Toroid Ø (mm)	Catalog Number
Closed Toroids, Type A		
65	30	50437
85	50	50438
160	80	50439
250	120	50440
400	200	50441
630	300	50442
Split Toroids, Type QA		
85	46	50485
250	110	50486

NOTE: Dimensional drawings are in catalog DIA1ED2061002EN-US.

Table 16.282: PTC Thermistor Probes *[2]*

Description	Nominal Operating Temperature (NOT) °C	Color	Catalog Number *[3]*
Triple Probes	90	Green/green	DA1TT090
	110	Brown/brown	DA1TT110
	120	Gray/gray	DA1TT120
	130	Blue/blue	DA1TT130
	140	White/blue	DA1TT140
	150	Black/black	DA1TT150
	160	Blue/red	DA1TT160
	170	White/green	DA1TT170

Configuration with SoMove™ Software

The TeSys™ T configurator is incorporated in the SoMove software application, versions 2.2 and higher.

SoMove software allows configuration, commissioning and maintenance of motor starters protected by a TeSys T controller.

A library containing predefined motor control mode functions is available in order to:

- allow standardization
- avoid errors
- reduce motor starter setup times

By using logic functions, a custom mode makes it possible to:

- easily adapt these predefined motor control mode functions to the specific needs of your applications
- create new functions

The functions thus defined can be saved and used to build your function library for future applications.

To create special functions, a logic editor is incorporated in the configurator and allows a choice of 2 programming languages:

- function block
- structured text

Table 16.283: Configuration Tools

Description	Composition	Catalog Number
Connection kit for PC serial port for Modbus™ PLC multidrop connection	1 x 3 m length cable with two RJ45 connectors 1 RS232/RS485 converter with one 9-pin female SUB-D connector and one RJ45 connector.	VW3A8106
USB serial port adapter *[4]* for connecting a TeSys T controller to your PC	1 USB / serial port adapter *[4]*	TSXCUSB485
USB serial port cable for connecting a TeSys T controller to your PC	1 USB / serial port cable	TCSMCNAM3M002P

[1] For use with LTMR08●● controllers. Three current transformers are required for 3-phase applications.
[2] PTC: Positive Temperature Coefficient.
[3] Sold in lots of 10.
[4] Modbus RS–485 cable required, not included.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



8536SCO3V02H626

New!

Accessories

Table 16.284: Connection Accessories

Description		Length m (ft)	Catalog Number
For Ethernet TCP/IP connection			
Shielded twisted pair cables, UL and CA 22.1 approved			
Cables fitted with 2 x RJ45 connectors for connection to terminal equipment	Straight	2 (7)	490NTW00002U
		5 (16)	490NTW00005U
		12 (39)	490NTW00012U
		40 (131)	490NTW00040U
		80 (263)	490NTW00080U
For Modbus PLC connection			
Cables fitted with 2 x RJ45 connectors		0.3 (1)	VW3A8306R03
		1 (3)	VW3A8306R10
		3 (10)	VW3A8306R30
T-junctions		0.3 (1)	VW3A8306TF03
		1 (3)	VW3A8306TF10
RS485 line terminator		—	VW3A8306R
For CANopen connection			
Cables		50 (164)	TSXCANCA50
		100 (328)	TSXCANCA100
		300 (984)	TSXCANCA300
IP20 connectors SUB-D 9-pin female Line end adapter switch	Elbowed (90°)	—	TSXCANKCDF90T
	Straight	—	TSXCANKCDF180T
	Elbowed (90°) SUB-D 9-pin connector for connection to PC or diagnostic tool	—	TSXCANKCDF90TP
For DeviceNet connection			
Cables		50 (164)	TSXCANCA50
		100 (328)	TSXCANCA100
		300 (984)	TSXCANCA300
For Profibus DP connection			
Cables		100 (328)	TSXPBSCA100
		400 (1313)	TSXPBSCA400
Connectors	With line terminator	—	490NAD91103
	Without line terminator	—	490NAD91104
	With line terminator and terminal port	—	490NAD91105

Table 16.285: Connecting Cables

Description	Number and type of connectors	Length m (ft)	Catalog Number
LTMCU control unit	2 x RJ45	1 (3)	VW3A1104R10
		3 (10)	VW3A1104R30
		5 (16)	VW3A1104R50
XBTN410	SUB-D 25-pin female to RJ45	2.5 (8)	XBTZ938
LTME expansion module	2 x RJ45	0.04 (0.13)	LTMCC004
		0.3 (1)	LU9R03
		1 (3)	LU9R10
180 degree Ethernet external connector	1 x RJ45	–	LTM9CE180T

Table 16.286: Marking Accessories

Description	Composition	Sold in lots of	Catalog Number
Clip-in markers (maximum of 5 per unit)	Strips of 10 identical numbers (0 to 9)	25	AB1R● *[5]*
	Strips of 10 identical capital letters (A to Z)	25	AB1G● *[5]*

[5] When ordering, replace the ● in the catalog number with the number or letter required.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Dimensions (mm)

Table 16.287: LTMR•• controllers


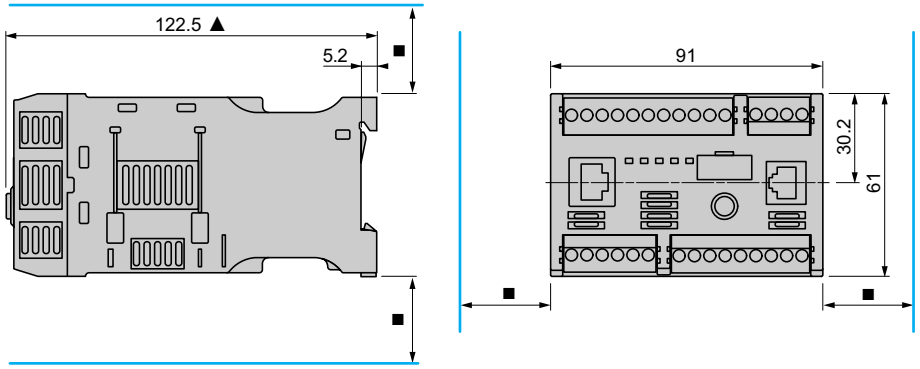



Table 16.288: LTMEV40•• expansion modules

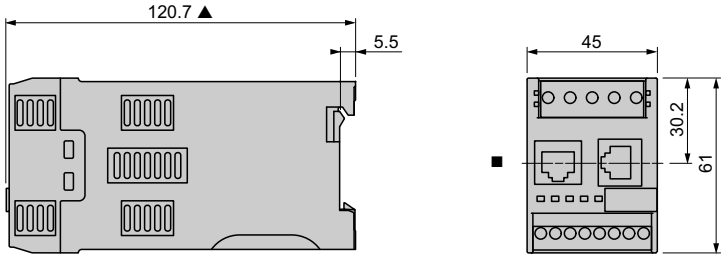


■ Leave a gap around the device of: 9 mm at 45 °C, 9–40 mm from 45–50 °C, 40 mm at 60 °C.

▲ 140 mm with an RJ45 connector for connection to an expansion module and a network; 166 mm with a Profibus DP/CANopen connector.


Table 16.289: LTMCU operator control unit

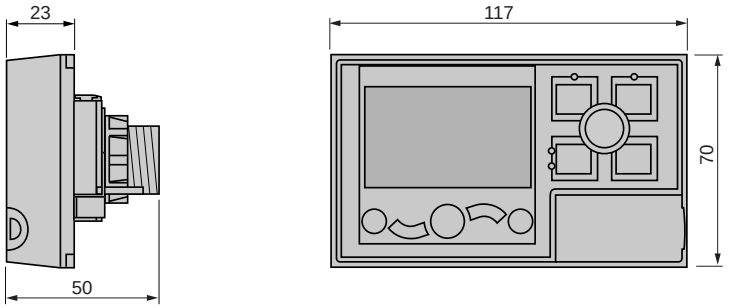


Panel mounting, cut-out

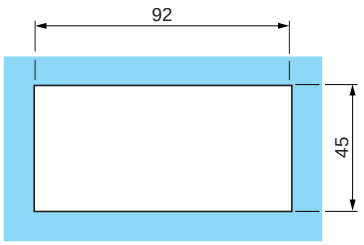

Current Transformers
LT6CT

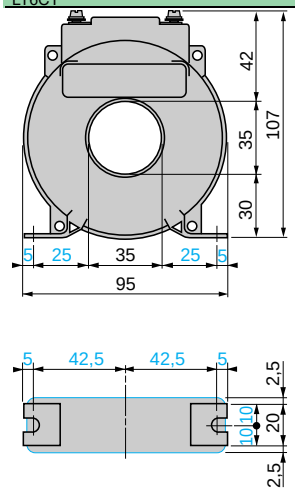


HMI Terminal
XBTN410




58 mm with SUB-D 25-pin elbowed cable XBTZ9680 for Twido®, TSX Micro™ and Premium™ PLCs or XBTZ998 for Advantys™ STB distributed I/O system.

104 mm with SUB-D 25-pin cable XBTZ68/Z9681 for Twido®, TSX Micro™ and Premium™ PLCs

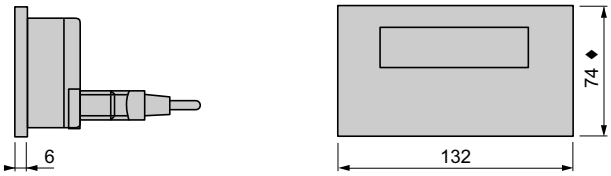

♦ **104 mm** with mounting clips (provided with the product).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Stand-Alone Mounting Bracket (Mounted to the Overload Relay)

New!

Adapted Bimetallic or Solid-State Overload Relay Mounting Bracket Adapter (NEMA Sizes 00–1)

The adapted bimetallic Type S starter incorporates a mounting bracket for use with a self-contained adjustable bimetallic or solid state overload relay. A separately mounting version of the bracket is also available for use with contactors that do not offer the same terminal configurations as the Type S, or for applications with height restraints that demand mounting next to the contactor rather than directly below as is typical for most starter configurations.

The bimetallic thermal overload relays feature Class 10 or Class 20 protection with automatic and manual (hand) reset and a trip-free mechanism. These overload relays are ambient temperature compensated, and available with or without phase imbalance protection. The component is available as a replacement on a starter or as a separately mounted overload relay with the relay adapter. *Factory or field-installed*: LRD and LR3D overload relays can be factory installed if the FLA of the application is known. They can also be purchased separately and field installed.

The solid-state overload relays feature Class 5, 10, 20 or 30 protection (dip switch selectable) with automatic and manual (hand) reset and a trip-free mechanism. These overload relays are ambient-temperature compensated and can be wired for single-phase applications (must use the three-pole unit). The component is available as field-installable on a starter with the adapter installed, or as a separately mounted overload relay with the relay adapter. If using the LR9D with a single-phase motor, the three-pole adapter must be purchased to accommodate looping of the motor leads.

For more information, see Table 16.315.

NOTE: The LRD, LR3D, or LR9D overload relays must be purchased separately.

Table 16.290: Replacement or Retrofit

Description	Sizes	Maximum Full Load Current (A) of Overload Relay	Catalog Number
Two Pole	00, 0, 1	27	—
Three Pole	00, 0, 1	27	—

Table 16.291: Stand Alone

Description	Sizes	Maximum Full Load Current (A) of Overload Relay	Catalog Number
Two Pole	00, 0, 1	27	—
Three Pole	00, 0, 1	27	—



Type RB1



Type W1





Type RA2 Series B
Type SC1

External Reset Mechanisms, Class 9066

Type RA kits provide a convenient external means for resetting overload relays mounted in control enclosures of almost any depth. Designed for use on NEMA 1, 4 or 12 enclosures, they can be used with any Square D open type magnetic starter or Class 9065 overload relay. All kits are individually packaged for easy stocking and include complete installation instructions.

Only a single mounting hole is required in the enclosure door. Each kit contains one or more threaded reset rods, grooved at intervals of 3/4" so they can be cut to the approximate length required without thread damage. Final adjustment is easily made after installation by rotating a plunger and tightening the lock nut. Mechanisms with more than one reset rod include a steel cross bar with mounting holes located at 1/2" intervals, providing a choice of rod locations to suit any application. All steel parts are electrically isolated from the enclosure and the operator.

Type RB kits make it possible to field install external reset mechanisms to Type S combination starters in NEMA 12 enclosures. They may also be used to replace external reset mechanisms on Type S combination starters in NEMA 1, 4 and 12 enclosures.

Table 16.292: Class 9066 External Reset Mechanisms

Where Used	Type of Enclosure	Reset Mechanism Kit	
		Description	Catalog Number
OEM Kit for commercial enclosures	NEMA 1, 12	With 1 Rod	9066RA1
		With 2 Rods	9066RA2
		With 3 Rods	—
Replacement on 8538, 8539 starters	NEMA 1, 12	Size 0 and 1	9066RB1
		Size 2	9066RB2
On commercial enclosures or Type S combination starters	NEMA 4	W1 is a boot only and must be used with RA or RB Kit listed above	9066W1
Replacement on Class 8536 Type S starters	NEMA 1 with slip-on covers	Size 00, 0 and 1	9066SC1
		Size 2	—
		Size 3	—
Retro-fit kit Class 8940 Pump Panel	NEMA 3R	Reset for use with 9065TJF, Series B, OLR	—

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



NEMA 4X Enclosure



NEMA 12 Enclosure



NEMA 4 Enclosure



Type SCH2
NEMA 3R Enclosure

Separate Enclosures, Class 9991

Separate enclosures can be used with open style devices for field assembly of enclosed controls. These enclosures, plus the open style components, are equivalent to a factory-assembled device. Separate enclosures are for use only with the following equipment:

- **NEMA 4 and 12** Class 9991 separate enclosures for Type S devices come standard with closing plates. See Table 16.294 for the specific number of closing plates. For applications requiring enclosures without closing plates, contact your nearest Schneider Electric sales office.
- **NEMA 3R** enclosures for field assembly of equipment for outdoor applications come with three closing plates, a reset mechanism, and a predrilled panel as standard. For a conduit connection to the top of these enclosures, select watertight hubs from the listing on Digest page 3-10 in accordance with applicable code requirements. Square D NEMA 12 enclosures can also be modified for outdoor use. For details, refer to the NEMA 12 enclosure modification information on page page 16-114. **NOTE**: Not for use in high-corrosive outdoor locations or sea coast environments.
- **NEMA 4X** enclosures for Type S devices, Sizes 0–2 and 30–60 A, come standard without closing plates. Cover mounted control units for NEMA 4X separate enclosures are available as a factory modification only.

When closing plates are removed from NEMA 4, 12, and 3R enclosure covers, the openings can be used for easy installation of Class 9001 Type K or SK cover-mounted control units. Convenient Class 9999 modification kits containing Class 9001 Type K control kits can be found on page page 16-129.

Table 16.293: How to Order


To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9991	—

Table 16.294: Selection, Class 9991

For Use With		Enclosure Classification						
		NEMA Size or Ampere Rating	NEMA 4X Watertight, Dusttight and Corrosion-Resistant Glass-Polyester	NEMA 4 *[1]* Watertight and Dusttight Stainless Steel		NEMA 12/3R Dusttight and Driptight		NEMA 3R Rainproof, Sleet Resistant, Outdoor Use
Class	Types (All Pole Arrangements)		Type	Type	Number of Closing Plates	Type	Number of Closing Plates	Type
Manual Starters								
2510 *[2]*	MBO, MCO	MO M1 M1P	—	—	—	—	—	—
Magnetic Contactors								
8502 *[3]*	SAO, SBO, SCO	00, 0, 1	SCW20	—	2	—	2	SCH2
	SDO	2	SDW20	SDW11	2	SDA11 *[4]*	2	SDH1
	SEO	3	—	SEW11	3	—	3	SEH1
	SFO	4	—	SFW11	3	—	3	—
Magnetic Starters								
8536	SAO, SBO, SCO	00, 0, 1	—	—	2	—	2	SCH2
	SDO	2	—	SDW11	2	SDA11 *[4]*	2	SDH1
	SEO	3	—	SEW11 *[5]*	3	—	3	SEH1
	SFO	4	—	SFW11 *[5]*	3	—	3	—
Lighting Contactors, Non-Combination, Electrically and Mechanically Held								
8903 *[3]*	LO, LXO	20 A	SDW20	SDW11	2	SDA11 *[4]*	2	SDH1
	SMO	30 A	SCW20 *[6]*	—	2	—	2	SCH2
	SPO	60 A	SCW20 *[6]*	SDW11	2	SDA11 *[4]*	2	SDH1
	SQO	100 A	—	SEW11 *[5]*	3	—	3	SEH1
	SVO	200 A	—	—	—	—	—	—
Reversing and Two-Speed, Horizontally Arranged Contactors and Starters								
8702 *[3]* 8736	SBO, SCO SDO	0, 1 2	—	SCW12 SDW12	3	— SDA12 *[4]*	3	— —
8810	SBO & SCO	0, 1	—	SCW13	3	—	3	—

[1] The standard cabinet has a brushed finish.
[2] Type MBO, Size MO only.
[3] For contactors, replace the reset assembly with a proper closing plate: for NEMA 4, use Class 9001 Type K52; for NEMA 3R and 12, use Class 9001 Type K51. (Class 9991 Types SCW20 and SDW20 are designed for contactors only, so reset closing plates are not required.)
[4] NEMA 12 enclosures can be field modified for outdoor non-corrosive and non–service entrance rated applications. See page 16-114 for more information.
[5] This enclosure is suitable only for starters with a **melting alloy**, **solid-state**, or **adapted bimetallic** overload relay.
[6] For electrically held devices only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Flush Mounting Starter with Pull Box and Mounting Strap and Plaster Adjustment Feature



Type SCG8
NEMA 1 Enclosure

Flush Mounting, General Purpose Separate Enclosures

Flush mounting, general purpose separate enclosures for Type S Sizes 0–2, 30–60 A are provided with knock-outs in the cover for field assembly of one Class 9999 push button or selector switch kit and one Class 9999 pilot light kit. (Refer to Class 9999 for selection.) For Type S Size 3, 100 A, three closing plates are provided for installation of Class 9001 Type K oiltight control units. For enclosure dimensions, refer to Table 16.299.

Table 16.295: Flush Mounting Selection Table

For Use With		NEMA Size or Ampere Rating	Flush Mounting General Purpose (Components)			
			Flush Plates		Mounting Strap	Pull Box
Class	Types (All Pole Arrangements)		Standard	Stainless Steel *[7]*		
			Type	Type	Type	Type
2510	MBO, MCO	MO M1 M1P	MF1	(with pullbox and plaster adjustment)		
			MF2	(without pullbox but with mounting strap)		
Magnetic Contactors						
8502*[8]*	SBO, SCO	0, 1	—	—	—	—
	SDO	2	—	—	SDF2	—
	SEO	3	SEF11	(Enclosure Complete)		
Magnetic Starters						
8536	SBO, SCO	0, 1	—	—	—	—
	SDO	2	—	—	SDF2	—
Lighting Contactors Non-Combination Electrically and Mechanically Held						
8903*[8]*	LO, LXO	20 A	—	—	SDF2	—
	SMO 1–4	30 A	—	—	—	—
	SMO 10–13	30 A	—	—	—	—
	SPO 1–4	60 A	—	—	SDF2	—
	SPO 10–13	60 A	—	—	SDF2	—
	SQO 1–13	100 A	SEF11	(Enclosure Complete)		

NEMA 1 General Purpose separate enclosures in Table 16.296, when used with open style components, are equivalent to a standard factory assembled control device.

Table 16.296: NEMA 1 Selection Table

For Use With			NEMA 1 General Purpose Enclosure
			Class 9991
Class	Type	No. of Poles	Type
2510	F and K	All	—
	M–Sizes M0 and M1	All	—
	M–Size M1P	All	—
8501	CO	All	UE1
	XO	2–12, 2–4 **with** attachments	UE7
	XDO	2–8 **without** attachments	
8502	SAO, SBO, SCO	2–4	—
	SDO	2–4	—
	SEO	2–4	—
	SFO	2–4	—
8536	SAO, SBO, SCO	2–4	SCG8
	SDO	2–4	SDG8
	SEO	2–4	SEG8 *[8] [9]*
	SFO	2–4	—
	SGO	3	—
8702, 8736	SAO, SBO, SCO	All	SCG9
	SDO	All	SDG9 *[10]*
8903	LO, LXO	All	LXG1 *[11]*
	SMO	All	—
	SPO	All	—
	SQO	All	—
	SVO	All	—
8910	DP	1–2	DPG1
	DPA12, 13, 22, 23, 32, 33, 42, 43	2–3	DPG1
	DPA14, 24, 34, 44, 52, 53	2–4	DPG2
	DPA62, 63	2–3	DPG3
	DPA72, 73, 92, 93	2–3	—
	H, J, K, L & M	All	UE6
8911	DPSO13, 23, 33, 43	3	—
	DPSO53	3	—
	DPSO63, 73, 93	3	SEG8
9050	AO (Single Head)	All	UE6
	HO	All	UE6
9070	EO51, EO61, EO71, K750, K1000	—	SDG4
	EO2, EO3, EO4, EO15, EO16 EO18, EO19, T75, T100, T150, T200, T250, T300, T350, T500	—	—
	EO1, EO17, T50	—	UE7

[7] The standard cabinet has a brushed finish.
[8] For contactors, replace the reset assembly with a proper closing plate. For flush mounting, use Class 9999 Type SG2. (Class 9991 Types SEF11 and LF1 are designed for contactors only, so reset closing plates are not required.)
[9] This enclosure is suitable only for starters with a **melting alloy**, **solid-state**, or **adapted bimetallic** overload relay.
[10] For horizontally arranged Class 8702 contactors, replace the reset assembly with a Class 9001 Type K51 closing plate.
[11] If cover mounted control units are required, select an oversized enclosure listed in Table 16.297.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SCW4
NEMA 4 Enclosure



Type SCG1
With Starter, Transformer and Fuse Block Installed



Type SCA11
NEMA 12 Enclosure

Enclosure Selection

NEMA 1, 4, and Oversized Enclosures For the Addition of a Control Circuit Transformer

The Class 9991 enclosures listed in Table 16.297 accept an open type Class 8502 or 8536 Type S, NEMA Size 0, 1, 1P, or 2 contactor or starter along with a fused control circuit transformer (Form F4T) to allow field assembly of enclosed controllers. In the cover of the Class 9991 Type SCG1 enclosure, knock-outs are provided for field addition of Class 9999 cover-mounted control units. All other Class 8502 & 8536 enclosures include a panel with space and drilling for an open-type device and a fused control circuit transformer. In addition, three closing plates are included in each cover for easy installation of Class 9001 Type K or SK control units.

Oversized enclosures for open type Class 8903 Type L & LX, 20 A and Type S, 30 and 60 A electrically and mechanically held lighting contactors include a panel with space and drilling for an open- type contactor and fused control circuit transformer (Form F4T) and/or an auxiliary relay for use with single pole pilot devices (Form R6). When an auxiliary relay is required, use a Class 8501 Type XO11 relay. Three closing plates are provided as standard for easy installation of Class 9001 Type K or SK control units.
Note: A Class 9991 Type SCG1 NEMA 1 separate enclosure can also be used for Class 8903 Type SMO, 30 A electrically held lighting contactor if Form F4T (control transformer), with or without cover control units is required.

NEMA 12/3R Enclosures Modified for Outdoor Applications (not to be used in salt air or corrosive environments)

Field Modifications for NEMA 3 dusttight, raintight and sleet resistant outdoor applications are as follows: Watertight conduit hubs or equivalent provision for watertight connection at the conduit entrance shall be used.

Field Modifications for NEMA 3R rainproof and sleet resistant outdoor applications are as follows:

- Watertight conduit hubs or equivalent provision for watertight connection at the conduit entrance, when the conduit enters at a level higher than the lowest live part, shall be used.
- Drain holes of 1/8 inch diameter shall be added to the bottom of the enclosure.

Class 9001 Type K oiltight/watertight control units can be easily installed in NEMAs 4, 12, and oversized NEMA 1 separate enclosures provided with closing plates. When installing control units simply remove the closing plates and install the proper Class 9001 Type K components. Convenient control unit kits complete with assembled and pre-wired operators for quick installation are available as Class 9999 user modification kits. See Table 16.298 for contents of each control unit kit. Class 9001 Type SK NEMA 4X corrosion resistant control units may be used as an alternate.

Table 16.297: NEMA 1, 4, and 12 Enclosures

For Use With				Class 9991 Enclosure			Recommended Class 9070 *[12]* Transformer Selection				
Class	Type	NEMA Size or Ampere Rating	No. of Poles	General Purpose NEMA 1	Watertight and Dusttight Stainless Steel NEMA 4 *[13]*	Dusttight and Driptight Industrial Use NEMA 12 *[14]*	Standard		Extra Capacity		
				Type	Type	Type	Type	VA	100 VA Type	150 VA Type	300 VA Type
Magnetic Contactors and Starters *[15]*											
8502, 8536	SAO, SBO, SCO	00, 0, 1	1–3	SCG1	SCW4	SCA4	T50	50 VA	T100 *[16]*	T150 *[16]*	—
			4–5				T100 *[16]*	100 VA	—	T150 *[16]*	—
	SDO	2	2–5	SDG4	—	—	T100	100 VA	—	T150	T300
Lighting Contactors, Non-Combination											
8903	LO, LXO	20 A	All	—	SDW3	—	T50	50 VA	—	—	—
	SMO *[17]*	30 A	1–3				T50	50 VA	T100 *[16]*	T150 *[16]*	—
			4–5				T100 *[16]*	100 VA	—	T150 *[16]*	—
	SPO *[17]*	60 A	2–5				T100	100 VA	—	T150	T300

Table 16.298: Control Unit Selection Table

Class 9999 Type	Control Function	Kit Contents	
		Class and Type	Description
SA3	Start-Stop Push Button	1-9001 KR1B 1-9001 KR1R 1-9001 KN201 1-9001 KN202 2-9001 KA1	Start Operator Stop Operator Start Legend Plate Stop Legend Plate Contact Block
SC8	Hand-Off-Auto Selector Switch	1-9001 KS43B 1-9001 KN260 1-9001 KA1	Selector Operator Switch Hand-Off-Auto Legend Plate Contact Block
SP28R	Pilot Light (120 V)	1-9001 KP1R31	Red Pilot Light

[12] For complete description, see the Class 9070 section. **Note:** The Class 9991 Type SCG1 enclosure comes standard with a Class 9999 Type SF4 fuse block.
[13] The standard cabinet has a brushed finish.
[14] NEMA 12 modified for outdoor use (see NEMA 12/3R Enclosures Modified for Outdoor Applications).
[15] For contactors (Class 8502), a separate closing plate is provided with each enclosure to replace the reset mechanism—with the exception of Class 9991 Type SCG1, which requires a separate reset closing plate: Class 9999 Type SG2.
[16] To mount in an SCG1 enclosure, a Class 9991 Type S1 adapter bracket is also required.
[17] Mechanically held.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 1 Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.299: NEMA 1—General Purpose Enclosures (Standard)

Class 9991 Type	For Use With				Dimensions (inches/millimeters)														Weight (lb)
	Class	Type	Size	No. of Poles	Fig. No.	Mounting Screws (in.)	A	B	C	D	E	F	G	H	I	J	K	L	
LXG1	8903	LO , LXO	20 A	2–12	1	—	7.81 198	12.69 322	6.03 153	—	1.09 28	10.50 267	1.09 28	1.09 28	5.63 143	5.75 146	1.09 28	5.63 143	8
DPG1	8910	DP	20–40	1–2	1	(4) #10	4.85 123	8.5 216	4.03 102	2.42 62	.109 3	5.75 146	.531 13	.92 23	3.00 76	3.75 95	—	—	2
		DPA	A	1–3															
SCG8	8536	SAO	00	2–3															
		SBO SCO	0 1	All					5.56 141										
DPG2	8910	DPA	—	—															
SDG8	8536	SDO	2	All					6.31 160										
DPG3	8910	DPA	—	—															
SEG8	8536	SEO	3	All															
	8911	DPSG63 to 93	—	All															
SCG9	8702 *[18]*	SBO, SCO	0 & 1	All	2	(4) 5/16	11.88 302	11.88 302	7.41 188	9.75 248	1.06 27	1.06 27	9.75 248	1.06 27	.31 8	—	—	—	16
	8922	ETBC20, ETBC36	—																
SDG9	8702 *[18]*	SCO	2	All	2	(4) 5/16	14.88 378	14.13 359	7.56 192	12.75 324	1.06 27	1.06 27	12.00 305	1.06 27	.31 8	—	—	—	24
	8922	ETBC60	—																

Table 16.300: NEMA 1—General Purpose Enclosures (Oversize)

Class 9991 Type	For Use With															
	Class	Type	Size	No. of Poles	Fig. No.	Mounting Screws (in.)	A	B	C	D	E	F	G	H	I	Weight (lb)
SDG4	8502	SDO (Form F4T)	2	All												21
	8536	SDO (Form F4T)	2	All					7.66 194							
	9070	EO51, EO61, EO71, T750, T1000	—	—					7.56 192							
SCG1	8502	SBO, SCO (Form F4T)	0, 1	All	3	(4) 9/32	6.34 161	15.88 403	5.19 132	4.66 118	.84 21	14.38 365	.75 19	.28 7	.35 9	8
	8536	SBO, SCO (Form F4T)	0, 1	All												
	8903	SMO (E.H.) (Form F4T)	30 A	All												

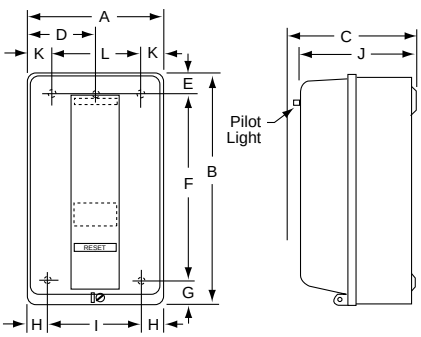


Figure 1

Dimensions: **in.**
mm

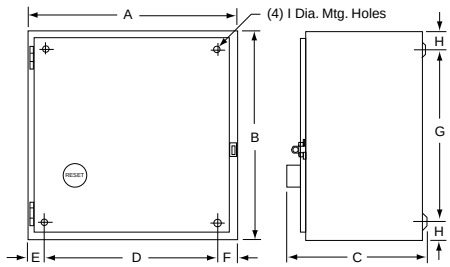


Figure 2

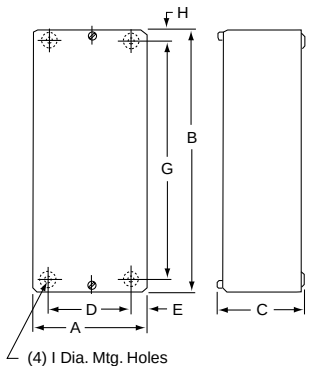


Figure 3

NEMA 1 and 3R Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.301: NEMA 1—General Purpose Enclosures

Class 9991 Type	For Use With			Dimensions (See Figure 4)										Weight (lb)
	Class	Type	No. of Poles	A	B	C	D	E	F	G	H	J	L	
UE1	8501	CO	All	3.63 92	5.28 134	3.31 84	1.88 48	3.63 92	1.06 27	1.50 38	1/4 in. *[19]*	1/2–3/4 in.		2
UE6	8910	H, J, K L & M	All	4.91 125	5.75 146	5.53 140	3.50 89	4.38 111	1.56 40	2.00 51	9/32 in.	1/2–3/4 in. 1–1-1/4 in.	1/2–3/4 in.	2
	9050	AO (Single Head)	All											
		HO	All											
UE7	8501	XO	2–12, 2–4 w/ Attachments	4.87 124	7.79 198	7.53 191	3.50 89	6.38 162	1.31 33	1.88 48	#10	1/2–3/4 in.		4

[18] The standard enclosure has space for a fused control transformer, **Form FF4T**, on Sizes 0–2.
[19] Class 9991 Type UE1 has only 3 of the **H** diameter mounting holes: 2 in the bottom as shown, and 1 centered at the top.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.301 NEMA 1—General Purpose Enclosures (cont'd.)

Class 9991 Type	For Use With			Dimensions (See Figure 4)										Weight (lb)
	Class	Type	No. of Poles	A	B	C	D	E	F	G	H	J	L	
		XDO	2–8											
	9070	EO1, EO17 T25, & T50	—											

Table 16.302: NEMA 3R—Rainproof and Sleet-Resistant Enclosures

Class 9991 Type	For Use With				Dimensions (see Figure 5)																	
	Class	Type	Size	No. of Poles	A	B	C	D1	D2	E	F	G1	G2	H1	H2	J	K	L	M	N	P	K.O. X	K.O. Y
SCH2	8502 8536	SBO SCO	0, 1	All	8.83 224	12.30 312	7.12 181	1.39 35	1.44 37	6.00 152	7.50 191	2.61 66	2.19 56	2.08 53	2.62 66	14.28 363	1.37 35	1.37 35	1.88 48	4.38 111	1.83 46	1/2 3/4 1	1/2 3/4 1
	8903	SMO	30 A																				
SDH1	8502 8536	SDO	2	All	9.83 250	16.30 414	8.62 219	1.39 35	1.44 37	7.00 178	11.50 292	2.61 66	2.19 56	2.08 53	2.62 66	16.78 426	1.31 33	1.75 44	2.13 54	4.88 124	1.83 46	1 1-1/4 1-1/2	1/2 3/4
	8903	LO LXO	20 A																				
	8903	SPO	60 A																				
SEH1	8502 8536	SEO	3	All	12.63 321	25.30 643	8.62 219	1.39 35	1.44 37	10.00 254	20.60 523	2.61 66	2.19 56	2.08 53	2.62 66	19.78 502	1.31 33	2.31 59	2.69 68	6.38 162	1.83 46	1 1-1/4 2 2-1/2	1/2 3/4
	8903	SQO	100 A																				

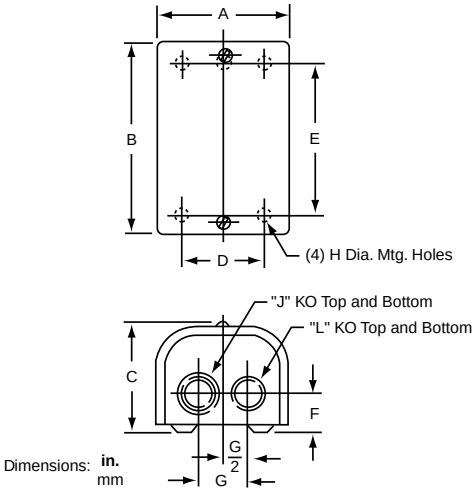


Figure 4

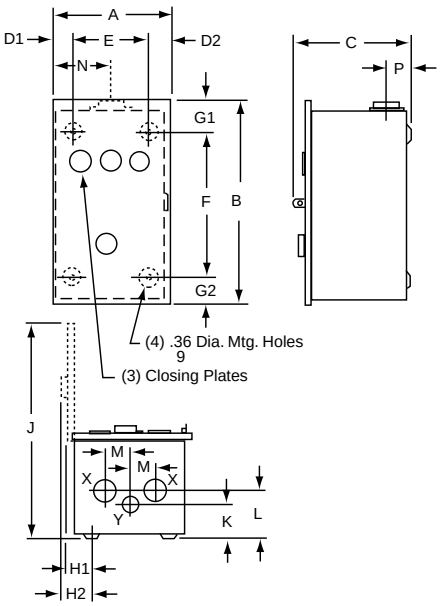


Figure 5

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 4 and 4X Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.303: NEMA 4X—Watertight and Corrosion Resistant Enclosures

Class 9991 Type	For Use With				Dimensions (see Figure 6)												Hub Dia.		Weight (lb)
	Class	Type	Size	No. of Poles	A	B	C	D	E	F	G	H	I	J	K	L	Bot. Only W	Top & Bot. X	
SCW20	8903	SMO (E.H.)	30 A	All	6.50 165	6.44 164	12.13 308	.75 19	5.00 127	8.25 210	1.69 43	3.34 85	10.06 256	1.31 33	2.13 54	.31 8	3/4 in.	1 in.	7
	8502	SBO, SCO	0, 1	All															
SDW20	8903	LO, LXO	20 A	All	8.50 216	7.06 179	13.88 352	.75 19	7.00 178	10.50 267	1.69 43	3.91 99	11.94 303	1.63 41	2.38 60	.31 8	3/4 in.	1-1/2 in.	13
	8903	SPO (E.H.)	60 A	All															
	8502	SDO	2	All															

Table 16.304: NEMA 4—Watertight Enclosures (Standard)

Class 9991 Type	For Use With				Dimensions (see Figure 6)												Hub Dia.		Weight (lb)
	Class	Type	Size	No. of Poles	A	B	C	D	E	F	G	H	I	J	K	L	Bot. Only W	Top & Bot. X	
SDW11	8903	LO, LXO	20 A	All	8.13 206	7.88 200	16.19 411	1.56 40	5.00 127	15.00 381	1.09 28	1.94 49	14.75 375	2.00 51	2.63 67	.31 8	3/4 in.	1-1/2 in.	18
	8903	SPO	60 A	All															
	8502	SDO	2	All															
	8536	SDO	2	All	8.13 206	8.56 217	16.19 411	1.56 40	5.00 127	15.00 381	1.09 28	2.88 73	14.75 375	2.00 51	2.63 67	.31 8			
SEW11	8903	SQO	100 A	All	18.15 461	8.77 223	32.21 818	3.08 78	12.00 305	30.50 775	.86 22	3.67 93	26.71 678	2.58 66	3.19 81	.44 11	3/4 in.	2-1/2 in.	51
	8502	SEO	3	All															
	8536	SEO	3	All	18.15 461	9.58 243	32.21 818	3.08 78	12.00 305	30.50 775	.86 22	4.48 114	26.71 678	2.58 66	3.19 81	.44 11			
SFW11	8536	SFO	4	All															
	8502	SFO	4	All	18.15 461	8.77 223	32.21 818	3.08 78	12.00 305	30.50 775	.86 22	3.67 93	26.71 678	2.58 66	3.19 81	.44 11			

Table 16.305: NEMA 4—Watertight Enclosures (Oversize)

Class 9991 Type	For Use With				Dimensions (see Figure 7)												Hub Dia.		Weight (lb)
	Class	Type	Size	No. of Poles	A	B	C	D	E	F	G	H	I	J	K	L	Bot. Only W	Top & Bot. X	
SCW2	8702 8736	SCO	1	All	12.63 321	7.81 198	14.69 373	2.56 65	7.50 191	13.50 343	.59 15	3.88 98	18.41 468	1.66 42	2.31 59	.31 8	3/4 in.	1 in.	23
SCW3	8810	SBO SCO	0 1	All															19
SCW4	8502 8536	SBO, SCO (Form F4T)	0, 1	All															24
SDW2	8702 8736	SDO	2	All	14.88 378	7.25 184	16.19 411	2.56 65	9.75 248	15.00 381	.38 10	3.88 98	20.88 530	1.72 44	2.63 67	.31 8	3/4 in.	1-1/2 in.	25
SDW3	8903	LO, LXO SMO, SPO (Form F4T)	20 A 30 A 60 A	All															29

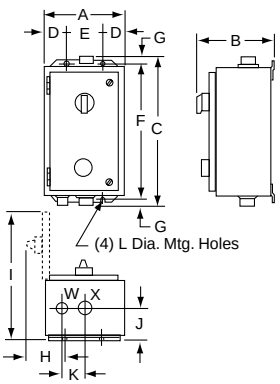


Figure 6

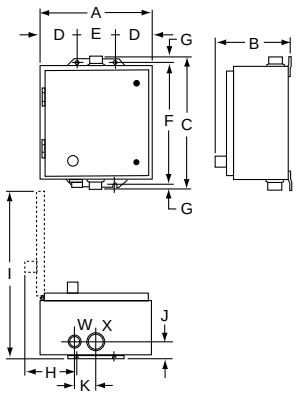


Figure 7

Dimensions: **in.** mm

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

NEMA 12/3R and Flush Mounting General Purpose Enclosures

NOTE: These dimensions are for reference only. If you need precise measurements, contact the Customer Care Center at 1-888-778-2733.

Table 16.306: See Figure: NEMA 12/3R—Dusttight and Driptight Enclosures (Standard)

Class 9991 Type	For Use With			No. of Poles	Dimensions										Weight (lb)
	Class	Type	Size		A	B	C	D	E	F	G	H	I	J	
SDA11	8502	SDO	2	All	8.13 206	9.28 236	16.00 406	1.56 40	5.00 127	15.00 381	.50 13	3.56 90	15.38 391	.31 8	15
	8536	SDO	2	All											
	8903	LO, LXO	20 A	All											
	8903	SPO	60 A	All											

Table 16.307: See Figure: NEMA 12/3R—Dusttight and Driptight Enclosures (Oversized)

Class 9991 Type	For Use With			No. of Poles	Dimensions										Weight (lb)
	Class	Type	Size		A	B	C	D	E	F	G	H	I	J	
SCA3	8810	SBO SCO	0 1	All											18
SCA4	8502 8536	SBO, SCO (Form F4T)	0, 1	All											19

Table 16.308: See Figure: Flush Mounting General Purpose Enclosures

Class 9991 Type	For Use With			No. of Poles	Dimensions								Weight (lb)
	Class	Type	Size		A	B	C	D	E	F	G	H	
SDF2)	8903	LO, LXO	20 A	All	15.19 386	8.94 227	7.63 194	12.88 327	5.44 138	10.94 278	5.13 130	.38 10	17
SDF2)	8502	SBO, SCO	0, 1	All	13.44 341	7.19 183	5.88 149	11.13 283	4.75 121	9.19 233	4.50 114	.38 10	10
	8536	SBO, SCO	0, 1	All									
	8903	SMO (E.H.)	30 A	All									
SDF2)	8502	SDO	2	All	15.19 386	8.94 227	7.63 194	12.88 327	5.44 138	10.94 278	5.13 130	.38 10	17
	8536	SDO	2	All									
	8903	SPO (E.H.)	60 A	All									
SEF11	8502	SEO	3	All	31.00 787	16.75 425	14.25 362	26.25 667	8.00 203	—	—	.18 5	48
	8903	SQO	100 A	All									

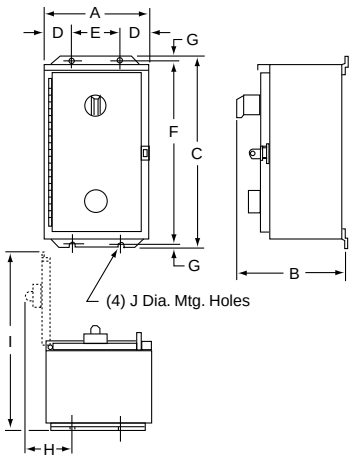


Figure 16.32: NEMA 12/3R—Dusttight and Driptight Enclosures (Standard)

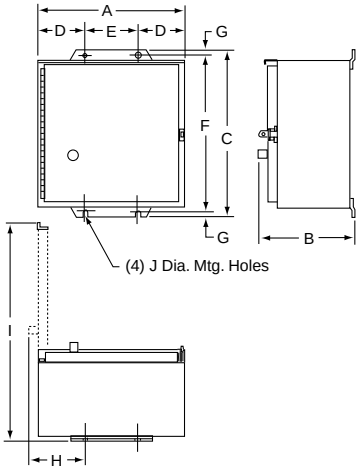


Figure 16.33: NEMA 12/3R—Dusttight and Driptight Enclosures (Oversized)




Figure 16.34: Flush Mounting General Purpose Enclosures

Full Voltage Starters

Factory installed modifications are available for the classes of control equipment listed in the respective tables. Kits are also available for many field modifications and normal parts replacement on most control items. Refer to Classes 9998 and 9999 for complete listings.

NOTES

- Standard equipment dimensions and enclosure construction may not apply when certain special features are added. Such cases should be referred to the factory, with complete description, when precise dimensions are required.
- If a UL label is required, consult the Customer Care Center at 1-888-778-2733. Some Forms **are not** UL Listed.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.309: Full Voltage Starters

	Factory Modifications	Enclosure Type	Form
Pilot Devices in Cover Full Voltage Non-Reversing Controllers Only Classes 8502 8536 8538 8539	**Push Buttons** *[1]*		
	Start-Stop	1 *[2]*, 3R, 4, 4X, 12, 7, & 9	A
	Start-Stop (maintained contact) *[3] [4]*	1 *[2]*, 3R, 4, 4X, 12	A16
	Start-Stop push button and Hand-Off-Auto selector switch *[4]*	1 *[2]*, 3R, 4, 4X, 12	AC
	On-Off *[4]*	1 *[2]*, 3R, 4, 4X, 12	A3
	Single oiltight push button (specify marking) *[4]*	1, 3R, 4, 4X, 12	A11
	Selector Switches		
	Hand-Off-Auto	1 *[2]*, 3R, 4, 4X, 12, 7, & 9	C
	On-Off *[4]*	1 *[2]*, 3R, 4, 4X, 12, 7, & 9	C6
	NON-STANDARD markings for Pilot Devices *[4]*	1, 3R, 4, 12	G12 *[5]*
	Addition of padlock attachment to Class 9001 operators *[4]*	1, 3R, 4, 12	G122
	Pilot Lights (specify color/type) *[6]* See Table 16.310.		
	With Operating Interlock: Add price of each interlock per light	1, 3R, 4, 4X, 12	X *[7]*
Pilot Devices in Cover Full Voltage Reversing and Multi-Speed Controllers Only Classes 8702 8736 8738 8739 8810 8811 8812	**Push Buttons** *[1]*		
	Forward-Reverse-Stop *[4]*	1, 4, 4X, 12, 7, 9	A1
	High-Low-Stop *[4]*	1, 4, 12	A2
	Fast-Off-Slow *[4]*	1, 4, 12	A9
	High-Low push button and Hand-Off-Auto selector *[4]*	1, 4, 12	A10C
	Single oiltight push button (specify marking) *[4]*	1, 4, 4X, 12	A11
	Selector Switches		
	Hand-Off-Auto	1 *[2]*, 4, 4X, 12, 7, & 9	C
	On-Off *[4]*	1 *[2]*, 4, 4X 7, & 9	C6
	High-Off-Low	1, 4, 12	C7
	Forward-Off-Reverse *[4]*	1, 4, 4X, 12, 7, & 9	C14
	High-Low and Hand-Off-Auto *[4]*	1, 4, 12	CC17
	Slow-Fast *[4]*	1, 4, 4X, 12	C19
	Forward-Reverse *[4]*	1, 4, 4X, 12	C20
	High-Low-Off-Auto *[4]*	1, 4, 12	C25
	Non-Standard Markings for Pilot Devices *[4]*	Any	G12 *[5]*
	Pilot Lights *[6]* Available with Operating Interlock	1, 4, 4X, 12	X *[7]*

Table 16.310: Pilot Light Forms

	Standard	Push-to-Test	LED	LED-Push-to-Test
	Form	Form	Form	Form
Red ON	P1 *[8]*	P21	P51	P42
Red OFF	P71	P81	P91	P43
Red Unwired	P38	P28	P58	P44
Green ON	P72	P82	P92	P45
Green OFF	P2 *[8]*	P22	P52	P46
Green Unwired	P39	P29	P59	P47
Amber	P3	P23	P53	P63
Clear	P4	P24	P54	P64
Yellow	P35	P25	P55	P48
Blue	P36	P26	P56	P66
White	P37	P27	P57	P67
Red LOW—Green HI	P73	P83	P93	P77
Green LOW—Red HI	P74	P84	P94	P78
Red OFF—Green FWD/REV	P75	P85	P95	P79
Green OFF—Red FWD/REV	P76	P86	P96	P80

Full Voltage Contactors and Starters

Table 16.311: Control Circuit, Full Voltage and Multi-Speed Controllers Only

Classes 8502, 8536, 8538, 8539, 8702, 8736, 8738, 8739, 8810, 8811 and 8812													
Classes	Factory Modifications		Enclosure Type	Form	NEMA SIZE								
					00	0	1	2	3	4	5	6	7
8502 8536 8538 8539 8702 8736 8738 8739 8810 8811 8812	Separate Control Circuit—(specify voltage and frequency)		Any	S *[9]*	X	X	X	X	X	X	X	X	X
	Fused Control Circuit (without control transformer)												
	One fuse *[10]*		1, 3R, 4, 4X, 12	F	X	X	X	X	X	X	X	—	—
	Two fuses *[10]*		1, 3R, 4, 4X, 7, 9, 12	F4	X	X	X	X	X	X	X	—	—
	Control Circuit Transformers *[11]*—Standard capacity (50 or 60 Hz) Note: All orders requesting Form FT will be supplied as Form F4T.												
	FUSES												
	Primary	Secondary											
	2	1	1, 4, 4X, 12	FF4T	X	X	X	X	X	X	X *[12]*	X	X

[1] All push buttons are momentary contact unless specified otherwise.
[2] Selection of various Form combinations may force the use of a larger enclosure.
[3] Specify the appropriate Class 9001 Type K or SK operator required.
[4] Not available for Size 00.
[5] Specify the marking and/or the required Class 9001 Type KN or SKN legend plate.
[6] Indicate the pilot light color as **Form P1** (red), **Form P2** (green), and so forth, as shown in Table 16.310. Unless otherwise requested, standard practice is to wire a red pilot light to indicate that the device is energized. No additional auxiliary contact is required. Also, standard practice is to wire a green pilot light to indicate that the device is de-energized. An additional normally closed auxiliary contact is supplied. A wiring diagram must be provided for other pilot light colors or arrangements.
[7] To determine the maximum number of auxiliary contacts that can be added to each Type S device, and for the appropriate X Form, refer to Table 16.83 (for non-reversing single-speed devices) or Table 16.162 (for reversing or two-speed devices). For Class 8600 reduced voltage controllers, consult the Customer Care Center at 1-888-778-2733.
[8] Only for pilot light. Available for Size 00.
[9] All combination style devices—such as Class 8538, 8539, 8738, and 8739—that use **Form S** should also use **Form Y74** (auxiliary contact installed on the disconnect switch) in accordance with NEC Article 430-74.
[10] Not available for Sizes 6 and 7.
[11] See Table 16.313.
[12] **Single** primary voltage must be specified.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.311 Control Circuit, Full Voltage and Multi-Speed Controllers Only (cont'd.)

Classes 8502, 8536, 8538, 8539, 8702, 8736, 8738, 8739, 8810, 8811 and 8812													
Classes	Factory Modifications		Enclosure Type	Form	NEMA SIZE								
					00	0	1	2	3	4	5	6	7
	2	1	7 & 9	FF4T	X	X	X	X	X	X	X *[13]*	X	X
	2	2	1, 4, 4X, 12 *[14]*	F4F10T	X	X	X	X	X	X	X *[13]*	—	—
	Additional Capacity (50 or 60 Hz)												
	Two fuses in primary and one fuse in secondary												
	100 VA additional capacity		1, 4, 4X, 12	FF4T11	X	X	X	X	X	X *[13]*	X *[13]*	X	X
	100 VA additional capacity *[14]*		7 & 9	FF4T11	X	X	X	X	X	X *[13]*	X *[13]*	—	—
	200 VA additional capacity		1, 4, 4X, 12	FF4T12	X	X	X	X	X *[13]*	X *[13]*	X *[13]*	X	X
	300 VA additional capacity		1, 4, 4X, 12	FF4T13	X	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X	X
	400 VA additional capacity		1, 4, 4X, 12	FF4T14	X	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X*[13]*	X *[13]*	X *[13]*	X*[13]*
	500 VA additional capacity		1, 4, 4X, 12	FF4T15	X	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X *[13]*	X *[13]*

Table 16.312: Marine Control

Class	Factory Modification	Enclosure Type	Form
8502 8536 8538 8539 8702 8736 8738 8739 8810 8941	Modification of standard device for use as marine control in accordance with UL508 *[15]*	12/3R 4/4X (stainless steel only)	M10

Table 16.313: Control Circuit Transformer Codes

AC-Operated Devices With Control Transformers	
Voltage 60 Hz (Primary–Secondary)	Code
120–12 *[13]*	V88
120–24 *[16]*	V89
208–120	V84
240–24 *[16]*	V82
240–120	V80
277–120	V85
480–24 *[16]*	V83
480–120	V81
480–240	V87
600–120	V86
Specify	V99

Selection of Control Circuit Transformers

The standard primary/secondary voltages for control circuit transformers are indicated in Table 16.313.

To order, select the desired device with the appropriate transformer Form designation. Then convert the previously selected voltage code (V●●) to reflect the desired primary/secondary voltage for the transformer. The secondary voltage should equal the previously selected coil voltage of the device.

Example:

You have selected 8536SDG1V02S. V02S means that you need a coil voltage of 120-60/110-50 wired for separate control. You would like to add **Form FF4T**, with transformer voltages of 480 V primary, 120 V secondary, and solid-state overload relay protection with selectable Class 10/20 trip class—Form **H30**. (The Form designations needed are **FF4**, **H30**, and **T**.)

The new and complete Class, Type, voltage code, and Form number will be:

Class	Type	Voltage Code	Form *[17]*
8536	SDG1	V81	FF4H30T

[13] **Single** primary voltage must be specified.
[14] Not available for Sizes 6 and 7.
[15] Not available for NEMA Sizes 0, 00, or 7. NEMA Sizes 00 and 0 cannot be used with marine controls.
[16] 12 V coils are not available on Sizes 3–7. 24 V coils are not available on Sizes 4–7.
[17] Specify Form numbers in alphabetical order. Each letter indicates the beginning of a new Form and may be followed by one or more numbers.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Solid-State Overload Relay Forms

The solid-state overload relay (SSOLR) is available on NEMA Size 00–7.
For Class 8536, 8538, 8539, 8736, 8738, 8739 and 8810 devices.

Form Description H # # #

Type S Starter with Motor Logic™ Solid-State Overload Relay (SSOLR)

3: Motor Logic SSOLR, Class 10/20 (Selectable)

0: No additional modifications
1: N.O. auxiliary contact (field convertible to N.C.)

Special Factory-Assembled SSOLR/Contactor Size Combinations (When Applicable):
(must be specified on Size 00 starter orders)
Blank: Overload relay matched to the starter size (for example, Size 1 contactor and 9-27 A overload relay)
0: 6–18 A overload relay on the starter size indicated by the starter catalog number
1: 9–27 A overload relay on the starter size indicated by the starter catalog number
2: 15–45 A overload relay on the starter size indicated by the starter catalog number
3: 30–90 A overload relay on the starter size indicated by the starter catalog number
4: 45–135 A overload relay on the starter size indicated by the starter catalog number
8: 1.5–4.5 A overload relay on the starter size indicated by the starter catalog number (only offered on Feature Units)
9: 3–9 A overload relay on the starter size indicated by the starter catalog number

Special note for Class 8810 devices:

You **must** specify two separate Form numbers to get Motor Logic overload relays on two-speed starters.

The catalog number will be alphanumeric. Example:
- Open style, Size 4 two speed starter with Motor Logic SSOLRs
- Single winding, 460 V, constant or variable torque
- High speed FLA = 96 A
- Low speed FLA = 27 A (use Size 2 overload relay)

Catalog number to order: **8810SF01V02H30H302S**
Where:
- Form H30 is a Size 4 contactor with a 45–135 A Motor Logic SSOLR for high speed
- Form H302 is a 15–45 A Motor Logic SSOLR on the low speed contactor.

NOTE: Size 7 comes standard with the Motor Logic SSOLR, Class 10/20 (Selectable). No Form designation is required.

Table 16.314: Special Factory-Assembled Starter Combinations with Motor Logic SSOLR Protection

NEMA Contactor Size	SSOLR Size						
	00		0	1	2	3	4
	1.5–4.5 A	3–9 A	6–18 A	9–27 A	15–45 A	30–90 A	45–135 A
00	H308	H30	—	—	—	—	—
0	H308	H309	H30	—	—	—	—
1	H308	H309	H300	H30	—	—	—
2	—	H309	H300	H301	H30	—	—
3	—	—	—	—	—	H30	—
4	—	—	—	—	—	—	H30

Adapted Bimetallic Overload Relay Forms

Table 16.315: Adapted Bimetallic Overload Relay for NEMA Type S Starter

This bimetallic overload relay is available on NEMA Sizes 00, 0, and 1 for Class 8536, 8538, 8539, 8736, 8738 and 8739 devices. To order a starter with the **adapter only**, add Form E to the catalog number (8536SBG2V02ES). When ordering with the adapter and bimetallic overload relay installed, use table Table 16.316 TeSys Deca Overload Relays for Sizes 00–1 Type S Starters, Non-Reversing and Reversing, Classes 8536, 8538, 8539, 8736, 8738, and 8739, page 16-121 as a guide.

Form Description E # ## #

Bimetallic Overload Relay

Class
1: Class 10 Balanced Loads (with single phase sensitivity)
2: Class 20 Balanced Loads (with single phase sensitivity)
3: Class 10 Unbalanced Loads (without single phase sensitivity)
4: Class 20 Unbalanced Loads (without single phase sensitivity)

FLA: Suffix from the TeSys Deca Overload Relays table below (for example, for 4–6 FLA, use suffix **10**)

Terminals: **0** for screw terminal and **6** for ring tongue terminals

Sample catalog number: **8536SCO3V02E2160S**
NEMA Size 1 starter controlling a 7.5 hp motor (11 FLA)—Bimetallic overload relay is LRD16L (9–13 FLA)

Table 16.316: TeSys Deca Overload Relays for Sizes 00–1 Type S Starters, Non-Reversing and Reversing, Classes 8536, 8538, 8539, 8736, 8738, and 8739

Current Setting Range Amperes	Class 20 *with* Single-Phase Sensitivity	Class 20 *without* Single-Phase Sensitivity	Class 20 *with* Single-Phase Sensitivity	Class 20 *without* Single-Phase Sensitivity	Factory Installed—Catalog Number Suffix (CP1 List)
	Screw Termination	Screw Termination	Ring Tongue Connector	Ring Tongue Connector	
0.40–0.63	LRD04L	—	LRD04L6	LR3D04L6	04
0.63–1	LRD05L	—	LRD05L6	LR3D05L6	05
1–1.6	LRD06L	—	LRD06L6	LR3D06L6	06
1.6–2.5	LRD07L	LR3D07L	LRD07L6	LR3D07L6	07
2.5–4	LRD08L	LR3D08L	LRD08L6	LR3D08L6	08
4–6	LRD10L	LR3D10L	LRD10L6	LR3D10L6	10
5.5–8	LRD12L	LR3D12L	LRD12L6	LR3D12L6	12
7–10	LRD14L	LR3D14L	LRD14L6	LR3D14L6	14
9–13	LRD16L	LR3D16L	LRD16L6	LR3D16L6	16
12–18	LRD21L	LR3D21L	LRD21L6	LR3D21L6	21
17–24	LRD22L	LR3D22L	LRD22L6	LR3D22L6	22
23–32	LRD32L	LR3D32L	LRD32L6	LR3D32L6	32

NOTE: For tripping class 10:
- With screw termination, remove the **L** from the end of the above part number (for example, LRD32 is a class 10 bimetallic overload relay with a 23–32 A setting range).
- With a ring tongue connector, change the **L6** to **6** at the end of the above part number (for example, LRD326 is a class 10 bimetallic overload relay with a 23–32 A setting range).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Solid-State TeSys™ D Overload Relays for Type S Starters

Sizes 00–1, Non-Reversing (Classes 8536, 8538, 8539) and Reversing (Classes 8736, 8738 and 8739)

NOTE:

- **Field installed only**: The LR9D Overload Relay cannot be factory installed, it must be purchased separately and field installed.
- **Single-phase motor applications**: When using the LR9D with a single-phase motor, you must purchase the 3-pole starter to accommodate looping of the motor leads.

Current Setting	Overload Relay Catalog Number (sold separately)
Range Amperes	Trip Class 5/10/20/30 Dip Switch Selectable
0.1–0.5 A	LR9D01
0.4–2 A	LR9D02
1.6–8 A	LR9D08
6.4–32 A	LR9D32

Table 16.317: TeSys™ D Overload Relays for Sizes 00–1 Type S Starters, Non-Reversing and Reversing, Classes 8536, 8538, 8539, 8736, 8738, and 8739

Current Setting Range Amperes	Class 20 *with* Single-Phase Sensitivity	Class 20 *without* Single-Phase Sensitivity	Class 20 *with* Single-Phase Sensitivity	Class 20 *without* Single-Phase Sensitivity	Factory Installed—Catalog Number Suffix (CP1 List)
	Screw Termination	Screw Termination	Ring Tongue Connector	Ring Tongue Connector	
0.40–0.63	LRD04L	LR3D04L	LRD04L6	LR3D04L6	04
0.63–1	LRD05L	LR3D05L	LRD05L6	LR3D05L6	05
1–1.6	LRD06L	LR3D06L	LRD06L6	LR3D06L6	06
1.6–2.5	LRD07L	LR3D07L	LRD07L6	LR3D07L6	07
2.5–4	LRD08L	LR3D08L	LRD08L6	LR3D08L6	08
4–6	LRD10L	LR3D10L	LRD10L6	LR3D10L6	10
5.5–8	LRD12L	LR3D12L	LRD12L6	LR3D12L6	12
7–10	LRD14L	LR3D14L	LRD14L6	LR3D14L6	14
9–13	LRD16L	LR3D16L	LRD16L6	LR3D16L6	16
12–18	LRD21L	LR3D21L	LRD21L6	LR3D21L6	21
17–24	LRD22L	LR3D22L	LRD22L6	LR3D22L6	22
23–32	LRD32L	LR3D32L	LRD32L6	LR3D32L6	32

NOTE: For tripping class 10:

- With screw termination, remove the **L** from the end of the above part number (for example, LRD32 is a class 10 bimetallic overload relay with a 23–32 A setting range).
- With a ring tongue connector, change the **L6** to **6** at the end of the above part number (for example, LRD326 is a class 10 bimetallic overload relay with a 23–32 A setting range).

TeSys™ T Factory Modifications (Forms)

Table 16.319: TeSys™ T Motor Management System Modifications H6xx or H7xx for use with Class 8536 and 8736 (Open Starters)

Used on Size	Range	Form	
		Control Voltage	
		100–240 Vac	24 Vdc
1	0.4–8 A	H61X *[18]*	H71X *[18]*
1	1.35–27 A	H62X *[18]*	H72X *[18]*
2, 3	5.0–100 A	H63X *[18]*	H73X *[18]*
4	8–160 (CT 300:5 3 turns)	H65X *[18]*	H75X *[18]*
5	24–480 A (CT 300:5 1 turn)	H66X *[18]*	H76X *[18]*
6	48–960 A (CT 600:5 1 turn)	H67X *[18]*	H77X *[18]*

NOTES:

- The product configurator must be used to order TeSys T open starters.
- The auxiliary contact for the control of the starter coil has a maximum rating of 240 Vac.

Table 16.318: Communication Codes

Communication Network	Code
Modbus™	2
ProfiBus	3
CANopen	4
DeviceNet	5
Ethernet TCP/IP (communication protocols: Ethernet/IP™ and Modbus/TCP)	6

[18] Where X is the communication option according to Table 16.318 Communication Codes, page 16-122 (for example, H612).

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Type S Contactor and Starter Forms

Table 16.320: Full Voltage Controllers *[19]*

Classes 8502, 8536, 8538, 8539, 8702, 8736, 8738, 8739, and 8810				NEMA Size							
Factory Modifications		Enclosure Type	Form	0	1 1 PW 1 YD	2 2 PW 2 YD	3 3 PW 3 YD	4 4 PW 4 YD	5 5 PW 5 YD	6 6 PW 6 YD	7 7 PW 7 YD
Auxiliary Relays	Control relay (4 and 8 poles)	1, 12	R174	X	X	X	X	X	X	X	X
		4, 4X *[20]*	R174	X	X	X	X	X	X	X	X
		7, 9	R174	X	X	X	X	X	X	—	—
		1, 12	R178	X	X	X	X	X	X	X	X
		4, 4X *[20]*	R178	X	X	X	X	X	X	X	X
		7, 9	R178	X	X	X	X	X	X	—	—
	Pneumatic Timing Relay – specify Class 9050 Type A or B										
	0.1 seconds to 1.0 minute—On delay	1	K25	X	X	X	X	X	X	X	X
		4, 4X *[20]*, 12, 3R	K25	X	X	X	X	X	X	X	X
		7, 9	K25	X	X	X	X	X	X	—	—
	0.1 seconds to 1.0 minute—Off delay	1	K26	X	X	X	X	X	X	X	X
		4, 4X *[20]*, 12, 3R	K26	X	X	X	X	X	X	X	X
		7, 9	K26	X	X	X	X	X	X	—	—
	1.0 to 3.0 minute—On delay	1, 4, 12, 3R	K37	X	X	X	X	X	X	X	X
		4X *[20]*, 7, 9	K37	X	X	X	X	X	X	—	—
	1.0 to 3.0 minute—Off delay	1, 4, 12, 3R	K38	X	X	X	X	X	X	X	X
		4X *[20]*, 7, 9	K38	X	X	X	X	X	X	—	—
	Solid-state timing relay (specify timing range) and timer (120 V control required)	1, 4, 4X, 7, 9, 12	K1070	X	X	X	X	X	X	X	X
	Motor-driven timing relay *[21] [22]*	1, 4, 12	K5	X	X	X	X	X	X	X	X
	Phase failure and phase reversal relay with time delay option including under and over voltage protection.	1, 4, 4X, 7/9, 12, 3R	R44	X	X	X	X	X	X	X	X
	Addition of a protective relay with options of phase failure with time delay, phase reversal and under/over voltage protection (RM3TR1). Both motor voltage and control voltage (V8• voltage code) must be specified with device even if Form S is specified. Form replaces Forms Y444, Y445, Y447, Y448 and Y449.										
	For multispeed controllers: Compelling relay (requires motor to be started in low speed)	1, 4, 7, 9, 12	R1	X	X	X	X	X	X	X	X
	Accelerating relay (provides timed acceleration to selected speed):										
	For Class 8810	1, 4, 7, 9, 12	R2	X	X	X	X	X	X	X	X
	For Class 8811	1, 4, 7, 9, 12	R2	X	X	X	X	X	X	X	X
	For Class 8812	1, 4, 7, 9, 12	R2	X	X	X	X	X	X	X	X
	Decelerating relay (imposes a timing delay during transfer from a higher to a lower speed):										
	For Class 8810	1, 4, 7, 9, 12	R3	X	X	X	X	X	X	X	X
	For Class 8811	1, 4, 7, 9, 12	R3	X	X	X	X	X	X	X	X
	For Class 8812	1, 4, 7, 9, 12	R3	X	X	X	X	X	X	X	X
	Antiplugging timers and relays	1, 4, 7, 9, 12	R10	X	X	X	X	X	X	X	X
Meters and Metering *[23]*	Ammeter in cover (includes current transformer if required)	1	G91	X	X	X	X	X	X	X	X
	Ammeter and switch with two current transformers	1	G92	—	X	X	X	X	X	X	X
	Ammeter and switch with three current transformers	1	G93	—	X	X	X	X	X	X	X
	Voltmeter mounted	1	G94	—	X	X	X	X	X	X	X
	Voltmeter and switch mounted	1	G95	—	X	X	X	X	X	X	X
	Elapsed time meter	1, 12	G97	X	X	X	X	X	X	X	X
	Operation counter	1, 12	G99	X	X	X	X	X	X	X	X
Auxiliary Contacts	Additional starter (contactor) auxiliary contacts (Specify number of additional N.O. or N.C. contacts required per contactor.) Each will be X●● (for example, X01).	Any	X	X	X	X	X	X	X	X	X
	To determine the maximum number of auxiliary contacts that can be added to each Type S device, and for the appropriate X Form, refer to the tables in the Class 8536 section on page 16-32 (for non-reversing single-speed devices) or the Class 8736 section on page 16-62 (for reversing or two-speed devices). For Class 8600 Reduced Voltage controllers, consult Customer Care Center at 1-888-778-2733.										
	Auxiliary contacts installed on disconnect switch or circuit breaker operating mechanism.										
	SPDT	1, 4, 4X, 12	Y74	X	X	X	X	X	X	X	X
	DPDT	1, 4, 4X, 12	Y75	X	X	X	X	X	X	X	X
	(**Note:** The above contacts do not switch with the automatic tripping of the circuit breaker. If such operation is required, consult your nearest Schneider Electric sales office.)										
Enclosures	Space heater with N.C. auxiliary contact	1, 4, 4X, 12	G51	X	X	X	X	X	X	X	X
	Function identification plate, with marking as specified	Any	G11	X	X	X	X	X	X	X	X
	Drain and breather installed	7 and 9 *[24]*	Y41	X	X	X	X	X	X	X	—
	Cover gaskets added to NEMA 1 enclosures:										
	For Classes 8538 and 8539	1	Y47	X	X	Std.	Std.	Std.	Std.	—	—
	For Classes 8738 and 8739	1	Y47	Std.	Std.	Std.	Std.	Std.	Std.	—	—
	For other full voltage controllers	1	Y47	X	X	X	X	X	X	X	X
	For reduced voltage controllers	1	Y47	X	X	X	X	X	X	X	X
	Brushed stainless steel watertight device										
	Class 8606	—	Y56	—	—	X	X	X	X	X	X
	Classes 8630 and 8640	—	Y56	—	Std.	Std.	Std.	Std.	X	X	X

[19] NEMA 7 and 9 enclosures are available only with Class 2510, 8502, and 8702 devices.
[20] This adder, used with a NEMA 4X enclosure, applies only to Classes 8538, 8539, 8738, 8739, and 8810 non-reversing.
[21] If the controller has a control transformer, price that transformer with additional capacity for the relay provided.
[22] Specify the control and line voltage.
[23] The motor hp and voltage must be specified when placing an order. Meters are panel-mounted in NEMA 12 enclosures.
[24] Available only on Spin Top™ and cast aluminum NEMA 7 and 9 enclosures.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Replacement AC Magnetic Coils

Table 16.321: Replacement AC Magnet Coils for Magnetic Contactors and Starters

Equipment To Be Serviced				Coil Prefix, or Class and Type	Hz	Suffix Number (Complete Coil Number Consists of the Prefix or the Class and Type, Followed by the Suffix)												Coil VA	
Device	Size	Type	Poles			24 V	110-115 V	120 V	208 V	220 V	240 V	277 V	380 V	440 V	480 V	550 V	600 V	In-rush	Sealed
Coils for Present Design Magnetic Contactors and Starters Classes 8502, 8536, 8538, 8539, 8606, 8630, 8640, 8647, 8650, 8651, 8702, 8736, 8738, 8739, 8810, 8811, 8812, 8903, 8910 *[1]* and 8940 (except NP)	30 A	L	2–6	9998L	60	23	—	44	50	*[2]*	53	55	—	—	62	—	65	150	30
					50	24	44	45	52	53	54	—	60	62	63	65	66	140	30
			8–12	9998LH	60	23	—	44	50	*[2]*	53	55	—	—	62	—	65	180	35
					50	24	44	45	—	53	54	—	60	62	—	65	—	170	35
		LX (Latch)	2–4	9998L	60	23	—	44	50	—	53	55	—	—	62	—	65	150	—
					50	24	44	45	52	53	54	—	60	62	63	65	66	140	—
			6–12	9998LH	60	23	—	44	50	—	53	55	—	—	62	—	65	180	—
					50	24	44	45	—	53	54	—	60	62	—	65	—	170	—
	00	SA *[3]* (Series B)	All	9998SAC	60	23	*[2]*	45	52	*[2]*	54	55	59	*[2]*	62	*[2]*	65	165	33
					50	—	45	—	—	54	—	—	—	62	—	65	—	—	—
	00, 0, 1, 1-P, & 30 A	SA (Series A) SB, SC, & SM	All	31041400	60	20	*[2]*	42	48	*[2]*	51	52	56	58	60	61	62	245	27
					50	22	42	43	—	51	53	—	57	60	*[2]*	62	64	232	26
	2 & 60 A	SD & SP	2 & 3	31063409	60	16	*[2]*	38	44	*[2]*	47	49	53	*[2]*	57	*[2]*	60	311	37
					50	17	38	39	—	47	48	—	54	57	—	60	61	296	36
			4 & 5	31063400	60	16	*[2]*	38	44	*[2]*	47	49	53	*[2]*	57	*[2]*	60	438	38
					50	17	38	39	—	47	48	—	54	57	—	60	61	429	37
	3 & 100 A	DPA12_, SE, SQ, & SYD138	2 & 3	31074400	60	16	*[2]*	38	44	*[2]*	47	49	53	*[2]*	57	*[2]*	60	700	46
					50	17	38	39	—	47	48	—	54	57	—	60	61	678	47
			4 & 5	31091400	60	—	*[2]*	38	44	*[2]*	47	49	53	*[2]*	57	*[2]*	60	1185	85
					50	—	38	39	—	47	48	—	54	57	58	60	61	1260	89
	4 & 200 A	SF, SV, & SYD230	All	31091400	60	—	*[2]*	38	44	*[2]*	47	49	53	*[2]*	57	*[2]*	60	1185	85
					50	—	38	39	—	47	48	—	54	57	58	60	61	1260	89
	5 & 300 A	SG, SX, & SYD368 Series A *[4]*	All	31096400	60	—	*[2]*	09	15	*[2]*	18	19	21	*[2]*	24	*[2]*	29	2970	212
					50	—	09	10	—	18	—	—	22	24	—	29	30	2970	250
		SG, SX, & SYD368 Series B *[4]*	All	31096320	60	—	50	50	51	52	52	53	54	55	55	—	—	1300	14
					50	—	50	50	—	52	52	—	54	55	55	—	—	—	—
	6 & 7	SH & SJ	2–3	Coil Part Number 3110440050 (All System Voltages)														1780	48
	400, 600 & 800 A	SY, SZ, SJ (Elect. Held)																1960	59
		SY, SZ, SJ (Mech. Held)	2–3	31104418	60	—	*[2]*	09	15	*[2]*	18	19	—	*[2]*	24	*[2]*	29	1530	—
					50	—	09	—	—	18	—	—	—	24	—	29	—	1250	—

NOTE: Refer to Table 16.323 for mechanically held unlatch coils.

Table 16.322: Size 5 Coil Modification Kits

Catalog Number	Volage
9998SG120	120 V
9998SG480	480 V

NEMA Size 5, Type S, E-Coil Modification Kit for Series A Devices

Applies to Classes 8502, 8536, 8538, 8539, 8606, 8630, 8640, 8647, 8650, 8651, 8702, 8736, 8738, 8739, 8810, 8811, 8812, 8910 and 8903. Consists of:

- E-coil (31096320** from Table 16.321).
- Armature
- 15 A, 600 V fuse and holder (Class 9999SFR)
- Bottom magnet
- Instruction material

NOTE: No 600 V coil nor mechanically held lighting contactor.

[1] For 8910DPA1● to DPA9●, see page 16-92.
[2] Use a 60 Hz coil of the next higher voltage.
[3] Use on Type S Series B devices only.
[4] Size 5 Series A devices should use these only as replacements for the exact part number. Another option is to use the coil modification kits in Table 16.322 for the Series B coil.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Relays, Timers, and Contactors

Table 16.323: Replacement AC Magnet Coils for Relays, Timers, and Contactors

Equipment To Be Serviced			Coil Prefix or Class and Type	Hz	Suffix Number (Complete Coil Number Consists of Prefix or Class and Type Followed by Suffix Number)												Coil VA	
Device	Type	Poles			24 V	110–115 V	120 V	208 V	220 V	240 V	277 V	380 V	440 V	480 V	550 V	600 V	In-rush	Sealed
Classes 8501 and 9050																		
8501 (Relays)	X	All	9998X *[5]*	60 50	23 24	— 44	44 —	51 52	52 53	53 —	55 —	— —	— 62	62 —	— 65	65 —	148 143	23 25
9050 (Timer)	A	All	—	60 50	— —	— —	— W32B	— —	— —	— —	— W36A	— —	W37B W38A	W38A W38B	W38B —	— W39B	74 68	17 17
	B *[6]*	All	31017-400-	60 50	33 34	— —	54 55	61 —	61 63	63 64	65 —	— —	70 72	72 73	73 75	75 76	165 155	27 27
Mechanically Held *Unlatch* Coils—Classes 8508 and 8903 **NOTE**: A *latch* coil is also used with mechanically held devices. For selection, see Table 16.321.																		
8903 (Lighting Contactors)	LX	All	9998LX	60 50	23 —	— 44	44 —	51 —	— 53	53 —	55 —	— —	— 62	62 —	— 65	65 —	25 —	— —
	SM, SP	All	—	60 50	W23B W24B	*[7]* W30B	W30B —	W33A —	*[7]* —	— —	— —	— W36A	*[7]* W36B	W36B —	*[7]* W37B	W37B —	80 —	— —
	SQ, SV, SX, SY, SZ	All	31096-416	60 50	03 —	*[7]* 09	09 —	15 —	*[7]* 18	18 —	20 —	— 22	*[7]* 24	24 —	*[7]* 28	28 —	550 —	— —
	SJ	All	31123-403	60 50	03 —	*[7]* 09	09 —	15 —	*[7]* 18	18 —	20 —	— 22	*[7]* 24	24 —	*[7]* 28	28 —	2100 —	— —

Table 16.324: Replacement DC Magnet Coils for Magnetic Relays and Timers

Equipment To Be Serviced			Coil Prefix or Class and Type	Suffix Number (Complete Coil Number Consists of Prefix or Class and Type Followed by Suffix Number.)												Coil Burden Watts
Class	Type	Poles		6 V	12 V	18 V	24 V	32 V	48 V	64 V	72 V	90 V	110 V	115/ 125 V	220 V	230/ 250 V	
8501 (Relays)	XD	All	9998XD	19	28	34	37	40	46	49	52	55	—	58	—	67	18
	XDL	—	9998XDL	19	28	34B	37B	40B	46B	49B	52B	55B	—	58B	—	67B	50
	XUD	All	9998XUD	19	28	—	37	—	46	—	—	—	—	58 *[8]*	—	67 *[8]*	16
9050 (Timers)	C	—	31018-400-	22	31	—	40	—	49	—	—	—	—	61	—	70	14
	H	—	4491S1	W21	W24	—	W27	—	W30	—	—	—	—	W34	—	W37	14

Table 16.325: Replacement Coil for 8903 Panel Board Lighting Contactors

Class	Type	Replacement Solenoid	Catalog Number
8903	PB	120 V	9998PBV02
		208 V	—
		240/277 V	9998PBV39
		480 V	—

[5] To order an unlatch coil, add **L** to the Type number and **B** to the suffix. Example: For a 120 V 60 Hz unlatch coil, order 9998X**L**44**B**.
[6] Series C (double pole) and Series E (single pole).
[7] Use a 60 Hz coil of the next higher voltage.
[8] Not dual rated. 125 Vdc or 250 Vdc only.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Contactor and Starter Replacement Part Kits

Class 9998 replacement parts kits are available for servicing Square D™ relays, contactors, and starters as well as pressure, vacuum, and float switches. Each kit contains the necessary movable and stationary contacts, contact springs (when required—NEMA Size 3 and above do not include contact springs, and springs are not available), and additional hardware required to service the devices listed below. When servicing devices having more poles than contained in the corresponding kit, it may be necessary to order an additional kit.

Table 16.326: Magnetic Contactor and Starter Contact Kits

Equipment To Be Serviced			No. of Poles in Kit	Class 9998 Parts Kit Type No.
Class	Type	NEMA Size or Ampere Rating		
8502 8536 8538 8539 8547 8549 8606 8630 8640 8647 8702 8736 8738 8739 8810 8811 8812 8940	SA- (Series B)	00	3	SJ1
	SB-	0	3 4	SL2 SL12
	SC-	1 & 1P 1	3 4	SL3 SL13
	SD-	2	3	SL4
	SD-(Power Pole Adder)	2	1	SL24
	SE-	3	2 3	SL6 SL7
	SF-	4	2 3	SL8 SL9
	SG-	5	2 3	SL10 SL11
	SH-	6	2 3	SL25 SL26
	SJ-	7	2	SL30
8903	L (Series C) & LX (Series B)	30 A	4	RA5B
	SM-	30 A	3 4	SL3 SL13
	SP-	60 A	3 4	SL4 SL14
	SQ-	100 A	2 3	SL6 SL7
	SV-	200 A	2 3	SL8 SL9
	SX-	300 A	2 3	SL10 SL11
	SY-	400 A	2 3	SL25 SL26
	SZ-	600 A	2 3	SL32 SL33
	SJ-	800 A	2 3	SL30 SL31
	PBM, PBP	30, 60 A	2	PB2
	PBN, PBQ	75, 100 A		
	PBR, PBV, PBW	150, 200, 225 A	3	PB15

Table 16.327: Class 8965 Replacement Contact Kits

Device Type	Device Series	Class 9998 Kit Type	Device Series	Class 9998 Kit Type
DPR53	A	DRC5 *[1]*	—	—
RO10	A & B	RA10	C	RA14
RO11	A & B	RA11	C	RA15
RO12	A & B	—	C	—
RO13	A & B	—	C	RA17

Table 16.328: Manual Starter Contact Kits

Equipment To Be Serviced			No. of Poles in Kit	Class 9998 Parts Kit Type No.
Class	Type	NEMA Size		
2510 Manual Starters	M-, T-	M-0	3	—
		M-1 & M-1P	3	ML2

Table 16.329: Replacement Control Transformers (150 VA) Class 8502, 8536 Type S Size 6

Voltage		Part Number
60 Hz	50 Hz	
240/480–120	220/440–110	3110451250
208–120	—	3110451252
277–120	—	3110451253
—	380–110	3110451254
600–120	550–110	3110451251
120–120	110–110	3110451255
240–120	220–110	3110451256

Table 16.330: Replacement Control Transformers (200 VA) Class 8502, 8536 Type S Size 7

Voltage		Part Number
60 Hz	50 Hz	
240/480–120	220/440–110	3112350150
208–120	—	3112350152
277–120	—	3112350153

[1] Single-pole kits.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.330 Replacement Control Transformers (200 VA)Class 8502, 8536 Type S Size 7 (cont'd.)

Voltage		Part Number
60 Hz	50 Hz	
—	380–110	3112350154
600–120	550–110	3112350151
120–120	110–110	3112350155
240–120	220–110	3112350156

Table 16.331: Magnetic Contactor and Starter Contact Kits for Obsolete Designs

Equipment To Be Serviced			No. of Poles in Kit	Class 9998 Parts Kit Type No.
Class	Type	NEMA Size		
8502 & 8536*[2]*	SA-, (Series A)	00	3 4	SL2 SL12
8903	LL, L (Series A, B) & LX (Series A)	20 A	4	—

Table 16.332: Class 8910, 8911 & 8965 Replacement Contact Kits


Device To Be Serviced			Class 9998	
Class 8910 Type	Class 8911 Type	Series	1-Pole Type	3-Pole Type
SYD230 SYD368	— —	— —	— —	SL28 SL29
DPA_50A DPA_60A	DPSO5_ —	A, B A, B	DRC5 DRC6	— —

Table 16.333: How to Order


To Order Specify:	Catalog Number	
	Class	Type
• Class Number	9998	SL6
• Type Number		

[2] Includes reversing, two-speed, and similar devices. Select the coil based on the NEMA size of the basic starter or contactor.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Class 9998 Type SO1



Melting Alloy Accessories

Contact Units for Melting Alloy Overload Relays

One normally closed contact, Class 9998 Type SO1 contact unit, listed in Table 16.334, is provided as standard in each Class 9065 melting alloy overload relay. Contact modules can be easily replaced and are identified in Table 16.334. Isolated overload relay alarm circuit contacts are available as an optional feature. A pilot light or alarm bell can be wired in series with this contact to indicate that the overload relay has tripped. For further information, refer to Isolated Alarm Contacts For Melting Alloy Overload Relays, page 16-132.

Table 16.334: Class 9998 Type SO1 Contact Units for Melting Alloy Overload Relays

Magnetic Starter			Description *[3]*	Parts Kit Catalog Number
NEMA Size	Type	Series		
00–4 and 6	SA–SF SH	A & B	Standard N.C. contact unit	9998SO1 *[4]*

Melting Alloy Overload Relay Jumper Strap Kits

Jumper strap kits are for use on three-phase manual or magnetic starters with melting alloy overload relays only, where a three-phase starter is used to control a single-phase motor. These kits will include two jumper straps, a wiring diagram showing how to wire a three-phase starter to control a single-phase motor, and single-phase (one thermal unit) selection tables.

Table 16.335: Melting Alloy Overload Relay Jumper Strap Kits, Class 9998

Class	For Starter		Kit Catalog Number
	Size	Type	
ALL	00, 0, 1, 2 and M0 & M1	SA, SB, SC, SD and M & T (Manual)	9998SO31
	3,4	SE, SF	—
	5	SG	None Available

Universal Baseplates

Class 9998 Type UB Universal Baseplate

A universal baseplate can be used to retrofit a Square D Type S NEMA starter into an application which is currently using a competitive NEMA starter. The universal baseplate is a metal plate that attaches to the panel in the location of the starter to be replaced. The Type S starter then mounts to the baseplate. It is available for NEMA Sizes 00–4, and mounting screws are provided with each plate.

The universal baseplate adapter allows the Type S starter to replace the competitive starters listed in Table 16.336 Competitive Starter Replacement, page 16-128:

Table 16.336: Competitive Starter Replacement

Competitor Starter	NEMA Size	Base-plate	NEMA Size	Base-plate	NEMA Size	Base-plate	NEMA Size	Base-plate
Allen Bradley 509	0, 1	UB01	2	UB02	3	UB03	4	UB04
Allen Bradley 709	1		2		3		4	
Cutler Hammer Freedom Series	00, 0, 1		2		3		4	
Furnas ESP100	0, 1		2		3		4	
Furnas INNOVA	0, 1		2		3		4	
General Electric CR306	00, 0, 1		2		3		4	
Telemecanique A-Line and pre-Type S	0, 1	UB11	2	UB12	3	UB13	4	UB14

Table 16.337: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9998	UB01

[3] Refer to page Table 16.341 for contact ratings.
[4] Also the replacement contact unit for Class 9065 melting alloy overload relays.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Cover-Mounted Control Unit Selection

Class 9999 push button, selector switch and pilot light cover-mounted control unit kits can be easily field installed in a NEMA 1, 3R, 4 or 12 Type S contactor or starter enclosure cover. Knockouts or removable closing plates are furnished with many enclosure covers for convenient field installation of control units. Kits are supplied with leads and clearly illustrated instructions. The Class 9999 cover mounted control unit kits are identical to the units which are factory installed.

Table 16.338: Cover-Mounted Control Unit Selection

For Use With					NEMA 1 Kit 8538, 8539, and 8903 Pre-Series K						NEMA 1 and 12/3R Kit 8538, 8539, and 8903 Series K and Later *[1]*			NEMA 4/4X Kit (Stainless)*[1]*		
					Red or Green Pilot Light*[2]*		Push Button		Selector Switch		Red or Green Pilot Light	Push Button	Selector Switch	Red or Green Pilot Light	Push Button	Selector Switch
Class	Type	NEMA Size or Ampere Rating	No. of Poles	V	With Control Trans-former (Form F4T)	Standard	Start-Stop	On-Off	Hand-Off-Auto	On-Off	120 V 60 Hz	Start-Stop or On-Off	Hand-Off-Auto	120 V 60 Hz	Start-Stop or On-Off	Hand-Off-Auto
					Type	Type	Type	Type	Type	Type	Type	Type	Type	Type	Type	Type
8502 & 8536	SA, SB, SC	00, 0, 1, 1P	All	6–600 V 50–60 Hz	SP28R *[3]*	SP2R	SA2	SA10	SC2	SC22	SP28R *[2]* *[3]* (incan-descent) SPL28R (LED–Red) SPL28G (LED–Green)	SA3*[4]*	SC8	— (incan-descent) — (LED–Red) — (LED–Green)	—	—
	SD	2	All		SP28R *[3]*	—										
	SE	3	2–3		SP28R *[3]*	—										
			4–5		SP28R *[3]*	—										
	SF	4	All		SP28R *[3]*	SP28R *[3]*	SA3	SA3	SC8	—						
	SG–SJ	5–7	All		SP28R *[3]*	SP28R *[3]*										
8538 8539 8702 8736	SB, SC	0, 1	All		SP12R	SP12R	SA2	SA10	SC2	SC22						
	SD	2	All		SP13R	SP13R										
	SE	3	All		SP14R	SP14R										
	SF	4	All		SP15R	SP15R										
	SG–SJ	5–7	All		SP28R *[3]*	SP28R *[3]*	SA3	SA3	SC8	—						
8903, Elec-trically Held *[5]*	L	20 A	All		SP28R *[3]*	—	—	SA10 *[6]*	—	SC22 *[6]*						
	SM	30 A	All		SP28R *[3]*	SP2R	SA2 *[4]*	SA10 *[4]*	SC2	SC22						
	SP	60 A	All		SP28R *[3]*	—										
	SQ	100 A	All		SP28R *[3]*	SP28R *[3]*	SA3 *[4]*	SA3 *[4]*	SC8	—						
	SJ, SV, SX, SY, SZ	200–800 A	All		SP28R *[3]*	SP28R *[3]*	SA3 *[4]*	SA3 *[4]*	SC8	—						

NOTE: Field modification kits are **not** available for the polyester enclosures.



Class 9999 Type SP2R Pilot Light Kit



Class 9999 Type SA2 Push Button Kit



Class 9999 Type SC2 Selector Switch Kit



Class 9999 Type SA3 Push Button Kit

Table 16.339: NEMA 1 Enclosure Closing Plates

For Use With			Description	Type
Class	Type	NEMA Size or Ampere Rating		
8502, 8536, 8903	SA–SE or SM–SP	00–3 or 30–60A	For Pilot Light or Reset—Slip-on Cover NEMA 1 Enclosure	—
			For Push Button or Selector Switch—Slip-on Cover NEMA 1 Enclosure	—
8538 & 8539 Pre-series "K"	SB–SF	0–4	For Push Button or Selector Switch—Hinged Cover NEMA 1 Enclosure	—
			For Pilot Light—Hinged Cover NEMA 1 Enclosure	—
8538, 8539 Series J and later	SB–SF	0–4	Push Button or Pilot Light NEMA Combination Starter	9001K51
8903	SM–SV	30–400 A	Combination Lighting Contactor	9001K51

Table 16.340: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9999	SP29R

[1] User-made openings are required in order to field install these modification kits on standard Class 8502 and 8536 Type S Sizes 0–2, and Class 8903 Sizes 30–60 A, NEMA 4 and 12 enclosures.

[2] Each pilot light kit contains one red and one green lens cap.

[3] The coil voltage must be the same as the pilot light rating. The kit contains one 60 Hz red pilot light control unit, Class 9001 Type KP1R31120V. For other voltages, refer to Class 9001 Type KP.

[4] Also requires an N.O. auxiliary contact for the holding circuit contact when used on Class 8903 electrically held lighting contactors.

[5] For control unit kits for Class 8903 mechanically held contactors, refer to Mechanically Held, page 16-83.

[6] To mount a control unit in a NEMA 1 enclosure, a Class 9999 Type BLX bracket is also required.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Internal Auxiliary



External Single-Circuit Auxiliary Contact

Auxiliary Contacts for Manual and Magnetic Contactors and Starters

Internal Contacts

Class 9999 Type SX11 internal contact kit is a replacement unit for the N.O. holding circuit contact supplied as standard on Type S Sizes 00–2 three phase starters and contactors. The Class 9999 Type SX12 is a replacement unit for the N.C. electrical contact which is furnished as standard on Type S, Sizes 00–2 mechanically interlocked devices (e.g., Class 8736 reversing starters). Internal contacts are also used on Class 2510 Types M & T manual starters. The internal contacts can be used for other applications as long as the electrical rating is not exceeded. See Table 16.341 for electrical ratings.

External Contacts

Class 9999 Type SX6 external auxiliary contact is supplied as standard for the N.O. holding circuit contact on Type S Sizes 3–7 starters and contactors. Additional auxiliary contacts can be added to Type S contactors, starters and lighting contactors. These contacts mount on either side of the basic contactor and are available with convertible or non-convertible contacts. The contacts of the convertible version can be changed from N.O. to N.C. or vice versa in the field. The non-convertible version has fixed contacts, either N.O. or N.C.

To determine the number of auxiliary contacts that can be added to each Type S contactor or starter, refer to the Class 8536 or Class 8736 section.

See Table 16.341 for electrical ratings.

Table 16.341: Maximum Ratings for Type S Auxiliary Contacts and Timers

Class 9999 Type	Contact Ratings				Class 9999 Type	Contact Ratings			
	Volts AC	AC Only (35% Power Factor)		Continuous		Volts AC	AC Only (35% Power Factor)		Continuous
		Make	Break				Make	Break	
SX11, SX12	120 or Less	30 A	3 A	3 A	SX6-SX10 SX13-SX16	120 or Less	60 A	6 A	10 A
	120-600	3600 VA	360 VA	3 A		120–600	7200 VA	720 VA	10 A

Table 16.342: Class 8502, 8536 and 8903 Type S

For Use With		Kit Description	Ordering Information
Type	NEMA Size		Class 9999 Type
External—Field Convertible			
SA-SJ	00–7	1-N.O. Contact 1-N.C. Contact 1-N.O. and 1-N.C. Isolated Contacts 1-N.O. Overlapping Contact 1-N.C. Overlapping Contact	SX6 SX7 SX8 — SX10 *[7]*
External—Non-Convertible			
SA-SJ	00–7	1-N.O. Contact 1-N.C. Contact 1-N.O. & 1 N.C. Isolated Contacts 1-N.O. Overlapping Contact 1-N.C. Overlapping Contact	SX13 SX14 — — —
Internal—Non-Convertible			
SA-SD	00–2	1-N.O. Contact 1-N.C. Contact	SX11 *[8]* SX12 *[8]*

Table 16.343: Class 8965 Reversing/Hoist Contactors—Auxiliary Contacts

Device To Be Serviced	Auxiliary Contact Kit		
Class 8965 Type	Contact Arrangement	Type of Connector	Class 9999 Type
DPR	1 N.O.	Screw/ Quick-Connect	D10
	1 N.C.		D01
	1 N.O./1 N.C.		D11
	2 N.O.		D20
RO2 & RG2 RO10 Form X1 RO11 Form X1	1 N.O. each side	Slip-on	—
RO3 & RG3 RO10 Form X2 RO11 Form X2	1 N.C. each side		—
RO5 & RG5 RO12 Form X1 RO13 Form X1	1 N.O. each side	Screw	—
RO6 & RG6 RO12 Form X2 RO13 Form X2	1 N.C. each side		—

Table 16.344: Class 8910 and 8911 Definite Purpose Contactors and Starters—Auxiliary Contacts

Device To Be Serviced	Auxiliary Contact Kit		
Class 8910 or 8911 Type	Contact Arrangement	Class 9999	
		Series B (20-90 A)	Series C (20-40 A)
DPA DPS	1 N.O.	D10	DD10
	1 N.C.	D01	DD01
	1 N.O./1 N.C.	D11	DD11
	2 N.O.	D20	DD20

Table 16.345: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9999	SX6

[7] Type SX10 must be used together and mounted on the same side of the contactor. They are suitable for applications where it is necessary for a normally open contact to overlap a normally closed contact.

[8] Types SX11 and SX12 are not for use on NEMA Sizes 3 or larger. Internal contacts can also be used on Class 2510 Types M and T manual starters.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Table 16.346: Isolated Auxiliary Contacts for Motor Logic™ Overload Relays

For Use With		Parts Kit Description	Cat. No.
Class & Type	NEMA Size *[9]*		
8536 SA–SJ	00B through 7	N.O. or N.C. Auxiliary Contact (Field Convertible)	9999A-C04
9065 SF, ST	00B through 7		

Table 16.347: DIN Adapter (Separate Mount Only)

For Use With		Parts Kit Description	Cat. No.
Cat. No.	NEMA Size*[9]*		
9065SF	00B, 00C, 0, and 1	DIN Adapter	9999DA01

Table 16.348: Lug-Lug and Lug-Extender Kits

For Use With		Parts Kit Description	Cat. No.
Cat. No.	NEMA Size*[9]*		
9065SF	00B, 00C, 0, and 1	Lug-Lug Kit for separate mounting	9999LL0
9065SF	00B, 00C, 0, and 1	Lug-Extender Kit for retrofitting existing NEMA S starters	9999LB0



Class 9999 Type SB6
Single Power Pole Adder



Class 9999 Type SB9
Double Power Pole Adder

Motor Logic—Class 9999

Isolated Auxiliary Contacts for Motor Logic™ Overload Relays

Overload relay auxiliary contacts are available factory installed or in kit form for field installation on Motor Logic overload relays. These contacts may be used for isolated alarm contact applications.

DIN Adapter

The DIN adapter provides a method to mount the Motor Logic overload relay to a 35 mm DIN rail.

Lug-Lug and Lug-Extender Kits

A Class 9999 LL0 Lug-Lug Kit can be field installed on separately mounted overload relays. The standard Size 00B, 00C, 0, and 1 Class 9065 Type SS and SF overload relays are supplied without lugs. A Class 9999 LB0 Lug-Extender Kit is designed for Size 00B, 00C, 0, and 1 Retrofit Starter Applications. This kit allows the lugs to be in the same location as the Class 9065 melting alloy overload relay, eliminating the need for additional wire length.

Remote Reset Module

The Remote Reset Module can be easily field installed on solid-state overload relays. This module will allow the overload relay to be reset from a remote location.

Table 16.349: Remote Reset Module

For Use With		Parts Kit Description	Cat. No.
Class & Type	NEMA Size*[9]*		
8536 SA–SJ	00B through 7	Remote Reset Module	9999RR04*[10]*
9065 SF, ST	00B through 7		
8536 SE–SF	3 and 4	Top Mounting Bracket	9999RB34*[10][11]*
9065 SF, ST	3 and 4		

Power Pole Adders

One single- or double-circuit power pole kit can be field added to a basic two- or three-pole Type S contactor or starter Sizes 0, 1 and 2, or lighting contactors 30–60 A. See Table 16.350 for selection. The ratings for these power pole adders correspond to the NEMA contact ratings found on page 16-124. A two- or three-pole contactor or starter accepts only one single- or double-circuit unit. A power pole cannot be used on four- or five-pole devices, or on devices that are mechanically interlocked.

When adding a power pole to a Size 0 or 1 device, remove the return springs according to the instructions that come with the device.

When adding a power pole to a Size 2 or 60 A device, a coil change is required. Select a four- or five-pole coil from page 16-124, or specify Form Y118 as noted in the footnote below.

When adding Size 0–2 power pole kits to a Size 3–7 or 100–800 A device, an adapter bracket is required. The Class 9999 Types SB6–SB15 power pole kits are suitable for copper wire only.

Table 16.350: Power Pole Adders—Selection

For Use With		Power Pole Adder Kit	
Type	Size	Description	Class 9999 Type
SB, SC, and SM	0, 1, and 30 A	One N.O. power pole adder	9999SB6
SD	2		—
SP	60 A		—
SB, SC, and SM	0, 1, and 30 A	One N.C. power pole adder	—
SD	2		9999SB12 *[12]*
SP	60 A		—
SB, SC, and SM	0, 1, and 30 A	One N.O. and one N.C. power pole adder	—
SD	2		9999SB13 *[12]*
SP	60 A		—
SB, SC, and SM	0, 1, and 30 A	Two N.O. power pole adders	9999SB9
SD	2		—
SP	60 A		—
SB, SC, and SM	0, 1, and 30 A	Two N.C. power pole adders	—
SD	2		9999SB15 *[12]*
SP	60 A		—
SE–SJ and SQ–SZ and SJ	3–7 and 100–800 A	Adapter bracket	—

[9] Size 00B and 00C are not actual NEMA sizes. These designations are used to differentiate the lower FLA of these devices from the NEMA Size 00 Motor Logic solid-state overload relay.
[10] 120 Vac power required.
[11] For mounting the remote reset module on the top of the overload relay.
[12] To order a Size 2 or 60 A power pole kit complete with a new starter coil, specify **Form Y118,** the voltage, and the frequency.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Class 9999 Type SF4
Fuse Kit

Control Circuit Fuse Holder

The control circuit fuse holder is designed to be used on Type S contactors and starters, Sizes 00–7, when either one or two control circuit fuses, 600 V maximum, are required. The Type SF4 fuse holders will accept standard 600 V Bussmann Type KTK or equivalent fuses (13/32" x 1-1/2"); 6 A maximum.

Table 16.351: Control Circuit Fuse Holder—Selection

Description (fuses not included)	Class 9999 Type
Single Fuse Unit	—
Single Fuse Unit for Class CC Fuse	—
Two Fuse Unit	SF4
Two Fuse Unit for Class CC Fuses	—



Class 9999 Type ST1
Transient Suppression Module

Transient Suppression Module

The transient suppression module is designed to be used where the transient voltage, generated when opening the coil circuit, interferes with the proper operation of nearby integrated or solid-state control circuits. The module consists of an RC circuit and is designed to suppress the coil voltage transients to approximately 200% of peak coil supply voltage. The module is wired across the coil for Type S, Sizes 00–5 and is designed for coil voltages of 120 V only.

Table 16.353: Transient Suppression Module—Selection

Description	Class 9999 Type
For Sizes 00–2	ST1
For Sizes 3–5	ST2

Table 16.352: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9999	SM1



Type SO4

Isolated Alarm Contacts For Melting Alloy Overload Relays

Isolated overload relay alarm contacts are available factory-installed or in kit form for field installation in NEMA Size 00–6 Type S*[13]* starters, and Class 9065 Type SE melting alloy overload relays. NEMA Size 7 Type S devices use a solidstate overload relay which has isolated alarm contacts as a standard feature. The alarm contacts allow the starter to be used in applications that require isolated contacts, such as inputs to a computer.

Class 9999 Types SO4 and SO5 modules are interchangeable with the standard module (Class 9998 Type SO1) and can be installed on starters already in service. The case is made of clear plastic (polycarbonate) to allow for visual inspection of contacts.

Table 16.354: Contact Unit for Melting Alloy Overload Relays, Class 9999

Magnetic Starter		Parts Kit Description	Catalog Number
NEMA Size	Type		
00-6 *[13]*	SA-SH	N.O. Isolated Alarm Contact Plus Standard N.C. Overload Contact	9999SO4
		N.C. Isolated Alarm Contact Plus Standard N.C. Overload Contact	9999SO5

Solid Neutral

The Class 9999 Type SN kit can be used on Class 8903 Type S lighting contactors and other controllers where field addition of a solid neutral is required. Each kit has lugs suitable for both copper and aluminum wire, and mounts with two screws.

Table 16.355: Solid Neutral Selection

Number of Lugs	Wire Capacity Per Lug (Cu/Al)	Class 9999 Type
4	14–2/0	SN1
3	one 4–600 MCM or two 1/0–250 MCM	SN2
3 (Dual)	two 2–600 MCM	—
2 (Dual)	two 6–350 MCM	SN4



Tie Point Terminal Block

Tie Point Terminal Block

The tie point terminal block provides easy wiring of a Hand-Off-Auto selector switch or Start-Stop push buttons with separate control. The T7 terminal block requires no panel space. It simply snaps on Sizes 00–4 Type S contactors and starters by two tabs and is secured to the left hand coil terminal.

Table 16.357: Tie Point Terminal Block Selection

Magnetic Contactor or Starter		Class 9999 Type
NEMA Size	Type	
00–4	SA-SF	T7

Table 16.356: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9999	SO4

[13] Isolated alarm contacts **cannot** be added in the field to the Size 5 Type S starter. Current transers and a Size 1 overload block must be used. For factory installation specify **Form Y342**.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Type SM1



Type SM12

Mechanical Interlock







General: Type S contactors or starters can be mechanically interlocked so that only one device is energized at a time. The mechanical interlock is an interference (non-jamming) type, locking at the beginning of the stroke of any starter or contactor.

Type S Sizes 00, 0, 1, and 2—The mechanical interlock is mounted on the underside of the reversing baseplate. Two pins extend from the mechanical interlock through openings in the baseplate and engage the contact carrier of each contactor. Two styles of mechanical interlocks are used: one version for three pole contactors, a different version for four or five pole contactors. *When adding a power pole to the left side of an existing Size 0, 1, or 2 three-pole reversing contactor, a new mechanical interlock must also be installed. When added to the right side only, the power pole is not mechanically interlocked with the left-hand contactor.*

Type S Sizes 3 and 4—The mechanical interlock is separate from the mounting pan on Sizes 3 and 4. Cams on the mechanical interlocks are operated by the contact carrier of each contactor. The mechanical interlock is attached to the underside of the two contactor baseplates on Sizes 3 and 4.

NOTE: The mechanical interlock kits in Table 16.358 can be used to interlock 2–5 pole contactors. Mechanical interlocks for horizontal and vertical arrangement are listed in various pole arrangements.
Mechanical interlock Types SM1 through SM10 for Sizes 00-2 devices use overload relay mounting brackets to support the overload relay portion of the starter. See Table 16.359.

Table 16.358: Mechanical Interlock for Two Contactors

			Contactor NEMA Size	Class 9999 Type
 Horizontal Type SM1 for Size 00–1 Type SM12 for Sizes 3 & 4	 Horizontal Type SM12 for Sizes 3 & 4	 Vertical Type SM10 for Size 2	00, 0, 1 0, 1 0, 1 0, 1 0, 1	SM1 — — — —
 Horizontal Type SM8 for Size 2 Type SM12 for Sizes 3 & 4	 Vertical —	 Vertical —	2 2 2 2 2 3 3, 4 4	— — SM8 — SM10 — SM12 —



Overload Relay Mounting Bracket

Table 16.359: Overload Relay Mounting Bracket

Kit Description	Class 9999 Type
Bracket for one overload relay used with horizontal mechanical interlocks, Types SM1 through SM10	—
Bracket for two overload relays used with vertical mechanical interlocks, Type SM10	SO12

Table 16.360: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number	9999	SM1


© 2025 Schneider Electric
All Rights Reserved
3/21/2025



Class 9422 TC33 Fuse Block



Class 9999 Type TC10



Class 9999 Type S2
Interchangeable Fuse Clips

Fuse Block Replacement Parts Kits

Class 8538 (Series D and newer), Class 8738 (Series E and newer), and Class 8903 (Series C and newer) Type S non-fusible combination starters and lighting contactors (sizes 0–2, 30 to 60 A) can be converted to the fusible type by installing a Class 9422 Fuse Clip Kit. Both fusible and non-fusible combination devices have the same size enclosure in NEMAs 1, 4, and 12 construction, which permits this conversion. The 9422 Fuse Clip Kits contain line and load fuse clips, load base, and fuse pullers.

Table 16.361: Class 9422 Replacement Fuse Clip Kits

Device Used on	Disconnect Ampere Rating	NEMA Class H, K, J, R Fuses			Class R Fuse Clip Kits
		Fuse Clip Ratings (A)		Class and Type	
Size or Ampere Rating		250 V Max.	600 V Max.		
0, 1, and 30 A	30	0–30	—	—	RFK03 *[14]*
0, 1, and 30 A	30	31–60	0–30	9422TC33 *[15]*	RFK06 *[14]*
2 and 60 A	60	31–60	0–30	9422TC33	RFK06 *[14]*
2 and 60 A	60	—	31–60	9422TD63	RFK06H *[14]*

Table 16.362: Class 9999 Replacement Fuse Clip Kits (8538 Pre-Series D, 8738 Pre-Series E)

Device Used on	Disconnect Ampere Rating	NEMA Class H Fuses			NEMA Class R Fuses			NEMA Class J Fuses	
		Fuse Clip Ratings (A)		Type	Fuse Clip Ratings (A)		Type	Fuse Clip Ratings (A) 600 V Max.	Type
Size or Ampere Rating		250 V Max.	600 V Max.		250 V Max.	600 V Max.			
0, 1, and 30 A	30	0–30 — 31–60	— 0–30 0–30	— S2 S2	0–30 — 31–60	— 0–30 0–30	— — —	— 0–30 0–30	— SJ2 SJ2
2 and 60 A	60	31–60 —	0–30 31–60	S2 S3	31–60 —	0–30 31–60	— —	0–30 31–60	SJ2 SJ3
3 and 100 A	100	61–100 101–200	61–100 —	— S5 *[16]*	61–100 101–200	61–100 —	— —	61–100 —	— —
4 and 200 A	200	101–200	101–200	S5 *[16]*	101–200	101–200	—	—	—
5 and 300 A	400	—	—	—	201–400	201–400	SR5 *[17]*	—	—
6 and 400, 600 A	600	—	—	—	401–600	401–600	SR5 *[17]*	—	—

Table 16.363: Class 9999 Auxiliary Contact Kits for Disconnect Switches and Circuit Breakers

Class	Type	SPDT Type	DPDT Type
8538, 8738	SB, SC (Series C)	—	—
8539, 8739	SB, SC, SD, SE, SF, SG	R26	R27
8538	SBA, SCA, SBG, SCG (Series K)	—	TC21
8738	SBA, SCA, SBG, SCG (Series K)	TC10	TC20
8538	SB*[18]*, SC*[18]*, SD*[18]* (Series B)	—	—
8538	SBAS8, SCAS8, SBGS8, SCGS8, (Series K)	TC10	TC20
8538, 8738	SD (Series C)	—	R44
8538	SDA, SDA*[18]*, SDG, SDG*[18]* (Series K)	TC10	TC20
8738	SDA, SDG (Series K)	TC10	TC20
8538, 8738	SE (Series B and C)	—	—
8538, 8738	SE, SF (Series A)	R8	R9
8538, 8738	SF (Series B and C)	—	—
8538, 8738	SG	—	—

Class	Type	SPDT Type	DPDT Type
Disconnect Switches			
9422	BTCF, BTCN, BTDF, BTEF, BTEN	—	TC21
9422	TCF, TCN, TDF, TDN, TEF, TEN	TC10	—
9422	TF	R8	R9
Circuit Breaker Operating Mechanisms			
9421	LF, LK, LL, LM, LN, LP, LR, LT, LW	—	—
9422	RM, RN, RP, RQ, RR, RT	R26	R27
9422	CFA, CKA, CLA, CSF, CMP	R26	R27

Table 16.364: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number	9999	—
• Type Number		

[14] No Class number required. Discount schedule DE1.
[15] When using with a 9422FTCN or FTCF disconnect switch in Class 8538 or 8738 combination starters, remove and discard the metal base plate.
[16] Cannot be used in Series B or newer 8538 devices.
[17] Fuse clips are not provided in the Type SR5 kit. On new installations, Class 9999 Type S fuse clips must also be purchased. Three non-removable pins are included and can be installed only in the latest production devices, which have a hole in the lower fuse clips.
[18] Class 8538 Type numbers ending in suffix **S8**.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

General

All tables are based on the operation of the motor and controller in the same ambient temperature, 40 °C (104 °F) or less. Always be certain the correct thermal units are installed in the starter before operating the motor. Each thermal unit shall be installed such that its catalog number is visible. See page 16-139 for information on installing thermal units. On melting alloy thermal units the ratchet wheel must engage the pawl assembly.

Selection Procedure

1. Determine motor data:
   a. Full load current rating
   b. Service factor
   NOTE: If motor full load current (FLC) is not known, a tentative thermal unit selection could be made, based on horsepower and voltage. Refer to page 16-139.
2. Motor and controller in *same ambient temperature:*
   a. All starter classes, except Class 8198:
      1. For 1.15 to 1.25 service factor motors use 100% of motor FLC for thermal unit selection.
      2. For 1.0 service factor motors use 90% of motor FLC for thermal unit selection.
   b. Class 8198 only:
      1. For 1.0 service factor motors use 100% of motor FLC for thermal unit selection.
      2. For 1.15 to 1.25 service factor motors use 110% of motor FLC for thermal unit selection.
3. Motor and controller in *different ambient temperatures:*
   a. Multiply motor FLC by the multiplier in Selection of Thermal Units for Special Applications, page 16-135. Use the resultant full load current for thermal unit selection.
4. Locate the proper selection table from the index, pages page 16-136 and page 16-137.
   a. The proper thermal unit number will be found adjacent, to the right of the range of full load currents in which the motor FLC or resultant full load current falls.
5. See page 16-138 for calculation of trip current rating.

Slow Trip Thermal Unit Selection

To select Type SB slow trip thermal units, the selection table for a standard Type B thermal unit may be used with the following modifications: For continuous rated motors having service factors of 1.15 to 1.25, select thermal units from the standard Type B table using 93% (102% for Class 8198) of the full load current shown on the motor nameplate and then substitute an SB for the B in the thermal unit type number.

Example: A motor with a full load current of 12 A controlled by an 8536SCG3 would require B22 thermal units for standard trip applications and SB19.5 thermal units for slow trip applications. The SB is selected by multiplying 12 A times 93% for 11.16 A and using this value to select B19.5. Then add the S prefix to arrive at SB19.5.

For continuous rated motors having a service factor of 1.0, select thermal units in the same manner using 84% (93% for Class 8198) of full load current shown on the motor nameplate.

NOTE: SB thermal units are used on Size 0, 1, 2, and only some Size 3 applications. Check thermal unit tables for current ranges.

Table 16.365: Thermal Unit Trip Types

Melting Alloy	
Type of Trip	Thermal Unit Type
Standard	A
	B
	C
	CC
	DD
Quick	FB
Slow	SB

Table 16.366: Selection of Thermal Units for Special Applications

Class of Controller	Continuous Duty Motor Service Factor	Melting Alloy		
		Ambient Temperature of Motor		
		Same as Controller Ambient	Constant 10 °C (18 °F) Higher Than Controller Ambient	Constant 10 °C (18 °F) Lower Than Controller Ambient
		Full Load Current Multiplier		
All Classes, Except 8198	1.15 to 1.25	1.0	0.9	1.05
	1.0	0.9	0.8	0.95
Class 8198	1.15 to 1.25	1.1	1.0	1.15
	1.0	1.0	0.9	1.05

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Selection

NOTE: For thermal unit selection tables for other devices including obsolete devices, consult the Customer Care Center at 1-888-778-2733.

Table 16.367: Thermal Unit Selection

Controller					Thermal Unit Selection Table Number Hand Reset Melting Alloy		
Starter Type	Class	Type	Series[1]	Size	Standard Trip (20)	Quick Trip (10)	Slow Trip (30)
Manual Starters FHP	2510 2512 8908	F	A	FHP	43 [2]	—	—
Manual Starters (Small Enclosure)	2510	M, T	A	M–0 M–1 M–1P	1 1 1	72 72 72	[3] [3] [3]
Manual Starters (Large Enclosure)	2510 2511 2512 8925	M, T	A	M–0 M–1 M–1P	2 2 2	73 73 73	[3] [3] [3]
DC Magnetic Starters EC & M Crane Control Product	7135 7136 7735 7736	C, D	—	1, 2	65	—	[3]
		E	—	3	9	—	—
		F	—	4	10	—	—
		G	—	5	12	—	—
AC Magnetic Starters (Small Enclosure)	8536 8904 [4] (Starter In Own Enclosure) 8933 8998 8999 (Model 3 Control Center) I-LINE® and QMB Motor Starter Centers	A (8536 only)	B, C	00	17 [2]	—	—
		SA	A, B	00	13	—	[3]
		SB	A	0	13	74	[3]
		SC	A	1	13	74	[3]
			A	1P	41	—	[3]
		SD	A	2	56	75	[3]
		SE	A	3	18	76 [5]	134 [3][5]
		SF	A	4	54	—	—
		SG	A	5	49	—	—
			B [6]	5	59	83	—
		SH	A, B	6	21	—	—
	8998 8999 (Model 4 Control Center)	SC	A	1 Fusible	66	74	—
				1 Circuit Breaker	15	74	—
		SD	A	2 Fusible	67	75	—
				2 Circuit Breaker	58 [7]	75	—
		SE	A	3 Small Enclosure	16	76 [5]	134 [3][5]
				3 Large Enclosure	68 [7]	76 [5]	133 [3][5]
		SF	A	4	61	—	—
		SG	A	5	24	—	—
		SH	A	6	20	—	—
	8998 (Model 5 and Model 6 MCCs)	SC [8]	A	1	109	—	—
				1 COMPAC 6	104	—	—
		SD [8]	A	2	110	—	—
		SE [8]	A	3	111	—	—
		SF [8]	A	4	112	—	—
		SG [8]	A	5	113	—	—
			B	5 CT	103	—	—
		SH [8]	A	6	114	—	—
	8911	DPSG	C	20–30 A	135	—	—
				40 A	145	—	—
			A	50 A	146	—	—

(table continued on the next page)

NOTE: For thermal unit selection tables for other devices, including obsolete devices, consult the Customer Care Center at 1-888-778-2733.

[1] Series letters listed refer to the marking on the nameplate of the basic openstyle starter. When the starter comes in a controller containing other devices, the controller may have a different series letter marked on the enclosure nameplate.
[2] Type A thermal units for full-load currents lower than those listed in this table are available. For complete information, consult Customer Care Center at 1-888-778-2733.
[3] This device will accept Type SB slow trip (Class 30) thermal units. For selection, see page 16-135.
[4] Small enclosure tables apply for **Class 8904** non-combination and non-reversing starters. For combination and reversing **Class 8904** starters, refer to the large enclosure selections, index above.
[5] **Form Y81** must be specified to use quick trip (Class 10) or slow trip (Class 30) thermal units on Size 3 starters.
[6] Divide the motor FLC by 60, and use this quotient to select the appropriate thermal units.
[7] Use for autotransformer starters (fusible and circuit breaker).
[8] Refers to the Type number of the starter in the MCC, not the Type number of the MCC.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Selection

Table 16.368: Thermal Unit Selection

Controller					Thermal Unit Selection Table Number Hand Reset Melting Alloy		
Starter Type	Class	Type	Series[9]	Size	Standard Trip (20)	Quick Trip (10)	Slow Trip (30)
AC Magnetic Starters (Large Enclosure)	8198	G, S	—	—	5	—	[10]
	8536 (Starter Used in Multi-Motor Panel)	A (8536 only)	B, C	00	14 [11]	—	—
	8538 8904[12]	SA	A, B	00	53	—	[10]
	8539 8906	SB, NB	A	0	15	78	[10]
	8606 8907	SC, NC	A	1	15	78	[10]
	8630 [13] 8920	SD, ND	A	2	58	79	[10]
	8640 [14] 8922	SE, NE	A	3	16	80 [15]	133 [15][10]
	9089 8924	SF, NF	A	4	61	—	—
	8647 8925	SG	A	5	24	—	—
	8650 8930		B [16]	5	59	83	—
	8736 8941 8738 8739	SH	A, B	6	20	—	[10]
	8810 8811 8812	CB, DB, SB, UB	A	0	15	78	[10]
		CC, DC, SC, UC	A	1	15	78	[10]
		CD, DD, SD, UD	A	2	58	79	[10]
		CE, DE, SE, UE	A	3	16	80 [15]	133 [15][10]
		CF, DF, SF, UF	A	4	61	—	—
		CG, DG, SG, UG	A	5	24	—	—
			B [16]	5	59	83	—
		CH, DH, SH, UH	A	6	20	—	[10]
	8940 WELL-GUARD™ Control	WC, XC	A	1	13	78	—
		WD, XD, MD, RD, VD	A	2	56	79	—
		WE, XE, ME, RE, VE	A	3	18	80 [15]	—
		PF, WF, XF, MF, RF, VF, PE	A	4	54	—	—
	8911	DPSO	C	20–30 A	136	—	—
				40 A	147	—	—
			A	50 A	148	—	—
AC Magnetic Part-Winding	8998 (Model 5 and Model 6 MCCs)	SC [17]	A	1	127	—	—
		SD [17]	A	2	128	—	—
		SE [17]	A	3	129	—	—
		SF	A	4	105	—	—
		SG	A	5	115	—	—
			B [16]	5 CT	116	—	—
Separately Mounted Overload Relays	9065	C	A	1 (25 A)	44	82	[10]
		F	B	4 (133 A)	19	—	—
		G	A	5 (266 A)	22	—	—
		MEO	A	(32 A)	86	—	—
		S	A	1 (26 A)	59	83	[10]
				2 (45 A)	69	84	[10]
				3 (86 A)	34	—	—
				4 (133 A)	28	—	—
		T	A	2 (45 A)	31	—	[10]
		U	—	3 (86 A)	40	—	—

NOTE: For thermal unit selection tables for other devices including obsolete devices, consult the Customer Care Center at 1-888-778-2733.

[9] Series letters listed refer to the marking on the nameplate of the basic openstyle starter. When the starter comes in a controller containing other devices, the controller may have a different series letter marked on the enclosure nameplate.

[10] This device will accept Type SB slow trip (Class 30) thermal units. For selection, see page 16-135.

[11] Type A thermal units for full-load currents lower than those listed in this table are available. For complete information, consult Customer Care Center at 1-888-778-2733.

[12] Large enclosure tables apply for **Class 8904** combination and reversing starters. For non-combination and non-reversing **Class 8904** starters refer to small enclosure selections, page 16-136.

[13] For **Class 8630** starters, divide the delta-connected motor full-load current by 1.73, and use this quotient to select thermal units.

[14] For **Class 8640** and **Class 8940**starters (MD, PD, ME, PE, MF, PF, MG and PG), use the full-load current of each motor winding as a basis for thermal unit selection—normally one-half the total motor current.

[15] **Form Y81** must be specified to use quick trip (Class 10) or slow trip (Class 30) thermal units on Size 3 starters.

[16] Divide the motor FLC by 60, and use this quotient to select the appropriate thermal units.

[17] Refers to the Type number of the starter in the MCC, not the Type number of the MCC.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Calculation of the Trip Current Rating

Trip Current Rating—The trip current rating is a nominal value that approximates the minimum current to trip an overload relay in an ambient temperature, outside of the enclosure, of 40 °C (104 °F). In all selection tables except Class 8198, the trip current rating is 1.25 times the minimum full load current shown for the thermal unit selected. For Class 8198, the trip current rating is 1.15 times the minimum full load current. This applies to bimetallic overload relays with the trip adjustment set at 100 percent.

Calculation Procedure

1. Use the selection table for the specific controller involved.
2. Find the minimum motor full load current listed for the thermal unit in question.
3. Multiply that current by 1.25 (1.15 for Class 8198). The result is the trip current rating.

Example 1: Determine the thermal unit selection and trip current rating for thermal units in a Class 8536 Type SCG3 Size 1 magnetic starter used to control a three-phase, 1.15 service factor motor with a full load current of 17.0 Amperes, where the motor and controller are both located in a 40ºC (104ºF) ambient temperature.

1. From Table 13 the proper selection is B32.
2. The minimum motor full load current is 16. 0 Amperes.
3. Trip current rating is 16.0 x 1.25= 20.0 Amperes.

Protection Level is the relationship between trip current rating and full load current. Protection level, in percent, is the trip current rating divided by the motor full load current times 100. In Example 1 the protection level for the B32 thermal unit is: 20.0/17.0 x 100= 118%.


National Electrical Code, Section 430-32, allows a maximum protection level of 125% for the motor in the above example.

Minimum Trip Current (also called ultimate current) may vary from the trip current rating value, since ratings are established under standardized test conditions. Factors which influence variations include: the number of thermal units installed, enclosure size, proximity to heat producing devices, size of conductors installed, ambient (room) temperature, and others.

Except for ambient temperature-compensated overload relays, an ambient temperature higher than 40ºC would lower the trip current, and a lower temperature would increase it. This variation is not a factor in selecting thermal units for the average application, since most motor ratings are based on an ambient temperature of 40 °C, and motor capacity varies with temperature in about the same proportion as the change in trip current. Temperature-compensated relays maintain a nearly constant trip current over a wide range of ambient temperature, and are intended for use where the relay, because of its location, cannot sense changes in the motor ambient temperature.

Calculation of the Trip Current for Ambient Temperatures Other Than 40 °C

For a controller ambient temperature other than 40 °C (104 °F) trip current can be calculated by applying a correction factor from the curve in Figure 1. The approximate trip current for a particular ambient temperature is the product of (1) the multiplier M corresponding to the temperature and (2) the 40 °C trip current rating.

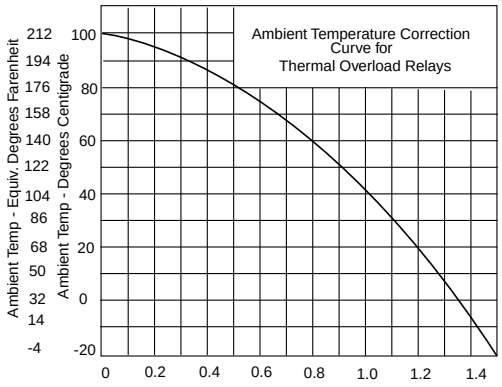

NOTE: Ambient temperature is the temperature surrounding the starter enclosure. Normal temperature rise inside the enclosure has been taken into account in preparing the thermal unit selection tables.

Example 2: Determine the trip current for the motor and controller in Example 1, except the controller is in a 30 °C (86 °F) ambient temperature. From the curve in Figure 1 the multiplier M is 1.1 at 30 °C. The approximate trip current is 16.0 × 1.25 × 1.1 = 22 A.

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Approximate Thermal Unit Selection Based On Horsepower and Voltage

General—Thermal units selected using approximate full-load currents from Table 16.369 will provide a trip current between 101% and 125% of full-load current for many 4-pole, single speed, normal torque, 60 Hz motors. Since full-load current rating of different makes and types of motors vary so widely, these selections may not be suitable.

Thermal units should be selected on the basis of motor nameplate full-load current and service factor. Thermal unit sizes originally selected on an approximate basis should always be rechecked and corrected at the time of installation if required.

How to use Table 16.369:

- Locate the motor horsepower and voltage.
- Determine the approximate full-load current fromTable 16.369.
- Use the approximate full-load current in place of actual nameplate full-load current and follow the Selection Procedure on page 16-135.

Table 16.369: Use This Table Only When the Motor Full-Load Current Is Not Known

Motor Horsepower	Motor Full-Load Current					
	Three Ø				Single Ø	
	200 V	230 V	460 V	575 V	115 V	230 V
1/6	—	—	—	—	4.4	2.2
1/4	—	—	—	—	5.8	2.9
1/3	—	—	—	—	7.2	3.6
1/2	2.5	2.2	1.1	0.9	9.8	4.9
3/4	3.7	3.2	1.6	1.3	13.8	6.9
1	4.8	4.2	2.1	1.7	16	8
1-1/2	6.9	6.0	3.0	2.4	20	10
2	7.8	6.8	3.4	2.7	24	12
3	11.0	9.6	4.8	3.9	34	17
5	17.5	15.2	7.6	6.1	56	28
7-1/2	25.3	22	11	9	80	40
10	32.2	28	14	11	—	50
15	48.3	42	21	17	—	—
20	62.1	54	27	22	—	—
25	78.2	68	34	27	—	—
30	92	80	40	32	—	—
40	120	104	52	41	—	—
50	150	130	65	52	—	—
60	177	154	77	62	—	—
75	221	192	96	77	—	—
100	285	248	124	99	—	—
125	359	312	156	125	—	—
150	414	360	180	144	—	—
200	552	480	240	192	—	—

NOTE: These currents should not be used for selection of fuses, circuit breakers or wire sizes. See NEC tables 430-248 through 430-250. For motors rated 208-220 volts, use 230 V column. For motors rated 440 to 550 volts, use 460 and 575 V columns, respectively.

Mounting of the Thermal Units

Always be certain the correct thermal units are installed in the starter before operating the motor. Thermal units should always be mounted so that their type designation can be read from the front of the starter (see Figure 1). Melting alloy thermal units should be mounted so that the tooth of the pawl assembly can engage the teeth of the ratchet wheel when the reset button is pushed.

Mounting surfaces of starter and thermal units should be clean and care should be taken to insure that thermal unit mounting screws are fastened securely.



Figure 1

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Selection Tables

Thermal Unit Table 1

(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
0.33–0.36	0.29–0.32	B 0.44
0.37–0.40	0.33–0.36	B 0.51
0.41–0.45	0.37–0.39	B 0.57
0.46–0.52	0.40–0.47	B 0.63
0.53–0.59	0.48–0.56	B 0.71
0.60–0.66	0.57–0.63	B 0.81
0.67–0.73	0.64–0.69	B 0.92
0.74–0.81	0.70–0.77	B 1.03
0.82–0.91	0.78–0.86	B 1.16
0.92–1.02	0.87–0.96	B 1.30
1.03–1.14	0.97–1.11	B 1.45
1.15–1.29	1.12–1.23	B 1.67
1.20–1.42	1.24–1.37	B 1.88
1.43–1.64	1.38–1.55	B 2.10
1.65–1.80	1.56–1.75	B 2.40
1.81–2.10	1.76–1.92	B 2.65
2.11–2.30	1.93–2.16	B 3.00
2.31–2.61	2.17–2.50	B 3.30
2.62–2.99	2.51–2.81	B 3.70
3.00–3.37	2.82–3.16	B 4.15
3.38–3.94	3.17–3.40	B 4.85
3.95–4.24	3.41–3.76	B 5.50
4.25–4.54	3.77–4.00	B 6.25
4.55–5.29	4.01–4.68	B 6.90
5.30–5.73	4.69–5.18	B 7.70
5.74–6.35	5.19–5.51	B 8.20
6.36–7.08	5.52–6.19	B 9.10
7.09–7.83	6.20–7.12	B 10.2
7.84–8.47	7.13–8.15	B 11.5
8.48–9.83	8.16–8.60	B 12.8
9.84–10.5	8.61–9.21	B 14.0
10.6–11.4	9.22–10.1	B 15.5
11.5–12.8	10.2–11.2	B 17.5
12.9–13.9	11.3–12.0	B 19.5
14.0–16.1	—	B 22.0
16.2–18.0	—	B 25.0
Following Selections for Size M-1 & M-1P Only.		
—	11.3–12.1	B 19.5
—	12.2–13.6	B 22.0
16.2–17.6	13.7–15.3	B 25.0
17.7–20.6	15.4–17.3	B 28.0
20.7–23.1	17.4–19.1	B 32.0
23.2–26.0	19.2–21.7	B 36.0
—	21.8–24.2	B 40.0
—	24.3–26.0	B 45.0
Following Selections for Size M-1P Only		
23.2–27.1	—	B 36.0
27.2–29.2	—	B 40.0
29.3–33.0	—	B 45.0
33.1–36.0	—	B 50.0

Thermal Unit Table 2

(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
0.35–0.38	0.30–0.32	B 0.44
0.39–0.43	0.33–0.37	B 0.51
0.44–0.48	0.38–0.39	B 0.57
0.49–0.56	0.40–0.48	B 0.63
0.57–0.63	0.49–0.57	B 0.71
0.64–0.71	0.58–0.64	B 0.81
0.72–0.78	0.65–0.70	B 0.92
0.79–0.88	0.71–0.78	B 1.03
0.89–0.99	0.79–0.87	B 1.16
1.00–1.15	0.88–0.98	B 1.30
1.16–1.23	0.99–1.13	B 1.45
1.24–1.43	1.14–1.25	B 1.67
1.44–1.51	1.26–1.40	B 1.88
1.52–1.75	1.41–1.58	B 2.10
1.76–1.93	1.59–1.79	B 2.40
1.94–2.25	1.80–1.91	B 2.65
2.26–2.47	1.92–2.20	B 3.00
2.48–2.81	2.21–2.55	B 3.30
2.82–3.20	2.56–2.87	B 3.70
3.21–3.63	2.88–3.24	B 4.15
3.64–4.19	3.25–3.48	B 4.85
4.20–4.53	3.49–3.85	B 5.50
4.54–4.89	3.86–4.10	B 6.25
4.90–5.68	4.11–4.79	B 6.90
5.69–6.27	4.80–5.31	B 7.70
6.28–6.85	5.32–5.65	B 8.20
6.86–7.73	5.66–6.35	B 9.10
7.74–8.50	6.36–7.31	B 10.2
8.51–9.29	7.32–8.34	B 11.5
9.30–10.4	8.35–8.84	B 12.8
10.5–11.3	8.85–9.47	B 14.0
11.4–12.3	9.48–10.4	B 15.5
12.4–13.9	10.5–11.5	B 17.5
14.0–15.0	11.6–12.0	B 19.5
15.1–18.0	—	B 22.0
Following Selections for Size M-1 & M-1P Only.		
—	11.6–12.4	B 19.5
15.1–17.4	12.5–14.0	B 22.0
17.5–19.2	14.1–15.8	B 25.0
19.3–22.0	15.9–17.8	B 28.0
22.1–24.6	17.9–19.7	B 32.0
24.7–26.0	19.8–22.4	B 36.0
—	22.5–25.1	B 40.0
—	25.1–26.0	B 45.0
Following Selections for Size M-1P Only.		
24.7–29.1	—	B 36.0
29.2–31.7	—	B 40.0
31.8–36.0	—	B 45.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 3
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
0.29–0.31	0.28–0.29	B 0.44
0.32–0.36	0.30–0.33	B 0.51
0.37–0.39	0.34–0.36	B 0.57
0.40–0.47	0.37–0.44	B 0.63
0.48–0.56	0.45–0.52	B 0.71
0.57–0.63	0.53–0.59	B 0.81
0.64–0.69	0.60–0.64	B 0.92
0.70–0.77	0.65–0.71	B 1.03
0.78–0.86	0.72–0.80	B 1.16
0.87–0.97	0.81–0.90	B 1.30
0.98–1.12	0.91–1.03	B 1.45
1.13–1.24	1.04–1.14	B 1.67
1.25–1.39	1.15–1.27	B 1.88
1.40–1.57	1.28–1.44	B 2.10
1.58–1.78	1.45–1.63	B 2.40
1.79–1.96	1.64–1.79	B 2.65
1.97–2.20	1.80–2.01	B 3.00
2.21–2.41	2.02–2.19	B 3.30
2.42–2.75	2.20–2.52	B 3.70
2.76–3.25	2.53–2.95	B 4.15
3.26–3.50	2.96–3.17	B 4.85
3.51–3.87	3.18–3.50	B 5.50
3.88–4.13	3.51–3.73	B 6.25
4.14–4.69	3.74–4.22	B 6.90
4.70–5.20	4.23–4.68	B 7.70
5.21–5.53	4.69–4.98	B 8.20
5.54–6.23	4.99–5.59	B 9.10
6.24–7.18	5.60–6.43	B 10.2
7.19–8.20	6.44–7.41	B 11.5
8.21–8.98	7.42–8.02	B 12.8
8.99–9.63	8.03–8.59	B 14.0
9.64–10.6	8.60–9.52	B 15.5
10.7–11.8	9.53–10.5	B 17.5
11.9–12.7	10.6–11.2	B 19.5
12.8–14.3	11.3–12.0	B 22.0
14.4–16.1	—	B 25.0
16.2–18.0	—	B 28.0
Following Selections for Size M-1 & M-1P Only.		
—	11.3–12.7	B 22.0
—	12.8–14.3	B 25.0
16.2–18.3	14.4–16.1	B 28.0
18.4–20.2	16.2–17.8	B 32.0
20.3–23.0	17.9–20.1	B 36.0
23.1–26.0	20.2–22.6	B 40.0
—	22.7–25.5	B 45.0
—	25.6–26.0	B 50.0
Following Selections for Size M-1P Only		
25.9–29.0	—	B 45.0
29.1–30.8	—	B 50.0
30.9–32.7	—	B 56.0
32.8–36.0	—	B 62.0

Thermal Unit Table 4
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
0.32–0.33	0.29–0.30	B 0.44
0.34–0.38	0.31–0.35	B 0.51
0.39–0.41	0.36–0.37	B 0.57
0.42–0.50	0.38–0.45	B 0.63
0.51–0.61	0.46–0.54	B 0.71
0.62–0.68	0.55–0.61	B 0.81
0.69–0.74	0.62–0.66	B 0.92
0.75–0.83	0.67–0.74	B 1.03
0.84–0.93	0.75–0.83	B 1.16
0.94–1.05	0.84–0.93	B 1.30
1.06–1.21	0.94–1.07	B 1.45
1.22–1.34	1.08–1.19	B 1.67
1.35–1.50	1.20–1.33	B 1.88
1.51–1.70	1.34–1.51	B 2.10
1.71–1.93	1.52–1.70	B 2.40
1.94–2.12	1.71–1.87	B 2.65
2.13–2.38	1.88–2.10	B 3.00
2.39–2.61	2.11–2.29	B 3.30
2.62–2.99	2.30–2.63	B 3.70
3.00–3.53	2.64–3.09	B 4.15
3.54–3.80	3.10–3.32	B 4.85
3.81–4.21	3.33–3.67	B 5.50
4.22–4.49	3.68–3.91	B 6.25
4.50–5.10	3.92–4.43	B 6.90
5.11–5.66	4.44–4.91	B 7.70
5.67–6.03	4.92–5.23	B 8.20
6.04–6.79	5.24–5.88	B 9.10
6.80–7.84	5.89–6.77	B 10.2
7.85–8.96	6.78–7.90	B 11.5
8.97–9.82	7.91–8.44	B 12.8
9.83–10.4	8.45–9.05	B 14.0
10.5–11.6	9.06–9.99	B 15.5
11.7–12.9	10.0–11.0	B 17.5
13.0–13.9	11.1–11.9	B 19.5
14.0–15.7	12.0–12.0	B 22.0
15.8–18.0	—	B 25.0
Following Selections for Size M-1 & M-1P Only.		
—	12.0–13.4	B 22.0
—	13.5–15.1	B 25.0
17.8–20.1	15.2–17.0	B 28.0
20.2–22.2	17.1–18.9	B 32.0
22.3–25.3	19.0–21.4	B 36.0
25.4–26.0	21.5–24.0	B 40.0
—	24.1–26.0	B 45.0
Following Selections for Size M-1P Only.		
25.4–28.4	—	B 40.0
28.5–33.1	—	B 45.0
33.2–36.0	—	B 50.0

Thermal Unit Table 5
(index and instructions: page 16-135 to page 16-139)

Current Transformer Ratio										Thermal Unit Number
25/5	50/5	75/5	100/5	150/5	200/5	250/5	300/5	400/5	500/5	
Motor FLC										
10.6–11.7	21.1–23.6	31.7–35.4	42.3–47.2	63.4–70.9	84.5–94.6	106.–117.	127.–141.	169.–188.	211.–236.	B 3.00
11.8–13.2	23.7–26.5	35.5–39.8	47.3–53.1	71.0–79.7	94.7–105.	118.–132.	142.–159.	189.–212.	237.–265.	B 3.30
13.3–14.8	26.6–29.6	39.9–44.5	53.2–59.4	79.8–89.1	106.–118.	133.–148.	160.–177.	213.–237.	266.–296.	B 3.70
14.9–17.2	29.7–34.5	44.6–51.8	59.5–69.2	89.2–103.	119.–138.	149.–172.	178.–207.	238.–276.	297.–345.	B 4.15
17.3–19.6	34.6–39.2	51.9–58.9	69.3–78.6	104.–117.	139.–156.	173.–196.	208.–235.	277.–314.	346.–360.	B 4.85
19.7–22.3	39.3–44.6	59.0–67.0	78.7–89.3	118.–133.	157.–178.	197.–223.	236.–267.	315.–357.	—	B 5.50

Thermal Unit Table 9
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
15.3–16.7	—
16.8–19.8	—
19.9–22.8	—
22.9–25.8	—
25.9–30.4	—
30.5–31.9	—
32.0–34.2	—
34.3–38.8	—
38.9–44.2	—
44.3–50.2	—
50.3–57.1	—
57.2–63.2	—
63.3–68.6	—
68.7–78.6	C 90.0
78.7–86.9	—
87.0–100.0	—

Thermal Unit Table 10
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
43.6–47.3	CC 54.5
47.4–51.3	CC 59.4
51.4–54.6	CC 64.3
54.7–59.7	CC 68.5
59.8–65.1	CC 74.6
65.2–70.1	CC 81.5
70.2–75.1	CC 87.7
75.2–82.2	CC 94.0
82.3–89.2	—
89.3–96.5	CC 112.0
96.6–104.	CC 121.0
105.–113.	CC 132.0
114.–123.	CC 143.0
124.–132.	CC 156.0
133.–150.	CC 167.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 12
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
92.–100.	DD 112.0
101.–109.	—
110.–119.	—
120.–131.	—
132.–139.	DD 150.0
140.–156.	DD 160.0
157.–166.	DD 185.0
167.–180.	—
181.–189.	—
190.–209.	—
210.–225.	DD 250.0
226.–238.	DD 265.0
239.–263.	DD 280.0
264.–300.	—

Thermal Unit Table 13
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)			Thermal Unit Number
1 T.U.	2 T.U.	3 T.U.	
0.29–0.31	0.29–0.31	0.28–0.30	B 0.44
0.32–0.34	0.32–0.34	0.31–0.34	B 0.51
0.35–0.38	0.35–0.38	0.35–0.37	B 0.57
0.39–0.45	0.39–0.45	0.38–0.44	B 0.63
0.46–0.54	0.46–0.54	0.45–0.53	B 0.71
0.55–0.61	0.55–0.61	0.54–0.59	B 0.81
0.62–0.66	0.62–0.66	0.60–0.64	B 0.92
0.67–0.73	0.67–0.73	0.65–0.72	B 1.03
0.74–0.81	0.74–0.81	0.73–0.80	B 1.16
0.82–0.94	0.82–0.94	0.81–0.90	B 1.30
0.95–1.05	0.95–1.05	0.91–1.03	B 1.45
1.06–1.22	1.06–1.22	1.04–1.14	B 1.67
1.23–1.34	1.23–1.34	1.15–1.27	B 1.88
1.35–1.51	1.35–1.51	1.28–1.43	B 2.10
1.52–1.71	1.52–1.71	1.44–1.62	B 2.40
1.72–1.93	1.72–1.93	1.63–1.77	B 2.65
1.94–2.14	1.94–2.14	1.78–1.97	B 3.00
2.15–2.40	2.15–2.40	1.98–2.32	B 3.30
2.41–2.72	2.41–2.72	2.33–2.51	B 3.70
2.73–3.15	2.73–3.15	2.52–2.99	B 4.15
3.16–3.55	3.16–3.55	3.00–3.42	B 4.85
3.56–4.00	3.56–4.00	3.43–3.75	B 5.50
4.01–4.40	4.01–4.40	3.76–3.98	B 6.25
4.41–4.88	4.41–4.88	3.99–4.48	B 6.90
4.89–5.19	4.89–5.19	4.49–4.93	B 7.70
5.20–5.73	5.20–5.73	4.94–5.21	B 8.20
5.74–6.39	5.74–6.39	5.22–5.84	B 9.10
6.40–7.13	6.40–7.13	5.85–6.67	B 10.2
7.14–7.90	7.14–7.90	6.68–7.54	B 11.5
7.91–8.55	7.91–8.55	7.55–8.14	B 12.8
8.56–9.53	8.56–9.53	8.15–8.72	B 14.0
9.54–10.6	9.54–10.6	8.73–9.66	B 15.5
10.7–11.8	10.7–11.8	9.67–10.5	B 17.5
11.9–13.2	11.9–12.0	10.6–11.3	B 19.5
13.3–14.9	—	11.4–12.0	B 22.0
15.0–16.6	—	—	B 25.0
16.7–18.0	—	—	B 28.0
Following Selections for Size 1 Only			
—	11.9–13.2	—	B 19.5
—	13.3–14.9	11.4–12.7	B 22.0
—	15.0–16.6	12.8–14.1	B 25.0
16.7–18.9	16.7–18.9	14.2–15.9	B 28.0
19.0–21.2	19.0–21.2	16.0–17.5	B 32.0
21.3–23.0	21.3–23.0	17.6–19.7	B 36.0
23.1–25.5	23.1–25.5	19.8–21.9	B 40.0
25.6–26.0	25.6–26.0	22.0–24.4	B 45.0
—	—	24.5–26.0	B 50.0

Thermal Unit Table 14
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)			Thermal Unit Number
1 T.U.	2 T.U.	3 T.U.	
0.43–0.47	0.41–0.45	0.40–0.41	A .49
0.48–0.51	0.46–0.50	0.42–0.46	A .54
0.52–0.56	0.51–0.55	0.47–0.51	A .59
0.57–0.64	0.56–0.62	0.52–0.57	A .65
0.65–0.69	0.63–0.67	0.58–0.62	A .71
0.70–0.76	0.68–0.72	0.63–0.67	A .78
0.77–0.84	0.73–0.81	0.68–0.75	A .86
0.85–0.91	0.82–0.88	0.76–0.80	A .95
0.92–1.01	0.89–0.97	0.81–0.89	A 1.02
1.02–1.15	0.98–1.08	0.90–1.02	A 1.16
1.16–1.23	1.09–1.18	1.03–1.09	A 1.25
1.24–1.37	1.19–1.32	1.10–1.21	A 1.39
1.38–1.45	1.33–1.40	1.22–1.29	A 1.54
1.46–1.56	1.41–1.48	1.30–1.37	A 1.63
1.57–1.67	1.49–1.60	1.38–1.48	A 1.75
1.68–1.77	1.61–1.72	1.49–1.58	A 1.86
1.78–1.92	1.73–1.84	1.59–1.72	A 1.99
1.93–2.09	1.85–2.00	1.73–1.85	A 2.15
2.10–2.31	2.01–2.22	1.86–2.05	A 2.31
2.32–2.56	2.23–2.45	2.06–2.29	A 2.57
2.57–2.92	2.46–2.82	2.30–2.62	A 2.81
2.93–3.16	2.83–3.08	2.63–2.84	A 3.61
3.17–3.48	3.09–3.39	2.85–3.10	A 3.95
3.49–3.83	3.40–3.75	3.11–3.46	A 4.32
3.84–4.24	3.76–4.16	3.47–3.85	A 4.79
4.25–4.62	4.17–4.51	3.86–4.16	A 5.30
4.63–4.92	4.52–4.83	4.17–4.46	A 5.78
4.93–5.61	4.84–5.49	4.47–5.08	A 6.20
5.62–5.85	5.50–5.67	5.09–5.35	A 6.99
5.86–6.36	5.68–6.16	5.36–5.82	A 7.65
6.37–6.99	6.17–6.75	5.83–6.34	A 8.38
7.00–7.67	6.76–7.00	6.35–6.95	A 9.25
7.68–8.15	—	6.96–7.00	A 9.85
8.16–9.00	—	—	A 11.0

Thermal Unit Table 15
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)			Thermal Unit Number
1 T.U.	2 T.U.	3 T.U.	
0.31–0.33	0.31–0.33	0.29–0.31	B 0.44
0.34–0.36	0.34–0.36	0.32–0.36	B 0.51
0.37–0.40	0.37–0.40	0.37–0.38	B 0.57
0.41–0.48	0.41–0.48	0.39–0.46	B 0.63
0.49–0.57	0.49–0.57	0.47–0.55	B 0.71
0.58–0.64	0.58–0.64	0.56–0.61	B 0.81
0.65–0.70	0.65–0.70	0.62–0.66	B 0.92
0.71–0.77	0.71–0.77	0.67–0.75	B 1.03
0.78–0.85	0.78–0.85	0.76–0.83	B 1.16
0.86–0.99	0.86–0.99	0.84–0.93	B 1.30
1.00–1.10	1.00–1.10	0.94–1.06	B 1.45
1.11–1.28	1.11–1.28	1.07–1.18	B 1.67
1.29–1.41	1.29–1.41	1.19–1.31	B 1.88
1.42–1.58	1.42–1.58	1.32–1.47	B 2.10
1.59–1.80	1.59–1.80	1.48–1.67	B 2.40
1.81–2.03	1.81–2.03	1.68–1.83	B 2.65
2.04–2.25	2.04–2.25	1.84–2.04	B 3.00
2.26–2.51	2.26–2.51	2.05–2.38	B 3.30
2.52–2.83	2.52–2.83	2.39–2.60	B 3.70
2.84–3.29	2.84–3.29	2.61–3.13	B 4.15
3.30–3.75	3.30–3.75	3.14–3.59	B 4.85
3.76–4.22	3.76–4.22	3.60–3.94	B 5.50
4.23–4.65	4.23–4.65	3.95–4.19	B 6.25
4.66–5.16	4.66–5.16	4.20–4.72	B 6.90
5.17–5.53	5.17–5.53	4.73–5.21	B 7.70
5.54–6.09	5.54–6.09	5.22–5.51	B 8.20
6.10–6.80	6.10–6.80	5.52–6.17	B 9.10
6.81–7.60	6.81–7.60	6.18–7.07	B 10.2
7.61–8.35	7.61–8.35	7.08–8.05	B 11.5
8.36–9.04	8.36–9.04	8.06–8.69	B 12.8
9.05–9.99	9.05–9.99	8.70–9.32	B 14.0
10.0–11.1	10.0–11.1	9.33–10.2	B 15.5
11.2–12.3	11.2–12.0	10.3–11.3	B 17.5
12.4–13.7	—	11.4–12.0	B 19.5
13.8–15.4	—	—	B 22.0
15.5–18.0	—	—	B 25.0
Following Selections for Size 1 Only			
—	11.2–12.3	—	B 17.5
—	12.4–13.7	11.4–12.1	B 19.5
—	13.8–15.4	12.2–13.7	B 22.0
15.5–17.2	15.5–17.2	13.8–15.2	B 25.0
17.3–19.4	17.3–19.4	15.3–17.2	B 28.0
19.5–21.7	19.5–21.7	17.3–18.9	B 32.0
21.8–23.9	21.8–23.9	19.0–21.4	B 36.0
24.0–26.0	24.0–26.0	21.5–23.7	B 40.0
—	—	23.8–26.0	B 45.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 16
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)			Thermal Unit Number
1.T.U.	2 T.U.	3 T.U.	
16.2–17.5	15.1–16.2	14.3–15.4	—
17.6–18.8	16.3–17.3	15.5–16.4	CC 22.8
18.9–20.5	17.4–19.5	16.5–18.5	CC 24.6
20.6–22.2	19.6–20.7	18.6–19.6	CC 26.3
22.3–23.7	20.8–22.3	19.7–21.1	CC 28.8
23.8–25.4	22.4–24.0	21.2–22.7	CC 31.0
25.5–27.3	24.1–25.7	22.8–24.4	CC 33.3
27.4–29.3	25.8–27.5	24.5–26.1	CC 36.4
29.4–31.5	27.6–29.6	26.2–28.1	CC 39.6
31.6–33.9	29.7–31.7	28.2–30.0	CC 42.7
34.0–36.2	31.8–33.9	30.1–32.1	CC 46.6
36.3–39.3	34.0–36.6	32.2–34.7	CC 50.1
39.4–42.3	36.7–39.3	34.8–37.3	CC 54.5
42.4–45.3	39.4–42.3	37.4–40.1	CC 59.4
45.4–48.3	42.4–44.9	40.2–42.6	CC 64.3
48.4–52.0	45.0–48.3	42.7–45.8	CC 68.5
52.1–54.9	48.4–50.9	45.9–48.3	CC 74.6
55.0–59.7	51.0–55.5	48.4–52.6	CC 81.5
59.8–65.4	55.6–59.9	52.7–56.8	CC 87.7
65.5–69.6	60.0–64.2	56.9–60.9	CC 94.0
69.7–74.8	64.3–68.7	61.0–65.1	—
74.9–79.7	68.8–71.4	65.2–67.7	CC 112.0
79.8–83.1	71.5–74.8	67.8–70.9	CC 121.0
83.2–86.0	74.9–78.0	71.0–73.9	CC 132.0
—	78.1–80.7	74.0–76.5	CC 143.0
—	80.8–86.0	76.6–80.2	CC 156.0
—	—	80.3–83.1	CC 167.0
—	—	83.2–86.0	CC 180.0

Thermal Unit Table 17
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)			Thermal Unit Number
1.T.U.	2 T.U.	3 T.U.	
0.42–0.46	0.39–0.43	0.38–0.40	A .49
0.47–0.50	0.44–0.47	0.41–0.44	A .54
0.51–0.55	0.48–0.52	0.45–0.49	A .59
0.56–0.62	0.53–0.58	0.50–0.55	A .65
0.63–0.67	0.59–0.64	0.56–0.60	A .71
0.68–0.73	0.65–0.68	0.61–0.65	A .78
0.74–0.81	0.69–0.77	0.66–0.72	A .86
0.82–0.89	0.78–0.84	0.73–0.79	A .95
0.90–0.98	0.85–0.93	0.80–0.88	A 1.02
0.99–1.12	0.94–1.05	0.89–0.98	A 1.16
1.13–1.20	1.06–1.13	0.99–1.07	A 1.25
1.21–1.34	1.14–1.25	1.08–1.17	A 1.39
1.35–1.41	1.26–1.33	1.18–1.25	A 1.54
1.42–1.51	1.34–1.42	1.26–1.33	A 1.63
1.52–1.62	1.43–1.52	1.34–1.44	A 1.75
1.63–1.73	1.53–1.63	1.45–1.53	A 1.86
1.74–1.86	1.64–1.75	1.54–1.65	A 1.99
1.87–2.02	1.76–1.90	1.66–1.79	A 2.15
2.03–2.25	1.91–2.13	1.80–1.99	A 2.31
2.26–2.46	2.14–2.33	2.00–2.18	A 2.57
2.47–2.77	2.34–2.73	2.19–2.45	A 2.81
2.78–2.99	2.74–2.86	2.46–2.65	A 3.61
3.00–3.26	2.87–3.14	2.66–2.90	A 3.95
3.27–3.59	3.15–3.47	2.91–3.19	A 4.32
3.60–3.99	3.48–3.83	3.20–3.56	A 4.79
4.00–4.42	3.84–4.16	3.57–3.83	A 5.30
4.43–4.61	4.17–4.43	3.84–4.08	A 5.78
4.62–5.23	4.44–5.00	4.09–4.64	A 6.20
5.24–5.39	5.01–5.16	4.65–5.00	A 6.99
5.40–5.88	5.17–5.56	5.01–5.36	A 7.65
5.89–6.56	5.57–6.22	5.37–5.87	A 8.38
6.57–7.18	6.23–6.89	5.88–6.43	A 9.25
7.19–7.80	6.90–7.00	6.44–6.79	A 9.85
7.81–9.00	—	6.80–7.00	A 11.0

Thermal Unit Table 18
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)			Thermal Unit Number
1.T.U.	2 T.U.	3 T.U.	
15.5–16.4	14.4–15.3	13.6–14.5	—
16.5–17.6	15.4–16.4	14.6–15.5	CC 22.8
17.7–19.1	16.5–18.4	15.6–17.4	CC 24.6
19.2–20.4	18.5–19.6	17.5–18.5	CC 26.3
20.5–22.1	19.7–21.0	18.6–19.9	CC 28.8
22.2–23.4	21.1–22.7	20.0–21.5	CC 31.0
23.5–25.6	22.8–24.2	21.6–22.9	CC 33.3
25.7–27.3	24.3–25.9	23.0–24.5	CC 36.4
27.4–29.4	26.0–27.8	24.6–26.3	CC 39.6
29.5–31.5	27.9–29.8	26.4–28.2	CC 42.7
31.6–33.7	29.9–31.7	28.3–30.0	CC 46.6
33.8–36.5	31.8–34.2	30.1–32.3	CC 50.1
36.6–39.1	34.3–36.9	32.4–34.9	CC 54.5
39.2–41.7	37.0–39.8	35.0–37.6	CC 59.4
41.8–44.8	39.9–42.3	37.7–40.0	CC 64.3
44.9–48.0	42.4–45.3	40.1–42.8	CC 68.5
48.1–50.7	45.4–47.9	42.9–45.3	CC 74.6
50.8–54.9	48.0–51.9	45.4–49.1	CC 81.5
55.0–59.9	52.0–56.5	49.2–53.4	CC 87.7
60.0–63.3	56.6–60.7	53.5–57.4	CC 94.0
63.4–67.2	60.8–64.8	57.5–61.3	—
67.3–72.4	64.9–67.1	61.4–63.5	CC 112.0
72.5–74.9	67.2–70.1	63.6–66.3	CC 121.0
75.0–77.4	70.2–72.9	66.4–69.0	CC 132.0
77.5–80.7	73.0–74.9	69.1–70.9	CC 143.0
80.8–83.1	75.0–77.9	71.0–73.7	CC 156.0
83.2–86.0	78.0–80.9	73.8–76.5	CC 167.0
—	81.0–82.9	76.6–78.4	CC 180.0
—	83.0–86.0	78.5–86.0	CC 196.0

Thermal Unit Table 19
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
43.6–47.3	CC 54.5
47.4–51.3	CC 59.4
51.4–54.6	CC 64.3
54.7–59.7	CC 68.5
59.8–65.1	CC 74.6
65.2–70.1	CC 81.5
70.2–75.1	CC 87.7
75.2–82.2	CC 94.0
82.3–89.2	—
89.3–96.5	CC 112.0
96.6–104.	CC 121.0
105.–113.	CC 132.0
114.–123.	CC 143.0
124.–133.	CC 156.0

Thermal Unit Table 20
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
133.–148.	B1.30
149.–174.	B1.45
175.–195.	B1.67
196.–219.	B1.88
220.–239.	B2.10
240.–271.	B2.40
272.–308.	B2.65
309.–348.	B3.00
349.–397.	B3.30
398.–429.	B3.70
430.–495.	B4.15
496.–520.	B4.85

Thermal Unit Table 21
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Load
128.–140.	B1.30
141.–163.	B1.45
164.–179.	B1.67
180.–201.	B1.88
202.–227.	B2.10
228.–251.	B2.40
252.–278.	B2.65
279.–308.	B3.00
309.–346.	B3.30
347.–380.	B3.70
381.–426.	B4.15
427.–454.	B4.85
455.–489.	B5.50
490.–520.	B6.25

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 22
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
92.0–100.	DD 112.0
101.–109.	—
110.–119.	—
120.–131.	—
132.–139.	DD 150.0
140.–156.	DD 160.0
157.–166.	DD 185.0
167.–180.	—
181.–189.	DD 220.0
190.–209.	—
210.–225.	DD 250.0
226.–238.	DD 265.0
239.–266.	DD 280.0

Thermal Unit Table 24
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
88.2–95.1	DD 112.0
95.2–101.	—
102.–111.	—
112.–119.	—
120.–131.	DD 150.0
132.–149.	DD 160.0
150.–170.	DD 185.0
171.–180.	DD 220.0
181.–197.	DD 240.0
198.–204.	DD 250.0
205.–213.	DD 265.0
214.–237.	DD 280.0
238.–243.	—
244.–266.	—

Thermal Unit Table 26
(index and instructions: page 16-135 to page 16-139)

Size 7 Type J	Size 8 Type K	Thermal Unit Number
Current Transformer Ratio		
120/5	2000/5	
Motor FLC		
166.–187.	277.–312.	B1.03
188.–211.	313.–352.	B1.16
212.–232.	353.–388.	B1.30
233.–267.	389.–445.	B1.45
268.–301.	446.–503.	B1.67
302.–336.	504.–561.	B1.88
337.–383.	562.–640.	B2.10
384.–425.	641.–708.	B2.40
426.–466.	709.–777.	B2.65
467.–522.	778.–870.	B3.00
523.–587.	871.–978.	B3.30
588.–656.	979.–1093.	B3.70
657.–764.	1094.–1215.	B4.15

Thermal Unit Table 28
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
2 or 3 T.U.		
Large Enclosure	Small Enclosure	
45.3–48.2	40.3–42.8	CC 64.3
48.3–52.4	42.9–46.2	CC 68.5
52.5–56.4	46.3–49.8	CC 74.6
56.5–61.2	49.9–54.9	CC 81.5
61.3–66.1	55.0–57.9	CC 87.7
66.2–71.4	58.0–62.5	CC 94.0
71.5–77.0	62.6–67.3	—
77.1–80.7	67.4–73.4	CC 112.0
80.8–87.7	73.5–78.9	CC 121.0
87.8–94.9	79.0–84.9	CC 132.0
95.0–102.	85.0–91.0	CC 143.0
103.–110.	91.1–97.2	CC 156.0
111.–117.	97.3–104.	CC 167.0
118.–133.	105.–121.	CC 180.0
—	122.–133.	CC 196.0

Thermal Unit Table 31
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.31–0.35	B0.44
0.36–0.39	B0.51
0.40–0.44	B0.57
0.45–0.50	B0.63
0.51–0.61	B0.71
0.62–0.68	B0.81
0.69–0.73	B0.92
0.74–0.82	B1.03
0.83–0.92	B1.16
0.93–1.03	B1.30
1.04–1.19	B1.45
1.20–1.34	B1.67
1.35–1.50	B1.88
1.51–1.74	B2.10
1.75–1.97	B2.40
1.98–2.14	B2.65
2.15–2.47	B3.00
2.48–2.91	B3.30
2.92–3.31	B3.70
3.32–3.75	B4.15
3.76–4.05	B4.85
4.06–4.94	B6.25
4.95–5.52	B6.90
5.53–6.11	B7.70
6.12–6.52	B8.20
6.53–7.31	B9.10
7.32–8.43	B10.2
8.44–9.83	B11.5
9.84–10.7	B12.8
10.8–11.6	B14.0
11.7–12.9	B15.5
13.0–14.3	B17.5
14.4–15.7	B19.5
15.8–17.8	B22.0
17.9–20.3	B25.0
20.4–23.3	B28.0
23.4–26.6	B32.0
26.7–30.3	B36.0
30.4–35.3	B40.0
35.4–41.5	B45.0
41.6–45	B50.0

Thermal Unit Table 34
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
15.1–16.2	—
16.3–17.5	CC 22.8
17.6–19.1	CC 24.6
19.2–20.7	CC 26.3
20.8–22.2	CC 28.8
22.3–24.0	CC 31.0
24.1–25.7	CC 33.3
25.8–27.8	CC 36.4
27.9–30.1	CC 39.6
30.2–32.5	CC 42.7
32.6–35.1	CC 46.6
35.2–38.0	CC 50.1
38.1–41.1	CC 54.5
41.2–44.0	CC 59.4
44.1–47.2	CC 64.3
47.3–51.1	CC 68.5
51.2–55.8	CC 74.6
55.9–59.5	CC 81.5
59.6–64.5	CC 87.7
64.6–69.5	CC 94.0
69.6–75.0	—
75.1–78.1	CC 112.0
78.2–82.3	CC 121.0
82.4–86.0	CC 132.0

Thermal Unit Table 40
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
15.3–16.7	—
16.8–19.8	—
19.9–22.8	—
22.9–25.8	—
25.9–30.4	—
30.5–31.9	—
32.0–34.2	—
34.3–38.8	—
38.9–44.2	—
44.3–50.2	—
50.3–57.1	—
57.2–63.2	—
63.3–68.6	—
68.7–78.6	C 90.0
78.7–86.0	—

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 41
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.81–0.92	B1.16
0.93–1.07	B1.30
1.08–1.14	B1.45
1.15–1.26	B1.67
1.27–1.49	B1.88
1.50–1.73	B2.10
1.74–1.89	B2.40
1.90–2.16	B2.65
2.17–2.37	B3.00
2.38–2.66	B3.30
2.67–2.99	B3.70
3.00–3.40	B4.15
3.41–3.94	B4.85
3.95–4.15	B5.50
4.16–4.49	B6.25
4.50–5.15	B6.90
5.16–5.77	B7.70
5.78–6.61	B8.20
6.62–7.14	B9.10
7.15–7.97	B10.2
7.98–8.15	B11.5
8.16–9.32	B12.8
9.33–9.97	B14.0
9.98–10.7	B15.5
10.8–12.0	B17.5
12.1–13.9	B19.5
14.0–15.7	B22.0
15.8–18.4	B25.0
18.5–21.6	B28.0
21.7–24.0	B32.0
24.1–28.6	B36.0
28.7–30.7	B40.0
30.8–33.5	B45.0
33.6–36.0	B50.0

Thermal Unit Table 43
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.41–0.44	A .49
0.45–0.49	A .54
0.50–0.53	A .59
0.54–0.58	A .65
0.59–0.65	A .71
0.66–0.71	A .78
0.72–0.78	A .86
0.79–0.85	A .95
0.86–0.96	A 1.02
0.97–1.04	A 1.16
1.05–1.16	A 1.25
1.17–1.29	A 1.39
1.30–1.37	A 1.54
1.38–1.47	A 1.63
1.48–1.56	A 1.75
1.57–1.65	A 1.86
1.66–1.79	A 1.99
1.80–1.95	A 2.15
1.96–2.15	A 2.31
2.16–2.38	A 2.57
2.39–2.75	A 2.81
2.76–2.84	A 3.61
2.85–3.06	A 3.95
3.07–3.45	A 4.32
3.46–3.70	A 4.79
3.71–4.07	A 5.30
4.08–4.32	A 5.78
4.33–4.90	A 6.20
4.91–5.35	A 6.99
5.36–5.85	A 7.65
5.86–6.41	A 8.38
6.42–6.79	A 9.25
6.80–7.57	A 9.85
7.58–8.15	A 11.0
8.16–8.98	A 11.9
8.99–9.67	A 13.2
9.68–9.95	A 14.1
9.96–10.8	A 14.8
10.9–12.1	A 16.2
12.2–13.1	A 17.9
13.2–13.9	A 19.8
14.0–15.0	A 21.3
15.1–16.0	A 25.2

Thermal Unit Table 44
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.34–0.38	B0.44
0.39–0.43	B0.51
0.44–0.48	B0.57
0.49–0.53	B0.65
0.54–0.62	B0.71
0.63–0.69	B0.81
0.70–0.78	B0.92
0.79–0.88	B1.03
0.89–0.99	B1.16
1.00–1.10	B1.30
1.11–1.26	B1.45
1.27–1.43	B1.67
1.44–1.59	B1.88
1.60–1.81	B2.10
1.82–2.00	B2.40
2.01–2.28	B2.65
2.29–2.52	B3.00
2.53–2.87	B3.30
2.88–3.28	B3.70
3.29–3.75	B4.15
3.76–4.27	B4.85
4.28–4.77	B5.50
4.78–5.27	B6.25
5.28–5.91	B6.90
5.92–6.25	B7.70
6.26–6.83	B8.20
6.84–7.65	B9.10
7.66–8.55	B10.2
8.56–9.56	B11.5
9.57–10.3	B12.8
10.4–11.3	B14.0
11.4–12.4	B15.5
12.5–14.1	B17.5
14.2–15.7	B19.5
15.8–17.9	B22.0
18.0–20.1	B25.0
20.2–22.5	B28.0
22.6–25.0	B32.0

Thermal Unit Table 49
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
82.5–88.2	DD 112.0
88.3–95.9	—
96.0–102.	—
103.–109.	—
110.–121.	DD 150.0
122.–139.	DD 160.0
140.–154.	DD 185.0
155.–163.	DD 220.0
164.–175.	DD 240.0
176.–184.	DD 250.0
185.–195.	DD 265.0
196.–215.	DD 280.0
216.–224.	—
225.–243.	—
244.–266.	—

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 53
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	3 T. U.	
0.31–0.33	0.29–0.31	B0.44
0.34–0.36	0.32–0.36	B0.51
0.37–0.40	0.37–0.38	B0.57
0.41–0.48	0.39–0.46	B0.63
0.49–0.57	0.47–0.55	B0.71
0.58–0.64	0.56–0.61	B0.81
0.65–0.70	0.62–0.66	B0.92
0.71–0.77	0.67–0.75	B1.03
0.78–0.85	0.76–0.83	B1.16
0.86–0.99	0.84–0.93	B1.30
1.00–1.10	0.94–1.06	B1.45
1.11–1.28	1.07–1.18	B1.67
1.29–1.41	1.19–1.31	B1.88
1.42–1.58	1.32–1.47	B2.10
1.59–1.80	1.48–1.67	B2.40
1.81–2.03	1.68–1.83	B2.65
2.04–2.25	1.84–2.04	B3.00
2.26–2.51	2.05–2.38	B3.30
2.52–2.83	2.39–2.60	B3.70
2.84–3.29	2.61–3.13	B4.15
3.30–3.75	3.14–3.59	B4.85
3.76–4.22	3.60–3.94	B5.50
4.23–4.65	3.95–4.19	B6.25
4.66–5.16	4.20–4.72	B6.90
5.17–5.53	4.73–5.21	B7.70
5.54–6.09	5.22–5.51	B8.20
6.10–6.80	5.52–6.17	B9.10
6.81–7.60	6.18–7.00	B10.2
7.61–8.35	—	B11.5
8.36–9.00	—	B12.8

Thermal Unit Table 54
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
2 T. U.	3 T. U.	
43.6–45.5	41.1–43.5	CC 64.3
45.6–49.6	43.6–46.8	CC 68.5
49.7–53.1	46.9–50.0	CC 74.6
53.2–57.6	50.1–54.9	CC 81.5
57.7–62.4	55.0–57.5	CC 87.7
62.5–67.5	57.6–61.8	CC 94.0
67.6–71.1	61.9–66.2	—
71.2–75.9	66.3–72.4	CC 112.0
76.0–81.9	72.5–78.1	CC 121.0
82.0–84.6	78.2–80.7	CC 132.0
84.7–90.7	80.8–86.5	CC 143.0
90.8–98.4	86.6–93.9	CC 156.0
98.5–105.	94.0–100.	CC 167.0
106.–117.	101.–112.	CC 180.0
118.–123.	113.–117.	CC 196.0
124.–133.	118.–123.	CC 208.0
—	124.–133.	CC 219.0

Thermal Unit Table 56
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 or 2 T. U.	3 T. U.	
3.29–3.74	3.18–3.40	B4.85
3.75–4.23	3.41–3.76	B5.50
4.24–4.68	3.77–4.00	B6.25
4.69–5.22	4.01–4.57	B6.90
5.23–5.67	4.58–5.03	B7.70
5.68–6.13	5.04–5.32	B8.20
6.14–6.91	5.33–5.97	B9.10
6.92–7.70	5.98–6.88	B10.2
7.71–8.56	6.89–7.82	B11.5
8.57–9.39	7.83–8.47	B12.8
9.40–10.4	8.48–9.15	B14.0
10.5–11.6	9.16–10.1	B15.5
11.7–12.9	10.2–11.2	B17.5
13.0–14.6	11.3–12.0	B19.5
14.7–16.5	12.1–13.6	B22.0
16.6–18.5	13.7–15.2	B25.0
18.6–21.0	15.3–17.1	B28.0
21.1–23.6	17.2–19.0	B32.0
23.7–26.3	19.1–21.5	B36.0
26.4–29.3	21.6–24.1	B40.0
29.4–35.1	24.2–27.0	B45.0
35.2–36.1	27.1–28.7	B50.0
36.2–39.1	28.8–30.4	B56.0
39.2–41.5	30.5–32.2	B62.0
41.6–45.0	32.3–35.4	B70.0
—	35.5–38.2	B79.0
—	38.3–45.0	B88.0

Thermal Unit Table 58
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 or 2 T. U.	3 T. U.	
3.37–3.82	3.28–3.51	B4.85
3.83–4.33	3.52–3.89	B5.50
4.34–4.79	3.90–4.14	B6.25
4.80–5.33	4.15–4.73	B6.90
5.34–5.79	4.74–5.22	B7.70
5.80–6.27	5.23–5.53	B8.20
6.28–7.03	5.54–6.21	B9.10
7.04–7.88	6.22–7.17	B10.2
7.89–8.73	7.18–8.19	B11.5
8.74–9.55	8.20–8.90	B12.8
9.56–10.6	8.91–9.57	B14.0
10.7–11.8	9.58–10.6	B15.5
11.9–13.1	10.7–11.8	B17.5
13.2–14.9	11.9–12.7	B19.5
15.0–16.9	12.8–14.4	B22.0
17.0–18.8	14.5–16.1	B25.0
18.9–21.5	16.2–18.2	B28.0
21.6–24.1	18.3–20.2	B32.0
24.2–26.8	20.3–22.8	B36.0
26.9–29.9	22.9–25.6	B40.0
30.0–35.5	25.7–28.8	B45.0
35.6–36.5	28.9–30.6	B50.0
36.6–39.6	30.7–32.4	B56.0
39.7–41.5	32.5–34.6	B62.0
41.6–45.0	34.7–38.6	B70.0
—	38.7–45.0	B79.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 59
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 or 2 T. U.	3 T. U.	
0.34–0.38	0.29–0.31	B0.44
0.39–0.43	0.32–0.35	B0.51
0.44–0.47	0.36–0.38	B0.57
0.48–0.53	0.39–0.46	B0.63
0.54–0.60	0.47–0.55	B0.71
0.61–0.68	0.56–0.62	B0.81
0.69–0.76	0.63–0.67	B0.92
0.77–0.86	0.68–0.75	B1.03
0.87–0.97	0.76–0.84	B1.16
0.98–1.07	0.85–0.95	B1.30
1.08–1.23	0.96–1.09	B1.45
1.24–1.39	1.10–1.21	B1.67
1.40–1.55	1.22–1.35	B1.88
1.56–1.77	1.36–1.53	B2.10
1.78–1.96	1.54–1.73	B2.40
1.97–2.15	1.74–1.90	B2.65
2.16–2.41	1.91–2.14	B3.00
2.42–2.71	2.15–2.34	B3.30
2.72–3.03	2.35–2.67	B3.70
3.04–3.53	2.68–3.22	B4.15
3.54–4.01	3.23–3.48	B4.85
4.02–4.56	3.49–3.87	B5.50
4.57–5.03	3.88–4.14	B6.25
5.04–5.59	4.15–4.73	B6.90
5.60–5.95	4.74–5.28	B7.70
5.96–6.58	5.29–5.64	B8.20
6.59–7.31	5.65–6.39	B9.10
7.32–8.15	6.40–7.43	B10.2
8.16–9.13	7.44–8.55	B11.5
9.14–9.91	8.56–9.40	B12.8
9.92–10.7	9.41–10.0	B14.0
10.8–12.1	10.1–11.2	B15.5
12.2–13.5	11.3–12.5	B17.5
13.6–15.1	12.6–13.5	B19.5
15.2–17.0	13.6–15.4	B22.0
17.1–18.9	15.5–17.5	B25.0
19.0–21.5	17.6–19.9	B28.0
21.6–24.0	20.0–22.2	B32.0
24.1–26.0	22.3–25.5	B36.0
—	25.6–26.0	B40.0

Thermal Unit Table 61
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
2 T. U.	3 T. U.	
46.8–50.0	45.3–48.2	CC 64.3
50.1–54.2	48.3–52.4	CC 68.5
54.3–58.3	52.5–56.4	CC 74.6
58.4–63.6	56.5–61.2	CC 81.5
63.7–68.5	61.3–66.1	CC 87.7
68.6–74.0	66.2–71.4	CC 94.0
74.1–79.8	71.5–77.0	—
79.9–83.0	77.1–79.0	CC 112.0
83.1–88.9	79.1–84.7	CC 121.0
89.0–95.6	84.8–91.1	CC 132.0
95.7–102.	91.2–98.1	CC 143.0
103.–109.	98.2–104.	CC 156.0
110.–119.	105.–113.	CC 167.0
120.–133.	114.–123.	CC 180.0
—	124.–133.	CC 196.0

Thermal Unit Table 65
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.31–0.35	B0.44
0.36–0.39	B0.51
0.40–0.44	B0.57
0.45–0.50	B0.63
0.51–0.58	B0.71
0.59–0.65	B0.81
0.66–0.73	B0.92
0.74–0.82	B1.03
0.83–0.92	B1.16
0.93–1.03	B1.30
1.04–1.19	B1.45
1.20–1.34	B1.67
1.35–1.50	B1.88
1.51–1.67	B2.10
1.68–1.89	B2.40
1.90–2.14	B2.65
2.15–2.36	B3.00
2.37–2.65	B3.30
2.66–2.97	B3.70
2.98–3.47	B4.15
3.48–3.94	B4.85
3.95–4.44	B5.50
4.45–4.94	B6.25
4.95–5.52	B6.90
5.53–5.88	B7.70
5.89–6.52	B8.20
6.53–7.31	B9.10
7.32–8.21	B10.2
8.22–9.18	B11.5
9.19–9.90	B12.8
10.0–11.0	B14.0
11.1–12.4	B15.5
12.5–13.9	B17.5
14.0–15.7	B19.5
15.8–17.8	B22.0
17.9–20.0	B25.0
20.1–22.9	B28.0
23.0–25.0	B32.0
Following Selections for Size 2 Only.	
23.0–25.7	B32.0
25.8–28.6	B36.0
28.7–32.2	B40.0
32.3–35.8	B45.0
35.9–40.1	B50.0
40.2–44.4	B56.0
44.5–50.0	B62.0

Thermal Unit Table 66
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.31–0.32	B0.44
0.33–0.36	B0.51
0.37–0.41	B0.57
0.42–0.49	B0.63
0.50–0.54	B0.71
0.55–0.61	B0.81
0.62–0.67	B0.92
0.68–0.76	B1.03
0.77–0.87	B1.16
0.88–0.98	B1.30
0.99–1.05	B1.45
1.06–1.25	B1.67
1.26–1.33	B1.88
1.34–1.56	B2.10
1.57–1.71	B2.40
1.72–1.97	B2.65
1.98–2.15	B3.00
2.16–2.42	B3.30
2.43–2.78	B3.70
2.79–3.28	B4.15
3.29–3.88	B4.85
3.89–4.13	B5.50
4.14–4.43	B6.25
4.44–4.96	B6.90
4.97–5.35	B7.70
5.36–5.91	B8.20
5.92–6.79	B9.10
6.80–7.56	B10.2
7.57–7.83	B11.5
7.84–8.09	B12.8
8.10–9.51	B14.0
9.52–10.1	B15.5
10.2–11.3	B17.5
11.4–13.1	B19.5
13.2–14.9	B22.0
15.0–16.1	B25.0
16.2–17.8	B28.0
17.9–19.1	B32.0
19.2–22.4	B36.0
22.5–23.5	B40.0
23.6–26.0	B45.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 67
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
3.79–4.14	B5.50
4.15–4.44	B6.25
4.45–5.22	B6.90
5.23–5.29	B7.70
5.30–5.99	B8.20
6.00–6.82	B9.10
6.83–7.68	B10.2
7.69–7.92	B11.5
7.93–8.47	B12.8
8.48–9.99	B14.0
10.0–10.8	B15.5
10.9–12.3	B17.5
12.4–12.9	B19.5
13.0–15.1	B22.0
15.2–16.7	B25.0
16.8–17.9	B28.0
18.0–20.1	B32.0
20.2–23.8	B36.0
23.9–25.8	B40.0
25.9–28.3	B45.0
28.4–29.6	B50.0
29.7–32.1	B56.0
32.2–34.4	B62.0
34.5–38.3	B70.0
38.4–39.9	B79.0
40.0–45.0	B88.0

Thermal Unit Table 68
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
14.9–16.1	—
16.2–17.3	CC 22.8
17.4–19.5	CC 24.6
19.6–20.7	CC 26.3
20.8–22.4	CC 28.8
22.5–23.9	CC 31.0
24.0–25.8	CC 33.3
25.9–27.6	CC 36.4
27.7–29.7	CC 39.6
29.8–31.8	CC 42.7
31.9–34.2	CC 46.6
34.3–37.0	CC 50.1
37.1–39.6	CC 54.5
39.7–42.5	CC 59.4
42.6–45.0	CC 64.3
45.1–48.6	CC 68.5
48.7–51.2	CC 74.6
51.3–56.0	CC 81.5
56.1–60.1	CC 87.7
60.2–64.3	CC 94.0
64.4–68.9	—
69.0–71.9	CC 112.0
72.0–75.4	CC 121.0
75.5–78.9	CC 132.0
79.0–82.1	CC 143.0
82.2–86.0	CC 156.0

Thermal Unit Table 69
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 or 2 T. U.	3 T. U.	
3.46–3.90	3.38–3.65	B4.85
3.91–4.44	3.66–4.07	B5.50
4.45–4.91	4.08–4.36	B6.25
4.92–5.51	4.37–5.19	B6.90
5.52–5.84	5.20–5.59	B7.70
5.85–6.54	5.60–5.98	B8.20
6.55–7.33	5.99–6.78	B9.10
7.34–8.31	6.79–7.91	B10.2
8.32–9.22	7.92–9.12	B11.5
9.23–10.0	9.13–10.0	B12.8
10.1–11.2	10.1–10.7	B14.0
11.3–12.5	10.8–12.0	B15.5
12.6–14.2	12.1–13.5	B17.5
14.3–16.1	13.6–14.6	B19.5
16.2–18.4	14.7–16.7	B22.0
18.5–20.5	16.8–18.9	B25.0
20.6–23.2	19.0–21.6	B28.0
23.3–26.6	21.7–24.1	B32.0
26.7–29.6	24.2–27.6	B36.0
29.7–33.5	27.7–31.2	B40.0
33.6–37.2	31.3–35.5	B45.0
37.3–41.5	35.6–37.8	B50.0
41.6–45.0	37.9–41.5	B56.0
—	41.6–45.0	B62.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 72
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	3 T. U.	
2.38–2.62 2.63–2.94 2.95–3.31	2.38–2.62 2.63–2.94 2.95–3.31	— — —
3.32–3.43 3.44–3.81 3.82–4.32	3.32–3.43 3.44–3.81 3.82–4.32	— — —
4.33–4.75 4.76–5.38 5.39–5.75	4.33–4.75 4.76–5.38 5.39–5.75	— — —
5.76–5.97 5.98–6.30 6.31–6.55	5.76–5.97 5.98–6.30 6.31–6.55	— — —
6.56–6.89 6.90–7.14 7.15–7.36	6.56–6.89 6.90–7.14 7.15–7.36	— — —
7.37–8.30 8.31–8.59 8.60–9.01	7.37–8.30 8.31–8.59 8.60–9.01	— — —
9.02–9.68 9.69–9.99 10.0–10.9	9.02–9.68 9.69–9.99 10.0–10.9	— — —
11.0–11.3 11.4–12.4 12.5–12.9	11.0–11.3 11.4–12.0 —	— — —
13.0–14.0 14.1–14.5 14.6–15.7	— — —	— — —
15.8–16.6 16.7–18.0	— —	— —
Following Selections for Size M–1 & M–1P Only.		
— —	11.4–12.4 12.5–12.9	— —
— — —	13.0–14.0 14.1–14.5 14.6–15.7	— — —
— 16.7–17.6 17.7–18.3	15.8–16.6 16.7–17.6 17.7–18.3	— — —
18.4–19.4 19.5–20.5 20.6–21.7	18.4–19.4 19.5–20.5 20.6–21.7	— — —
21.8–22.8 22.9–24.3 24.4–24.7	21.8–22.8 22.9–24.3 24.4–24.7	— — —
24.8–25.4 25.5–26.0	24.8–25.4 25.5–26.0	— —
Following Selections for Size M–1P Only.		
26.1–27.7 27.8–28.9 29.0–30.6	— — —	— — —
30.7–32.5 32.6–36.0	— —	— —

Thermal Unit Table 73
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	3 T. U.	
2.42–2.67 2.68–3.00 3.01–3.36	2.42–2.67 2.68–3.00 3.01–3.36	— — —
3.37–3.53 3.54–3.91 3.92–4.41	3.37–3.53 3.54–3.91 3.92–4.41	— — —
4.42–4.83 4.84–5.45 5.46–5.89	4.42–4.83 4.84–5.45 5.46–5.89	— — —
5.90–6.04 6.05–6.55 6.56–6.72	5.90–6.04 6.05–6.55 6.56–6.72	— — —
6.73–7.00 7.01–7.39 7.40–7.54	6.73–7.00 7.01–7.39 7.40–7.54	— — —
7.55–8.41 8.42–8.91 8.92–9.16	7.55–8.41 8.42–8.91 8.92–9.16	— — —
9.17–10.0 10.1–10.3 10.4–11.4	9.17–10.0 10.1–10.3 10.4–11.4	— — —
11.5–11.8 11.9–12.9 13.0–13.4	11.5–11.8 11.9–12.9 —	— — —
13.5–14.2 14.3–15.1 15.2–18.0	— — —	— — —
Following Selections for Size M–1 & M–1P Only.		
— — —	11.5–11.8 11.9–12.9 13.0–13.4	— — —
— — 15.2–17.1	13.5–14.2 14.3–15.1 15.2–17.1	— — —
17.2–18.0 18.1–18.9 19.0–19.7	17.2–18.0 18.1–18.9 19.0–19.7	— — —
19.8–20.9 21.0–21.9 22.0–23.1	19.8–20.9 21.0–21.9 22.0–23.1	— — —
23.2–24.3 24.4–25.5 25.6–26.0	23.2–24.3 24.4–25.5 25.6–26.0	— — —
Following Selections for Size M–1P Only.		
26.1–26.8 26.9–27.3 27.4–28.7	— — —	— — —
28.8–30.2 30.3–31.9 32.0–36.0	— — —	— — —

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 74
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	3 T. U.	
2.23–2.47 2.48–2.76 2.77–3.04	2.23–2.47 2.48–2.76 2.77–3.04	— — —
3.05–3.24 3.25–3.61 3.62–4.19	3.05–3.24 3.25–3.61 3.62–4.19	— — —
4.20–4.62 4.63–5.14 5.15–5.39	4.20–4.62 4.63–5.14 5.15–5.39	— — —
5.40–5.69 5.70–5.99 6.00–6.29	5.40–5.69 5.70–5.99 6.00–6.29	— — —
6.30–6.64 6.65–6.99 7.00–7.39	6.30–6.64 6.65–6.99 7.00–7.39	— — —
7.40–7.79 7.80–7.94 7.95–8.49	7.40–7.79 7.80–7.94 7.95–8.49	— — —
8.50–8.99 9.00–9.59 9.60–10.1	8.50–8.99 9.00–9.59 9.60–10.1	— — —
10.2–10.6 10.7–11.3 11.4–12.0	10.2–10.6 10.7–11.3 11.4–12.0	— — —
12.0–12.6 12.7–13.8 13.9–14.7	— — —	— — —
14.8–15.2 15.3–16.2 16.3–18.0	— — —	— — —
Following Selections for Size 1 Only.		
— — 13.9–14.7	12.0–12.6 12.7–13.8 13.9–14.7	— — —
14.8–15.2 15.3–16.2 16.3–17.4	14.8–15.2 15.3–16.2 16.3–17.4	— — —
17.5–18.5 18.6–19.6 19.7–20.2	17.5–18.5 18.6–19.6 19.7–20.2	— — —
20.3–21.5 21.6–22.4 22.5–23.2	20.3–21.5 21.6–22.4 22.5–23.2	— — —
23.3–24.3 24.4–25.4 25.5–26.0	23.3–24.3 24.4–25.4 25.5–26.0	— — —

Thermal Unit Table 75
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
3.22–3.57 3.58–4.14 4.15–4.56	— — —
4.57–5.10 5.11–5.39 5.40–5.64	— — —
5.65–5.96 5.97–6.25 6.26–6.58	— — —
6.59–6.91 6.92–7.41 7.42–7.82	— — —
7.83–8.32 8.33–8.89 8.90–9.47	— — —
9.48–10.0 10.1–10.5 10.6–11.1	— — —
11.2–12.0 12.1–12.7 12.8–13.5	— — —
13.6–14.6 14.7–15.7 15.8–16.5	— — —
16.6–17.4 17.5–18.8 18.9–20.1	— — —
20.2–21.0 21.1–21.6 21.7–23.3	— — —
23.4–24.3 24.4–25.0 25.1–26.3	— — —
26.4–27.6 27.7–29.1 29.2–30.4	— — —
30.5–32.0 32.1–33.3 33.4–35.2	— — —
35.3–37.0 37.1–38.5 38.6–40.7	— — —
40.8–45.0	—

Thermal Unit Table 76
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
19.9–20.8 20.9–22.2 22.3–23.8	— — —
23.9–25.4 25.5–27.2 27.3–29.2	— — —
29.3–31.9 32.0–33.8 33.9–36.1	— — —
36.2–38.5 38.6–41.4 41.5–43.6	— — —
43.7–45.9 46.0–48.2 48.3–50.7	— — —
50.8–53.9 54.0–56.7 56.8–60.8	— — —
60.9–67.6 67.7–73.6 73.7–82.9	— — —
83.0–86.0	—

Thermal Unit Table 77
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
48.0–50.9 51.0–53.7 53.8–57.0	— — —
57.1–60.4 60.5–64.0 64.1–71.9	— — —
72.0–83.9 84.0–93.1 93.2–104	— — —
105–109 110–123 124–133	— FB 105.0 —

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 78
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	2 T. U. or 3 T. U.	
2.26–2.51 2.52–2.82 2.83–3.09	2.26–2.51 2.52–2.82 2.83–3.09	— — —
3.10–3.30 3.31–3.69 3.70–4.27	3.10–3.30 3.31–3.69 3.70–4.27	— — —
4.28–4.72 4.73–5.25 5.26–5.53	4.28–4.72 4.73–5.25 5.26–5.53	— — —
5.54–5.81 5.82–6.14 6.15–6.44	5.54–5.81 5.82–6.14 6.15–6.44	— — —
6.45–6.81 6.82–7.19 7.20–7.59	6.45–6.81 6.82–7.19 7.20–7.59	— — —
7.60–7.99 8.00–8.17 8.18–8.74	7.60–7.99 8.00–8.17 8.18–8.74	— — —
8.75–9.31 9.32–9.94 9.95–10.5	8.75–9.31 9.32–9.94 9.95–10.5	— — —
10.6–11.1 11.2–11.9 12.0–12.4	10.6–11.1 11.2–12.0 —	— — —
12.5–13.1 13.2–14.3 14.4–15.3	— — —	— — —
15.4–15.9 16.0–18.0	— —	— —
Following Selections for Size 1 Only.		
— — —	12.0–12.4 12.5–13.1 13.2–14.3	— — —
14.4–15.3 15.4–15.9 16.0–16.9	14.4–15.3 15.4–15.9 16.0–16.9	— — —
17.0–18.3 18.4–19.5 19.6–20.5	17.0–18.3 18.4–19.5 19.6–20.5	— — —
20.6–21.1 21.2–22.6 22.7–23.7	20.6–21.1 21.2–22.6 22.7–23.7	— — —
23.8–24.3 24.4–26.0	23.8–24.3 24.4–26.0	—

Thermal Unit Table 79
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
3.31–3.67 3.68–4.23 4.24–4.69	— — —
4.70–5.21 5.22–5.49 5.50–5.74	— — —
5.75–6.07 6.08–6.35 6.36–6.71	— — —
6.72–7.03 7.04–7.53 7.54–7.91	— — —
7.92–8.53 8.54–9.14 9.15–9.71	— — —
9.72–10.2 10.3–10.8 10.9–11.5	— — —
11.6–12.3 12.4–13.0 13.1–13.9	— — —
14.0–15.1 15.2–16.1 16.2–16.9	— — —
17.0–17.9 18.0–19.4 19.5–20.7	— — —
20.8–21.7 21.8–22.3 22.4–23.9	— — —
24.0–25.1 25.2–25.9 26.0–27.1	— — —
27.2–28.6 28.7–30.1 30.2–31.7	— — —
31.8–33.3 33.4–34.5 34.6–36.5	— — —
36.6–38.5 38.6–39.9 40.0–45.0	— — —

Thermal Unit Table 80
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
20.5–21.7 21.8–23.1 23.2–24.8	— — —
24.9–26.5 26.6–28.4 28.5–30.4	— — —
30.5–32.8 32.9–34.9 35.0–37.3	— — —
37.4–39.8 39.9–42.5 42.6–45.8	— — —
45.9–48.2 48.3–50.6 50.7–53.1	— — —
53.2–56.5 56.6–59.4 59.5–63.4	— — —
63.5–71.0 71.1–78.8 78.9–86.0	— — —

Thermal Unit Table 81
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
52.2–55.6 55.7–58.8 58.9–62.5	— — —
62.6–66.0 66.1–70.1 70.2–78.6	— — —
78.7–92.0 92.1–102 103–114	— — —
115–123 124–133	— FB105.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 82
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
2.36–2.63	—
2.64–2.96	—
2.97–3.23	—
3.24–3.45	—
3.46–3.86	—
3.87–4.44	—
4.45–4.95	—
4.96–5.47	—
5.48–5.75	—
5.76–6.09	—
6.10–6.42	—
6.43–6.75	—
6.76–7.16	—
7.17–7.43	—
7.44–7.99	—
8.00–8.46	—
8.47–9.19	—
9.20–9.74	—
9.75–10.3	—
10.4–10.8	—
10.9–11.6	—
11.7–12.2	—
12.3–13.1	—
13.2–13.7	—
13.8–14.3	—
14.4–15.5	—
15.6–16.7	—
16.8–17.6	—
17.7–18.6	—
18.7–19.9	—
20.0–21.1	—
21.2–25.0	—

Thermal Unit Table 83
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
2.30–2.60	—
2.61–2.87	—
2.88–3.17	—
3.18–3.37	—
3.38–3.76	—
3.77–4.29	—
4.30–4.75	—
4.76–5.26	—
5.27–5.51	—
5.52–5.78	—
5.79–6.13	—
6.14–6.41	—
6.42–6.75	—
6.76–7.09	—
7.10–7.57	—
7.58–7.90	—
7.91–8.81	—
8.82–9.47	—
9.48–10.0	—
10.1–10.7	—
10.8–11.4	—
11.5–12.1	—
12.2–13.1	—
13.2–13.7	—
13.8–14.7	—
14.8–16.0	—
16.1–17.3	—
17.4–18.2	—
18.3–19.4	—
19.5–20.7	—
20.8–22.3	—
22.4–23.5	—
23.6–24.2	—
24.3–26.0	—

Thermal Unit Table 84
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
3.38–3.78	—
3.79–4.37	—
4.38–4.87	—
4.88–5.51	—
5.52–5.73	—
5.74–6.09	—
6.10–6.44	—
6.45–6.75	—
6.76–7.15	—
7.16–7.57	—
7.58–8.07	—
8.08–8.47	—
8.48–8.81	—
8.82–9.46	—
9.47–10.1	—
10.2–10.8	—
10.9–11.4	—
11.5–12.1	—
12.2–13.1	—
13.2–13.8	—
13.9–14.8	—
14.9–16.1	—
16.2–17.4	—
17.5–18.3	—
18.4–19.5	—
19.6–21.0	—
21.1–22.5	—
22.6–23.7	—
23.8–24.5	—
24.6–26.4	—
26.5–27.7	—
27.8–28.7	—
28.8–29.9	—
30.0–31.8	—
31.9–33.5	—
33.6–35.1	—
35.2–37.1	—
37.2–38.8	—
38.9–41.1	—
41.2–45.0	—

Thermal Unit Table 85
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
42.9–45.4	—
45.6–48.3	—
48.4–52.4	—
52.5–55.9	—
56.0–59.8	—
59.9–63.8	—
63.9–67.9	—
68.0–72.6	—
72.7–83.2	—
83.3–94.7	—
94.8–105	—
106–116	—
117–121	—
122–133	FB105.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 86
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.43–0.44 0.45–0.47 0.48–0.53	A .49 A .54 A .59
0.54–0.61 0.62–0.65 0.66–0.71	A .65 A .71 A .78
0.72–0.79 0.80–0.86 0.87–0.96	A .86 A .95 A 1.02
0.97–1.04 1.05–1.17 1.18–1.31	A 1.16 A 1.25 A 1.39
1.32–1.38 1.39–1.47 1.48–1.57	A 1.54 A 1.63 A 1.75
1.58–1.65 1.66–1.77 1.78–1.93	A 1.86 A 1.99 A 2.15
1.94–2.18 2.19–2.46 2.47–2.68	A 2.31 A 2.57 A 2.81
2.69–2.87 2.88–3.07 3.08–3.59	A 3.61 A 3.95 A 4.32
3.60–3.79 3.80–4.27 4.28–4.59	A 4.79 A 5.30 A 5.78
4.60–4.90 4.91–5.06 5.07–5.44	A 6.20 A 6.99 A 7.65
5.45–6.24 6.25–7.21 7.22–7.69	A 8.38 A 9.25 A 9.85
7.70–8.24 8.25–8.81 8.82–9.32	A 11.0 A 11.9 A 13.2
9.33–9.99 10.0–10.5 10.6–11.5	A 14.1 A 14.8 A 16.2
11.6–12.2 12.3–13.3 13.4–15.8	A 17.9 A 21.3 A 25.2
15.9–18.4 18.5–20.5 20.6–21.5	— — —
21.6–23.9 24.0–26.8 26.9–28.2	— A 35.9 —
28.3–29.8 29.9–32.0	A 42.3 A 44.7

Thermal Unit Table 87
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.40–0.41 0.42–0.45 0.46–0.51	A .49 A .54 A .59
0.52–0.58 0.59–0.63 0.64–0.68	A .65 A .71 A .78
0.69–0.76 0.77–0.83 0.84–0.93	A .86 A .95 A 1.02
0.94–1.01 1.02–1.14 1.15–1.28	A 1.16 A 1.25 A 1.39
1.29–1.34 1.35–1.44 1.45–1.55	A 1.54 A 1.63 A 1.75
1.56–1.61 1.62–1.71 1.72–1.85	A 1.86 A 1.99 A 2.15
1.86–2.04 2.05–2.38 2.39–2.60	A 2.31 A 2.57 A 2.81
2.61–2.77 2.78–2.98 2.99–3.40	A 3.61 A 3.95 A 4.32
3.41–3.64 3.65–4.08 4.09–4.38	A 4.79 A 5.30 A 5.78
4.39–4.68 4.69–4.79 4.80–5.11	A 6.20 A 6.99 A 7.65
5.12–5.84 5.85–6.70 6.71–7.18	A 8.38 A 9.25 A 9.85
7.19–7.70 7.71–8.14 8.15–8.56	A 11.0 A 11.9 A 13.2
8.57–9.15 9.16–9.80 9.81–10.6	A 14.1 A 14.8 A 16.2
10.7–11.0	A 17.9

Thermal Unit Table 88
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.39–0.40 0.41–0.44 0.45–0.49	A .49 A .54 A .59
0.50–0.57 0.58–0.61 0.62–0.66	A .65 A .71 A .78
0.67–0.73 0.74–0.80 0.81–0.90	A .86 A .95 A 1.02
0.91–0.97 0.98–1.09 1.10–1.23	A 1.16 A 1.25 A 1.39
1.24–1.57 1.58–1.66 1.67–1.79	A 1.86 A 1.99 A 2.15
1.80–1.99 2.00–2.31 2.32–2.50	A 2.31 A 2.57 A 2.81
2.51–2.66 2.67–2.85 2.86–3.26	A 3.61 A 3.95 A 4.32
3.27–3.49 3.50–3.92 3.93–4.20	A 4.79 A 5.30 A 5.78
4.21–4.49 4.50–4.64 4.65–4.94	A 6.20 A 6.99 A 7.65
4.95–5.62 5.63–6.39 6.40–6.82	A 8.38 A 9.25 A 9.85
6.83–7.27 7.28–7.71 7.72–8.13	A 11.0 A 11.9 A 13.2
8.14–8.64 8.65–9.15 9.16–9.97	A 14.1 A 14.8 A 16.2
9.98–11.0	A 17.9

Thermal Unit Table 89
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
10.0–11.1 11.2–12.0 12.1–13.3	B17.5 B19.5 B22.0
13.4–15.1 15.2–17.1 17.2–18.6	B25.0 B28.0 B32.0
18.7–21.4 21.5–25.7 25.8–28.2	B36.0 B40.0 B45.0
28.3–29.7 29.8–31.2 31.3–32.1	B50.0 B56.0 B62.0
32.2–35.7 35.8–40.7 40.8–48.0	B70.0 B79.0 B88.0

Thermal Unit Table 90
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
4.88–5.13 5.14–5.85 5.86–6.67	A 7.65 A 8.38 A 9.25
6.68–7.09 7.10–7.62 7.63–8.04	A 9.85 A 11.0 A 11.9
8.05–8.46 8.47–9.11 9.12–9.69	A 13.2 A 14.1 A 14.8
9.70–10.5 10.6–11.6 11.7–12.3	A 16.2 A 17.9 A 21.3
12.4–14.6 14.7–16.8 16.9–17.9	A 25.2 — —
18.0–18.7 18.8–19.8 19.9–21.4	— — A 35.9
21.5–22.8 22.9–23.8 23.9–26.0	— A 42.3 A 44.7

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 91
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
4.80–5.07	A 7.65
5.08–5.73	A 8.38
5.74–6.48	A 9.25
6.49–6.90	A 9.85
6.91–7.25	A 11.0
7.26–7.81	A 11.9
7.82–8.29	A 13.2
8.30–8.81	A 14.1
8.82–9.40	A 14.8
9.41–10.0	A 16.2
10.1–11.1	A 17.9
11.2–11.7	A 21.3
11.8–13.7	A 25.2
13.8–16.0	—
16.1–16.9	—
17.0–17.7	—
17.8–18.7	—
18.8–20.2	A 35.9
20.3–21.4	—
21.5–22.5	A 42.3
22.6–23.8	A 44.7
23.9–26.0	A 48.0

Thermal Unit Table 92
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
10.5–11.7	B17.5
11.8–12.5	B19.5
12.6–14.0	B22.0
14.1–15.8	B25.0
15.9–18.0	B28.0
18.1–19.6	B32.0
19.7–23.5	B36.0
23.6–27.4	B40.0
27.5–30.5	B45.0
30.6–32.2	B50.0
32.3–34.0	B56.0
34.1–35.2	B62.0
35.3–39.5	B70.0
39.6–43.9	B79.0
44.0–48.0	B88.0

Thermal Unit Table 93
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
23.8–25.2	CC 36.4
25.3–26.8	CC 39.6
26.9–28.4	CC 42.7
28.5–30.3	CC 46.6
30.4–32.1	CC 50.1
32.2–34.2	CC 54.5
34.3–36.3	CC 59.4
36.4–40.2	CC 64.3
40.3–43.1	CC 68.5
43.2–45.9	CC 74.6
46.0–49.2	CC 81.5
49.3–51.6	CC 87.7
51.7–54.2	CC 94.0
54.3–55.7	—
55.8–60.3	CC 112.0
60.4–63.5	CC 121.0
63.6–67.1	CC 132.0
67.2–70.3	CC 143.0
70.4–74.1	CC 156.0
74.2–78.3	CC 167.0
78.4–83.3	CC 180.0
83.4–86.0	CC 196.0

Thermal Unit Table 94
(index and instructions:page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
25.8–27.5	CC 36.4
27.6–29.4	CC 39.6
29.5–31.4	CC 42.7
31.5–33.2	CC 46.6
33.3–36.2	CC 50.1
36.3–38.8	CC 54.5
38.9–41.6	CC 59.4
41.7–44.7	CC 64.3
44.8–47.9	CC 68.5
48.0–50.9	CC 74.6
51.0–54.4	CC 81.5
54.5–57.4	CC 87.7
57.5–60.6	CC 94.0
60.7–63.9	—
64.0–68.4	CC 112.0
68.5–73.4	CC 121.0
73.5–78.7	CC 132.0
78.8–83.8	CC 143.0
83.9–86.0	CC 156.0

Thermal Unit Table 95
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
42.5–44.7	CC 64.3
44.8–47.9	CC 68.5
48.0–51.2	CC 74.6
51.3–55.2	CC 81.5
55.3–59.4	CC 87.7
59.5–63.8	CC 94.0
63.9–68.8	—
68.9–73.8	CC 112.0
73.9–77.7	CC 121.0
77.8–82.5	CC 132.0
82.6–86.6	CC 143.0
86.7–91.9	CC 156.0
92.0–97.2	CC 167.0
97.3–104	CC 180.0
105–114	CC 196.0
115–123	CC 208.0
124–150	CC 219.0

Thermal Unit Table 96
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
49.5–52.0	CC 64.3
52.1–54.8	CC 68.5
54.9–58.7	CC 74.6
58.8–63.3	CC 81.5
63.4–68.3	CC 87.7
68.4–73.6	CC 94.0
73.7–79.4	—
79.5–85.5	CC 112.0
85.6–89.7	CC 121.0
89.8–94.8	CC 132.0
94.9–99.9	CC 143.0
100–105	CC 156.0
106–111	CC 167.0
112–126	CC 180.0
127–131	CC 196.0
132–141	CC 208.0
142–150	CC 219.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 103
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
40.8–45.5	B1.03
45.6–49.9	B1.16
51.0–57.5	B1.30
57.6–65.9	B1.45
66.0–73.1	B1.67
73.2–81.5	B1.88
81.6–92.3	B2.10
92.4–104	B2.40
105–114	B2.65
115–128	B3.00
129–140	B3.30
141–160	B3.70
161–193	B4.15
194–209	B4.85
210–232	B5.50
233–248	B6.25
249–266	B6.90

Thermal Unit Table 104
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number	Max. Fuse Rating (A)	
0.65–0.73	B1.03	1.50	
0.74–0.82	B1.16	1.50	
0.93–0.91	B1.30	1.60	
0.92–1.04	B1.45	2.00	
1.05–1.16	B1.67	2.00	
1.17–1.26	B1.88	2.25	
1.27–1.47	B2.10	2.60	
1.48–1.65	B2.40	3.00	
1.66–1.89	B2.65	3.50	
1.90–2.17	B3.00	4.00	
2.18–2.49	B3.30	4.50	
2.50–2.79	B3.70	5.00	
2.80–3.13	B4.15	5.60	
3.14–3.36	B4.85	6.00	
3.37–3.69	B5.50	7.00	
3.70–3.92	B6.25	7.00	
3.93–4.42	B6.90	8.00	
4.43–4.99	B7.70	9.00	
5.00–5.27	B8.20	10.0	
5.28–5.84	B9.10	12.0	
5.85–6.61	B10.2	12.0	
6.62–7.42	B11.5	15.0	
7.43–8.02	B12.8	15.0	
8.03–8.53	B14.0	15.0	
8.54–9.34	B15.5	17.5	
9.35–10.1	B17.5	17.5	
10.2–10.8	B19.5	20.0	
10.9–12.0	B22.0	25.0	
12.1–13.0	B25.0	25.0	
13.1–15.5	B28.0	30.0	
		600 V Max.	250 V Max.
15.6–17.9	B32.0	30	30
18.0–21.4	B36.0	30	40
21.5–25.1	B40.0	30	40
25.2–27.0	B45.0	30	40

Thermal Unit Table 105
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
105–112	CC 74.6
113–122	CC 81.5
123–131	CC 87.7
132–142	CC 94.0
143–153	—
154–157	CC 112.0
158–169	CC 121.0
170–181	CC 132.0
182–195	CC 143.0
196–209	CC 156.0
210–227	CC 167.0
228–247	CC 180.0
248–266	CC 196.0

Thermal Unit Table 109
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
0.56–0.63 0.64–0.68 0.69–0.77 0.78–0.85	B0.81 B0.92 B1.03 B1.16
0.86–0.97 0.98–1.09 1.10–1.21 1.22–1.33 1.34–1.53	B1.30 B1.45 B1.67 B1.88 B2.10
1.54–1.73 1.74–1.89 1.90–2.17 2.18–2.53	B2.40 B2.65 B3.00 B3.30
2.54–2.87 2.88–3.22 3.23–3.49 3.50–3.85	B3.70 B4.15 B4.85 B5.50
3.86–4.11 4.12–4.70 4.71–5.21 5.22–5.53	B6.25 B6.90 B7.70 B8.20
5.54–6.17 6.18–7.02 7.03–7.92 7.93–8.61	B9.10 B10.2 B11.5 B12.8
8.62–9.17 9.18–10.0 10.1–11.0 11.1–11.8	B14.0 B15.5 B17.5 B19.5
11.9–13.5 13.6–15.3 15.4–17.4 17.5–19.4	B22.0 B25.0 B28.0 B32.0
19.5–22.2 22.3–25.1 25.2–27.0	B36.0 B40.0 B45.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 110
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
3.94–4.45 4.46–4.97 4.98–5.28 5.29–5.97	B6.90 B7.70 B8.20 B9.10
5.98–6.89 6.90–7.92 7.93–8.71 8.72–9.27	B10.2 B11.5 B12.8 B14.0
9.28–10.2 10.3–11.4 11.5–12.3 12.4–13.9	B15.5 B17.5 B19.5 B22.0
14.0–15.8 15.9–17.9 18.0–19.9 20.0–22.8	B25.0 B28.0 B32.0 B36.0
22.9–25.4 25.5–28.9 29.0–30.8 30.9–32.5	B40.0 B45.0 B50.0 B56.0
32.6–34.9 35.0–39.7 39.8–44.7	B62.0 B70.0 B79.0

Thermal Unit Table 111
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
14.0–14.9 15.0–16.2 16.3–17.2 17.3–18.7 18.8–20.2	— CC 22.8 CC 24.6 CC 26.3 CC 28.8
20.3–21.7 21.8–23.3 23.4–25.2 25.3–27.1 27.2–29.4	CC 31.0 CC 33.3 CC 36.4 CC 39.6 CC 42.7
29.5–31.6 31.7–34.0 34.1–36.8 36.9–39.8 39.9–42.3	CC 46.6 CC 50.1 CC 54.5 CC 59.4 CC 64.3
42.4–45.7 45.8–49.2 49.3–52.8 52.9–56.8 56.9–61.2	CC 68.5 CC 74.6 CC 81.5 CC 87.7 CC 94.0
61.3–66.1 66.2–71.2 71.3–76.7 76.8–82.9 83.0–90.0	— CC 112.0 CC 121.0 CC 132.0 CC 143.0

Thermal Unit Table 112
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
44.0–46.8 46.9–50.6 50.7–54.5 54.6–58.4 58.5–62.9	CC 64.3 CC 68.5 CC 74.6 CC 81.5 CC 87.7
63.0–67.7 67.8–72.9 73.0–78.1 78.2–83.9 84.0–91.1	CC 94.0 — CC 112.0 CC 121.0 CC 132.0
91.2–97.5 97.6–104 105–113 114–133	CC 143.0 CC 156.0 CC 167.0 CC 180.0

Thermal Unit Table 113
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
88.2–95.1 95.2–101 102–111	DD 112.0 — —
112–119 120–131 132–149	— DD 150.0 DD 160.0
150–170 171–180 181–197	DD 185.0 DD 220.0 DD 240.0
198–204 205–213 214–237	DD 250.0 DD 265.0 DD 280.0
238–243 244–266	— —

Thermal Unit Table 114
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
133–148 149–174 175–195	B1.30 B1.45 B1.67
196–219 220–239 240–271	B1.88 B2.10 B2.40
272–308 309–348 349–397	B2.65 B3.00 B3.30
398–429 430–495 496–520	B3.70 B4.15 B4.85

Thermal Unit Table 115
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
176–190	DD 112.0
191–203	—
203–223	—
224–239	—
240–253	DD 150.0
254–299	DD 160.0
300–341	DD 185.0
342–361	DD 220.0
362–395	DD 240.0
396–409	DD 250.0
410–427	DD 265.0
428–475	DD 289.0
476–487	—
488–532	—

Thermal Unit Table 116
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A))	Thermal Unit Number
81.6–91.1	B1.03
91.2–101	B1.16
102–115	B1.30
116–131	B1.45
132–146	B1.67
147–163	B1.88
164–184	B2.10
185–209	B2.40
210–229	B2.65
230–257	B3.00
258–281	B3.30
282–321	B3.70
322–387	B4.15
388–419	B4.35
420–465	B5.60
466–497	B6.25
496–532	B6.90

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 127
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
1.12–1.27	B0.81
1.28–1.37	B0.92
1.38–1.55	B1.03
1.56–1.71	B1.16
1.72–1.95	B1.30
1.96–2.19	B1.45
2.20–2.43	B1.67
2.44–2.67	B1.88
2.68–3.07	B2.10
3.08–3.47	B2.40
3.48–3.79	B2.65
3.80–4.35	B3.00
4.36–5.07	B3.30
5.08–5.75	B3.70
5.76–6.45	B4.15
6.46–6.99	B4.85
7.00–7.71	B5.50
7.72–8.23	B6.25
8.24–9.41	B6.90
9.42–10.43	B7.70
10.44–11.07	B8.20
11.08–12.35	B9.10
12.36–14.05	B10.2
14.06–15.85	B11.5
15.86–17.23	B12.8
17.24–18.35	B14.0
18.36–20.1	B15.5
20.2–22.1	B17.5
22.2–23.7	B19.5
23.8–27.1	B22.0
27.2–30.7	B25.0
30.8–34.9	B28.0
35.0–38.9	B32.0
39.0–44.5	B36.0
44.6–50.3	B40.0
50.4–54.0	B45.0

Thermal Unit Table 128
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
7.88–8.91	B6.90
8.92–9.95	B7.70
9.96–10.57	B8.20
10.58–11.95	B9.10
11.96–13.79	B10.2
13.80–15.85	B11.5
15.86–17.43	B12.8
17.44–18.55	B14.0
18.56–20.5	B15.5
20.6–22.9	B17.5
23.0–24.7	B19.5
24.8–27.9	B22.0
28.0–31.7	B25.0
31.8–35.9	B28.0
36.0–39.9	B32.0
40.0–45.7	B36.0
45.8–50.9	B40.0
51.0–61.7	B45.0
61.8–65.1	B50.0
65.2–69.9	B56.0
70.0–79.5	B62.0
79.6–89.4	B70.0

Thermal Unit Table 129
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
28.0–29.9	—
30.0–32.5	CC 22.8
32.6–34.5	CC 24.6
34.6–37.5	CC 26.3
37.6–40.5	CC 28.8
40.6–43.5	CC 31.0
43.6–46.7	CC 33.3
46.8–50.5	CC 36.4
50.6–54.3	CC 39.6
54.4–58.9	CC 42.7
59.0–63.3	CC 46.6
63.4–68.1	CC 50.1
68.2–73.7	CC 54.5
73.8–79.7	CC 59.4
79.8–84.7	CC 64.5
84.8–91.5	CC 68.5
91.6–98.5	CC 74.6
98.6–105.7	CC 81.5
105.8–113.7	CC 87.7
113.8–122.5	CC 94.0
122.6–132.3	—
132.4–142.5	CC 112.0
142.6–153.5	CC 121.0
153.6–165.9	CC 132.0
166.0–180.0	CC 143.0

Thermal Unit Table 133
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
4.60–5.23	B6.90
5.24–5.86	B7.70
5.87–6.25	B8.20
6.26–7.09	B9.10
7.10–8.25	B10.2
8.26–9.49	B11.5
9.50–10.3	B12.8
10.4–11.2	B14.0
11.3–12.5	B15.5
12.6–13.8	B17.5
13.9–15.0	B19.5
15.1–16.9	B22.0
17.0–19.1	B25.0
19.2–22.0	B28.0
22.1–24.4	B32.0
24.5–28.0	B36.0
28.1–31.8	B40.0
31.9–36.0	B45.0
36.1–38.5	B50.0
38.6–41.2	B56.0
41.3–44.4	B62.0
44.5–50.3	B70.0
50.4–56.9	B79.0
57.0–59.0	B88.0

Thermal Unit Table 134
(index and instructions:page 16-135 to page 16-139)

Motor FLC (A)	Thermal Unit Number
4.30–4.98	B6.90
4.99–5.57	B7.70
5.58–5.94	B8.20
5.95–6.71	B9.10
6.72–7.79	B10.2
7.80–8.93	B11.5
8.94–9.77	B12.8
9.78–10.5	B14.0
10.6–11.7	B15.5
11.8–13.0	B17.5
13.1–14.0	B19.5
14.1–15.0	B22.0
15.1–17.2	B25.0
17.3–19.9	B28.0
20.0–22.3	B32.0
22.4–26.0	B36.0
26.1–29.8	B40.0
29.9–34.0	B45.0
34.1–36.7	B50.0
36.8–39.5	B56.0
39.6–42.1	B62.0
42.2–46.6	B70.0
46.7–51.5	B79.0
51.6–54.0	B88.0

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 135
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	3 T. U.	
0.77–0.88	0.85–0.95	B1.30
0.89–1.02	0.96–1.09	B1.45
1.03–1.19	1.10–1.21	B1.67
1.20–1.37	1.22–1.35	B1.88
1.38–1.62	1.36–1.56	B2.10
1.63–1.90	1.57–1.76	B2.40
1.91–2.12	1.77–1.94	B2.65
2.13–2.46	1.95–2.22	B3.00
2.47–2.83	2.23–2.57	B3.30
2.84–3.19	2.58–2.87	B3.70
3.20–3.61	2.88–3.21	B4.15
3.62–3.89	3.22–3.50	B4.85
3.90–4.32	3.51–3.79	B5.50
4.33–4.57	3.80–4.04	B6.25
4.58–5.19	4.05–4.53	B6.90
5.20–5.79	4.54–5.03	B7.70
5.80–6.16	5.04–5.36	B8.20
6.17–6.94	5.37–5.97	B9.10
6.95–7.99	5.98–6.89	B10.2
7.80–8.99	6.90–7.79	B11.5
9.00–9.98	7.80–8.53	B12.8
9.99–10.6	8.54–9.09	B14.0
10.7–11.6	9.10–9.99	B15.5
11.7–13.1	10.0–10.9	B17.5
13.2–14.2	11.0–11.7	B19.5
14.3–15.4	11.8–13.4	B22.0
15.5–17.6	13.5–15.4	B25.0
17.7–20.0	15.5–17.9	B28.0
–	18.0–20.0	B32.0
For Type 20 A Starter. Select Thermal Units from above.		
20.1–22.7	18.0–20.2	B32.0
22.8–25.0	20.3–23.2	B36.0
–	23.3–25.0	B40.0
For Type 25 A Starter. Select any of the Thermal Units from above.		
22.8–26.1	–	B36.0
26.2–29.6	23.3–25.8	B40.0
29.7–30.0	25.9–28.6	B45.0
For Type 30 A Starter. Select any of the Thermal Units from above.		

Thermal Unit Table 136
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T. U.	3 T. U.	
0.98–1.09	0.88–0.98	B1.30
1.10–1.24	0.99–1.13	B1.45
1.25–1.41	1.14–1.26	B1.67
1.42–1.59	1.27–1.38	B1.88
1.60–1.81	1.39–1.62	B2.10
1.82–2.04	1.63–1.82	B2.40
2.05–2.19	1.83–2.04	B2.65
2.20–2.52	2.05–2.36	B3.00
2.53–2.90	2.37–2.72	B3.30
2.91–3.29	2.73–3.07	B3.70
3.30–3.69	3.08–3.44	B4.15
3.70–3.99	3.45–3.69	B4.85
4.00–4.42	3.70–4.11	B5.50
4.43–4.69	4.12–4.34	B6.25
4.70–5.37	4.35–4.89	B6.90
5.38–5.94	4.90–5.44	B7.70
5.95–6.34	5.45–5.80	B8.20
6.35–7.05	5.81–6.47	B9.10
7.06–8.14	6.48–7.45	B10.2
8.15–9.39	7.46–8.49	B11.5
9.40–10.3	8.50–9.29	B12.8
10.4–11.1	9.30–9.99	B14.0
11.2–12.2	10.0–10.8	B15.5
12.3–13.5	10.9–12.1	B17.5
13.6–14.7	12.2–13.1	B19.5
14.8–16.1	13.2–14.6	B22.0
16.2–18.3	14.7–16.4	B25.0
18.4–20.0	16.5–18.9	B28.0
–	19.0–20.0	B32.0
For Type DPSO12 & DPSO13, 20 A Starter. Select Thermal Units from above.		
18.4–20.9	–	B28.0
21.0–23.6	19.0–20.9	B32.0
23.7–25.0	21.0–24.1	B36.0
–	24.2–25.0	B40.0
For Type DPSO22 & DPSO23, 25 A Starter. Select any of the Thermal Units from above.		
23.7–27.2	–	B36.0
27.3–30.0	24.2–27.2	B40.0
	27.3–30.0	B45.0
For Type DPSO33, 30 A Starter. Select any of the Thermal Units from above.		

Thermal Unit Table 145
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
1.00–1.11	0.91–1.02	B1.30
1.12–1.27	1.03–1.15	B1.45
1.28–1.36	1.16–1.27	B1.67
1.37–1.53	1.28–1.39	B1.88
1.54–1.78	1.40–1.61	B2.10
1.79–2.02	1.62–1.84	B2.40
2.03–2.20	1.85–2.03	B2.65
2.21–2.52	2.04–2.34	B3.00
2.53–2.94	2.35–2.69	B3.30
2.95–3.30	2.70–3.02	B3.70
3.31–3.70	3.03–3.39	B4.15
3.71–4.02	3.40–3.65	B4.85
4.03–4.46	3.66–4.04	B5.50
4.47–4.69	4.05–4.28	B6.25
4.70–5.37	4.29–4.85	B6.90
5.38–5.94	4.86–5.38	B7.70
5.95–6.34	5.39–5.71	B8.20
6.35–7.09	5.72–6.39	B9.10
7.10–8.46	6.40–7.53	B10.2
8.47–9.32	7.54–8.34	B11.5
9.33–10.2	8.35–9.14	B12.8
10.3–10.9	9.15–9.74	B14.0
11.0–12.1	9.75–10.7	B15.5
12.2–13.4	10.8–11.8	B17.5
13.5–14.2	11.9–12.2	B19.5
14.3–16.0	12.3–14.4	B22.0
16.1–18.1	14.5–16.4	B25.0
18.2–20.5	16.5–18.9	B28.0
20.6–23.5	19.0–21.3	B32.0
23.6–27.2	21.4–23.3	B36.0
27.3–30.8	23.4–27.9	B40.0
30.9–35.0	28.0–31.4	B45.0
35.1–37.2		B50.0
37.3–40.0		B56.0
For Type DPSG42 & DPSG43, 40 A Starter. Select any of the Thermal Units from above.		

Thermal Unit Table 146
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
3.90–4.22	3.60–3.89	B5.50
4.23–4.49	3.90–4.15	B6.25
4.50–5.14	4.16–4.76	B6.90
5.15–5.78	4.77–5.30	B7.70
5.79–6.23	5.31–5.70	B8.20
6.24–7.03	5.71–6.46	B9.10
7.04–8.23	6.47–7.65	B10.2
8.24–9.31	7.66–8.55	B11.5
9.32–10.1	8.56–9.36	B12.8
10.2–10.7	9.37–9.9	B14.0
10.8–11.9	10.0–10.9	B15.5
12.0–13.1	11.0–12.0	B17.5
13.2–13.9	12.1–12.8	B19.5
14.0–15.9	12.9–14.2	B22.0
16.0–18.0	14.3–16.0	B25.0
18.1–20.8	16.1–18.5	B28.0
20.9–23.1	18.6–21.2	B32.0
23.2–26.9	21.3–24.9	B36.0
27.0–31.4	25.0–28.0	B40.0
31.5–36.0	28.1–31.7	B45.0
36.1–38.8	31.8–34.6	B50.0
38.9–41.7	34.7–37.4	B56.0
41.8–46.3	37.5–40.0	B62.0
46.4–50.0	40.1–46.4	B70.0
—	46.5–50.0	B79.0
For Type DPSG52 & DPSG53, 50 A Starter. Select any of the Thermal Units from above.		

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Thermal Unit Table 147
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
1.04–1.14 1.15–1.29 1.30–1.43 1.44–1.56	0.93–1.04 1.05–1.18 1.19–1.33 1.34–1.43	B1.30 B1.45 B1.67 B1.88
1.57–1.79 1.80–2.03 2.04–2.26 2.27–2.51	1.44–1.67 1.68–1.88 1.89–2.09 2.10–2.41	B2.10 B2.40 B2.65 B3.00
2.52–3.03 3.04–3.31 3.32–3.73 3.74–4.07	2.42–2.79 2.80–3.15 3.16–3.54 3.55–3.75	B3.30 B3.70 B4.15 B4.85
4.08–4.49 4.50–4.76 4.77–5.44 5.45–6.04	3.76–4.22 4.23–4.46 4.47–5.09 5.10–5.61	B5.50 B5.25 B6.90 B7.70
6.05–6.46 6.47–7.24 7.25–8.64 8.65–9.59	5.62–5.99 6.00–6.70 6.71–8.19 8.20–8.79	B8.20 B9.10 B10.20 B11.5
9.60–10.5 10.6–11.3 11.4–12.6 12.7–13.9	8.80–9.66 9.67–10.2 10.3–11.4 11.5–12.6	B12.8 B14.0 B15.5 B17.5
14.0–14.9 15.0–16.5 16.6–18.9 19.0–22.2	12.7–13.5 13.6–15.1 15.2–17.2 17.3–19.9	B19.5 B22.0 B25.0 B28.0
22.3–24.6 24.7–28.6 28.7–32.4 32.5–37.3	20.0–22.5 22.6–26.2 26.3–29.9	B32.0 B36.0 B40.0 B45.0
37.4–39.5 39.6–40.0		B50.0 B56.0
For Type DPSO42 & DPSO43, 40 A Starter. Select any of the Thermal Units from above.		

Thermal Unit Table 148
(index and instructions: page 16-135 to page 16-139)

Motor FLC (A)		Thermal Unit Number
1 T.U.	3 T.U.	
4.14–4.45 4.46–4.88 4.89–5.44 5.45–6.08	3.70–4.09 4.10–4.35 4.36–5.07 5.08–5.79	B5.50 B6.25 B6.90 B7.70
6.09–6.42 6.43–7.28 7.29–8.42 8.43–9.64	5.80–6.27 6.28–7.16 7.17–8.58 8.59–9.55	B8.20 B9.10 B10.2 B11.5
9.65–10.4 10.5–11.2 11.3–12.3 12.4–13.7	9.56–10.2 10.3–10.9 11.0–11.9 12.0–13.1	B12.8 B14.0 B15.5 B17.5
13.8–14.8 14.9–16.5 16.6–18.7 18.8–21.4	13.2–14.0 14.1–14.8 14.9–17.0 17.1–19.6	B19.5 B22.0 B25.0 B28.0
21.5–24.3 24.4–28.0 28.1–33.3 33.4–37.6	19.7–22.1 22.2–26.0 26.1–29.4 29.5–34.0	B32.0 B36.0 B40.0 B45.0
37.7–41.1 41.2–44.1 44.2–47.8 47.9–50.0	34.1–36.4 36.5–39.2 39.3–42.4 42.5–49.3	B50.0 B56.0 B62.0 B70.0
—	49.4–50.0	B79.0
For Type DPSO52 & DPSO53, 50 A Starter. Select any of the Thermal Units from above.		

© 2025 Schneider Electric
All Rights Reserved
3/21/2025

Section 17

Contactors and Starters-IEC



TeSys island Load Management System



TeSys Deca Series 9--150 Amperes



TeSys Giga Series 115--800 Amperes



TeSys Ultra Combination Motor Controllers



Scan here to access our online digital easy motor control selectors

TeSys Selection Overview 17-2

- Solutions that enhance machine intelligence 17-2
- Two-Component Motor Circuit Solutions to 520 amps 17-4

Digital Motor Control Solution 17-5

- TeSys island Load Management System 17-5

Contactors and Overload Relays 17-8

- TeSys™ K Contactors and Overload Relays 17-8
  - TeSys™ K Non-Reversing Mini-Contactors 17-8
  - TeSys™ K Overload Relays 17-9
  - TeSys™ K Reversing Mini-Contactors 17-9
- TeSys™ Deca Series 9–150 Amperes 17-10
  - TeSys™ Deca Non-Reversing Contactors 17-10
  - TeSys™ Deca Overload Relays 17-11
  - TeSys™ Deca Reversing Contactors 17-12
- TeSys™ Giga Series 115-800 Amperes 17-13
  - TeSys™ Giga Non-Reversing Contactors 17-13
  - TeSys™ Giga Overload Relays 17-14
  - TeSys™ Giga Reversing Contactors 17-14
- TeSys™ F 780–2600 Amperes 17-15
  - TeSys™ F Non-Reversing Contactors 17-15

Contactor Accessories 17-16

- TeSys™ K Contactors 17-16
- TeSys™ Deca and F Contactors 17-17
- TeSys™ Deca Contactors 17-19
- TeSys™ Giga Contactors 17-22

Overload Relay Accessories 17-25

- TeSys™ Deca Overload Relays 17-25

Motor Starters and Protectors 17-26

- TeSys™ Ultra Combination Motor Controllers 17-26
- TeSys™ Motor Starters and Protectors 17-30
  - TeSys™ BV4 Motor Circuit Protection Selection 17-32
- TeSys™ Deca Enclosed Starters 17-35

Soft Starter Module ATSU01 17-38

- ATSU01 Altistart™ and TeSys™ Ultra 17-38

Replacement Parts 17-39

- TeSys™ Deca Series 17-39
- TeSys™ Giga Series 17-41

Wiring Systems 17-42

- TeSys™ AK5 Panel Busbar System 17-42

Dimensions 17-43

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys Control Solutions

TeSys offers solutions for a variety of common control applications, including small to large loads, motor and non-motor loads, in various forms to meet customers specific needs. Basic solutions offer traditional approaches that meet compact, cost-effective, and large HP applications. TeSys also equips OEMs and System Integrators with EcoStruxure Machine connected product solutions that are IoT ready offers to help enhance the intelligence of machinery and equipment, helping to recognize and address potential issues before stoppage and decrease unplanned downtime.

Table 17.1: Solutions that enhance machine intelligence

	Solution 1 — TeSys™ island as group motor	Solution 2 — TeSys island with individual protection	Solution 3 — TeSys Ultra (Type E self-protected) using Multi-function trip unit & communication module or using pre-trip alarm function module	Solution 4 — TeSys Tera overload relay	Solution 5 — TeSys GV4PB, GV5PB, GV6PB with SDx Module
					
Best Practice Scenario	Ideal for **panels with multiple loads**. Single bus coupler serves as connection to PLC, manages logic and configuration for starters.	Ideal for **panels with multiple loads**. Single bus coupler serves as connection to PLC, manages logic and configuration for starters.	Ideal for **panels with one or two motors**. Each starter communicates directly to PLC.	Ideal for **larger HP**. Each overload relay communicates directly to PLC.	Ideal for adding intelligence **using a simple NO/NC pre-trip alarm contact** — Use of PLC to receive/ interpret data not required.
Benefits	See load, device and system performance. Set alarms to anticipate maintenance and optimize performance.	See load, device and system performance. Set alarms to anticipate maintenance and optimize performance.	See load performance. Set alarms to anticipate maintenance and optimize performance.	See load performance. Set alarms to anticipate maintenance and optimize performance.	Pre-trip alarm NO/NC contact alerts prior to trip, enabling proactive actions to minimize downtime or alert operators
Circuit Protection	Circuit breaker or fuse protection group	Circuit breaker or fuse	TeSys Ultra (applied as Type E self protected), using advanced trip unit/ function modules	Breaker or fuse	GV4PB, GV5PB, GV6PB
Motor Control	TeSys island load management system with or without TeSys Deca Manual Motor Controllers	TeSys island load management system		TeSys Deca or Giga contactors	TeSys Deca or Giga contactor
Motor Overload Protection				TeSys Tera overload relay	(included in GV*PB)
Load Types	Motor, resistive/non-inductive, isolation	Motor, resistive/non-inductive, isolation	Motor loads only	Motor loads only	Motor loads only
Max HP 480V	40 HP	40 HP	20 HP	500 HP (up to 810 amps)	450 HP (up to 520 amps)
SCCR	basic 5 kA up to high 50 kA (with GV)	high, to 100 kA	High, to 65 kA	Depends on configuration	Depends on configuration
Available data	Device status/performance Load performance including alarms Voltage, Energy & Power	Device status/performance Load performance including alarms Voltage, Energy & Power	Load performance including alarms	Load performance including alarms Voltage & Power	Pre-trip alarm (via NO/NC contact)
Communication	Ethernet IP, Modbus TCP, Profinet, Profibus	Ethernet IP, Modbus TCP, Profinet, Profibus	Modbus™, CANopen, DeviceNet™, Profibus™	Modbus™, Profibus™, Ethernet/IP, and Modbus/ TCP	None

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 17.2: Basic — Traditional motor control solution

	Solution 1 — Two component solution		Solution 2 — Single component solution	Solution 3 — Group Motor solution	Solution 5 — Three component solution (Breaker/fuse, contactor & overload relay)	Solution 6 — Type D solution (Motor circuit protector, contactor & overload relay)	Solution 7 — Non-motor load solution (Breaker/fuse + contactor)
	Type F — up to 65 amps	Motor Protective Circuit Breakers + contactor - up to 520 amps	Type E — up to 32 amps	up to 65 amps			
							
Best Practice Scenario	Most cost effective, high SCCR solution		Most compact, also ideal for critical uptime appllcations resetable after a short-circuit with no component replacement), high SCCR solution	Few components, 480V delta rated	three-component solution, ideal for higher HPs or high SCCR	ideal for pumping applications, includes adjustable motor in rush sensitivity	ideal for non-motor loads
Benefits	Simple, two-component solution, cost effective, fast power wiring using bus bars	Simple, two-component solution, cost effective for larger HP motors	Single component solution, Type 2 rated (minimize downtime after short-circuit)	cost effective solution ideal for panels with many motor loads (single breaker for multiple starters)	basic solution, ideal for 480V delta applications, resetable after breaker trip	adjustable motor inrush sensitivity, ideal for pumping applications	ideal for non-motor loads
Circuit Protection	TeSys™ Deca GV2P, GV3P (applied as Type F with contactor)	TeSys™ Giga GV4PB, GV5PB, GV6PB (UL 489)	TeSys Ultra, with basic trip unit	PowerPact or Multi9 (UL 489) or fuses	PowerPact or Multi9 (UL 489) or TeSys DF, LS1 fuseholder, GS disconnect with fuses	TeSys BV4 (UL 489)	PowerPact or Mulit9 (UL 489) or TeSys DF, GS disconnect with fuses
Motor Control	Tesys Deca LC1D	TeSys Deca LC1D or Giga LC1G		TeSys Deca LC1D	TeSys Deca LC1D or TeSys Giga LC1G	TeSys Deca LC1D	TeSys Deca LC1D or TeSys Giga LC1G
Motor Overload Protection	(included in GV)	(included in GV)		TeSys Deca GV	TeSys Deca LR or TeSys Giga LR9G	TeSys Deca LR	—
Load Types	Motor loads only	Motor loads only	Motor loads only	Motor loads only	Motor loads only	Motor loads only	Resistive/non-inductive, isolation

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Two-Component Motor Circuit Solutions to 520 Amps

Simplify design, panel space and installation with TeSys™ high SCCR solution that use only two components that make up an entire branch circuit up to 520 amps. These two-component solutions are UL compliant using either a Type F combination motor controller rating or a UL 489 rating. For additional solutions and ratings, see Motor Control Solutions for North America data bulletin 8536DB0901.



TeSys™ Deca Series



TeSys™ Giga Series

Table 17.3: Quick selection table for TeSys™ two–component motor circuit solutions

200 V 3P		230 V 3P		460 V 3P		GV Ref	Overload Dial Range (A)	Contactor Ref *[1]*	SCCR 480Y as applied with specified protection
HP	FLA*[2]*	HP	FLA*[2]*	HP	FLA*[2]*				
—	—	—	—	1/2	1.1	GV2P06	1 to 1.6	LC1D09G7	65 kA*[3]*
—	—	—	—	3/4	1.6	GV2P06	1 to 1.6	LC1D09G7	65 kA*[3]*
1/2	2.5	1/2	2.2	1	2.1	GV2P07	1.6 to 2.5	LC1D09G7	65 kA*[3]*
—	—	—	—	1 1/2	3	GV2P08	2.5 to 4	LC1D09G7	65 kA*[3]*
3/4	3.7	3/4	3.2	2	3.4	GV2P08	2.5 to 4	LC1D09G7	65 kA*[3]*
1	4.6	1	4.2	3	4.8	GV2P10	4 to 6.3	LC1D09G7	65 kA*[3]*
—	—	1 1/2	6	—	—	GV2P10	4 to 6.3	LC1D09G7	65 kA*[3]*
1 1/2	6.9	2	6.8	—	—	GV2P14	6 to 10	LC1D12G7	65 kA*[3]*
2	7.8	—	—	5	7.6	GV2P14	6 to 10	LC1D12G7	65 kA*[3]*
—	—	3	9.6	—	—	GV2P16	9 to 14	LC1D12G7	50 kA*[4]*
3	11	—	—	7 1/2	11	GV2P16	9 to 14	LC1D18G7	50 kA*[4]*
—	—	—	—	10	14	GV2P16	9 to 14	LC1D18G7	50 kA*[4]*
5	17.5	5	15.2	—	—	GV2P20	13 to 18	LC1D18G7	50 kA*[4]*
—	—	7 1/2	22	15	21	GV2P21	17 to 23	LC1D25G7	50 kA*[4]*
7 1/2	25.3	—	—	—	—	GV2P22	20 to 25	LC1D25G7	50 kA*[4]*
—	—	10	28	20	27	GV3P32	23 to 32	LC1D32G7	65 kA*[5]*
10	32.2	—	—	25	34	GV3P40	30 to 40	LC1D40AG7	65 kA*[5]*
—	—	15	42	30	40	GV3P50	37 to 50	LC1D50AG7	65 kA*[5]*
15	48	20	54	40	52	GV3P65	48 to 65	LC1D65AG7	65 kA*[5]*
20	62.1	25	68	50	65	GV4PB115S	65 to 115	LC1D80G7	65 kA
25	78.2	30	80	60	77	GV4PB115S	65 to 115	LC1D80G7	65 kA
30	92	—	—	—	—	GV4PB115S	65 to 115	LC1D115G7	65 kA
—	—	40	104	75	96	GV5PB150S	58 to 130	LC1D115G7	65 kA
40	120	—	—	—	—	GV5PB150S	58 to 130	LC1D150G7	65 kA
—	—	50	130	100	124	GV5PB250S	114 to 217	LC1D150G7	65 kA
50	150	60	154	125	156	GV5PB250S	114 to 217	LC1G185	100 kA
60	177	75	192	150	180	GV5PB250S	114 to 217	LC1G225	100 kA
75	221	100	248	200	240	GV6PB400S	190 to 348	LC1G265	100 kA
100	285	125	312	250	302	GV6PB400S	190 to 348	LC1G330	100 kA
125	359	150	360	300	361	GV6PB600S	312 to 520	LC1G400	65 kA
150	414	200	480	400	477	GV6PB600S	312 to 520	LC1G500	65 kA
200	552	—	—	500	590	GV6PB600S	312 to 520	LC1G630	100 kA

[1] Add coil suffix to complete reference part number (See Table 17.23 **TeSys Deca Coil Voltage Codes** , page 17-10 for LC1D and Table 17.29 TeSys Giga Contactors — 3-Pole Standard Version, page 17-13 and Table 17.30 TeSys Giga Contactors — 3-Pole Advanced Version, page 17-13 for LC1F). For example, an LC1D09G7 includes a 120 Vac coil.
[2] Motor Full Load Amp Sizes are based on NEC Table 430.250.
[3] Requires use of GV1G09 or GV2GH7 line spacer for Type F rating. SCCR is 100 kA at 480Y with or without use of GV2G busbar links.
[4] Requires use of GV1G09 or GV2Gh7 line spacer for Type F rating. SCCR is 42 kA at 480Y when using GV2G busbar links.
[5] Requires use of GV3G66 line spacer and GVAM11 short-circuit signaling contact for Type F rating.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

New!

TeSys island Load Management System

TeSys island is an innovative digital load management solution—providing data for higher machine efficiency and ease of servicing, and allowing faster time to market.

TeSys island is a modular, multifunctional system providing integrated functions inside an automation architecture, primarily for the direct control and management of low-voltage loads. TeSys island can switch, help protect, and manage motors and other electrical loads up to 40 hp, 80 A installed in an electrical control Panel.

This system is designed around the concept of TeSys™ avatars.

These avatars:

- are the functional object representing a logical function of the physical module with pre-defined logic
- determine the configuration of the island.

The logical aspects of the island are managed with software tools, covering all phases of product and application lifecycle: design, engineering, commissioning, operation, and maintenance.



1	Bus Coupler	5	Power interface module
2	Analog I/O module	6	Standard Starter
3	Digital I/O module	7	SIL Starter
4	Voltage interface module	9	SIL interface module

The physical island consists of a set of devices installed on a single DIN rail controlling loads, monitoring data, diagnostics information and connected together with a ribbon cable providing the internal communication between modules.

The external communication with the automation environment is made via a single coupler module, and the island is seen as a single node on the network. The other modules include starters, power interface modules, analog and digital I/O modules, voltage interface modules, and SIL interface modules, covering a wide range of operational functions.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Product References

The TeSys island load management system consists of a bus coupler along with other starters and modules as needed to build an “island” of load management, monitoring & control functions. It is recommended to use the online EcoStruxure Motor Control Configurator to ensure proper application and sizing.

Scan the QR code to access our online EcoStruxure Motor Control Configurator



TPRBCEIP

Table 17.4: Bus Couplers

Designation	Upstream PLC protocol	Service Port protocol	Product Reference	Weight (kg)
TeSys island Bus Coupler	EtherNet/IP–Modbus TCP	Ethernet TCP/IP	TPRBCEIP	0.204
	PROFINET	Ethernet TCP/IP	TPRBCPFN	0.204
	PROFIBUS	Ethernet TCP/IP	TPRBCPFB	0.204



TPRST009

Table 17.5: 3-Pole Starters

Maximum Horsepower Ratings						Continuous Current Rating (A) UL General Purpose (A)	Product Reference	Weight (kg)
Single-Phase		Three-Phase						
115 V	230 V	200 V	230 V	460 V	575 V			
1/3	1	2	2	5	5	15	TPRST009	0.656
2	3	7 1/2	7 1/2	15	20	30	TPRST025	0.718
2	5	10	10	20	25	40	TPRST038	0.718
5	10	20	20	40	50	80	TPRST065	1.248
5	10	20	20	40	50	80	TPRST080	1.248

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


TPRS025


TPRSM001


TPRVM001


TPRDG4X2

Table 17.6: 3-Pole SIL Starters

Maximum Horsepower Ratings						Continuous Current Rating (A) UL General Purpose (A)	Product Reference	Weight (kg)
Single-Phase		Three-Phase						
115 V	230 V	200 V	230 V	460 V	575 V			
1/3	1	2	2	5	5	15	TPRSS009	0.656
2	3	7 1/2	7 1/2	15	20	30	TPRSS025	0.718
2	5	10	10	20	25	40	TPRSS038	0.718
5	10	20	20	40	50	80	TPRSS065	1.248
5	10	20	20	40	50	80	TPRSS080	1.248

Table 17.7: 3-Pole Power Interface Modules (PIM) Starters

Continuous Current Rating (A) UL General Purpose (A)	Product Reference	Weight (kg)
15	TPRPM009	0.255
40	TPRPM038	0.255
80	TPRPM080	0.425

Table 17.8: SIL Interface Module

Designation	Voltage (Vdc)	Product Reference	Weight (kg)
TeSys island SIL interface module (SIM)	24	TPRSM001	0.159

Table 17.9: Voltage Interface Module (VIM)

Designation	Phase	Voltage (V)	Frequency (Hz)	Product Reference	Weight (kg)
TeSys island Voltage interface module (SIM)	1P/3P	100 to 690	50–60	TPRVM001	0.159

Table 17.10: Digital I/O Module

Designation	Input Vdc	Output A / Vdc	Frequency (Hz)	Product Reference	Weight (kg)
TeSys island DG—Digital 4I/2O Module	24	0.5 / 24	50–60	TPRDG4X2	0.136

Table 17.11: Analog I/O Module

Designation	Inputs		Output		Product Reference	Weight (kg)
	mA dc	Vdc	mA dc	Vdc		
TeSys island—Analog 2I/2O Module	0–20	–10 to +10	0–20	–10 to +10	TPRAN2X1	0.172
	40–20	0–10	4–20	0–10		

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ K Non-Reversing Mini-Contactors



LC1K09



LP4K09

Table 17.12: Mini-Contactors with AC Operating Coils

Maximum Horsepower Ratings						Maximum Current (A)		UL General Purpose (A)	Type of Connection	Auxiliary Contacts		Catalog Number [1][2]
Single-Phase		Three-Phase				Inductive AC3	Resistive AC1					
115 V	230 V	200 V	230 V	460 V	575 V					N.O.	N.C.	
0.5	1	1.5	1.5	3	3	6	20	10	Screw-clamp	1	—	LC1K0610●●
										—	1	LC1K0601●●
0.5	1.5	2	3	5	5	9	20	20	Screw-clamp	1	—	LC1K0910●●
										—	1	LC1K0901●●
1	2	3	3	7.5	10	12	20	20	Screw-clamp	1	—	LC1K1210●●
										—	1	LC1K1201●●
4-Pole Mini Contactor												
1/2	1.5	2	3	5	5	9	20	20	Screw-clamp	4	—	LC1K09004● ●
										2	2	LC1K09008●●
1	2	3	3	7.5	10	12	20	20	Screw-clamp	4	—	LC1K12004● ●
4-Pole Mechanically Interlocked Contactors												
1/2	1.5	2	3	5	5	9	20	20	Screw-clamp	4	—	LC2K09004●●
1	2	3	3	7.5	10	12	20	20	Screw-clamp	4	—	LC2K12004●●

Table 17.13: Coil Voltage Codes for AC Contactors

Vac 50/60 Hz	24	110	120	230/240
Code	B7	F7	G7	U7

Table 17.14: Mini-Contactors with 24 Vdc Operating Coils

Maximum Horsepower Ratings						Maximum Current (A)		UL General Purpose (A)	Type of Connection	Auxiliary Contacts		Catalog Number [2]
Single-Phase		Three-Phase				Inductive AC3	Resistive AC1					
115 V	230 V	200 V	230 V	460 V	575 V					N.O.	N.C.	
0.5	1	1.5	1.5	3	3	6	20	10	Screw-clamp	1	—	LP1K0610BD
										—	1	LP1K0601BD
0.5	1.5	2	3	5	5	9	20	20	Screw-clamp	1	—	LP1K0910BD
										—	1	LP1K0901BD
1	2	3	3	7.5	10	12	20	20	Screw-clamp	1	—	LP1K1210BD
										—	1	LP1K1201BD
4-Pole Mini Contactor												
1/2	1.5	2	3	5	5	9	20	20	Screw-clamp	4	—	LP1K09004BD
										2	2	LP1K09008BD
1	2	3	3	7.5	10	12	20	20	Screw-clamp	4	—	LP1K12004BD
4-Pole Mechanically Interlocked Contactors												
1/2	1.5	2	3	5	5	9	20	20	Screw-clamp	4	—	LP2K09004BD
1	2	3	3	7.5	10	12	20	20	Screw-clamp	4	—	LP2K129004BD

Table 17.15: Mini-Contactors with Low-Consumption 24 Vdc Operating Coil (includes built-in transient suppression) [3]

Maximum Horsepower Ratings						Maximum Current (A)		UL General Purpose (A)	Type of Connection	Auxiliary Contacts		Catalog Number [2]
Single-Phase		Three-Phase				Inductive AC3	Resistive AC1					
115 V	230 V	200 V	230 V	460 V	575 V					N.O.	N.C.	
0.5	1	1.5	1.5	3	3	6	20	10	Screw-clamp	1	—	LP4K0610BW3
										—	1	LP4K0601BW3
0.5	1.5	2	3	5	5	9	20	20	Screw-clamp	1	—	LP4K0910BW3
										—	1	LP4K0901BW3
1	2	3	3	7.5	10	12	20	20	Screw-clamp	1	—	LP4K1210BW3
										—	1	LP4K1201BW3

[1] Complete the catalog number with the coil voltage from (for example LC1K0610G7).
[2] For additional terminal options and coil voltage/consumption options, see Catalog MKTED210011EN. Check with local sales office for availability.
[3] 1.8 W inrush.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ K Overload Relays



LR2K0316

Table 17.16: Overload Relays for 3-Pole Contactors with Screw-Clamp Terminals

Current Setting Range (A)	Catalog Number	
0.11 to 0.16	LR2K0301	**LR2K overload relays:** • AC or DC protection • Ambient compensated bimetallic • Class 10 • Single phase sensitivity • Manual or auto reset • Full load current dial
0.16 to 0.23	LR2K0302	
0.23 to 0.36	LR2K0303	
0.36 to 0.54	LR2K0304	
0.54 to 0.8	LR2K0305	
0.8 to 1.2	LR2K0306	
1.2 to 1.8	LR2K0307	
1.8 to 2.6	LR2K0308	
2.6 to 3.7	LR2K0310	
3.7 to 5.5	LR2K0312	
5.5 to 8	LR2K0314	
8 to 11.5	LR2K0316	
10 to 14	LR2K0321 *[4]*	

E164862
CCN NLDX
(screw terminals)

E164862
CCN NLDX2
(slip-on and solder-pin terminals)

LR43364
Class 3211 04

Accessories: page 17-16
Dimensions: page 17-58

TeSys™ K Reversing Mini-Contactors



LC2K0910



LP2K0910

Table 17.17: AC Operating Coils

Maximum Horsepower Ratings						Maximum Current (A)		Continuous Current Rating (A) UL General Purpose (A)	Type of Connection	Auxiliary Contacts		Catalog Number *[5][6]*
Single-Phase		Three-Phase				Inductive AC3	Resistive AC1			N.O.	N.C.	
115 V	230 V	200 V	230 V	460 V	575 V							
1/2	1	1.5	1.5	3	3	6	20	10	Screw-clamp	1	—	LC2K0610●●
										—	1	LC2K0601●●
1/2	1.5	2	3	5	5	9	20	20	Screw-clamp	1	—	LC2K0910●●
										—	1	LC2K0901●●
1	2	3	3	7.5	10	12	20	20	Screw-clamp	1	—	LC2K1210●●
										—	1	LC2K1201●●

Table 17.18: Coil Voltage Codes for AC Contactors

Vac 50/60 Hz	24	110	120	230/240
Code	B7	F7	G7	U7

Table 17.19: DC Operating Coils

Maximum Horsepower Ratings						Maximum Current (A)		Continuous Current Rating (A) UL General Purpose (A)	Type of Connection	Auxiliary Contacts		Catalog Number *[6]*
Single-Phase		Three-Phase				Inductive AC3	Resistive AC1			N.O.	N.C.	
115 V	230 V	200 V	230 V	460 V	575 V							
1/2	1	1.5	1.5	3	3	6	20	10	Screw-clamp	1	—	LP2K0610BD
										—	1	LP2K0601BD
1/2	1.5	2	3	5	5	9	20	20	Screw-clamp	1	—	LP2K0910BD
										—	1	LP2K0901BD
1	2	3	3	7.5	10	12	20	20	Screw-clamp	1	—	LP2K1210BD
										—	1	LP2K1201BD

Table 17.20: Coil Voltage Codes for DC Contactors
Coil with integral suppression device available. Add 3 to the code required. Example: JD3 *[7]*

Vdc	12	20	24	36	48	60	72	100	110	125	200	220	230	240	250
Code	JD	ZD	BD	CD	ED	ND	SD	KD	FD	GD	LD	MD	MPD	MUD	UD

Table 17.21: Coil Voltages for DC Contactors—Low Consumption *[8]*

Vdc	12	24	48	72
Code	JW3	BW3	EW3	SW3

Overload Relays: page 17-9
Accessories: page 17-16
Dimensions: page 17-58

[4] Not UL Listed.
[5] Complete the catalog number with the coil voltage code from Table 17.18 (for example, LC2K0610**G7**).
[6] For additional terminal options and coil options, see Catalog MKTED210011EN. Check with local sales office for availability.
[7] 3 W inrush.
[8] 1.8 W inrush.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



TeSys Deca Contactor

New!

TeSys™ Deca Non-Reversing Contactors

The TeSys™ Deca Control Series of contactors (formerly known as TeSys D) provides high reliability and performance in a modern, modular approach. TeSys Deca contactors are UL approved to 100 hp 480 V and 160 amperes continuous current. In addition, they provide a modern appearance with new features such as multi-standard screw terminals that accommodate flat, Phillips and Pozidriv screwdrivers, as well as the new UL60335 approved plastics with greater endurance in the presence of heat or fire.

Table 17.22: TeSys Deca Contactors — 3 or 4 Pole, Screw Terminal Connections

Maximum Horsepower Ratings						Maximum Current (A)		UL General Purpose (A)	No. of Poles		Instantaneous Auxiliary Contacts		Catalog Number *[9][10]*
Single-Phase		Three-Phase				Inductive AC3	Resistive AC1		N.O.	N.C.	N.O.	N.C.	
115 V	230 V	200 V	230 V	460 V	575 V								
1/3	1	2	2	5	7.5	9	20	25	3	0	1	1	LC1D09●●
—	—	—	—	—	—	—			4				LC1DT20●●
—	—	—	—	—	—	—			2	2			LC1D098●●
1/2	2	3	3	7.5	10	12	25	25	3	0	1	1	LC1D12●●
—	—	—	—	—	—	—			4				LC1DT25●●
—	—	—	—	—	—	—			2	2			LC1D128●●
1	3	5	5	10	15	18	32	32	3	0	1	1	LC1D18●●
—	—	—	—	—	—	—			4				LC1DT32●●
—	—	—	—	—	—	—			2	2			LC1D188●●
2	3	7.5	7.5	15	20	25	40	40	3	0	1	1	LC1D25●●
—	—	—	—	—	—	—			4				LC1DT40●●
—	—	—	—	—	—	—			2	2			LC1D258●●
2	5	10	10	20	25	32	50	50	3	0	1	1	LC1D32●●
2	5	10	10	20	25	38			3	0	1	1	LC1D38●●
3	5	10	10	30	30	40	60	60	3	0	1	1	LC1D40A●●
—	—	—	—	—	—	—			4		0	0	LC1DT60A●●
3	7.5	15	15	40	40	50	80	70	3	0	1	1	LC1D50A●●
5	10	20	20	40	50	65		80	3				LC1D65A●●
—	—	—	—	—	—	—			4	0	0	0	LC1DT80A●●
7.5	15	25	30	60	60	80	125	110	3	0	1	1	LC1D80●●
—	—	—	—	—	—	—			4		0	0	LC1D80004●●
—	—	—	—	—	—	—			2	2			LC1D80008●●
7.5	15	25	30	60	60	95			3	0	1	1	LC1D95●●
—	—	30	40	75	100	115	200	160	3	0	1	1	LC1D115A●●
—	—	40	50	100	125	150			3				LC1D150A●●
—	—	—	—	—	—	—			4		0	0	LC1DT200A●●

Table 17.23: TeSys Deca Coil Voltage Codes

Contactor	D09–D38	D40A-D65A	D80–D95	D115–D150
AC 50/60 Hz				
24 V	B7	B7	B7	—
110 V	F7	F7	F7	—
120 V	G7	G7*[11]*	G7	—
240 V	U7	U7	U7	—
480 V	T7	T7*[11]*	T7	—
AC/DC				
24–60 V	BNE	BNE	—	BNE
48–130 V	EHE	EHE	—	EHE
100–250 V	KUE	KUE	—	KUE
200–500 V	—	—	—	LSE
DC				
24 V	BL	BBE	BD	—

Table 17.24: Definite Purpose Ratings, 3-Phase, Breaking All Lines, 100,000 Cycles (Hermetic Refrigeration Compressor, AC-8a)

Device	FLA	LRA		
		240 V	480 V	600 V
LC1D09 (AC coil only)	9	54	45	36
LC1D12 (AC coil only)	12	72	60	48
LC1D18 (AC coil only)	18	108	90	72
LC1D25 (AC coil only)	25	150	125	100
LC1D32 (AC coil only)	32	192	160	128
LC1D40A	40	240	200	160
LC1D50A	50	300	250	200
LC1D65A	65	390	325	260
LC1D80	75	450	375	300
LC1D115	115	690	575	460
LC1D150	150	900	750	600

[9] Complete the catalog number by adding the coil voltage code from Table 17.23 **TeSys Deca Coil Voltage Codes** , page 17-10 for example, LC1D09**G7**).
[10] For additional terminal options and coil options, see Catalog MKTED210011EN. Check with local sales office for availability.
[11] Contactors LC1D40A…80A, LC1DT60A and LC1DT80A for this coil voltage are 60 Hz only.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

New! TeSys™ Deca Overload Relays



LRD07



LR9D32

Table 17.25: TeSys™ Deca Overload Relays—Ambient Compensated, Bimetallic, Direct Mounting

Current Setting Range (A)	For Direct Mounting to LC1D/LC2D...	Class 10 with Single-Phase Sensitivity	Class 10 without Single-Phase Sensitivity	Class 20 with Single-Phase Sensitivity	Class 20 without Single-Phase Sensitivity
0.10–0.16	D09–D38	LRD01	LR3D01	—	—
0.16–0.25		LRD02	LR3D02	—	—
0.25–0.40		LRD03	LR3D03	—	—
0.40–0.63		LRD04	LR3D04	—	—
0.63–1		LRD05	LR3D05	LRD05L	—
1–1.6		LRD06	LR3D06	LRD06L	—
1.6–2.5		LRD07	LR3D07	LRD07L	LR3D07L
2.5–4		LRD08	LR3D08	LRD08L	LR3D08L
4–6		LRD10	LR3D10	LRD10L	LR3D10L
5.5–8		LRD12	LR3D12	LRD12L	LR3D12L
7–10		LRD14	LR3D14	LRD14L	LR3D14L
9–13	D12–D38	LRD16	LR3D16	LRD16L	LR3D21L
12–18	D18–D38	LRD21	LR3D21	LRD21L	LR3D21L
16–24	D25–D38	LRD22	LR3D22	—	—
17–24	D25–D38	—	—	LRD22L	LR3D22L
23–32	D25–D38	LRD32	LR3D32	LRD32L	LR3D32L
30–38	D32–D38	LRD35	LR3D35	—	—
9-13	D40A–D65A	LRD313	LR3D313	LRD313L	—
12-18	D40A–D65A	LRD318	LR3D318	LRD318L	—
17-25	D40A–D65A	LRD325	LR3D325	LRD325L	—
23-32	D40A–D65A	LRD332	LR3D332	LRD332L	—
30-40	D40A–D65A	LRD340	LR3D340	LRD340L	—
37-50	D40A–D65A	LRD350	LR3D350	LRD350L	—
48-65	D40A–D65A	LRD365	LR3D365	LRD365L	—
17-25	D40–D95	LRD3322	LR3D3322	LR2D3522	LR3D3522
23-32	D40–D95 *[12]*	LRD3353	LR3D3353	LR2D3553	LR3D3553
30-40	D40–D95 *[12]*	LRD3355	LR3D3355	LR2D3555	LR3D3555
37-50	D50–D95 *[12]*	LRD3357	LR3D3357	LR2D3557	LR3D3557
48-65	D50–D95 *[12]*	LRD3359	LR3D3359	LR2D3559	LR3D3559
55–70	D65–D95	LRD3361	LR3D3361	LR2D3561	LR3D3561
63–80	D65–D95	LRD3363	LR3D3363	LR2D3563	LR3D3563
80–104	D95	LRD3365	—	—	—
80–104	D115A–D150A	LRD4365	—	—	—
95–120	D115A–D150A	LRD4367	—	—	—
110–140	D150A	LRD4369	—	—	—

Table 17.26: TeSys Deca Electronic Overload Relays 01 to 32 Amperes

Current Setting Range (A)	For Direct Mounting Beneath Contactor LC1D/LC2D	Class 5/10/20/30 Selectable
0.1–0.5	D09–D38	LR9D01
0.4–2	D09–D38	LR9D02
1.6–8	D09–D38	LR9D08
6.4–32	D09–D38	LR9D32

Table 17.27: TeSys Deca Electronic Overload Relays 60 to 150 Amperes

Current Setting Range (A)	For Direct Mounting Beneath Contactor LC1	Class 10	Class 20	Class 10/20 Selectable
60–100	D115A–D150A	LR9D5367	LR9D5567	LR9D67
90–150	D115A–D150A	LR9D5369	LR9D5569	LR9D69

TeSys Deca contactor accessories: page 17-17
TeSys Deca overload relay accessories: page 17-25
TeSys Deca replacement coils: page 17-39
Dimensions: page 17-43 to page 17-54

E164862
CCN NLDX

LR43364
Class 3211 04

[12] Direct Mount to old D2 style D40 to D65 (no Everlink terminations) and to D80 and D95 only.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

New!

TeSys™ Deca Reversing Contactors

Each 3-pole device is pre-wired with line and load side power wiring for reversing applications. Each 4-pole device is prewired with load side power wiring.

Table 17.28: TeSys Deca Mechanically-Interlocked Reversing Contactors

	Maximum Horsepower Ratings						Maximum Current (A)		UL General Purpose (A)	No. of N.O. Power Poles	Built In Auxiliary Contacts (per contactor)		Catalog Number *[13][14][15]*
	Single-Phase		Three-Phase				Inductive AC3	Resistive AC1			N.O.	N.C.	
	115 V	230 V	200 V	230 V	460 V	575 V							
 LC2D09B7	1/3	1	2	2	5	7.5	9	20	25	3	1	1	LC2D09 ●●
	1/2	2	3	3	7.5	10	12	25	25	3	1	1	LC2D12 ●●
	1	3	5	5	10	15	18	32	32	3	1	1	LC2D18 ●●
	2	3	7.5	7.5	15	20	25	40	40	3	1	1	LC2D25●●
	2	5	10	10	20	25	32	50	50	3	1	1	LC2D32●●
	2	5	10	10	20	25	38			3	1	1	LC2D38●●
	3	5	10	10	30	30	40	60	60	3	1	1	LC2D40A●●
	3	7.5	15	15	40	40	50	80	70	3	1	1	LC2D50A●●
	5	10	20	20	40	50	65		80	3	1	1	LC2D65A●●
	7.5	15	25	30	60	60	80	125	110	3	1	1	LC2D80●●
	7.5	15	25	30	60	60	95			3	1	1	LC2D95●●

E164862
CCN NLDX

LR43364
Class 3211 04

TeSys Deca contactor accessories: TeSys™ Deca and F Auxiliary Contacts, Time Delay, Mechanical Latch, page 17-17
TeSys Deca replacement coils: page 17-39
TeSys Deca dimensions: page 17-43 to page 17-54

[13] Includes mechanical interlock without electrical contacts. Installer to complete wiring for electronically interlocking contactor operating coils by using a N.C. auxiliary contact integrated in the contactor or optional LADN or LAD8N auxiliary contact block.
[14] Complete the catalog number by adding the coil voltage code from Table 17.23 **TeSys Deca Coil Voltage Codes** , page 17-10 (for example, LC2D09KUE).
[15] For additional terminal options and coil voltage/consumption options, see Catalog MKTED210011EN. Check with local sales office for availability.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



TeSys™ Giga Contactors — Standard



TeSys™ Giga Contactors — Advanced

New!

TeSys™ Giga Non-Reversing Contactors

TeSys™ Giga Series is the newest motor control range for large motor and large load applications. This new offering brings greater performance, panel design optimization, and enhanced ease of installation.

TeSys Giga contactors are available in 115 to 800 amperes in both 3-pole and 4-pole configurations. Designers can choose between the standard version and an advanced version. The advanced version provides additional features such as additional coil voltages, lower coil consumption, PLC input control, and a cable memory feature that permits maintenance without removing cables or busbar connections. For lug options, see Table 17.59 Lugs and Mounting for TeSys™ Giga Contactors and Overload Relays, page 17-22.

Table 17.29: TeSys Giga Contactors — 3-Pole Standard Version

Motor rating (hp) UL 3–phase				Continuous current (A) UL General purpose (A)	Standard version contactors AC/DC coil voltage 3-pole[16]	
200/208 V	230/240 V	460/480V	575/600 V		48–130 V	100–250 V
30	40	75	100	210	LC1G115EHEN	LC1G115KUEN
40	50	100	125	230	LC1G150EHEN	LC1G150KUEN
50	60	125	150	250	LC1G185EHEN	LC1G185KUEN
60	75	150	150	290	LC1G225EHEN	LC1G225KUEN
75	100	200	200	340	LC1G265EHEN	LC1G265KUEN
100	125	250	300	390	LC1G330EHEN	LC1G330KUEN
125	150	300	400	490	LC1G400EHEN	LC1G400KUEN
150	200	400	450	630	LC1G500EHEN	LC1G500KUEN
250	300	600	700	850	LC1G630EHEN	LC1G630KUEN
300	350	700	800	900	LC1G800EHEN	LC1G800KUEN

Table 17.30: TeSys Giga Contactors — 3-Pole Advanced Version

Motor rating (hp) UL 3–phase				Continuous current (A) UL General purpose (A)	Standard version contactors AC/DC coil voltage 3-pole[16]		
200/208 V	230/240 V	460/480 V	575/600 V		24–48 V	48–130 V	200–500 V
30	40	75	100	210	LC1G115BEEA	LC1G115EHEA	LC1G115LSEA
40	50	100	125	230	LC1G150BEEA	LC1G150EHEA	LC1G150LSEA
50	60	125	150	250	LC1G185BEEA	LC1G185EHEA	LC1G185LSEA
60	75	150	150	290	LC1G225BEEA	LC1G225EHEA	LC1G225LSEA
75	100	200	200	340	LC1G265BEEA	LC1G265EHEA	LC1G265LSEA
100	125	250	300	390	LC1G330BEEA	LC1G330EHEA	LC1G330LSEA
125	150	300	400	490	LC1G400BEEA	LC1G400EHEA	LC1G400LSEA
150	200	400	450	630	LC1G500BEEA	LC1G500EHEA	LC1G500LSEA
250	300	600	700	850	—	LC1G630EHEA	LC1G630LSEA
300	350	700	800	900	—	LC1G800EHEA	LC1G800LSEA

[16] See MKTED210011EN for 4–pole contactors and additional accessories.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



LR9G630

New!

TeSys™ Giga Overload Relays

TeSys™ Giga electronic overload relays provide wide protection flexibility in a limited number of references that cover up to 630 amperes. Alarm and status LEDs inform users in real time. Ground fault, phase imbalance, trip class (5E, 10E, 20E, 30E), and reset type can easily be configured on the device. Units can be directly mounted to the TeSys Giga contactors or can be individually wired.

Table 17.31: TeSys™ Giga 3-Pole Overload Relays

Relay setting range	For direct mounting beneath contactor LC1G	Reference
A Class 5...30 A		
28...115	LC1G115...225	LR9G115
57...225	LC1G115...225	LR9G225
125...500	LC1G265...500	LR9G500
160...630	LC1G630	LR9G630

New!

TeSys™ Giga Reversing Contactors

Components are available for customer assembly of TeSys™ Giga reversing contactors. For example, the following components must be ordered to build a reversing contactor, 200 hp at 460 V, with a 100–250 V AC/DC coil.

Table 17.32: Components Required for Building a Reversing Contactor

Description	Quantity	Reference
Contactors	2	LC1G265KUEN
Lugs	1	DZ2FJ6
Terminal Mounting	2	LA9G3612
Auxiliary Contacts	(included)	–
Power Connections	1	LA9G3761
Mechanical Interlock	1	LA9G970

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ F Non-Reversing Contactors

Table 17.33: TeSys F Contactors—3 Pole

	Maximum Three-Phase Horsepower Ratings				Maximum Current (A)		Continuous Current Rating (A) UL General Purpose (A)	Number of Poles	Catalog Number *[17] [18]*
	200 V	230 V	460 V	575 V	Inductive AC-3	Resistive AC-1			Panel Mount with Screws
 LC1F2100	350	400	900	—	1000	1000	1250	3	LC1F1000
	—	450	900	900	780	1600	1350	3	LC1F780
	Current Rated					1400	1400	3	LC1F1400
						1700	1700	3	LC1F1700
						2100	2100	3	LC1F2100

Table 17.34: TeSys F Coil Voltage Codes *[18]*


Contactor	F780*[19]*	F1000	F1400–F2100
Coil Suffix Code AC 50/60 Hz			
120 V	G7	G7	G7
Coil Part Number (Order Separately) AC 50/60 Hz			
120 V	LX1FX110	LX1FK065 *[20]*	LX1FK070 *[20]*
240 V	LX1FX220	LX1FK127 *[20]*	LX1FK127 *[20]*
480 V	LX1FX415	LX1FK240 *[20]*	LX1FK240 *[20]*
Coil Part Number (Order Separately) DC			
24 V	—	—	—

[17] Complete the catalog number by adding the coil voltage code from Table 17.34 TeSys F Coil Voltage Codes., page 17-15 (for example, LC1F265G7), or order the contactor (without a coil) and the coil separately. All coils except F780 include 1 N.O. holding circuit interlock contact. The F780 uses two coils that must be wired in series.
[18] For additional pole options and coil voltage options, see Catalog MKTED210011EN. Check with local sales office for availability.
[19] LC1F780 contactors operate with 2 coils as a set. The LX1FX• part number includes both coils.
[20] Order 2 coils and connect them in series.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



LA1KN22



LA4KE1B

E164862
CCN NLDX

LR43364
Class 3211 04

TeSys™ K Contactors

Table 17.35: Instantaneous Auxiliary Contact Blocks[1]

Clip-on front mounting, 1 block per contactor and 2 blocks per pair of mechanically interlocked contactors			
Type of connection	Auxiliary Contacts		Catalog Number
	N.O.	N.C.	
Screw clamp	2	—	LA1KN20
	—	2	LA1KN02
	1	1	LA1KN11
	4	—	LA1KN40 [2]
	3	1	LA1KN31 [2]
	2	2	LA1KN22 [2]
	1	3	LA1KN13 [2]
	—	4	LA1KN04 [2]

Table 17.36: Electronic Time Delay Auxiliary Contact Blocks

Clip-on front mounting, 1 block per contactor and 2 blocks per pair of mechanically interlocked contactors				
Voltage (V)	Type	Timing Range (S)	Contacts	Catalog Number
24–48 Vac or Vdc	On-delay	1–30	SPDT	LA2KT2E
110–240 Vac	On-delay	1–30	SPDT	LA2KT2U
NOTE: Relay outputs, with single pole double throw, 240 Vac/Vdc, 2 A max. Maximum switching capacity 250 VA / 150 W Operating temperature: –10 to + 60°C (14 to 140°F) Reset time: 1.5 s during time delay, 0.5 after time delay				

Table 17.37: Suppressor Module with Incorporated LED Indicator

Clip-on front mounting			
Voltage range	Type	Sold in lots of	Catalog Number
12–24 Vac/Vdc	Varistor	5	LA4KE1B [3]
32–48 Vac/Vdc	Varistor	5	LA4KE1E [3]
50–129 Vac/Vdc	Varistor	5	LA4KE1FC [3]
130–250 Vac/Vdc	Varistor	5	LA4KE1UG [3]
12–24 Vdc	Diode + Zener	5	LA4KC1B [4]
32–48 Vdc	Diode + Zener	5	LA4KC1E [4]
220–250 Vac	RC	5	LA4KA1U [5]

Table 17.38: Power Connectors

Description	Sold in lots of	Catalog Number
Set of 6 power connections for reversing contactors with screw-clamp terminals	100	LA9K0969

Table 17.39: Accessories for Overload Relays

Description	Type of Connection	Catalog Number
Terminal block for separate clip-on mounting of the overload relay onto 35 mm omega rail (AM1DP200)	Screw-clamp	LA7K0064

[1] For additional terminal options, see Catalog MKTED210011EN. Check with local sales office for availability.
[2] Block of 4 contacts cannot be used with LP4K or LP5K contactors.
[3] Protection by limitation of the transient voltage to 2 Uc maximum. Maximum reduction of the transient voltage peaks. Slight time delay on drop-out (1.1–1.5 times normal).
[4] No overvoltage or oscillation frequency. Polarized component. Slight time delay on drop-out (1.1–1.5 times normal).
[5] Protection by limitation of the transient voltage to 3 Uc maximum and limitation of the oscillation frequency. Slight time delay on drop-out (1.2 times normal).

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



Front Mounted Auxiliary Blocks

TeSys™ Deca and F Auxiliary Contacts, Time Delay, Mechanical Latch

Table 17.40: Standard, Instantaneous Auxiliary Contact Blocks

Snap-On Mounting	Number of Contacts	Contact Arrangement		Catalog Number *[6]*
		N.O.	N.C.	
To the front of LC●DT20–D258 (4P), LC●D09–D150 *[6]*	4 *[6]*	2	2	LADN22 *[7]*
		1	3	LADN13 *[7]*
		4	0	LADN40 *[7]*
		0	4	LADN04 *[7]*
		3	1	LADN31 *[7]*
		2	2	LADC22 *[7]* *[8]*
	2	1	1	LADN11 *[7]*
		2	0	LADN20 *[7]*
		0	2	LADN02 *[7]*
To the front of LC●D80–D150	1	1	0	LADN10 *[9]*
		0	1	LADN01 *[9]*
To the side of LC●D09 to D150	2	1	1	LAD8N11 *[10]*
		2	0	LAD8N20 *[10]*

Table 17.41: Instantaneous Blocks with Dust-Tight Auxiliary Contacts (IP54) NEMA 12

Snap-On Mounting	Standard Contacts		Dust-Tight Contacts		Catalog Number
	N.O.	N.C.	N.O.	N.C.	
To the front of LP●D40–D80, LC●DT20–D258 (4P), LC●D09 to D95	—	—	2	—	LA1DX20
	2	—	2	—	LA1DZ40
	1	1	2	—	LA1DZ31
	—	—	2	—	LA1DY20 *[11]*

Table 17.42: Pneumatic Time Delay Contact Blocks

Snap-On Mounting	Time Delay Contacts		Type	Range of Time Delay	Catalog Number *[12]*
	N.O.	N.C.			
To the front of LP●D40–D80, LC●DT20–D258 (4P), LC●D09 to D150	1	1	On energization (on delay)	0.1 to 3 s *[13]*	LADT0
				0.1 to 30 s	LADT2
				10 to 180 s	LADT4
				1 to 30 s *[14]*	LADS2
	1	1	On de-energization (off-delay)	0.1 to 3 s *[13]*	LADR0
				0.1 to 30 s	LADR2
				10 to 180 s	LADR4

Table 17.43: Mechanical Latch Blocks with Manual or Electrical Unlatch (TeSys™ Deca only)

Front snap-on mounting onto	Application	Catalog Number *[15]*
LC●D09 to D65A LC1D80 to D95	For silent operation and energy conservation	LAD6K10 *[16]*[17]
LC1D115A to D150A, DT200A	For silent operation and energy conservation	LA6DK20 *[16]*

Table 17.44: Coil Voltage Codes for LAD6K/LA6DK Mechanical Latch Blocks

Volts	24	110/127	220/240
AC or DC	B	F	M


TeSys Deca contactors: TeSys™ Deca Non-Reversing Contactors, page 17-10 and TeSys™ Deca Reversing Contactors, page 17-12
TeSys Deca overload relay accessories: TeSys Deca Overload Relay Accessories, page 17-25
TeSys Deca replacement coils: page 17-39
TeSys Deca dimensions: page 17-43 to page 17-54

E164862
CCN NLDX

LR43364
Class 3211 04

[6] For low consumption coils (LC1D09–D38 only), only one front-mounted two-contact block allowed. No side-mounted contact blocks allowed.
[7] For snap-in terminal versions of these blocks, add an **A** to the end of the catalog number (for example, LADN22**A**). For slip-on versions, add **9** to the end of the catalog number (for example, LADN22**9**).
[8] Including 1 N.O. + 1 N.C. make-before break overlapping contacts.
[9] This block cannot be added to the LC1D 09–D38 contactors; a maximum of 2 blocks can be mounted on the LC1D40A-LC1/LP1D80 contactors only.
[10] 1 block may be added to the left side of LC1D09–D38, AC coils only; only 1 block may be added to either side of the LC1D40A-D80 contactors, AC coils only. Cannot be installed on TeSys Deca contactors with DC coils.
[11] Device supplied with 4 ground terminal points.
[12] For spring terminal versions of these blocks, add a **3** to the end of the catalog number (for example, LADT2**3**).
[13] Scale range is expanded between 0.1 and 0.6 seconds on the dial for more accurate settings at the lower end of the range.
[14] Switching time between the opening of the N.C. contact and the closing of the N.O. contact: 40 ms ± 15 ms .
[15] To complete the catalog number, add the coil voltage code from Table 17.44. For additional voltage options, see Catalog MKTED210011EN. Check with local sales office for availability.
[16] Does not include internal coil clearing contact.
[17] Low consumption DC contactors (and relays) (code coil ●L) are not compatible with the LAD6K10● mechanical latching blocks.


© 2026 Schneider Electric
All Rights Reserved
2/17/2026


LA9D3260


LA9D80962


LA9D2561


LA9D11567


LA9D511

TeSys™ Deca Accessories[18]

Table 17.45: For Power Pole or Control Connection

Description			For use with contactors LC1/LP1	Sold in lots of	Catalog Number
Connectors for larger cable sizes	3 poles	#4 AWG (25 mm²)	D09–D38	1	LA9D3260
Everlink™ terminal block	3 poles		D40A–D80A	1	LAD96560
			D115A–D150A	1	LAD91503A
	4 pole		DT200A	1	LAD91154A
Links for the parallel connection of:	3 poles (wye-delta shorting strap)		D09–D38	10	LAD9P3
			D40A–D65A	1	LAD9P33
			D80, D95	1	LA9D80962
Control circuit take-off from main pole			D80, D95	10	LA9D8067
			D115A, D150A	10	LA9D11567
Plunger (fire pump accessory)			D09–150	—	LAD9FP3

Table 17.46: For Marking

Description		For use with contactors LC1/LP1	Sold in lots of	Catalog Number
Reference label holder	Snap-on, 8 x 22 mm	D115A–D150A, DT200A	100	LA9D92
	Snap-on, 8 x 18 mm, 3 poles	D09–D65A, DT20–DT80A, LADN, LADT, LADR	100	LAD90
Sheet of 300 labels self adhesive, 7 x 21 mm		For holder LA9D92	1	LA9D93

Table 17.47: For Mounting

Description	For use with contactors LC1/LP1	Sold in lots of	Catalog Number
Set of shims for mounting LAD8N and LA8DN	D80–D95	1	LA9D511
Retrofit plate for replacing LC1D40–D65 with LC1D40A–D65A	D40A–D65A	1	LAD7X3
Retrofit plate for replacing LC1D115 or D150 with LC1D115A or D150A	D115A–D150A	1	LAD9150RFB1
Retrofit plate for replacing LC2D115 or D150 with LC1D115A or D150A	D115A–D150A	1	LAD9150RFB2
Retrofit terminals for connection to upstream and downstream busbars	LC1D1156 or D1506 to LC1D115A6 or D150A6	1	LAD9150RFT
35 mm DIN Rail — 2 m	LC1D09–D80	10	AM1DP200

TeSys Deca contactors: page 17-10 and TeSys™ Deca Reversing Contactors, page 17-12
TeSys Deca overload relay accessories: TeSys Deca Overload Relay Accessories, page 17-25
TeSys Deca contactor accessories: TeSys™ Deca and F Auxiliary Contacts, Time Delay, Mechanical Latch, page 17-17
TeSys Deca replacement coils: page 17-39
TeSys Deca dimensions: page 17-43 to page 17-54
TeSys F contactors: page 17-15
TeSys F replacement coils: Table 17.110 TeSys™ F—AC Coils (For LC1F115, F150, F185, F225, F265, F330, F400, F500, F630, F780, F800, and F1400–F2100), page 17-39

[18] For additional accessory and replacement part options, see Catalog MKTED210011EN. Check with local sales office for availability.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Replacement Control Module


- Wide band electronic coils
- Accessible for quick and easy replacement

Table 17.48: Replacement Control Module

For contactors		Operating Voltage Vac (50/60 Hz or DC control input)			
		24–60 Vac	48–130 Vac	100–250 Vac	200–500 Vac
3-pole	LC1D115A–D150A	LX1D83BNE	LX1D83EHE	LX1D83KUE	LX1D83LSE
4-pole	LC1DT200A	LX1D84BNE	LX1D84EHE	LX1D84KUE	LX1D84LSE

RC and Varistor Coil Suppressors

RC Coil Suppressor

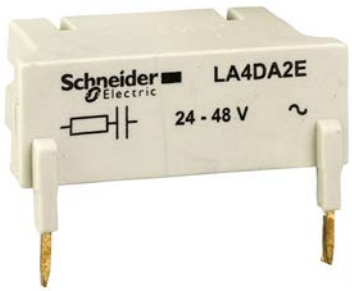

LA4DA2E

- Limitation of transient voltage to 300% of nominal voltage maximum.
- Oscillating frequency limited to 400 Hz maximum. Slight increase in drop-out time (1.2–2 times normal).

Table 17.49: Resistor/Capacitor Circuit (RC) for Reduction of Electrical Noise in AC Contactor Coils

Installed by	Mounting on	Operating Voltage 50/60 Hz	Catalog Number
Snapping into the cavity on the right side without tools *[19]*	LC●D09–D38 (3P), LC1DT20–DT40 (4P)	24–28 Vac	LAD4RCE
		50–127 Vac	LAD4RCG
		110–240 Vac	LAD4RCU
Snap-on mounting, and connection without tools to the contactor coil terminals	LC1D40A–65A (3P), LC1DT60A–DT80A (4P)	24-48 Vac	LAD4RC3E
		50–127 Vac	LAD4RC3G
		110–240 Vac	LAD4RC3U
		380–415 Vac	LAD4RC3N
Screw connection to the contactor coil terminals	LC●D80 (3P), LC1D80 (4P)	24–48 Vac	LA4DA2E
		50–127 Vac	LA4DA2G
		110–240 Vac	LA4DA2U
		380–415 Vac	LA4DA2N

Varistor Coil Suppressor *[20]*

- Limitation of transient voltage value to 200% of nominal voltage maximum.
- Maximum reduction of transient voltage peaks. Slight increase in drop-out time (1.1–1.5 times normal).

Table 17.50: Varistor (Peak Limiting) for Reduction of Electrical Noise in AC Contactor Coils

Installed by	Mounting on	Operating Voltage	Catalog Number
Snapping into the cavity on the right side without tools *[19]*	LC●D09–D38 (3P), LC1DT20–DT40 (4P)	24–48 Vac	LAD4VE
		110–250 Vac	LAD4VU
Snap-on mounting, and connection without tools to the contactor coil terminals	LC1D40A–D65A (3P), LC1DT60A–DT80A (4P)	24–48 Vac/Vdc	LAD4V3E
		110–250 Vac/Vdc	LAD4V3U
Screw connection to the contactor coil terminals	LC●D80 (3P) LC1D80 (4P)	24–48 Vac	LA4DE2E
		110–250 Vac	LA4DE2U
Screw connection to the contactor coil terminals	LC●D80–D95 (3P) LC1D80 (4P)	24–48 Vdc	LA4DE3E
		110–250 Vdc	LA4DE3U

Diode Coil Suppressor


LAD4DDL

- No overvoltage or oscillating frequency.
- Polarized component. Increased drop-out time (6–10 times normal).

Table 17.51: Diode for Reduction of Electrical Noise in DC Contactor Coils

Installed on the upper part by	Mounting on	Operating Voltage, DC	Catalog Number
Snap-on mounting and connection w/o tools to the contactor coil terminals	LC●D09 to D38 (3P), LC1DT20 to DT40 (4P)	24–250 Vdc	LAD4DDL
Clip-on front mounting	LC●D40A to D65A (3P), LC1DT60A to DT80A (4P)	24–250 Vdc	LAD4D3U
Screw connection of wire to the contactor coil terminals	LC●D80 to D95 (3P), LC1D80 (4P)	24–250 Vdc	LA4DC3U

[19] Installing the suppressor into the cavity makes the electrical connection. Overall width of the contactor remains the same.
[20] For additional accessory and replacement part options, see Catalog MKTED210011EN. Check with local sales office for availability.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Bidirectional Diode Coil Suppressor

- Protection provided by limiting the transient voltage to 2 Uc max.
- Maximum reduction of transient voltage peaks

Table 17.52: Bidirectional Peak Limiting Diode *[21]*

Installed by	Mounting on	Operating Voltage		Catalog Number
		Vac (50/60 Hz)	Vdc	
Snapping into the cavity on the right side of the contactor *[22]*	LC●D09–D38 (3P) *[23]* LC1DT20–DT40 (4P)	24	—	LAD4TB
		—	24	LAD4TBDL
Clip-on front mounting and connection without tools to the contactor coil terminals *[23]*	LC●D40A–D65A (3P), LC1DT60A–DT80A (4P)	12–24	12–24	LAD4T3B
Screw mounting *[24]*	LC●D80–D95 (3P), LC1D80 (4P)	—	24	LA4DB3B



LAD4T3B

Table 17.53: Cabling Accessories *[21]*

Usage	Mounting on	Operating Voltage 50/60 Hz		Catalog Number
For adapting existing wiring to a new product or for use with top-mounting accessory.	LC1D09–D38	Without coil suppression		LAD4BB
		With coil suppression (varistor)	24–48 Vac	LAD4BBVE
			50–127 Vac	LAD4BBVG
For adapting existing wiring to a new product or for use with top-mounting accessory	LC1D40A–D65A	Without coil suppression		LAD4BB3



LAD4BBVE

TeSys Deca contactors: TeSys™ Deca Non-Reversing Contactors, page 17-10, TeSys™ Deca Reversing Contactors, page 17-12
TeSys Deca contactor accessories: TeSys™ Deca and F Auxiliary Contacts, Time Delay, Mechanical Latch, page 17-17
TeSys Deca overload relay accessories: TeSys Deca Overload Relay Accessories, page 17-25
TeSys Deca replacement coils and parts: page 17-39
TeSys Deca dimensions: page 17-43 to TeSys™ Deca Thermal Overload Relay Dimensions, page 17-54

TeSys™ Deca Electronic Timers and Interface Modules

The following accessories require use of cabling accessories (LAD4BB●●) for proper mounting. See page 17-20 for illustration.

Table 17.54: Electronic Serial Timer Modules

Type	Operational Voltage *[25]*		Time Delay	Catalog Number
	24–250 Vac	100–250 Vac		
On-delay	LC1D09–D65A	LC1D80–D150A	0.1–2 s	LA4DT0U
			1.5–30 s	LA4DT2U
			25–500 s	LA4DT4U



LA4DFB

Table 17.55: Interface Modules *[21]*

Interface Type *[26]*	Operational Voltage		Input Voltage	Catalog Number
	24–250 Vac	100–250 Vac		
Relay	LC1D09–D150	—	24 Vdc	LA4DFB
Solid State	LC1D09–D65A	LC1D80–D115	24 Vdc	LA4DWB



LAD9ET1S



LADN22S



LU9ET1S

Table 17.56: TeSys™ Safety-Chain Identification System



Description	Compatibility	Package Qty	Catalog Number
Red retrofit contactor safety cover	LC1D09–D65A, CAD32, CAD50	10	LAD9ET1S
	LC1D80	1	LAD9ET3S
	LC1D115A, D150A, LC1DT200A	1	LAD9ETSS
Red auxiliary contact block, 2 N.O. + 2 N.C.	LC1D09–D150, CAD32, CAD50	1	LADN22S

[21] For additional voltage and accessory options, see Catalog MKTED210011EN. Check with local sales office for availability.
[22] Installing the suppressor into the cavity makes the electrical connection. Overall width of the contactor remains the same.
[23] For LC•D09–LC•D65A with DC or low consumption DC coils, 3–pole contactors are fitted wit built-in bidirectional diode suppression as standard.
[24] Mounting at the top of the contactor on coil terminals A1 and A2.
[25] For 24 V operation, the contactor must be fitted with a 21 V coil: coil voltage code Z5 for 50 Hz; Z6 for 60 Hz; and ZD for DC.
[26] Adapter required for D09–D65A, see .

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca Reversing Contactors

Table 17.57: Components and Kits for Reversing Assemblies *[27]*

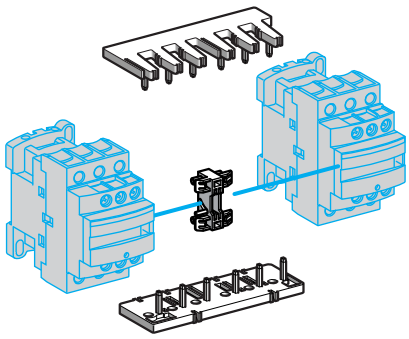	Description	For contactor (2 identical contactors)	Part Number
Kits for Assembly of Reversing Contactors			
 LAD 9R1	Kit comprising of: • Mechanical interlock • Electrical wiring links • Power wiring links	LC1 D09 to D38	LAD9R1V
		LC1 DT20 to DT40	LADT9R1V
 LA9 D8069	Kit comprising of: • Mechanical interlock • Power wiring links	LC1 D09 to D38	LAD9R1
		LC1 D40A to D65A	LAD9R3

	For Contactor (2 Identical Contactors)	Mechanical Interlock	Mechanical Interlock with Integral Electrical Interlocking	Reversing Power Links (Parallel and Reverser)
Components for Assembly of Reversing Contactors				
	LC1 D40A to D65A	LAD4CM	—	LA9D65A69
	LC1 D80 to D95 (AC coil)	LA9D50978	LA9D4002	LA9D8069
	LC1 D80 to D95 (DC coil)	LA9D80978	LA9D8002	LA9D8069
	LC1D115A to D150A	LAD5CM	—	LAD9150369

TeSys Deca contactors: TeSys™ Deca Non-Reversing Contactors, page 17-10 and TeSys™ Deca Reversing Contactors, page 17-12
TeSys Deca contactor accessories: TeSys™ Deca and F Auxiliary Contacts, Time Delay, Mechanical Latch, page 17-17
TeSys Deca replacement coils and parts: page 17-39
TeSys Deca dimensions: page 17-43 to page 17-54

New!

Deca Flexible Terminal Extensions

Flexible connecting bars to connect TeSys™ Deca contactors with Overload Relays and MCCBs mounted in the same plane and orientation. The bars help to get a quick and easy connection between contactor and overload or contactor and MCCB while saving installation time.

Table 17.58: Deca Flexible Terminal Extensions 3-Pole

For Contactor	To connect with	Quantity Set of	Catalog Number
LC1D115A...LC1D150A	PowerPact H-J Frame 3-pole, GV5PB	3	LAD91503111
LC1D115A...LC1D150A	LR9G115...LR9G225	3	LAD91503211

[27] For additional reversing accessory options, see Catalog MKTED210011EN. Check with local sales office for availability.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Lugs and Mounting

Table 17.59: Lugs and Mounting for TeSys™ Giga Contactors and Overload Relays *[28]*

							
Reference	DZ2FG1 (includes 1 lug, (6 required))	DZ2FH1 (includes 1 lug, (6 required))		DZ2FJ1 (includes 1 lug, (6 required))	DZ2FK1 (includes 1 lug, (6 required))		DZ2FL6 (includes 6 lugs)
Rating	200	275		400	630		800
Wire range	6 to 3/0 AWG	6 to 300 MCM		4 to 500 MCM	2 to 600 MCM		2 to 600 MCM
For use with LC1	G115, G225	G115, G225	G265, G330, G400, G500	G265, G330, G400, G500	G265, G330, G400, G500	G630, G800	G630, G800
For use with LR9	G115, G225	G115, G225	G500	G500	G500	G630	G630
Straight terminal extension mounting kit	LA9G3601, LA9G4601	LA9G3601, LA9G4601	LA9G3602, LA9G4602	N/A	N/A	N/A	N/A
Spreader bars mounting kit	LA9G3611, LA9G4611, LA9G3711, LA9G4711	LA9G3611, LA9G4611, LA9G3711, LA9G4711	LA9G3612, LA9G4612, LA9G3712, LA9G4712	LA9G3612, LA9G4612, LA9G3712, LA9G4712	LA9G3612, LA9G4612, LA9G3712, LA9G4712	LA9G3714, LA9G4714	LA9G3714, LA9G4714
NOTE: A compatible mounting kit is required.							

					
Reference	AL400L61K3 (includes 3 lugs)		AL600LS52K3 (includes 3 lugs)	AI800M23K (includes 3 lugs)	AI800P6K (includes 3 lugs)
Rating (A)	400		400/600	800	800
Wire range	2 to 500 MCM (AL) 2 to 600 MCM (CU)		2/0 to 500 MCM (AL or CU)	3/0 to 500 MCM (AL or CU)	3/0 to 600 MCM (AL or CU)
For use with LC1	G115, G225	G265, G330 G400, G500	G265, G330 G400, G500	G630, G800	G630, G800
For use with LR9	G115, G225	G500	G500	G630	G630
Straight terminal extension mounting kit	LA9G3601, LA9G4601	N/A	N/A	N/A	N/A
Spreader bars mounting kit	LA9G3711, LA9G4711	LA9G3612, LA9G4612, LA9G3712,LA9G4712	LA9G3612, LA9G4612, LA9G3712,LA9G4712	LA9G3714, LA9G4714	LA9G3714, LA9G4714
NOTE: A compatible mounting kit is required.					

LA9G3601 Straight Bar



LA9G3611 Spreader Bar




LA9G3711 Spreader Bar



[28] See MKTED210011EN for additional accessories.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



LA9G3111

Giga Flexible Terminal Extensions

Flexible connecting bars to connect TeSys Giga High power contactors with MCCBs mounted in the same plane and orientation. These bars can be used along with Advanced or Standard version contactors. They help to get a quick and easy connection between contactor and MCCB with saving in installation time.

Table 17.60: Giga Flexible Terminal Extensions for MCCBs

Description	Compatible with Contactors	To connect with PowerPacT™ MCCB	Quantity Set of	Reference
Flexible terminal extensions 3–pole	LC1G115...LC1G225	H-J Frame 3P, GV5PB	3	LA9G3111
	LC1G265...LC1G500	L Frame 3P, GV6PB	3	LA9G3112
	LC1G630...LC1G800	P Frame 3P	3	LA9G3113



LAG8N113

Auxiliary Contact Modules

Auxiliary contacts give an indication of the contactor status. They can be used for remote visual signaling, alarming, electrical locking, relay activation, and others.

Each contactor is equipped with 1 NO (normally open) and 1 NC (normally closed) auxiliary contact block as standard.

Mechanically linked mirror contacts

The NC (normally closed) contact of the auxiliary contact block is a mirror contact in conformity to IEC 60947–5–1. It is mechanically linked to reliably represent the state of the main power contacts and wherever auxiliary contact state reliability is essential.

The NC contact of the auxiliary contact cannot be closed at the same time as a normally open power contact.

Contact module compatibility

TeSys™ Giga auxiliary contact module is compatible with a range of TeSys Giga contactors. Each TeSys Giga contactor can be equipped with up to four auxiliary contact modules.

Table 17.61: Electrical Characteristics

Characteristics	
Rated thermal current (A)	10
Minimum load	1 mA at 17 V DC
Contact reliability	Failure rate <10

Type of connections:

- Push-In

Table 17.62: Auxiliary Contact Modules

Description	Terminal type	Types of contacts	Sold in lots of	Reference
Auxiliary contact module	Push-In	1 NO + 1 NC	1	LAG8N113P*[29]*
		2 NO	1	LAG8N203P

Connection Kits and Mechanical Interlock

Table 17.63: Star-Delta (Wye Delta) Connection Kits

Description	Suitable for:	For Line/Delta contactor	+ Star contactor	Reference
Connection kit: bars for Line/Delta Star contactor assembly	3-pole	LC1G115/LC1G225	LC1G115/LC1G225	LA9GQQ330
		LC1G265/LC1G500	LC1G115/LC1G225	LA9GSQ330
		LC1G265/LC1G500	LC1G265/LC1G500	LA9GSS330
		LC1G630/LC1G800	LC1G265/LC1G500	LA9GTS330
		LC1G630/LC1G800	LC1G630/LC1G800	LA9GTT330
	3-pole (with cable memory kit)	LC1G265/LC1G500	LC1G115/LC1G225	LA9GSQ331
		LC1G630/LC1G800	LC1G265/LC1G500	LA9GTS331

NOTE: RE17RMMWS timer to be used for Star-Delta starter application.



Table 17.64: Reverser Connection Kits

Description	Suitable for:	Compatible with contactors	Reference
Connection kit: bars for reverser contactor assembly	3-pole	LC1G115/LC1G225	LA9G3760
		LC1G265/LC1G500	LA9G3761
		LC1G630/LC1G800	LA9G3762




Table 17.65: Changeover Connection Kits

Description	Suitable for:	Compatible with contactors	Reference
Connection kit: bars for changeover contactor assembly	3-pole	LC1G115/LC1G225	LA9G3750
		LC1G265/LC1G500	LA9G3751
		LC1G630/LC1G800	LA9G3752
	4-pole	LC1G115/LC1G225	LA9G4750
		LC1G265/LC1G500	LA9G4751
		LC1G630/LC1G800	LA9G4752

[29] Always supplied with TeSys™ Giga LC1G contactors (fitted to the right side lateral face).

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



Table 17.66: Mechanical Interlock

Description		Reference
Mechanical Interlock (between the same frame sizes)	LC1G115 to 225 (3-Pole and 4-Pole)	LA9G970
	LC1G265 to 500 (3-Pole and 4-Pole)	
	LC1G630 to 800 (3-Pole)	LA9G973
Mechanical Interlock (between different frame sizes)	LC1G265 to 500 and LC1G115 to 225 (3-Pole and 4-Pole)	LA9G971
	LC1G630 to 800 and LC1G265 to 500 (3-Pole)	LA9G972

Retrofit Bases

- Suitable for 3–pole contactors
- Retrofit bases to replace similar ratings of TeSys™ F contactors with TeSys™ Giga contactors
- Enables quick and simple replacement in the existing installation
- Two references to cover ranges from LC1F115 to F500

TeSys™ Giga retrofit bases are designed for integrating new TeSys™ Giga contactors into installations using TeSys F™ contactors. The retrofit bases help reduce replacement and reinstallation time when you upgrade your system with the new range of contactors. The retrofit bases come in two frame sizes.



LA9GRFB1



LA9GRFB2

Table 17.67: Retrofit Bases

Description		Reference
Accessory used to replace TeSys™	LC1F115–225 replaced by LC1G115–225	LA9GRFB1
	LC1F265–500 replaced by LC1G265–500	LA9GRFB2
	LC1F630–800 replaced by LC1G630–800	LA9GRFB3*[30]*

Remote Wear Diagnostic (RWD) Module

Table 17.68: Remote Wear Diagnostic (RWD) Module

Description	Reference
Remote wear diagnostic module for TeSys™ Giga contactor - 1 NO	LA9GRD10*[31]*
Remote wear diagnostic module for TeSys™ Giga contactor - 1 NC	LA9GRD01



LA9DRD10

TeSys™ F Contactors

Table 17.69: Lugs for TeSys F Contactors

Contactor Type LC1	Cable Size AWG Range	Lug Kit*[32]* (Quantity of 6)	Individual Lug (Quantity of 1)
F780	4 x 1/0 to 750 MCM	DZ2FX6	—

[30] Available 2Q 2022.
[31] Remote wear diagnostic (RWD) module can be installed and used only in the Advanced contactor version.
[32] For additional options and accessories, see MKTED210011EN.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



LA7D901



LA7D03



LAD7305

TeSys Deca Overload Relay Accessories

Table 17.70: Mounting Kits and Plates[1]

Description	For use with overload relays:	Cat. No.
Separate mounting kits for mounting to 35 mm DIN rail or for panel mounting with screws	LRD01–35 and LR3D01–35	LAD7B10
	LRD01–35 and LRD01–35 for ring tongue terminals	LAD7B106
	LRD04L—32L, LR3D04L–32L, and LR9D01–32	LAD7B205
	LRD3●●●, LR3D3●●●, LR2D35●●	LAD96560

Table 17.71: Accessories

Description	For use with	Standard Package	Catalog Number
Prewiring kit allows direct connection of the N.C. contact of relay LRD01–D32 or LR3D01–D32 to the contactor	LC1D09 to D18	10	LAD7C1
	LC1D25 to D38	10	LAD7C2
Remote stop/tripping or electrical reset [2]	All relays except LRD01–D32	1	LAD703 [3]
Reset by flexible cable 500 mm (19.6 in.)	LRD01-D32, LRD3, LR3D3	1	LAD7305

Table 17.72: Control Circuit Voltages for LA7D03 and LAD703

Volts	24	110
AC 50/60 Hz	B	F
DC	B	F

TeSys™ Giga Overload Relay Accessories

Table 17.73: Remote Reset Control Device


Description	Sold in lots of:	Reference
Remote Reset control function by flexible cable (length = 0.5m)	1	LAD7305

[1] When using mounting plates, separate mounting kits are also required.
[2] The time that the LA7D03 can remain energized depends on its rest time; 1s pulse duration with 29s rest time; 3s pulse duration with 90s rest time; maximum pulse duration of 5s with rest time of 300s.
[3] Part number to be completed by adding coil voltage code, (for example, LAD703F).

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Ultra Motor Starter

The TeSys Ultra motor starter is integrated, making it simple to choose and install. It consists of a control unit snapped in a power base. TeSys Ultra can be configured to fit specific applications as well. Optional accessories include a reverser, a current limiter, predictive maintenance options, and communication options.
For detailed information about TeSys Ultra, visit our website.

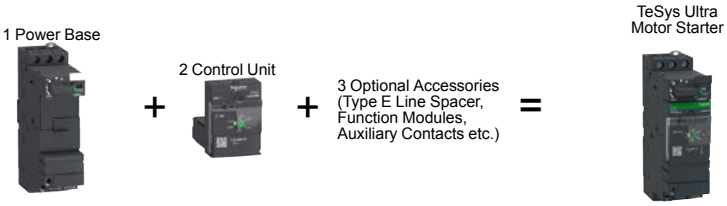


Power Base LUB12


Power Base LUB120


Control Unit

Selecting TeSys™ Ultra Motor Starters in Three Steps

Table 17.74: Step 1. Select Power Base (Only two different bases up to 32 A)

Control Connection	Max. Current (A)	Maximum Horsepower Ratings						Self-Protected Starter Base
		Three-Phase				Single-Phase		
		200 V	230 V	460 V	575 V	115 V	230 V	Catalog Number
With non-removable screw terminations	12	3	3	7.5	10	0.5	2	LUB12
	32	10	10	20	25	2	5	LUB32
Without screw terminations	12	3	3	7.5	10	0.5	2	LUB120 *[1]*
	32	10	10	20	25	2	5	LUB320 *[1]*

Table 17.75: Step 2. Select Control Unit *[2]*

Setting Range (A)	Standard 3-phase Class 10 trip *[3]*	Advanced 3-phase Class 10 trip *[3]*	Advanced single-phase Class 10 trip *[3]*	Advanced 3-phase Class 20 trip *[3]*
0.15–0.6	LUCAX6●●	LUCBX6●●	LUCCX6●●	LUCDX6●●
0.3–1.4	LUCA1X●●	LUCB1X●●	LUCC1X●●	LUCD1X●●
1.25–5.0	LUCA05●●	LUCB05●●	LUCC05●●	LUCD05●●
3–12	LUCA12●●	LUCB12●●	LUCC12●●	LUCD12●●
4.5–18	LUCA18●●	LUCB18●●	LUCC18●●	LUCD18●●
8–32	LUCA32●●	LUCB32●●	LUCC32●●	LUCD32●●

Table 17.76: Voltage Codes

Volts	24	110–240
DC	BL *[4]*	—
AC	B	—
DC or AC	—	FU

Table 17.77: Step 3. Select Auxiliary Contacts (optional)

	Terminals	Contact Indicates	Contact Normal Status	Contact State for Each Mode *[5]*						Catalog Number
				Off	Ready	Run	Short Circuit Trip	Overload Trip (Manual Reset)	Overload Trip (Remote/Auto Reset) *[6]*	
	Auxiliary Contact Blocks									
	Screw	Ready condition	N.O.	O	I	I	O	O	I	LUA1C11
		Fault condition	N.C.	I	I	I	O	O	I	
	Screw	Ready condition	N.O.	O	I	I	O	O	I	LUA1C20
		Fault condition	N.O.	O	O	O	I	I	O	
	Auxiliary Contact Function Modules									
	Screw	Pole state	2 N.O.	O	O	I	O	O		LUFN20
	Screw	Pole state	1 N.O. and 1 N.C.	O I	O I	I O	O I	O I		LUFN11
	Screw	Pole state	2 N.C.	1	I	O	I	I		LUFN02

Auxiliary Contact

Table 17.78: Accessories

Accessory	Quick Description	For details & selection, see:
Current limiter	Increases the breaking capacity to 130 kA @ 460 V and to 65 kA @ 575 V	page 17-28
Reverser	Stacked or side mounted (LU6MB0●●● only)	page 17-28
Line phase barrier	Required for use as a self-protected combination starter (UL 508 Type E)	page 17-28
Multifunction control unit	Has functions for monitoring and predictive maintenance	page 17-28
Function modules	Fault differentiation, thermal overload, motor load indication	page 17-28
Communication modules	Integrates into existing networks, major protocols are available	page 17-29
Soft starter + TeSys Ultra	Use Altistart U01soft starter with TeSys Ultra	page 17-38
Powerbus	Use TeSys Ultra with a prewired system	page 17-29
Configuration and connection accessories	SoMove software, bus bar, external handle	page 17-29

E164862
CCN NLDX

LR43364
Class 3211 04

Accessories: Power Base and Plug-in Accessories, page 17-27 to page 17-29
Dimensions: TeSys™ Ultra Starter Dimensions, page 17-59
Overload Relays: page 17-9
Accessories: page 17-16
Dimensions: page 17-58

[1] For use with reversing modules or communication modules with prewired connector.
[2] The control unit contains solid-state overload relay and control power source for TeSys Ultra. For more details on the different control units, their functions, and placement on the power base, see Power Base and Plug-in Accessories, page 17-27.
[3] Complete the catalog number by adding appropriate code from Table 17.76 (for example, LUCAX6FU).
[4] DC voltage with range of 0.90 to 1.10 of nominal.
[5] I indicates closed contact; O indicates open contact.
[6] Requires multifunction or advanced control unit plus fault differentiation module LUFDA10.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Control Units and Functions


Table 17.79: Control Units and Functions

	 Standard		 Advanced		 Multifunction
Reference	**LUCA**	**LUCB**	**LUCC**	**LUCD**	**LUCM**
Protection type					
Class 10	■	■			■
Class 20				■	■
Class 5–30					■
Single Phase: LUCC Class 10 only			■		■
Protection functions					
Short circuit	■	■	■	■	■
Over current	■	■	■	■	■
Thermal overload	■	■	■	■	■
Phase loss	■	■		■	■
Phase imbalance	■	■		■	■
Ground fault	■	■	■	■	■
Underload, long start, jam		▒	▒	▒	■
Control functions					
Manual reset	■				
Automatic or local/remote reset		▒	▒	▒	■
Fault differentiation		▒	▒	▒	■
Thermal alarm		▒	▒	▒	■
Motor load display		▒	▒	▒	■
Fault history					■
Alarm threshold adjustment					■
Tripping test		■	■	■	■

■ = built-in the control unit
▒ = works with the related function modules (see page 17-28)

Power Base and Plug-in Accessories

See below where to install accessories on the power base. Only one accessory can be installed in each location.

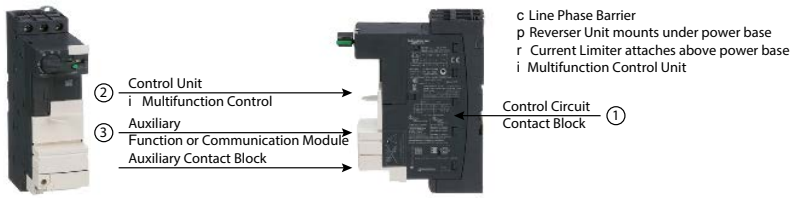

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



Reverser Unit Assembled under the Power Base

TeSys™ Reversing Starters

Table 17.80: Power Base with Reversing Unit assembled under the base

Control Connection	Max. Current (A)	Maximum Horsepower Ratings						Self-Protected Starter Base Catalog Number
		Three-Phase				Single-Phase		
		200 V	230 V	460 V	575 V	115 V	230 V	
With screw terminations	12	3	3	7.5	10	1.5	2	LU2B12*[7]*
	32	10	10	20	25	2	5	LU2B32*[7]*

Table 17.81: Select Control Unit Options*[8][9]*

Setting Range (A)	Standard Three-Phase Class 10 trip *[10]*	Advanced Three-Phase Class 10 trip *[10]*	Advanced Single-Phase Class 10 trip *[10]*	Advanced Three-Phase Class 20 trip *[10]*
0.15–0.6	LUCAX6●●	LUCBX6●●	LUCCX6●●	LUCDX6●●
0.3–1.4	LUCA1X●●	LUCB1X●●	LUCC1X●●	LUCD1X●●
1.25–5.0	LUCA05●●	LUCB05●●	LUCC05●●	LUCD05●●
3–12	LUCA12●●	LUCB12●●	LUCC12●●	LUCD12●●
4.5–18	LUCA18●●	LUCB18●●	LUCC18●●	LUCD18●●
8–32	LUCA32●●	LUCB32●●	LUCC32●●	LUCD32●●

Table 17.82: Voltage Codes

Volts	24	110–240
DC	BL *[11][12]*	—
AC	B	—
DC or AC	—	FU

Table 17.83: Reversing Modules for Field Addition

Mounting	Catalog No.	Wiring Adapter	
Beneath	LU2MB0	LU9MR1C	**Note:** For LU2MB0 and LU6MB0, voltage code required; must match control unit.
Beside	LU6MB0	LU9MR1	

TeSys™ Ultra Accessories

Table 17.84: Current Limiter *[13][14]*

Accessory	Application	Technical Data	Mounting	Cat. No.
Current limiter/isolator	Additional current limiting aspects for the starter	130 kA at 460 V 65 kA at 575 V	Direct mounting to LUB● and LU2B●	LUALB1
Limiter cartridge	Replacement cartridge for LUALB1	130 kA at 460 V 65 kA at 575 V	—	LUALF1

Table 17.85: Function Modules *[13][15]*

Module	Description	For use with:	Operation Requirements	Catalog Number
Fault differentiation: with manual reset (thermal overload) with auto reset	Provides indication between an overload trip and a short circuit trip.	Advanced control units only	24–250 Vac/Vdc (power from control unit)	LUFDA10
Thermal overload pre-alarm	Signals when the motor current reaches 1.05 of the full load setting on the control unit.	Advanced control units only	24–250 Vac/Vdc (power from control unit)	LUFW10
Motor load indication	Provides a signal proportional to the average currents in the three phases divided by the full load current setting of the control unit. The output corresponds to a load status of 0–2 times the full load setting of the control unit.	Advanced or multi-function control units	4–20 mA (requires separate 24 Vdc power supply)	LUFV2
Parallel wiring	Provides a convenient way to reduce control wiring and allow for connecting starters to a communications network by providing 24 Vdc for the starters.	Advanced or multi-function control units (24 Vdc only) and LU9BN11C or LU9MRC prewired connector	LU9G02 splitter box and PLC network	LUFC00



Alarm Differentiation



Parallel Wiring



Motor Load Indicator

[7] Voltage code required.
[8] The control unit contains solid-state overload relay and control power source for TeSys Ultra. For more details on the different control units, their functions, and placement on the power base see Control Units and Functions, page 17-27.
[9] Control units for 4.5–18 and 8–32 can be used **only** with 32 A rated power bases (LUB32, LUB320, and LU2B32).
[10] Complete the catalog number by adding the appropriate code from (for example LUCAX6FU).
[11] DC voltage with range of 0.90 to 1.10 of nominal.
[12] Voltage code to use for a power base with a communication module.
[13] See page 17-27 for placement on the power base.
[14] Increases the breaking capacity of the motor starter.
[15] Offers customization for specific application requirements.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


Modbus


DeviceNet


Profibus


CANopen

Accessories

Table 17.86: Communication Modules *[16][17]*

Communication modules allow the TeSys Ultra starter to be connected directly to the network. They are for use with advanced or multi-function control units (24 Vdc only) and require a separate 24 Vdc power supply.

Module	Prewired Connector	Catalog Number
Modbus™ Communication	LU9BN11C or LU9MRC	LULC033
CANopen Communication	LU9BN11L or LU9MRL	LULC08
Profibus Communication	LU9BN11L or LU9MRL	LULC07
DeviceNet™ Communication	LU9BN11L or LU9MRL	LULC09

Table 17.87: TeSys™ Ultra Cabling Accessories—Power Bus Bars

Description	Application	Pitch	Standard Pack	Catalog Number
3-Pole, 63 A Bus Bar	For feeding 2 TeSys Ultra controllers	45	1	GV2G245
		54	1	GV2G254
		72	1	GV2G272
	For feeding 3 TeSys Ultra controllers	45	1	GV2G345
		54	1	GV2G354
	For feeding 4 TeSys Ultra controllers	45	1	GV2G445
		54	1	GV2G454
		72	1	GV2G472
	For feeding 5 TeSys Ultra controllers	54	1	GV2G554
Terminal blocks	Top feed for use with bus bars	—	1	GV1G09

Table 17.88: Control Circuit Accessories *[18]* for placement on power base.

Accessory	Application	Technical Data	Mounting		Catalog Number
Control circuit contact block	Switches control circuit power via LUB● handle (NEC430-74 compliance)	5 A at 600 Vac 5 A at 250 Vdc	Side mounting to LUB● and LU2B● only		LUA8E20
Through-the-door operating mechanism (without trip indication)	Use to enclose TeSys LUB● only.	NEMA 1, 12, 3R, 4, 4X Red/Yellow	Kit		LU9APN44
Control circuit filters	Use with electronic or triac output controllers	Up to 150 Vac max.	Directly to coil terminals	Non-reversing	LUA4F11
				Reversing	LUA4F12
Pre-wired connector	Central control when using communication modules	See Table 17.86 for usage.	Lower power terminals to communication module.	Non-reversing	LU9BN11C
					LU9BN11L
				Reversing	LU9MRL

[16] See page 17-27 for placement on the power base.
[17] Communication capabilities can be integrated into existing automation architecture via a variety of protocols.
[18] See Power Base and Plug-in Accessories, page 17-27

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



GV2P



GV4PB

TeSys™ Power Motor Circuit Breakers

The TeSys™ Power Motor Circuit Breakers family of products provide efficient motor control and protection solutions up to 520 amps. There are a variety of UL approved applications that enable specified configurations for use as a manual starter, motor disconnect, independent branch short-circuit protection, motor overload protection, or for use with a motor controller such as a contactor to build a complete motor control circuit. Certain configurations are approved for group motor applications as well. Refer to the following selection tables for application information, as well as the Motor Control Solutions for the North American Market data bulletin (8536DB0901) for additional information.

The GV2P (up to 32 amps) and GV3P (up to 65 amps) is rated to UL 60947-4-1 as a motor starter, and also possess Type E ratings for manual switching applications. These devices can be combined with a specified TeSys Deca contactor as a Type F combination motor controller (with specified line side spacer/accessories), with SCCR up to 100kA.

The GV2ME (up to 32 amps) combined with a specified TeSys Deca contactor is ideal for group motor applications.

The TeSys island load management starters are approved for use with TeSys GV2P and GV3P devices as a group motor arrangement. See selection table for application specifics.

The GV4PB, GV5PB, and GV6PB are motor protective circuit breakers rated to UL 489, are approved as branch circuit protection (no line side spacer required) and include motor overload protection. A full motor branch circuit is completed with the addition of a contactor, providing a compact two-component solution up to 520 motor full load amps. Pre-trip alarm accessories can be applied to these units to help anticipate and resolve issues, minimizing operator or maintenance interaction.

Table 17.89: GV2, GV3 Manual Motor Protectors (UL 60947-4-1)

	Thermal Setting (A)	Maximum Horsepower Ratings								GV2ME push button*[19]*	GV2/3P rotary handle
		Single-Phase			Three-Phase						
		115 V	200 V	230 V	115 V	200 V	230 V	460 V	575 V	Catalog Number	Catalog Number
	0.10–0.16	—	—	—	—	—	—	—	—	GV2ME01	GV2P01
	0.16–0.25	—	—	—	—	—	—	—	—	GV2ME02	GV2P02
	0.25–0.40	—	—	—	—	—	—	—	—	GV2ME03	GV2P03
	0.40–0.63	—	—	—	—	—	—	—	—	GV2ME04	GV2P04
	0.63–1	—	—	—	—	—	—	—	1/2	GV2ME05	GV2P05
	1–1.6	—	—	1/10	—	—	—	3/4	3/4	GV2ME06	GV2P06
	1.6–2.5	—	1/6	1/6	—	1/2	1/2	1	1.5	GV2ME07	GV2P07
	2.5–4	1/8	1/4	1/3	—	3/4	3/4	2	3	GV2ME08	GV2P08
	4–6.3	1/4	1/2	1/2	3/4	1	1.5	3	5	GV2ME10	GV2P10
	6–10	1/2	1	1.5	1	2	3	5	7.5	GV2ME14	GV2P14
	9–14	3/4	2	2	2	3	3	10	10	GV2ME16	GV2P16
	13–18	1	2	3	2	5	5	10	15	GV2ME20	GV2P20
	17–23	1.5	3	3	3	5	7.5	15	20	GV2ME21	GV2P21
	20–25	2	—	—	—	7.5	7.5	15	20	GV2ME22	GV2P22
	24–32	2	5	5	5	7.5	10	20	25	GV2ME32	GV2P32
	9–13	1/2	—	1.5	—	3	3	7.5	10	—	GV3P13
	12–18	3/4	—	2	—	3	5	7.5	10	—	GV3P18
	17–25	1.5	—	3	—	5	7.5	15	20	—	GV3P25
	23–32	2	—	3	—	7.5	7.5	20	25	—	GV3P32
	30–40	3	—	5	—	10	10	25	30	—	GV3P40
	37–50	3	—	7.5	—	10	10	30	40	—	GV3P50
	48–65	3	—	10	—	15	15	40	50	—	GV3P65
	62–73	5	—	15	—	20	25	50	60	—	GV3P73



GV2P



GV2ME

[19] For snap-in terminals add an **A** to the catalog number (for example, GV2ME01**A**). For ring terminals, add **6**.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



GV4PB



GV5PB

Table 17.90: GV4, GV5, GV6 UL 489 Motor Protective Circuit Breakers

Motor FLA Dial Range	Interrupting Rating: 240 V ... 35 kA 480Y/277 V ... 18 kA 600Y/347 V ... 14 kA	Interrupting Rating: 240 V ... 65 kA 480Y/277 V ... 35 kA 600Y/347 V ... 18 kA	Interrupting Rating: 240 V ... 100 kA 480Y/277 V ... 65 kA 600Y/347 V ... 25 kA
0.8 ... 2	—	GV4PB02N	GV4PB02S
1.4 ... 3.5	—	GV4PB03N	GV4PB03S
2.9 ... 7	—	GV4PB07N	GV4PB07S
5 ... 12.5	—	GV4PB12N	GV4PB12S
10 ... 25	GV4PB25B	GV4PB25N	GV4PB25S
20 ... 50	GV4PB50B	GV4PB50N	GV4PB50S
40 ... 80	GV4PB80B	GV4PB80N	GV4PB80S
65 ... 115	GV4PB115B	GV4PB115N	GV4PB115S
58 ... 130	—	GV5PB150N	GV5PB150S
114 ... 217	—	GV5PB250N	GV5PB250S
190 ... 348	—	GV6PB400N	GV6PB400S
312 ... 520	—	GV6PB600N	GV6PB600S

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ BV4 Motor Circuit Protection Selection



Providing UL508 type D combination ratings in accordance to current NEC installation requirements, the TeSys BV4 motor circuit protector allows for compact motor protection in conjunction with both the TeSys and Square D™ NEMA product families for motor control. The BV4 is a magnetic only, UL489 Listed circuit protector rated up to 100kA short-circuit protect with adjustable instantaneous trip points and can be installed directly to a panel or standard DIN rail.

Motor Circuit Protectors must be applied per a listed combination motor controller rating as required by NEC and UL 508A. See UL.com/SCCR for combination ratings or contact local support for a tested combination appendix.

Table 17.91: TeSys™ BV4 Motor Circuit Breaker Selection

Frame	MCP Ampacity (In)	Adjustable Instantaneous Trip (Ii)	Protection Level	
			Standard Fault Cat. No.	High Fault Cat. No.
BV4	2	12-28	—	BV4T002J
	3.5	21-49	—	BV4T003J
	7	42-98	—	BV4T007J
	13	53-195	BV4T013D	BV4T013J
	25	110-360	BV4T025D	BV4T025J
	50	176-650	—	BV4T050J
	80	320-1150	BV4T080D	BV4T080J
	115	600-1150	—	BV4T115J

TeSys™ Deca GV2 Accessories and Enclosures

Table 17.92: Mounting Accessories for GV2 + LC1 D09 to D38 *[20]*



	Mount GV Directly on Single DIN Rail	Mount on Single DIN Rail (Using Mounting Hardware)	Mount GV and LC1D Contactor on Independent DIN Rails	Mount on 2 DIN Rails (Using Mounting Hardware)
				
Electrical Interconnect	GV2AF3	GK2AF01	GV1G02	GV2AF4
Mounting Hardware	—		—	LAD311

Table 17.93: Mounting Accessories for GV2 *[20]*

Description	Application	Standard Pack *[21]*	Catalog Number
Adapter plate	For screw mounting of GV2M	10	GV2AF02
7.5 mm compensation plate	To allow mounting of GV2M and GV2P on a common bus bar	10	GV1F03

Table 17.94: Bus Bar Accessories for GV2

Description	Application	Pitch	Catalog Number
Incoming Terminal	Type E line spacer, for use with or without GV2G busbars	—	GV1G09
	Type E line spacer, not for use with or with GV2G busbars	—	GV2GH7
	Bottom Feed, for use with GV1L3 current limiter	—	GV2G05
3-Pole, 63 A Bus Bar	For feeding 2 GV2 starters	45	GV2G245
		54	GV2G254
		72	GV2G272
	For feeding 3 GV2 starters	45	GV2G345
		54	GV2G354
	For feeding 4 GV2 starters	45	GV2G445
		54	GV2G454
		72	GV2G472
	For feeding 5 GV2 starters	54	GV2G554
Protective Cover	To cover unused bus bar outlets	—	GV1G10 *[22]*



GV2AF3/G2AF4

[20] Must order in multiples of 10.
[21] Orders must specify multiples of quantities listed.
[22] Must order in multiples of 5.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 17.95: GV2 Other Accessories

Description	Application	Standard Pack *[23]*	Catalog Number
Current limiter—GV2	Increases interrupt capacity when attached to GV2ME or GV2P	1	GV1L3
Through-the-door operating mechanism kits	NEMA 1, 12, Black with trip indication, for use with GV2P	1	GV2APN01
	NEMA 1, 12, Red/Yellow with trip indication, for use with GV2P	1	GV2APN02
	NEMA 3R, 4, 4X, Red/Yellow without trip indication, for use with GV2P	1	GV2APN04
Angle bracket	Operating mechanism support shaft for deep enclosures (≥ 250 mm), for use with GV2P	1	GVAPK11
Operating mechanism short shaft	One-piece short shaft for installing operating mechanisms in shallow enclosures, for use with GV2P, GV3P and TeSys Ultra	1	GVAPA2
Laser tool	Laser tool for installing through-the-door kits	1	GVAPL01

Table 17.96: GV2 Enclosures

Description	Listing	Mounting	Enclosure Rating	Max. Side Mounting Aux. Contacts		Catalog Number
				Left Side	Right Side	
Enclosures for GV2ME with or without accessories	CSA Listed. Not UL Listed.	Surface mounting	NEMA 1, IP41	1	1	GV2MC01
			NEMA 12/4, IP55	1	1	GV2MC02
		Flush mounting	NEMA 1, IP41	1	1	GV2MP01
			NEMA 12/4, IP55	1	1	GV2MP02
		Flush mounting, front face reduced	NEMA 1, IP41	0	1	GV2MP03
			NEMA 12/4, IP55	0	1	GV2MP04

Table 17.97: GV2 Enclosures Accessories

Description	Type		Standard Pack *[24]*	Catalog Number
Padlocking device for GV2M (when padlocked, starter is automatically in Off position)	—		1	GV2V01
Mushroom head stop push button (40 mm, red) *[24]*	Spring return		1	GV2K011
	Latching	Turn to Release	1	GV2K031
	Latching / Padlockable Turn to Release		1	GV2K04
Sealing kit	For enclosures GV2MC01 and GV2MP01		10	GV2E01

Voltage Trips



GVAU116

Table 17.98: Voltage Trips

Only one trip or fault signaling contact can be installed per GV2/GV3 device.				
Description	**Characteristics**	**Voltage**	**Frequency**	**Cat. No.** *[25]*
Voltage trips GV2 or GV3P	Undervoltage or Shunt trip (external mounting, 1 block right side only)	110–115 V	60 Hz	GVA●116
		220–240 V	60 Hz	GVA●226

Table 17.99: Voltage Trips–Technical Data (GV2AU, GV2AS)

Rated Voltage—660 Vac					
Model	**Inrush**	**Sealed**	**Pick-Up Voltage**	**Drop-Out Voltage**	**Operating Time** *[26]*
GVAU	12 VA / 8 W	3.5 VA / 1.1 W	0.8—1.1	0.35—0.7	10—15 ms
GVAS	14 VA / 10.5 W	5 VA / 1.6 W	0.7—1.1	0.2—0.75	10—15 ms

[23] Orders must specify multiples of quantities listed.
[24] Supplied with IP55 sealing kit.
[25] To order an undervoltage trip: replace the bullet (●) with a **U** (for example, GVA**U**025).
To order a shunt trip: replace the bullet (●) with an **S** (for example, **GVAS025**).
[26] From the loss of voltage at the trip terminals to the opening of the starter contacts.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



GVAE11

Table 17.100: Auxiliary Contact Blocks *[27]*

Description	Mounting Location	Max. No. of Blocks	Contact Type	Sold in lots of	Cat. No.
Instantaneous auxiliary contacts GV2 or GV3P	Front *[28][29]*	1	N.O. or N.C. *[30]*	1	GVAE1
			N.O. + N.C.	10	GVAE11
			N.O. + N.O.	1	GVAE20
	Left Hand Side	2	N.O. + N.C.	1	GVAN11
			N.O. + N.O.	1	GVAN20
Fault signaling contact + instantaneous auxiliary contact GV2 or GV3P	Left Hand Side *[31]*	1	N.O. (fault) + N.O.	1	GVAD1010
			N.O. (fault) + N.C.	1	GVAD1001
			N.C. (fault) + N.O.	1	GVAD0110
			N.C. (fault) + N.C.	1	GVAD0101
Short circuit signaling contact GV2 or GV3P	Left Hand Side	1	SPDT	1	GVAM11



GV3G66

Table 17.101: GV3P Accessories

Accessory	Application / Use With	Standard Pack	Cat. No.
Through-the-door operating mechanism kits	NEMA 1, 12, Black with trip indication, for use with GV3P	1	GV3APN01
	NEMA 1, 12, Red/Yellow, with trip indication, for use with GV3P	1	GV3APN02
	NEMA 3R, 4, 4X Red/Yellow without trip indication, for use with GV3P	1	GV3APN04
Angle bracket	Operating mechanism support shaft for deep enclosures (≥ 300 mm), for use with GV3P	1	GVAPK12
3-pole, 115 A busbar	For feeding 2 GV3P starters, 64 mm pitch	1	GV3G264
	For feeding 3 GV3P starters, 64 mm pitch	1	GV3G364
Incoming line spacer	Line spacer for GV3P when used in UL 508 Type E applications. One spacer required on line side.	1	GV3G66
IP 20 cover	IP20 protective cover for ring tongue versions of GV3P and 3-pole TeSys™ Deca Everlink contactors. Two covers required for line and load side.	1	LAD96570
Padlocking device	For use with up to 4 padlocks (not supplied). Ø 6 mm shank maximum	1	GV2V03
Operating mechanism short shaft	One-piece short shaft for installing operating mechanisms in shallow enclosures, for use with GV2P, GV3P and TeSys Ultra	1	GVAPA2
Laser tool	Laser tool for installing through-the-door kits	1	GVAPL01
S-shaped busbar	For connecting GV3P starters and LC1D40A-65A contactors side by side without intrawiring	1	GV3S

Common Accessories for BV4, GV4, GV5 and GV6

Common Accessories		BV4 Reference	GV4 Reference	GV5 Reference	GV6 Reference
Auxiliary contacts OF or SD					
Open/Closed Status		GV4AE11	GV4AE11	GV7AE11	GV7AE11
Trip Alarm		—	—	—	—
Open/Closed Status — Low Level		—	—	GV7AB11	GV7AB11
Fault signalization modules					
For **GV4PB**, SDx module mounts externally on the right side, and provides pre-trip alarm and fault signalization • SDT95% overload alarm: thermal image of the motor is greater than 95 % of the permissible temperature rise. • SDTxxs overload alarm: circuit breaker will trip in xx seconds with the same load. xx is adjustable between 10 to 40 seconds (default 20 seconds) on the circuit breaker itself through NFC or a computer with EcoStruxure Power Commission software and an interface module (TRV00911). • SDTAM overload alarm just before tripping: in the event of a phase unbalance, overload, or on a jam fault, this output is activated to open the contactor and avoid circuit breaker tripping. In that case, contact can be manually or automatically reseted after an adjustable cooling time from 1 to 15 minutes. If after a 400 ms delay the motor is not stopped, the circuit breaker will trip. • SDT overload trip indication: circuit breaker has tripped due to an overload fault. • SDJAM jam trip indication: circuit breaker has tripped due to a jam fault. • SDUNB phase unbalance trip indication: circuit breaker has tripped due to an unbalance fault. • SDLS long start trip indication: circuit breaker has tripped due to a long start fault. • SDGF ground-fault trip indication: circuit breaker has tripped due to a ground-fault. For GV5PB & GV6PB, SDx module mounts internally, and includes a pre-trip contact (400 ms prior to trip) that can be use to open the contactor, as well as a contact that indicates overload trip of the circuit-breaker.		—	GV4ADM1111	LV429424 (1)	LV429424 (1)
Instantaneous voltage release					
Undervoltage Release (Mn)	24 V 50/60 Hz	GV4AU027	GV4AU027	P29404	P29404
	24 Vdc	—	—	—	—
	48 V 50/60 Hz–48 Vdc	GV4AU057	GV4AU057	GV7AU055	GV7AU055
	110–130 V 50/60 Hz–125 Vdc	GV4AU137	GV4AU137	GV7AU107	GV7AU107
	208–240 V 50/60 Hz	GV4AU247	GV4AU247	GV7AU207	GV7AU207
	277 V 60 Hz	GV4AU286	GV4AU286	—	—
	380–415 V 50 Hz	GV4AU415	GV4AU415	GV7AU387	GV7AU387
	440–480 V 60 Hz	GV4AU486	GV4AU486	—	—
	525–600 V 60 Hz	—	—	P29409	P29409

[27] One trip or one fault signaling can be fitted per GV3.
[28] Cannot be used with **GV2GH7** insulator.
[29] Mounting of a **GVAE** contact block or a **GV2AK00** visible isolation block on **GV2P**.
[30] Choice of N.C. or N.O. contact operation, depending on which way the reversible block is mounted.
[31] The **GVAD** is always mounted next to the starter.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Common Accessories		BV4 Reference	GV4 Reference	GV5 Reference	GV6 Reference
Shunt Trip (Mx)	24 V 50/60 Hz	GV4AS027	GV4AS027	P29384	P29384
	24 Vdc	—	—	—	—
	48 V 50/60 Hz–48 Vdc	GV4AS057	GV4AS057	GV7AS055	GV7AS055
	110–130 V 50/60 Hz–125 Vdc	GV4AS137	GV4AS137	GV7AS107	GV7AS107
	208–240 V 50/60 Hz	GV4AS287	GV4AS287	GV7AS207	GV7AS207
	277 V 60 Hz	—	—	—	—
	380–415 V 50 Hz–440–480 V 60 Hz	GV4AS487	GV4AS487	GV7AS387	GV7AS387
	525–600 V 60 Hz	—	—	P29389	P29389
Rotary handles					
Direct	With black handle on black font	GV4ADN01	GV4ADN01	GV5AP03	GV6AP03T
	With red handle on yellow font	GV4ADN02	GV4ADN02	GV7AP04	LV432599T
Front extended IP54	With black handle on black font	GV4APN01	GV4APN01	GV7AP01 (2)	LV432598T (2)
	With red handle on yellow font	GV4APN02	GV4APN02	GV7AP02 (2)	LV432600T (2)
Front extended IP65	With red handle on yellow font	GV4APN04	GV4APN04	—	—
Lateral	With black handle on black font	LV426935T	LV426935T	—	—
	With red handle on yellow font	LV426936T	LV426936T	—	—
Open door shaft operator		LV426937	LV426937	—	—
Laser alignment tool to aid in aligning hole on door with rotary mechanism		GVAPL01	GVAPL01	GVAPL01	GVAPL01

Additional BV4 and GV4 Accessories

Accessory	BV4 Reference	GV4 Reference
Cabling Accessories		
EverLink Connector (replacement)	LAD96565	LAD96565
Large Spacing Cover for EverLink Connector (replacement)	GV4G66	—
Crimp Lug Connector + Screws	GV4LUG	GV4LUG
Transparent Terminal Shield for Crimped Lug Connector	LAD96590	LAD96590
Interphase Barriers	LV426920	LV426920
One Time Torque Limiters, Green—9 N.m (set of 6)	LV426990	LV426990
One Time Torque Limiters, Yellow—5 N.m (set of 6)	LV426992	LV426992
Locking Accessories		
Removable Toggle Locking Device for 1 to 3 Padlocks	29370	—
Bag of 6 Leads + 6 Sealing Accessories	LV429375	—
Programming Tools		
Pocket Battery—Allows changes to settings on the GV4PB when not powered by the line voltage	—	LV434206
GV4PB cord for USB Maintenance Interface	—	TRV00917
EcoStruxure Power Commission app	—	Free download

Additional GV5 and GV6 Accessories

Accessory		GV5PB150.. Reference	GV5PB250.. Reference	GV6PB.. Reference
Cabling Accessories				
Mechanical lug kit (set of 3)	14–10 AWG (2.5–6mm2)—Al/Cu	AL150HD	—	—
	14–2/0 AWG (2.5—70mm)—Cu	CU150HD	—	—
	4–4/0 AWG (25–95mm2)—Al/Cu	—	AL175JD	—
	3/0–350 kcmil AWG (95–185mm2)—Al/Cu	—	AL250JD	—
	1/0 AWG–300 kcmil (50–185mm2)—Al/Cu	—	CU250JD	—
	2 AWG–500 kcmil (35–240mm2)—Al	—	—	AL400L61K3
	2 AWG–600 kcmil (35–300mm2)—Cu			
	2 AWG–600 kcmil (35–300mm2)—Cu	—	—	CU400L61K3
	2/0 AWG–500 kcmil (70–240 mm2)—Al/Cu	—	—	AL600LS52K3
	2/0 AWG–500 kcmil (70–240mm2)—Cu	—	—	CU600LS52K3
	3/0 AWG–500 kcmil (95–240)—Al/Cu	—	—	AL600LF52K3
	3/0 AWG–500 kcmil (95–240)—Cu	—	—	CU600LF52K3
Terminal Nut Insert kit/Bus Bar Connections	1/4–20 Tap (set of 3)	S37444	S37445	—
	M10 x 25 terminal screws and washers for one side (set of 4)	—	—	S36967
Terminal Shield	Short Terminal Shield	S37447	S37448	LTSS3P
	Medium Terminal Shield	—	—	LTSM3P
	Long Terminal Shield	—	—	LTSL3P
Phase Barriers	Phase Barriers (set of 6)	S29329	S29329	32570
Locking & Other Accessories				
Door Lock	Removable Door lock (lock off only)	S29370	S29370	S29370
	Fixed Door lock (on or off)	S29371	S29371	S32631
Toggle Extension	Fixed (set of 5)	S29313	S29313	S432553

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Enclosed TeSys™ Deca Starters

TeSys Deca enclosed full-voltage starters are available in Type 1 and Type 12/3R enclosures. The enclosed TeSys Deca offer accepts standard TeSys Deca accessories and all Insta-Kits control units and control power transformer kits. For additional sizes, combinations and accessory options, see Catalog 8100CT1901. Check with local sales office for availability.



LE1D093A62OB70

Table 17.102: Insta-Kits for Enclosed Full Voltage Non-Reversing Starters *[32]*

Max. Horsepower Ratings						Auxiliary Contacts On Each Contactor		Current Rating of Contactor	Catalog Number *[33]*	
Single-Phase		Three-Phase								
120 V	240 V	208 V	230 V	460 V	575 V	N.O.	N.C.		Type 1	Type 12/3R
1/3	1	2	2	5	7.5	1	1	9	LE1D093A62O••••	LE1D093A72O••••
1/2	2	3	3	7.5	10	1	1	12	LE1D123A62O••••	LE1D123A72O••••
1	3	5	5	10	15	1	1	18	LE1D183A62O••••	LE1D183A72O••••
2	3	5	7.5	15	20	1	1	25	LE1D253A62O••••	LE1D253A72O••••
2	5	7.5	10	20	25	1	1	32	LE1D323A62O••••	LE1D323A72O••••
3	5	10	10	30	30	1	1	40	LE1D403A62O••••	LE1D403A72O••••
3	7.5	15	15	40	40	1	1	50	LE1D503A62O••••	LE1D503A72O••••
5	10	20	20	40	50	1	1	65	LE1D653A62O••••	LE1D653A72O••••


Table 17.103: Voltage Codes for Enclosed Starters


Primary Voltage	120	208	240
Code	G7	L7	U7


TeSys Deca dimensions: TeSys™ Deca Non-Combination Starter Dimensions, page 17-57

Insta-Kits Selection


With the use of Insta-Kits, only one operator scheme is allowed. For additional accessory kits and options, see Catalog 8100CT1901. Check with local sales office for availability.







From top to bottom: Start/Stop, On - Off Selector Switch, HOA Selector Switch






TeSys™ Deca AC Magnetic Starter, 2–3 Pole

[32] See Table 17.25 TeSys™ Deca Overload Relays—Ambient Compensated, Bimetallic, Direct Mounting, page 17-11 for field installable overload relays.

[33] To obtain a single phase non-reversing starter, change prefix LE1 to LES. (e.g., LE1D093A62O•••• becomes LESD093A62O••••). Price remains unchanged.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 17.104: Insta-Kit Accessories for Field Installation

Symbol	Description	Color	Nameplate	Suffix/Cat. No. *[34]* NEMA Type 1
One operator on cover				
	2 Position selector switch	Black	Off - On	LA9CA06DT
	3 Position selector switch	Black	Hand - Off - Auto	LA9CA06ET
	2 Push buttons	Green Red	Start Stop	LA9CA06GT
	3 Position selector switch, Pilot light (transformer type)	Black Red/Green	Hand - Off - Auto Power On	LA9CA06UT

[34] Catalog numbers beginning with LA9 are only for starters with a “2” before the voltage code. When using a factory option that does not have a corresponding customer kit, the 10th digit of the starter must change from a "2" to a "1".

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



ATSU01●●

Altistart™ Drive and TeSys™ Ultra Motor Starter

Table 17.105: Soft Start / Soft Stop Unit for 0.75 to 15 kW Motors (can be combined with the TeSys Ultra starter)

Motor		Starter	
Motor Power, hp[1]		Nominal Current, A	Catalog Number
230 V	460 V		
3-phase supply voltage: 200 to 480 V 50/60 Hz			
1	2	6	ATSU01N206LT
1.5	3		
2	5	9	ATSU01N209LT
3	7.5	12	ATSU01N212LT
5	10	22	ATSU01N222LT
7.5	15		
10	20	32	ATSU01N232LT

Table 17.106: Accessories

Description	Used for Starter	Catalog Number
Power connector between ATSU 01N2●●LT and TeSys™ Ultra	ATSU01N2●●T	VW3G4104

Table 17.107: TeSys Ultra Starter and Soft Start Unit Combinations


Motor Power, hp		Soft Starter	TeSys Ultra	
Voltage			Power Base	Control Unit [2]
200 V	460 V			
1	2	ATSU01N206LT	LUB 12	LUC●05BL
1.5	3	ATSU01N206LT		LUC●12BL
2	5	ATSU01N209LT		LUC●12BL
3	—	ATSU01N212LT		LUC●12BL
—	7.5	ATSU01N212LT		LUC ●18BL
5	10	ATSU01N222LT		LUC●18BL
7.5	15	ATSU01N222LT	LUB 32	LUC●32BL
10	20	ATSU01N232LT		LUC●32BL

E164862
CCN NLDX


LR43364
Class 3211 04

[1] Standard motor power ratings, HP power ratings indicated according to standard UL 508.
[2] Depending on the configuration of the chosen TeSys Ultra starter, replace the ● with **A** for standard, **B** for advanced, and **M** for multifunction. See Table 17.75 for a complete list of available control units. Control voltage must be 24 Vdc.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

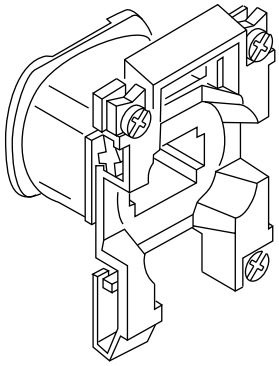

LX1D2



LX1D6

TeSys™ Deca—AC Coils

Table 17.108: For LC1D09–D38, LC1DT20–DT40 Contactors and CAD Relays

Rated Nominal Voltage	Catalog Number, 50/60 Hz
24	LXD1B7
120	LXD1G7
208	LXD1LE7
230/240	LXD1U7
277	LXD1W7
Specifications	50/60 Hz
Average consumption - Inrush (inductance 0.75) - Sealed (inductance 0.3)	 70 VA 7 VA
Operating range@ 60º C	80–110% of nominal @ 50 Hz, 85–110% of nominal @ 60 Hz

Table 17.109: For Old D2 Style LC1D40, D50, D65, D80, and D95; For TeSys Deca LC1D40A, D50A, D65A, DT60A, and DT80A; For TeSys Deca LC1D115 and D150

For TeSys™ Deca LC1D40A, D50A, D65A, DT60A, DT80A	
Rated Nominal Voltage, V	Catalog Number 50/60 Hz
For TeSys™ Deca LC1D40A, D50A, D65A, DT60A, DT80A	
24	LXD3B7
120	LXD3G7*[1]*
208	LXD3LE7*[1]*
240	LXD3U7
480	LXD3T7*[2]*
Specification	50/60 Hz
Average consumption	
-inrush (inductance 0.3)	140 VA (Inductance: 0.9)
-sealed (inductance 0.3)	7.5 VA (Inductance: 0.9)
Operating range	
at θ ≤ 55 °C / 131 °F	80–115% of nominal voltage

Table 17.110: TeSys™ F—AC Coils (For LC1F115, F150, F185, F225, F265, F330, F400, F500, F630, F780, F800, and F1400–F2100)

Contactor	F115-F150	F185-F225	F265-F330	F400	F500	F630	F780*[3]*	F800*[4]*	F1400-F2100*[4]*
Coil Part Number AC 50/60 Hz									
120 V	LX9FF127	LX9FG127	LX1FH1272	LX1FJ127	LX1FK127	LX1FL110	LX1FX110	LX4F8FW	LX1FK070*[5]*
240 V	LX9FF220	LX9FG220	LX1FH2402	LX1FJ240	LX1FK240	LX1FL220	LX1FX220	LX4F8MW	LX1FK127
480 V	LX9FF500	LX9FG500	LX1FH5002	LX1FJ500	LX1FK500	LX1FL415	LX1FX415	—	LX1FK240
Coil Part Number DC									
24 V	LX4FF024	LX4FG024	LX4FH024	—	—	—	—	—	—

[1] 60 Hz only
[2] This coil can only be used on 60 Hz.
[3] LC1F780 contactors operate with 2 coils as a set. The LX1FX• part number includes both coils.
[4] Also requires rectifier DR5TE4U for 110–240 V coils.
[5] Order 2 coils and connect them in series.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

New!

Deca Replaceable Switching Modules

- Innovative contact switching modules for TeSys™ Deca contactors
- Replace worn-out poles with a new switching module in minutes, without having to disassemble the entire product.
- No special tools are needed for the replacement



LA5D1153SM

Table 17.111: Replacement Contact Assemblies

	For use with contactors		Catalog Number
Three-pole	LC1D115A	3 poles	LA5D1153SM
	LC1D150A	3 poles	LA5D1503SM
Four-pole	LC1DT200A	4 poles	LA5D1154SM

Replacement Control Module

- Wide band electronic coils
- Accessible for quick and easy replacement

Table 17.112: Replacement Control Module

For contactors		Operating Voltage Vac (50/60 Hz or DC control input)			
		24–60 Vac	48–130 Vac	100–250 Vac	200–500 Vac
3-pole	LC1D115A–D150A	LX1D83BNE	LX1D83EHE	LX1D83KUE	LX1D83LSE
4-pole	LC1DT200A	LX1D84BNE	LX1D84EHE	LX1D84KUE	LX1D84LSE

© 2026 Schneider Electric
All Rights Reserved
2/17/2026



LA9G3QA

Giga Replaceable Switching Modules

- Innovative contact switching modules for TeSys™ Giga Contactors
- Replace worn-out poles with a new switching module in minutes, without having to disassemble the entire product.
- No special tools are needed for the replacement

Table 17.113: TeSys™ Giga – Switching modules for TeSys Giga contactors (Standard and Advanced versions)

Description	Suitable for:	For contactors	Reference
3 or 4 switching module kits	3-pole	LC1G115/LC1G225	LA9G3QA
		LC1G265/LC1G330	LA9G3RA
		LC1G400/LC1G500	LA9G3SA
		LC1G630/LC1G800	LA9G3TA*[6]*
	4-pole	LC1G115/LC1G225	LA9G4QA
		LC1G265/LC1G330	LA9G4RA
		LC1G400/LC1G500	LA9G4SA
		LC1G630/LC1G800	LA9G4TA*[6]*

NOTE: During replacement, replace all switching modules. After replacement, change the position of the RESET button on the control module from A to B or B to A.

[6] Available 2Q 2022.


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ AK5 Panel Busbar System


The AK5 pre-fabricated bus bar system provides a quick and easy method of mounting control devices. All components are finger safe, UL Listed, CSA approved and CE marked. Although the AK5 system can be screw mounted onto any type of support, it **must be mounted** on the AM1DL201 DIN rail when component mounting plates incorporating a tap-off are used. When using tap-offs, the nominal operating current of the bus bar (160 A @ 35°) must not be exceeded. Approvals include IEC 439, UL, CSA, DNV and LROS.




AK5JB busbar



AK5PA231



AK5PA232S



AK5PC33



AM1DL201

Table 17.114: 160 A, 3-Phase Busbar System

Maximum number of mounting plates						Length		Catalog Number
Tap-off		Standard Width Plate		Extension Plate				
1.42 in.	36 mm	2.13 in.	54 mm	2.80 in.	71 mm	in.	mm	
15		10		5		26.05	668	AK5JB146
24		16		8		38.69	992	AK5JB149

Table 17.115: Mounting Plate Tap-off
(plugs into busbar mounted on AM1DL201 DIN rail)

Width		Thermal Current Amperes	Application		Catalog Number
in.	mm				
2.13	54	25 A	GV2 with	LUS or LUB 12 and 32	AK5PA231
2.13	54	25 A		contactor	AK5PA232

Table 17.116: Bus Tap-off
(plugs into busbar for wiring to a separately mounted device)

Width		Thermal Current (A)	Length of Leads		Catalog Number
in.	mm		in.	mm	
1.42	36	32 A	9.84	250	AK5PC33
1.42	36	32 A	39.37	1000	AK5PC33L

Table 17.117: Mounting Rail (must be used for mounting plates with tap-offs)

Description	Depth	Length	Catalog Number
	mm	mm	
75 mm Omega Rail	15	2000	AM1DL201


File E161251
CCN NMTR

File LR 89150
Class 6228-01


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ island Load Management System Module Dimensions


Bus Coupler: TPRBCEIP




Size 1 Starters: TPRST009 and TPRSS009




Size 2 Starters: TPRST025, TPRST038, TPRSS025 and TPRSS038




Size 3 Starters: TPRST065, TPRST080, TPRSS065 and TPRSS080

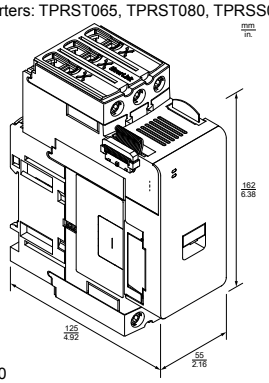


Size 1 (TPRPM009) and Size 2 (TPRPM038) Power Interface Module




Size 3 (TPRPM080) Power Interface Module




SIL Interface Module: TPRSM001




Voltage Interface Module: TPRVM001



Digital I/O Module: TPRDG4X2





Analog I/O Module: TPRAN2X1



TeSys™ Deca Contactors, AC and DC Coil

Table 17.118: TeSys Deca 9 to 38 A Contactors, AC and DC Coils

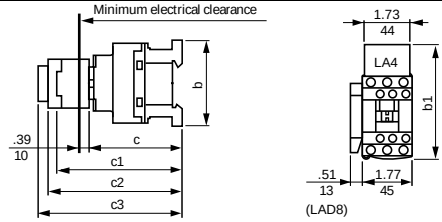
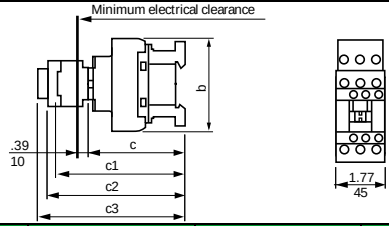
LC1D09 to D18	LC1D25 to D38 (3-pole) and LC1DT20 to DT40 (4–pole)
	

TeSys Deca contactors: LC1D		D09 to D18 in. (mm)	D25 to D38 in. (mm)	D098, D128, DT20, DT25 in. (mm)	DT32, DT40 in. (mm)	D188, D258 in. (mm)
b	AC coil, without add-on accessories	3.03 (77)	3.36 (85)	3.34 (85)	3.58 (91)	4.13 (105)
	DC coil	3.03 (77)	3.36 (85)	3.34 (85)	3.58 (91)	4.13 (105)
b1	AC coil, with LAD4BB	3.70 (94)	3.85 (98)	3.85 (98)	—	—
	AC coil, with LA4D*2	4.33 (110) *[1]*	4.48 (114) *[1]*	4.48 (114)	—	—
	AC coil, with LA4DF, DT	4.68 (119) *[1]*	4.84 (123) *[1]*	5.02 (129)	—	—
	AC coil, with LA4DR, DW, DL	4.96 (126) *[1]*	5.11 (130) *[1]*	7.48 (190)	—	—
c	AC coil, without cover or add-on blocks	3.30 (84)	3.54 (90)	3.54 (90)	3.85 (98)	3.85 (98)
	AC coil, with cover, without add-on blocks	3.38 (86)	3.62 (92)	3.62 (92)	3.93 (100)	3.93 (100)
	DC coil, without cover or add-on blocks	3.66 (93)	3.89 (99)	—	—	—
	DC coil, with cover, without add-on blocks	3.76 (95)	3.97 (101)	3.90 (99)	4.21 (107)	4.21 (107)
c1	AC coil, with LADN or C (two or four contacts)	4.60 (117)	4.84 (123)	4.84 (123)	5.15 (131)	5.15 (131)
	DC coil, with LADN or C (two or four contacts)	4.96 (126)	5.19 (132)	4.84 (123)	5.15 (131)	5.15 (131)
c2	AC coil, with LAD6K10	5.07 (129)	5.31 (135)	5.31 (135)	5.62 (143)	5.62 (143)

[1] Including LAD4BB.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 17.118 TeSys Deca 9 to 38 A Contactors, AC and DC Coils (cont'd.)

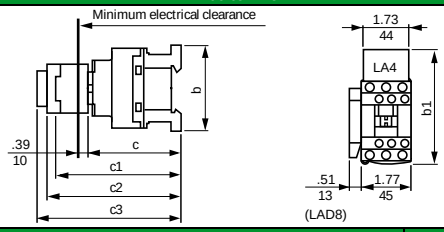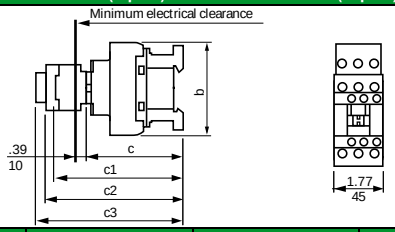LC1D09 to D18	LC1D25 to D38 (3-pole) and LC1DT20 to DT40 (4–pole)
	

	TeSys Deca contactors: LC1D	D09 to D18 in. (mm)	D25 to D38 in. (mm)	D098, D128, DT20, DT25 in. (mm)	DT32, DT40 in. (mm)	D188, D258 in. (mm)
	DC coil, with LAD6K10	5.43 (138)	5.66 (144)	5.31 (135)	5.62 (143)	5.62 (143)
c3	AC coil, with LADT, R, S	5.39 (137)	5.62 (143)	5.62 (143)	5.94 (151)	5.94 (151)
	AC coil, with LADT, R, S and sealing cover	5.55 (141)	5.78 (147)	5.78 (147)	6.10 (155)	6.10 (155)
	DC coil with LADT, R, S	5.76 (146)	5.98 (152)	5.62 (143)	5.94 (151)	5.94 (151)
	DC coil with LADT, R, S and sealing cover	5.90 (150)	6.14 (156)	5.78 (147)	6.10 (155)	6.10 (155)

Table 17.119: TeSys Deca 40 A to 65 A, AC and DC coil

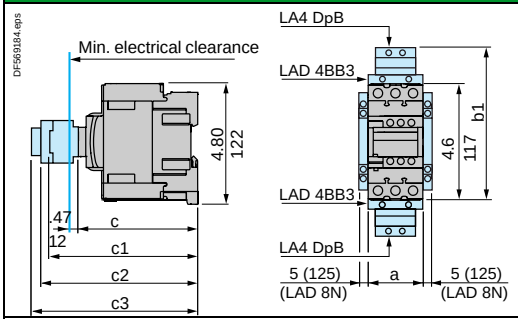
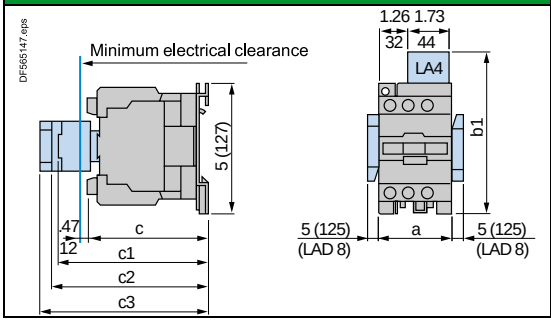
LC1 D40A–D65A (3P), LC1 DT60A–DT80A (4P) AC OR DC	LC1		D40A–D65A in. (mm)	DT60A–DT80A in. (mm)
	a		2.17 (55)	2.76 (70)
	b1	with LA4 D●2	—	—
		with LA4 DB3 or LAD 4BB3	5.35 (136)	—
		with LA4 DF, DT	6.18 (157)	—
		with LA4 DM, DW, DL	6.54 (166)	—
	c	without cover or add-on blocks	4.65 (118)	4.65 (118)
		with cover, without add-on blocks	4.72 (120)	4.72 (120)
	c1	with LADN (1 contact)	—	—
		with LADN or C (2 or 4 contacts)	5.91 (150)	5.91 (150)
	c2	with LAD 6K10 or LA6 DK	6.42 (163)	6.42 (163)
	c3	with LADT, R, S	6.73 (171)	6.73 (171)
		with LADT, R, S and sealing cover	6.89 (175)	6.89 (175)

Table 17.120: TeSys Deca D80 and D95 AC Coil


LC1D80 and D95 (3P), LP1 D80004 and D80008 (4P)	LC1		D80 in. (mm)	D95 in. (mm)	D80004 in. (mm)	D80008 in. (mm)
	a		3.35 (85)	3.35 (85)	3.78 (96)	3.78 (96)
	b1	with LA4 D●2	5.31 (135)	5.31 (135)	5.31 (135)	5.31 (135)
		with LA4 DB3 or LAD 4BB3	5.31 (135)	—	—	—
		with LA4 DF, DT	5.59 (142)	5.59 (142)	5.59 (142)	5.59 (142)
		with LA4 DM, DW, DL	5.90 (150)	5.90 (150)	5.90 (150)	5.90 (150)
	c	without cover or add-on blocks	4.92 (125)	4.92 (125)	4.92 (125)	5.51 (140)
		with cover, without add-on blocks	5.12 (130)	5.12 (130)	—	—
	c1	with LADN (1 contact)	5.90 (150)	5.90 (150)	5.90 (150)	5.90 (150)
		with LADN or C (2 or 4 contacts)	6.22 (158)	6.22 (158)	6.22 (158)	6.22 (158)
	c2	with LAD 6K10 or LA6 DK	6.69 (170)	6.69 (170)	6.69 (170)	6.69 (170)
	c3	with LADT, R, S	7 (178)	7 (178)	7 (178)	7 (178)
		with LADT, R, S and sealing cover	7.16 (182)	7.16 (182)	7.16 (182)	7.16 (182)

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca Contactors, DC Coil


Table 17.121: DC Coil

LC1D80, D95 (3P), LP1D80004, D80008 (4P)

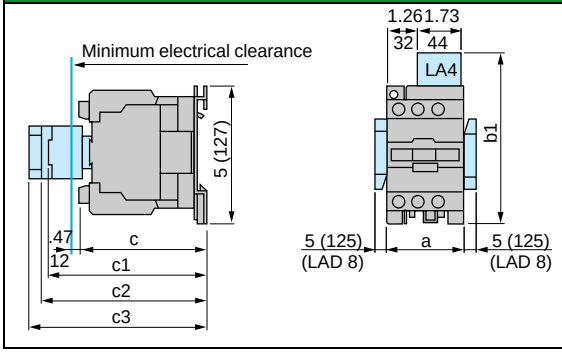

LC1		D80 and D95 in. (mm)	D80004 in. (mm)	D80008 in. (mm)
a		3.35 (85)	3.78 (96)	3.78 (96)
b1	with LAD 4BB3	—	—	—
	with LA4 DF, DT	—	—	—
c	without cover or add-on blocks	7.13 (181)	7.13 (181)	7.72 (196)
	with cover, without add-on blocks	7.32 (186)	—	—
c1	with LAD N (1 contact)	8.03 (204)	8.03 (204)	8.03 (204)
	with LAD N or C (2 or 4 contacts)	8.27 (210)	8.27 (210)	8.27 (210)
c2	with LA6 DK10	8.70 (221)	8.70 (221)	8.70 (221)
c3	with LAD T, R, S	9.01 (229)	9.01 (229)	9.01 (229)
	with LAD T, R, S and sealing cover	9.17 (233)	9.17 (233)	9.17 (233)


LC1D115A and D150A (3–pole)

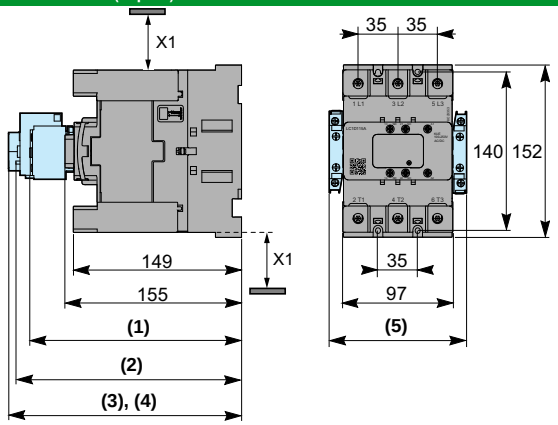

All dimensions are in mm.

(1)	LC1D●●●A+LADN+LADC	187
(2)	LC1D●●●A+LAD6K20	196
(3)	LC1D●●●A+LADT+LADR+LADS	205
(4)	LC1D●●●A+LADT+LADR+LADS+LA9D901	209
(5)	LC1D●●●A+(2x LAD8N)	120
X1	Minimum electrical clearance	40

LC1DT200A (4–pole)

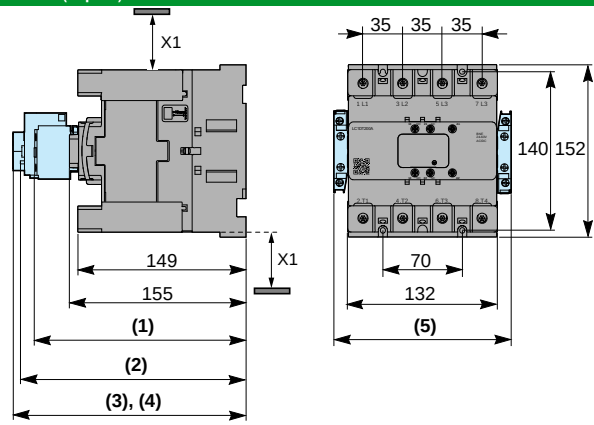


All dimensions are in mm.

(1)	LC1DT200A+LADN+LADC	187
(2)	LC1DT200A+LAD6K20	196
(3)	LC1DT200A+LADT+LADR+LADS	205
(4)	LC1DT200A+LADT+LADR+LADS+LA9D901	209
(5)	LC1DT200A+(2x LAD8N)	155
X1	Minimum electrical clearance	40

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


LC1D115A6 and D150A6 (3–pole)

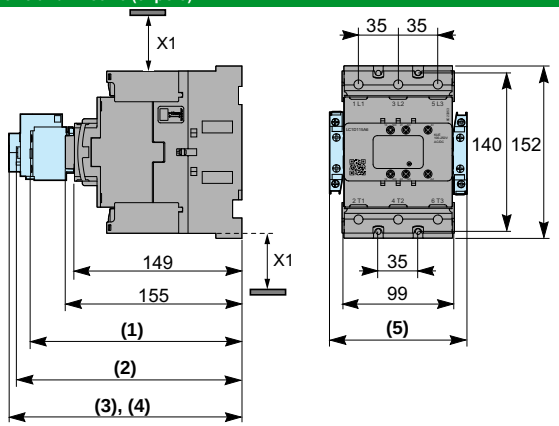

All dimensions are in mm.

(1)	LC1D●●●A6+LADN+LADC	187
(2)	LC1D●●●A6+LAD6K20	196
(3)	LC1D●●●A6+LADT+LADR+LADS	205
(4)	LC1D●●●A6+LADT+LADR+LADS+LA9D901	209
(5)	LC1D●●●A6+(2x LAD8N)	120
X1	Minimum electrical clearance	40

LC1DT200A6 (4–pole)

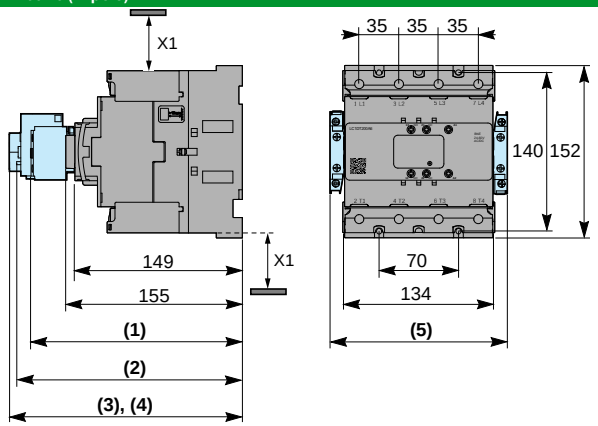


All dimensions are in mm.

(1)	LC1DT200A6+LADN+LADC	187
(2)	LC1DT200A6+LA6DK20	196
(3)	LC1DT200A6+LADT+LADR+LADS	205
(4)	LC1DT200A6+LADT+LADR+LADS+LA9D901	209
(5)	LC1DT200A6+(2x LAD8N)	155
X1	Minimum electrical clearance	40

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


TeSys™ F Contactors, Dimensions

LC1F780, F7804

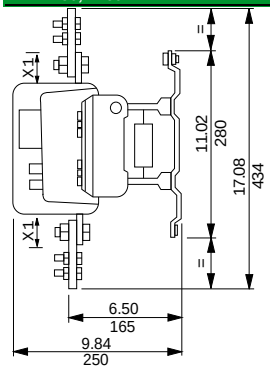


X1: Minimum clearance according to the operational voltage and the breaking capacity.

Voltage (V)	200–500 V	690–1000 V
X1 in mm	30	35

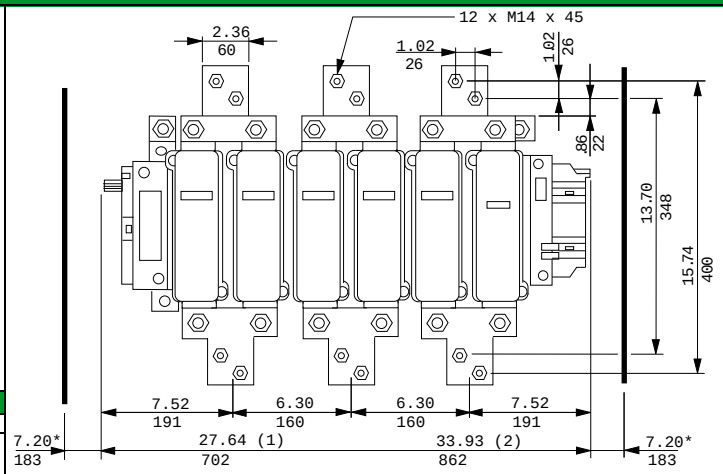


1) Overall length (3 poles).
2) Overall length (4 poles).
* Minimum distance required for coil removal.


LC1F780 mounting

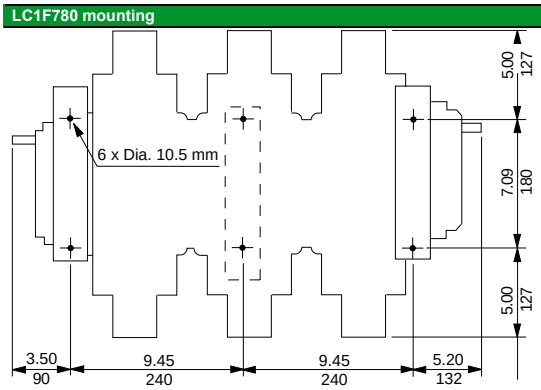



LC1F7804 mounting

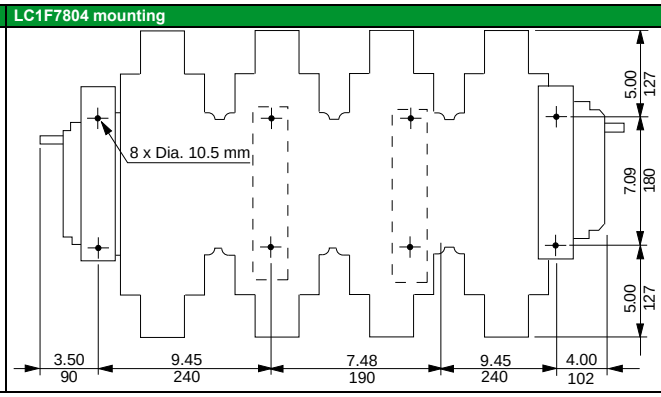

LC1 F1000, LC1 F1400, LC1 F1700 and LC1 F2100

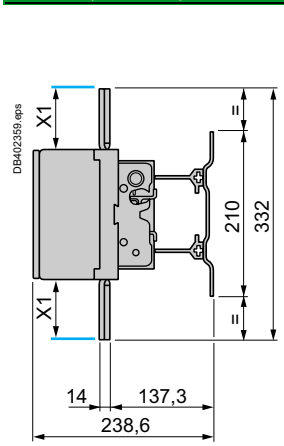

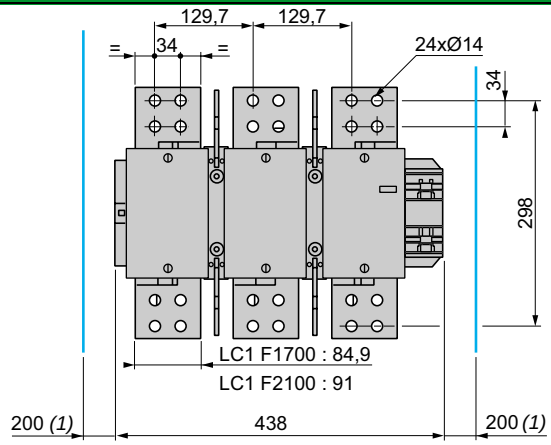

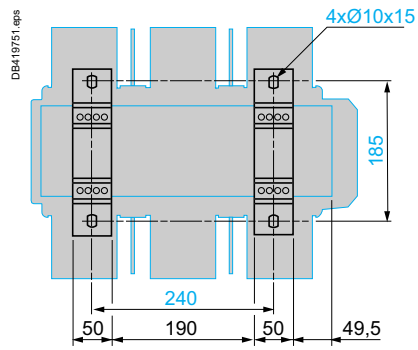

X1: Minimum clearance according to the operational voltage and the breaking capacity.
1) Minimum distance required for coil removal.


Voltage (V)	200–500 V	690–1000 V
X1 in mm	90	100

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca Reversing Contactor Dimensions

Table 17.122: Reversing Contactor Dimensions


LC2D09–D38
2 x LC1D09 to D38

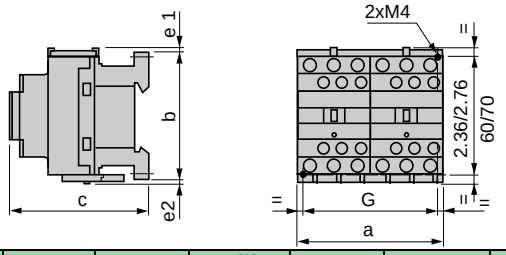

LC2 or 2 x LC1	a	b	c [2]	e1	e2	G
	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)
D09 to D18 (AC Coil)	3.54 (90)	3.03 (77)	3.38 (86)	0.16 (4)	0.06 (1.5)	3.14 (80)
D093 to D123 (AC Coil)	3.54 (90)	3.9 (99)	3.38 (86)	—	—	3.14 (80)
D09 to D18 (DC Coil)	3.54 (90)	3.03 (77)	3.74 (95)	0.16 (4)	0.06 (1.5)	3.14 (80)
D093 to D123 (DC Coil)	3.54 (90)	3.9 (99)	3.74 (95)	—	—	3.14 (80)
D25 to D38 (AC Coil)	3.54 (90)	3.34 (85)	3.62 (92)	0.35 (9)	0.20 (5)	3.14 (80)
D183 to D383 (AC Coil)	3.54 (90)	3.9 (99)	3.62 (92)	—	—	3.14 (80)
D25 and D32 (DC Coil)	3.54 (90)	3.34 (85)	3.98 (101)	0.35 (9)	0.20 (5)	3.14 (80)
D183 to D383 (DC Coil)	3.54 (90)	3.9 (99)	3.98 (101)	—	—	3.14 (80)

e1 and e2: includes cabling


LC2DT20 to DT40
2 x LC1 DT20 to DT40

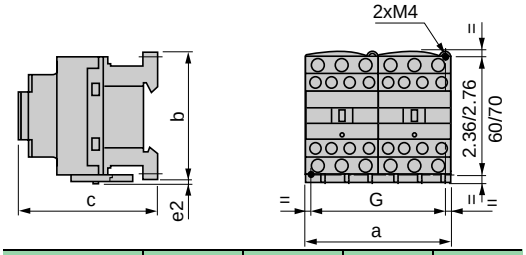


LC2 or 2 x LC1	a	b	c	G
	in. (mm)	in. (mm)	in. (mm)	in. (mm)
DT20 and DT25 (AC Coil)	3.54 (90)	3.34 (85)	3.62 (92)	3.14 (80)
DT32 and DT40 (AC Coil)	3.54 (90)	3.58 (91)	3.9 (99)	3.14 (80)
DT20 and DT25 (DC Coil)	3.54 (90)	3.34 (85)	4 (102)	3.14 (80)
DT32 and DT40 (DC Coil)	3.54 (90)	3.58 (91)	4.29 (109)	3.14 (80)

c, e: includes cabling

LC2D40A to D65A
2 x LC1D40A to D65A

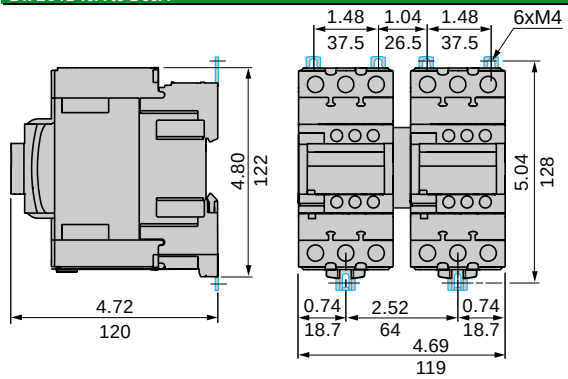


LC2D80 and D95
2 x LC1D80 and D95 (AC Coil)

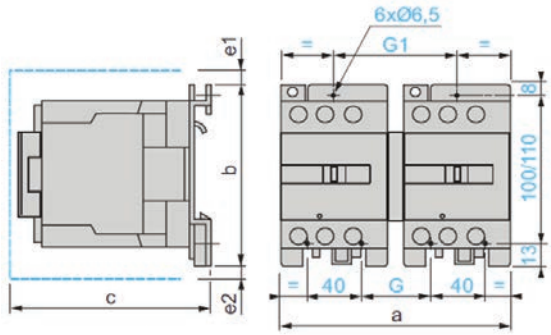

LC2 or 2 x LC1	a	b	c	e1	e2	G	G1
	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)
D80 and D95	7.17 (182)	5 (127)	6.22 (158)	0.51 (13)	—	2.24 (57)	3.78 (96)
D80004	8.15 (207)	5 (127)	6.22 (158)	—	0.79 (20)	2.8 (71)	4.37 (111)

c, e1, and e2: includes cabling

2 x LC1D80 and D95 (DC Coil)

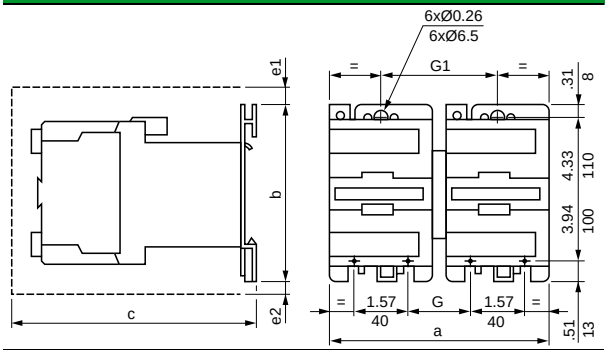


2 x LC1	a	b	c	e1	e2	G	G1
	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)
D80 and D95	8.15 (207)	5.0 (127)	8.46 (215)	0.51 (13)	0.79 (20)	3.78 (96)	4.37 (111)

c, e1 and e2: includes cabling.

[2] With safety cover, without add-on block.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

2 x LC1D115A and D150A




© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca Open Starter Dimensions


Table 17.123: TeSys Deca Thermal Overload Relay Dimensions, in. (mm)

LRD01-35
Direct mounting beneath contactors with screw clamp connections

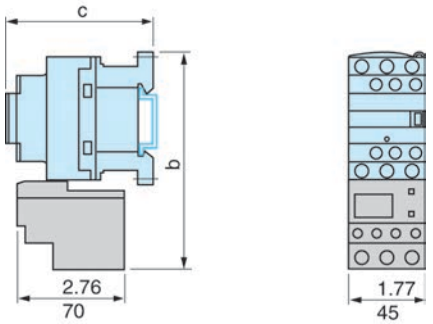


LC1●	D09–D18	D25–D38
b	4.84 (123)	5.39 (137)
c	See page 17-43	

LRD04L-32L
Direct mounting beneath contactors with screw clamp connections

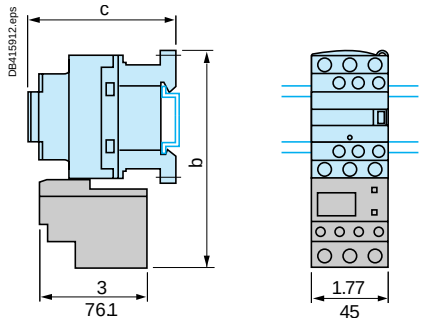


LC1●	D09–D18	D25–D38
b	4.84 (123)	5.39 (137)
c	See page 17-43	

LR9D01, 02, 08, and 32




LC1●	D09–D18	D25–D38
b	5.12 (130)	5.51 (140)
c	See page 17-43	See page 17-43

LRD313–365
Direct mounting beneath LC1D40A to D65A with screw clamp connectionsor EverLink connectors

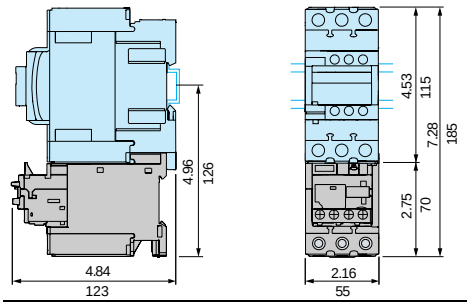


LRD33●●●
Direct mounting beneath contactors
LC1D80 to D95

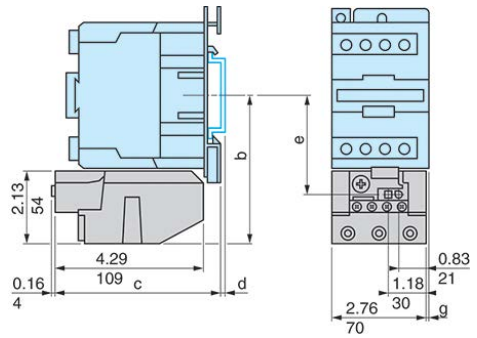


AM1●	DL201			DL200	
d	0.28 (7)			0.67 (17)	
	b	c	e	g (3P)	g (4P)
AC Control Circuit					
LC1D80	4.55 (115.5)	4.88 (124)	3.03 (76.9)	0.37 (9.5)	0.87 (22)
LC1D95	4.55 (115.5)	4.88 (124)	3.03 (76.9)	0.37 (9.5)	—
DC Control Circuit					
LP1D80	4.55 (115.5)	7.06 (179.4)	3.03 (76.9)	0.37 (9.5)	0.87 (22)

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

LRD4●●●*[3]*
Direct mounting beneath contactors LC1D115A and D150A



LR9G115–LR9G225*[3]*
Direct mounting beneath contactors LC1D115A and D150A




[3] For additional specifications and selection information, see catalog MKTED210011EN.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


TeSys™ Giga Contactors (Dimensions)

Table 17.124: Standard Version LC1G630...800 TeSys™ Giga High Power Contactors

3-Pole

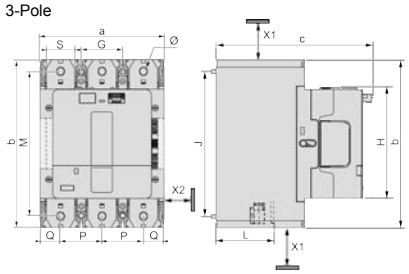

4-Pole —

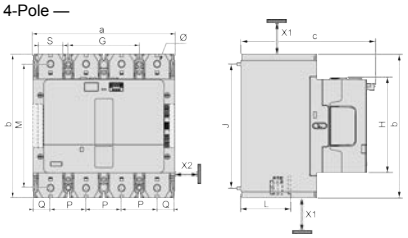

All dimensions are in mm.

X1 (mm) = Minimum electrical clearance.

LC1G115…800, up to 1000 V: 40 mm.

X2 (mm) = Minimum electrical clearance according to operating voltage inside metallic cabinets/adjacent installation of contactors.

LC1G115…800, up to 600 V: 5 mm.

Table 17.125: Standard Version — 3-Pole

a	b	c	G	J	M	H	L	P	Q	S	Ø
210	284	265	70	242	244	192	107	70	35.3	48	13

Table 17.126: Standard Version — 4-Pole

a	b	c	G	J	M	H	L	P	Q	S	Ø
280	284	265	140	242	244	192	107	70	35.3	48	13


Table 17.127: Mechanical Interlock

Description		Reference
Mechanical Interlock (between the same frame sizes)	LC1G115 to 225 (3-Pole and 4-Pole)	LA9G970
	LC1G265 to 500 (3-Pole and 4-Pole)	
	LC1G630 to 800 (3-Pole)	LA9G973
Mechanical Interlock (between different frame sizes)	LC1G265 to 500 and LC1G115 to 225 (3-Pole and 4-Pole)	LA9G971
	LC1G630 to 800 and LC1G265 to 500 (3-Pole)	LA9G972


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Table 17.128: Advanced Version LC1G630...800 TeSys™ Giga High Power Contactors

3-Pole

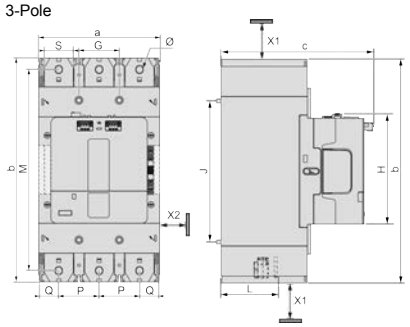

4-Pole

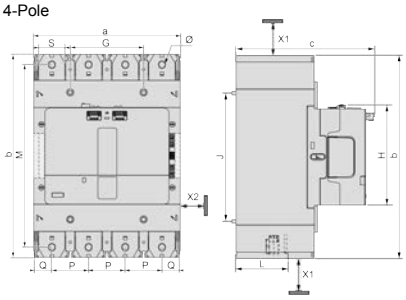

All dimensions are in mm.

X1 (mm) = Minimum electrical clearance.

LC1G115…800, up to 1000 V: 40 mm.

X2 (mm) = Minimum electrical clearance according to operating voltage inside metallic cabinets/adjacent installation of contactors.

LC1G115…800, up to 600 V: 5 mm

Table 17.129: Advanced Version — 3-Pole

a	b	c	G	J	M	H	L	P	Q	S	Ø
210	388.5	265	70	242	346.5	192	107	70	35.3	48	13


Table 17.130: Advanced Version — 4-Pole

a	b	c	G	J	M	H	L	P	Q	S	Ø
280	388.5	265	140	242	346.5	192	107	70	35.3	48	13


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca Thermal Overload Relay Dimensions


LRD01–35
Independent mounting on 1.97 in. (50 mm) centers or on rail AM1DP200 or DE200

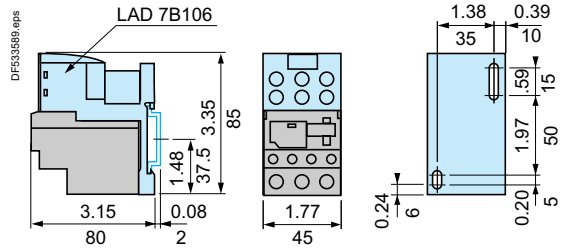


Independent mounting on 4.33 in. (110 mm) centers

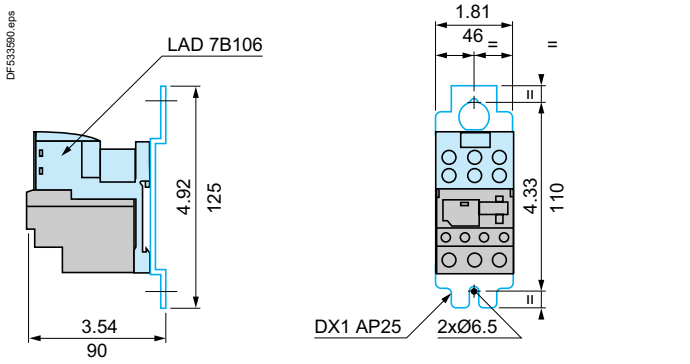

LRD04L–32L
Independent mounting on 1.97 in. (50 mm) centers or on rail AM1DP200 or DE200

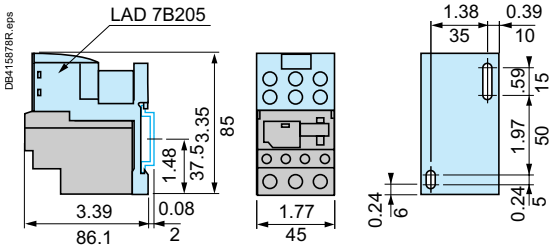


Independent mounting on 4.33 in. (110 mm) centers

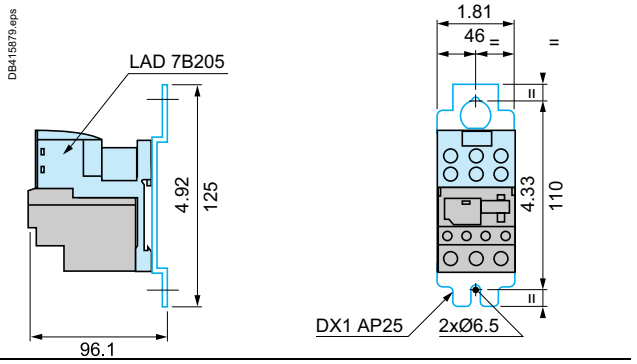

AM1	DP200	DE200
d	0.08 (2)	0.37 (9.5)


LRD313–365
Mounting on rail AM1D•200 or ED200

With terminal block LAD96560

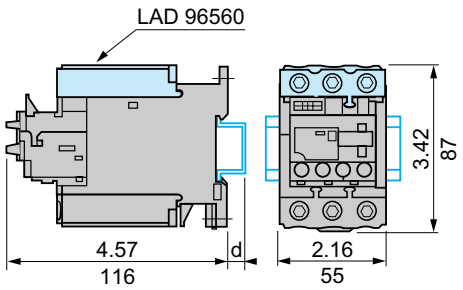


Panel mounting

Outgoing terminal block not shown




(1) 2 elongated holes Ø 4.2 x 6.

Mounted on plate AM1P

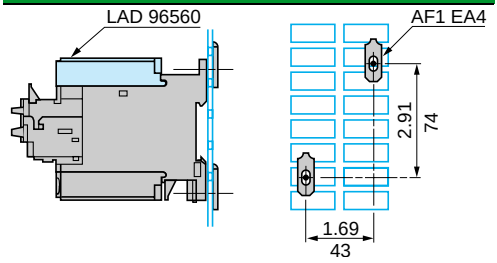

AM1	DP200	DE200	ED200
d	0.08 (2)	0.37 (9.5)	0.37 (9.5)


LRD01–35 and LRD313–365
Remote tripping or electrical reset




(1) Can only be mounted on RH side of relay

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


LR9D01–D32

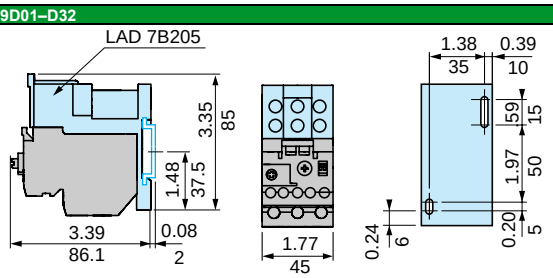

LR9D110S

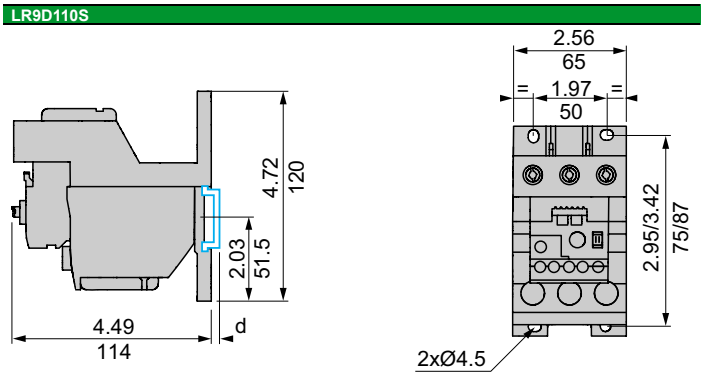


LRD3●●● and LR2D35●●
Independent mounting on 1.97 in. (50 mm) centers or on rail AM1DP200 or DE200

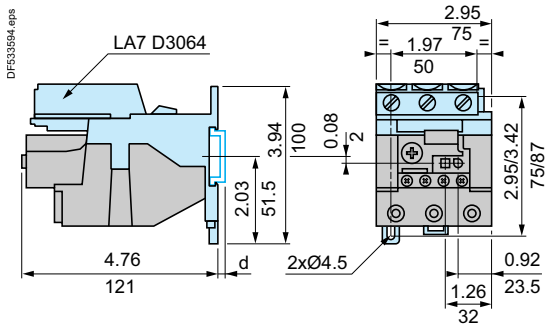


AM1	DP200	DE200
d	0.08 (2)	0.37 (9.5)

LRD3●●●, LR2D35●●, and LR9D5
Remote tripping or electrical reset

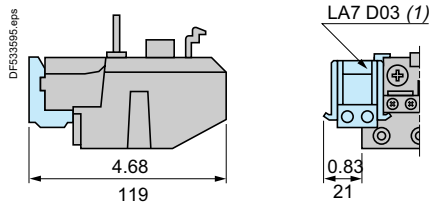

(1) Can be mounted on RH or LH side of relay LRD3●●●, LR2D35●●, or LR9D


LRD3●●●
Adapter for door-mounted operator

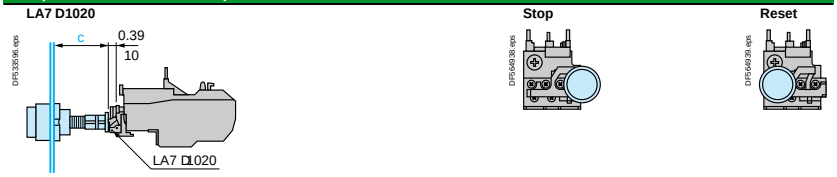

c: adjustable from 0.67 to 4.72 (17 to 120)


LRD, LRD313–365, LRD04–32L, LR9D5, and LR9D6
"Reset" by flexible cable

LA7D305 and LAD7305
Mounting with cable straight

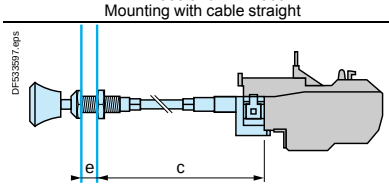

e: up to 1.18 (20)
c: up to 21.65 (550)

Mounting with cable bent




e: up to 1.18 (20)

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Giga Overload Relays (Dimensions)

Table 17.131: TeSys™ Giga Overload Relays, Dimensions — LR9G115...630

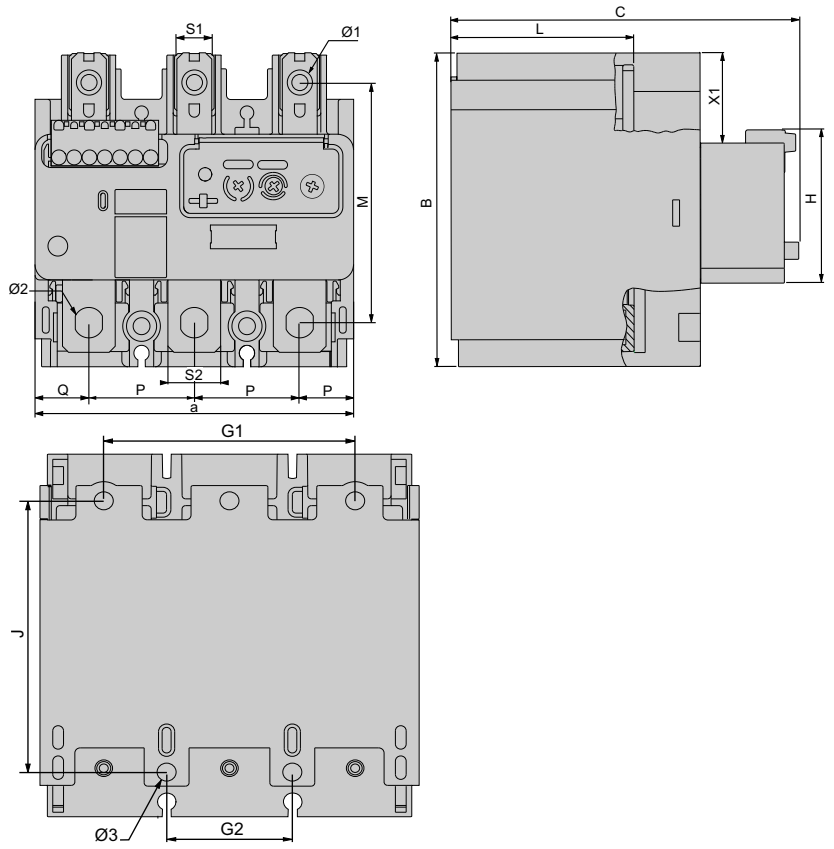


LR9G	115...225	500	630
a	105.7	140	210
b	109.55	115.65	149.45
c	126.2	139.2	185.9
G1	70	119.3	186.2
G2	35	45	70
J	80.1	68.25	87
M	78	83	100
H	52	47	47
L	66	79	107
P	35	45	70
Q	18	25	35
S1	11.5	22.5	22.5
S2	17.5	30.5	50
Ø1	8.3	10.6	13
Ø2	9	10.6	13
Ø3	5.3	5.3	8.5
X1	30	33	50

© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca Non-Combination Starter Dimensions

Table 17.132: Non-Combination Starter Dimensions *[4]*

Non-Combination Starters

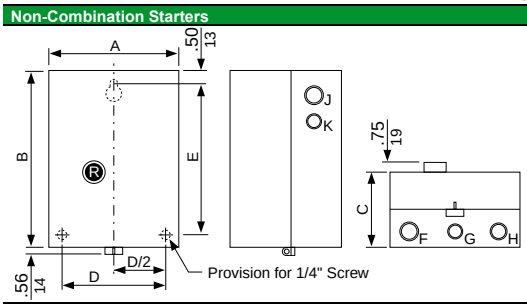

		Type 1										Type 12/3R	
Non-Reversing	Reversing	A	B	C	D	E	F	G	H	J	K	D	E
D09-32	—	6.77	10.04	6.25	5.38	9.00	1–1.25	0.5–0.75	—	1–0.25	0.5–0.75	5.38	11.37
D40-65	D09-32	8.66	10.83	7.21	7.25	9.75	1.25–1.5	0.5–0.75	1–1.25	1–0.25	0.5–0.75	5.38	12.15


[4] **All dimensions in inches.**

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


TeSys™ K Contactor Dimensions

Table 17.133: TeSys K Contactor Dimensions


LR2K
Direct mounting under the contactor

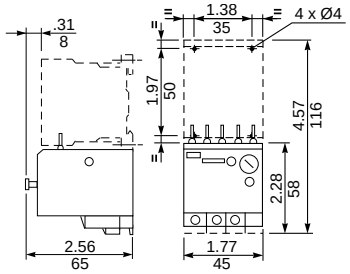


Separate mounting with LA7-K0064 terminal block on 35 mm rail (AM1DP200 or AM1DE200)

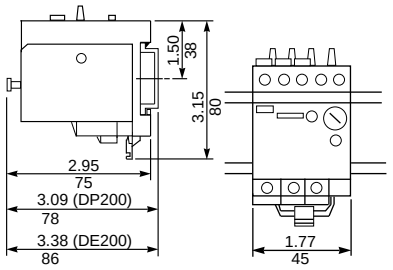


Three-phase




Wiring Scheme

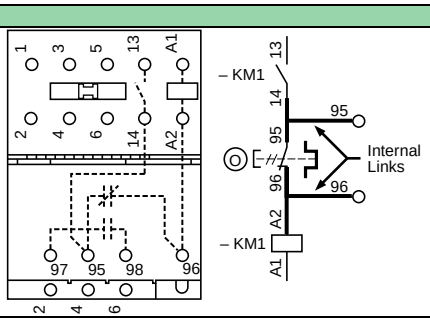


LC1, LP1, LP4K
Mini-contactors
On baseplate

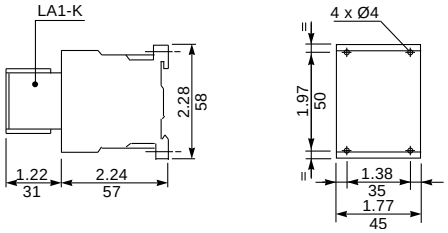


LC2, LC8, LP2, LP5K
Reversing mini-contactors
On baseplate

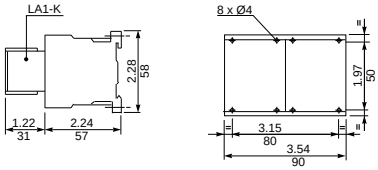


On AM1DP200 or DE200 rail (35 mm)

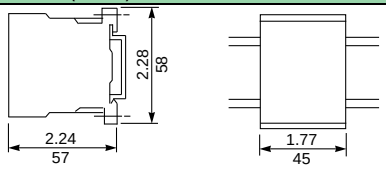


On AM1DP200 or DE200 rail (35 mm)



On printed circuit board




On printed circuit board for reversing contactors or 2 mini-contactors side-by-side

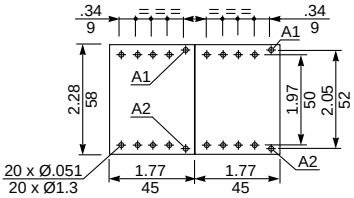


LA2KT

Electronic time delay contact blocks



On mini-contactors or reversing mini-contactors



© 2026 Schneider Electric
All Rights Reserved
2/17/2026


TeSys™ Ultra Starter Dimensions

Table 17.134: TeSys Ultra Starter Dimensions


Starter Controllers

Non-Reversing *[5]*

Rail Mounting




Screw Mounting




Reversing

Rail Mounting




Screw Mounting




NOTE: Minimum electrical clearance:
X1: 35 mm for Ue = 440 V; and 70 mm for Ue = 500 and 690 V
X2: 0


Reversing Block for Mounting Separately from Power Base




Rail Mounting



Screw Mounting




Limiter Disconnector LUALB1 *[5]*



Door interlock Mechanisms

LU9APN43 and LU9APN44

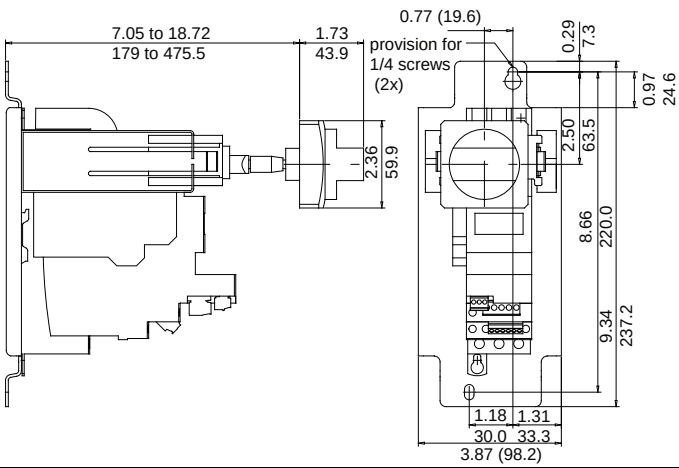

[5] Maximum depth (with Modbus™ communication module)


© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Altistart™ U01 and TeSys™ Ultra Soft Starters, Mounting

Table 17.135: Altistart U01 and TeSys Ultra Soft Starters


TeSys Ultra Combination (non-reversing power base) and ATSU01N212LT

Mounting on (35 mm) rail with VW3 G4104 connector

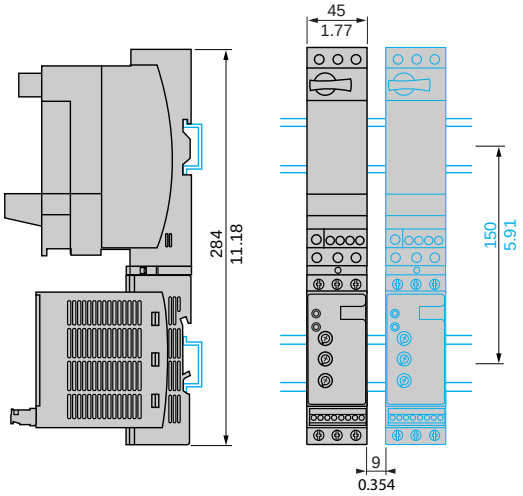


TeSys Ultra Combination (non-reversing power base) and ATSU01N222LT to ATSU01N232LT

Mounting on (35 mm) rail with VW3G4104 connector

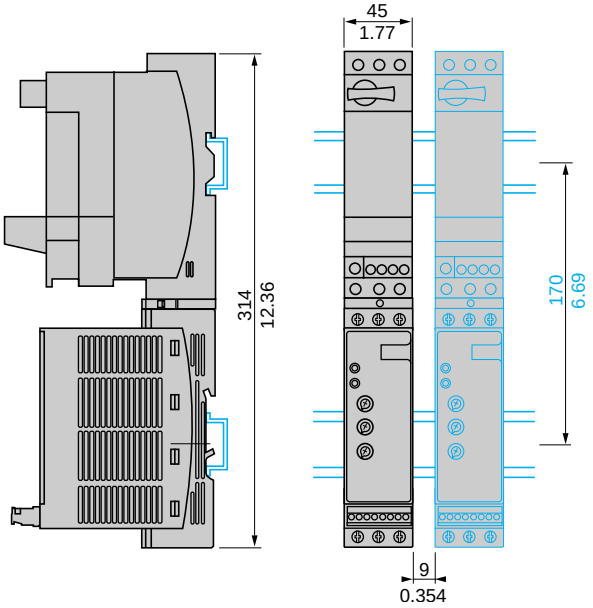


TeSys Ultra Combination (non-reversing or reversing power base) and ATSU01N2206LT to ATSU01N212LT

Side-by-side mounting

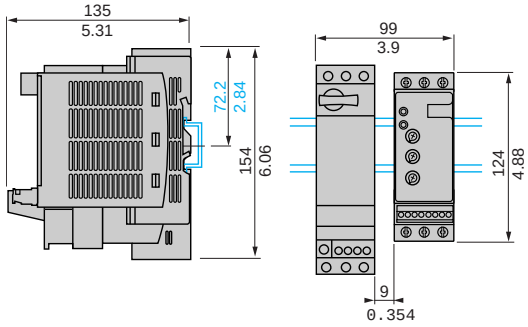


TeSys Ultra Combination (non-reversing or reversing power base) and ATSU01N222LT to ATSU01N232LT

Side-by-side mounting

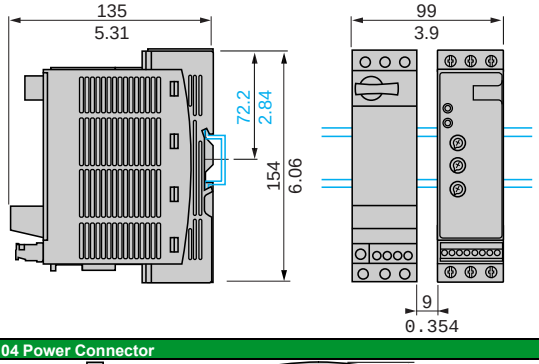





VW3G4104 Power Connector




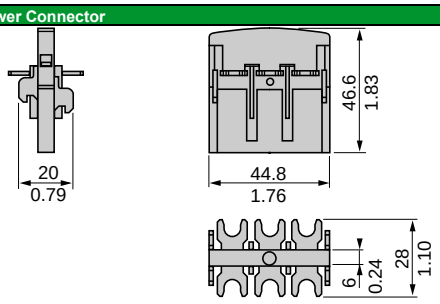






© 2026 Schneider Electric
All Rights Reserved
2/17/2026

TeSys™ Deca GV2 and GV3 Manual Starter and Protector Dimensions

Table 17.136: TeSys™ Deca GV2 and GV3 Manual Starter and Protector Dimensions



GV2M	GV2AD, AM, AN, AU, AS, AX	GV2AE	Mounting of GV2M
			On 35 mm ⊔ rail C = 78.5 mm (3.09") on AM1DP200 (35 x 7.5 mm) C = 86 mm (3.39") on AM1DE200, ED200 (35 x 15 mm) 

GV2P	GV2AD, AM, AN, AU, AS, AX	GV2AK00	Mounting of GV2P
			On 35 mm ⊔ rail C = 98.5 mm (3.88") on AM1DP200 (35 x 7.5 mm) C = 106 mm (4.17") on AM1DE200, ED200 (35 x 15 mm) 

GV2AF4 + LAD31		GV2P + GV2GH7	GV2P + GV2GH7 + LC1D TeSys Deca contactor
Combination GV2ME + LC1D TeSys Deca range contactor	Combination GV2P + LC1D TeSys Deca range contactor	for UL 508 Type E application	for UL 508 Type E application
			

GV2ME +	LC2D09 to D18	LC2D25 and D32
b	7.4 (188.6)	7.8 (199)
c1	3.6 (92.7)	3.9 (99)
c	3.9 (98.2)	4.11 (104.5)
d1	3.9 (98.3)	3.9 (98.3)
d	4.1 (103.8)	1.4 (103.8)

GV2P +	LC2D09 to D18	LC2D25 and D32
b	6.61 (168.1)	7.9 (199.5)
c1	4.6 (116.8)	4.6 (116.8)
c	4.8 (122.3)	4.8 (122.3)
—	—	—
—	—	—

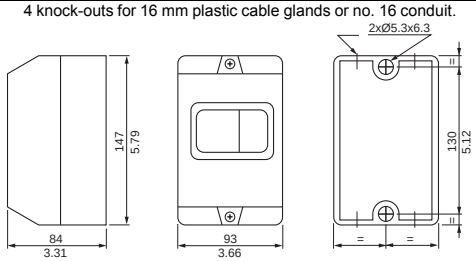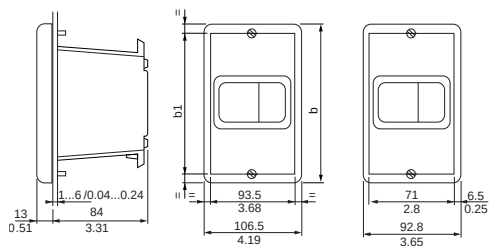Surface mounting enclosure GV2MC0●	Flush mounting enclosure GV2MP0● (bracket cut-out)
4 knock-outs for 16 mm plastic cable glands or no. 16 conduit. 	


GV2	b		b1	
	in.	mm	in.	mm
MP01, MP02	5.51	140	5.00	127
MP03, MP04	5.24	133	4.61	117

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


Table 17.137: TeSys™ Deca GV2 and GV3 Manual Starter and Protector Dimensions (cont'd)

Dimensions (mm)


GV2M with GK2AF01 and LC1K




GV2M with GV2AF01 and LC1K




GV2M with GV2AF01 and LC2K




Adapter Plate GK2AF01

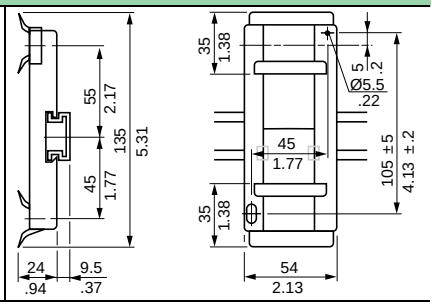


Mounting external operator GV2AP0●

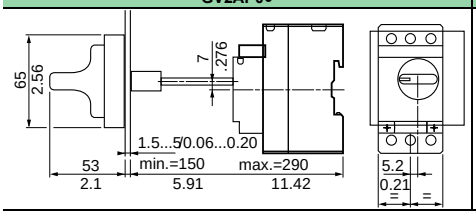


Door cut-out




GV2M on panel with GV2AF02 adapter plate



7.5 mm height compensation plate GV1F03




Sets of bus bars, GV2G445, GV2G454, GV2G472 with terminal block GV2G05

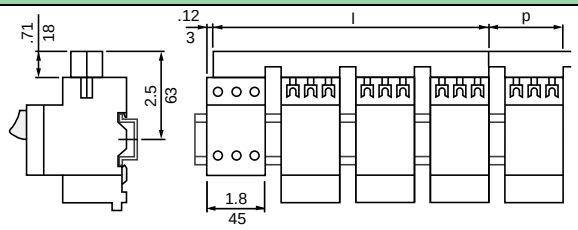


		I	P
GV2G445	0.16 x 1.8 in. (4 x 45 mm)	7.0 in. (179 mm)	1.8 in. (45 mm)
GV2G454	0.16 x 2.1 in. (4 x 54 mm)	8.1 in. (206 mm)	2.1 in. (54 mm)
GV2G472	0.16 x 1.8 in. (4 x 45 mm)	10.2 in. (260 mm)	2.8 in. (72 mm)

Sets of bus bars with terminal block GV1G09

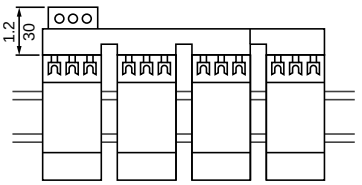


GV2G245	0.08 x 1.8 in. (2 x 45 mm)	3.5 in. (89 mm)
GV2G254	0.08 x 2.1 in. (2 x 54 mm)	3.9 in. (98 mm)
GV2G272	0.08 x 2.8 in.(2 x 72 mm)	4.6 in. (116 mm)
GV2G354	0.12 x 2.1 in. (3 x 54 mm)	6.0 in. (152 mm)

Sets of bus bars GV2G245, GV2G254, GV2G272




GV3P

Dimension




X1 = Electrical clearance (ISC max)
40 mm for Ue < 500 V; 50 mm for Ue < 690 V

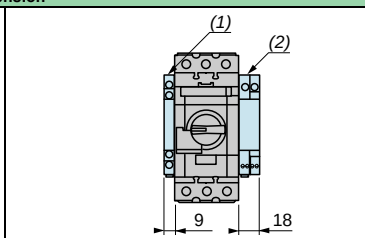


Blocks GV AN●●, GV AD●●, GV AM11
Block GV3 AU●● and GV3 AS●●


Mounting on rail AM1 DE200 or AM1 ED201




Mounting on panel, using M4 screws

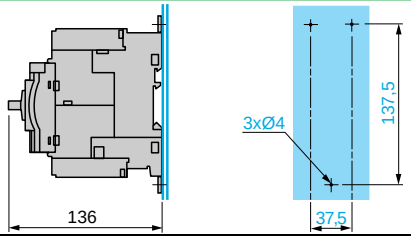

Mounting on pre-slotted mounting plate AM1PA

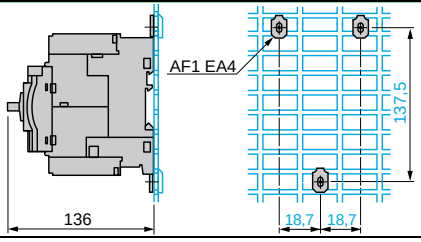




NOTE: Leave a space of 9 mm between 2 manual motor protectors: either an empty space or side-mounting add-on contact blocks.
Horizontal mounting is possible: please consult your regional sales office.

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


TeSys Power Motor Circuit Breakers Dimensions

BV4 With Toggle

With EverLink Connector

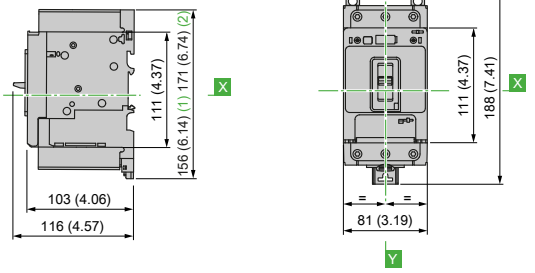


With Crimp Lug Connector

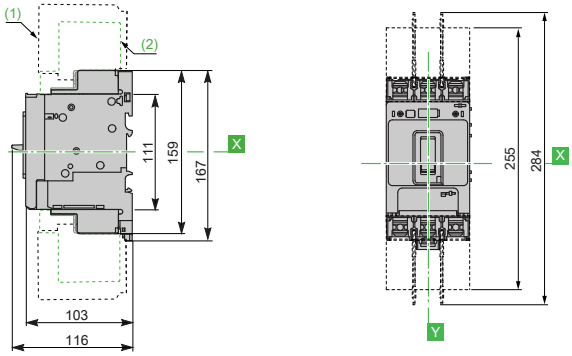


GV4PB


With EverLink Connector

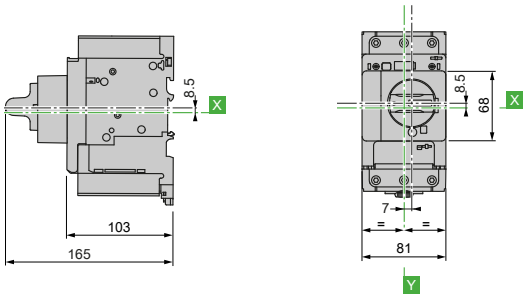

With Crimp Lug Connector

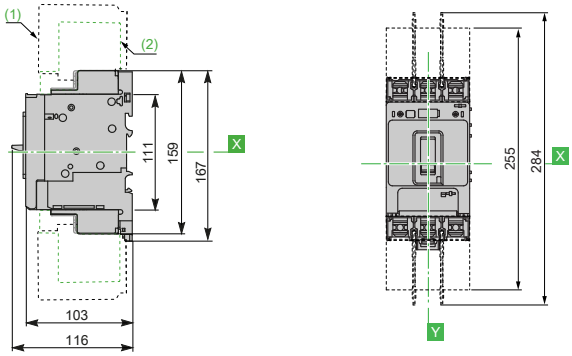

SDx Module




BV4 and GV4PB With Extended Rotary Handle

Front extended rotary handle GV4APN01, GV4APN02, GV4APN04



Front and side extended rotary handle, door/side panel cut-out

Front and side extended rotary handle	IP65, door panel cut-out	IP54, door/side panel cut-out

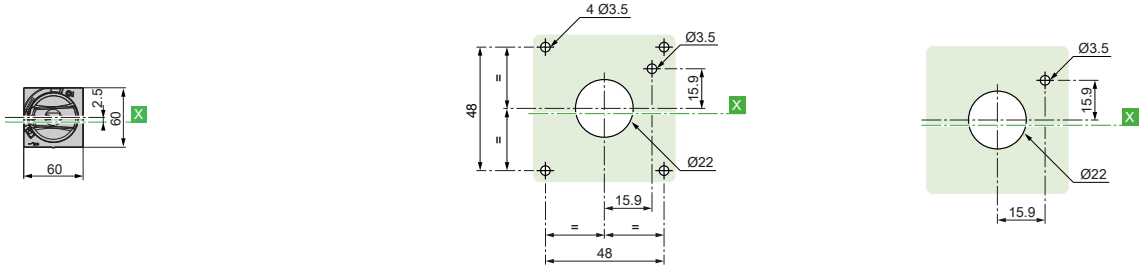


17 CONTACTORS AND STARTERS-IEC

© 2026 Schneider Electric
All Rights Reserved
2/17/2026


Table 17.138: GV5PB and GV6PB Motor Protective Circuit Breakers

Circuit Breaker Frame	Dimensions — Inches						
	A	B	C	D	E	F	G
GV5PB150	6.40	4.12	2.87	4.36	0.74	1.92	1.38
GV5PB250	7.52	4.12	2.87	5.00	1.30	4.92	1.38
GV6PB	13.38	5.51	3.75	6.61	2.22	7.87	1.77

GV5PB

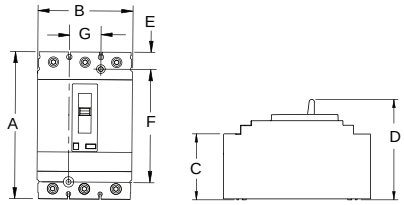

GV6PB



© 2026 Schneider Electric
All Rights Reserved
2/17/2026

Section 18

AC Drives and Soft Starters



Altivar™ 212



Altivar™ 320



Altivar™ 340



Altivar™ 680/980
Low Harmonic



Altivar™ 650



Altivar™ 930



Altistart™ 22
Soft Starters



Altistart™ 480
Soft Starters

Drives Overview 18-2

- Open AC Drives 18-2
  - Overview of Altivar™ 12 18-2
  - Overview of Altivar™ 320 18-3
  - Overview of Altivar™ 340 18-4
  - Overview of Altivar™ Process 900 18-5
  - Overview of Altivar™ 212 and Altivar™ Process 600 18-6
- Open AC Soft Starters 18-7
  - Overview of Altistart™ 01 / 22 / 480 18-7
- Enclosed AC Drives and Soft Starters 18-8
  - Overview of S-Flex™ and Altistart™ Enclosed 22 / Enclosed 480 18-8
  - Overview of Altivar™ 680/980 Process, and 660/960 Process 18-9
- North American Drive Systems 18-10
  - Overview of Altivar™ Outdoor 630/930 18-10

AC Drives Selection Tables 18-10

- Altivar™ 212 18-10
- Altivar™ 12 18-12
- Altivar™ 320 18-13
- Altivar™ 340 18-15
- Altivar™ Process 630/650 18-16
- Altivar™ Process 930/950 18-17
- Altivar™ 600/900 Accessories 18-18

Enclosed Building Drives Selection Tables 18-19

- S–Flex™ 212 AC Drives 18-19

AC Soft Starters 18-20

- Altistart™ Soft Starters 18-20
  - Altistart™ 22 Soft Starters 18-20
  - Altistart™ 430 Soft Starters 18-21
  - Altistart™ 480 Soft Starters 18-23
  - Altistart™ 490 Soft Starters 18-24

Enclosed Soft Starter 18-26

- Enclosed Altistart™ 22 Motor Controllers 18-26

AC Drives and Soft Starter Support 18-28

- Support, Training, and Documentation 18-28

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altivar™ 12

Type of Motor Control		Simple Machines
Key Application/Market Segment		• Conveyors • Mixers • Gate control • Machine movement
Drives		**Altivar 12**
		
Distribution voltage ranges for 50/60 Hz line supply		Single-phase 100–120 V Single-phase 200–240 V Three-phase 200–230 V
Horsepower ratings for three-phase motors		1/4–1 hp, 115/230 V single-phase input 1/4–3 hp, 208/230 V single-phase input 1/4–5 hp, 208/230 V
Drives	Output frequency	0.5– 400 Hz
	Type of Control	
	Asynchronous motor	Sensorless flux vector control Kn2 quadratic ratio for pump and fan
	Synchronous motor	—
	Transient overtorque	150% to 170% of nominal motor torque
Functions Number of Functions		40
Number of I/O	Analog inputs	1
	Analog outputs	1
	Logic inputs	4
	Logic/Relay outputs	1 L.O., 1 N.O./1 N.C. relay contacts
Communication	Integrated	Modbus™
	Available as an option	—
Other Option Cards		—
Enclosure Rating		IP20
Standards and Certifications		EC/EN 61800-5-1, IEC/EN 61800-3 (Environments 1 and 2, categories C1 and C3) CE, UL, CSA, C-Tick, NOM, GOST

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altivar™ 320

Type of Motor Control		Complex Machines	
Key Application/Market Segment		• Material handling • Packaging • Textiles • Mechanical actuators • Material working • Hoisting	
Drives		**Altivar 320●●●●●C**	**Altivar 320●●●●●B**
			
Distribution voltage ranges for 50/60 Hz line supply		Single-phase 200–240 V Three-phase 200–240 V Three-phase 380–500 V Three-phase 525–600 V	Single-phase 200–240 V Three-phase 380–500 V
Horsepower ratings for three-phase motors		1/4–3 hp, 200/240 V single-phase input 1/4–20 hp, 200/240 V three-phase input 1/2–5 hp, 380/500 V three-phase input 1–20 hp, 525/600 V three-phase input	1/4–3 hp, 200/240 V single-phase input 1/2–20 hp, 380/500 V three-phase input
Drives	Output frequency	0.1–599 Hz	
	Type of Control		
	Asynchronous motor	U/F ratio (2 points, 5 points, energy saving, quadratic), Flux vector control without sensor (Standard and Energy saving)	
	Synchronous motor	Vector control without sensor	
	Transient overtorque	Up to 200% Tn in an open loop	
Functions Number of Functions		>150 + ATVLogic	
Number of I/O	Analog inputs	3: 1 Bipolar differential ±10 V, 1 with Voltage ±10 V, and 1 with current (0–20 mA)	
	Analog outputs	1: Configurable as voltage (0–10 V) or current (0–20 mA)	
	Logic inputs	6: 4 configurable (positive or negative logic), 1 with PTC probe input, 1 x 20 kHz pulse input	
	Logic/Relay outputs	Logic output—1: Configurable as voltage or current Relay outputs—2: 1 with NO/NC contacts and 1 with NC contact	
Communication	Integrated	Single port compatible with CANopen and Modbus serial line	
	Available as an option	Ethernet IP; Modbus TCP; CANopen RJ45 Daisy Chain, Sub-D, and screw terminals; PROFINET; Profibus DP V1; EtherCAT; DeviceNet; POWERLINK	
Other Option Cards		—	
Enclosure Rating		IP20	IP20
Standards and Certifications		IEC 61800-5-1; IEC 61800-3 (environments 1 and 2, category C2); UL61800–5–1; EN 954–1 category 3; ISO/EN 13849–1/-2 category 3 (PLe); IEC 61508 (parts 1 & 2) SIL 2; EN 50495E; IEC 60721–3–3, classes 3C3 and 3S2; CSA C22.2 No. 274; CE, UL, CSA, RCM, EAC, ATEX	

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altivar™ 340

Type of Motor Control		Complex Machines		
Key Application/Market Segment		• Material handling • Packaging • Textiles • Mechanical actuators • Material working • Hoisting		
Drives		**Altivar 340●●●●●●**	**Altivar 340●●●N4E**	
				
Distribution voltage ranges for 50/60 Hz line supply		Three-phase 380–480 V		
Horsepower ratings for three-phase motors		1–30 hp	1–30 hp	40–100 hp
Drives	Output frequency	0.1–599 Hz		
	Type of Control			
	Asynchronous motor	Voltage vector control without sensor, Current vector control with sensor, U/F 5 points, Energy saving mode Adaptive Cascade Vector Control (ACVC)		
	Synchronous motor	Open-loop synchronous motor control (with and without stall monitoring), closed-loop synchronous motor control, synchronous reluctance motor control		
	Transient overtorque	Up to 200% Tn in an open loop		Up to 180% Tn in open or closed loop control
Functions Number of Functions		>150		>150
Number of I/O	Analog inputs	2: 1 configurable (voltage/current/thermal probe) and 1 with bipolar differential ±10 Vdc		3: Configurable as voltage (0–±10 Vdc) or current (0–20 mA / 4–20 mA), including 2 for probes (PTC, PT100, PT1000, or KTY84)
	Analog outputs	1: Configurable as voltage (0–10 Vdc) or current (x–20 mA)		2: Configurable as voltage (0–10 Vdc) or current (x–20 mA)
	Logic inputs	5 + 2: 5 configurable (positive or negative logic) and 2 which can be configured as digital input or output		8: Configurable (positive or negative logic)
	Logic/Relay outputs	Logic outputs—2: Assignable Relay outputs—2: 1 with NO/NC contacts and 1 with NC contacts		Logic outputs—1: Assignable Relay outputs—3: 1 with NO/NC and 2 with NO contacts
Communication	Integrated	2 ports for Modbus serial line	Dual port for Ethernet IP/Modbus TCP, 2 ports for Modbus serial line	
	Available as an option	• CANopen RJ45 Daisy Chain • Sub-D and screw terminals • PROFINET • Profibus DP V1 • EtherCAT • DeviceNet • CIP safety options VW3A3809		
Other Option Cards		—		
Enclosure Rating		IP20	IP20	IP20
Standards and Certifications		UL61800-5-1, EN/IEC 61800-3, Environment 1 category C2, EN/IEC 61800-3, Environment 2 category C3, EN/IEC 61800-5-1, IEC 60721-3-3, classes 3C3 and 3S3, IEC 61508, IEC 13849-1, Reach/RoHS, CSA C22.2 No. 274 Ce, UL, CSA, TUV, RoHS, EU, China		

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altivar™ Process 900

Type of Motor Control		
Key Application/Market Segment		• Material handling • Artificial lift • High performance movement and regulation • Lifts, cranes, hoists • Extruders, shredders • Presses • Positive displacement pumps
Drives		**Altivar Process 900** *New!*
		
Distribution voltage ranges for 50/60 Hz line supply		Three-phase 200–240 V Three-phase 380–480 V Three-phase 500–600 V Three-phase 500–690 V
Horsepower ratings for three-phase motors		1–100 hp, 208/230 V 1–500 hp, 400/480 V 1–100 hp, 400/480 V (ATV950) 3–100 hp, 500/600 V 3–125 hp, 500/690 V
Drives	Output frequency	0.5–599 Hz
	Type of Control	
	Asynchronous motor	Voltage vector control, currrent vector control closed loop, 5-segment V/F profile, energy saving, synchronous reluctance motor, ACVC – Adaptive Cascade Vector Control
	Synchronous motor	Open loop synchronous motor, closed-loop synchronous motor, open-loop synchronous motor variable torque
	Transient overtorque	Normal duty: 120% overcurrent for 60 s. Heavy duty: 150% overcurrent for 60 s.
Functions Number of Functions		45+
Number of I/O	Analog inputs	3–5
	Analog outputs	2
	Logic inputs	8–14
	Logic/Relay outputs	3–6
	Safety function inputs	2
Communication	Integrated	Modbus™ and Ethernet IP /Modbus TCP dual port
	Available as an option	- CANopen: Daisy Chain RJ45, Sub-D and screw terminals - ProfiNet - Profibus DP V1 - DeviceNet - EtherCAT - CIP Safety options VW3A3809
Other Option Cards		I/O extension cards, Encoder input cards, Resolver input cards
Enclosure Rating		Type 1, Type 12 (ATV950 only)
Standards and Certifications		UL 508C, UL File E116875, CSA, TUV, REACH, UL50, EN/IEC 61800-3, EN/IEC 61800-3 environment 1 category C2, EN/IEC 61800-3 environment 2 category C3, EN/IEC 61800-5-1, IEC 61000-3-12, IEC 60721-3, IEC 61508

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altivar™ 212 and Altivar™ Process 600

Type of Motor Control		Centrifugal Pumps and Fans	Pumps and Fans
Key Application/Market Segment		• Pumps • Fans	• Pumps • Fans • General purpose applications in: – Water & Wastewater – Oil & Gas – Mineral, Mining & Metals – Food & Beverage
Drives		**Altivar 212**	**Altivar Process 600** *New!*
			
Distribution voltage ranges for 50/60 Hz line supply		Three-phase 200–240 V Three-phase 380– 480 V	Three-phase 200–240 V Three-phase 380–480 V Three-phase 500–600 V Three-phase 500–690 V
Horsepower ratings for three-phase motors		30–40 hp, 208/230 V 1–100 hp, 400/480 V	1–100 hp, 208/230 V 1–500 hp, 400/480 V 1–100 hp, 400/480 V (ATV650) 3–100 hp, 500/600 V 3–125 hp, 500/690 V
Drives	Output frequency	0–200 Hz	0.1–500 Hz
	Type of Control		
	Asynchronous motor	Volts per hertz or sensorless flux vector control	Voltage/frequency: quadratic, 2 point or 5 points, or optimized for energy savings
	Synchronous motor	Permanent magnet motor control without speed feedback	Vector control for permanent magnet motors
	Transient overtorque	Transient overload: 110% of the nominal drive current for 60 seconds	Normal Duty: 110% of the nominal motor torque for 60 s. Heavy Duty: 150% of the nominal motor torque for 60 s.
Functions Number of Functions		50	>30 pump dedicated functions, additional for fan and material handling applications
Number of I/O	Analog inputs	2	3–5
	Analog outputs	1	2
	Logic inputs	3	6–12
	Logic/Relay outputs	2: 1 N.O./1 N.C. and 1 N.O. relay contacts	3–6
	Safety function inputs	—	2
Communication	Integrated	Modbus™, Apogee P1, BACnet, Metasys® N2	Modbus/Ethernet TCP and Modbus Serial Link
	Available as an option	- LonWorks	• EtherNet/IP and Modbus/TCP Dual Port • EtherNet/IP and Modbus/TCP Dual Port with MultiVFD • BACnet MS/TP • BACnet MS/TP (supporting Multipump applications) • CANopen: Daisy Chain RJ45, Sub-D, and Screw Terminals • ProfiNet • Profibus DP V1 • DeviceNet
Other Option Cards		—	I/O extension cards Multipump cards VW3A3712
Enclosure Rating		IP20, Type 1 with optional kit, Type 12 @460 Vac	Type 1, Type 12 (ATV650 only)
Standards and Certifications		EN 50178, IEC/EN 61800-3, EN 55011, 55022: class A, class B with option, CE, UL, C-TICK, N998, UL 1995 Plenum-rated AHRI Certified	UL 508C, UL File E116875, CSA, TUV, REACH, UL50, EN/IEC 61800-3, EN/IEC 61800-3 environment 1 category C2, EN/IEC 61800-3 environment 2 category C3, EN/IEC 61800-5-1, IEC 61000-3-12, IEC 60721-3, IEC 61508

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altistart™ 01 / 22 / 480

Type of Motor Control		Simple Machines	Normal-duty Machines	Heavy-duty Machines
Key Application/Market Segment		• Conveyors • Mixers • Gate control • Machine movement • Small pumps and fans • Positive displacement pumps	• Pumps • Fans • Turbines • Compressors • Conveyors • Conveyor belts • Lifting screws • Escalators	• Pumps • Fans • Punch presses • Band saws • Crushers • Centifuse • Conveyors (high inertia loads
Soft Starters		**Altistart 01**	**Altistart 22**	**Altistart 480**
				
Distribution voltage ranges for 50/60 Hz line supply		Single-phase 110–480 V Three-phase 110– 690 V	Three-phase 208– 600 Vac	Three phase 208 V–690 V
Horsepower ratings for three-phase motors		1/4–2 hp 115/230 V 1/2–30 hp, 208/230 V 1/2–60 hp, 400/480 V 30–75 hp, 575/600 V	3–500 hp	3–1200 hp
Drives	Output frequency	Equals input frequency	—	Equals input frequency
	Type of Control:	Reduced voltage start	Controlled starting and stopping, via voltage and torque	Torque control, voltage control
	Asynchronous motor			
	Synchronous motor	—	—	—
	Typical starts per hour rating	—	6	—
Functions Number of Functions		1	29	
Number of I/O	Analog inputs	—	1 PTC probe	PTC or PT100, 2- or 3-wire probe
	Logic inputs	3	3	4
	Relay outputs	1	2 (N.O./N.C)	3
Communication	Integrated	—	Embedded Modbus	Modbus
	Available as an option	Combined with TeSys™ U-Line self-protected starter	–	Serial link option modules Modbus TCP EtherNet/IP PROFINET PROFIBUS DP V1 CAN open daisy chain Sub-D, and screw terminal block
Other Option Cards		—	—	—
Enclosure Rating		IP20	IP00, IP20	IP20, IP00
Standards and Certifications		EC/EN 60947-4/2, C-Tick, CSA, UL, CE, CCC	UL, CSA, CE, GOST, C-TICK, CCC, and RoHS directive	EC/EN 60947-4/2, EMC class A and B, cULus, UKCA, CCC, RCM, EAC, DNV, ABS, BV, CCS, REACH, RoHs

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of S-Flex™ and Altistart™ Enclosed 22 / Enclosed 480

Type of Motor Control	Adjustable Speed Drives Commercial HVAC & Retrofits	Soft Starters Commercial	North America Enclosed Soft Starters
Key Application/Market Segment	• Pumps • Fans • Scroll Compressors	• Pumps • Fans • Conveyors • Centrifuges	• Agitators • Mixers • Grinders • Crushers
Packaged Products	**S-Flex (Altivar™ 212)**	**Altistart Enclosed 22**	**Altistart Enclosed 480**
			 Integrated controls protected within enclosures, optimized with disconnect means, circuit breakers, push buttons, selector switches, control logic, communication and miscellaneous options designed to meet application requirements.
Distribution voltage ranges for 50/60 Hz line supply	208 Vac, 240 Vac, 480 Vac	208 Vac, 230 Vac, 460 Vac, 575 Vac	208 Vac, 240 Vac, 480 Vac, 690 Vac
Horsepower ratings for three-phase motors	**Variable torque** 30–40 hp, 208/230 V 1–100 hp, 460 V	**Type 1 and Type 12:** 3–150 hp, 208 V 5–200 hp, 230 V 10–400 hp, 460 V 15–500 hp, 575 V **Type 3R or 50˚C Rated:** 3–125 hp, 208 V 5–150 hp, 230 V 10–400 hp, 460 V 15–500 hp, 575 V	**Type 1, Type 12, and Type 3R:** 3–200 hp, 208 V 5–250 hp, 230 V 10–500 hp, 480 V 15–600 hp, 575 V
Configurable options	**Configurable products:** Drive with isolation/bypass Non-bypass Drive input disconnect switch Line contactor Communication options	Basic shunt tip Full featured shunt trip non-reversing isolation Reversion isolation Integral Full Voltage Bypass	**Customizable products:** Non-reversing Reversing Shunt Trip Extensive options
Enclosure ratings	Type 1 general purpose Type 12 industrial use (Dust-Tight/Drip-Tight) Type 3R outdoor use	Type 1 general purpose Type 12 industrial use (Dust-Tight/Drip-Tight) Type 3R outdoor use	Type 1 general purpose Type 12 dust/drip proof Type 3R outdoor service entrance
Communication	• Modbus RJ45 (included as standard) • BACnet (embedded) • LonWorks (option card) • Metasys N2 (embedded) • APOGEE FLN (P1) (embedded)	• Modbus (embedded)	• Modbus (embedded) • Modbus TCP • EtherNet/IP • CANopen • PROFINET • PROFIBUS DP
Standards and Certifications	UL 508C, Seismic qualification ICC ES AC156 acceptance test protocol	Service Entrance Rating, UL Listed per UL 508 under category NKJH, Conforms to applicable NEMA ICS, NFPA, and IEC standards, Manufactured under ISO9001 standards, Factory modification E10 provides Canadian cUL certification per C22.2, No.14, Seismic qualification	UL 508, cUL/CSA, Seismic qualification ICC ES AC156 acceptance test protocaol, ABS

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Overview of Altivar™ 680/980 Process, and 660/960 Process

	North America Drive Systems	
Key Applications and Market Segment	• Water Waste Water • Regenerative Applications • Oil and Gas • Mining, Minerals, and Metals • Food and Beverage	• Water Waste Water • Regenerative Applications • Oil and Gas • Mining, Minerals, and Metals • Food and Beverage
	Altivar 680/980 Process Drives *New!*	**Altivar 660/960 Process Drives**
		
Brief Description	The world's first three-level low harmonic drive, Altivar 680/980 drive solutions are designed for pumping or mechanical movement applications where harmonic mitigation and overall size is a priority. The ATV680/980 has embedded, industry-leading harmonic mitigation technology, which results in THDi levels of 2.3%. With its small footprint and capability to be customized, the ATV680/980 is a very flexible low harmonic solution. The ATV680/980 is a more efficient, more compact, and higher performing active rectification drive than any of our competitors by the integration of a common mode suppressing filter, and unique active filter resonance control. The ATV680 is capable of 120% regeneration, while the ATV980 is capable of 180% of nameplate current.	The Altivar 660 Process System provides a wide range of fully tested and ready to connect drive solution. Starting from a compact pre engineered system to a fully engineered complex solution.
Special Features	Industry Leading Harmonic Mitigation: 2.3% THDi Common Mode Voltage Suppression Reduction of Bearing Currents Generator Supply Capability	Compact design to save space Dynamic QR Codes 50° C option available Pump curves embedded Multiple options available Process control embedded Embedded web server
Enclosure Ratings	UL Type 12	UL Type 1, UL Type 12, UL Type 3R
Power Range	125–900 hp, Normal Duty (ND)	

	208/340 V	460 V
Type 1	1–60 hp	1–900 hp, ND
Type 12	1–60 hp	1–900 hp, ND
Type 3R	1–60 hp	1–125 hp, ND

Distribution voltage ranges for 50/60 Hz line supply	480 Vac	208/240 Vac, 480 Vac
Standards / Certifications	UL/cUL Listed per UL508A, IEEE519 Compliant (harmonic filter required), Conforms to applicable NEMA ICS, NFPA, and IEC standards, Service entrance available, Manufactured under ISO 9001 standards.	UL/cUL Listed per UL508A, IEEE519 Compliant, Conforms to applicable NEMA ICS, NFPA, and IEC standards, Service entrance available, Manufactured under ISO 9001 standards.
Contact your local Schneider Electric Field Office for further information		

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altivar Outdoor 630/930

Overview of Altivar™ Outdoor 630/930

Key Application/Market Segment	• Oil and Gas • Rod Pump Controls, PCP Controls • ESP Controls, HPS Controls • Irrigation
Brief Description	The Altivar Outdoor 630/930 is a UL Type 3R rated drive designed for pumping solutions in outdoor environments, especially oil and gas.
Special Features	- Door-on-door - 50 °C rated - Optional cold weather option - Wide array of options available - Quick lead time
Enslosure Ratings	Nema Type 3R Outdoor
Power Range	20–250 hp, Heavy Duty
Distribution Voltage Ranges for 50/60 Hz Line Supply	480 Vac
Standards / Certifications	- UL Listed per UL 508A - Conforms to applicable NEMA ICS,NFPA, & IEC standards - Service entrance rated - Manufactured under ISO 9001 standards
Contact your local Schneider Electric Field Office for further information	



ATV212HU15N4



ATV212W075N4



ATV212HD30M3X



ATV212HD37N4

Altivar™ 212 Drives

The AHRI (Air-Conditioning, Heating, & Refrigeration Institute) certified Altivar 212 drive is for use with three-phase asynchronous and permanent magnet motors for variable torque pump, fan, and scroll compressor applications. Select the Altivar 212 drive using the motor nameplate voltage, the full load ampere rating and the table below. The Altivar 212 drive includes 3 logic inputs, 2 analog inputs, 1 analog output, and 2 relay outputs (with 1 NO and 1 NO/NC contacts). The Altivar 212 drive includes an integrated 4 digit, 7 segment LED display with a 7 button keypad and includes an RJ45 Modbus port plus a four-screw terminal block for BACnet, Modbus, Metasys N2 and Apogee P1 communication protocols. LonWorks™ is available in an option card.

Table 18.1: Altivar 212 Selection

AC Input Line Voltage	Three-Phase Motor Power *[1]*		Continuous Output Current	Enclosure Rating		
				IP 20*[2]* Open Style Product	Type 1 Conduit Kit Purchase ATV212 and Conduit Kit for Type 1 Installation	Type 12 / IP54*[3]*
	HP	kW	A *[1]*	Catalog Number	Catalog Number	Catalog Number
	30	22	88	ATV212HD22M3X	VW3A9206	—
	40	30	117	ATV212HD30M3X	VW3A9208	—
380/480 Vac -15%, +10% Three-Phase	1	0.75	2.2	ATV212H075N4	VW3A31814	ATV212W075N4
	2	1.5	3.7	ATV212HU15N4	VW3A31814	ATV212WU15N4
	3	2.2	5.1	ATV212HU22N4	VW3A31814	ATV212WU22N4
	4	3	7.2	ATV212HU30N4	VW3A31815	ATV212WU30N4
	5	4	9.1	ATV212HU40N4	VW3A31815	ATV212WU40N4
	7.5	5.5	12	ATV212HU55N4	VW3A31815	ATV212WU55N4
	10	7.5	16	ATV212HU75N4	VW3A31816	ATV212WU75N4
	15	11	22.5	ATV212HD11N4	VW3A31816	ATV212WD11N4
	20	15	30.5	ATV212HD15N4	VW3A31817	ATV212WD15N4
	25	18.5	37	ATV212HD18N4	VW3A31817	ATV212WD18N4
	30	22	43.5	ATV212HD22N4S	VW3A31817	—
	30	22	43.5	ATV212HD22N4	VW3A9206	ATV212WD22N4
	40	30	58.5	ATV212HD30N4	VW3A9206	ATV212WD30N4
	50	37	79	ATV212HD37N4	VW3A9207	ATV212WD37N4
	60	45	94	ATV212HD45N4	VW3A9207	ATV212WD45N4
	75	55	116	ATV212HD55N4	VW3A9208	ATV212WD55N4
	100	75	160	ATV212HD75N4	VW3A9208	ATV212WD75N4
UL File E116875, CSA 2278406, Plenum rated per UL 508C for UL 1995 installations. NOM, CE						

[1] These horsepower, wattage and continuous ampere ratings apply to the default switching frequency and maximum 40 °C ambient. Refer to the installation manual for derating curves as a function of switching frequency, ambient temperature, and mounting conditions.
[2] IP20 Altivar 212 drives can be installed as UL Type 1 with an optional conduit box by following the instructions in the Installation Manual.
[3] For ATV212W... drives with Class B EMC filter, add the letter “C” to the end of the standard catalog number.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025


VW3A1101


VW3A1101
VW3A1102
VW3A1103
VW3A1104R10


VW3A8121


LonWorks Option Card
VW3A21212

Altivar™ 212 Accessories

Table 18.2: Altivar 212 Options and Accessories

Description		For Use on Drives	Catalog Number
User Interface Options			
Remote LCD Display Keypad	8 line, 24 characters per line, plain text, 8 keys, rotary wheel, 60 °C IP54 rated	Altivar 212, 320, 630, and 930	VW3A1101 *[4]*
Remote LCD Keypad Mounting Accessories	IP54 rated kit for remote mounting LCD keypad on enclosure door. Clear plastic door for use with VW3A1102 for IP65 rating and tamper resistant. Female / Female right angle RJ45 adaptor, to connect cable and keypad. *[5]*	VW3A1101	VW3A1102 *[4]*
		VW3A1102	VW3A1103 *[4]*
		VW3A1101	VW3A1105 *[4]*
	Remote LCD Keypad Mounting Cables — Equipped with two RJ45 connectors 1 meter length	VW3A1101	VW3A1104R10 *[6]*
	3 meter length	VW3A1101	VW3A1104R30 *[6]*
	5 meter length	VW3A1101	VW3A1104R50 *[6]*
	10 meter length	VW3A1101	VW3A1104R100 *[6]*
Multi-loader	Use to copy configurations between like drives, PC Soft, or SoMove PC Software	Altivar 12, 212, 320, 630, 930, and Altistart 22	VW3A8121
Potentiometer	Operator, mounting collar, 2.5 kilohm, ½ watt potentiometer	Altivar 212	ATVPOT25K
Software			
Altivar and Altistart Programming Cable	For use with the iPad Configuration App. 30–pin Mobile to RS-485 Converter Cable	Altivar 12, 212, and SFLEX, Altistart 22, 480	VW3A8151R20U
SoMove	This software enables the user to configure, set, debug and organize maintenance task for the complete Altivar product line and the Altistart 22 and Altistart 48 soft starters. It can also be used to customize the integrated display terminal menus. It can be used with a direct connection or a Bluetooth® wireless connection. Free download www.schneider-electric.us		
USB/RS485 cable: equipped with USB connector and RJ45 connector		Altivar and Altistart	TCSMCNAM3M002P *[6]*
Communication Option			
LonWorks Communication Card Option	Provides a four-screw terminal block for connecton to LonWorks network. Install in place of standard control board that comes mounted in the Altivar 212 drive. The I/O count is reduced to 3LI, 1 AI and 1 NO/NC relay	Altivar 212	VW3A21212
Mounting Kit			
DIN Rail Mounting Kit	For installation on 35 mm wide DIN rail	Altivar 212H075M3X–U22M3X Altivar 212H075N4–U22N4	VW3A31852

[4] IP20 Altivar 212 drives can be installed as UL Type 1 with an optional conduit box by following the instructions in the installation manual.
[5] Not required if using VW3A1102.
[6] For ATV212W... drives with Class B EMC filter, add the letter “C” to the end of the standard catalog number.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altivar 12 Drive

Altivar™ 12 Drives

Big function in a small footprint. The Altivar 12 variable frequency drive combines flexibility, reliability, and the most advanced sensorless flux vector technology into very small space. This drive features an integrated communications port, user-friendly navigation wheel on the faceplate, and an optional multi-loader that streamlines set-up by making programming quick and easy. All of this comes with the versatility to handle applications from simple to complex, across industries, and harsh environments.

Table 18.3: Altivar 12 Selection

Voltage, +10%, -15%, 50/60 Hz		Motor Power		Nominal Current Rating A (Note 1)	Catalog Number (Note 2)
Input	Output	kW	hp		
11 V Single Phase	230 V Three Phase	0.18	0.25	1.4	ATV12H018F1
		0.37	0.5	2.4	ATV12H037F1
		0.37	0.5	2.4	ATV12P037F1
		0.75	1	4.2	ATV12H075F1
230 V Single Phase	230 V Three Phase	0.18	0.25	1.4	ATV12H018M2
		0.37	0.5	2.4	ATV12H037M2
		0.37	0.5	2.4	ATV12P037M2
		0.55	0.75	3.5	ATV12H055M2
		0.55	0.75	3.5	ATV12P055M2
		0.75	1	4.2	ATV12H075M2
		0.75	1	4.2	ATV12P075M2
		1.5	2	7.5	ATV12HU15M2
		2.2	3	10	ATV12HU22M2
230 V Three Phase	230 V Three Phase	0.18	0.25	1.4	ATV12H018M3
		0.37	0.5	2.4	ATV12H037M3
		0.37	0.5	2.4	ATV12P037M3
		0.75	1	4.2	ATV12H075M3
		0.75	1	4.2	ATV12P075M3
		1.5	2	7.5	ATV12HU15M3
		1.5	2	7.5	ATV12PU15M3
		2.2	3	10	ATV12HU22M3
		2.2	3	10	ATV12PU22M3
		3	-	12.2	ATV12HU30M3
		3	-	12.2	ATV12PU30M3
		3.7	5	16.7	ATV12HU40M3
		3.7	5	16.7	ATV12PU40M3

Altivar™ 12 Accessories

Table 18.4: Altivar 12 Options and Accessories

Description	Part Number	For Use on Drives
Remote Keypad Display for ATV12 (IP54)	VW3A1006	All
Remote Keypad Display for ATV12 (IP65)	VW3A1007	All
Cable for remote mounting: 1 meter	VW3A1104R10	All
Cable for remote mounting: 3 meters	VW3A1104R30	All
Cable for remote mounting: 5 meters	VW3A1104R50	All
Cable for remote mounting: 10 meters	VW3A1104R100	All
EMC Conformity Kit	VW3A9523	ATV12H018F1, H037F1 ATV12H018M2–H075M2 ATV12H018M3–H075M3 ATV12P037F1 ATV12P037M2–P075M2 ATV12P037M3–P075M3
EMC Conformity Kit	VW3A9524	ATV12H075F1 ATV12HU15M2, HU22M2 ATV12HU15M3, HU22M3 ATV12PU15M3, PU22M3
EMC Conformity Kit	VW3A9525	ATV12HU30M3 ATV12HU40M3
EMC Filters for C1, C2, C3	VW3A4416	ATV12H018F1,H037F1 ATV12H018M2–H075M2 ATV12P037F1 ATV12P037M2–P075M2
EMC Filters for C1, C2, C3	VW3A4417	ATV12H075F1 ATV12HU15M2,HU22M2
EMC Filters for C1, C2, C3	VW3A4418	ATV12H018M3–H075M3 ATV12P037M3–P075M3
EMC Filters for C1, C2, C3	VW3A4419	ATV12HU15M3, HU22M3 ATV12PU15M3, PU22M3
15/24 voltage converter	VW3A9317	All
Mounting Plate for 35 mm DIN rail	VW3A9804	ATV12H018F1, H037F1 ATV12H018M2–H075M2 ATV12H018M3–H075M3
Mounting Plate for 35 mm DIN rail	VW3A9805	ATV12H075F1 ATV12HU15M2, HU22M2 ATV12HU15M3, HU22M3

Table 18.5: Altivar 12 Configuration Tools

Description	Part Number	For Use on Drives
Simple Loader: to transfer configuration between like drives. For use with the Altivar product line.	VW3A8120	ATV12, ATV312, ATV61, and ATV71
Multi-loader: to transfer a configuation from a drive or from SoMove via an SD card, and transferring to another drive or to a PC	VW3A8121	ATV12, ATV312, ATV61, and ATV71
Cable: for connection between the MultiLoader and an ATV12 that is in its packaging	VW3A8126	All
USB to RJ45 adaptor: for use in connecting to a PC with a USB port	TCSMCNAM3M002P	Compatible device families: Advantys™ OTB, Altistart™ soft starters, Altivar series including HMI, Altivar controller

© 2025 Schneider Electric
All Rights Reserved
6/11/2025


ATV320HU15M2


ATV320U04M2C

Altivar™ 320 Machine

The new benchmark in machine performance. Altivar 320, part of the new Altivar™ Machine range, is a powerful combination of safety, reliability, and simplicity which makes it a versatile choice that reduces costs both during installation and throughout the machine's life cycle. Altivar 320 has a number of out-of-the-box features for building more effective machines.

Table 18.6: Altivar 320 Selection

Input Line Voltage[7]	HP	kW	Continuous Output Current	Catalog Number	Catalog Number
			A	Compact	Book
208/230 Vac Single-Phase	0.25	0.18	1.5	ATV320U02M2C	ATV320U02M2B
	0.5	0.37	3.3	ATV320U04M2C	ATV320U04M2B
	0.75	0.55	3.7	ATV320U06M2C	ATV320U06M2B
	1	0.75	4.6	ATV320U07M2C	ATV320U07M2B
	1.5	1.1	6.9	ATV320U11M2C	ATV320U11M2B
	2	1.5	8	ATV320U15M2C	ATV320U15M2B
	3	2.2	11	ATV320U22M2C	ATV320U22M2B
208/230 Vac Three-Phase	0.25	0.18	1.5	ATV320U02M3C	—
	0.5	0.37	3.3	ATV320U04M3C	—
	0.75	0.55	3.7	ATV320U06M3C	—
	1	0.75	4.8	ATV320U07M3C	—
	1.5	1.1	6.9	ATV320U11M3C	—
	2	1.5	8	ATV320U15M3C	—
	3	2.2	11	ATV320U22M3C	—
	4	3	13.7	ATV320U30M3C	—
	5	—	17.5	ATV320U40M3C	—
	7.5	5.5	27.5	ATV320U55M3C	—
	10	7.5	33	ATV320U75M3C	—
	15	11	54	ATV320D11M3C	—
	20	15	66	ATV320D15M3C	—
400/480 Vac Three-Phase	0.5	0.37	1.5	ATV320U04N4C	ATV320U04N4B
	0.75	0.55	1.9	ATV320U06N4C	ATV320U06N4B
	1	0.75	2.3	ATV320U07N4C	ATV320U07N4B
	1.5	1.1	3	ATV320U11N4C	ATV320U11N4B
	2	1.5	4.1	ATV320U15N4C	ATV320U15N4B
	3	2.2	5.5	ATV320U22N4C	ATV320U22N4B
	4	3	7.1	ATV320U30N4C	ATV320U30N4B
	5	—	9.5	ATV320U40N4C	ATV320U40N4B
	7.5	5.5	14.3	—	ATV320U55N4B
	10	7.5	17	—	ATV320U75N4B
	15	11	27.7	—	ATV320D11N4B
	20	15	33	—	ATV320D15N4B
575/600 Vac Three-Phase	1	0.75	1.7	ATV320U07S6C	—
	2	1.5	2.7	ATV320U15S6C	—
	3	2.2	3.9	ATV320U22S6C	—
	5	3.7/4.0	6.1	ATV320U40S6C	—
	7.5	5.5	9	ATV320U55S6C	—
	10	7.5	11	ATV320U75S6C	—
	15	11	17	ATV320D11S6C	—
	20	15	22	ATV320D15S6C	—

[7] Reference the ATV320 Getting Started Annex SCCR NVE21777 for SCCR ratings, branch circuit protection, and additional single phase ratings.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Altivar™ 320 Accessories

Table 18.7: Altivar 320 Accessories

Catalog Number	Description
VW3A1006	Remote display terminal, IP54
VW3A1007	Remote display terminal, IP65
VW3A1104R10	Remote-mounting cord set, 1 m (3.28 ft)
VW3A1104R30	Remote-mounting cord set, 3 m (9.84 ft)
VW3A1104R50	Remote-mounting cord set, 5 m (16.4 ft)
VW3A1104R100	Remote-mounting cord set, 10 m (32.81 ft)
VW3A1101	Remote graphic display terminal
VW3A1105	Female/female RJ45 adapter for use with VW3A1101
VW3A1102	Remote mounting kit for use with VW3A1101
VW3A1103	Door for use with VW3A1102
VW3A1111	Advanced graphic display
VW3A1112	Remote mounting kit for use with VW3A1111
VW3A8120	Simple Loader configuration tool
VW3A8121	Multi-Loader configuration tool
VW3A8126	Cord set for Multi-Loader tool
TCSWAAC13FB	Universal Bluetooth Interface
VW3A3600	Communication module adapter for ATV320 Compact
VW3A3608	CANopen daisy chain communication module, two RJ45 ports
VW3A3618	CANopen daisy chain communication module, 9–pin male SUB-D connector
VW3A3628	CANopen daisy chain communication module, removable 5–position screw connector
VW3CANCARR03	CANopen cable with 2 RJ45 connectors, 0.3 m
VW3CANCARR1	CANopen cable with 2 RJ45 connectors, 1 m
TCSCAR013M120	CANopen end-of-line terminator with RJ45 connector
VW3CANTAP2	IP20 CANopen junction boxes
VW3A3616	Modbus TCP and EtherNet/IP network module
VW3A3607	PROFIBUS DP V1 communication module
VW3A3609	DeviceNet communication module
VW3A3601	EtherCAT communication module
VW3A3619	Ethernet POWERLINK communication module
VW3A3627	ProfiNet communication module
VW3A3620	Speed monitoring module
VW3A9804	DIN Rail Mounting Kit for use with ATV320U02M•C–ATV320U07M•C
VW3A9805	DIN Rail Mounting Kit for use with ATV320U11M•C–ATV320U22M•C, ATV320U04N4C–ATV320U15N4C, ATV320U07S6C, ATV320U15S6C
VW3A95811	UL Type 1 conformity kit for use with ATV320U02M•C–ATV320U07M•C
VW3A95812	UL Type 1 conformity kit for use with ATV320U11M2C–ATV320U22M2C, ATV320U04N4C–ATV320U15N4C, ATV320U07S6C, ATV320U15S6C
VW3A95813	UL Type 1 conformity kit for use with ATV320U11M3C–ATV320U22M3C
VW3A95814	UL Type 1 conformity kit for use with ATV320U22N4C–ATV320U40N4C, ATV320U22S6C, ATV320U40S6C
VW3A95815	UL Type 1 conformity kit for use with ATV320U30M3C–ATV320U40M3C
VW3A95816	UL Type 1 conformity kit for use with ATV320U55M3C–ATV320U75M3C, ATV320U55S6C, ATV320U75S6C
VW3A95817	UL Type 1 conformity kit for use with ATV320U55N4B, ATV320U75N4B
VW3A95818	UL Type 1 conformity kit for use with ATV320D11M3C–ATV320D15M3C, ATV320D11S6C, ATV320D15S6C
VW3A95819	UL Type 1 conformity kit for use with ATV320D11N4B, ATV320D15N4B
VW3A9920	Adapter for mounting the control module at 90° for use with ATV320•••M2B, ATV320U04N4B–ATV320U40N4B
VW3A9921	Bracket for GV2/ATV320B direct mounting for use with ATV320•••M2B, ATV320U04N4B–ATV320U40N4B
GV2AF5	Adapter plate when using GV2 with ATV320 for use with ATV320•••M2B, ATV320U04N4B–ATV320U40N4B
VW3M7101R01	Daisy chain DC bus cord with two connectors for use with ATV320•••M2B, ATV320U04N4B–ATV320U40N4B
VW3M7102R150	Daisy chain DC bus cord with one connector and flying leads at one end; Shielded cable for use with ATV320•••N4B
VW3M2207	Daisy chain DC bus cord with two connectors Connection kit for VW3M7102R150 Cable for use with ATV320•••N4B

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altivar 340 Machine Drives

Altivar™ 340 Machine

Stay on top of the Smart Machine Era! Altivar Machine ATV340 is engineered for high performance application requirements by maximizing the machine performance thanks to real time variable speed drive operation, more connectivity, flexibility, and scalable safety. The ATV340 is available from 1 to 100 hp with the ability to control any kind of motor in open and closed loop.

Table 18.8: Altivar 340 Selection

Drive	Normal Duty			Heavy Duty			Catalog Number
	hp	kW	Continuous Output Current	hp	kW	Continuous Output Current	
			A			A	
400/480 Vac Three-Phase Modular Drive	1.5	1.1	2.6	1	0.75	2.1	ATV340U07N4
	3	2.2	4.8	2	1.5	3.4	ATV340U15N4
	3	3	6.8	3	2.2	4.8	ATV340U22N4
	5	4	7.6	3	3	6.2	ATV340U30N4
	7.5	5.5	11	5	4	7.6	ATV340U40N4
	10	7.5	14	7.5	5.5	11	ATV340U55N4
	15	11	21	10	7.5	14	ATV340U75N4
	20	15	27	15	11	21	ATV340D11N4
	25	18.5	34	20	15	27	ATV340D15N4
	30	22	40	25	18.5	34	ATV340D18N4
	40	30	52	30	22	40	ATV340D22N4
400/480 Vac Three-Phase Ethernet Drive	1.5	1.1	2.6	1	0.75	2.1	ATV340U07N4E
	3	2.2	4.8	2	1.5	3.4	ATV340U15N4E
	3	3	6.8	3	2.2	4.8	ATV340U22N4E
	5	4	7.6	3	3	6.2	ATV340U30N4E
	7.5	5.5	11	5	4	7.6	ATV340U40N4E
	10	7.5	14	7.5	5.5	11	ATV340U55N4E
	15	11	21	10	7.5	14	ATV340U75N4E
	20	15	27	15	11	21	ATV340D11N4E
	25	18.5	34	20	15	27	ATV340D15N4E
	30	22	40	25	18.5	34	ATV340D18N4E
	40	30	52	30	22	40	ATV340D22N4E
	50	37	74.5	40	30	61.5	ATV340D30N4E
	60	45	88	50	37	74.5	ATV340D37N4E
	75	55	106	60	45	88	ATV340D45N4E
	100	75	145	75	55	106	ATV340D55N4E
	125	90	173	100	75	145	ATV340D75N4E

Altivar™ 340 Accessories

Table 18.9: Altivar 340 Accessories

Catalog Number	Description
VW3A1111	Advanced graphic display
VW3A1112	Remote mounting kit for use with VW3A1111
VW3A1113	Plain text display terminal
VW3A8120	Simple Loader configuration tool
VW3A8121	Multi-Loader configuration tool
VW3A8126	Cord set for Multi-Loader tool
VW3A3608	CANopen daisy chain communication module, two RJ45 ports
VW3A3618	CANopen daisy chain communication module, 9–pin male SUB-D connector
VW3A3628	CANopen daisy chain communication module, removable 5–position screw connector
VW3CANCARR03	CANopen cable with 2 RJ45 connectors, 0.3 m
VW3CANCARR1	CANopen cable with 2 RJ45 connectors, 1 m
TCSCAR013M120	CANopen end-of-line terminator with RJ45 connector
VW3CANTAP2	IP20 CANopen junction boxes
VW3A3607	PROFIBUS DP V1 communication module
VW3A3609	DeviceNet communication module
VW3A3601	EtherCAT communication module
VW3A3619	Ethernet POWERLINK communication module
VW3A3627	ProfiNet communication module
VW3A3620	Speed monitoring module
VW3M7101R01	Daisy chain DC bus cord with two connectors for use with ATV320•••M2B, ATV320U04N4B–ATV320U40N4B
VW3M7102R150	Daisy chain DC bus cord with one connector and flying leads at one end; Shielded cable for use with ATV320•••N4B
VW3M2207	Daisy chain DC bus cord with two connectors Connection kit for VW3M7102R150 Cable for use with ATV320•••N4B

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altivar Process 630

New!

Altivar™ Process 630/650

Table 18.10: Altivar Process 630/650 Selection

Input Line Voltage	Normal Duty [8]			Heavy Duty [9]			Catalog Number
	Three-phase Motor Power [10]		Continuous Output Current [11]	Three-phase Motor Power [10]		Continuous Output Current [11]	
	HP	kW	A	HP	kW	A	
208/240 Vac Three Phase	1	0.75	4.6	0.5	0.37	3.3	ATV630U07M3
	2	1.5	8	1	0.75	4.6	ATV630U15M3
	3	2.2	11.2	2	1.5	8	ATV630U22M3
	4	3.0	13.7	3	2.2	11.2	ATV630U30M3
	5	4.0	18.7	4	3	13.7	ATV630U40M3
	7.5	5.5	25.4	5	4	18.7	ATV630U55M3
	10	7.5	32.7	7.5	5.5	25.4	ATV630U75M3
	15	11	46.8	10	7.5	32.7	ATV630D11M3
	20	15	63.4	15	11	46.8	ATV630D15M3
	25	18.5	78.4	20	15	63.4	ATV630D18M3
	30	22	92.6	25	18.5	78.4	ATV630D22M3
	40	30	123	30	22	92.6	ATV630D30M3
	50	37	149	40	30	123	ATV630D37M3
	60	45	176	50	37	149	ATV630D45M3
	75	55	211	60	45	176	ATV630D55M3
	100	75	282	75	55	211	ATV630D75M3
400/480 Vac Three Phase	1	0.75	2.2	0.5	0.37	1.5	ATV630U07N4 ATV650U07N4U
	2	1.5	4	1	0.75	2.2	ATV630U15N4 ATV650U15N4U
	3	2.2	5.6	2	1.5	4	ATV630U22N4 ATV650U22N4U
	4	3	7.2	3	2.2	5.6	ATV630U30N4 ATV650U30N4U
	5	4	9.3	4	3	7.2	ATV630U40N4 ATV650U40N4U
	7.5	5.5	12.7	5	4	9.3	ATV630U55N4 ATV650U55N4U
	10	7.5	16.5	7.5	5.5	12.7	ATV630U75N4 ATV650U75N4U
	15	11	23.5	10	7.5	16.5	ATV630D11N4 ATV650D11N4U
	20	15	31.7	15	11	23.5	ATV630D15N4 ATV650D15N4U
	25	18.5	39.2	20	15	31.7	ATV630D18N4 ATV650D18N4U
	30	22	46.3	25	18.5	39.2	ATV630D22N4 ATV650D22N4U
	40	30	61.5	30	22	46.3	ATV630D30N4 ATV650D30N4U
	50	37	74.5	40	30	61.5	ATV630D37N4 ATV650D45N4U
	60	45	88	50	37	74.5	ATV630D45N4 ATV650D55N4U
	75	55	106	60	45	88	ATV630D55N4 ATV650D55N4U
	100	75	145	75	55	106	ATV630D75N4 ATV650D75N4U
	125	90	173	100	75	145	ATV630D90N4 ATV650D90N4U
	150	110	211	125	90	173	ATV630C11N4
	200	130	250	150	110	180	ATV630C13N4
	250	160	302	200	132	240	ATV630C16N4
	350	220	324	250	160	246	ATV630C22N4
	400	250	366	300	220	301	ATV630C25N4
	450	310	461	400	250	375	ATV630C31N4
690 Vac Three Phase	3	2.2	3.1	2	1.5	2.4	ATV630U22Y6
	—	3	4.2	3	2.2	3.1	ATV630U30Y6
	5	4	5.4	—	3	4.2	ATV630U40Y6
	7.5	5.5	7.2	5	4	5.4	ATV630U55Y6
	10	7.5	9.5	7.5	5.5	7.2	ATV630U75Y6
	15	11	13.5	10	7.5	9.5	ATV630D11Y6
	20	15	18	15	11	13.5	ATV630D15Y6
	25	18	24	20	15	18	ATV630D18Y6
	30	22	29	25	18	24	ATV630D22Y6
	40	30	34	30	22	29	ATV630D30Y6
	50	37	45	40	30	34	ATV630D37Y6
	60	45	55	50	37	45	ATV630D45Y6
	75	55	66	60	45	55	ATV630D55Y6
	100	75	83	75	55	66	ATV630D75Y6
	125	90	108	100	75	83	ATV630D90Y6

[8] Normal duty applications requiring an overload up to 110% for 60 seconds. Typical for variable torque loads.
[9] Heavy duty applications requiring an overload up to 150% for 60 seconds. Typical for constant torque loads.
[10] These values are given for a nominal switching frequency of 4 kHz up to ATV630D45N4, or 2.5 kHz for ATV630D55N4...D90N4 for use in continuous operation. The switching frequency is adjustable from 1...16 kHz for all ratings. Above 2.5 or 4 kHz (depending on the rating), the drive will automatically reduce the switching frequency in the event of an excessive temperature rise. For continuous operation above the nominal switching frequency, derate the nominal drive current (see the derating curves on our website www.schneider- electric.com).
[11] Typical value for the indicated motor power and for the maximum prospective line Isc.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altivar Process 930

Altivar™ Process 930/950

Table 18.11: Altivar Process 930/950 Selection

Input Line Voltage	Normal Duty *[12]*			Heavy Duty *[13]*			Catalog Number
	Three-phase Motor Power *[14]*		Continuous Output Current *[15]*	Three-phase Motor Power *[14]*		Continuous Output Current *[15]*	
	HP	kW	A	HP	kW	A	
208/240 Vac Three Phase	1	0.75	4.6	0.5	0.37	3.3	ATV930U07M3
	2	1.5	8	1	0.75	4.6	ATV930U15M3
	3	2.2	11.2	2	1.5	8	ATV930U22M3
	4	3.0	13.7	3	2.2	11.2	ATV930U30M3
	5	4.0	18.7	4	3	13.7	ATV930U40M3
	7.5	5.5	25.4	5	4	18.7	ATV930U55M3
	10	7.5	32.7	7.5	5.5	25.4	ATV930U75M3
	15	11	46.8	10	7.5	32.7	ATV930D11M3
	20	15	63.4	15	11	46.8	ATV930D15M3
	25	18.5	78.4	20	15	63.4	ATV930D18M3
	30	22	92.6	25	18.5	78.4	ATV930D22M3
	40	30	123	30	22	92.6	ATV930D30M3
	50	37	149	40	30	123	ATV930D37M3
	60	45	176	50	37	149	ATV930D45M3
	75	55	211	60	45	176	ATV930D55M3
	100	75	282	75	55	211	ATV930D75M3
400/480 Vac Three Phase	1	0.75	2.2	0.5	0.37	1.5	ATV930U07N4 ATV950U07N4U
	2	1.5	4	1	0.75	2.2	ATV930U15N4 ATV950U15N4U
	3	2.2	5.6	2	1.5	4	ATV930U22N4 ATV950U22N4U
	4	3	7.2	3	2.2	5.6	ATV930U30N4 ATV950U30N4U
	5	4	9.3	4	3	7.2	ATV930U40N4 ATV950U40N4U
	7.5	5.5	12.7	5	4	9.3	ATV930U55N4 ATV950U55N4U
	10	7.5	16.5	7.5	5.5	12.7	ATV930U75N4 ATV950U75N4U
	15	11	23.5	10	7.5	16.5	ATV930D11N4 ATV950D11N4U
	20	15	31.7	15	11	23.5	ATV930D15N4 ATV950D15N4U
	25	18.5	39.2	20	15	31.7	ATV930D18N4 ATV950D18N4U
	30	22	46.3	25	18.5	39.2	ATV930D22N4 ATV950D22N4U
	40	30	61.5	30	22	46.3	ATV930D30N4 ATV950D30N4U
	50	37	74.5	40	30	61.5	ATV930D37N4 ATV950D45N4U
	60	45	88	50	37	74.5	ATV930D45N4 ATV950D55N4U
	75	55	106	60	45	88	ATV930D55N4 ATV950D55N4U
	100	75	145	75	55	106	ATV930D75N4 ATV950D75N4U
	125	90	173	100	75	145	ATV930D90N4 ATV950D90N4U
	150	110	211	125	90	173	ATV930C11N4C
	200	130	250	150	110	180	ATV930C13N4C
	250	160	302	200	132	240	ATV930C16N4C
	250	160	302	200	132	240	ATV930C16N4
	350	220	324	250	160	246	ATV930C22N4
	400	250	366	300	220	301	ATV930C25N4C
	450	310	461	400	250	375	ATV930C31N4C
690 Vac Three Phase	3	2.2	3.1	2	1.5	2.4	ATV930U22Y6
	—	3	4.2	3	2.2	3.1	ATV930U30Y6
	5	4	5.4	—	3	4.2	ATV930U40Y6
	7.5	5.5	7.2	5	4	5.4	ATV930U55Y6
	10	7.5	9.5	7.5	5.5	7.2	ATV930U75Y6
	15	11	13.5	10	7.5	9.5	ATV930D11Y6
	20	15	18	15	11	13.5	ATV930D15Y6
	25	18	24	20	15	18	ATV930D18Y6
	30	22	29	25	18	24	ATV930D22Y6
	40	30	34	30	22	29	ATV930D30Y6
	50	37	45	40	30	34	ATV930D37Y6
	60	45	55	50	37	45	ATV930D45Y6
	75	55	66	60	45	55	ATV930D55Y6
	100	75	83	75	55	66	ATV930D75Y6
	125	90	108	100	75	83	ATV930D90Y6

[12] Normal duty applications requiring an overload up to 120% for 60 seconds. Typical for variable torque loads.
[13] Heavy duty applications requiring an overload up to 150% for 60 seconds. Typical for constant torque loads.
[14] These values are given for a nominal switching frequency of 4 kHz up to ATV930D45N4, or 2.5 kHz for ATV930D55N4...D90N4 for use in continuous operation. The switching frequency is adjustable from 1...16 kHz for all ratings. Above 2.5 or 4 kHz (depending on the rating), the drive will automatically reduce the switching frequency in the event of an excessive temperature rise. For continuous operation above the nominal switching frequency, derate the nominal drive current (see the derating curves on our website www.schneider- electric.com).
[15] Typical value for the indicated motor power and for the maximum prospective line Isc.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Altivar™ 600/900 Accessories


Table 18.12: Accessories for Altivar Process 600/900

Description			Catalog Number
Operator Interface	Graphic keypad		VW3A1111
	Door Mounting kit for graphic keypad, Type 12		VW3A1112
	Remote mounting kit RJ45 connector, IP65		VW3A1115
	Cable for remote mounting LCD graphic keypad	1 meter	VW3A1104R10
		3 meters	VW3A1104R30
		5 meters	VW3A1104R50
		10 meters	VW3A1104R100
Wireless Connection	Wifer Wi-Fi Module		TCSEGWB13FA0
I/O Extension Option Cards	Digital and Analog I/O extension module		VW3A3203
	Output Relays extension module		VW3A3204
Communication Option Cards	Ethernet/IP Modbus TCP dual port		VW3A3720
	PROFINET		VW3A3627
	PROFIBUS DPv1 option card		VW3A3607
	DeviceNet option card		VW3A3609
	CANopen	2x RJ45 Daisy Chain	VW3A3608
		SUB-D	VW3A3618
		Screw terminal	VW3A3628
	BACnet MS/TP (ATV600)		VW3A3725
	Ethernet IP / Modbus TCP dual port with MultiVFD (ATV600)		VW3A3721
	EtherCAT (ATV900)		VW3A3601
Encoder Interface Modules	Digital Encoder Interface Module		VW3A3420
	Analog Encoder Interface Module		VW3A3422
	Resolver Encoder Interface Module		VW3A3423
	HTL Encoder Interface Module		VW3A3424
External Heat Sink Mounting Kit	Frame 1		NSYPTDS1
	Frame 2		NSYPTDS2
	Frame 3		NSYPTDS3
	Frame 4		NSYPTDS4
	Frame 5		NSYPTDS5
	Wall Mount kit		NSYAEFPFPTD
Replacement Cooling Fan Kit	Frame 1		VX5VPS1001
	Frame 2		VX5VPS2001
	Frame 3		VX5VPS3001
	Frame 4		VX5VPS4001
	Frame 5		VX5VPS5001
	Frame 6		VX5VPS6001
	Frame A		VX5VP0A001
	Frame B/C		VX5VP0BC001
Common Mode Noise Filters	Frame 1		VW3A5501
	Frame 2		VW3A5502
	Frame 3		VW3A5503
	Frame 4		VW3A5504
	Frame 5		VW3A5505
	Frame 6		VW3A5506

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



S-Flex 212 Enclosed
Drive Controller Type 1, 12, 3R
Rated +14 to +104 °F
(-10 to +40 °C)



S-Flex™ Variable Torque AC Drive—208 V, 230 V, and 460 V Ratings

The AHRI certified S-Flex enclosed drive features the Altivar 212 drive and provides 100 KAIC rating for commercial pump, fan, and scroll compressor applications.

The S-Flex is an economical package that includes a circuit breaker disconnect and option bypass contactors, drive input disconnect switch or line contactor.

The S-Flex is rated as a UL Type 1, 12, and 3R enclosure an ideal for use in residential high rise and mixed-use buildings, commercial office buildings, schools and campus environments.

All S-Flex 212 Enclosed Drives are supplied with:

- Altivar™ 212 power converter
- Square D™ circuit breaker disconnect (Power Fuses for 460 V version only)
- Coordinated short circuit rating for 100,000 A
- Adjustable Frequency Controller-Off-Bypass selector switch
- Local/Remote configurable on controller
- Power On red LED
- Bypass Run green LED
- Fire/Freezestat interlock for Adjustable Frequency Drive and Bypass mode
- Form C Adjustable Frequency Controller fault auxiliary contact
- Modbus RJ-45 communication port
- Smoke Purge Function
- Bypass Run Auxiliary Contact
- Drive Run Auxiliary Contact
- Full Voltage Bypass Power Circuit with overload relay
- 120 Vac fused control power transformer

Table 18.13: Output Amperes

HP	208 V	230 V	460 V
1	—	—	2.1
2	—	—	3.4
3	—	—	4.8
5	—	—	7.6
7.5	—	—	11
10	—	—	14
15	—	—	21
20	—	—	27
25	—	—	34
30	92	80	40
40	120	104	52
50	—	—	65
60	—	—	77
75	—	—	96
100	—	—	124

Table 18.14: S-Flex 212 Type 1 Enclosed Drive Controller Selection

Input Line Voltage	HP	kW	Output Current A	Catalog Number
208 Vac Three-phase	30	22	92	SFD212MG2YB07D07
	40	30	120	SFD212NG2YB07D07
460 Vac Three-phase	1	0.75	2.1	SFD212CG4YB07D07
	2	1.5	3.4	SFD212DG4YB07D07
	3	2.2	4.8	SFD212EG4YB07D07
	5	4	7.6	SFD212FG4YB07D07
	7.5	5.5	11	SFD212GG4YB07D07
	10	7.5	14	SFD212HG4YB07D07
	15	11	21	SFD212JG4YB07D07
	20	15	27	SFD212KG4YB07D07
	25	18.5	34	SFD212LG4YB07D07
	30	22	40	SFD212MG4YB07D07
	40	30	52	SFD212NG4YB07D07
	50	37	65	SFD212PG4YB07D07
	60	45	77	SFD212QG4YB07D07
	75	55	96	SFD212RG4YB07D07
	100	75	124	SFD212SG4YB07D07

Table 18.15: Additional S-Flex Configurations Available Using Product Selector
Example:SFD212CG3YA06X07 (bold text in selection table below)

TYPE (01)	HP (02)	Enclosure (03)	Voltage (04)	Power Circuit (05)	Communication Options (06)	Misc Options (07)
SFD212	**C = 1 hp** D = 2 hp E = 3 hp F = 5 hp G = 7.5 hp H = 10 hp J = 20 hp K= 20 hp L = 30 hp N = 40 hp P = 50 hp (460 V only) Q = 60 hp (460 V only) R = 75 hp (460 V only) S = 100 hp (460 V only)	**G = UL Type 1 General Purpose** **A = UL Type 12K Industrial Use, Dust-Tight/Drip-Tight** **H = UL Type 3R Outdoor Use**	2 = 208 Vac **3 = 230 Vac** 4 = 460 Vac	W = Without Bypass **Y = Full Voltage Bypass**	**A06 = BACnet Setup** B06 = LonWorks® Card C06 = Metasys® N2 Setup D06 = Apogee™ P1 Setup N06 = Modbus *[1]*	A07 = Drive Input Disconnect *[2]* B07 = Line Contactor *[2]* S07 = Seismic Certification D07 = Full Text Keypad K07 = cUL Marking (Canada) T07 = 50 °C Ambient Operation*[3]* **X07 = AC Line Reactor**

Table 18.16: S-Flex Accessories

Description		Catalog Number
Software		
SoMove™	This software enables the user to configure, set, debug and organize maintenance task for the complete Altivar product line and the Altistart 22 and Altistart 48 soft starters. It can also be used to customize the integrated display terminal menus. It can be used with a direct connection or a Bluetooth® wireless connection. Free download www.schneider-electric.us	
User Interface Kits		
USB to RJ45 Adaptor Kit (For use in connecting to a PC with a USB port)		TCSMCNAM3M002P
EZ-M Mounting Channel, 72 in. length		EZM72MC
Altivar and Altistart Programming cable for iPad 30–Pin mobile to RS-485 Converter, 2 meters		VW3A8151R20U

NOTE: See the Instruction Bulletin for set up instructions.

[1] Default selection. For Modbus control, see the Instruction manual.
[2] Options A07 Drive Input disconnect and B07 line contactor are available only when a full voltage bypass option Y is selected. Options A07 and B07 are mutually exclusive.
[3] For UL Type 12 and 3R only.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altistart™ 22 Soft Starters

The Altistart 22 is designed for commercial and normal duty industrial applications, it uses both voltage and torque control to provide a soft start and soft stop for there-phase asynchronous motors between 17 A and 590 A. The conformal-coated, printed circuit boards provide enhanced resistance to harsh environments, increasing the service life of installations and lowering maintenance costs.

Select the Altistart 22 soft starter using the nameplate full-load ampere rating of the motor and the table below. The horsepower ratings are for reference only.

Table 18.17: Altistart 22 Selection *[1]*

208 V	230 V	400 kW	460 V	575 V	Rated A	Softstart Reference *[2] or [3]*	Dimensions (inches)			Frame Size
							W	H	D	
3	5	5.5	10	15	17	ATS22D17S6,S6U	5.1	9.8	6.6	A
7.5	10	11	20	25	32	ATS22D32S6,S6U	5.1	9.8	6.6	A
— *[4]*	15	18.5	30	40	47	ATS22D47S6,S6U	5.1	9.8	6.6	A
15	20	22	40	50	63	ATS22D62S6,S6U	5.7	10.9	8.1	B
20	25	30	50	60	75	ATS22D75S6,S6U	5.7	10.9	8.1	B
25	30	37	60	75	88	ATS22D88S6,S6U	5.7	10.9	8.1	B
30	40	45	75	100	110	ATS22C11S6,S6U	5.9	13	9	C
40	50	55	100	125	140	ATS22C14S6,S6U	5.9	13	9	C
50	60	75	125	150	170	ATS22C17S6,S6U	5.9	13	9	C
60	75	90	150	200	210	ATS22C21S6,S6U	8.1	15.6	11.8	D
75	100	110	200	250	250	ATS22C25S6,S6U	8.1	15.6	11.8	D
100	125	132	250	300	320	ATS22C32S6,S6U	8.1	15.6	11.8	D
125	150	160	300	350	410	ATS22C41S6,S6U	8.1	15.6	11.8	D
150	—	220	350	400	480	ATS22C48S6,S6U	11.9	16.8	13.4	E
—	200	250	400	500	590	ATS22C59S6,S6U	11.9	16.8	13.4	E

Table 18.18: Maximum Number of Starts/Stops per Hour

Catalog Number	Number of starts/Stops per Hour
ATS22D17S6U–D88S6U	6 (up to 10 with optional fan)
ATS22C11S6U–C17S6U	4 (up to 10 with optional fan)
ATS22C21S6U–C59S6U	4 (comes with fan)

Altistart™ 22 Options: Fans and Accessories

Table 18.19: Altistart 22 Accessories Selection

Description		Length	Catalog Number
Software			
SoMove™	This software enables the user to configure, set, debug and organize maintenance task for the complete Altivar product line and the Altistart 22 and Altistart 48 soft starters. It can also be used to customize the integrated display terminal menus. It can be used with a direct connection or a Bluetooth® wireless connection. Free download www.schneider-electric.us		
User Interface Kits			
Cable	USB/RS485 cord set (equipped with RJ45 socket)		TCSMCNAM3M002P
Remote Keypadad	IP54/NEMA® 12 keypad		VW3G22101
	IP65 keypad		VW3G22102 *[5]*
Remote Keypad Cords Equipped with 2 RJ45 Connectors	3 FT length		VW3A1104R10
	9 FT length		VW3A1104R30
Modbus Serial Link Connection via splitter box and RJ45 connectors	Modbus™ splitter box (with 10 RJ45 Connectors)		LU9GC3
	Cordsets for Modbus serial link (with 2 RJ45 connectors	.3 m	VW3A8306R03
		1 m	VW3A8306R10
		3 m	VW3A8306R30
	Modbus T-junction boxes (with integrated cables)	.3 m	VW3A8306TF03
		1 m	VW3A8306TF10
	RJ45 Line Terminators (Sold in lots of 2)		VW3A8306RC
Altivar and Altistart Programming Cable	30-Pin mobile to RS-485 converter	2 m	VW3A8151R20U

Table 18.20: Altistart 22 Fans Selection

Power Supply Voltage For Control	For Use On Altistart	Catalog Number
The ATS22C21S6,S6U..C59S6,S6U units come with an integrated fan. The ATS22D17S6,S6U..C17S6,S6U units are ventilated by means of natural ventilation. For more demanding applications, such as those with a greater number of starts, the Altistart 22 range offers fans as an option. The fans are powered by the Altistart 22 unit and attach to the back of the device. The fan's noise level is less than 60 dBA.		
220 V	ATS22D17–D47S6	VW3G22400
	ATS22D62–D88S6	VW3G22401
	ATS22C11–C17S6	VW3G22402
110 V	ATS22D17–D47S6U	VW3G22U400
	ATS22D62–D88S6U	VW3G22U401
	ATS22C11–C17S6U	VW3G22U402

[1] Motor full load amperate (FLA) must not exceed the ampere ratings of the soft starter.
[2] S6 = 208–600 line voltage, 220 V control voltage
[3] S6U = 208–600 line voltage, 110 V control voltage
[4] Value not indicated when there is no corresponding standardized motor.
[5] A remote keypad cord set is required.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



New!

Altistart™ 430 Soft Starters

Effective Motor Management

Altivar Soft Starter ATS430 is the new comprehensive range of soft starters from Schneider Electric for standard industrial machines. It provides functions for effective motor management, including operational performance, reliability, protection, integration in the automation system, and energy efficiency.

Altivar Soft Starter ATS430 is designed to deliver:

- Best-in-class motor control
- High-durability performance to reduce downtime and extend lifespan
- Superior sustainability through energy efficiency and resources preservation
- Cost reduction at each phase of the life cycle

ATS430 covers the operational voltage range from 208 to 600 V in a single product range from 17 up to 590 A to meet the requirements of the most stringent applications in normal duty. The range embeds best practice cybersecurity functions helping to protect operations, and integrates condition monitoring of its most sensitive parts.

Best-in-class Motor Control

ATS430 integrates the TCS (torque control system) to ensure smooth acceleration, deceleration, and preserve the mechanics and hydraulics. Monitoring of the motor, application, power, and energy is built-in; all the data is available to users and the automation system.

High-durability Performance

Altivar Soft Starter ATS430 is designed to help ensure operational continuity. The high-durability performance of ATS430 allows downtime and operational expenditure to be reduced and equipment lifespan to be extended. Durability encompasses:

- Reliability
- Upgradability
- Repairability

Reliability by Design

ATS430 withstands high stress from several sources, whether environmental or operational. It offers enhanced robustness in:

- Thermal conditions, with an extended operating ambient temperature range from -25 to 60°C/13 to 140°F (with derating above 40°C/104°F)
- Mechanical conditions, by using a long-lasting power connection with integrated EverLink™ technology and complying with class 3M3 and class 3S3 according to IEC 60721-3-3 ed. 2002
- Chemical conditions, by complying with class 3C3 according to IEC 60721-3-3 ed. 2002 with salt mist
- Electrical conditions, thanks to a large mains voltage range from 208 to 600 V and a large mains frequency range from 50 or 60 Hz +/-20%

Torque control, the boost function, and the ATS430 starting capabilities all help to increase the resistance to stress originating from the application.

Cybersecurity Best Practices

As limiting events resulting in downtime can also be caused by operators, the ATS430 embeds best practice cybersecurity functions covering:

- User account management, including user authentication, role-based authorization, access channels, and strong passwords
- Tougher access to restrict ports, functions, or services
- Threat intelligence to manage cybersecurity-related events
- Cybersecurity-compliant firmware upgrade

Table 18.21: Altistart™ 430 Selection

Normal Duty, Soft Starter in-line Connection, 208...600 Vac 50/60 Hz Supply									
Motor								**Soft Starter**	
Normal motor power								Reference	Operational rated current Ie[6]
208 V	230 V		400 V	440 V	460V	500 V	575 V		
HP	HP	kW	kW	kW	HP	kW	HP	Catalog Number	Rated A
3	5	4	7.5	7.5	10	9	15	ATS430D17S6	17
7.5	10	7.5	15	15	20	18.5	25	ATS430D32S6	32
—	15	11	22	22	30	30	40	ATS430D47S6	47
15	20	15	30	30	40	37	50	ATS430D62S6	62
20	25	18.5	37	37	50	45	60	ATS430D75S6	75
25	30	22	45	45	60	55	75	ATS430D88S6	88
30	40	30	55	55	75	75	100	ATS430C11S6	110
40	50	37	75	75	100	90	125	ATS430C14S6	140
50	60	45	90	90	125	110	150	ATS430C17S6	170
60	75	55	110	110	150	132	200	ATS430C21S6	210
75	100	75	132	132	200	160	250	ATS430C25S6	250
100	125	90	160	160	250	220	300	ATS430C32S6	320
125	150	110	220	220	300	250	350	ATS430C41S6	410
150	—	132	250	250	350	315	400	ATS430C48S6	480
—	200	160	315	355	400	400	500	ATS430C59S6	590
The nominal motor current In must not exceed the operational rated current Ie.									

[6] Current on operation at a maximum ambient temperature of 40°C (104°F) and up to an ambient temperature of 60°C (140°F), derate current by 1% each °C (1.8°F).

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Table 18.22: Starting Capabilities of ATS430 According to the Service Duty

Service Type	Overloading (Starting)		Service Cycle	
	Overcurrent	Duration	No. of Starts/h	Service Factor
From an application standpoint, the overload is defined depending on the service duty of the motor, S1 (continuous operation) or S4 (intermittent operation).				
Normal duty				
S1	4 x In	23 s	Continuous operation after starting	
	3 x In	46 s		
S4	4 x In	13 s	ATS430D17...C17S6: 10	50%
	3 x In	23 s	ATS430C21...C59S6: 6	
A normal duty application corresponds to motor protection Class 10E.				

Table 18.23: Replacement parts

Description	Corresponding Soft Starter	Reference	Weight kg (lb)
Fan kit + instruction sheet	ATS430C14S6…C17S6	VZ3V4902	0.125 (0.276)
	ATS430C21S6…C59S6	VZ3V4903	0.275 (0.606)
Control block + instruction sheet	ATS430D17S6…. ATS430D47S6	VX4G4301	0.350 (0.772)
	ATS430D62S6…. ATS430C59S6	VX4G4302	0.400 (0.882)

Table 18.24: Power options for ATS430

ATS430 reference	Protective covers for power terminals	Line chokes
ATS430D17S6	—	VZ1L015UM17T
ATS430D32S6	—	VZ1L040U600T
ATS430D47S6	—	VZ1L070U350T
ATS430D62S6	—	VZ1L070U350T
ATS430D75S6	—	VZ1L150U170T
ATS430D88S6	—	VZ1L150U170T
ATS430C11S6	—	VZ1L150U170T
ATS430C14S6	VW3G4701	VZ1L150U170T
ATS430C17S6	VW3G4701	VZ1L250U100T
ATS430C21S6	VW3G4702	VZ1L250U100T
ATS430C25S6	VW3G4702	VZ1L250U100T
ATS430C32S6	VW3G4702	VZ1L325U075T
ATS430C41S6	VW3G4702	VZ1L530U045T
ATS430C48S6	VW3G4703	VZ1L530U045T
ATS430C59S6	VW3G4703	VZ1LM10U024T

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



Altistart™ 480 Soft Starters

The Altivar Soft Starter ATS480 is a controller with six thyristors using the TCS (torque control system) algorithm to control acceleration, deceleration, and stopping of three-phase squirrel cage asynchronous motors up to 900 kW.

The ATS480 is a cost-effective solution designed to:

- Reduce machine operating costs by reducing mechanical stress and improving machine availability
- Reduce the risk of severe damage by reducing fluid shocks
- Reduce the stress on the electrical distribution system by reducing line current peaks and voltage drops during motor starts

Altivar Soft Starter ATS480 consists of one range only covering:

- Operational voltage from 208 V to 690 V
- Operational current from 17 A to 1200 A

ATS480 integrates Modbus serial line communication protocols as standard. Each device is equipped with two RJ45 ports for:

- Connection to configuration and firmware update software
- Connection of the plain text display terminal or graphic display terminal
- Connection to a Modbus fieldbus

In addition, the ATS480 is equipped with one slot for a communication module:

- Modbus TCP
- EtherNet/IP
- CANopen
- PROFINET
- PROFIBUS DP

Table 18.25: Altistart™ 480 Selection

ATS480 in-line, not bypassed								
Motor nameplate							**ATS480**	
Rated operational voltage (Ue) Rated motor power							Reference	Operational rated current (Ie)
230 V	400 V	440 V	500 V	525 V	660 V	690 V		
kW	kW	kW	kW	kW	kW	kW	Catalog Number	Rated A
Normal duty applications								
4	7.5	7.5	9	9	11	15	ATS480D17Y	17
5.5	11	11	11	11	15	18.5	ATS480D22Y	22
7.5	15	15	18.5	18.5	22	22	ATS480D32Y	32
9	18.5	18.5	22	22	30	30	ATS480D38Y	38
11	22	22	30	30	37	37	ATS480D47Y	47
15	30	30	37	37	45	45	ATS480D62Y	62
18.5	37	37	45	45	55	55	ATS480D75Y	75
22	45	45	55	55	75	75	ATS480D88Y	88
30	55	55	75	75	90	90	ATS480C11Y	110
37	75	75	90	90	110	110	ATS480C14Y	140
45	90	90	110	110	132	160	ATS480C17Y	170
55	110	110	132	132	160	200	ATS480C21Y	210
75	132	132	160	160	220	250	ATS480C25Y	250
90	160	160	220	220	250	315	ATS480C32Y	320
110	220	220	250	250	355	400	ATS480C41Y	410
132	250	250	315	315	400	500	ATS480C48Y	480
160	315	355	400	400	560	560	ATS480C59Y	590
—	355	400	—	—	630	630	ATS480C66Y	660
220	400	500	500	500	710	710	ATS480C79Y	790
250	500	630	630	630	900	900	ATS480M10Y	1000
355	630	710	800	800	—	—	ATS480M12Y	1200

Table 18.26: Altistart™ 480 Options

Description		Catalog Number
Software		
SoMove™	This software enables the user to configure, set, debug and organize maintenance task for the complete Altivar product line and the Altistart 22 and Altistart 480 soft starters. It can also be used to customize the integrated display terminal menus. It can be used with a direct connection or a Bluetooth® wireless connection. Free download www.se.com/us/en.	
User Interface Kits		
Door Mounting Kits:		
Display Terminal IP43, delivered with the soft starter		VW3A1113
Door mounting kit — refer to the Instruction Sheet EAV91355		VW3A1114
Graphic Display Terminal IP65		VW3A1111
Door mounting kit for remote graphic terminal IP65 — refer to the Instruction Sheet EAV76406		VW3A1112
Select one of the following RJ45 cables to connect the remote mounting kit to the soft starter: (not included with the remote kit):		
1 meter connection cable		VW3A1104R10
3 meter connection cable		VW3A1104R30
5 meter connection cable		VW3A1104R50
10 meter connection cable		VW3A1104R100
USB to RJ45 Adaptor Kit for connecting to a PC with a USB port		TCSMCNAM3M002P
Ethernet IP/ Modbus TCP Fieldbus Module		VW3A3720
PROFIBUS Module		VW3A3607
PROFINET		VW3A3647
CANopen + complete accessories		VW3A3608 VW3A3618 VW3A3628
Shrouds		LA9F702 LA9F703 LA9F704



IP43 VW31114



IP65 VW3A1112

© 2025 Schneider Electric
All Rights Reserved
6/11/2025



New!

Altistart™ 490 Soft Starters

Your assets are priority

Altivar Soft Starter ATS490 is the new comprehensive range of soft starters from Schneider Electric providing advanced motor management for the majority of industrial applications. It offers operational performance, reliability, complete monitoring, integration in the automation system, and energy efficiency.

Altivar Soft Starter ATS490 is designed to deliver:

- High-durability performance to maximize uptime with service life
- Superior sustainability
- Cost reduction at each phase of the service life

ATS490 covers the operational voltage range from 208 to 690 V in a single product range up to 1200 A, meets the requirements of the most stringent applications in normal and heavy duty. The range embeds innovative features that simplify the equipment and its design, while minimizing risks through certification.

Improving operational resilience

Altivar Soft Starter ATS490 is designed to help ensure continuity of operation. The high-durability performance of ATS490 applies not only to the product itself but also to the whole system to avoid disruption and reduce downtime.

Enhanced reliability

ATS490 withstands high stress from several origins, whether environmental or operational. It offers enhanced robustness against:

- Thermal conditions with an extended ambient operating temperature from -25 to 60° C/-13 to 140°F (with derating above 40°C/104°F)
- Mechanical conditions by using a long-lasting power connection with integrated EverLink™ technology and complying with class 3S3 according to IEC 60721-3-3
- Chemical conditions by complying with class 3C3 according to IEC 60721-3-3 ed. 2002 with salt mist
- Electrical conditions thanks to a large mains voltage range from 208 to 690 V and a large mains frequency range from 50 or 60 Hz +/-20%

The reliability on operating stress is also reinforced by TCS, the original Torque Control System by Schneider Electric, and by its starting capabilities that include high starting duration and high number of starts per hour.

Certified cybersecurity functions

ATS490 integrates IEC 62443-4-2 cybersecurity features certified by TÜV Rheinland with a development process that is IEC 62443-4-1 certified. The embedded functions include:

- User account management, including user authentication, role-based authorization, access channels, and strong passwords
- Tougher access to restrict communication ports and related functions or services
- Threat intelligence to manage cybersecurity-related events
- Cybersecurity-compliant firmware upgrade

Table 18.27: Altistart™ 490 Selection

Normal Duty, Soft Starter in-line Connection, 208...690 Vac 50/60 Hz Supply										
Motor									**Soft Starter**	
Normal motor power									Reference	Operational rated current Ie [7]
208 V	230 V		400 V	440 V	460V	500 V	575 V	69075 V		
HP	HP	kW	kW	kW	HP	kW	HP	kW	Catalog Number	Rated A
3	5	4	7.5	7.5	10	9	15	15	ATS490D17Y	17
5	7.5	5.5	11	11	15	11	20	18.5	ATS490D22Y	22
7.5	10	7.5	15	15	20	18.5	25	22	ATS490D32Y	32
10	—	9	18.5	18.5	25	22	30	30	ATS490D38Y	38
—	15	11	22	22	30	30	40	37	ATS490D47Y	47
15	20	15	30	30	40	37	50	45	ATS490D62Y	62
20	25	18.5	37	37	50	45	60	55	ATS490D75Y	75
25	30	22	45	45	60	55	75	75	ATS490D88Y	88
30	40	30	55	55	75	75	100	90	ATS490C11Y	110
40	50	37	75	75	100	90	125	110	ATS490C14Y	140
50	60	45	90	90	125	110	150	160	ATS490C17Y	170
60	75	55	110	110	150	132	200	200	ATS490C21Y	210
75	100	75	132	132	200	160	250	250	ATS490C25Y	250
100	125	90	160	160	250	220	300	315	ATS490C32Y	320
125	150	110	220	220	300	250	350	400	ATS490C41Y	410
150	—	132	250	250	350	315	400	500	ATS490C48Y	480
—	200	160	315	355	400	400	500	560	ATS490C59Y	590
200	250	—	355	400	500	—	600	630	ATS490C66Y	660
250	300	220	400	500	600	500	800	710	ATS490C79Y	790
350	350	250	500	630	800	630	1000	900	ATS490M10Y	1000
400	450	355	630	710	1000	800	1200	—	ATS490M12Y	1200
The nominal motor current In must not exceed the operational rated current Ie.										

[7] Current on operation at a maximum ambient temperature of 40°C (104°F). Above 40°C (l04°F) and up to an ambient temperature of 60°C (140°F), derate current by 1% each °C (1.8°F).

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Table 18.28: Starting Capabilities of ATS490 According to the Service Duty

Application Duty	Overloading (Starting)		Service Cycle	
	Overcurrent	Duration	No. of Starts/h	Conduction
From an application standpoint, the overload is defined depending on the service duty of the motor, S1 (continuous operation) or S4 (intermittent operation).				
S1 (Continuous operation)				
Normal duty	4 x In	23 s	Continuous operation after starting	
	3 x In	46 s		
Heavy duty	4 x In	48 s	Continuous operation after starting	
	3 x In	90 s		
S4 (Intermittent operation)				
ATS490D17Y...C17Y				
Normal duty	4 x In	13 s	10	50%
	3 x In	23 s		
Heavy duty	4 x In	25 s	10	50%
ATS490C21Y...M12Y				
Normal duty	4 x In	13 s	6	50%
	3 x In	23 s		
Heavy duty	4 x In	25 s	6	50%
Each application duty has a corresponding motor protection class: • Normal duty → motor thermal protection Class 10E • Heavy duty → motor thermal protection Class 20E				

Table 18.29: Replacement parts

Description	Corresponding Soft Starter	Reference	Weight kg (lb)
Fan kit + instruction sheet	ATS490D88Y…C17Y	VZ3V4902	0.125 (0.276)
	ATS490C21Y…C66Y	VZ3V4903	0.275 (0.606)
	ATS490C79Y…M12Y	VZ3V4904	1.7 (3.748)
Control block + instruction sheet	All ATS490 soft starters	VX4G4901	0.390 (0.860)

Table 18.30: Power options for ATS490

ATS490 reference	Protective covers for power terminals	Line chokes
ATS490D17Y	—	VZ1L015UM17T
ATS490D22Y	—	VZ1L030U800T
ATS490D32Y	—	VZ1L040U600T
ATS490D38Y	—	VZ1L040U600T
ATS490D47Y	—	VZ1L070U350T
ATS490D62Y	—	VZ1L070U350T
ATS490D75Y	—	VZ1L150U170T
ATS490D88Y	—	VZ1L150U170T
ATS490C11Y	—	VZ1L150U170T
ATS490C14Y	VW3G4701	VZ1L150U170T
ATS490C17Y	VW3G4701	VZ1L250U100T
ATS490C21Y	VW3G4702	VZ1L250U100T
ATS490C25Y	VW3G4702	VZ1L250U100T
ATS490C32Y	VW3G4702	VZ1L325U075T
ATS490C41Y	VW3G4702	VZ1L530U045T
ATS490C48Y	VW3G4703	VZ1L530U045T
ATS490C59Y	VW3G4703	VZ1LM10U024T
ATS490C66Y	VW3G4703	VZ1LM10U024T
ATS490C79Y	—	VZ1LM10U024T
ATS490M10Y	—	VZ1LM10U024T
ATS490M12Y	—	VZ1LM14U016T

Table 18.31: ATS490 Communication Modules

Description	Reference
CANopen daisy chain	VW3A3608
CANopen SUB-D	VW3A3618
CANopen screw terminal block	VW3A3628
Profibus DP V1	VW3A3607

© 2025 Schneider Electric
All Rights Reserved
6/11/2025





Enclosed Altistart™ 22 Motor Controllers

Enclosed Altistart 22 (ATS22) solid-state combination motor controllers are a pre-engineered, integrated solution for reduced voltage starting and soft stopping of standard three-phase asynchronous induction (squirrel cage) motors. The Enclosed 22 controllers consist of a disconnect means and an ATS22 softstarter in a stand-alone enclosure. Enclosed 22 controllers integrate the ATS22 softstart technology into a combination package for application requirements up to 400 hp at 460 V.

- 3–150 hp, 208 V
- 5–200 hp, 230 V
- 10–400 hp, 460 V
- 15–500 hp, 575V

Table 18.32: Enclosed Altistart 22 Catalog Number Description

Field	Digit	Characteristic	Description
—	—	Controller Class	8638 = Fused Disconnect *[1]* 8639 = Circuit Breaker Disconnect
01	1–3	Controller Style	22F = Altistart 22 with Class J Fuse Clips and Molded Case Switch *[1]* 22T = Altistart 22 with PowerPact Motor Circuit Protector 22U = Altistart 22 with PowerPact Thermal-Magnetic Circuit Breaker
02	4	Horsepower	A = 3 hp B = 5 hp C = 7.5 hp D = 10 hp E = 15 hp F = 20 hp G = 25 hp H = 30 hp J = 40 hp K = 50 hp L = 60 hp M = 75 hp N = 100 hp P = 125 hp Q = 150 hp R=200 hp S= 250 hp T= 300 hp U=350 hp W= 400 hp X= 500 hp
03	5	Enclosure Type	G = UL Type 1 General Purpose A = UL Type 12K Industrial Use, Dust-Tight/Drip-Tight H = UL Type 3R Outdoor Use
04	6	Voltage	2 = 208 Vac 3 = 230 Vac 4 = 460 Vac 5 = 575 Vac
05	7	Power Circuit	B = Basic Shunt Trip S = Full-Featured Shunt Trip N = Non-Reversing Isolation R = Reversing Isolation Y = Integral Full-Voltage Bypass
06	8–10	Control Options *[2] [3]*	A06 = Start-Stop Push Buttons B06 = Forward-Off-Reverse C06 = Hand-Off-Auto (HOA) Selector Switch D06 = Stop-Run Selector Switch E06 = Hand-Auto Selector Switch/Start-Stop Push Buttons
07	11–13	Pilot Device Options *[2] [3]*	A07 = Run Light (Red), Off Light (Green) B07 = Push-to-Test Run Light (Red), Push-to-Test Off Light (Green) C07 = Run Light (Red), Off Light (Green), Tripped Light/Reset (Yellow) D07 = PTT Run Light (Red), PTT Off Light (Green), Tripped Light/Reset (Yellow)
08	14–16	Metering Options	B08 = Elapsed Run Time Meter *[3]*
09	17–19	Miscellaneous Options	A10 = Floor Mounting Kit *[4]* B10 = Additional 150 VA *[5]* C10 = Power-Up On Delay Relay*[6]* D10 = Emergency Stop Push Button *[5]* E10 = cUL Label *[7]* F10 = Auxiliary Run Mode Contacts G10 = Auxiliary FB Bypass Contacts *[8]* H10 = Auxiliary Auto Mode Contacts *[9]* J10 = Auxiliary Trip Indication Contacts L10 = ID Engraved Nameplate *[5]* M10 = 10 Spare Terminal Blocks *[5]* P10 = Permanent Wire Markers *[5]* R10 = MOV-Surge Arrestor *[5]* U10 = Omit Door-Mounted Keypad Display *[10]* X10 = 50 °C Operation Y10 = Seismic qualification label Z10 = Service Entrance Rating *[7] [11]* 910 = American Recovery and Reinvestment Act (ARRA) Option

Table 18.33: Enclosed Altistart 22 Catalog Number Example: 863922UCG4BA06A07

Field							
—	1	2	3	4	5	6	7
8639	22U	C	G	4	B	A06	A07
Controller Class	PowerPact™ Thermal- Magnetic Circuit Breaker	7.5 hp	Type 1 General Purpose	460 Vac	Basic Shunt Trip	Start-Stop Push Button	Run Light (Red), Off Light (Green

[1] This option is not selectable with power circuit option B05.
[2] Select only one option.
[3] To omit, do not include a selection in the catalog number.
[4] This option is available only for enclosure size D.
[5] This option is not selectable with power circuit option B05
[6] This option is not selectable with power circuit option B05. This option is valid only with the following control options: C06, D06, or E06.
[7] Options E10 and Z10 cannot be used together.
[8] This option is not selectable with power circuit option B05. The contacts are available only when power circuit option Y05 is selected.
[9] The contacts are not available when power circuit option R05 is selected. This option is valid only with the following control options: C06, D06, or E06.
[10] If you select option U10, you must separately order the remote keypad (VW3G22101) and cable (VW3A1104R30) to commission the softstarter. Refer to the *ATS22 User Manual*, BBV51330, for serial communication programming and control capabilities.
[11] Options E10 and Z10 cannot be ordered together.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Enclosed Altistart 22 Control Options (pick one)

Mod A06	Start/Stop push buttons
	Provides black start and red stop push buttons (3-wire control scheme).
Mod B06	Forward-Off-Reverse selector switch
	Provides three-position selector switch to select between forward, off and reverse. Uses 2-wire control.
Mod C06	Hand-Off-Auto selector switch
	Provides a three-position selector switch, 2-wire control scheme.
Mod D06	Stop-Run selector switch
	Provides a two-position selector switch.
Mod E06	Hand-Auto selector switch and Start/Stop push buttons
	Provides a two-position selector switch and start/stop push buttons (3-wire control).

Enclosed Altistart 22 Pilot Light Cluster Options (pick one)

Mod A07	Pilot light cluster #1
	Consists of red “RUN” and green “OFF” pilot lights. Provides standard red “RUN (ON)” and green “OFF” pilot lights for status annunciation.
Mod B07	Pilot light cluster #2
	Consists of red “RUN” (push-to-test) and green “OFF” (push-to-test) pilot lights. Provides push-to-test type red “RUN (ON)” and standard green “OFF” pilot lights for status annunciation.
Mod C07	Pilot light cluster #3
	Consists of red “RUN”, green “OFF” and yellow “FAULT” pilot lights. Provides standard red “RUN (ON)” green “OFF” and yellow “FAULT” pilot lights for status annunciation.
Mod D07	Pilot light cluster #4
	Consists of red “RUN (ON)” (push-to-test), green “OFF” (push-to-test) and yellow “FAULT” (push-to-reset) pilot lights. Provides push-to-test type red “RUN (ON)” standard green “OFF”, and push-to-reset type yellow “FAULT” for status annunciation.

Enclosed Altistart 22 Meter Display Options (pick one)

Mod BO8	Elapsed time meter
	Provides a seven-digit analog, non-resettable elapsed run time meter. Not available on Type 3R Enclosures

Enclosed Altistart 22 Miscellaneous Options (multiple compatible options may be selected

Mod A10	Floor mounting kit
	Only available for size D enclosures.
Rules: Available for power options S05, N05, R05, Y05.	
Mod B10	150 VA additional control power capacity
	Provides 150 VA additional control VA capacity for customer use.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Information and Selection of AC Drives

For product information and selection, visit **Variable Speed Drives** on www.se.com/us

Technical Support and Services for AC Drives

Drive Product Support Group

For support and assistance, contact the Drive Product Support Group. The Drive Product Support Group is staffed from 8:00 am until 8:00 pm Eastern time to assist with diagnosis of product problems. For support with applications or product selection, please contact a drive specialist at your local authorized Schneider Electric Distributor. Click here to locate an Automation and Control distributor near you: Find Electrical, Automation, and Control Distributors.
EMERGENCY Technical phone support is available 24 hours a day, 365 days a year.

Toll Free:	888-778-2733
E–mail:	drive.products.support@schneider-electric.com
Fax:	919-217-6508

Schneider Electric Services

Schneider Electric offers a broad range of Services for electrical distribution assets and systems to support the lifecycle of your equipment, for any manufacturer's. With 6,500+ experts and 260+ consultants in electrical and automation asset management services in 140 countries within 430 Services centers, Schneider Electric Services responds to your requests, seven days a week, 24 hours a day.

Toll Free (888-778-2733)

se.com/us/services

Customer Training for AC Drives

Schneider Electric offers a variety of instructor-led, skill enhancing and technical product training programs for customers. For a complete list of drives/soft starter training with dates, locations, and pricing, please call:

Phone:	978-975-9306
Fax:	978-975-2821

Packaged Product Documentation for AC Drives

Standard Documentation

Each adjustable frequency drive or soft starter shipped includes one set of instruction bulletins. Each set of instruction bulletins includes installation, start–up, troubleshooting and wiring diagram information. Separate Approval and/or Record Drawings are not included.

Approval and Record Drawings

All factory orders for enclosed drives and soft starters come with factory supplied user drawings and are identified by a factory order number. The factory supplied drawing set typically includes:

- Enclosure outline drawing
- Power elementary drawing
- Control elementary drawing
- Interconnection drawing

These drawings are also available in DWG, DXF, IGS, Microcad and PDF formats upon customer request.

Product Literature

To view or download product literature visit **Variable Speed Drives** on www.se.com/us or visit our Download Center at www.se.com/us/en/download/.

© 2025 Schneider Electric
All Rights Reserved
6/11/2025

Section 19

Push Buttons and Operator Interface



XVL Compact Light



Type J Compact Light



16 mm XB6



22 mm XB4



122 mm XB5



XB5R Wireless, Batteryless Push Button



XB5S Biometric Switch



30 mm Type K



30 mm Type SK



30 mm Type KX



Type KY Enclosure



Type B Wall Station



Pendant Stations



Tower Lights



Type A Foot Switch



Rotary Cam Switch

Overview 19-2

- Production Environment Scenarios 19-2

Selection Guide 19-4

- Push Buttons and Pilot Lights 19-4
- Control Stations 19-5
- Pendant Stations 19-6
- Tower Lights and Beacons 19-7

22 and 30 mm Most Common Complete Operators 19-10

- XB4–XB5 Common Operators, Complete with Contact Blocks 19-10
- Type K, SK Common Operators, Complete with Contact Blocks 19-11

22 mm Push Buttons 19-12

- XB4 Complete Devices 19-12
- XB5 Complete Devices 19-27
- XB5R Plastic and XB4R Metal Wireless, Batteryless Push Buttons 19-43
- XB7 Push Buttons 19-46

30 mm Push Buttons 19-49

16 mm Push Buttons 19-68

- XB6 Complete Devices 19-68

Rotary Cam Switches 19-70

Control Stations and Enclosures 19-74

- XAL 22 mm Control Stations 19-74
- XAP 22 mm Enclosures and Accessories 19-75
- 9001B Standard Duty Control Stations 19-76
- 30 mm Control Stations and Enclosures 19-77
- 30 mm Enclosures 19-78

Pendant Stations 19-80

- Wireless Remote Control System 19-80
- Type BW Pendant Stations 19-83
- XAC Standard Duty Pistol Grips, Enclosures, Contact Blocks 19-84
- Type XACA Worksheet 19-85

Tower Lights and Beacons 19-86

- Signaling Units 19-91

Foot Switches 19-98

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


Introduction

Schneider Electric provides various products for usage in setting up and automating production system environments. The illustrations below provide examples of how to use the Harmony and XB/XV series products in a production environment.

The following illustration serves as an example of a product application map, showing how Schneider Electric's Harmony and XB/XV series components can be incorporated throughout an automated production line for:

- Machine control
- Safety
- Signaling
- Remote operation
- Access management

It demonstrates where each component type typically fits within a industrial environment, and is a reference for designing modern automated production systems where reliability, safety, and intuitive interaction are critical.

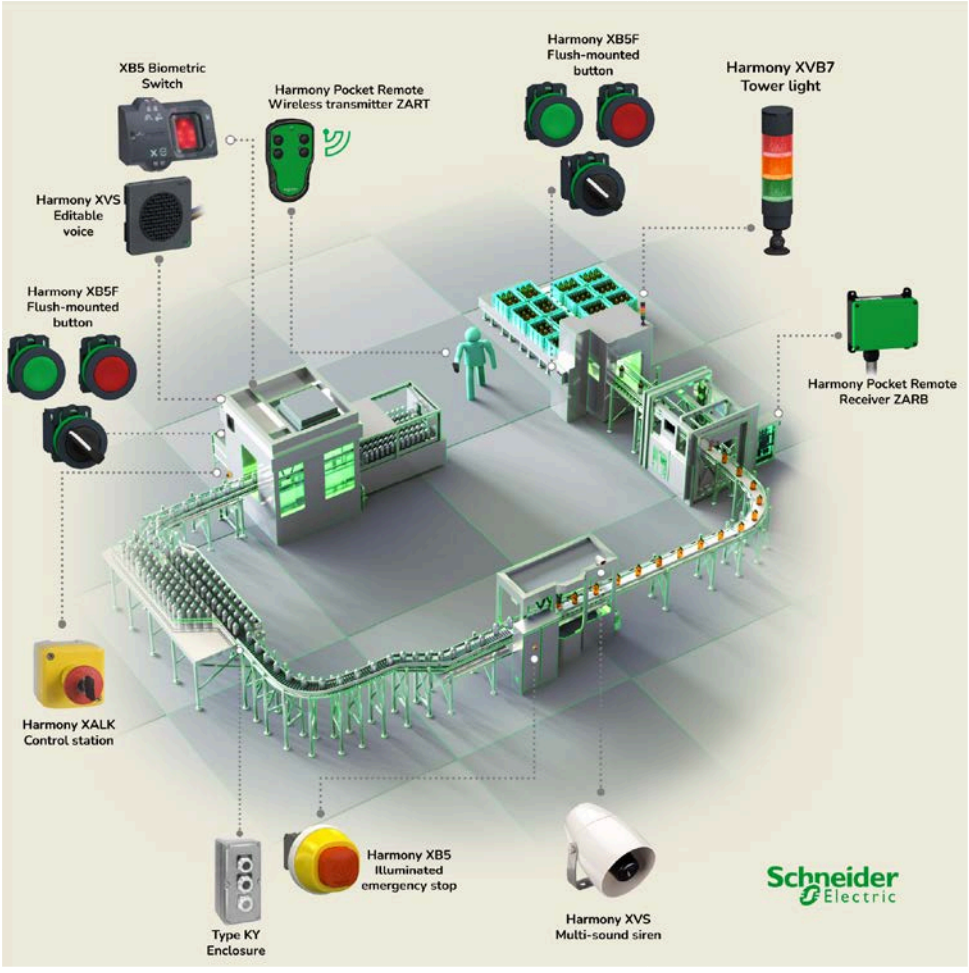


See the links in the table below for more detail information on the components in the above image.

Product	Product information link
XB5 biometric switch	Push Button Selection Guide, page 19-4 and XB5 Complete Devices, page 19-27
Harmony pocket remote wireless transmitter ZART	Pendant Station Selection Guide, page 19-6 and Wireless Remote Control System, page 19-80
Harmony XB5F flush-mounted button	Push Button Selection Guide, page 19-4 and XB5 Complete Devices, page 19-27
Harmony XVB7 tower light	Tower Lights and Beacons Selection Guide (1 of 2), page 19-7, Tower Lights and Beacons Selection Guide (2 of 2), page 19-8 and Tower Lights and Beacons, page 19-86
Harmony pocket remote receiver ZARB	Pendant Station Selection Guide, page 19-6 and Wireless Remote Control System, page 19-80
Harmony XVS editable voice	XVSV Editable Voice Alarms, page 19-97
Harmony XALK control station	Control Station Selection Guide, page 19-5 and XAL Control Stations, Enclosures, and Accessories, page 19-74
Type KY enclosure	9001KY and 9001SKY Control Stations, page 19-78
Harmony XB5 illuminated emergency stop	Push Button Selection Guide, page 19-4, XB5 Emergency Stop Operators, page 19-33, and XB5 Illuminated Operators, page 19-37
Harmony XVS multi-sound siren	Tower Lights and Beacons Selection Guide (2 of 2), page 19-8 and XVS Sirens and Electronic Alarms, page 19-97

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

The image below is an industrial automation illustration that shows various Harmony series control and signaling devices integrated into a factory or production line environment. This example highlights how different components connect to and support the operation of an automated machinery setup.

The image shows how the components are connected visually to a factory assembly line, demonstrating how the Harmony devices support control, safety, communication, and visualization in industrial automation systems.

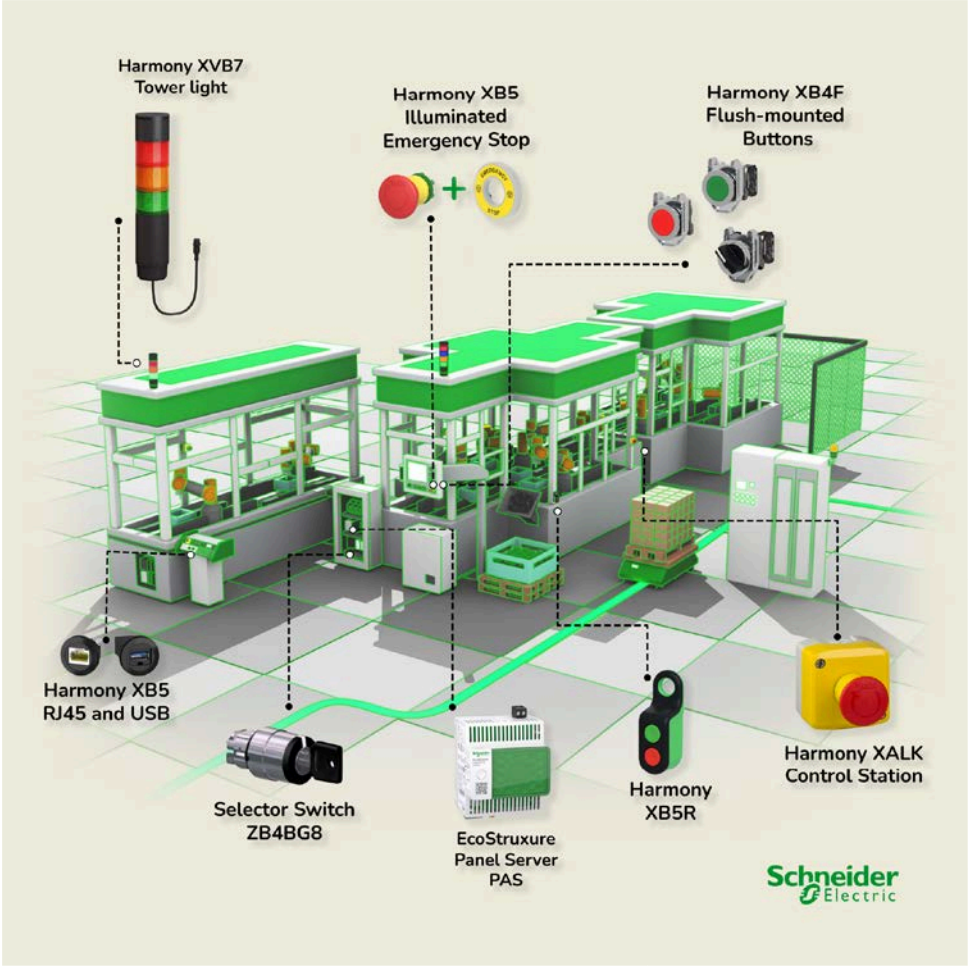

See the links in the table below for more detail information on the components in the above image.

Product	Product information link
Harmony XVB7 tower light	Tower Lights and Beacons Selection Guide (1 of 2), page 19-7, Tower Lights and Beacons Selection Guide (2 of 2), page 19-8 and Tower Lights and Beacons, page 19-86
Harmony XB5 illuminated emergency stop	Push Button Selection Guide, page 19-4, XB5 Emergency Stop Operators, page 19-33, and XB5 Illuminated Operators, page 19-37
Harmony XB4F flush-mounted buttons	Push Button Selection Guide, page 19-4 and XB4 Complete Devices, page 19-12
Selector switch ZB4BG8	Push Button Selection Guide, page 19-4 and XB4 Selector Switches, page 19-18
Harmony XB5R	XB5R Plastic and XB4R Metal Wireless, Batteryless Push Buttons, page 19-43
Harmony XALK control station	Control Station Selection Guide, page 19-5 and XAL Control Stations, Enclosures, and Accessories, page 19-74

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Push Button Selection Guide

Family	XB4	XB5	XB7	9001K	9001SK	9001KX
						
Type of Product	*22 mm Push Button (metal)	**22 mm Push Button (plastic)	***22mm Push Button (plastic)	****30 mm Push Button (metal)	****30 mm Push Button (plastic)	****30 mm Push Button (metal, square)
Mounting Hole Diameter	22.5 mm	22.5 mm	22.5 mm	31 mm (1.22 in)	31 mm (1.22 in)	31 mm (1.22 in)
Approvals	UL Listed File E164353, CCN NKCR UL Recognized File E164353. CCN NKCR2	UL Listed File E164353, CCN NKCR UL Recognized File E164353., CCN NKCR2	UL File E164353, CCN NKCR	UL File E78403. CCN NKCR	UL File E78403. CCN NKCR	UL File E78403. CCN NKCR
	CSA File LR44087. Class 3211-03	CSA File LR44087. Class 3211-03	CSA File LR44087-122 Class 3211-03	CSA File LR25490. Class 3211-03	CSA File LR25490. Class 3211-03	CSA File LR25490. Class 3211-03
Conforming to Standards	CE Marked RoHS Compliant	CE Marked RoHS Compliant	CE Marked RoHS Compliant	CE Marked RoHS Compliant	CE Marked RoHS Compliant	CE Marked RoHS Compliant
	EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4, EN/IEC 60947-5-5	EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4, EN/IEC 60947-5-5	EN/IEC 60947-1, EN/IEC 60947-5-1 for push buttons, pilot lights, illuminated push buttons and selector switches EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-5,	EN/IEC 60947-1	EN/IEC 60947-1	EN/IEC 60947-1
	EN/IEC 60204-1 and EN/ISO 13850: 2006 (trigger action and mechanical latching emergency stop push buttons)	EN/IEC 60204-1 and EN/ISO 13850: 2006 (trigger action and mechanical latching emergency stop push button).	EN/IEC 60204-1 and EN/ISO 13850 for Emergency Stop trigger action push buttons	EN/IEC60947-5-1	EN/IEC60947-5-1	EN/IEC60947-5-1
	EN/IEC 60364-5-53 (emergency switching of mechanical latching push buttons)	EN/IEC 60364-5-53 (emergency switching of mechanical latching push buttons)		EN/IEC60947-5-4	EN/IEC60947-5-4	EN/IEC60947-5-4
	—	EN81-1 (emergency stop trigger action and mechanical latching push buttons with mechanical state indicator)				
	JIS C 4520	JIS C 4520		JIS C 4520 and 852	JIS C 4520 and 852	JIS C 4520 and 852
	UL 508	UL 508	UL 508	UL 508	UL 508	UL 508
	CSA C22.2 No.14	CSA C22.-2 No.14	CSA C22 No.14	CSA C22.2 No.14	CSA C22.2 No.14	CSA C22.2 No.14
	GOST	GOST				
	CCC	CCC	CCC			
			GB 14048.5 for all XB7 range			
Degree of Protection	IP65, IP69, IP69K	IP65, IP69, IP69K	IP54, IP65	IP65	IP65	IP66
	IP66 for booted	IP66 for booted	—	—	—	—
	NEMA 1, 2, 3, 4, 4X, 12, 13	NEMA 1, 2, 3, 3R, 4, 4X, 12, 13	NEMA 3, 4, 12	NEMA 1, 2, 3, 3R, 4, 12, 13	NEMA 1, 2, 3, 3R, 4, 4X, 12, 13	NEMA 1, 2, 3, 3R, 4, 12, 13
Operating Temperature F° (C°)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-13 to 158 (-25 to 70)	-22 to 140 (-30 to 60)	-22 to 140 (-30 to 60)	-22 to 140 (-30 to 60)
Storage Temperature F° (C°)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)
Electric Shock Protection	Class I	Class I	—	Class II	Class II	Class II
Electrical Consumption						
LED	24 Vac/Vdc: 18 mA 120 Vac: 14 mA 240 Vac: 14 mA	24 Vac/Vdc: 18 mA 120 Vac: 14 mA 240 Vac: 14 mA	Illuminated Push Buttons: 24V - 18mA 120V - 12mA 230V - 22mA Pilot Lights 24V - 20mA 120V - 18mA 230V - 16mA	Incandescent and LED bulbs. For ratings, see Standard Light Modules, page 19-65.	Incandescent and LED bulbs. For ratings, see Standard Light Modules, page 19-65.	Incandescent
Rated Operational Characteristics	AC-15; B600 Ue = 600 Vac and Ie = 1.2 A Ue = 240 Vac and Ie = 3A Ue = 120 Vac and Ie = 6A Continuous 10 A	AC-15; B600 Ue = 600 Vac and Ie = 1.2 A Ue = 240 Vac and Ie = 3 A Ue = 120 Vac and Ie = 6 A Continuous 10 A	AC-14; D300 Ue = 240 Vac and Ie = 0.3A Ue = 120 Vac and Ie = 0.6A Continuous 4 A	AC-15; A600 Continuous 10 A	AC-15; A600 Continuous 10 A	AC-15; A600 Continuous 10 A
	DC-13; Q600 Ue = 600 Vdc and Ie = 0.1 A Ue = 250 Vdc and Ie = 0.27 A Ue = 125 Vdc and Ie = 0.55 A	DC-13; Q600 Ue = 600 Vdc and Ie = 0.1 A Ue = 250Vdc and Ie = 0.27 A Ue = 125 Vdc and Ie = 0.55 A	DC-13; R300 Ue = 250 Vdc and Ie = 0.1A Ue = 125 Vdc and Ie = 0.22A	DC-13; Q600 Ue = 600 Vdc and Ie = 0.1 A Ue = 250 Vdc and Ie = 0.27 A Ue = 125 Vdc and Ie = 0.55 A	DC-13; Q600 Ue = 600 Vdc and Ie = 0.1 A Ue = 250 Vdc and Ie = 0.27 A Ue = 125 Vdc and Ie = 0.55 A	DC-13; Q600 Ue = 600 Vdc and Ie = 0.1 A Ue = 250 Vdc and Ie = 0.27 A Ue = 125 Vdc and Ie = 0.55 A
Connection Type	IP20 Fingersafe Screw or Spring Terminal		Screw and captive clamp terminal connections Faston clip connections (pilot lights)	IP20 Fingersafe Screw Terminal		
	Screw Terminal:	Spring Terminal:				
Cable Size	1 x 24 AWG (0.22 mm²) min. 2 x 14 AWG (2.5 mm²) max. 2 x 16 AWG (1.5 mm²) max.	1 x 24 AWG (0.22 mm²) min. 2 x 14 AWG (2.5 mm²) max. 2 x 16 AWG (1.5 mm²) max.		1 x 24 AWG (0.22 mm²) min. 2 x 16 AWG (1.5 mm²) max	1 x 24 AWG (0.22 mm²) min. 2 x 16 AWG (1.5 mm²) max	1 x 24 AWG (0.2 2mm²) min. 2 x 16 AWG (1.5 mm²) max
Digest Location	XB4, page 19-12	XB5, page 19-27	XB7, page 19-46	Type K, page 19-49	Type SK, page 19-57	KX, page

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Control Station Selection Guide

Family	XAL	XAP	9001B
	 XALD02  XALDW01	 XAPA1100  XAPA1104	 NEMA 1 Surface Mounting 9001BG••  NEMA 1 Flush Mounting 9001BF••  NEMA 4 9001BW••  NEMA 7 and 9 9001BR••
Type of Product/Material	XALD—Polycarbonate XALK—Polycarbonate	XAPA—glass filled polyester XAPG—die cast zinc XAPE—anodized aluminum	9001BG—plastic cover 9001BF—stainless steel 9001BW—die cast zinc 9001BR—cast aluminum
Number of holes	1 to 3	0 to 16	1 to 3
Type of Operators	XB5 (22mm)	XB5 (22mm)	Built in
Available without Operators	Yes	Yes	No
Available with Operators	Yes	No	Yes
Approvals	UL File E164353 CCN NKCR	UL File E164353 CCN NKCR	UL File E78403 CCN NKCR
	CSA File LR 44087 Class 3211-03	CSA File LR 44087 Class 3211-03	CSA File LR 25490 Class 3211-03
Conforming to Standards	CE Marked	CE Marked	CE Marked
	EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4,	EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4,	EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4,
	JIS C 4520	JIS C 4520	JIS C 4520
	UL 508	UL 508	UL 508
	CSA C22.2 No.14	CSA C22.2 No.14	CSA C22.2 No.14
Degree of Protection	1, 4, 4X, 13 IP65 IP66 - Booted	XAPA - 4, 4X, 12, IP65 XAPG - 4, 12, IP65 XAPE - 4, 4X, 12, IP65	9001BG - 1 9001BF - 1 9001BW - 4 9001BR - 7, 9
Operating Temperature F° (C°)	-13 to 158 (-25 to 70)	-13 to 158 (-25 to 70)	
Storage Temperature F° (C°)	-40 to 158 (-10 to 70)	-40 to 158 (-10 to 70)	
Cable Entry	No. 13 knock out	XAPA—undrilled XAPG—Tapped 3/4NPT XAPE—flush mount (n/a)	9001BG—1/2 &3/4 knockout 9001BF—N/A 9001BW—1/2-14NPT 9001BR—1/2-14NPT
Digest Location	XAL, page 19-74	XAP, page 19-74	9001B, page 19-76

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Pendant Station Selection Guide

Family	ZAR eXL Hoist Compact	ZAR Pocket Remote	9001BW	XACA2	XACA0
					
Type of Product	*Wireless Pendant	*Wireless Remote	**2-Button Pendant	**2-Button Pistol Grip Pendant	**General Purpose Pendant
Number of operators	6 motion, 2 auxilliary	3, 4, 6, 8, and 10	2	2	2, 3, 4, 6, 8, 12
Approvals	UL/CSA, CE, EAC	UL, CE	UL File E78403 CNN NKCR CSA File LR25490 Class 3211-03	UL File E164353 CNN NKCR CSA File LR 44087 Class 3211-03	UL File E164353 CNN NKCR CSA File LR 44087 Class 3211-03
Conforming to Standards	For receiver: EN 300 328 V2.1.1: 2016-11 EN 301 489-1 V2.1.1: 2017-02 EN 301 489-17 V3.1.1: 2017-02 EN 60950-1:2006 + A11: 2009 EN 50581: 2012 EN ISO 13849-1:2016 For transmitter: EN 300 440 V2.1.1: 2017-03 EN 301 489-1 V2.1.1: 2017-02 EN 301 489-3 V2.1.1: 2017-03 EN 60950-1:2006 + A11: 2009 + A1: 2010 + A12: 2011 EN 62479: 2010 EN 50581: 2012 EN ISO 13849-1:2016	For receiver: EN 300 328 V2.1.1: 2016-11 EN 301 489-1 V2.1.1: 2017-02 EN 301 489-17 V3.1.1: 2017-02 EN 60950-1:2006 + A11: 2009 EN 50581: 2012 For transmitter: EN 300 440 V2.1.1: 2017-03 EN 301 489-1 V2.1.1: 2017-02 EN 301 489-3 V2.1.1: 2017-03 EN 60950-1:2006 + A11: 2009 + A1: 2010 + A12: 2011 EN 62479: 2010 EN 50581: 2012	CE Marked	EN/IEC 60947-5-1, EN/IEC 60204-32, EN/IEC 60947-5-5, and EN/ISO 13850 (for versions with trigger action emergency stop) UL 508 CSA C22-2 No. 14 RoHS compliant	EN/IEC 60947-5-1, EN/IEC 60204-32, EN/IEC 60947-5-5, and EN/ISO 13850 (for versions with trigger action emergency stop) UL 508 CSA C22-2 No. 14 RoHS compliant
Degree of Protection	Transmitter: IP65/NEMA 4, Receiver: IP66	IP67 for transmitter and IP66 for receiver	NEMA 1, 3, 3R, 4, 4X	NEMA 1, 4, 4X, 5 IP65 IK08	NEMA 1, 4, 4X, 5 IP65 IK08
Operating Temperature F° (C°)	-4 to 131 (-20 to 55)	-4…131 °F (-20…55 °C)	-13 to 140 (-25 to 60)	-13 to 140 (-25 to 60)	-13 to 140 (-25 to 60)
Storage Temperature F° (C°)	-4 to 113 (-20 to 45)	-4…113 °F (-20…45 °C)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)
Housing Material	Polyurethane	Polyurethane	Polycarbonate / PET Polyester Blend	Yellow Polypropylene	Yellow Polypropylene
Rated Operational Characteristics *[1]*	— —	—	AC - B600	AC-15: A600 or Ue = 600V, Ie = 1.2A or Ue = 240V, Ie = 3A	AC-15: A600 or Ue = 600V, Ie = 1.2A or Ue = 240V, Ie = 3A
		—	DC - P600	DC-13: Q600 or Ue = 600V. Ie = 0.1A or Ue = 250V, Ie = 0.27A	DC-13: Q600 or Ue = 600V. Ie = 0.1A or Ue = 250V, Ie = 0.27A
Thermal Current	—	—	Continuous 5A	Continuous 10A	Continuous 10A
Connection Type	—	—	1/2 in. NPT screw clamp terminals	8–26 mm cable entry screw clamp terminals	8–26 mm cable entry screw clamp terminals
Cable Size	Receiver: PVC torsion cable, largest single wire Ø 0.21 mm/0.008 in., outer Ø 12.0 mm/0.47 in.	Receiver: PVC torsion cable, largest single wire Ø 0.21 mm (0.008 in.), outer Ø 12.0 mm (0.47 in.)	—	1 x 0.5 mm² (20AWG) min. 2 x 1.5 mm² (16AWG) max. 1 x 2.5 mm² (14AWG) max.	1 x 14 AWG (copper only)
Digest Location	ZAR, Harmony eXLhoist, page 19-80	ZAR, Remote Control Device and Base Station, page 19-81	Type BW, page 19-83	XAC, page 19-84	XAC, page 19-84

[1] OSHA Section 1910.179, *Overhead and Gantry Cranes*, limits voltage at pendant push buttons to 150 Vac or 300 Vdc max.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Tower Lights and Beacons Selection Guide (1 of 2)

Family	XVB L	XVB C
		
Type of Product	Beacon	Tower Light
Diameter	70mm	70mm
Features	Product for Customer Configuration	Product for Customer Configuration
Approvals	UL File E164353 CCN NKCR	UL File E164353 CCN NKCR
	CSA File LR 44087 Class 3211 03	CSA File LR 44087 Class 3211 03
Conforming to Standards	CE Marked	CE Marked
	IEC/EN 60947-5-1	IEC/EN 60947-5-1
	UL 508	UL 508
	CSA 22.2 No 14	CSA 22.2 No 14
Degree of Protection	IP65	IP65
Operating Temperature F° (C°)	-13 to122 (-25 to 50)	-13 to122 (-25 to 50)
Storage Temperature F° (C°)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)
Light Source	LED / Incandescent	LED / Incandescent
Electrical Consumption		
LED Steady	24 Vac/dc: < 30 mA	24 Vac/dc: < 30 mA
	120–230 Vac: < 30 mA	120–230 Vac: < 30 mA
LED Flashing with Buzzer	24 Vac/dc: < 40 mA	24 Vac/dc: < 40 mA
	120–230 Vac: < 15mA	120–230 Vac: < 15mA
	1 Hz (1 flash per second)	1 Hz (1 flash per second)
Strobe (Energized)	24 Vdc: 5 Joules unit < 430 mA; 10 J unit: < 850 mA	24 Vdc: 5 Joules unit < 430 mA; 10 J unit: < 850 mA
	120 Vac: 5 Joules unit: < 130 mA; 10 J unit: < 260 mA	120 Vac: 5 Joules unit: < 130 mA; 10 J unit: < 260 mA
	230 Vac: 5 Joules unit: < 105 mA; 10 J unit: < 210 mA	230 Vac: 5 Joules unit: < 105 mA; 10 J unit: < 210 mA
	1 Hz (1 flash per second)	1 Hz (1 flash per second)
Audible Sounders	12–48 Vac/dc: < 20 mA	12–48 Vac/dc: < 20 mA
	120–230 Vac: < 50 mA	120–230 Vac: < 50 mA
	90 decibels at 1 meter	90 decibels at 1 meter
Connection Type	Screw Clamp	Screw Clamp
Cable Size	1 x 16 AWG (1.5 mm²) With Cable End	1 x 16 AWG (1.5 mm²) With Cable End
Digest Location	XVB 70 mm Beacons, page 19-86	XVB 70 mm Components, page 19-87

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Tower Lights and Beacons Selection Guide (2 of 2)

Family	XVC 4	XVC 6	XVC 1	XVU	XVR	XVS
						
Type of Product	*Tower Light	*Tower Light	*Tower Light	**Tower Light	***Rotating Beacon	***Siren and Electronic Alarm
Diameter	40 mm	60 mm	100 mm	60mm	84/100/106/120/130 mm	—
Features	All devices are pre-assembled and pre-wired			Programmable LED module with multiple colors, flashing, blinking, and rotating	All devices are pre-assembled and pre-wired. XVR12•••S includes buzzer: 50 to 90 decibels XVR3•••S includes buzzer: 70 to 90 decibels	Adjustable Tones XVS14BMW, 0 to 105 decibels, 43 tones XVS72BM••, 0 to 90 decibels, 16 tones XVSV••••, 0 to 89/97dB, 6 channels, 63 messages, 256 sec XVSV•••• Programmable with software
Approvals	UL Recognized E164353 CNN NKCR	UL Recognized E164353 CNN NKCR	UL Recognized E164353 CNN NKCR	UL file: E164353 CCN : NKCR	UL Recognized E164353 CNN NKCR	UL Recognized E164353 CNN UCST
	CSA LR44087 Class 3211-03	CSA LR44087 Class 3211-03	CSA LR44087 Class 3211-03	CSA File : 225619 CLASS : 3211-07	CSA LR44087 Class 3211-03	CSA LR44087 Class 3211-03
Conforming to Standards	CE Marked	CE Marked	CE Marked	CE Marked	CE Marked	CE Marked
	EN61000-6-2	EN61000-6-2	EN61000-6-2	EN 60947-1	EN61000-6-2	ce
	EN61000-6-3	EN61000-6-3	EN61000-6-3	EN 60947-5-1	EN61000-6-4	UKCA
	—	EN61000-6-4	EN61000-6-4		—	EN61000-6-2, EN61000-6-3, EN60947-1, EN60947-5-1
	UL 508	UL 508	UL 508	UL508	UL 508	UL 508
	CSA 22.2 No. 14	CSA 22.2 No. 14	CSA 22.2 No. 14	CSA C22.2 No.14	CSA 22.2 No. 14	CSA 22.2 No. 14 (excluding XVSV)
Degree of Protection	IP54	IP54	IP54	IP65	XVR08 - XVR13: IP23 / IP55 / IP65 / IP66 / IP67 XVR3: IP23 / IP65 - NEMA 4/4X - Up to 7.1gn vibration resistance	IP53 / IP54 / IP65
Operating Temperature F° (C°)	-13 to122 (-25 to 50)	-13 to122 (-25 to 50)	-13 to122 (-25 to 50)	-13 to 122 (-25 to 50)	-14 to 122 (-10 to 50) / (-20 to 50)	-4 to 122 (-20 to 50) (-20 to 60 XVSV)
Storage Temperature F° (C°)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-40 to 158 (-40 to 70)	-13 to 150 (-25 to 65)	-31 to 158 (-35 to 70)	-31 to 158 (-35 to 70) (-10 to 55 XVSV)
Light Source	LED	LED	LED	LED	LED	—
Electrical Consumption				Body unit ≤ 400mA		
LED Steady	24 V: 1 unit = 40mA; 2 unit = 80mA; 3 unit = 120mA 4 unit = 160mA; 5 unit = 200mA		24 V: 1 unit = 100mA; 2 unit = 200mA; 3 unit = 300mA 4 unit = 400mA; 5 unit = 500mA	LED Units ≤ 50 mA	XVR08, XVR10, XVR12, and XVR13 (without buzzer) 12 Vac/dc: 360mA 24 Vac/dc: 180mA XVR3 (with-w/o buzzer) Rotating, Flashing, Blinking (10 modes) 12-24V DC: 3000mA 48V DC: 1000mA 100-230V AC: 500mA	—
LED Flashing ** with Buzzer	**24 V: 1 unit = 90 mA; 2 unit = 130 mA; 3 unit = 170 mA 4 unit = 210 mA; 5 unit = 250 mA 0.7 to 3 Hz (1 flash per 0.7 to 3 sec)		24 V: 1 unit = 150mA; 2 unit = 250mA; 3 unit = 350mA 4 unit = 450mA; 5 unit = 550mA 3 to 3.5 Hz (1 flash per 3 to 3.5 sec)	Buzzer ≤ 70 mA Flasher and multi-color ≤ 70 mA	XVR12 with buzzer: 12 Vac/dc: 400 mA 24 Vac/dc: 230 mA 3 Hz (1 flash per 3 sec) XVR3 (with-w/o buzzer) Rotating, Flashing, Blinking (10 modes) 12-24V DC, 48V DC: 3000mA 48V DC: 1000mA 100-230V AC: 500mA	—
Strobe (Energized)	—	—	—	—	—	—
Audible Sounders	*70 to 85 decibels at 1 meter*	70 to 85 decibels at 1 meter	60 to 85 decibels at 1 meter	—	—	XVS14BMW 12 Vdc: 350mA 24 Vdc: 400 mA 105 decibels at 1 m
	—	—	—	—	—	XVS72BM 12 Vdc: 280 mA 24 Vdc: 190 mA 90 decibels at 1 m XVSV7BBN 24 Vdc: 75mA - 89dB at 1m XVSV9MBN 100 Vac: 100mA - 97dB at 1 m

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Family	XVC 4	XVC 6	XVC 1	XVU	XVR	XVS
Connection Type	Pre-Wired, Color-Coded Wires **cable length:** 600mm XVC4•• 900mm XVC4••K 500mm XVC4••5S	Pre-Wired, Color-Coded Wires **cable length:** 600mm XVC6•• 850mm XVC6••K 550mm XVC6••5S 850mm XVC6••5SK	Pre-Wired, Color-Coded Wires **cable length:** 500mm XVC1••K 500mm XVC1••SK 550mm XVC6••5S 850mm XVC6••5SK	Screw Clamp	Pre-Wired cable length: 500mm XVR08••• 400mm XVR10••• 400mm XVR12••• 400mm XVR13••• 400mm XVR3•••	XVS14BMW Pre-Wired, Color-Coded Wires **cable length:** 500mm XVS14 XVS72BM•• **Not** Pre-Wired
Cable Size	22 AWG (0.33 mm²)	22 AWG (0.33 mm²)	22 AWG (0.33 mm²)	22 - 16 AWG	16 AWG (1.25 mm²) XVR13••• 18 AWG (0.75 mm²) 20 AWG (0.57 mm2) XVR3•••	See each product data sheet
Digest Location	XVC, page 19-89	XVC, page 19-89	XVC, page 19-89	XVU, Tower Lights For Customer Assembly (up to 5 units), page 19-91	XVR, page 19-95	XVS, page 19-97
	◄ **For Tower Lights catalog numbers:** ●○ first dot denotes voltage selection ○● second dot denotes color selection ►					

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

XB4–XB5 Common Operators

Table 19.1: BLACK—Start Push Buttons (flush head)

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		1 N.O.	XB4BA21	ZBY2303
XB5 Double Insulated		1 N.O.	XB5AA21	ZBY2303

Table 19.2: RED—Stop Push Buttons (extended head)

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		1 N.C.	XB4BL42	ZBY2304
XB5 Double Insulated		1 N.C.	XB5AL42	ZBY2304

Table 19.3: BLACK—Off-On Selector Switch

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		1 N.O.	XB4BD21	ZBY2367
XB5 Double Insulated		1 N.O.	XB5AD21	ZBY2367

Table 19.4: Hand-Off-Auto Selector Switch

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		2 N.O.	XB4BD33	ZBY2387
XB5 Double Insulated		2 N.O.	XB5AD33	ZBY2387

Table 19.5: RED—120 Vac LED—On Pilot Light

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		120 Vac Red LED	XB4BVG4	ZBY2311
XB5 Double Insulated		120 Vac Red LED	XB5AVG4	ZBY2311

Table 19.6: GREEN—120 Vac LED—Off Pilot Light

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		120 Vac Green LED	XB4BVG3	ZBY2312
XB5 Double Insulated		120 Vac Green LED	XB5AVG3	ZBY2312

Table 19.7: RED—40 mm Mushroom Stop (Push-Pull)

Operator Style	Description	Contact Block	Type	Legend Plate
XB4 Die Cast Chrome		1 N.C.	XB4BT42	ZBY9320
XB5 Double Insulated		1 N.C.	XB5AT42	ZBY9320

Table 19.8: RED—40 mm Mushroom Emergency Stop (Trigger Action, Turn-to-Release)

Operator Style	Description	Contact Block	Type	Legend Plate 60 mm Round
XB4 Die Cast Chrome		1 N.O. / 1 N.C.	XB4BS8445	ZBY9320
XB5 Double Insulated		1 N.O./ 1 N.C.	XB5AS8445	ZBY9320

When ordering, please specify:
Quantity Type or Catalog Number

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type K and SK Common Operators

Table 19.9: BLACK—Start Push Buttons

Operator Style	Description	Contact Block	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)			KR1BH13	KN201
30 mm Corrosion Resistant (Non-Metallic)			SKR1BH13	KN101SP

Table 19.10: RED—Stop Push Buttons

Operator Style	Description	Contact Block	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)			KR1RH13	KN202
30 mm Corrosion Resistant (Non-Metallic)			SKR1RH13	KN102RP

Table 19.11: BLACK—Off-On Selector Switch

Operator Style	Description	Contact Sequence (Contact Block Included)	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)			KS11BH13	KN244
30 mm Corrosion Resistant (Non-Metallic)			SKS11BH13	KN144SP

Table 19.12: BLACK—Hand-Off-Auto Selector Switch

Operator Style	Description	Contact Sequence (Contact Block Included)	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)			KS43BH13	KN260
30 mm Corrosion Resistant (Non-Metallic)			SKS43BH13	KN160SP

Table 19.13: RED—120 Vac—On Pilot Light

Operator Style	Description	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)		KP1R31	KN203
30 mm Corrosion Resistant (Non-Metallic)		SKP1R31	KN103SP

Table 19.14: GREEN—120 Vac—Off Pilot Light

Operator Style	Description	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)		KP1G31	KN204
30 mm Corrosion Resistant (Non-Metallic)		SKP1G31	KN104SP

Table 19.15: RED—120 Vac—On Push-To-Test Pilot Light

Operator Style	Description	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)		KT1R31	KN203
30 mm Corrosion Resistant (Non-Metallic)		SKT1R31	KN103SP

Table 19.16: GREEN—120 Vac—Off Push-To-Test Pilot Light

Operator Style	Description	Type *[1]*	Legend Plate *[1]*
30 mm Industrial (Metal)		KT1G31	KN204
30 mm Corrosion Resistant (Non-Metallic)		SKT1G31	KN104RP

When ordering, please specify:
Quantity Class Number (if appropriate) Type or Catalog Number

[1] When ordering, add prefix 9001 to the catalog number.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XB4BA31


XB4BA4322


XB4BP51


XB4BL42


XB4BC21

XB4 Complete Devices—Non-Illuminated

Table 19.17: Non-Illuminated Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact		Marking	Cap Color	Catalog Number	Components
		N.O.	N.C.				
	Flush	1	—	—	Black	XB4BA21	(ZB4BZ101 + ZB4BA2)
					Green	XB4BA31	(ZB4BZ101 + ZB4BA3)
					Yellow	XB4BA51	(ZB4BZ101 + ZB4BA5)
					Blue	XB4BA61	(ZB4BZ101 + ZB4BA6)
		—	1	—	Red	XB4BA42	(ZB4BZ102 + ZB4BA4)
		1	1	—	Black	XB4BA25	(ZB4BZ105 + ZB4BA2)
					Green	XB4BA35	(ZB4BZ105 + ZB4BA3)
					Red	XB4BA45	(ZB4BZ105 + ZB4BA4)
					Yellow	XB4BA55	(ZB4BZ105 + ZB4BA5)
					Blue	XB4BA65	(ZB4BZ105 + ZB4BA6)
	Flush	1	—	"I" (white)	Green	XB4BA3311	(ZB4BZ101 + ZB4BA331)
	Flush	—	1	"O" (white)	Red	XB4BA4322	(ZB4BZ102 + ZB4BA432)
	Flush with clear silicone boot (color of pusher unobscured)	1	—	—	Black	XB4BP21	(ZB4BZ101 + ZB4BP2)
					Green	XB4BP31	(ZB4BZ101 + ZB4BP3)
					Yellow	XB4BP51	(ZB4BZ101 + ZB4BP5)
					Blue	XB4BP61	(ZB4BZ101 + ZB4BP6)
		—	1	—	Red	XB4BP42	(ZB4BZ102 + ZB4BP4)
	Extended	—	1	—	Red	XB4BL42	(ZB4BZ102 + ZB4BL4)
		1	1	—	Red	XB4BL45	(ZB4BZ105 + ZB4BL4)
	Mushroom head Ø 40 mm	1	—	—	Black	XB4BC21	(ZB4BZ101 + ZB4BC2)


XB4BL73415


XB4BL73731●5



XB4BA731327

Table 19.18: Two Button Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact		Marking	Degree of Protection	Catalog Number	Components
		N.O.	N.C.				
	One flush green push* One extended red push**	1	1	*"I" (white) **"O" (white)	IP66 IP69K	XB4BL73415	(ZB4BZ105 + ZB4BL7341)

Table 19.19: Two Button Push Buttons, Momentary + one white central pilot light (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact		Marking	Degree of Protection	Pilot Light Voltage	Catalog Number
		N.O.	N.C.				
Protected LED	One flush green push* One extended red push** One white central pilot light block	1	1	*"I" (white) **"O" (white)	IP66 IP69K	24 120 240	XB4BW73731B5 XB4BW73731G5 XB4BW73731M5

Table 19.20: Three Button Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact		Degree of Protec-tion	Marking and Cap Color	Catalog Number
		N.O.	N.C.			
	Two flush pushes + one central projecting red push*	2	1	IP66 IP69K	White "I" on green background White "II" on green background *White "Stop" on red background	XB4BA731327
					Black "⇨" on white background White "⇦" on black background *White "Stop" on red background	XB4BA711237

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XB4BT845


XB4BS9445


XB4BS542


XB4BG33


XB4BD33



XB4BJ33

Table 19.21: Non-Illuminated Trigger Action Emergency Stop Push Buttons, Ø 40 mm, Red (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact				Catalog Number	Components
		N.O.	N.C.				
	Trigger action push-pull *[1]*	1	1			XB4BT845	(ZB4BZ105 + ZB4BT84)
	Trigger action turn-to-release*[1]*	1	1			XB4BS8445	(ZB4BZ105 + ZB4BS844)
		1	2			XB4BS84441	(ZB4BZ141 + ZB4BS844)
	Trigger action Key release *[1]* (No. 455)	1	1			XB4BS9445	(ZB4BZ105 + ZB4BS944)
	Trigger action Push-pull*[1]*	—	1			XB4BT842	(ZB4BZ102 + ZB4BT84)
	Trigger action Turn-to-release*[1]*	—	1			XB4BS8442	(ZB4BZ102 + ZB4BS844)
	Trigger action Key release *[1]* (No. 455)	—	1			XB4BS9442	(ZB4BZ102 + ZB4BS944)

Table 19.22: Non-Illuminated Selector Switches and Key Switches (screw clamp terminal connections) *[2]*

Shape of Head	Type of Operator	Type of Contact		Number and Type of Positions		Catalog Number	Components
		N.O.	N.C.				
	Standard lever, black	1	—	2-maintained		XB4BD21	(ZB4BZ101 + ZB4BD2)
		1	1	2-maintained		XB4BD25	(ZB4BZ105 + ZB4BD2)
		2	—	3-maintained		XB4BD33	(ZB4BZ103 + ZB4BD3)
				3-momentary to center		XB4BD53	(ZB4BZ103 + ZB4BD5)
	Extended lever, black	1	—	2-maintained		XB4BJ21	(ZB4BZ101 + ZB4BJ2)
		2	—	3-maintained		XB4BJ33	(ZB4BZ103 + ZB4BJ3)
				3-momentary to center		XB4BJ53	(ZB4BZ103 + ZB4BJ5)
	Key (No. 455)	1	—	2-maintained		XB4BG21	(ZB4BZ101 + ZB4BG2)
						XB4BG41	(ZB4BZ101 + ZB4BG4)
				2-momentary to left		XB4BG61	(ZB4BZ101 + ZB4BG6)
		2	—	3-maintained		XB4BG03	(ZB4BZ103 + ZB4BG0)
						XB4BG33	(ZB4BZ103 + ZB4BG3)

NOTE: The symbol indicates key withdrawal position(s).

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

[1] Trigger action mushroom heads are tamper proof in that a change of contact state is not possible by teasing or floating the operator. For emergency stop applications, always use a trigger action push button (per EN/IEC 13850).

[2] For contact configurations, see Table 19.36 Sequence of Contacts on Selector Switch Bodies, page 19-18.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB4BVB5



XB4BV64




XB4BV33



XB4BW33B5



XB4BW3465



XB4BW3545

XB4 Complete Devices—Illuminated

Table 19.23: Pilot Lights with Protected LED™ (screw clamp terminal connections) [3]

Shape of Head		Supply Voltage	Color	Catalog Number	Components
	Protected LED	24 Vac/Vdc	White	XB4BVB1	(ZB4BVB1 + ZB4BV013)
			Green	XB4BVB3	(ZB4BVB3 + ZB4BV033)
			Red	XB4BVB4	(ZB4BVB4 + ZB4BV043)
			Yellow	XB4BVB5	(ZB4BVB5 + ZB4BV053)
			Blue	XB4BVB6	(ZB4BVB6 + ZB4BV063)
		110–120 Vac	White	XB4BVG1	(ZB4BVG1 + ZB4BV013)
			Green	XB4BVG3	(ZB4BVG3 + ZB4BV033)
			Red	XB4BVG4	(ZB4BVG4 + ZB4BV043)
			Yellow	XB4BVG5	(ZB4BVG5 + ZB4BV053)
			Blue	XB4BVG6	(ZB4BVG6 + ZB4BV063)

Table 19.24: Pilot Lights for BA9s Bulb (screw clamp terminal connections)

Shape of Head	Supply Voltage	Color	Catalog Number	Components
Direct supply, for BA9s (incandescent, LED, neon) V < 250 V, 2.4 W bulb (bulb not included)				
	< 250 Vac/Vdc	White	XB4BV61	(ZB4BV6 + ZB4BV01)
		Green	XB4BV63	(ZB4BV6 + ZB4BV03)
		Red	XB4BV64	(ZB4BV6 + ZB4BV04)
		Yellow	XB4BV65	(ZB4BV6 + ZB4BV05)
Transformer type with 1.2 VA, 6 V secondary. BA9s incandescent bulb included				
	110–120 Vac 50/60 Hz	White	XB4BV31	(ZB4BV3 + ZB4BV01)
		Green	XB4BV33	(ZB4BV3 + ZB4BV03)
		Red	XB4BV34	(ZB4BV3 + ZB4BV04)
		Yellow	XB4BV35	(ZB4BV3 + ZB4BV05)

Table 19.25: Illuminated Push Buttons, Momentary (screw clamp terminal connections) [3]

Shape of Head	Description	Type of Contact		Supply Voltage	Color of Push	Catalog Number	Components
		N.O.	N.C.				
Flush							
	Protected LED	1	1	24 Vac/Vdc	White	XB4BW31B5	(ZB4BW0B15 + ZB4BW313)
					Green	XB4BW33B5	(ZB4BW0B35 + ZB4BW333)
					Red	XB4BW34B5	(ZB4BW0B45 + ZB4BW343)
					Yellow	XB4BW35B5	(ZB4BW0B55 + ZB4BW353)
					Blue	XB4BW36B5	(ZB4BW0B65 + ZB4BW363)
				110–120 Vac	White	XB4BW31G5	(ZB4BW0G15 + ZB4BW313)
					Green	XB4BW33G5	(ZB4BW0G35 + ZB4BW333)
					Red	XB4BW34G5	(ZB4BW0G45 + ZB4BW343)
					Yellow	XB4BW35G5	(ZB4BW0G55 + ZB4BW353)
					Blue	XB4BW36G5	(ZB4BW0G65 + ZB4BW363)
	Direct supply for BA9s 2.4 W max. bulb not included	1	1	< 250 Vac/ Vdc	White	XB4BW3165	(ZB4BW065 + ZB4BW31)
					Green	XB4BW3365	(ZB4BW065 + ZB4BW33)
					Red	XB4BW3465	(ZB4BW065 + ZB4BW34)
					Yellow	XB4BW3565	(ZB4BW065 + ZB4BW35)
	Transformer type 1.2 VA, 6 V secondary. BA9s incandescent bulb included	1	1	110–120 Vac 50/60 Hz	White	XB4BW3135	(ZB4BW035 + ZB4BW31)
					Green	XB4BW3335	(ZB4BW035 + ZB4BW33)
					Red	XB4BW3435	(ZB4BW035 + ZB4BW34)
					Yellow	XB4BW3535	(ZB4BW035 + ZB4BW35)
				230–240 Vac 50/60 Hz	White	XB4BW3145	(ZB4BW045 + ZB4BW31)
					Green	XB4BW3345	(ZB4BW045 + ZB4BW33)
					Red	XB4BW3445	(ZB4BW045 + ZB4BW34)
					Yellow	XB4BW3545	(ZB4BW045 + ZB4BW35)
Extended							
	Protected LED	1	1	24 Vac/Vdc	White	XB4BW11B5	(ZB4BW0B15 + ZB4BW113)
					Green	XB4BW13B5	(ZB4BW0B35 + ZB4BW133)
					Red	XB4BW14B5	(ZB4BW0B45 + ZB4BW143)
					Yellow	XB4BW15B5	(ZB4BW0B55 + ZB4BW153)
					Blue	XB4BW16B5	(ZB4BW0B65 + ZB4BW163)
				110–120 Vac	White	XB4BW11G5	(ZB4BW0G15 + ZB4BW113)
					Green	XB4BW13G5	(ZB4BW0G35 + ZB4BW133)
					Red	XB4BW14G5	(ZB4BW0G45 + ZB4BW143)
					Yellow	XB4BW15G5	(ZB4BW0G55 + ZB4BW153)
					Blue	XB4BW16G5	(ZB4BW0G65 + ZB4BW163)

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

[3] For 240 V LED, replace the last “B” or “G” in the catalog number with an “M”. For example, XB4BV**B**1 (24 V) becomes XB4BV**M**1 (240 V—AC only).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BA0


ZB4BA4


ZB4BA38


ZB4BP18


ZB4BL1


ZB4BA36

XB4 Operators

Table 19.26: Non-Illuminated Operators, Momentary—Unmarked

Shape of Head	Type of Push	Cap Color	Catalog Number
	Flush, without color cap *[4]*	—	ZB4BA0
	Flush, with set of 6 color caps	White Black Green Red Yellow Blue	ZB4BA9
	Flush	White Black Green Red Yellow Blue Gray	ZB4BA1 ZB4BA2 ZB4BA3 ZB4BA4 ZB4BA5 ZB4BA6 ZB4BA8
	Flush with transparent cap, for insertion of legend	White Green Red Yellow Blue	ZB4BA18 ZB4BA38 ZB4BA48 ZB4BA58 ZB4BA68
	Booted Flush (clear silicone) Cap color unobscured	White Black Green Red Yellow Blue	ZB4BPA1 ZB4BPA2 ZB4BPA3 ZB4BPA4 ZB4BPA5 ZB4BPA6
	Booted Extended (clear silicone) Cap color unobscured	White Black Green Red Yellow Blue	ZB4BP1 ZB4BP2 ZB4BP3 ZB4BP4 ZB4BP5 ZB4BP6
	Booted (colored silicone) Cap color unobscured	White Black Green Red Yellow Blue	ZB4BP1S ZB4BP2S ZB4BP3S ZB4BP4S ZB4BP5S ZB4BP6S
	Booted for insertion of legend (clear silicone) Cap color unobscured	White Green Red Yellow Blue	ZB4BP18 ZB4BP38 ZB4BP48 ZB4BP58 ZB4BP68
	Extended	White Black Green Red Yellow Blue	ZB4BL1 ZB4BL2 ZB4BL3 ZB4BL4 ZB4BL5 ZB4BL6
	Guarded Head	White Black Green Red Yellow Blue	ZB4BA16 ZB4BA26 ZB4BA36 ZB4BA46 ZB4BA56 ZB4BA66


ZB4BA331


ZB4BA334


ZB4BL432

Table 19.27: Non-Illuminated Operators, Momentary—Premarked

Shape of Head	Type of Push	Marking Text	Marking Color	Cap Color	Catalog Number
	Flush	I	White	Green	ZB4BA331
			Black	White	ZB4BA131
		START	White	Green	ZB4BA333
			Black	White	ZB4BA133
		ON	White	Green	ZB4BA341
			Black	White	ZB4BA141
		RESET	White	Black	ZB4BA222
		JOG	White	Black	ZB4BA245
		O	White	Red	ZB4BA432
				Black	ZB4BA232
		STOP	White	Red	ZB4BA434
				Black	ZB4BA234
		OFF	White	Red	ZB4BA435
				Black	ZB4BA235
		↑ *[5]*	Black	White	ZB4BA334
			White	Black	ZB4BA335
	Extended	O	White	Red	ZB4BL432
				Black	ZB4BL232
		STOP	White	Red	ZB4BL434
				Black	ZB4BL234
		OFF	White	Red	ZB4BL435
				Black	ZB4BL235

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

[4] Color cap to be ordered separately. .
[5] Cap supplied not clipped-in, allowing orientation of arrow in any one of 4 directions:

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB4BH02

Table 19.28: Non-Illuminated Push-on/Push-off Operators

Shape of Head	Type of Push	Color of Push	Catalog Number
	Flush	White	ZB4BH01
		Black	ZB4BH02
		Green	ZB4BH03
		Red	ZB4BH04
		Yellow	ZB4BH05
		Blue	ZB4BH06
	Extended	White	ZB4BH1
		Black	ZB4BH2
		Green	ZB4BH3
		Red	ZB4BH4
		Yellow	ZB4BH5
		Blue	ZB4BH6



ZB4BA73133



ZB4BA71124

Table 19.29: Three Head Operators, Momentary

Shape of Head	Description	Marking	Cap Color	Degree of Protection	Catalog Number
Premarked					
 Two flush + one central projecting red push marked "Stop"	Two flush	"I" (white) "II" (white)	Green Green	IP66 IP69K	ZB4BA73132
		"⇐" (white) "⇒" (white)	Green Green		ZB4BA73133
		"↑" (white) "↓" (white)	Green Green		ZB4BA73134
		"+" (white) "-" (white)	Green Green		ZB4BA73135
		"+" (black) "-" (black)	White White		ZB4BA71115
		"⇐" (black) "⇒" (white)	White Black		ZB4BA71123
		"↑" (black) "↓" (white)	White Black		ZB4BA71124
		"↑" (white) "↓" (white)	Black Black		ZB4BA72124
Without caps					
	Two flush without caps	—	—	IP66 IP69K	ZB4BA791



ZB4BA7121



ZB4BL7341

Table 19.30: Two Head Operators, Momentary

Shape of Head	Description	Marking	Cap Color	Degree of Protection	Catalog Number
No Marking					
	Two flush	—	Green Red	IP66 IP69K	ZB4BA7340
		—	White Black		ZB4BA7120
	One flush One extended	—	Green Red		ZB4BL7340
Premarked					
	Two flush	"I" (white) "O" (white)	Green Red	IP66 IP69K	ZB4BA7341
		"I" (black) "O" (white)	White Black		ZB4BA7121
	One flush One extended	"I" (white) "O" (white)	Green Red		ZB4BL7341
Without caps					
	Two flush without caps	—	—	IP66 IP69K	ZB4BA79

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BC24


ZB4BC2


ZB4BR2


ZB4BS834


ZB4BT4


ZB4BS64


ZB4BS74



ZBY9320

XB4 Operators and Emergency Stop Operators

Table 19.31: Mushroom Heads, Momentary

Shape of Head	Diameter of Head	Color of Head	Catalog Number
	30 mm	Black	ZB4BC24
		Green	ZB4BC34
		Red	ZB4BC44
		Yellow	ZB4BC54
		Blue	ZB4BC64
	40 mm	Black	ZB4BC2
		Green	ZB4BC3
		Red	ZB4BC4
		Yellow	ZB4BC5
		Blue	ZB4BC6
	60 mm	Black	ZB4BR2
		Green	ZB4BR3
		Red	ZB4BR4
		Yellow	ZB4BR5
		Blue	ZB4BR6

Table 19.32: Mushroom Heads for Maintained Push Buttons

Shape of Head	Type of Push	Diameter of Head	Color	Catalog Number
For use in Emergency Stop applications				
	Trigger action Push-pull *[6]*	40 mm	Red	ZB4BT84
		60 mm	Red	ZB4BX84
	Trigger action Turn-to-release *[6]*	30 mm	Red	ZB4BS834
		40 mm	Red	ZB4BS844
			Red marked “EMO”	ZB4BS84430
		60 mm	Red	ZB4BS864
	Trigger action Key release (No. 455) *[6]*	30 mm	Red	ZB4BS934
		40 mm	Red	ZB4BS944 *[7]*
		60 mm	Red	ZB4BS964
For use in non-Emergency Stop applications				
	Push-pull	40 mm	Black	ZB4BT2
		60 mm	Black	ZB4BX2
	Turn-to-release	30 mm	Black	ZB4BS42
		40 mm	Black	ZB4BS52
			Yellow	ZB4BS55
			Yellow marked “Robot Stop”	ZB4BS5550
		60 mm	Black	ZB4BS62
	Key release (No. 455)	30 mm	Black	ZB4BS72
		40 mm	Black	ZB4BS12
		60 mm	Black	ZB4BS22

Table 19.33: Circular Legends for Emergency Stop Mushroom Heads (yellow background)

Diameter	Text	Catalog Number
90 mm	Blank	ZBY8101
	EMERGENCY STOP	ZBY8330
60 mm Bezeled	Blank	ZBY9121
	Emergency Stop	ZBY9320
	Prada de Emergencia	ZBY9420
	Not Halt	ZBY9220

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

[6] Trigger action mushroom heads are tamper proof in that a change of contact state is not possible by teasing or floating the operator. For emergency stop applications, always use a trigger action push button (per EN/IEC 13850).

[7] Other key numbers:
—key no. 421E: add the suffix 12 to the catalog number.
—key no. 458A: add the suffix 10 to the catalog number.
—key no. 520E: add the suffix 14 to the catalog number.
—key no. 3131A: add the suffix 20 to the catalog number.
Example: The catalog number for a Ø 40 mm red mushroom head for a trigger action, maintained push button, with release by key no. 421E becomes: ZB5AS94412.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB4BD4
Standard Lever



ZB4BJ3
Extended Lever

XB4 Selector Switches

Table 19.34: Non-Illuminated Selector Switches *[8]*

Color	Number and Type of Positions		Standard Lever *[9]*	Extended Lever
			Catalog Number	
Black	2-maintained		ZB4BD2	ZB4BJ2
Black	2-momentary from right to left		ZB4BD4	ZB4BJ4
Black	3-maintained		ZB4BD3	ZB4BJ3
Black	3-momentary to center		ZB4BD5	ZB4BJ5
Black	3-momentary from left to center		ZB4BD7	ZB4BJ7
Black	3-momentary from right to center		ZB4BD8	ZB4BJ8



ZB4BG8

Table 19.35: Non-Illuminated Key Switches *[8]*

Type of Operator	Number and Type of Positions		Catalog Number
	2-maintained		ZB4BG2
			ZB4BG02
			ZB4BG4
	2-momentary from right to left		ZB4BG6
	3-maintained		ZB4BG0
			ZB4BG3
			ZB4BG03
			ZB4BG04
			ZB4BG5
			ZB4BG9
			ZB4BG09
	3-momentary from left to center		ZB4BG1
			ZB4BG01
	3-momentary to center		ZB4BG7
	3-momentary from right to center		ZB4BG8
			ZB4BG05
			ZB4BG08

Key (No. 455)

NOTE: The symbol indicates key withdrawal position(s).

Other key numbers:
—key no. 421E: add the suffix 12 to the catalog number.
—key no. 458A: add the suffix 10 to the catalog number.
—key no. 520E: add the suffix 14 to the catalog number.
—key no. 3131A: add the suffix 20 to the catalog number.
—key no. 8D1: add the suffix D to the catalog number.

Example: The catalog number for a head with key no. 421E for a 2 position maintained, lockable selector switch, with key withdrawal from the left-hand position, becomes: ZB5AG212

Table 19.36: Sequence of Contacts on Selector Switch Bodies

Unit Type		Selector Switches														
		2-position						3-position								
Note: L=Left, C=Center, R=Right, O=Open, X=Closed		315°			45°			315°			0°			45°		
Operator Plunger Position	Up															
	Down															
Contact Block Location		L	C	R	L	C	R	L	C	R	L	C	R	L	C	R
Contacts	N.O.	O	O	O	X	X	X	X	X	O	O	O	O	O	X	X
	N.C.	X	X	X	O	O	O	O	O	X	X	X	X	X	O	O

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

For Selector Switch Sequence, refer to Table 19.49 Sequence of Contacts on Illuminated Selector Switch Bodies, page 19-22.

[8] For contact configurations, see Table 19.36 Sequence of Contacts on Selector Switch Bodies, page 19-18.
[9] For colored lever, add the following code to the end of part number: 01–white, 03–green, 04–red, 05–yellow, 06–blue (Example: ZB4BD**04**).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BD922


XB4BD912R1K


ZB4BD28


XB4BA8●1

XB4 Specialty Operators

Table 19.37: Potentiometer Operator (with Mounting Collar)

Shape of Head	Description	Application	Catalog Number
	For potentiometer with shaft length 1.73 to 1.97 in. (45 to 50 mm) (potentiometer not included)	For shaft Ø 1/4 in. (6.35 mm)	ZB4BD922
		For shaft Ø 0.24 in. (6 mm)	ZB4BD912

Table 19.38: Complete Potentiometers

Description	Resistance (k Ω)	Weight (kg/lb)	Catalog Number
+/- 10% linear mode precision complete potentiometer with screw terminals	1	0.095/0.209	XB4BD912R1K
	4.7	0.095/0.209	XB4BD912R4K7
	10	0.095/0.209	XB4BD912R10K
	47	0.095/0.209	XB4BD912R47K
	100	0.095/0.209	XB4BD912R100K
	470	0.095/0.209	XB4BD912R470K

Table 19.39: Two Position Toggle Switch

Shape of Head	Color	Type of Positions	Catalog Number
	Black	Maintained	ZB4BD28
	Black	Momentary	ZB4BD48

Table 19.40: Reset Operators, Flush, Adjustable Shaft

Shape of Head	Travel		Actuation Distance		Color	Catalog Number
	in.	mm	in.	mm		
	0.39	10	0.24–0.63	6–16	Black	XB4BA821
					Red	XB4BA841
					Blue	XB4BA861
			0.63–1.02	16–26	Black	XB4BA822
					Red	XB4BA842
					Blue	XB4BA862
	0.55	14	1.18–5.12	30–130	Black	XB4BA921
					Red	XB4BA941
					Blue	XB4BA961
			5.12–10.12	130–257	Black	XB4BA922
					Red	XB4BA942
					Blue	XB4BA962

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BV063


ZB4BV04


ZB4BV043S

XB4 Pilot Lights

Table 19.41: Pilot Light Heads

Shape of Head	For Use with Body Comprising Light Module Type	Color of Lens	Catalog Number
	Protected LED™ only	White Green Red Yellow Blue	ZB4BV013 ZB4BV033 ZB4BV043 ZB4BV053 ZB4BV063
	Protected LED only Fresnel (jeweled) lens *[10]*	White Green Red Amber Blue	ZB4BV013S ZB4BV033S ZB4BV043S ZB4BV053S ZB4BV063S
	For BA9s incandescent bulb, neon or LED only *[11]*	White Green Red Yellow Blue Clear	ZB4BV01 ZB4BV03 ZB4BV04 ZB4BV05 ZB4BV06 ZB4BV07
	For BA9s incandescent bulb, neon or LED Fresnel (jeweled) lens *[12]*	White Green Red Amber Blue Clear	ZB4BV01S ZB4BV03S ZB4BV04S ZB4BV05S ZB4BV06S ZB4BV07S


ZB4BV6

Table 19.42: Complete Bodies (Mounting Collar + Light Module for BA9s Incandescent Bulb, Neon or LED)

Description	Light Source	Supply Voltage (V)	Catalog Number
Screw clamp terminal connections			
Direct supply	BA9s bulb 2.4 W max. Not included *[12]*	<250	ZB4BV6
Direct supply	BA9s incandescent bulb included	24 v 2 Watt	ZB4BV624
Direct supply	BA9s incandescent bulb included	120 v 2.4 Watt	ZB4BV6120
Transformer type 1.2 VA, 6 V secondary	BA9s incandescent bulb included	110–120 Vac 50/60 Hz	ZB4BV3
		230–240 Vac 50/60 Hz	ZB4BV4
		400–50 Hz	ZB4BV5
		440–480 Vac 60 Hz	ZB4BV8
		550–600 Vac 60 Hz	ZB4BV9


ZB4BV•


ZB4BV••

Table 19.43: Complete Bodies (Mounting Collar + Light Module with Protected LED™) *[13]*

Light Source	Supply Voltage	Color of Light Source	Catalog Number
Screw clamp terminal connections *[14]*			
Protected LED™	12 Vac/Vdc	White Green Red Yellow Blue	ZB4BVJ1 ZB4BVJ3 ZB4BVJ4 ZB4BVJ5 ZB4BVJ6
	24 Vac/Vdc	White Green Red Yellow Blue	ZB4BVB1 ZB4BVB3 ZB4BVB4 ZB4BVB5 ZB4BVB6
	24–120 Vac/Vdc	White Green Red Yellow Blue	ZB4BVBG1 ZB4BVBG3 ZB4BVBG4 ZB4BVBG5 ZB4BVBG6
	110–120 Vac	White Green Red Yellow Blue	ZB4BVG1 ZB4BVG3 ZB4BVG4 ZB4BVG5 ZB4BVG6
Flashing Protected LED™	24 Vac/Vdc	White Green Red Yellow Blue	ZB4BV18B1 ZB4BV18B3 ZB4BV18B4 ZB4BV18B5 ZB4BV18B6
	110–120 Vac	White Green Red Yellow Blue	ZB4BV18G1 ZB4BV18G3 ZB4BV18G4 ZB4BV18G5 ZB4BV18G6

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

[10] For use in bright ambient conditions, for example, in sunlight.
[11] Order bulb separately.
[12] Order bulb separately.
[13] For 240 V LED, replace the last “B” or “G” in the catalog number with an “M”. For example, ZB4BV**B**1 (24 V) becomes ZB4BV**M**1 (240 V).
[14] For Quick-Connect version, add “3” to the end of the catalog number Example: ZB4BVJ13 (Quick-Connect size 1 x 1/40" or 2 x 0.110").

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BW333


ZB4BW563


ZB4BW113


ZB4BW33


ZB4BW14

XB4 Illuminated Operators

Table 19.44: Heads for Momentary Illuminated Push Buttons

Shape of Head	Type of Push	Color	Catalog Number
Only use with Protected LED™ light modules			
	Flush	White	ZB4BW313
		Green	ZB4BW333
		Red	ZB4BW343
		Yellow	ZB4BW353
		Blue	ZB4BW363
	Flush with clear silicone boot	White	ZB4BW513
		Green	ZB4BW533
		Red	ZB4BW543
		Yellow	ZB4BW553
		Blue	ZB4BW563
	Flush for insertion of legend	White	ZB4BA18
		Green	ZB4BA38
		Red	ZB4BA48
		Yellow	ZB4BA58
		Blue	ZB4BA68
	Extended	White	ZB4BW113
		Green	ZB4BW133
		Red	ZB4BW143
		Yellow	ZB4BW153
		Blue	ZB4BW163
	Mushroom (40 mm)	Clear	ZB4BW413
		Green	ZB4BW433
		Red	ZB4BW443
		Yellow	ZB4BW453
		Blue	ZB4BW463
Only use with light modules for a BA9s incandescent bulb, neon or LED			
	Flush	White	ZB4BW31
		Green	ZB4BW33
		Red	ZB4BW34
		Yellow	ZB4BW35
		Blue	ZB4BW36
		Clear	ZB4BW37
	Extended	White	ZB4BW11
		Green	ZB4BW13
		Red	ZB4BW14
		Yellow	ZB4BW15
		Blue	ZB4BW16
		Clear	ZB4BW17

Table 19.45: Heads for Maintained Illuminated Push Buttons

Shape of Head	Type of Push	Color of Lens	Catalog Number
Only use with Protected LED light modules			
	Push/Pull Mushroom (40 mm)	Clear	ZB4BW613
		Green	ZB4BW633
		Red	ZB4BW643
		Yellow	ZB4BW653
		Blue	ZB4BW663


ZB4BW643


ZB4BH033


ZB4BH63

Table 19.46: Illuminated Push-On/Push-Off Operators

Shape of Head	Type of Push	Color of Lens	Catalog Number
Only use with Protected LED light modules			
	Flush	White	ZB4BH013
		Green	ZB4BH033
		Red	ZB4BH043
		Yellow	ZB4BH053
		Blue	ZB4BH063
	Extended	White	ZB4BH13
		Green	ZB4BH33
		Red	ZB4BH43
		Yellow	ZB4BH53
		Blue	ZB4BH63

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BW7A3741


ZB4BW7A1721

Table 19.47: Two Button with Clear Pilot Light, Momentary

Shape of Head	Description	Marking	Cap Color	Degree of Protection	Catalog Number
No Marking					
Protected LED	Two flush	—	Green Red	IP66 IP69K	ZB4BW7A3740
		—	White Black		ZB4BW7A1720
Protected LED	One flush One extended	—	Green Red		ZB4BW7L3740
Premarked					
Protected LED	Two flush	"I" (white) "O" (white)	Green Red	IP66 IP69K	ZB4BW7A3741
		"I" (black) "O" (white)	White Black		ZB4BW7A1721
Protected LED	One flush One extended	"I" (white) "O" (white)	Green Red		ZB4BW7L3741
Protected LED	Two flush	"↑" (black) "↓" (white)	White Black		ZB4BW7A1724
Protected LED	Two flush	"+" (black) "-" (white)	White Black		ZB4BW7A1715
Without caps					
	Two flush without caps	—	—	IP66 IP69K	ZB4BW7A9


ZB4BK1343

Table 19.48: Illuminated Selector Switches, Standard Lever

Shape of Head	Number and Type of Positions		Catalog Number [15]
Only use with Protected LED light modules			
	2-maintained		ZB4BK12●3
	2-momentary from right to left		ZB4BK14●3
	3-maintained		ZB4BK13●3
	3-momentary to center		ZB4BK15●3
	3-momentary from right to center		ZB4BK18●3
	3-momentary from left to center		ZB4BK17●3

Table 19.49: Sequence of Contacts on Illuminated Selector Switch Bodies

Unit Type		Selector Switches									
		2-position				3-position					
		315°		45°		315°		0°		45°	
Operator Plunger Position	Up										
	Down										
Contact Block Location		L	R	L	R	L	R	L	R	L	R
Contacts	N.O.	O	O	X	X	X	O	O	O	O	X
	N.C.	X	X	O	O	O	X	X	X	X	O
Note: L=Left, R=Right, O=Open, X=Closed											

2 Position Selector Switch			3 Position Selector Switch			
		Contact block guide				Contact block guide
O	X	1 N.O. (left or right)	O	O	X	1 N.O. (left)
X	O	1 N.C. (left or right)	X	O	X	2 N.O. wired in **parallel** (side by side)
O	X	1 N.O.	X	O	O	1 N.O. (right)
		and	O	X	X	1 N.C. (right)
X	O	1 N.C.	X	X	O	1 N.C. (left)
			O	X	O	2 N.C. wired in **series** (side by side)

For Legend Holders, refer to XB4 Legend Holders, page 19-26.

[15] ● Designate color as follows: 1—white, 3—green, 4—red, 5—yellow, 6—blue.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB4BZ101


ZB4BW0••3


ZB4BW06•


ZB4BW0•5

XB4 Electrical Components

Table 19.50: Contact Blocks (Mounting Collar with Contact Blocks)

Description	Type of Contact		Catalog Number
	N.O.	N.C.	
Screw clamp terminal connections	1	—	ZB4BZ101
	—	1	ZB4BZ102
	2	—	ZB4BZ103
	—	2	ZB4BZ104
	1	1	ZB4BZ105
	1	2	ZB4BZ141

For Quick-Connect version add “3” to the end of the catalog number Example: ZB4BZ1013 (Quick-Connect size 1 x 0.250" or 2 x 0.110").
For Ring Tongue compatible blocks add “9” to the end of the catalog number (Example: ZB4BZ1029).
Electrical components with connection by printed circuit board pins are available. Refer to Catalog 9001CT0001.
Electrical components with connection by plug-in connector are available. Refer to Catalog 9001CT0001.

Table 19.51: Complete Bodies (Mounting Collar + Single Contact Block + Light Module with Protected LED™)

Light Source	Type of Contact *[16]*		Color	Supply Voltage *[17]*	
	N.O.	N.C.		24 Vac/Vdc	110–120 Vac
				Catalog Number	
Screw clamp terminal connections					
Protected LED	1	—	White	ZB4BW0B11	ZB4BW0G11
			Green	ZB4BW0B31	ZB4BW0G31
			Red	ZB4BW0B41	ZB4BW0G41
			Yellow	ZB4BW0B51	ZB4BW0G51
			Blue	ZB4BW0B61	ZB4BW0G61
	—	1	White	ZB4BW0B12	ZB4BW0G12
			Green	ZB4BW0B32	ZB4BW0G32
			Red	ZB4BW0B42	ZB4BW0G42
			Yellow	ZB4BW0B52	ZB4BW0G52
			Blue	ZB4BW0B62	ZB4BW0G62
	2	—	White	ZB4BW0B13	ZB4BW0G13
			Green	ZB4BW0B33	ZB4BW0G33
			Red	ZB4BW0B43	ZB4BW0G43
			Yellow	ZB4BW0B53	ZB4BW0G53
			Blue	ZB4BW0B63	ZB4BW0G63
	1	1	White	ZB4BW0B15	ZB4BW0G15
			Green	ZB4BW0B35	ZB4BW0G35
			Red	ZB4BW0B45	ZB4BW0G45
			Yellow	ZB4BW0B55	ZB4BW0G55
			Blue	ZB4BW0B65	ZB4BW0G65

Table 19.52: Mounting Collar, Contact Block and Light Module (with screw clamp terminal connections)

Supply	Light Source	Supply Voltage	Type of Contact *[16]*		Color of Light Source	Catalog Number
			N.O.	N.C.		
Screw clamp terminal connections						
Direct supply	BA9s 2.4 W max. bulb Not included *[18]*	< 250 Vac/Vdc	1	—	—	ZB4BW061
			—	1	—	ZB4BW062
			2	—	—	ZB4BW063
			1	1	—	ZB4BW065
Transformer type 1.2 VA, 6 V secondary	BA9s incandescent bulb included	110–120 Vac 50/60 Hz	1	—	—	ZB4BW031
			1	1	—	ZB4BW035
		230–240 Vac 50/60 Hz	1	—	—	ZB4BW041
			1	1	—	ZB4BW045
		440–480 Vac 60 Hz	1	—	—	ZB4BW081

[16] Can be fitted with additional contact blocks, see Table 19.54 Add-On Contact Block (with screw clamp terminal connections) , page 19-24.
[17] For 240V LED, replace the “B” or “G” with “M”. (Example: change “ZB4BW0**B**11 (24V) to ZB4BW0**M**11 (240V))
[18] Order bulb separately, see BA9s Bulbs and Associated Accessories.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB4BZ009



ZBE101



ZBE203



ZBVB•

Table 19.53: Body/Mounting Collar

For use with	Catalog Number
Electrical block (contact or light module)	ZB4BZ009

Table 19.54: Add-On Contact Block (with screw clamp terminal connections) *[19][20]*

Description		Type of Contact		Catalog Number
		N.O.	N.C.	
Standard **single** contact blocks *[21][22]*		1	—	ZBE101
		—	1	ZBE102
Standard **double** contact blocks *[21][22]*		2	—	ZBE203
		—	2	ZBE204
		1	1	ZBE205
Special contact blocks for low power switching *[23]*		1	—	ZBE1016
		—	1	ZBE1026
Low-power switching	Dusty environment *[23]* (IP5X, 50 µm dust)	1	—	ZBE1016P
		—	1	ZBE1026P
Staggered contacts	Early make N.O.	1	–	ZBE201
	Late break N.C.	—	1	ZBE202
	Overlapping N.O.+N.C.	1	1	ZB4BZ106
	Staggered N.O.+N.C.	—	2	ZB4BZ107

Table 19.55: Light Modules (with screw clamp terminal connections) *[19][20]*

Description	Supply Voltage	Color of Light Source	Catalog Number
Protected LED	12 Vac/Vdc	White	ZBVJ1
		Green	ZBVJ3
		Red	ZBVJ4
		Yellow	ZBVJ5
		Blue	ZBVJ6
	24 Vac/Vdc	White	ZBVB1
		Green	ZBVB3
		Red	ZBVB4
		Yellow	ZBVB5
		Blue	ZBVB6
	110–120 Vac	White	ZBVG1
		Green	ZBVG3
		Red	ZBVG4
		Yellow	ZBVG5
		Blue	ZBVG6
	24–120 Vac/Vdc	White	ZBVBG1
		Green	ZBVBG3
		Red	ZBVBG4
		Yellow	ZBVBG5
		Blue	ZBVBG6
	230–240 Vac	White	ZBVM1
		Green	ZBVM3
		Red	ZBVM4
		Yellow	ZBVM5
		Blue	ZBVM6
Direct supply for BA9s 2.4 W max. bulb not included.	< 250 Vac/Vdc	—	ZBV6

[19] Electrical components with connection by printed circuit board pins are available. Refer to Catalog 9001CT0001 for more details.
[20] Electrical components with connection by plug-in connector are available. Refer to Catalog9001CT0001for more details.
[21] For Quick-Connect version add “3” to the end of the catalog number Example: ZBE1013 (Quick-Connect size 1 x 0.250 in. or 2 x 0.110 in.).
[22] For Ring Tongue compatible blocks add “9” to the end of the catalog number (Example: ZBE1029).
[23] Cannot stack additional contact blocks onto these blocks.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB4BZ009



ZB4BZ1015

Table 19.56: Body/Mounting Collar

For use with	Catalog Number
Contact block or light module	ZB4BZ009

Table 19.57: Light Modules *[24]*

Spring Terminal Connections			
Description	**Supply voltage**	**Color of light source**	**Catalog Number**
Integral LED (to combine with heads for integral LED) Protected LED	12 Vac/Vdc	White	ZBVJ15
		Green	ZBVJ35
		Red	ZBVJ45
		Orange	ZBVJ55
		Blue	ZBVJ65
	24 Vac/Vdc	White	ZBVB15
		Green	ZBVB35
		Red	ZBVB45
		Orange	ZBVB55
		Blue	ZBVB65
	110–120 Vac	White	ZBVG15
		Green	ZBVG35
		Red	ZBVG45
		Orange	ZBVG55
		Blue	ZBVG65
	230–240 Vac	White	ZBVM15
		Green	ZBVM35
		Red	ZBVM45
		Orange	ZBVM55
		Blue	ZBVM65

[24] Additional blocks **cannot** be attached to the back of these contact blocks or light modules. However, spring terminal contact blocks can be mounted behind screw terminal contact blocks.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZBZ32


ZBY•101



ZBY2303

XB4 Legend Holders

Table 19.58: Standard (30 x 40 mm) Legend Holders for 8 x 27 mm Legends

Description	Legend		Catalog Number
	Color	Text	
Without legend	—	—	ZBZ32
With blank legend (for engraving)	Black or red background	—	ZBY2101
	White or yellow background	—	ZBY4101
Custom Legend (Specify Engraving) 2 lines of 11 characters (including spaces) maximum per line	Black background	White	ZBY2002
	Red background	White	ZBY2004
	White background	Black	ZBY4001
	Yellow background	Black	ZBY4005
With legend marked with international language	Black or red background *[25]*	O (black background)	ZBY2146
		O (red background)	ZBY2931
		I	ZBY2147
		II	ZBY2148
		O-I	ZBY2178
		I-II	ZBY2179
		I-O-II	ZBY2186
With legend marked with English language	Black or red background *[25]*	AUTO	ZBY2115
		AUTO-HAND	ZBY2364
		AUTO-O-HAND	ZBY2385
		CLOSE	ZBY2314
		DOWN	ZBY2308
		EMERGENCY STOP	ZBY2330
		FAST	ZBY2328
		FORWARD	ZBY2305
		FOR-REV	ZBY2371
		HAND	ZBY2316
		HAND-OFF-AUTO	ZBY2387
		INCH	ZBY2321
		JOG	ZBY2382
		LEFT	ZBY2310
		OFF	ZBY2312
		OFF-ON	ZBY2367
		ON	ZBY2311
		OPEN	ZBY2313
		POWER ON	ZBY2326
		RESET (red background)	ZBY2323
		RESET (black background)	ZBY2322
		REVERSE	ZBY2306
		RIGHT	ZBY2309
		RUN	ZBY2334
		SLOW	ZBY2327
		START	ZBY2303
		STOP	ZBY2304
		STOP-START	ZBY2366
		UP	ZBY2307

[25] Start functions: white letters on black background. Stop functions: white letters on red background (unless otherwise specified above).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XB5AA31


XB5AA4322


XB5AP51


XB5AL42


XB5AC21


XB5AL73415


XB5AW73731●5



XB5AA731327

XB5 Complete Devices

Table 19.59: Non-Illuminated Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact N.O.	Type of Contact N.C.	Marking	Cap Color	Catalog Number	Components
	Flush	1	—	—	Black	XB5AA21	(ZB5AZ101 + ZB5AA2)
					Green	XB5AA31	(ZB5AZ101 + ZB5AA3)
					Yellow	XB5AA51	(ZB5AZ101 + ZB5AA5)
					Blue	XB5AA61	(ZB5AZ101 + ZB5AA6)
		—	1	—	Red	XB5AA42	(ZB5AZ102 + ZB5AA4)
		1	1	—	Black	XB5AA25	(ZB5AZ105 + ZB5AA2)
					Green	XB5AA35	(ZB5AZ105 + ZB5AA3)
					Red	XB5AA45	(ZB5AZ105 + ZB5AA4)
					Yellow	XB5AA55	(ZB5AZ105 + ZB5AA5)
					Blue	XB5AA65	(ZB5AZ105 + ZB5AA6)
	Flush	1	—	"I" (white)	Green	XB5AA3311	(ZB5AZ101 + ZB5AA331)
	Flush	—	1	"O" (white)	Red	XB5AA4322	(ZB5AZ102 + ZB5AA432)
	Flush with clear silicone boot (color of pusher unobscured)	1	—	—	Black	XB5AP21	(ZB5AZ101 + ZB5AP2)
					Green	XB5AP31	(ZB5AZ101 + ZB5AP3)
					Yellow	XB5AP51	(ZB5AZ101 + ZB5AP5)
					Blue	XB5AP61	(ZB5AZ101 + ZB5AP6)
		—	1	—	Red	XB5AP42	(ZB5AZ102 + ZB5AP4)
	Extended	—	1	—	Red	XB5AL42	(ZB5AZ102 + ZB5AL4)
		1	1	—	Red	XB5AL45	(ZB5AZ105 + ZB5AL4)
	Mushroom head Ø 40 mm	1	—	—	Black	XB5AC21	(ZB5AZ101 + ZB5AC2)

Table 19.60: Two Button Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact N.O.	Type of Contact N.C.	Marking	Degree of Protection	Catalog Number	Components
	One flush green push* One extended red push**	1	1	*"I" (white) **"O" (white)	IP66 IP69K	XB5AL73415	(ZB5AZ105 + ZB5AL7341)

Table 19.61: Two Button Push Buttons, Momentary + one white central pilot light (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact N.O.	Type of Contact N.C.	Marking	Degree of Protection	Pilot Light Voltage	Catalog Number
Protected LED	One flush green push* One extended red push** One white central pilot light block	1	1	*"I" (white) **"O" (white)	IP66 IP69K	24	XB5AW73731B5
						120	XB5AW73731G5
						240	XB5AW73731M5

Table 19.62: Three Button Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact N.O.	Type of Contact N.C.	Degree of Protection	Marking and Cap Color	Catalog Number
	Two flush pushes + one central projecting red push*	2	1	IP66 IP69K	White "I" on green background White "II" on green background *White "Stop" on red background	XB5AA731327
					Black "➡" on white background White "⇦" on black background *White "Stop" on red background	XB5AA711237

For Legend Holders, see XB5 Legend Holders, page 19-42.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB5AS 40 mm KR



XB5AS 40 mm TR



XB5AT 40 mm PP

Table 19.63: Non-Illuminated Trigger Action Emergency Stop Push Buttons, Ø 40 mm (Red) (screw clamp terminal connections)

Shape of Head	Type of Push	Type of Contact		Catalog Number	Components
		N.O.	N.C.		
	Trigger action push-pull *[26]*	1	1	XB5AT845	(ZB5AZ105 + ZB5AT84)
	Trigger action turn-to-release *[26]*	1	1	XB5AS8445	(ZB5AZ105 + ZB5AS844)
		—	2	XB5AS8444	(ZB5AZ104 + ZB5AS844)
	Trigger action Key release (No. 455) *[26]*	1	1	XB5AS9445	(ZB5AZ105+ ZB5AS944)
	Trigger action Push-pull *[26]*	—	1	XB5AT842	(ZB5AZ102 + ZB5AT84)
	Trigger action Turn-to-release *[26]*	—	1	XB5AS8442	(ZB5AZ102 + ZB5AS844)
	Trigger action Key release (No. 455) *[26]*	—	1	XB5AS9442	(ZB5AZ102 + ZB5AS944)



XB5AD33



XB5AJ33



XB5AG33

Table 19.64: Non-Illuminated Selector Switches and Key Switches (screw clamp terminal connections) *[27]*

Shape of Head	Type of Operator	Type of Contact		Number and Type of Positions		Catalog Number	Components
		N.O.	N.C.				
	Standard lever, black	1	—	2-maintained		XB5AD21	(ZB5AZ101 + ZB5AD2)
		1	1	2-maintained		XB5AD25	(ZB5AZ105 + ZB5AD2)
		2	—	3-maintained		XB5AD33	(ZB5AZ103 + ZB5AD3)
				3-momentary to center		XB5AD53	(ZB5AZ103 + ZB5AD5)
	Extended lever, black	1	—	2-maintained		XB5AJ21	(ZB5AZ101 + ZB5AJ2)
		2	—	3-maintained		XB5AJ33	(ZB5AZ103 + ZB5AJ3)
				3-momentary to center		XB5AJ53	(ZB5AZ103 + ZB5AJ5)
	Key (No. 455)	1	—	2-maintained		XB5AG21	(ZB5AZ101 + ZB5AG2)
						XB5AG41	(ZB5AZ101 + ZB5AG4)
				2-momentary to left		XB5AG61	(ZB5AZ101 + ZB5AG6)
		2	—	3-maintained		XB5AG03	(ZB5AZ103 + ZB5AG0)
						XB5AG33	(ZB5AZ103 + ZB5AG3)

NOTE: The symbol ⚷ indicates key withdrawal position(s).

For Legend Holders, see XB5 Legend Holders, page 19-42.

[26] Trigger action mushroom heads are tamper proof in that a change of contact state is not possible by teasing or floating the operator. For emergency stop applications, always use a trigger action push button (per EN/IEC 13850).

[27] For contact configurations, see Table 19.78 Sequence of Contacts on Selector Switch Bodies , page 19-34.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB5AVB1



XB5EVG1



XB5AV63



XB5AV34



XB5AW31B5



XB5AW3465



XB5AW3335

For legends, see XB5 Legend Holders, page 19-42.

Table 19.65: Pilot Lights with Protected LED™ (screw clamp terminal connections)

[28]

Shape of Head		Supply Voltage	Color	Monolithic Units	Complete Units	Complete Unit Components
●	Protected LED	24 Vac/Vdc	White	XB5EVB1	XB5AVB1	(ZB5AVB1 + ZB5AV013)
			Green	XB5EVB3	XB5AVB3	(ZB5AVB3 + ZB5AV033)
			Red	XB5EVB4	XB5AVB4	(ZB5AVB4 + ZB5AV043)
			Orange	XB5EVB5	XB5AVB5	(ZB5AVB5 + ZB5AV053)
			Blue	XB5EVB6	XB5AVB6	(ZB5AVB6 + ZB5AV063)
			Yellow	XB5EVB8	—	—
		110–120 Vac	White	XB5EVG1	XB5AVG1	(ZB5AVG1 + ZB5AV013)
			Green	XB5EVG3	XB5AVG3	(ZB5AVG3 + ZB5AV033)
			Red	XB5EVG4	XB5AVG4	(ZB5AVG4 + ZB5AV043)
			Orange	XB5EVG5	XB5AVG5	(ZB5AVG5 + ZB5AV053)
			Blue	XB5EVG6	XB5AVG6	(ZB5AVG6 + ZB5AV063)
			Yellow	XB5EVG8	—	—
		230–240 Vac	White	XB5EVM1	XB5AVM1	(ZB5AVM1 + ZB5AV013)
			Green	XB5EVM3	XB5AVM3	(ZB5AVM3 + ZB5AV033)
			Red	XB5EVM4	XB5AVM4	(ZB5AVM4 + ZB5AV043)
			Orange	XB5EVM5	XB5AVM5	(ZB5AVM5 + ZB5AV053)
			Blue	XB5EVM6	XB5AVM6	(ZB5AVM6 + ZB5AV063)
			Yellow	XB5EVM8	—	—

Table 19.66: Pilot Lights for BA9s Bulb (screw clamp terminal connections)

Shape of Head	Supply Voltage	Color	Catalog Number	Components
Direct supply, for BA9s (incandescent, LED, neon) V < 250 V, 2.4 W bulb (bulb not included)				
●	< 250 Vac/ Vdc	White	XB5AV61	(ZB5AV6 + ZB5AV01)
		Green	XB5AV63	(ZB5AV6 + ZB5AV03)
		Red	XB5AV64	(ZB5AV6 + ZB5AV04)
		Yellow	XB5AV65	(ZB5AV6 + ZB5AV05)
Transformer type with 1.2 VA, 6 V secondary. BA9s incandescent bulb included				
●	110–120 Vac 50/60 Hz	White	XB5AV31	(ZB5AV3 + ZB5AV01)
		Green	XB5AV33	(ZB5AV3 + ZB5AV03)
		Red	XB5AV34	(ZB5AV3 + ZB5AV04)
		Yellow	XB5AV35	(ZB5AV3 + ZB5AV05)

Table 19.67: Illuminated Push Buttons, Momentary (screw clamp terminal connections)

Shape of Head	Description	Type of Contact N.O.	Type of Contact N.C.	Supply Voltage	Color of Push	Catalog Number	Components
Flush							
●	Protected LED	1	1	24 Vac/ Vdc	White	XB5AW31B5	(ZB5AW0B15 + ZB5AW313)
					Green	XB5AW33B5	(ZB5AW0B35 + ZB5AW333)
					Red	XB5AW34B5	(ZB5AW0B45 + ZB5AW343)
					Yellow	XB5AW35B5	(ZB5AW0B55 + ZB5AW353)
					Blue	XB5AW36B5	(ZB5AW0B65 + ZB5AW363)
				110–120 Vac	White	XB5AW31G5	(ZB5AW0G15 + ZB5AW313)
					Green	XB5AW33G5	(ZB5AW0G35 + ZB5AW333)
					Red	XB5AW34G5	(ZB5AW0G45 + ZB5AW343)
					Yellow	XB5AW35G5	(ZB5AW0G55 + ZB5AW353)
					Blue	XB5AW36G5	(ZB5AW0G65 + ZB5AW363)
●	Direct supply for BA9s 2.4 W max. bulb **not** included	1	1	< 250 Vac/Vdc	White	XB5AW3165	(ZB5AW065 + ZB5AW31)
					Green	XB5AW3365	(ZB5AW065 + ZB5AW33)
					Red	XB5AW3465	(ZB5AW065 + ZB5AW34)
					Yellow	XB5AW3565	(ZB5AW065 + ZB5AW35)
●	Transformer type 1.2 VA, 6 V secondary. BA9s incandescent bulb included	1	1	110–120 Vac 50/60 Hz	White	XB5AW3135	(ZB5AW035 + ZB5AW31)
					Green	XB5AW3335	(ZB5AW035 + ZB5AW33)
					Red	XB5AW3435	(ZB5AW035 + ZB5AW34)
					Yellow	XB5AW3535	(ZB5AW035 + ZB5AW35)
				230–240 Vac 50/60 Hz	White	XB5AW3145	(ZB5AW045 + ZB5AW31)
					Green	XB5AW3345	(ZB5AW045 + ZB5AW33)
					Red	XB5AW3445	(ZB5AW045 + ZB5AW34)
					Yellow	XB5AW3545	(ZB5AW045 + ZB5AW35)
Extended							
●	Protected LED	1	1	24 Vac/ Vdc	White	XB5AW11B5	(ZB5AW0B15 + ZB5AW113)
					Green	XB5AW13B5	(ZB5AW0B35 + ZB5AW133)
					Red	XB5AW14B5	(ZB5AW0B45 + ZB5AW143)
					Yellow	XB5AW15B5	(ZB5AW0B55 + ZB5AW153)
					Blue	XB5AW16B5	(ZB5AW0B65 + ZB5AW163)
				110–120 Vac	White	XB5AW11G5	(ZB5AW0G15 + ZB5AW113)
					Green	XB5AW13G5	(ZB5AW0G35 + ZB5AW133)
					Red	XB5AW14G5	(ZB5AW0G45 + ZB5AW143)
					Yellow	XB5AW15G5	(ZB5AW0G55 + ZB5AW153)
					Blue	XB5AW16G5	(ZB5AW0G65 + ZB5AW163)

[28] For 240V LED, replace the “B” or “G” with “M”. (Example: XB5APV**B**1 (24 V) to XB5APV**M**1 (240 Vac only))

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB5AA0


ZB5AA5


ZB5AL3


ZB5AP1


ZB5CA2

XB5 Non-Illuminated Operators

Table 19.68: Non-Illuminated Operators, Momentary—Unmarked

Shape of Head	Type of Push	Cap Color	Catalog Number
	Flush, without color cap	—	ZB5AA0
	Flush, with set of 6 color caps	6 colors *[29]*	ZB5AA9
	Flush	White	ZB5AA1
		Black	ZB5AA2
		Green	ZB5AA3
		Red	ZB5AA4
		Yellow	ZB5AA5
		Blue	ZB5AA6
		Gray	ZB5AA8
	Flush with transparent cap, for insertion of legend	White	ZB5AA18
		Green	ZB5AA38
		Red	ZB5AA48
		Yellow	ZB5AA58
		Blue	ZB5AA68
	Extended	White	ZB5AL1
		Black	ZB5AL2
		Green	ZB5AL3
		Red	ZB5AL4
		Yellow	ZB5AL5
		Blue	ZB5AL6
	Booted Flush (clear) Cap color unobscured	White	ZB5APA1
		Black	ZB5APA2
		Green	ZB5APA3
		Red	ZB5APA4
		Yellow	ZB5APA5
		Blue	ZB5APA6
	Booted Extended (clear) Cap color unobscured	White	ZB5AP1
		Black	ZB5AP2
		Green	ZB5AP3
		Red	ZB5AP4
		Yellow	ZB5AP5
		Blue	ZB5AP6
	Booted (colored) Cap color unobscured	White	ZB5AP1S
		Black	ZB5AP2S
		Green	ZB5AP3S
		Red	ZB5AP4S
		Yellow	ZB5AP5S
		Blue	ZB5AP6S
	Booted (clear) for insertion of legend Cap color unobscured	White	ZB5AP18
		Green	ZB5AP38
		Red	ZB5AP48
		Yellow	ZB5AP58
		Blue	ZB5AP68
	Flush Plunger (with high guard)	White	ZB5AA14
		Black	ZB5AA24
		Green	ZB5AA34
		Red	ZB5AA44
		Yellow	ZB5AA54
		Blue	ZB5AA64
	Flush	White	ZB5CA1
		Black	ZB5CA2
		Green	ZB5CA3
		Red	ZB5CA4
		Yellow	ZB5CA5
		Blue	ZB5CA6
	Extended	White	ZB5CL1
		Black	ZB5CL2
		Green	ZB5CL3
		Red	ZB5CL4
		Yellow	ZB5CL5
		Blue	ZB5CL6
	Heads only Recessed (high guard)	White	ZB5AA16
		Black	ZB5AA26
		Green	ZB5AA36
		Red	ZB5AA46
		Yellow	ZB5AA56
		Blue	ZB5AA66
	Heads only Recessed (high guard)	White	ZB5CA16
		Black	ZB5CA26
		Green	ZB5CA36
		Red	ZB5CA46
		Yellow	ZB5CA56
		Blue	ZB5CA66

For Legends, see XB5 Legend Holders, page 19-42.

[29] Six colored caps included with head (white, black, green, red, yellow, blue).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB5AA331


ZB5AA432


ZB5AL232

Table 19.69: Non-Illuminated Operators, Momentary—Premarked

Shape of Head	Type of Push	Marking		Cap Color	Catalog Number
		Text	Color		
	Flush	I	White	Green	ZB5AA331
			Black	White	ZB5AA131
		START	White	Green	ZB5AA333
			Black	White	ZB5AA133
		ON	White	Green	ZB5AA341
			Black	White	ZB5AA141
		T	White	Green	ZB5AA345
		O	White	Red	ZB5AA432
				Black	ZB5AA232
		STOP	White	Red	ZB5AA434
				Black	ZB5AA234
		OFF	White	Red	ZB5AA435
				Black	ZB5AA235
		UP	Black	White	ZB5AA343
		DOWN	White	Black	ZB5AA344
		↑ [30]	Black	White	ZB5AA334
			White	Black	ZB5AA335
	Extended	O	White	Red	ZB5AL432
				Black	ZB5AL232
		STOP	White	Red	ZB5AL434
				Black	ZB5AL234
		OFF	White	Red	ZB5AL435
				Black	ZB5AL235
	Flush	I	White	Green	ZB5CA331
		O	White	Red	ZB5CA432


ZB5AC24


ZB5AC2


ZB5AR4

Table 19.70: Mushroom Heads, Momentary

Shape of Head	Diameter of Head	Color of Head	Catalog Number
	30 mm	Black	ZB5AC24
		Green	ZB5AC34
		Red	ZB5AC44
		Yellow	ZB5AC54
		Blue	ZB5AC64
	40 mm	Black	ZB5AC2
		Green	ZB5AC3
		Red	ZB5AC4
		Yellow	ZB5AC5
		Blue	ZB5AC6
	60 mm	Black	ZB5AR2
		Green	ZB5AR3
		Red	ZB5AR4
		Yellow	ZB5AR5
		Blue	ZB5AR6

For legends, see XB5 Legend Holders, page 19-42.

[30] Cap supplied not clipped-in, allowing orientation of arrow in any one of 4 directions:

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB5AH04

Table 19.71: Non-Illuminated Push-on/Push-off Operators

Shape of Head	Type of Push	Color of Push	Catalog Number
	Flush	White	ZB5AH01
		Black	ZB5AH02
		Green	ZB5AH03
		Red	ZB5AH04
		Yellow	ZB5AH05
		Blue	ZB5AH06
	Extended	White	ZB5AH1
		Black	ZB5AH2
		Green	ZB5AH3
		Red	ZB5AH4
		Yellow	ZB5AH5
		Blue	ZB5AH6
	Flush	White	ZB5CH01
		Black	ZB5CH02
		Green	ZB5CH03
		Red	ZB5CH04
		Yellow	ZB5CH05
		Blue	ZB5CH06



ZB5AL7341



ZB5AA7121

Table 19.72: Two Head Operators, Momentary

Shape of Head	Description	Marking	Cap Color	Degree of Protection	Catalog Number
No Marking					
	Two flush	—	Green Red	IP66 IP69K	ZB5AA7340
		—	White Black		ZB5AA7120
	One flush One extended	—	Green Red		ZB5AL7340
Premarked					
	Two flush	"I" (white) "O" (white)	Green Red	IP66 IP69K	ZB5AA7341
		"I" (black) "O" (white)	White Black		ZB5AA7121
	One flush One extended	"I" (white) "O" (white)	Green Red		ZB5AL7341
Without caps					
	Two flush without caps	—	—	IP66 IP69K	ZB5AA79



ZB5AA73133



ZB5AA71124

Table 19.73: Three Head Operators, Momentary

Shape of Head	Description	Marking	Cap Color	Degree of Protection	Catalog Number
Premarked					
Two flush + one central projecting red push marked "Stop"	Two flush	"I" (white) "II" (white)	Green Green	IP66 IP69K	ZB5AA73132
		"⇐" (white) "⇒" (white)	Green Green		ZB5AA73133
		"⇑" (white) "⇓" (white)	Green Green		ZB5AA73134
		"+" (white) "-" (white)	Green Green		ZB5AA73135
		"+" (black) "-" (black)	White White		ZB5AA71115
		"⇐" (black) "⇒" (white)	White Black		ZB5AA71123
		"⇑" (black) "⇓" (white)	White Black		ZB5AA71124
		"⇑" (white) "⇓" (white)	Black Black		ZB5AA72124
Without caps					
	Two flush without caps	—	—	IP66 IP69K	ZB5AA791

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB5AC 30 mm



ZB5AS 60 mm

XB5 Emergency Stop Operators

Table 19.74: Mushroom Heads for Maintained Push Buttons

Shape of Head	Type of Push	Diameter of Head	Color	Catalog Number
For use in Emergency Stop applications				
	Trigger action Push-pull *[31]*	30 mm	Red	ZB5AT844
		40 mm	Red	ZB5AT84
		60 mm	Red	ZB5AX84
	Trigger action Turn-to-release *[31]*	30 mm	Red	ZB5AS834
		40 mm	Red	ZB5AS844
		60 mm	Red	ZB5AS864
	Trigger action Key release (No. 455) *[31]*	30 mm	Red	ZB5AS934
		40 mm	Red	ZB5AS944 *[32]*
		60 mm	Red	ZB5AS964
For use in non-Emergency Stop applications				
	Push-pull	30 mm	Black	ZB5AT24
		40 mm	Black	ZB5AT2
		60 mm	Black	ZB5AX2
	Turn-to-release	30 mm	Black	ZB5AS42
		40 mm	Black	ZB5AS52
			Yellow	ZB5AS55
		60 mm	Black	ZB5AS62
	Key release (No. 455)	30 mm	Black	ZB5AS72
		40 mm	Black	ZB5AS12
		60 mm	Black	ZB5AS22

Table 19.75: Circular Legends for Emergency Stop Mushroom Heads (yellow background)

Diameter	Text	Catalog Number
90 mm	Blank	ZBY8101
	EMERGENCY STOP	ZBY8330
60 mm Bezeled	Blank	ZBY9121
	Emergency Stop	ZBY9320
	Prada de Emergencia	ZBY9420
	Not Halt	ZBY9220

For Legends, see XB5 Legend Holders, page 19-42.



ZBY9320

[31] Trigger action mushroom heads are tamper proof in that a change of contact state is not possible by teasing or floating the operator. For emergency stop applications, always use a trigger action push button (per EN/IEC 13850).

[32] Other key numbers:
—key no. 421E: add the suffix 12 to the catalog number.
—key no. 458A: add the suffix 10 to the catalog number.
—key no. 520E: add the suffix 14 to the catalog number.
—key no. 3131A: add the suffix 20 to the catalog number.
Example: The catalog number for a Ø 40 mm red mushroom head for a trigger action, maintained push button, with release by key no. 421E becomes: ZB5AS94412.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB5AD•
Standard Lever



ZB5AJX•
Extended Lever

XB5 Selector Switches

Table 19.76: Non-Illuminated Selector Switches

Color	Number and Type of Positions		Standard Lever [33]	Extended Lever [33]
			Catalog Number	
Black	2-maintained		ZB5AD2	ZB5AJ2
Black	2-momentary from right to left		ZB5AD4	ZB5AJ4
Black	3-maintained		ZB5AD3	ZB5AJ3
Black	3-momentary to center		ZB5AD5	ZB5AJ5
Black	3-momentary from left to center		ZB5AD7	ZB5AJ7
Black	3-momentary from right to center		ZB5AD8	ZB5AJ8







ZB5AG•

Table 19.77: Non-Illuminated Key Switches

Type of Operator	Number and Type of Positions		Catalog Number [34]
Key (No. 455) [34]  **NOTE:** The symbol ⚷ indicates key withdrawal position(s).	2-maintained		ZB5AG2
			ZB5AG4
			ZB5AG02
	2-momentary from right to left		ZB5AG6
	3-maintained		ZB5AG0
			ZB5AG3
			ZB5AG5
			ZB5AG9
			ZB5AG09
	3-momentary from left to center		ZB5AG1
	3-momentary to center		ZB5AG7
	3-momentary from right to center		ZB5AG8
			ZB5AG08
			ZB5AG05

Table 19.78: Sequence of Contacts on Selector Switch Bodies

Unit Type		Selector Switches														
		2-position						3-position								
Note: L=Left, C=Center, R=Right, O=Open, X=Closed		315° 			45° 			315° 			0° 			45° 		
Operator Plunger Position	Up															
	Down															
Contact Block Location		L	C	R	L	C	R	L	C	R	L	C	R	L	C	R
Contacts	N.O.	O	O	O	X	X	X	X	X	O	O	O	O	O	X	X
	N.C.	X	X	X	O	O	O	O	O	X	X	X	X	X	O	O

For Selector Switch Sequence, see Table 19.49 Sequence of Contacts on Illuminated Selector Switch Bodies, page 19-22

[33] For colored lever, add the following code to the end of catalog number: 01—white, 03—green, 04—red, 05—yellow, 06—blue (Example: ZB5AD204).

[34] Other key numbers:
—key no. 421E: add the suffix 12 to the catalog number.
—key no. 458A: add the suffix 10 to the catalog number.
—key no. 520E: add the suffix 14 to the catalog number.
—key no. 3131A: add the suffix 20 to the catalog number.
—key no. 8D1: add the suffix D to the catalog number.
Example: The catalog number for a head with key no. 421E for a 2 position maintained, lockable selector switch, with key withdrawal from the left-hand position, becomes: ZB5AG212

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XB5AA


XB5AD912R1K


XB5DS●


XB5KS●


ZB5AD28

XB5 Specialty Operators

Table 19.79: Reset Operators

Shape of Head	Actuation Distance in	Actuation Distance mm	Text	Color	Catalog Number
Flush	**Adjustable Shaft** Shaft only (short) is W40437632				
	0.67–4.72	17–120	Without	Green	XB5AA831
				Red	XB5AA841
				Blue	XB5AA861
			O	Red	XB5AA84101
			R	Blue	XB5AA86102
	4.72–10.12	120–257	Without	Green	XB5AA832
				Red	XB5AA842
				Blue	XB5AA862
			O	Red	XB5AA84201
			R	Blue	XB5AA86202
Extended					
	0.67–4.72	17–120	O	Red	XB5AL84101
	4.72–10.12	120–257	O	Red	XB5AL84201

Table 19.80: Potentiometer Operator (with Mounting Collar)

Shape of Head	Description	Application	Catalog Number
	For potentiometer with shaft length 1.73 to 1.97 in. (44 to 50 mm) (potentiometer not included)	For shaft Ø 0.25 in. (6.35 mm)	ZB5AD922
		For shaft Ø 0.24 in. (6 mm)	ZB5AD912

Table 19.81: Complete Potentiometers

Description	Resistance (k Ω)	Weight (kg/lb)	Catalog Number
+/- 10% linear mode precision complete potentiometer with screw terminals	1	0.048/0.106	XB5AD912R1K
	4.7	0.048/0.106	XB5AD912R4K7
	10	0.048/0.106	XB5AD912R10K
	47	0.048/0.106	XB5AD912R47K
	100	0.048/0.106	XB5AD912R100K
	470	0.048/0.106	XB5AD912R470K

Table 19.82: Hour Counters (UR E191025, XHNR2 and XHNR8)

Characteristics	Supply Voltage	Catalog Number
Indication 0–9999.9 (IP40 NEMA 1)	12–24 Vdc or Vac, 50/60 Hz	XB5DSB
	120 Vac, 60 Hz	XB5DSG
	230–240 Vac, 50 Hz	XB5DSM

Table 19.83: Buzzer (UR E191025, XHNR2 and XHNR8)

Characteristics	Supply Voltage	Catalog Number
85 db buzzer:4kHz, continuous or intermittent (IP40 NEMA 1)	24 Vdc or Vac, 50/60 Hz	XB5KSB
	120 Vac, 60 Hz	XB5KSG

Table 19.84: Two Position Toggle Switch

Shape of Head	Color	Type of Positions	Catalog Number
	Black	Maintained	ZB5AD28
	Black	Momentary	ZB5AD48

For legends, see XB5 Legend Holders, page 19-42.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB5AV053


ZB5AV01


ZB5CV063

XB5 Pilot Lights

Table 19.85: Pilot Light Heads

Shape of Head	For use with Body Comprising Light Module Type	Color of Lens	Catalog Number
	Protected LED™ only	White Green Red Yellow Blue	ZB5AV013 ZB5AV033 ZB5AV043 ZB5AV053 ZB5AV063
	Protected LED only Fresnel (jeweled) lens *[35]*	White Green Red Amber Blue	ZB5AV013S ZB5AV033S ZB5AV043S ZB5AV053S ZB5AV063S
	For BA9s incandescent bulb, neon or LED only	White Green Red Yellow Blue Clear	ZB5AV01 ZB5AV03 ZB5AV04 ZB5AV05 ZB5AV06 ZB5AV07
	For BA9s incandescent bulb, neon or LED Fresnel (jeweled) lens	White Green Red Amber Blue Clear	ZB5AV01S ZB5AV03S ZB5AV04S ZB5AV05S ZB5AV06S ZB5AV07S
	Protected LED only	White Green Red Yellow Blue	ZB5CV013 ZB5CV033 ZB5CV043 ZB5CV053 ZB5CV063

For legends, refer to XB5 Legend Holders, page 19-42.


ZB5AV6


ZB5AV3

Table 19.86: Complete Bodies (Mounting Collar + Light Module for BA9s Incandescent Bulb, Neon or LED)

Description	Light Source	Supply Voltage (V)	Catalog Number
Screw clamp terminal connections			
Direct supply	BA9s bulb 2.4 W max. Not included	<250	ZB5AV6
Direct supply	BA9s incandescent, bulb included	24 V 2 W	ZB5AV624
Direct supply	BA9s incandescent, bulb included	120 V 2.4 W	ZB5AV6120
Transformer type 1.2 VA, 6 V secondary	BA9s incandescent bulb included	110–120 Vac, 50/60 Hz	ZB5AV3
		230–240 Vac, 50/60 Hz	ZB5AV4
		400–50 Hz	ZB5AV5
		440–480 Vac, 60 Hz	ZB5AV8
		550–600 Vac, 60 Hz	ZB5AV9


ZB5AV••

Table 19.87: Complete Bodies (Mounting Collar + Protected LED™ Light Module) *[36][37]*

Light Source	Supply Voltage	Color of Light Source	Catalog Number
Screw clamp terminal connections			
Protected LED	12 Vac/Vdc	White Green Red Yellow Blue	ZB5AVJ1 ZB5AVJ3 ZB5AVJ4 ZB5AVJ5 ZB5AVJ6
	24 Vac/Vdc	White Green Red Yellow Blue	ZB5AVB1 ZB5AVB3 ZB5AVB4 ZB5AVB5 ZB5AVB6
	24–120 Vac/Vdc	White Green Red Yellow Blue	ZB5AVBG1 ZB5AVBG3 ZB5AVBG4 ZB5AVBG5 ZB5AVBG6
	110–120 Vac	White Green Red Yellow Blue	ZB5AVG1 ZB5AVG3 ZB5AVG4 ZB5AVG5 ZB5AVG6
Flashing Protected LED	24 Vac/Vdc	White Green Red Yellow Blue	ZB5AV18B1 ZB5AV18B3 ZB5AV18B4 ZB5AV18B5 ZB5AV18B6
	110–120 Vac	White Green Red Yellow Blue	ZB5AV18G1 ZB5AV18G3 ZB5AV18G4 ZB5AV18G5 ZB5AV18G6

[35] For use in bright ambient conditions (i.e., sunlight).
[36] For Quick-Connect version, add “3” to the end of the catalog number Example: ZB5AVJ13 (Quick-Connect size 1 x 0.250" or 2 x 0.110").
[37] For 240 V LED, replace the “B” or “G” with “M”. (Example: ZB5AV**B**1 (24V) to ZB5AV**M**1 (240V))

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB5AW313


ZB5AW363


ZB5AW143


ZB5CW313


ZB5AW33

XB5 Illuminated Operators

Table 19.88: Heads for Momentary Illuminated Push Buttons

Shape of Head	Type of Push	Color	Catalog Number
Only use with Protected LED™ light modules			
	Flush	White	ZB5AW313
		Green	ZB5AW333
		Red	ZB5AW343
		Yellow	ZB5AW353
		Blue	ZB5AW363
	Flush with clear boot	White	ZB5AW513
		Green	ZB5AW533
		Red	ZB5AW543
		Yellow	ZB5AW553
		Blue	ZB5AW563
	Flush for insertion of legend	White	ZB5AA18
		Green	ZB5AA38
		Red	ZB5AA48
		Yellow	ZB5AA58
		Blue	ZB5AA68
	Extended	White	ZB5AW113
		Green	ZB5AW133
		Red	ZB5AW143
		Yellow	ZB5AW153
		Blue	ZB5AW163
	Flush for insertion of legend	White	ZB5CW313
		Green	ZB5CW333
		Red	ZB5CW343
		Yellow	ZB5CW353
		Blue	ZB5CW363
	Extended	White	ZB5CW113
		Green	ZB5CW133
		Red	ZB5CW143
		Yellow	ZB5CW153
		Blue	ZB5CW163
Only use with light modules for a BA9s incandescent bulb, neon or LED			
	Flush	White	ZB5AW31
		Green	ZB5AW33
		Red	ZB5AW34
		Yellow	ZB5AW35
		Blue	ZB5AW36
		Clear	ZB5AW37
	Extended	White	ZB5AW11
		Green	ZB5AW13
		Red	ZB5AW14
		Yellow	ZB5AW15
		Blue	ZB5AW16
		Clear	ZB5AW17

Table 19.89: Illuminated Push-on/Push-off Operators

Shape of Head	Type of Push	Color of Lens	Catalog Number
Only use with Protected LED light modules			
	Flush	White	ZB5AH013
		Green	ZB5AH033
		Red	ZB5AH043
		Yellow	ZB5AH053
		Blue	ZB5AH063
	Extended	White	ZB5AH13
		Green	ZB5AH33
		Red	ZB5AH43
		Yellow	ZB5AH53
		Blue	ZB5AH63

For legends, refer to XB5 Legend Holders, page 19-42.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB5AW7A3741


ZB5AW7A1721

Table 19.90: Two Button with Clear Pilot Light, Momentary

Shape of Head	Description	Marking	Cap Color	Degree of Protection	Catalog Number
No Marking					
Protected LED	Two flush	—	Green Red	IP66 IP69K	ZB5AW7A3740
		—	White Black		ZB5AW7A1720
Protected LED	One flush One extended	—	Green Red		ZB5AW7L3740
Premarked					
Protected LED	Two flush	"I" (white) "O" (white)	Green Red	IP66 IP69K	ZB5AW7A3741
		"I" (black) "O" (white)	White Black		ZB5AW7A1721
Protected LED	One flush One extended	"I" (white) "O" (white)	Green Red		ZB5AW7L3741
Protected LED	Two flush	"↑" (black) "↓" (white)	White Black		ZB5AW7A1724
Protected LED	Two flush	"+" (black) "-" (black)	White White		ZB5AW7A1715
Without caps					
Two flush without caps		—	—	IP66, IP69K	ZB5AW7A9


ZB5AW7•

Table 19.91: Heads for Maintained Illuminated Push Buttons

Shape of Head	Type of Push	Color	Catalog Number
Only use with Protected LED light modules			
	Turn-to-Release Mushroom (40 mm)	White	ZB5AW713
		Green	ZB5AW733
		Red	ZB5AW743
		Yellow	ZB5AW753
		Blue	ZB5AW763


ZB5AT8643M

Table 19.92: Emergency Stop, Trigger Action and Mech Latching Push Button with Mech State Indicator for Elevator Inspection Box Applications—Heads Only

Shape of Head	Type of Reset	Color	Catalog Number
	Push-pull (40 mm)	Red	ZB5AT8643M
NOTE: ZB5AT8643M not to be used with ZBZ16* guard.			


ZB5AK1213


ZB5AK1463

Table 19.93: Illuminated Selector Switches, Standard Lever

Shape of Head	Number and Type of Positions		Catalog Number *[38]*
Only use with Protected LED light modules			
	2-maintained		ZB5AK12•3
	2-momentary from right to left		ZB5AK14•3
	3-maintained		ZB5AK13•3
	3-momentary to center		ZB5AK15•3
	3-momentary from right to center		ZB5AK18•3
	3-momentary from left to center		ZB5AK17•3

Table 19.94: Sequence of Contacts on Selector Switch Bodies

Unit Type		Selector Switches														
		2-position						3-position								
Note: L=Left, C=Center, R=Right, O=Open, X=Closed		315°			45°			315°			0°			45°		
Operator Plunger Position	Up															
	Down															
Contact Block Location		L	C	R	L	C	R	L	C	R	L	C	R	L	C	R
Contacts	N.O.	O	O	O	X	X	X	X	X	O	O	O	O	O	X	X
	N.C.	X	X	X	O	O	O	O	O	X	X	X	X	X	O	O

For legends, see XB5 Legend Holders, page 19-42.

[38] ● Designate color as follows: 1—white, 3—green, 4—red, 5—yellow, 6—blue

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZB5AZ101


ZB5AW0••1


ZB5AW065


ZB5AW035

XB5 Electrical Components

NOTE: For the Quick-Connect version, add the numeral **3** to the end of the number. Example: ZB5AZ101**3** (Quick-Connect size 1 x 0.250" or 2 x 0.110").

Table 19.95: Contact Blocks (Mounting Collar with Contact Blocks) *[39] [40] [41]*

Description	Type of Contact		Catalog Number
	N.O.	N.C.	
Screw clamp terminal connections	1	—	ZB5AZ101
	—	1	ZB5AZ102
	2	—	ZB5AZ103
	—	2	ZB5AZ104
	1	1	ZB5AZ105
	1	2	ZB5AZ141

Table 19.96: Complete Bodies (Mounting Collar + Single Contact Block + Light Module with Protected LED™)

Light Source	Type of Contact *[42]*		Color	Supply Voltage *[43]*	
	N.O.	N.C.		24 Vac/Vdc	110–120 Vac
				Catalog Number	
Screw clamp terminal connections					
Protected LED	1	—	White	ZB5AW0B11	ZB5AW0G11
			Green	ZB5AW0B31	ZB5AW0G31
			Red	ZB5AW0B41	ZB5AW0G41
			Yellow	ZB5AW0B51	ZB5AW0G51
			Blue	ZB5AW0B61	ZB5AW0G61
	—	1	White	ZB5AW0B12	ZB5AW0G12
			Green	ZB5AW0B32	ZB5AW0G32
			Red	ZB5AW0B42	ZB5AW0G42
			Yellow	ZB5AW0B52	ZB5AW0G52
			Blue	ZB5AW0B62	ZB5AW0G62
	2	—	White	ZB5AW0B13	ZB5AW0G13
			Green	ZB5AW0B33	ZB5AW0G33
			Red	ZB5AW0B43	ZB5AW0G43
			Yellow	ZB5AW0B53	ZB5AW0G53
			Blue	ZB5AW0B63	ZB5AW0G63
	1	1	White	ZB5AW0B15	ZB5AW0G15
			Green	ZB5AW0B35	ZB5AW0G35
			Red	ZB5AW0B45	ZB5AW0G45
			Yellow	ZB5AW0B55	ZB5AW0G55
			Blue	ZB5AW0B65	ZB5AW0G65

Table 19.97: Mounting Collar, Contact Block and Light Module (with screw clamp terminal connections)

Supply	Light Source	Supply Voltage	Type of Contact *[42]*		Color of Light Source	Catalog Number
			N.O.	N.C.		
Screw clamp terminal connections						
Direct supply	BA9s 2.4 W max. bulb Not included	< 250 Vac/ Vdc	1	—	—	ZB5AW061
			—	1	—	ZB5AW062
			2	—	—	ZB5AW063
			1	1	—	ZB5AW065
Transformer type 1.2 VA, 6 V secondary	BA9s incandescent bulb included	110–120 Vac 50/60 Hz	1	—	—	ZB5AW031
			1	1	—	ZB5AW035
		230–240 Vac 50/60 Hz	1	—	—	ZB5AW041
			1	1	—	ZB5AW045

[39] For Ring Tongue compatible blocks add "9" to the end of the catalog number (Example: ZB5AZ1029).
[40] Electrical components with connection by printed circuit board pins are available. Refer to Catalog9001CT0001 for more information.
[41] Electrical components with connection by plug-in connector are available. Refer to Catalog 9001CT0001 for more information.
[42] Can be fitted with additional contact blocks, see Table 19.99 Add-On Contact Blocks, page 19-40.
[43] For 240V LED, replace the "B" or "G" with "M". (Example: change "ZB5AW0**B**11 (24 V) to ZB5AW0**M**11 (240 V))

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB5AZ009

Table 19.98: Body/Mounting Collar

For use with	Catalog Number
Electrical block (contact or light module)	ZB5AZ009



ZBE101



ZBE203

Table 19.99: Add-On Contact Block (with screw clamp terminal connections) *[44][45]*

Description		Type of Contact		Catalog Number
		N.O.	N.C.	
Standard **single** contact blocks *[46][47]*		1	—	ZBE101
		—	1	ZBE102
Standard **double** contact blocks *[46][47]*		2	—	ZBE203
		—	2	ZBE204
		1	1	ZBE205
Special contact blocks for low-power switching *[48]*		1	—	ZBE1016
		—	1	ZBE1026
Low-power switching	Dusty environment *[48]* (IP5X, 50 µm dust)	1	—	ZBE1016P
		—	1	ZBE1026P
Staggered contacts	Early make N.O.	1	–	ZBE201
	Late break N.C.	—	1	ZBE202
	Overlapping N.O. + N.C.	1	1	ZB4BZ106
	Staggered N.O. + N.O.	—	2	ZB4BZ107



ZBVB•

Table 19.100: Light Modules (with screw clamp terminal connections) *[44][45]*

Description	Supply Voltage	Color of Light Source	Catalog Number
Protected LED™	12 Vac/Vdc	White	ZBVJ1
		Green	ZBVJ3
		Red	ZBVJ4
		Yellow	ZBVJ5
		Blue	ZBVJ6
	24 Vac/Vdc	White	ZBVB1
		Green	ZBVB3
		Red	ZBVB4
		Yellow	ZBVB5
		Blue	ZBVB6
	110–120 Vac	White	ZBVG1
		Green	ZBVG3
		Red	ZBVG4
		Yellow	ZBVG5
		Blue	ZBVG6
	24–120 Vac/Vdc	White	ZBVBG1
		Green	ZBVBG3
		Red	ZBVBG4
		Yellow	ZBVBG5
		Blue	ZBVBG6
	230–240 Vac	White	ZBVM1
		Green	ZBVM3
		Red	ZBVM4
		Yellow	ZBVM5
		Blue	ZBVM6
Direct supply for BA9s (2.4 W max. bulb not included)	< 250 Vac/Vdc	—	ZBV6

[44] Electrical components with connection by printed circuit board pins are available. Refer to Catalog 9001CT0001 for more details.
[45] Electrical components with connection by plug-in connector are available. Refer to Catalog 9001CT0001 for more details.
[46] For Quick-Connect version add “3” to the end of the catalog number (Example: ZBE1013) (Quick-Connect size 1 x 0.250 in. or 2 x 0.110 in.).
[47] For Ring Tongue compatible blocks add “9” to the end of the catalog number (Example: ZBE1029).
[48] Cannot stack additional contact blocks onto these blocks.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZB5AZ009



ZB4BZ1015

Table 19.101: Body/Mounting Collar

For use with	Catalog Number
Contact block or light module	ZB5AZ009

Table 19.102: Light Modules *[49]*

Spring Terminal Connections			
Description	**Supply voltage**	**Color of light source**	**Catalog Number**
Integral LED (to combine with heads for integral LED) Protected LED	12 Vac/Vdc	White	ZBVJ15
		Green	ZBVJ35
		Red	ZBVJ45
		Orange	ZBVJ55
		Blue	ZBVJ65
	24 Vac/Vdc	White	ZBVB15
		Green	ZBVB35
		Red	ZBVB45
		Orange	ZBVB55
		Blue	ZBVB65
	110–120 Vac	White	ZBVG15
		Green	ZBVG35
		Red	ZBVG45
		Orange	ZBVG55
		Blue	ZBVG65
	230–240 Vac	White	ZBVM15
		Green	ZBVM35
		Red	ZBVM45
		Orange	ZBVM55
		Blue	ZBVM65

[49] Additional blocks **cannot** be attached to the back of these contact blocks or light modules. However, spring terminal contact blocks can be mounted behind screw terminal contact blocks.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

XB5 Legend Holders


ZBZ32


ZBY•101



ZBY2303

Table 19.103: Standard (30 x 40 mm) Legend Holders for 8 x 27 mm Legends

Description	Legend		Catalog Number
	Color	Text	
Without legend	—	—	ZBZ32
With blank legend (for engraving)	Black or red background	—	ZBY2101
	White or yellow background	—	ZBY4101
Custom Legend (Specify Engraving) 2 lines of 11 characters (including spaces) maximum per line	Black background	White	ZBY2002
	Red background	White	ZBY2004
	White background	Black	ZBY4001
	Yellow background	Black	ZBY4005
With legend marked with international language	Black or red background *[50]*	O (black background)	ZBY2146
		O (red background)	ZBY2931
		I	ZBY2147
		II	ZBY2148
		O-I	ZBY2178
		I-II	ZBY2179
		I-O-II	ZBY2186
With legend marked with English language	Black or red background *[50]*	AUTO	ZBY2115
		AUTO-HAND	ZBY2364
		AUTO-O-HAND	ZBY2385
		CLOSE	ZBY2314
		DOWN	ZBY2308
		EMERGENCY STOP	ZBY2330
		FAST	ZBY2328
		FORWARD	ZBY2305
		FOR-REV	ZBY2371
		HAND	ZBY2316
		HAND-OFF-AUTO	ZBY2387
		INCH	ZBY2321
		JOG	ZBY2382
		LEFT	ZBY2310
		OFF	ZBY2312
		OFF-ON	ZBY2367
		ON	ZBY2311
		OPEN	ZBY2313
		POWER ON	ZBY2326
		RESET (red background)	ZBY2323
		RESET (black background)	ZBY2322
		REVERSE	ZBY2306
		RIGHT	ZBY2309
		RUN	ZBY2334
		SLOW	ZBY2327
		START	ZBY2303
		STOP	ZBY2304
		STOP-START	ZBY2366
		UP	ZBY2307

[50] Start functions: white letters on black background. Stop functions: white letters on red background (unless otherwise specified above).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB5RFA02



ZBRT1

XB5R Plastic and XB4R Metal Wireless, Batteryless Push Buttons

Table 19.104: Ready-to-use Packs *[51]*

Description	Transmitter Type	Voltage Receiver V	Receiver Type	Catalog Number
Packs include: - 1 push button/ transmitter - 1 receiver The push button and receiver are factory-paired *[52]*	Ø 22 mm plastic head + 1 set of 10 different colored caps	⏦/⎓ 24 to 240	Programmable receiver with: - 2 relay outputs type RT 3A*[53]*	XB5RFA02
	Ø 22 mm metallic head + 1 set of 10 different colored caps			XB4RFA02
	Ø 22 mm plastic head	⎓ 24	Non-programmable receiver with: - 1 relay output type RT 3A*[54]*	XB5RFB01
	Ø 22 mm metallic head			XB4RFB01
Packs include: - 1 push button/ transmitter in handy box *[55]* - 1 receiver The push button and receiver are factory-paired *[52]*	Ø 22 mm plastic head + 1 set of 10 different colored caps	⏦/⎓ 24 to 240	Programmable receiver with: - 2 relay outputs type RT 3A*[53]*	XB5RMA04
	Ø 22 mm metallic head + 1 operator head	⎓ 24	Non-programmable receiver with: - 1 relay output type RT 3A*[54]*	XB5RMB03

Table 19.105: Transmitter Components for Wireless, Batteryless Push Buttons

Description	Type of Push	Cap Color	Catalog Number
Transmitter for wireless, batteryless push buttons *[56]* *[57]*	1 radio frame sent at the push of the button	—	ZBRT1
	Dual Action: 1 radio frame sent at the push of the button 1 radio frame sent at therelease of the button	—	ZBRT2
Wireless, batteryless push buttons including: - a transmitter fitted with mounting collar - a spring return push button head with clipped-in cap *[58]*	Plastic	White	ZB5RTA1
		Black	ZB5RTA2
		Green	ZB5RTA3
		Green with white “I”	ZB5RTA331
		Red	ZB5RTA4
		Red with white “O”	ZB5RTA432
		Yellow	ZB5RTA5
		Blue	ZB5RTA6
	Metal	White	ZB4RTA1
		Black	ZB4RTA2
		Green	ZB4RTA3
		Red	ZB4RTA4
		Yellow	ZB4RTA5

[51] Wireless and batteryless push button and receiver, factory-paired.
[52] For additional components, these devices can be field-paired.
[53] Supplied with output function set to momentary. Outputs programmable to maintained and Start-Stop.
[54] Non-programmable momentary output function.
[55] Supplied with a magnet.
[56] Mounting collar ZB5AZ009 (plastic) or ZB4BZ009 (metal) to be ordered separately.
[57] Only heads ZB4RZA0 and ZB5RZA0 are mechanically compatible.
[58] This cap is fitted by Schneider Electric and cannot be removed (risk of damage).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZBRRA

Table 19.106: Programmable Receivers

Description	Output Type	Voltage Receiver V	Catalog Number
Programmable receivers equipped with: - 2 buttons (“Scroll-through”, “Ok”) - 6 indicating LEDs (power ON, outputs, signal strength)	4 PNP outputs, 200 mA / 24 V	⎓ 24	ZBRRC
	2 relay outputs type RT 3A *[59]*	∿/⎓ 24 to 240	ZBRRD
	2 relay outputs type RT 3A *[59]*	∿/⎓ 24 to 240	ZBRRA

NOTE: Also refer to Access Point for advanced features in programmable receivers.



ZBRM22



ZBRACS



XALD02H7

Table 19.107: Boxes for Wireless, Batteryless Push Buttons

Description	For use with:	Marking	Sold in lots of	Catalog Number
Mobile box, plastic, empty *[60]*	For mobile and fixed applications with wireless and batteryless push buttons	1 cut-out	1	ZBRM21
		2 cut-outs	1	ZBRM22
	Support for tube or wall specific for ZBRM21 and ZBRM22	—	1	ZBRACS
Empty plastic boxes for wireless and batteryless push buttons *[61]*	For fixed or on-board wireless and batteryless push buttons	1 cut-out	1	XALD01H7
		2 cut-outs	1	XALD02H7

New!

XB5R and XB4R Accessories

Table 19.108: Accessories

Description	For use with:	Marking	Sold in lots of	Catalog Number
External antenna *[62]*	Between transmitter and receiver, used to increase the range and/or get around obstacles	∿/⎓ 24 to 240 V - 5m cable - 1 power-ON LED - 2 LEDs reception/transmission	1	ZBRA1
Mounting collar	–	Plastic	10	ZB5AZ009
		Metal	10	ZB4BZ009
External antenna access point 2 m/6.56 ft cable with 1 RF connector	Access point (ZBRN1 or ZBRN2) Used to increase the distance of transmission			ZBRA2
NOTE: The ZBRN2 has embedded communication port for Modbus Serial Line, where as ZBRN1 must be plugged with a communication module to support different protocols.				



ZBRA1



ZBRA2


New!

ZBRN1 and ZBRN2 Access Points

The access point of Harmony® wireless and batteryless range provides network connectivity openness by operating as an intermediate equipment between the transmitter and the PLC (Programmable Logic Controller). The access point receives radio signals from the transmitters and converts them to communication protocols. Based on the model, it is connected to the PLC using either RS485 Modbus™ Serial line or Modbus/TCP protocol.

The access point can be used with transmitters such as XB4R and XB5R wireless and batteryless push buttons, rope pull switch, mushroom head push button (1), and all PLCs that support Modbus Serial line over RS485 or Modbus/TCP protocols.

Depending on the application, an external or a relay antenna can be used to improve signal reception. An access point can support up to 60 radio transmitters

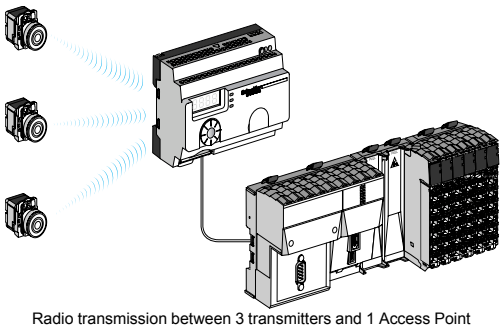

Radio transmission between 3 transmitters and 1 Access Point

[59] Supplied with output function set to momentary Outputs programmable to maintained and Start-Stop.
[60] Cannot be used for wired contacts (no cable gland outlet).
[61] Box equipped with cable gland outlets, compatible with Harmony ZB5 push button heads.
[62] Not wired to the receiver.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



ZBRN2



ZBRN1



ZBRCETH

Table 19.109: Configurable Access Points

Description	Data Function	Output Type	Receiver Voltage (V)	Catalog Number
Configurable access points equipped with: - 7-segment display - jog dial - 8 indicating LEDs (power ON, functions mode, communication status, signal strength) - external antenna connector and protective plug	Monostable (adjustable from 100 ms to 1 s)	2 RS485 connectors that provides connectivity for Modbus RS485 Serial line	~/⎓ 24 to 240	ZBRN2
	Monostable (adjustable from 100 ms to 1 s)	1 slot for communication module ZBRCETH (should be ordered separately)	~/⎓ 24 to 240	ZBRN1

Table 19.110: Communication Module

Description	Characteristics	Communication Port	Catalog Number
Modbus/TCP network communication module	Modbus/TCP protocol with embedded Web pages in 5 languages for configuration, monitoring and diagnostics	2 RJ45 connectors that provides connectivity for daisy chain and daisy chain loop operation	ZBRCETH

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB7NA31



XB7NL4●



XB7NH2●



XB7NA3133



XB7NA4234



XB7NL4232

New!

XB7 Push Buttons

Table 19.111: Push Buttons Without Marking

Shape of Head	Type of Push Button	Type of Contact		Marking		Color of Push Button	Sold in Lots of	Catalog Number
		N.O.	N.C.	Text	Color			
Spring return push button without marking								
	Flush	1	—	—	—	White	10	XB7NA11
		1	—	—	—	Black	10	XB7NA21
		1	—	—	—	Green	10	XB7NA31
		1	—	—	—	Yellow	10	XB7NA81
		1	1	—	—	White	10	XB7NA15
		1	1	—	—	Black	10	XB7NA25
		1	1	—	—	Green	10	XB7NA35
		1	1	—	—	Red	10	XB7NA45
		1	1	—	—	Blue	10	XB7NA65
		—	1	—	—	Red	10	XB7NA42
		2	—	—	—	Black	10	XB7NA23
		2	—	—	—	Green	10	XB7NA33
	Projecting	—	1	—	—	Red	10	XB7NL42
		1	1	—	—	Red	10	XB7NL45
Latching push button without marking								
	Flush	1	—	—	—	Black	10	XB7NH21
		1	—	—	—	Green	10	XB7NH31
		1	1	—	—	Black	10	XB7NH25
		1	1	—	—	Green	10	XB7NH35

Table 19.112: Push Buttons With Marking

Shape of Head	Type of Push Button	Type of Contact		Marking		Color of Push Button	Sold in Lots of	Catalog Number
		N.O.	N.C.	Text	Color			
Spring return push button with marking								
	Flush	1	–	I	White	Green	10	XB7NA3131
		1	–	START	White	Green	10	XB7NA3133
		1	–	⇑	Black	White	10	XB7NA11341
		1	–	⇩	White	Black	10	XB7NA21343
		1	–	⇧	White	Black	10	XB7NA21341
		–	1	STOP	White	Red	10	XB7NA4234
		1	1	STOP	White	Red	10	XB7NA4534
		1	1	⇑	Black	White	10	XB7NA15341
		1	1	O	White	Red	10	XB7NL4532

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB7NW33●1

New! XB7 Illuminated Push Buttons with Projecting Push

Table 19.113: With Integral LED

Shape of head	Type of push and contacts	Color of lens	Sold in lots of	Unit reference by supply voltage *[63]*		
				24 V ∿/⎓	120 V ∿	230 V ∿
	Spring return push with N.O. and N.C. contacts *[63]*	Green	10	XB7NW33B1	—	XB7NW33M1
		Red	10	XB7NW34B1	XB7NW34G1	XB7NW34M1
			10	XB7NW34B2	—	XB7NW34M2
		Orange	10	XB7NW35B1	—	—
		Blue	10	XB7NW36B1	—	—
		Clear	10	XB7NW37B1	—	—
		Yellow	10	XB7NW38B1	—	—
	Latching push	Green	10	XB7NJ03B1	—	XB7NJ03M1
		Red	10	XB7NJ04B1	—	XB7NJ04M1



XB7EV08●P

New! XB7 Pilot Lights

Table 19.114: With Integral LED

Shape of head	Type of light source (included)	Color of lens	Sold in lots of	Catalog Number by supply voltage *[64]*		
				24 V ∿/⎓	120 V ∿	230 V ∿
	Integral LED	Green	10	XB7EV03BP	XB7EV03GP	XB7EV03MP
		Red	10	XB7EV04BP	XB7EV04GP	XB7EV04MP
		Yellow	10	XB7EV05BP	XB7EV05GP	XB7EV05MP
		Blue	10	XB7EV06BP	XB7EV06GP	XB7EV06MP
		Clear	10	XB7EV07BP	XB7EV07GP	XB7EV07MP
		Orange	10	XB7EV08BP	XB7EV08GP	XB7EV08MP



XB7EV75P

Table 19.115: With BA 9s base fitting

Shape of head	Supply	Color of lens	Sold in lots of	Catalog Number*[64]*	
				With bulb	Without bulb
	With resistor, for 130 V, 2.6 W bulb Supply voltage: 230 V ∿, 50-60 Hz	Green	10	XB7EV73P	—
		Red	10	XB7EV74P	—
		Yellow	10	XB7EV75P	—
		Orange	10	XB7EV78P	—
	Direct for BA 9s base fitting incandescent bulb Supply voltage: ≤ 250 V *[65]*	Green	10	–	XB7EV63P
		Red	10	–	XB7EV64P
		Yellow	10	–	XB7EV65P
		Clear	10	–	XB7EV67P
		Orange	10	–	XB7EV68P

[63] All product references ending in "1" are for products with "NO" contacts (example: XB7NW34B1). All product references ending in "2" are for products with "NC" contacts (example: XB7NW34B2).
[64] For Faston connection version (1 x 6.35 mm and 2 x 2.8 mm), add the number “3” to the end of the reference. Example: XB7EV07BP becomes XB7EV07BP3.
[65] Bulb characteristics for direct supply pilot lights: 250 V, 2.6 W.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XB7ND2●



XB7NG33

New! XB7 Selector Switches and Key Switches

Table 19.116: Title

Shape of head	Type of operator	Type of contact N.O.	Type of contact N.C.	Number and type of positions		Sold in lots of	Catalog Number
	Standard handle, black	1	—	2, maintained		10	XB7ND21
		1	1	2, maintained		10	XB7ND25
		2	—	3, maintained		10	XB7ND33
	Key (key No. 455)	1	—	2, key withdrawal in LH position		10	XB7NG21
		2	—	3, key withdrawal in center position		10	XB7NG33

NOTE: The symbol ⚷ indicates key withdrawal position(s).



XB7NS84●


New! XB7 Mushroom Head Push Buttons

Table 19.117: Ø 40 mm Emergency Stop Trigger Action and Mechanically Latching Mushroom Head Pushbuttons

Shape of head	Type of push	Standards	Type of contact N.O.	Type of contact N.C.	Color	Sold in lots of	Catalog Numbers
	Turn to release	EN/IEC 60204-1, EN/ISO 13850, EN/IEC 60947-5-5, Machinery directive 2006/42/EC and UL	–	1	Red	10	XB7NS8442
			1	1	Red	10	XB7NS8445
			–	2	Red	10	XB7NS8444
	Push-pull		–	1	Red	10	XB7NT842
			1	1	Red	10	XB7NT845
			–	2	Red	10	XB7NT844
	Key release (n° 455)		–	2	Red	10	XB7NS9444
			–	1	Red	10	XB7NS9445

Table 19.118: Circular Legends, Yellow, For Mushroom Head Push Buttons

Used for "Emergency Stop" function *[66]*			
Conforming to Standards	**Diameter (mm)**	**Marking on Yellow Background**	**Catalog Number**
EN/IEC 60204-1 and EN/ISO 13850 *[66]*	60	ARRET D'URGENCE	ZBY9130
		NOT-HALT	ZBY9230
		PARADA DE EMERGENCIA	ZBY9430
		ARRESTO DE EMERGENZA	ZBY9630
	90	ARRET D'URGENCE	ZBY8130
		EMERGENCY STOP	ZBY8330
		PARADA DE EMERGENCIA	ZBY8430
		ARRESTO DE EMERGENZA	ZBY8630



ZBY9330

[66] For compliance with standard EN/ISO 13850, paragraph 4.4.6, the Emergency stop logo has been added.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type K Heavy Duty Operators

Table 19.119: Non-Illuminated Momentary Push Button Operators

Description		Color	Operator with 1 N.O. and 1 N.C. Contact (KA1) *[1]*	Operator with 1 N.O. Contact (KA2) *[1]*	Operator with 1 N.C. Contact (KA3) *[1]*	Operator Only with No Contacts *[1]*
 9001KR1B	Full Guard	Black	KR1BH13	KR1BH5	KR1BH6	KR1B
		Red	KR1RH13	KR1RH5	KR1RH6	KR1R
		Green	KR1GH13	KR1GH5	KR1GH6	KR1G
		Universal *[2]*	KR1UH13	KR1UH5	KR1UH6	KR1U
		Other *[3]*	KR1■H13	KR1■H5	KR1■H6	KR1■
 9001KR3B	No Guard	Black	KR3BH13	KR3BH5	KR3BH6	KR3B
		Red	KR3RH13	KR3RH5	KR3RH6	KR3R
		Green	KR3GH13	KR3GH5	KR3GH6	KR3G
		Universal *[2]*	KR3UH13	KR3UH5	KR3UH6	KR3U
		Other *[3]*	KR3■H13	KR3■H5	KR3■H6	KR3■
 9001KR2B	Extended Guard	Black	KR2BH13	KR2BH5	KR2BH6	KR2B
		Red	KR2RH13	KR2RH5	KR2RH6	KR2R
		Green	KR2GH13	KR2GH5	KR2GH6	KR2G
		Universal *[2]*	KR2UH13	KR2UH5	KR2UH6	KR2U
		Other*[3]*	KR2■H13	KR2■H5	KR2■H6	KR2■
 9001KR4B	1-3/8 in. (35 mm) Diameter Mushroom Button	**Snap-In Plastic Mushroom Button**				
		Black	KR4BH13	KR4BH5	KR4BH6	KR4B
		Red	KR4RH13	KR4RH5	KR4RH6	KR4R
		Red *[4]*	KR4R05H13	KR4R05H5	KR4R05H6	KR4R05
		Green	KR4GH13	KR4GH5	KR4GH6	KR4G
		Other *[3]*	KR4■H13	KR4■H5	KR4■H6	KR4■
		Screw-On Mushroom Button with Set Screw Security, Plastic Head				
		Black	KR24BH13	KR24BH5	KR24BH6	KR24B
		Red	KR24RH13	KR24RH5	KR24RH6	KR24R
		Green	KR24GH13	KR24GH5	KR24GH6	KR24G
		Other*[3]*	KR24■H13	KR24■H5	KR24■H6	KR24■
 9001KR24BM	1-1/2 in. (40 mm) Diameter Mushroom Button	**Screw-On Metal Mushroom Button with Set Screw Security**				
		Black	—	—	—	9001KR24BM
		Red	—	—	—	9001KR24RM
		Green	—	—	—	9001KR24GM
 9001KR5B	2-1/4 in. (57 mm) Diameter Mushroom Button	**Snap-In Plastic Mushroom Button**				
		Black	KR5BH13	KR5BH5	KR5BH6	KR5B
		Red	KR5RH13	KR5RH5	KR5RH6	KR5R
		Red *[4]*	KR5R05H13 *[4]*	KR5R05H5 *[4]*	KR5R05H6 *[4]*	KR5R05 *[4]*
		Green	KR5GH13	KR5GH5	KR5GH6	KR5G
		Other*[3]*	KR5■H13	KR5■H5	KR5■H6	KR5■
		Screw-On Mushroom Button with Set Screw Security, Plastic Head				
		Black	KR25BH13	KR25BH5	KR25BH6	KR25B
		Red	KR25RH13	KR25RH5	KR25RH6	KR25R
		Green	KR25GH13	KR25GH5	KR25GH6	KR25G
		Other*[3]*	KR25■H13	KR25■H5	KR25■H6	KR25■
 9001KR25BM	2-3/8 in. (60 mm) Diameter Mushroom Button	**Screw-On Metal Mushroom Button with Set Screw Security**				
		Black	—	—	—	9001KR25BM
		Red	—	—	—	9001KR25RM
		Green	—	—	—	9001KR25GM

NOTE: To select contact blocks, light modules, and accessories, see Type KA Contact Blocks, page 19-64.

Table 19.120: Color Codes

Color	KR1, 2, 3 Place Color Code in Type Number	KR4, 5, 24, 25 Place Color Code in Type Number
Blue	L	L
Yellow	Y	Y
White	W	—
Orange	S	S
Gray	E	—

NOTE: For use in hazardous locations—See Square D Offering According to Class, Division, and Group, page 19-66. Contact blocks and legend plate not included unless otherwise noted.

[1] When ordering, add prefix 9001 to the catalog number.
[2] The universal push button operators contain one each of the following color inserts: black, red, green, yellow, orange, blue and white.
[3] ■ Choose color code from Table 19.122 Color Codes for Type K Operators, page 19-50.
[4] Knob has the words “Emergency Stop” in raised letters highlighted in white for readability.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Table 19.121: 30 mm Multifunction Operators

Description *[5]*		Color	With 2 N.C. Contacts (1 KA3, 1 KA5) *[6]*	With 1 N.O. & 1 N.C. Contact (1 KA1) *[6]*	Without Contacts *[6] [7]*
Non-Illuminated Push-Pull Mushroom Operators					
 **KR9R94H13** Set Screw Style	3 Position, Plastic Head 1-5/8 in. (40 mm), Screw-0n Momentary Pull Maintained Neutral Momentary Push *[8]*	Red Green Other *[9]*	KR8RH25 KR8GH25 KR8▼H25	— — —	KR8R KR8G KR8▼
	2 Position, Plastic Head 1-5/8 in. (40 mm), Screw-0n Maintained Pull Maintained Push *[10]*	Red *[11]* Green Other *[9]*	— — —	KR9RH13 KR9GH13 KR9▼H13	KR9R KR9G KR9▼
	2 Position , Plastic Head 1-5/8 in. (40 mm), Screw-0n Head with Set Screw Maintained Pull Maintained Push *[10]*	Red	—	KR9R94H13	KR9R94
 9001KR9RM94	2 Position, Metal Head 1-1/2 in. (40 mm) Diameter Maintained Pull Maintained Push	Black	—	—	9001KR9BM94
		Red	—		9001KR9RM94
		Green	—		9001KR9GM94
 9001KR9RM95	2 Position, Metal Head 2-3/8 in. (60 mm) Diameter Maintained Pull Maintained Push	Black	—	—	9001KR9BM95
		Red	—		9001KR9RM95
		Green	—		9001KR9GM95
Description		**Color**	**With 1 N.O. & 1 N.C. Contact (KA1)**	**With 2 N.O. & 2 N.C. Contacts (KA2)**	**Without Contacts**
Non-Illuminated Turn-to-Release Mushroom Operators					
 **9001KR16H2** Trigger Action	2 Position, Plastic Head Turn-to-Release Trigger Action	Red	KR16H13	KR16H2	KR16



9001KR9P1
1.625 in. Diameter Knob
For 1-3/8 in. or 2-1/4 in. Diameter Knob *[5]*
Includes Type KN379
Legend Plate Marked
Pull To Start, Push To Stop

Screw-On Plastic Illuminated Push-Pull Mushroom Operators *[6] [12] [9]*				
Description *[5]*	Voltage	With Red Knob and 2 N.C. Contacts (1 KA3, 1 KA5)	With Other Color Knob and 2 N.C. Contacts (1 KA3, 1 KA5)	With Other Color Knob Without Contacts *[7]*
3 Position Illuminated Momentary Pull Maintained Neutral Momentary Push*[8]*	110-120 V, 50-60 Hz Other—Transformer, LED, Flashing *[13]* Other—Full Voltage, Resistor, Neon *[14]*	KR8P1RH25 KR8P▲RH25 KR8P▲RH25	KR8P1▼H25 KR8P▲▼H25 KR8P▲▼H25	KR8P1▼ KR8P▲▼ KR8P▲▼
Description *[5]*	Voltage	With Red*[11]* Knob & 1 N.O. & 1 N.C. Contact (KA1)	With Other Color Knob and 1 N.O. & 1 N.C. Contact (KA1)	With Other Color Knob Without Contacts
2 Position Illuminated Maintained Pull Maintained Push	110–120 V, 50–60 Hz Other—Transformer, LED, Flashing *[13]* Other—Full Voltage, Resistor, Neon *[14]*	KR9P1RH13 KR9P▲RH13 KR9P▲RH13	KR9P1▼H13 KR9P▲▼H13 KR9P▲▼H13	KR9P1▼ KR9P▲▼ KR9P▲▼

Table 19.122: Color Codes for 30 mm Multifunction Operators ▼

Color	KR8, KR9
Black *[15]*	B
Red	R
Green	G
Blue	L
Yellow	Y
White	W
Orange *[15]*	S
Clear	C
Amber	A
Gray	—

Table 19.123: Contact Sequences

9001 KR8RH1 or H13				
		Pull	**Ctr**	**Push**
(KA1)	KA3	X	O	O
	KA2	O	O	X
9001 KR8RH25				
KA3		X	O	O
KA5		X	O	O

NOTE: To select contact blocks, light modules, and accessories, see Type KA Contact Blocks, page 19-64.

[5] For 1-3/8 in. or 2-1/4 in. Dia. Knob:
a) Order Type -20 or -21 knob.
b) Order 9001K54 adapter—allows Type -20 or -21 knob to fit on push pull operators. Voids UL and NEMA 6 rating.
c) Can order assembled operator by adding color code to Type -20 or -21. **Example: 9001KR9R** would be **9001KR9R20** or **9001KR9R21**.
[6] When ordering, add prefix 9001 to the catalog number.
[7] These operators can be ordered complete with contact blocks. For maximum block usage, see Table 19.173 "H" Codes, page 19-67. Add the chosen "H" number to the end of the operator.
[8] For contact sequences, see Table 19.123 Contact Sequences, page 19-50
[9] ▼ Choose one color from the Color Codes table here, and insert the color code in Type number. **Example: KR9** with a yellow knob = **KR9Y**
[10] For color codes, see Color Codes for 30 mm Multifunction Operators, page 19-50.
[11] To obtain a red knob with "Push Emergency Stop" printed on the red knob—substitute "R05" in place of "R"
[12] ▲ Add the voltage assembly code as chosen from Table 19.167 Standard Light Modules for Types K, SK, and KX Control Units, page 19-65. **Example: KR8P** with a 277 V 50–60 Hz voltage = **KR8P8**.
[13] The knob must be the same color as the LED light module chosen, for example, for a green LED, use a green knob.
[14] On neon light modules, use clear knobs only.
[15] These colors are not available on illuminated push-pull operators.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Table 19.124: Illuminated Momentary Push Button Operators

Description		Voltage and Frequency	Style	With Red Color Cap and 1 N.O. and 1 N.C. Contact (KA1) *[16]*	With Green Color Cap and 1 N.O. and 1 N.C. Contact (KA1) *[16]*	With Other Color Cap Without Contact Block *[17]* *[18]* *[16]*
 9001K1L1	Full Guard Illuminated Push Button Clear Plastic Top	110–120 V, 50–60 Hz	Transformer	K1L1RH13	K1L1GH13	K1L1▼
		220–240 V, 50–60 Hz	Transformer	K1L7RH13	K1L7GH13	K1L7▼
		24–28 Vac/Vdc	Full Voltage	K1L35RH13	K1L35GH13	K1L35▼
		For other voltages *[19]*■	Transformer or Flashing	K1L■RH13	K1L■GH13	K1L■▼
			Full Voltage	K1L■RH13	K1L■GH13	K1L■ *[18]*
			Resistor or Neon *[20]*	K1L■RH13	K1L■GH13	K1L■▼
			LED *[21]*	K1L■RH13	K1L■GH13	K1L■▼
 9001K3L1	Full Guard Illuminated Push Button Metal Top	110–120 V, 50–60 Hz	Transformer	K3L1RH13	K3L1GH13	K3L1▼
		220–240 V, 50–60 Hz	Transformer	K3L7RH13	K3L7GH13	K3L7▼
		24–28 Vac/Vdc	Full Voltage	K3L35RH13	K3L35GH13	K3L35▼
		For other voltages *[19]*■	Transformer or Flashing	K3L■RH13	K3L■GH13	K3L■▼
			Full Voltage	K3L■RH13	K3L■GH13	K3L■ *[18]*
			Resistor or Neon *[20]*	K3L■RH13	K3L■GH13	K3L■▼
			LED *[21]*	K3L■RH13	K3L■GH13	K3L■▼
 9001K2L1	No Guard Illuminated Push Button	110–120 V, 50–60 Hz	Transformer	K2L1RH13	K2L1GH13	K2L1▼
		220–240 V, 50–60 Hz	Transformer	K2L7RH13	K2L7GH13	K2L7▼
		24–28 Vac/Vdc	Full Voltage	K2L35RH13	K2L35GH13	K2L35▼
		For other voltages *[19]*■	Transformer or Flashing	K2L■RH13	K2L■GH13	K2L■ *[18]*
			Full Voltage	K2L■RH13	K2L■GH13	K2L■▼
			Resistor or Neon *[20]*	K2L■RH13	K2L■GH13	K2L■▼
			LED *[21]*	K2L■RH13	K2L■GH13	K2L■▼
 9001K2LR20	1-3/8 in. (35 mm) Illuminated Mushroom, Screw-On Plastic Head	110–120 V, 50–60 Hz	Transformer	K2L1R20H13	K2L1G20H13	Order K2L ■▼ Above *[22]*
		220–240 V, 50–60 Hz	Transformer	K2L7R20H13	K2L7G20H13	
		24–28 Vac/Vdc	Full Voltage	K2L35R20H13	K2L35G20H13	
		For other voltages *[19]*■	Transformer or Flashing	K2L■R20H13	K2L■G20H13	
			Full Voltage	K2L■R20H13	K2L■G20H13	
			Resistor or Neon *[20]*	K2L■R20H13	K2L■G20H13	
			LED *[21]*	K2L■R20H13	K2L■G20H13	
 9001K2LR21	2-1/4 in. (57 mm) Illuminated Mushroom, Screw-On Plastic Head	110–120 V, 50–60 Hz	Transformer	K2L1R21H13	K2L1G21H13	Order K2L■▼ Above *[22]*
		220–240 V, 50–60 Hz	Transformer	K2L7R21H13	K2L7G21H13	
		24–28 Vac/Vdc	Full Voltage	K2L35R21H13	K2L35G21H13	
		For other voltages *[19]*■	Transformer or Flashing	K2L■R21H13	K2L■G21H13	
			Full Voltage	K2L■R21H13	K2L■G21H13	
			Resistor or Neon *[20]*	K2L■R21H13	K2L■G21H13	
			LED *[21]*	K2L■R21H13	K2L■G21H13	

NOTE: To select contact blocks, light modules, and accessories, see Type KA Contact Blocks, page 19-64.

Table 19.125: Color Caps

Color	Color Codes▼		
	K1L, K2L, K3L	1-3/8 in. Mushroom	2-1/4 in. Mushroom
Red	R	R20	R21
Green	G	G20	G21
Blue	L	L20	L21
Yellow	Y	Y20	Y21
White	W	W20	W21
Clear	C	C20	C21
Amber	A	A20	A21


NOTE: UL Types 4, 13/NEMA 4, 13 For use in hazardous locations—See Square D Offering According to Class, Division, and Group, page 19-66. Contact blocks and legend plate not included unless otherwise noted.

[16] When ordering, add prefix 9001 to the catalog number.
[17] These operators can be ordered complete with contact blocks. For maximum block usage, refer to bullets to the right of Table 19.173 "H" Codes, page 19-67. Add the "H" number to the end of the operator type number. Additional "H" numbers are available.
[18] Add the color code as chosen from the color cap table. **Example: K2L25 with a blue 1–3/8 in. mushroom button = K2L25L20**.
[19] ■ Add the voltage assembly code as chosen from Standard and Shallow Depth Light Modules, page 19-65. **Example: K2L** with 240 Vac/Vdc = **K2L25**.
[20] On neon light modules, use clear color caps only.
[21] The cap must be the same color as the LED light module chosen, e.g., for red LED, use red color cap.
[22] The only difference between a no guard (K2L_) operator and mushroom button operator is the color cap.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

9001K 2-Position Selector Switches

Table 19.126: 2-Position Selector Switches

Contact Block Required						1 — Contact Closed 0 — Contact Open			
Contact Block Position	Quantity and Type KA1 or KA2 or KA3			Mount on Side KA1 or KA2 or KA3			Left	Right	Left	Right
 Top View	KA1	or	KA3	KA1 #2	or	KA3 #2	1	0	0	1
			KA2			KA2 #2	0	1	1	0
	KA1	or	KA3	KA1 #1	or	KA3 #1	1	0	0	1
			KA2			KA2 #1	0	1	1	0
For cam, see Type K, KX, and SK Selector Switch Guide, page 19-55.							E		D	


Non-Illuminated Operators	Cat. No. *[23]*	Cat. No. *[23]*
Manual Return *[24]*, Operator Only (without contact blocks)		
Without Knob	KS11	KS12
With Knob (select style and color from Table 19.127 Selector Switch Assembly Codes, page 19-52) *[25]*	KS11♦	KS12♦
Key Operated with E10 Key (Code1,2,3) *[25]*	KS11K♦	KS12K♦
Operator with Contact Blocks and Standard black knob		
With 1 KA1 on Side #2	KS11BH13	—
With 1 KA1 on Side #1	KS11BH1	—
With 1 KA1 on Side #1 and 1 KA1 on side #2	KS11BH2	—
Spring Return from Left *[24]*, **Operator Only (without contact blocks)**		
Without Knob	KS25	—
With Knob (select style and color from Table 19.127 Selector Switch Assembly Codes, page 19-52) *[25]*	KS25♦	—
Key Operated with E10 Key (Code 2 only) *[26]*	KS25K2	—
Spring Return from Right *[24]*, **Operator Only (without contact blocks)**		
Without Knob	—	KS34
With Knob (select style and color from Table 19.127 Selector Switch Assembly Codes, page 19-52) *[25]*	—	KS34♦
Key Operated with E10 Key (Code 1 only)	—	KS34K1

Illuminated Operators	Cat. No. *[23]*	Cat. No. *[23]*
Manual Return *[24]*, **Operator Only (without contact blocks)**		
Without Knob, 110-120V 50-60 Hz Transformer	K11J1	K12J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	K11J1R	K12J1R
With Other Color Knob and other voltage Light Module *[27]*. *[25]*	K11J■♦	K12J■♦
Spring Return from Left *[24]*, **Operator Only (without contact blocks)**		
Without Knob, 110-120V 50-60 Hz Transformer	K25J1	—
With Standard Red Knob, 110-120V 50-60 Hz Transformer	K25J1R	—
With Other Color Knob and other voltage Light Module *[27]*. *[25]*	K25J■♦	—
Spring Return from Right *[24]*, **Operator Only (without contact blocks)**		
Without Knob, 110-120V 50-60 Hz Transformer	—	K34J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	—	K34J1R
With Other Color Knob and other voltage Light Module *[27]*. *[25]*	—	K34J■♦

Table 19.127: Selector Switch Assembly Code and Knob Cat. No.

Color	Standard Knob		Gloved Hand Knob	
	♦ Knob Code	Cat. No. *[23]*	♦ Knob Code	Cat. No. *[23]*
Black	B	B11	FB	B25
Red	R	R8	FR	R24
Green	G	G8	FG	G24
Yellow	Y	Y8	FY	Y24
Blue	L	L8	FL	L24
White	W	W8	FW	W24
Amber	A	A8	FA	A24
Clear	C	C8	FC	C24

Table 19.128: Key Withdrawl Codes



2 Position

Code	Position
1	Left Only
2	Right Only
3	Left and Right

NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.

[23] When ordering, add prefix 9001 to the catalog number.
[24] These operators can be ordered complete with contact blocks. Add the "H code" from Table 19.173 "H" Codes, page 19-67 as needed for your application.
[25] ♦ Add the knob color code from Table 19.127 Selector Switch Assembly Codes, page 19-52
[26] Add the key withdrawal code from Table 19.128 Key Withdrawl Codes , page 19-52
[27] ■ Add the voltage assembly code as chosen from Standard and Shallow Depth Light Modules, page 19-65. Example: K25J■ with 208Vac = K25J3

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

9001K 3-Position Selector Switches

Table 19.129: 3-Position Selector Switches



Contact Block Required						1 - Contact Closed 0- Contact Open								
Contact Block Position	Quantity and Type			Mount on Side		Left Right	Left Right	Left Right	Left Right	Left Right	Left Right	Left Right	Left Right	Left Right
 **Top View**	KA1	or	KA3	KA1 #2	or	KA3 #2	1 0 0	1 0 0	0 0 1	1 0 0	1 0 0	1 0 0	1 0 0	0 1 0	1 1 0
			KA2			KA2 #2	0 1 1	0 0 1	0 1 0	0 1 0	0 0 1	0 1 1	0 1 1	1 0 0	0 0 1
	KA1	or	KA3	KA1 #1	or	KA3 #1	0 0 1	1 0 0	0 0 1	1 0 0	0 1 0	0 0 1	1 0 1	0 0 1	0 1 1
			KA2			KA2 #1	1 1 0	0 0 1	0 1 0	0 1 0	0 0 1	1 0 0	0 1 0	0 1 0	1 0 0
For cam, see Type K, KX, and SK Selector Switch Guide, page 19-55.							B	C	D	E	F	G	J	L	M
Non-Illuminated Operators							Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Manual Return, Operator Only (without contact blocks) *[29]*															
Without Knob							KS42	KS43	KS44	KS45	KS46	KS47	KS49	KS401	KS402
With Knob ♦*[30]*							KS42♦	KS43♦	KS44♦	KS45♦	KS46♦	KS47♦	KS49♦	KS401♦	KS402♦
Key Operated with E10 Key (Code 4 through 10) ▼*[31]*							KS42K▼	KS43K▼	KS44K▼	KS45K▼	KS46K▼	KS47K▼	KS49K▼	KS401K▼	KS402K▼
Operator with Contact Blocks and Standard black knob *[32]*															
With 1 KA1 on Side #2 (H13)							KS42B-H13	KS43B-H13	KS44B-H13	KS45BH13	KS46BH13	KS47BH13	KS49BH13	KS401B-H13	KS402B-H13
With 1 KA1 on Side #1 (H1)							KS42BH1	KS43BH1	KS44BH1	KS45BH1	KS46BH1	KS47BH1	KS49BH1	KS401BH1	KS402BH1
With 1 KA1 on Side #1 and 1 KA1 on side #2 (H2)							KS42BH2	KS43BH2	KS44BH2	KS45BH2	KS46BH2	KS47BH2	KS49BH2	KS401BH2	KS402BH2
Spring Return from Left to Center, Operator Only (without contact blocks) *[29]*															
Without Knob							KS62	KS63	KS64	KS65	KS66	KS67	KS69	KS601	KS602
With Knob ♦*[30]*							KS62♦	KS63♦	KS64♦	KS65♦	KS66♦	KS67♦	KS69♦	KS601♦	KS602♦
Key Operated with E10 Key (Code 5, 6 or 9 only) ▼*[31]*							KS62K▼	KS63K▼	KS64K▼	KS65K▼	KS66K▼	KS67K▼	KS69K▼	KS601K▼	KS602K▼
Spring Return from Right to Center, Operator Only (without contact blocks) *[29]*															
Without Knob							KS72	KS73	KS74	KS75	KS76	KS77	KS79	KS701	KS702
With Knob ♦*[30]*							KS72♦	KS73♦	KS74♦	KS75♦	KS76♦	KS77♦	KS79♦	KS701♦	KS702♦
Key Operated with E10 Key (Code 4, 5 or 7 only) ▼*[31]*							KS72K▼	KS73K▼	KS74K▼	KS75K▼	KS76K▼	KS77K▼	KS79K▼	KS701K▼	KS702K▼
Spring Return from Both Sides to Center, Operator Only (without contact blocks) *[29]*															
Without Knob							KS52	KS53	KS54	KS55	KS56	KS57	KS59	KS501	KS502
With Knob ♦*[30]*							KS52♦	KS53♦	KS54♦	KS55♦	KS56♦	KS57♦	KS59♦	KS501♦	KS502♦
Key Operated with E10 Key (Code 4, 5 or 7 only) ▼*[31]*							KS52K▼	KS53K▼	KS54K▼	KS55K▼	KS56K▼	KS57K▼	KS59K▼	KS501K▼	KS502K▼
Illuminated Operators							Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Manual Return, Operator Only (without contact blocks) *[29]*															
Without Knob, 110-120V 50-60 Hz Transformer							K42J1	K43J1	K44J1	K45J1	K46J1	K47J1	K49J1	K401J1	K402J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer							K42J1R	K43J1R	K44J1R	K45J1R	K46J1R	K47J1R	K49J1R	K401J1R	K402J1R
With Other Color Knob and other voltage Light Module ■*[33]* ♦*[30]*							K42J■♦	K43J■♦	K44J■♦	K45J■♦	K46J■♦	K47J■♦	K49J■♦	K401J■♦	K402J■♦
Spring Return from Left to Center, Operator Only (without contact blocks) *[29]*															
Without Knob, 110-120V 50-60 Hz Transformer							K62J1	K63J1	K64J1	K65J1	K66J1	K67J1	K69J1	K601J1	K602J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer							K62J1R	K63J1R	K64J1R	K65J1R	K66J1R	K67J1R	K69J1R	K601J1R	K602J1R
With Other Color Knob and other voltage Light Module ■*[33]* ♦*[30]*							K62J■♦	K63J■♦	K64J■♦	K65J■♦	K66J■♦	K67J■♦	K69J■♦	K601J■♦	K602J■♦
Spring Return from Right to Center, Operator Only (without contact blocks) *[29]*															
Without Knob, 110-120V 50-60 Hz Transformer							K72J1	K73J1	K74J1	K75J1	K76J1	K77J1	K79J1	K701J1	K702J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer							K72J1R	K73J1R	K74J1R	K75J1R	K76J1R	K77J1R	K79J1R	K701J1R	K702J1R
With Other Color Knob and other voltage Light Module ■*[33]* ♦*[30]*							K72J■♦	K73J■♦	K74J■♦	K75J■♦	K76J■♦	K77J■♦	K79J■♦	K701J■♦	K702J■♦
Spring Return from Both Sides to Center, Operator Only (without contact blocks) *[29]*															
Without Knob, 110-120V 50-60 Hz Transformer							K52J1	K53J1	K54J1	K55J1	K56J1	K57J1	K59J1	K501J1	K502J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer							K52J1R	K53J1R	K54J1R	K55J1R	K56J1R	K57J1R	K59J1R	K501J1R	K502J1R
With Other Color Knob and other voltage Light Module ■*[33]* ♦*[30]*							K52J■♦	K53J■♦	K54J■♦	K55J■♦	K56J■♦	K57J■♦	K59J■♦	K501J■♦	K502J■♦

Table 19.130: Selector Switch Assembly Code and Knob Cat. No. ♦

Color	Standard Knob		Gloved Hand Knob	
	[30] Knob Code	Cat. No. *[28]*	*[30]* Knob Code	Cat. No. *[28]*
Black	B	B11	FB	B25
Red	R	R8	FR	R24
Green	G	G8	FG	G24
Yellow	Y	Y8	FY	Y24
Blue	L	L8	FL	L24
White	W	W8	FW	W24
Amber	A	A8	FA	A24
Clear	C	C8	FC	C24

Table 19.131: Key Withdrawal Codes *[34]*



3 Position

Code	Position
4	Left Only
5	Center Only
6	Right Only
7	Left and Center
8	Left and Right
9	Center and Right
10	Left, Center, and Right


NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.

[28] When ordering, add prefix 9001 to the catalog number.
[29] These operators can be ordered complete with contact blocks. Add the "H code" from Table 19.173 "H" Codes, page 19-67 as needed for your application.
[30] ♦ Add the knob color code from Table 19.130 Selector Switch Assembly Code, page 19-53. For LED, knob color must match LED.
[31] ▼ Add the key withdrawal code from Key Widthdrawl Codes table. **Example: KS43K** with key withdrawal in the right position only = **KS43K6**.
[32] For other color knobs replace the B with knob color code from the Selector Switch Assembly Code table.
[33] ■ Add the voltage assembly code as chosen from page 19–86.
[34] Add the key withdrawal code from Key Widthdrawl Codes table. **Example: KS43K** with key withdrawal in the right position only = **KS43K6**.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

9001K 4-Position Selector Switches

Table 19.132: 4-Position Selector Switches

Contact Block Required						
Contact Block Position	Quantity and Type KA1 or KA2 or KA3			Mount on Side KA1 or KA2 or KA3		1—Contact Closed 0—Contact Open
 Top View	KA1	or	KA3	KA1 #2	or	KA3 #2 — 1 0 0 0
			KA2			KA2 #2 — 0 0 1 0
	KA1	or	KA3	KA1 #1	or	KA3 #1 — 0 0 0 1
			KA2			KA2 #1 — 0 1 0 0
For cam, see Type K, KX, and SK Selector Switch Guide, page 19-55.						H


Non-Illuminated Operators	Cat. No. *[35]*
Manual Return *[36]*, Operator Only (without contact blocks)	
Without Knob	KS88
With Knob♦*[37]*	KS88♦
Key Operated with E10 Key (Codes 11, 12, 13, 14, 15)	KS88K*[38]*

Illuminated Operators	Cat. No. *[35]*
Manual Return *[36]*, Operator Only (without contact blocks)	
Without Knob, 110-120V 50-60 Hz Transformer	K88J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	K88J1R
With Other Color Knob and other voltage Light Module ■*[39]* ♦*[37][40]*	K88J■♦

Table 19.133: Selector Switch Assembly Code and Knob Cat. No.

Color	Standard Knob		Gloved Hand Knob	
	Knob Code	Cat. No.	Knob Code	Cat. No.
Black	B	B11	FB	B25
Red	R	R8	FR	R24
Green	G	G8	FG	G24
Yellow	Y	Y8	FY	Y24
Blue	L	L8	FL	L24
White	W	W8	FW	W24
Amber	A	A8	FA	A24
Clear	C	C8	FC	C24

Table 19.134: Key Withdrawl Codes



Code	Position
11	1 and 4
12	4 only
13	1 only
14	1, 2, 3 and 4
15	2, 3, and 4

NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.

Potentiometers with Dial Plate



Table 19.135: Potentiometers with Dial Plate (not UL listed)—Maximum Voltage 300 Vac

Power	Description	Ratings	Type
2 W	Operator Only, for Single Potentiometer	NEMA 4, 13	K20
	Operator with Single Potentiometer		K21

Table 19.136: Potentiometer Suffixes

Single Potentiometer			
Suffix *[41]*	**Resistance**	**Suffix** *[41]*	**Resistance**
01	50 Ω	07	5 kΩ
02	100 Ω	08	10 kΩ
04	500 Ω	09	25 kΩ
05	1 kΩ	13	500 kΩ
39	2 kΩ	37	750 kΩ
06	2.5 kΩ	14	1 MΩ

Tandem Potentiometer		
Suffix *[41]*	**Resistance**	
	Front	**Rear**
82	1 kW	1 kW

NOTE: Any potentiometer with a shaft 7/8" long and 1/4" diameter may be used with these operators.

[35] When ordering, add prefix 9001 to the catalog number.
[36] These operators can be ordered complete with contact blocks. Add the "H code" from Table 19.173 "H" Codes, page 19-67 as needed for your application.
[37] ♦ Add the knob color code from the Selector Switch Assembly Code table. For LED, knob color must match LED.
[38] Add the key withdrawal code from the Key Withdrawl Codes table.
[39] ■ Add the key withdrawal code from Key Widthdrawl Codes table. **Example: KS43K** with key withdrawal in the right position only = **KS43K6**.
[40] Add the knob color code from the Selector Switch Assembly Code table. For LED, knob color must match LED.
[41] For the complete part number, add the suffix from Table 19.136 Potentiometer Suffixes, page 19-54 to the catalog number. Example: 9001K2105.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Selection
Shown below is a simplified method of selecting a selector switch to meet almost any combination of contact sequences.

Step No. 1
Determine the contact sequence(s) required. Set up a target table like the one shown for the example below.

Contact Sequence 0—contact open 1—contact closed	↖	↑	↗
A	1	0	0
B	0	1	0
C	0	0	1

Step No. 2
Look for a cam type common to all sequences in:
Table 19.137 2 Position Selector Switch, page 19-55,
Table 19.138 3 Position Selector Switch, page 19-55, or
Table 19.139 4 Position Selector Switch, page 19-55.
For the example above, Table 19.138 3 Position Selector Switch, page 19-55 would be used.
For the contact sequences A (1 0 0), B (0 1 0) and C (0 0 1) of the example above, cam types F and L are common to all three sequences.

Step No. 3
Next, use the cam type common to all the sequences (if several cam types are common, choose one) to find the operator type number. Go to the proper reference topic as indicated in the table below:

Number of Positions	Push Button Line	Reference topics
2	Type K, Type SK	Type K, page 19-52 Type SK, page 19-60 "H" Numbers, page 19-67.
3	Type K, Type SK	Type K, page 19-53 Type SK, page 19-61 "H" Numbers, page 19-67.
4	Type K, Type SK	Type K, page 19-54 Type SK, page 19-62.

If for the example above a manual return operator with a standard black knob is required and:
The F cam type is chosen, the operator type number is:

- Type K—Class 9001 Type KS46B, page 19-53
- Type SK—Class 9001 Type SKS46B, page 19-61

The L cam type is chosen, the operator type number is:

- Type K—Class 9001 Type KS401B, page 19-53
- Type SK—Class 9001 Type SKS401B, page 19-61

Step No. 4:
Determine the contact blocks required by using the same table in Step No. 2.
If, for the example above, the F cam type is chosen:

- Use a 9001KA3 mounted on side no. 2 for sequence A (1 0 0).
- Use a 9001KA3 mounted on side no. 1 for sequence B (0 1 0).
- Use a 9001KA2 mounted on side no. 1 or 2 for sequence C (0 0 1).

If, for the example above, the L cam type is chosen:

- Use a 9001KA2 mounted on side no. 2 for sequence A (1 0 0).
- Use a 9001KA2 mounted on side no. 1 or a 9001KA3 mounted on side no. 2 for sequence B (0 1 0).
- Use a 9001KA3 mounted on side no. 1 for sequence C (0 0 1).

One Type KA1 double circuit block can be used in place of one Type KA2 single circuit block plus one Type KA3 single circuit block mounted on the same side.

Type K, KX, and SK Selector Switch Guide

Table 19.137: 2 Position Selector Switch

If you require contact sequence— ↖	If you require contact sequence— ↗	Use Cam Type	Use Contact Block Type	Mount on side no. *[42]*
1	0	E	KA3	1 or 2
		D	KA2	1 or 2
0	1	E	KA2	1 or 2
		D	KA3	1 or 2

Table 19.138: 3 Position Selector Switch

If you require contact sequence— ↖	↑	↗	Use Cam Type									Use Contact Block Type	Mount on side no. *[42]*
1	0	0						G			M	KA2	1
										L		KA2	2
				C		E						KA3	1
			B	C		E	F	G	J			KA3	2
			B					G	J			KA5 *[43]*	2
0	1	0			D	E			J	L		KA2	1
					D	E						KA2	2
							F					KA3	1
										L		KA3	2
0	0	1		C			F					KA2	1 or 2
			B		D			G		L		KA3	1
					D							KA3	2
			B									KA5 *[43]*	1
											M	KA2	2
1	1	0	B									KA2	1
				C			F					KA5 *[43]*	1 or 2
											M	KA3	2
0	1	1	B					G	J			KA2	2
								G				KA5 *[43]*	1
										L		KA5 *[43]*	2
											M	KA3	1
1	0	1							J			KA3	1
					D	E			J	L		KA5 *[43]*	1
					D	E						KA5 *[43]*	2

Table 19.139: 4 Position Selector Switch

If you require contact sequence— ↖	↖	↗	↗	Use Cam Type	Use Contact Block Type	Mount on side no. *[42]*
1	0	0	0	H	(A) KA3	2
0	1	0	0	H	(B) KA2	1
0	0	1	0	H	(C) KA2	2
0	0	0	1	H	(D) KA3	1
1	0	0	1	H	A & D Wired in Parallel	
1	1	0	0	H	A & B Wired in Parallel	
0	1	1	0	H	B & C Wired in Parallel	
0	0	1	1	H	C & D Wired in Parallel	
1	1	1	0	H	A, B & C Wired in Parallel	
0	1	1	1	H	B, C & D Wired in Parallel	
1	0	1	0	H	A & C Wired in Parallel	
0	1	0	1	H	B & D Wired in Parallel	
1	1	0	1	H	KA5 *[43]*	2
1	0	1	1	H	KA5 *[43]*	1

NOTE: For Outline Dimensions see Catalog 9001CT1103

NOTE: When ordering, add prefix 9001 to the catalog number.

KA1 = KA3 + KA2



When ordering, please specify:

- Quantity
- Class Number
- Type or Catalog Number

For "H" Numbers, see Type K, SK, and KX Contact Block "H" Numbers, page 19-67

[42] See Type K, SK, and KX Contact Block "H" Numbers, page 19-67
[43] Type KA5 must be the last block on either side. If more than one KA5 is required on either side—contact your local Square D sales office.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type K Heavy Duty Pilot Lights

When ordering, add prefix 9001 to the catalog number.


Table 19.140: Pilot Lights—UL Types 4, 13/NEMA 4 & 13 *[44][45]*

Description	Voltage	Style	With Red Fresnel Color Cap *[46]*	With Green Fresnel Color Cap *[46]*	With Other Color Cap *[46] [47]*	Without Color Cap *[46]*
 Standard Pilot Light (Plastic Fresnel Color Cap Shown)	110–120 V, 50–60 Hz 220–240 V, 50–60 Hz 24–28 Vac/Vdc	Transformer Transformer Full Voltage	KP1R31 KP7R31 KP35R31	KP1G31 KP7G31 KP35G31	KP1■ KP7■ KP35■	KP1 KP7 KP35
	For other voltages see Standard and Shallow Depth Light Modules, page 19-65.	Transformer, Flashing or LED *[48]* Full Voltage, Neon or Resistor *[49]*	KP▲R31 KP▲R31	KP▲G31 KP▲G31	KP▲■ KP▲■	KP▲ KP▲
 Push-To-Test Pilot Light (Glass Color Cap Shown)	110–120 V, 50–60 Hz 220–240 V, 50–60 Hz 24–28 Vac/Vdc	Transformer Transformer Full Voltage	KT1R31 KT7R31 KT35R31	KT1G31 KT7G31 KT35G31	KT1■ KT7■ KT35■	KT1 KT7 KT35
	For other voltages see Standard and Shallow Depth Light Modules, page 19-65.	Transformer, Flashing or LED *[48]* Full Voltage, Neon or Resistor *[49]*	KT▲R31 KT▲R31	KT▲G31 KT▲G31	KT▲■ KT▲	KT▲ KT▲
 Remote Test Pilot Light (Glass Color Cap Shown)	120 Vac Only 24–28 Vac Only for other voltages	Resistor *[50]* Full Voltage *[50]*	KTR38R31 KTR35R31	KTR38G31 KTR35G31	KTR38■ KTR35■	KTR38 KTR35
	See Standard and Shallow Depth Light Modules, page 19-65.*[50]*	Full Voltage or Resistor *[50]*	KTR▲R31	KTR▲G31	KTR ▲■	KTR▲


Table 19.141: Color Caps

Color	Plastic Fresnel 	Plastic Domed 	Glass 
Amber	A31	A9	A6
Blue	L31	L9	L6
Clear	C31	C9	C6
Green	G31	G9	G6
Red	R31	R9	R6
White	W31	W9	W6
Yellow	Y31	Y9	Y6

Typical Wiring Diagram

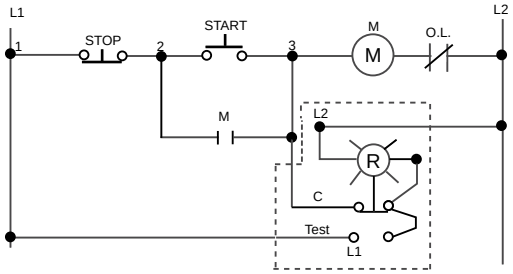

Push-To-Test Pilot Light

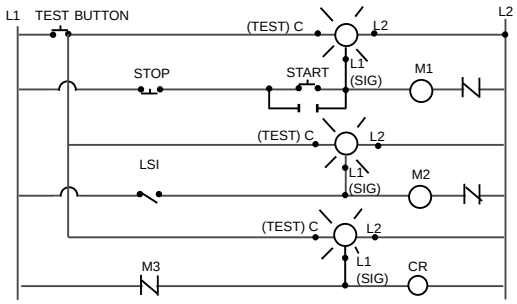

Remote Test Pilot Light

For Contact Blocks, see Type KA Contact Blocks, page 19-64
For Light Modules, see Standard and Shallow Depth Light Modules, page 19-65

[44] For use in hazardous locations, see Square D Offering According to Class, Division, and Group, page 19-66
[45] Legend plates not included.
[46] When ordering, add prefix 9001 to the catalog number.
[47] ■ Add the color code as chosen from Table 19.141 Color Caps, page 19-56. **EXAMPLE: KP1 with a blue fresnel cap = KP1L31**
[48] The cap must be the same color as the LED light module chosen, e.g., for green LED, use green color cap.
[49] On neon light modules, use clear color caps only.
[50] On remote test pilot lights use only full voltage or resistor voltage assembly codes. Do not choose LED (exception - these LED codes are allowed: 38LG, 38LL, 38LR, 38LW, 38LY), neon or transformer codes. For AC use only.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

30 mm Momentary Push Button Operators, UL Types 4, 4X, 13/ NEMA 4, 4X, 13

Table 19.142: Non-Illuminated Momentary Push Button Operators *[51]*

Description	Color	Operator with 1 N.O. and 1 N.C. Contact (KA1)	Operator with 1 N.O. Contact (KA2)	Operator with 1 N.C. Contact (KA3)	Operator Only No Contacts *[52]*
 9001SKR1B Full Guard	Black	SKR1BH13	SKR1BH5	SKR1BH6	SKR1B
	Red	SKR1RH13	SKR1RH5	SKR1RH6	SKR1R
	Green	SKR1GH13	SKR1GH5	SKR1GH6	SKR1G
	Universal *[53]*	SKR1UH13	SKR1UH5	SKR1UH6	SKR1U
	Other *[54]*	SKR1■H13	SKR1■H5	SKR1■H6	SKR1■
 9001SKR3B No Guard	Black	SKR3BH13	SKR3BH5	SKR3BH6	SKR3B
	Red	SKR3RH13	SKR3RH5	SKR3RH6	SKR3R
	Green	SKR3GH13	SKR3GH5	SKR3GH6	SKR3G
	Universal *[53]*	SKR3UH13	SKR3UH5	SKR3UH6	SKR3U
	Other *[54]*	SKR3■H13	SKR3■H5	SKR3■H6	SKR3■
 9001SKR2B Extended Guard	Black	SKR2BH13	SKR2BH5	SKR2BH6	SKR2B
	Red	SKR2RH13	SKR2RH5	SKR2RH6	SKR2R
	Green	SKR2GH13	SKR2GH5	SKR2GH6	SKR2G
	Universal *[53]*	SKR2UH13	SKR2UH5	SKR2UH6	SKR2U
	Other *[54]*	SKR2■	SKR2■H5	SKR2■H6	SKR2■
 9001SKR4B 1-3/8 in. (35 mm) Mushroom Button	**Snap-In Mushroom Button**				
	Black	SKR4BH13	SKR4BH5	SKR4BH6	SKR4B
	Red	SKR4RH13	SKR4RH5	SKR4RH6	SKR4R
	Red *[55]*	SKR4R05H13	SKR4R05H5	SKR4R05H6	SKR4R05
	Green	SKR4GH13	SKR4GH5	SKR4GH6	SKR4G
	Other *[56]*	SKR4▲H13	SKR4▲H5	SKR4▲H6	SKR4▲
	Screw-On Mushroom Button with Set Screw Security				
	Black	SKR24BH13	SKR24BH5	SKR24BH6	SKR24B
	Red	SKR24RH13	SKR24RH5	SKR24RH6	SKR24R
	Green	SKR24GH13	SKR24GH5	SKR24GH6	SKR24G
	Other *[56]*	SKR24▲H13	SKR24▲H5	SKR24▲H6	SKR24▲
 9001SKR5 2-1/4 in. (57 mm) Mushroom Button	**Snap-In Mushroom Button, Plastic Head**				
	Black	SKR5BH13	SKR5BH5	SKR5BH6	SKR5B
	Red	SKR5RH13	SKR5RH5	SKR5RH6	SKR5R
	Red *[55]*	SKR5R05H13	SKR5R05H5	SKR5R05H6	SKR5R05
	Green	SKR5GH13	SKR5GH5	SKR5GH6	SKR5G
	Other *[56]*	SKR5▲H13	SKR5▲H5	SKR5▲H6	SKR5▲
	Screw-On Mushroom Button with Set Screw Security, Plastic Head				
	Black	SKR25BH13	SKR25BH5	SKR25BH6	SKR25B
	Red	SKR25RH13	SKR25RH5	SKR25RH6	SKR25R
	Green	SKR25GH13	SKR25GH5	SKR25GH6	SKR25G
	Other *[56]*	SKR25▲H13	SKR25▲H5	SKR25▲H6	SKR25▲

Table 19.143: Color Codes

Color	■ SKR1, 2, 3 Place Color Code in Type Number	▲ SKR4, 5, 24, 25 Place Color Code in Type Number
Blue	L	L
Yellow	Y	Y
White	W	—
Orange	S	S
Gray	E	—

NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.

NOTE: For use in hazardous locations—See Square D Offering According to Class, Division, and Group, page 19-66. Contact blocks and legend plate not included unless otherwise noted.

[51] When ordering, add prefix 9001 to the catalog number.
[52] These operators can be ordered complete with contact blocks. For maximum block usage, see Table 19.173 “H” Codes, page 19-67. Add the “H” number to the end of the operator type number.
[53] The universal push button operators include one each of the following color inserts: black, red, green, yellow, orange, blue and white.
[54] ■ See Table 19.143 Color Codes , page 19-57.
[55] Knob has the words “Emergency Stop” in raised letters highlighted in white for readability.
[56] ▲ See Table 19.143 Color Codes , page 19-57.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

30 mm Multifunction Operators UL Types 4, 4X, 13/NEMA 4, 4X, 13

Table 19.144: Non-Illuminated Push-Pull Screw-on Mushroom Operators, Plastic Head *[57]*

	Description	Color	With 2 N.C. Contacts (1 KA3, 1 KA5)	With 1 N.O. / 1 N.C. Contact (1 KA1)	Without Contacts *[58]*
 9001SKR9R Non-Illuminated 1-5/8 in. Diameter Knob Includes Type KN179WP Legend Plate Marked Pull To Start Push To Stop	**3 Position**				
	Momentary Pull-Maintained Neutral-Momentary Push *[59]*	Red	SKR8RH25	—	SKR8R
		Green	SKR8GH25	—	SKR8G
		Other *[60]*	SKR8▲H25	—	SKR8▲
	2 Position *[61]*				
	Maintained Pull-Maintained Push	Red	—	SKR9RH13	SKR9R
		Green	—	SKR9GH13	SKR9G
		Other *[60]*	—	SKR9▲H13	SKR9▲

Table 19.145: Non-Illuminated Turn-to-Release Mushroom Operators *[57]*

	Description	Color	With 1 N.O. Contact (KA1)	With 2 N.O. / 2 N.C. Contacts (2 KA1)	Without Contacts
 9001SKR16H2	2 Position, Plastic Head Turn-to-Release Trigger Action	Red	SKR16H13	SKR16H2	SKR16

Table 19.146: Screw-On Plastic Illuminated Push-Pull Mushroom Operators *[57]*

Illuminated	Description	Voltage	With Red Knob and 2 N.C. Contacts (1 KA3, 1 KA5) *[62]*	With Other Color Knob and 2 N.C. Contacts *[60][62]*	With Other Color Knob Without Contacts *[58] [60][62]*
 9001SKR9P1 Illuminated 1-5/8 in. Diameter Knob Includes Type KN179WP Legend Plate Marked Pull to Start Push To Stop	**3 Position**				
	Momentary Pull-Maintained Neutral-Momentary Push *[63]*	110–120 V, 50–60 Hz	SKR8P1RH25	SKR8P1▲H25	SKR8P1▲
		Other—Transformer, LED, Flashing *[64]*	SKR8P♦RH25	SKR8P♦▲H25	SKR8P♦▲
		Other—Full Voltage, Resistor, Neon *[59]*	SKR8P♦RH25	SKR8P♦▲H25	SKR8P♦▲
	Description	**Voltage**	**With Red *[61]* Knob and 1 N.O. & 1 N.C. Contact (KA1)**	**With Other Color Knob and 1 N.O. & 1 N.C. Contact (KA1) *[60]***	**With Other Color Knob Without Contacts *[60]***
	2 Position				
	Maintained Pull-Maintained Push	110–120 V, 50–60 Hz	SKR9P1RH13	SKR9P1▲H13	SKR9P1▲
		Other—Transformer, L.E.D., Flashing *[64]*	SKR9P♦RH13	SKR9P♦▲H13	SKR9P♦▲
		Other—Full Voltage, Resistor, Neon *[59]*	SKR9P♦RH13	SKR9P♦▲H13	SKR9P♦▲

Table 19.147: Color Codes

Color	SKR11, SKR12	SKR8, SKR9
Black *[65]*	B	B
Red	R	R
Green	G	G
Blue	L	L
Yellow	Y	Y
White	W	W
Orange *[65]*	S	S
Clear	—	C
Amber	—	A
Gray	E	—

Table 19.148: Positions for 9001SKR8RH1 or H13

		9001SKR8RH1 or H13		
		PULL	CTR	PUSH
(KA1)	KA3	X	O	O
	KA2	O	O	X

Table 19.149: Positions for 9001SKR8H25

	9001SKR8H25		
	PULL	CTR	PUSH
KA3	X	O	O
KA5	X	X	O
KA2	O	O	X

NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.

[57] When ordering, add prefix 9001 to the catalog number.
[58] These operators can be ordered complete with contact blocks. For maximum block usage, see Table 19.173 “H” Codes, page 19-67. Add the chosen “H” number to the end of the operator.
[59] On neon light modules, use clear knobs only.
[60] ▲ See Table 19.147 Color Codes, page 19-58 and insert the color code in the Type number. **Example: SKR9( ) with a yellow knob = SKR9Y**
[61] To obtain a red knob with “Push Emergency Stop” printed on the red knob—substitute “R05” in place of “R”
[62] ♦ Add the voltage assembly code as chosen from Standard and Shallow Depth Light Modules, page 19-65. **Example: SKR8P♦ with 277 V 50–60 Hz = SKR8P8**
[63] For positions, refer to Table 19.148 Positions for 9001SKR8RH1 or H13, page 19-58 and Table 19.149 Positions for 9001SKR8H25, page 19-58.
[64] The knob must be the same color as the LED light module chosen, for example, for a green LED, use a green knob.
[65] These colors are not available on illuminated push-pull operators.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type SK Corrosion Resistant Illuminated Operators

Table 19.150: Illuminated Push Button Operators

Description		Voltage and Frequency	Style	With Red Color Cap and 1 N.O. and 1 N.C. Contact (KA1) *[66]*	With Green Color Cap and 1 N.O.and 1 N.C. Contact (KA1) *[66]*	With Other Color Cap Without Contact Blocks *[67] [66]*
 9001SK1L1	Full Guard Illuminated Push Button	110–120 V, 50–60 Hz	Transformer	SK1L1RH13	SK1L1GH13	SK1L1
		220–240 V, 50–60 Hz	Transformer	SK1L7RH13	SK1L7GH13	SK1L7
		24–28 Vac/Vdc	Full Voltage	SK1L35RH13	SK1L35GH13	SK1L35
		For other voltages See Table *[68]*	Transformer, Flashing	SK1L■RH13	SK1L■GH13	SK1L ■
			Full Voltage	SK1L■RH13	SK1L■GH13	SK1L ■
			Resistor, Neon *[69]*	SK1L■RH13	SK1L■GH13	SK1L ■
			LED *[70]*	SK1L■RH13	SK1L■GH13	SK1L ■ *[71]*
 9001SK2L1	No Guard Illuminated Push Button	110–120 V, 50–60 Hz	Transformer	SK2L1RH13	SK2L1GH13	SK2L1
		220–240 V, 50–60 Hz	Transformer	SK2L7RH13	SK2L7GH13	SK2L7
		24–28 Vac/Vdc	Full Voltage	SK2L35RH13	SK2L35GH13	SK2L35
		For other voltages See Table *[68]*	Transformer, Flashing	SK2L■RH13	SK2L■GH13	SK2L ■
			Full Voltage	SK2L■RH13	SK2L■GH13	SK2L ■
			Resistor, Neon *[69]*	SK2L■RH13	SK2L■GH13	SK2L ■
			LED*[70]*	SK2L■RH13	SK2L■GH13	SK2L ■ *[71]*
 9001SK2L1R20	1-3/8 in. (35 mm) Illuminated Mushroom, Screw-On Plastic Head	110–120 V, 50–60 Hz	Transformer	SK2L1R20H13	SK2L1G20H13	Order SK2L■ *[71][72]*
		220–240 V, 50–60 Hz	Transformer	SK2L7R20H13	SK2L7G20H13	
		24–28 Vac/Vdc	Full Voltage	SK2L35R20H13	SK2L35G20H13	
		For other voltages See Table *[68]*	Transformer, Flashing	SK2L■R20H13	SK2L■G20H13	
			Full Voltage	SK2L■R20H13	SK2L■G20H13	
			Resistor, Neon *[69]*	SK2L■R20H13	SK2L■G20H13	
			LED *[70]*	SK2L■R20H13	SK2L■G20H13	
 9001SK2L1R21	2-1/4 in. (57 mm) Illuminated Mushroom, Screw-On Plastic Head	110–120 V, 50–60 Hz	Transformer	SK2L1R21H13	SK2L1G21H13	Order SK2L■ *[71][72]*
		220–240 V, 50–60 Hz	Transformer	SK2L7R21H13	SK2L7G21H13	
		24–28 Vac/Vdc	Full Voltage	SK2L35R21H13	SK2L35G21H13	
		For other voltages See Table *[68]*	Transformer, Flashing	SK2L■R21H13	SK2L■G21H13	
			Full Voltage	SK2L■R21H13	SK2L■G21H13	
			Resistor, Neon *[69]*	SK2L■R21H13	SK2L■G21H13	
			LED *[70]*	SK2L■R21H13	SK2L■G21H13	

Table 19.151: Color Caps

Color	Color Codes		
	SK1L/SK2L	1-3/8 in. (35 mm) Mushroom	2-1/4 in. (57 mm) Mushroom
Red	R	R20	R21
Green	G	G20	G21
Blue	L	L20	L21
Yellow	Y	Y20	Y21
White	W	W20	W21
Clear	C	C20	C21
Amber	A	A20	A21

NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.


NOTE: For use in hazardous locations—See Square D Offering According to Class, Division, and Group, page 19-66. Contact blocks and legend plate not included unless otherwise noted.

[66] When ordering, add prefix 9001 to the catalog number.
[67] These operators can be ordered complete with contact blocks. For maximum block usage, see Table 19.173 “H” Codes, page 19-67. Add the “H” number to the end of the operator type number.
[68] ■ Add the voltage assembly code as chosen from Standard and Shallow Depth Light Modules, page 19-65. **EXAMPLE: SK2L_ with 240 Vac/Vdc = SK2L25.**
[69] On neon light modules, use clear color caps only.
[70] Add the color code as chosen from the color cap table below. **EXAMPLE: SK2L25 with a blue 1-3/8 in. mushroom button = SK2L25L20**.
[71] The cap must be the same color as the LED light module chosen, e.g., for green LED, use green color cap.
[72] The only difference between a no guard (SK2L) operator and mushroom button operator is the color cap.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


9001SK 2-Position Selector Switches

Table 19.152: 2-Position Selector Switches

Contact Block Required						1—Contact Closed 0—Contact Open			
Contact Block Position	Quantity and Type KA1 or KA2 or KA3			Mount on Side KA1 or KA2 or KA3			↖ Left	↗ Right	↖ Left	↗ Right
 Top View	KA1	or	KA3	KA1 #2	or	KA3 #2	1	0	0	1
			KA2			KA2 #2	0	1	1	0
	KA1	or	KA3	KA1 #1	or	KA3 #1	1	0	0	1
			KA2			KA2 #1	0	1	1	0
For Cam, see Type K, KX, and SK Selector Switch Guide, page 19-55							E		D	

Non-Illuminated Operators	Type *[73]*	Type *[73]*
Manual Return *[74]*, **Operator Only (without contact blocks)**		
Without Knob	SKS11	SKS12
With Knob *[75]*	SKS11♦	SKS12♦
Operator with Contact Blocks and Standard black knob		
With 1 KA1 on Side #2	SKS11BH13	—
With 1 KA1 on Side #1	SKS11BH1	—
With 1 KA1 on Side #1 and 1 KA1 on side #2	SKS11BH2	—
Spring Return from Left *[74]*, **Operator Only (without contact blocks)**		
Without Knob	SKS25	—
With Knob *[75]*	SKS25♦	—
Spring Return from Right *[74]*, **Operator Only (without contact blocks)**		
Without Knob	—	SKS34
With Knob *[75]*	—	SKS34♦

Illuminated Operators	Type *[73]*	Type *[73]*
Manual Return *[74]*, **Operator Only (without contact blocks)**		
Without Knob, 110-120V 50-60 Hz Transformer	SK11J1	SK12J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK11J1R	SK12J1R
With other Color Knob *[75]*and other Voltage Light Module *[76]*	SK11J■♦	SK12J■♦
Spring Return from Left *[74]*, **Operator Only (without contact blocks)**		
Without Knob, 110-120V 50-60 Hz Transformer	SK25J1	—
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK25J1R	—
With other Color Knob *[75]*and other Voltage Light Module *[76]*	SK25J■♦	—
Spring Return from Right *[74]*, **Operator Only (without contact blocks)**		
Without Knob, 110-120V 50-60 Hz Transformer	—	SK34J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	—	SK34J1R
With other Color Knob *[75]*and other Voltage Light Module *[76]*	—	SK34J■♦



2 Position

Table 19.153: Selector Switch Assembly Code and Knob Cat. No.

Color	Standard Knob		Gloved Hand Knob	
	Knob Code	Cat. No. *[73]*	Knob Code	Cat. No. *[73]*
Black	B	B11	FB	B25
Red	R	R8	FR	R24
Green	G	G8	FG	G24
Yellow	Y	Y8	FY	Y24
Blue	L	L8	FL	L24
White	W	W8	FW	W24
Amber	A	A8	FA	A24
Clear	C	C8	FC	C24


Contact Blocks: Contact Blocks, page 19-64,Hermetically Sealed Logic Reed Contact Blocks, page 19-66, Hermetically Sealed Power Reed Contact Blocks, page 19-66
Light Modules:Standard Light Modules, page 19-65

[73] When ordering, add prefix 9001 to the catalog number.
[74] These operators can be ordered complete with contact blocks. For maximum block usage, see Table 19.173 "H" Codes, page 19-67. Add the chosen "H" number to the end of the operator.
[75] ♦ Add the knob color code chosen from Table 19.153 Selector Switch Assembly Code and Knob Cat. No., page 19-60. For LED, knob color must match LED.
[76] ■ Add the voltage assembly code as chosen from Standard Light Modules, page 19-65. **Example: K25J with 208Vac = K25J3**

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


9001SK 3-Position Selector Switches

Table 19.154: 3-Position Selector Switches

Contact Block Required						1 — Contact Closed 0 — Contact Open																										
Contact Block Position	Quantity and Type			Mount on Side																												
 **Top View**	KA1	or	KA3 KA2	KA1 #2	or	KA3 #2	1	0	0	1	0	0	0	0	1	1	0	0	1	0	0	1	0	0	1	0	0	0	1	0	1	1	0
						KA2 #2	0	1	1	0	0	1	0	1	0	0	1	0	0	0	1	0	1	1	0	1	1	1	0	0	0	0	1
	KA1	or	KA3 KA2	KA1 #1	or	KA3 #1	0	0	1	1	0	0	0	0	1	1	0	0	0	1	0	0	0	1	1	0	1	0	0	1	0	1	1
						KA2 #1	1	1	0	0	0	1	0	1	0	0	1	0	0	0	1	1	0	0	0	1	0	0	1	0	1	0	0
For Cam, see Type K, KX, and SK Selector Switch Guide, page 19-55							B			C			D			E			F			G			J			L			M	

Non-Illuminated Operators *[77]*	Type	Type	Type	Type	Type	Type	Type	Type	Type
Manual Return, Operator Only (without contact blocks) *[78]*									
Without Knob	SKS42	SKS43	SKS44	SKS45	SKS46	SKS47	SKS49	SKS401	SKS402
With Knob *[79]*	SKS42♦	SKS43♦	SKS44♦	SKS45♦	SKS46♦	SKS47♦	SKS49♦	SKS401♦	SKS402♦
Operator with Contact Blocks and Standard black knob *[80]*									
With 1 KA1 on Side #2 (H13)	SKS42B-H13	SKS43B-H13	SKS44B-H13	SKS45B-H13	SKS46BH13	SKS47B-H13	SKS49B-H13	SKS401B-H13	SKS402B-H13
With 1 KA1 on Side #1 (H1)	SKS42B-H1	SKS43BH1	SKS44BH1	SKS45B-H1	SKS46BH1	SKS47BH1	SKS49BH1	SKS401BH1	SKS402BH1
With 1 KA1 on Side #1 and 1 KA1 on side #2 (H2)	SKS42B-H2	SKS43BH2	SKS44BH2	SKS45B-H2	SKS46BH2	SKS47BH2	SKS49BH2	SKS401BH2	SKS402BH2
Spring Return from Left to Center, Operator Only (without contact blocks) *[78]*									
Without Knob	SKS62	SKS63	SKS64	SKS65	SKS66	SKS67	SKS69	SKS601	SKS602
With Knob *[79]*	SKS62♦	SKS63♦	SKS64♦	SKS65♦	SKS66♦	SKS67♦	SKS69♦	SKS601♦	SKS602♦
Spring Return from Right to Center, Operator Only (without contact blocks) *[78]*									
Without Knob	SKS72	SKS73	SKS74	SKS75	SKS76	SKS77	SKS79	SKS701	SKS702
With Knob *[79]*	SKS72♦	SKS73♦	SKS74♦	SKS75♦	SKS76♦	SKS77♦	SKS79♦	SKS701♦	SKS702♦
Spring Return from Both Sides to Center, Operator Only (without contact blocks) *[78]*									
Without Knob	SKS52	SKS53	SKS54	SKS55	SKS56	SKS57	SKS59	SKS501	SKS502
With Knob *[79]*	SKS52♦	SKS53♦	SKS54♦	SKS55♦	SKS56♦	SKS57♦	SKS59♦	SKS501♦	SKS502♦

Illuminated Operators *[77]*	Type	Type	Type	Type	Type	Type	Type	Type	Type
Manual Return, Operator Only (without contact blocks) *[78]*									
Without Knob, 110-120V 50-60 Hz Transformer	SK42J1	SK43J1	SK44J1	SK45J1	SK46J1	SK47J1	SK49J1	SK401J1	SK402J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK42J1R	SK43J1R	SK44J1R	SK45J1R	SK46J1R	SK47J1R	SK49J1R	SK401J1R	SK402J1R
With other Color Knob *[79]* and other Voltage Light Module *[81]*	SK42J■♦	SK43J■♦	SK44J■♦	SK45J■♦	SK46J■♦	SK47J■♦	SK49J■♦	SK401J■♦	SK402J■♦
Spring Return from Left to Center, Operator Only (without contact blocks) *[78]*									
Without Knob, 110-120V 50-60 Hz Transformer	SK62J1	SK63J1	SK64J1	SK65J1	SK66J1	SK67J1	SK69J1	SK601J1	SK602J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK62J1R	SK63J1R	SK64J1R	SK65J1R	SK66J1R	SK67J1R	SK69J1R	SK601J1R	SK602J1R
With other Color Knob *[79]* and other Voltage Light Module *[81]*	SK62J■♦	SK63J■♦	SK64J■♦	SK65J■♦	SK66J■♦	SK67J■♦	SK69J■♦	SK601J■♦	SK602J■♦
Spring Return from Right to Center, Operator Only (without contact blocks) *[78]*									
Without Knob, 110-120V 50-60 Hz Transformer	SK72J1	SK73J1	SK74J1	SK75J1	SK76J1	SK77J1	SK79J1	SK701J1	SK702J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK72J1R	SK73J1R	SK74J1R	SK75J1R	SK76J1R	SK77J1R	SK79J1R	SK701J1R	SK702J1R
With other Color Knob *[79]* and other Voltage Light Module *[81]*	SK72J■♦	SK73J■♦	SK74J■♦	SK75J■♦	SK76J■♦	SK77J■♦	SK79J■♦	SK701J■♦	SK702J■♦
Spring Return from Both Sides to Center, Operator Only (without contact blocks) *[78]*									
Without Knob, 110-120V 50-60 Hz Transformer	SK52J1	SK53J1	SK54J1	SK55J1	SK56J1	SK57J1	SK59J1	SK501J1	SK502J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK52J1R	SK53J1R	SK54J1R	SK55J1R	SK56J1R	SK57J1R	SK59J1R	SK501J1R	SK502J1R
With other Color Knob *[79]* and other Voltage Light Module *[81]*	SK52J■♦	SK53J■♦	SK54J■♦	SK55J■♦	SK56J■♦	SK57J■♦	SK59J■♦	SK501J■♦	SK502J■♦



3 Position

Table 19.155: Selector Switch Assembly Code and Knob Cat. No.

Color	Standard Knob		Gloved Hand Knob	
	[82] Knob Code	Cat. No. *[77]*	*[82]* Knob Code	Cat. No. *[77]*
Black	B	B11	FB	B25
Red	R	R8	FR	R24
Green	G	G8	FG	G24
Yellow	Y	Y8	FY	Y24
Blue	L	L8	FL	L24
White	W	W8	FW	W24
Amber	A	A8	FA	A24
Clear	C	C8	FC	C24


Contact Blocks: Contact Blocks, page 19-64,Hermetically Sealed Logic Reed Contact Blocks, page 19-66, Hermetically Sealed Power Reed Contact Blocks, page 19-66
Light Modules:Standard Light Modules, page 19-65

[77] When ordering, add prefix 9001 to the catalog number.
[78] These operators can be ordered complete with contact blocks. Add the "H code" from Table 19.173 "H" Codes, page 19-67 as needed for your application.
[79] ♦ Add the knob color code chosen from the Selector Switch Assembly Code table. For LED, knob color must match LED.
[80] For other color knobs replace the B with knob color code. See Table 19.155 Selector Switch Assembly Code and Knob Cat. No., page 19-61 .
[81] ■ Add the voltage assembly code as chosen from Standard Light Modules, page 19-65. **Example: K25J with 208Vac = K25J3**
[82] Add the knob color code. For LED, knob color must match LED.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


9001SK 4-Position Selector Switches

Table 19.156: 4-Position Selector Switches

Contact Block Position	Quantity and Type			Mount on Side			1 — Contact Closed 0 — Contact Open			
 **Top View**	KA1	or	KA3	KA1 #2	or	KA3 #2	1	0	0	0
			KA2			KA2 #2	0	0	1	0
	KA1	or	KA3	KA1 #1	or	KA3 #1	0	0	0	1
			KA2			KA2 #1	0	1	0	0
Cam (see Type K, KX, and SK Selector Switch Guide, page 19-55)							H			

Non-Illuminated Operators	Type *[83]*
Manual Return *[84]*, **Operator Only (without contact blocks)**	
Without Knob	SKS88
With other Color Knob *[85]*	SKS88♦

Illuminated Operators	Type *[83]*
Manual Return *[84]*, **Operator Only (without contact blocks)**	
Without Knob, 110-120V 50-60 Hz Transformer	SK88J1
With Standard Red Knob, 110-120V 50-60 Hz Transformer	SK88J1R
With other Color Knob *[85]* and other Voltage Light Module *[86]*	SK88J■♦



4 Position

Table 19.157: Selector Switch Assembly Code and Knob Cat. No.

Color	Standard Knob		Gloved Hand Knob	
	[87] Knob Code	Cat. No. *[83]*	*[87]* Knob Code	Cat. No. *[83]*
Black	B	B11	FB	B25
Red	R	R8	FR	R24
Green	G	G8	FG	G24
Yellow	Y	Y8	FY	Y24
Blue	L	L8	FL	L24
White	W	W8	FW	W24
Amber	A	A8	FA	A24
Clear	C	C8	FC	C24

For Contact Blocks, see Contact Blocks, page 19-64,Hermetically Sealed Logic Reed Contact Blocks, page 19-66, Hermetically Sealed Power Reed Contact Blocks, page 19-66
For Light Modules, see Standard Light Modules, page 19-65

Potentiometers with Dial Plate

Table 19.158: Potentiometers with Dial Plate (not UL listed)—Maximum Voltage 300 Vac

Power	Description	Ratings	Type
2 W	Operator Only, for Single Potentiometer	NEMA 4, 13	SK20
	Operator with Single Potentiometer		SK21
	Operator Only, for Tandem Potentiometer		SK22
	Operator with Tandem Potentiometer		SK23
When ordering, add prefix 9001 to the catalog number.			

Table 19.159: Potentiometer Suffixes

Single Potentiometer			
Suffix *[88]*	**Resistance**	**Suffix** *[88]*	**Resistance**
01	50 Ω	07	5 kΩ
02	100 Ω	08	10 kΩ
04	500 Ω	09	25 kΩ
05	1 kΩ	13	500 kΩ
39	2 kΩ	37	750 kΩ
06	2.5 kΩ	14	1 MΩ

Tandem Potentiometer		
Suffix *[88]*	**Resistance**	
	Front	**Rear**
82	1 kΩ	1 kΩ

NOTE: Any potentiometer with a shaft 7/8 in. long and 1/4 in. diameter may be used with these operators.

[83] When ordering, add prefix 9001 to the catalog number.
[84] These operators can be ordered complete with contact blocks. Add the "H code" from Table 19.173 "H" Codes, page 19-67 as needed for your application.
[85] ♦ Add the knob color code chosen from the Selector Switch Assembly Code table. For LED, knob color must match LED.
[86] ■ Add the voltage assembly code as chosen from Standard Light Modules, page 19-65. **Example: K25J with 208Vac = K25J3**
[87] Add the knob color code from Table 19.237. For LED, knob color must match LED
[88] For the complete part number, add the suffix from this table to the catalog number from Table 19.158 Potentiometers with Dial Plate, page 19-62. Example: 9001K2105.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type SK Corrosion Resistant Pilot Lights

Table 19.160: Pilot Lights—UL Types 4, 4X, *[89]*

Description			Voltage	Style	With Red Fresnel Color Cap *[90]*	With Green Fresnel Color Cap *[90]*	With Other Color Cap *[90] [91]*	Without Color Cap *[90]*
	9001SKP1	Standard Pilot Light (Fresnel color cap shown)	110–120 V, 50–60 Hz	Transformer	SKP1R31	SKP1G31	SKP1■	SKP1
			220–240 V, 50–60 Hz	Transformer	SKP7R31	SKP7G31	SKP7■	SKP7
			24–28 Vac/Vdc	Full Voltage	SKP35R31	SKP35G31	SKP35■	SKP35
			For other voltages *[90]*	Transformer, Flashing or LED *[92]*	SKP▲R31	SKP▲G31	SKP■	SKP▲
				Full Voltage, Neon or Resistor *[93]*	SKP▲R31	SKP▲G31	SKP▲■	SKP▲
	9001SKT1	Push-To-Test Pilot Light (Fresnel color cap shown)	110–120 V, 50–60 Hz	Transformer	SKT1R31	SKT1G31	SKT1■	SKT1
			220–240 V, 50–60 Hz	Transformer	SKT7R31	SKT7G31	SKT7■	SKT7
			24–28 Vac/Vdc	Full Voltage	SKT35R31	SKT35G31	SKT35■	SKT35
			For other voltages *[90]*	Transformer, Flashing or LED *[92]*	SKT▲R31	SKT▲G31	SKT▲■	SKT▲
				Full Voltage, Neon or Resistor *[93]*	SKT▲R31	SKT▲G31	SKT▲■	SKT▲
	9001SKTR38	Remote Test Pilot Light (Fresnel color cap shown)	120 Vac Only	Resistor	SKTR38R31	SKTR38G31	SKTR38■	SKTR38
			24–28 Vac Only	Full Voltage	SKTR35R31	SKTR35G31	SKTR35■	SKTR35
			For other voltages *[90] [91] [94]*	Full Voltage or Resistor *[95]*	SKTR▲R31	SKTR▲G31	SKTR▲■	SKTR▲



Plastic Fresnel


Plastic Domed


Table 19.161: Color Caps

Color	Plastic Fresnel *[96]*	Plastic Domed *[96]*
Amber	A31	A9
Blue	L31	L9
Clear	C31	C9
Green	G31	G9
Red	R31	R9
White	W31	W9
Yellow	Y31	Y9

Typical Wiring Diagram

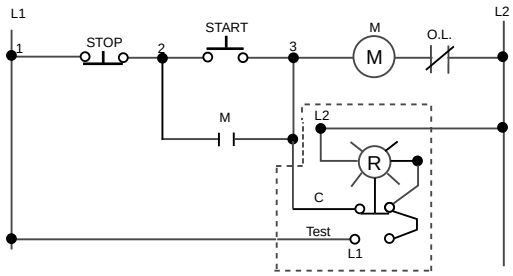

Push-To-Test Pilot Light

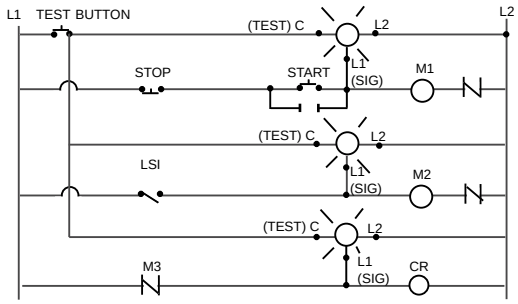

Remote Test Pilot Light

NOTE: To select and order Contact Blocks, Light Modules, Knobs, and Accessories, see Type KA Contact Blocks, page 19-64 through Hermetically Sealed Power Reed Contact Blocks, page 19-66.

NOTE: For use in hazardous locations—See Square D Offering According to Class, Division, and Group, page 19-66. Contact blocks and legend plate not included unless otherwise noted.

[89] When ordering, add prefix 9001 to the catalog number.
[90] ▲ Add the voltage assembly code as chosen from Standard and Shallow Depth Light Modules, page 19-65.**EXAMPLE: SKT•••R31 with 208 Vac red LED voltage = SKT37LRR31.**
[91] ■ Add the color code as chosen from the color cap table below.**EXAMPLE: SKP1 with a blue fresnel cap = SKP1L31.**
[92] The cap must be the same color as the LED light module chosen, e.g., for a green LED, use a green color cap.
[93] On neon light modules, use clear color caps only.
[94] Use only full voltage or resistor voltage assembly codes on remote test pilot lights. Do not choose LED, neon or transformer codes. For AC use only.
[95] Use only full voltage or resistor voltage assembly codes on remote test pilot lights. Do not choose LED (exception — these LED codes are allowed: 38LG, 38LL, 38LR, 38LW, 38LY), neon or transformer codes. For AC use only.
[96] Add the color code as chosen from the color cap table below.**EXAMPLE: SKP1 with a blue fresnel cap = SKP1L31.**

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Table 19.162: Standard Contact Blocks

Description	Symbol	Type
 (Clear Cover)	Direct-Acting	KA1
 (Green Cover)		KA2
 (Red Cover)	Direct-Acting	KA3
 (Clear Cover)	N.O. Contact Early Closing	KA4
 (Red Cover)	N.C. Contact Late Opening	KA5
 (Green Cover)	N.O. Contact Early Closing	KA6

Table 19.163: Additional Circuit Arrangements

Description	Symbol		Type
Sequencing *[97]* N.O. Contact of KA4 closes before N.O. Contact on KA1	KA4	KA1	Order One Type KA4 and One Type KA1
Overlapping *[97]* N.O. Contact of KA4 closes before N.C. Contact of KA5 Opens	KA4	KA5	Order One Type KA4 and One Type KA5

Type KA Contact Blocks

The Class 9001 Type KA contact blocks are Fingersafe® contact blocks (meeting VDE 0106 Part 100). They have one screw mounting and captive (backed out) plus/minus terminal screws. These contact blocks are double-break, direct-acting contacts. Because of the wiping action of these contacts, they are suitable for use with programmable controllers. All contact blocks listed below accept up to 2 #12–#24 AWG solid or stranded wires. Recommended tightening torque for screw terminals is 7 lb-in.

Symbol	Contact Blocks with Binder Head Screws (not Fingersafe)		Gold Flashed Contacts with Standard Pressure Wire Terminals
	Type *[98]*	Quantity *[99]*	Type *[98]*
	KA21	25–Up	KA31
	KA22	25–Up	KA32
	KA23	25–Up	KA33
N.O. Early Closing	KA24	25–Up	KA34
N.C. Contact Late Opening	KA25	25–Up	KA35

Contact blocks listed below are not Fingersafe, but provide:

- Terminals that accept ring tongue/fork tongue connectors
- Short single circuit contact blocks (0.75" deep vs. 0.97" deep on the Fingersafe)
- Same as old style Series G product available prior to March, 1989.
- For assembled operators, use form Y238 (add to catalog number as suffix, for example: 9001KRU1H13Y238)



Table 19.164: Contact blocks (not Fingersafe)

Symbol	Type *[98]*	Symbol	Type *[98]*
	KA1G	N.O. Contact Early Closing	KA4G
	KA2G	N.C. Contact Late Opening	KA5G
	KA3G	N.O. Contact Early Closing	KA6G

Table 19.165: Contact blocks with Quick-Connect terminals (not Fingersafe)

Symbol	Type *[98]*
	KA12
	KA13

Table 19.166: Maximum Current Ratings for Control Circuit Contacts—Types KA1–KA6, KA21–KA25, KA31–KA35, KA1G–KA6G

Volts	AC						Volts	DC				
	Inductive (NEMA / UL Type A600) 35% Power Factor					Resistive 75% Power Factor Make, Break and Continuous Amperes		Inductive and Resistive (NEMA Q600)				
	Make		Break		Continuous Carrying Amperes			Make and Break				Continuous Carrying Capacity
	Amperes	VA	Amperes	VA				KA1	KA2 KA3	KA4	KA5 KA6	
120	60	7200	6.0	720	10	10	125	0.55	0.55	—	—	2.5
240	30		3.0				250	0.27	0.27	—	—	
480	15		1.5				600	0.10	0.10	—	—	
600	12		1.2									

[97] For push buttons or two-position selector switches only. For sequencing or overlapping contacts on other operators, refer to catalog 9001CT0001.
[98] When ordering, add prefix 9001 to the catalog number.
[99] Minimum order quanitity is 25.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Standard and Shallow Depth Light Modules

Table 19.167: Standard Light Modules for Types K, SK, and KX Control Units *[100][101][102][103]*

	Voltage	Description	Light Module Type *[104]*	Voltage Assembly Code	Rating	Temperature Code T-Code	Replacement Lamp Part Number *[100]*
	All	Full Voltage (without Bayonet Base Lamp)	KM40	40	—	—	None
	6 Vac/Vdc	Full Voltage	KM31	31	.9 VA	T5	2550101020
	6 Vac/Vdc	LED Red	KM31LR	31LR		T6	6508805201
	6 Vac/Vdc	LED Green	KM31LG	31LG		T6	6508805203
	6 Vac/Vdc	LED Yellow	KM31LY	31LY		T6	6508805202
	12–14 Vac/Vdc	Full Voltage	KM32	32	1.2 VA	T5	2550101037
	12–14 Vac/Vdc	LED Red	KM32LR	32LR		T6	6508805201
	12–14 Vac/Vdc	LED Green	KM32LG	32LG		T6	6508805203
	12–14 Vac/Vdc	LED Yellow	KM32LY	32LY		T6	6508805202
	18 Vac/Vdc	Resistor	KM33	33	1.4 VA	T5	2550101037
	24–28 Vac/Vdc	Full Voltage	KM35	35	1.2 VA	T3C	2550101002
	24–28 Vac/Vdc	LED Red	KM35LR	35LR	.28 VA	T4	6508805210
	24–28 Vac/Vdc	LED Green	KM35LG	35LG	.28 VA	T4	6508805212
	24–28 Vac/Vdc	LED Yellow	KM35LY	35LY	.28 VA	T4	6508805211
	24–28 Vac/Vdc	LED White	KM35LW	35LW	.28 VA	T4	6508805214
	24–28 Vac/Vdc	LED Blue	KM35LL	35LL	.28 VA	T4	6508805213
	48 Vac/Vdc	Full Voltage	KM36	36	2.6 VA	T3A	2550101025
	110–120 V, 50–60 Hz	LED Red	KM1LR	1LR		T6	6508805201
	110–120 V, 50–60 Hz	LED Green	KM1LG	1LG		T6	6508805203
	110–120 V, 50–60 Hz	LED Yellow	KM1LY	1LY		T6	6508805202
	110–120 V, 50–60 Hz	Transformer	KM1	1	2.4 VA	T6	2550101020
	110–120 V, 50–60 Hz	Flashing	KMF1	F1	.85 VA	T6	2550101036
	120 Vac/Vdc	Full Voltage/Resistor	KM38	38	3.0 VA	T4	2550101027
	120 Vac/Vdc	Neon *[105]*	KM11	11	0.2 VA	T6	2550101013
	120 Vac/Vdc	LED Red	KM38LR	38LR	1.4 VA	T4A	6508805210
	120 Vac/Vdc	LED Green	KM38LG	38LG	1.4 VA	T4A	6508805212
	120 Vac/Vdc	LED Yellow	KM38LY	38LY	1.4 VA	T4A	6508805211
	120 Vac/Vdc	LED White	KM38LW	38LW	1.4 VA	T4A	6508805214
	120 Vac/Vdc	LED Blue	KM38LL	38LL	1.4 VA	T4A	6508805213
	208–220 V, 50–60 Hz	Transformer	KM3	3	2.5 VA	T6	2550101020
	208–220 V, 50–60 Hz	LED Red	KM3LR	3LR		T6	6508805201
	208–220 V, 50–60 Hz	LED Green	KM3LG	3LG		T6	6508805203
	208–220 V, 50–60 Hz	LED Yellow	KM3LY	3LY		T6	6508805202
	208–220 V, 50–60 Hz	LED White	KM3LW	3LW		T6	6508805215
	208–220 V, 50–60 Hz	LED Blue	KM3LL	3LL		T6	6508805216
	220–240 V, 50–60 Hz	Transformer	KM7	7	2.0 VA	T6	2550101020
	220–240 V, 50–60 Hz	LED Red	KM7LR	7LR		T6	6508805201
	220–240 V, 50–60 Hz	LED Green	KM7LG	7LG		T6	6508805203
	220–240 V, 50–60 Hz	LED Yellow	KM7LY	7LY		T6	6508805202
	220–240 V, 50–60 Hz	LED White	KM7LW	7LW		T6	6508805215
	220–240 V, 50–60 Hz	LED Blue	KM7LL	7LL		T6	6508805216
	240 Vac/Vdc	Resistor	KM25	25	6.0 VA	T3A	2550101027
	240 Vac/Vdc	Neon *[105]*	KM12	12	0.3 VA	T6	2550101013
	277 V, 50–60 Hz	Transformer	KM8	8	2.4 VA	T6	2550101020
	380–480 V, 50–60 Hz	Transformer	KM5	5	2.8 VA	T6	2550101020
	480 Vac/Vdc	Neon *[105]*	KM14	14	0.5 VA	T6	2550101013
	550–600 V, 50–60 Hz	Transformer	KM6	6	2.5 VA	T6	2550101020

NOTE: Light modules are available in other voltages. For additional information, refer to Catalog **9001CT0001**.

The products in Table 19.167 have been assigned Temperature Classifications (T-Codes) in accordance with **UL 121201 (2017) — Nonincendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations.** These codes can aid the user in proper application of these products in accordance with **ISO/ISA/IEC 60079–0 (2017–12) Explosive Atmospheres — Part 0: Equipment — General Requirements** and the **National Electric Code NFPA 70 — Article 500.**

NOTE: Light modules shown in Table 19.168 are not UL Certified for use in hazardous locations.

Table 19.168: Shallow Depth Light Modules For Types K and SK Control Units *[100] [102] [106] [101]*

	Voltage	Description	Light Module Type *[104]*	Voltage Assembly Code	Rating	Temperature Code T-Code	Replacement Lamp Part Number
	24–28 Vac/Vdc	Full Voltage	KM55	55	1.2 VA	—	2550101002
		LED Red	KM55LR	55LR	0.5 VA	—	6508805204
		LED Green	KM55LG	55LG		—	6508805206
		LED Yellow	KM55LY	55LY		—	6508805205
	110–120 Vac/Vdc	Full Voltage	KM58	58	3.0 VA	—	2550101027
		LED Red	KM58LR	58LR	0.5 VA	—	6508805204
		LED Green	KM58LG	58LG		—	6508805206
		LED Yellow	KM58LY	58LY		—	6508805205

File: E78403
CCN: NKCR

File: LR25490
Class: 3211 03

marked

[100] For use with all operators except KX and remote test pilot.
[101] For use in hazardous locations—See Square D Offering According to Class, Division, and Group, page 19-66.
[102] With LED light modules, use either a clear color cap or a cap the same color as the LED.
[103] With neon type light modules, use a **clear** color cap only.
[104] When ordering, add prefix 9001 to the catalog number.
[105] Not for use on KX operators.
[106] Reduces the depth of illuminated push buttons with contact blocks by over 33%.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Square D Offering According to Class, Division, and Group

Table 19.170: Square D Offering According to Class, Division, and Group

For			Use	
Class	Division	Group(s)		
I	1	A	1.	Intrinsically Safe System
I	1	B, C, D	1.	9001 BR station
			2.	Intrinsically Safe System
I	2	A	1.	9001 K, SK, KX control stations with restrictions *[107] [108]*
			2.	Intrinsically Safe System
I	2	B, C, D	1.	9001 BR station
			2.	9001 K, SK, KX control stations with restrictions *[107] [108]*
			3.	Intrinsically Safe System
II	1	E, F, G	1.	9001 BR station
			2.	Intrinsically Safe System
II	2	E, F	1.	9001 BR station
			2.	9001 K, SK, KX control stations with restrictions *[107] [108]*
			3.	Intrinsically Safe System
II	2	G	1.	9001 BR station
			2.	9001 K, SK, KX control stations with restrictions *[109] [108]*
			3.	Intrinsically Safe System
III	1, 2	—	1.	9001 BR Station
			2.	9001 K, SK, KX control stations with restrictions *[109] [108]*
			3.	Intrinsically Safe System

Hazardous locations do not always require the use of explosion-proof equipment like the Class 9001 Type BR control stations. Selecting the most appropriate device for the location can save you money. For more information on the types of hazardous locations, contact your local electrical inspector.

Table 19.169: Hazardous Locations

Types K, SK — File: E10054 (N) CCN: NOIV — File: LR26817 Class: 3218 02



Hermetically Sealed Logic Reed Contact Blocks

Table 19.171: Hermetically Sealed Logic Reed Contact Blocks *[110] [111]*

Suitable for use on low energy level circuits

Description	Symbol	Type *[112]*
The maximum number of logic and/or power reed contact blocks per operator is as indicated on individual selection tables for standard contact blocks, **except**: • On 3 position selector switches with cams C, D, E, F, G, L, or M, mount reed blocks on **one side only** (either side), maximum 2 in tandem. • On 4 position selector switches, mount reed blocks on **one side only** (either side), maximum 2 in tandem. • On joysticks or on Type KR8 or SKR8 push-pull operators, mount reed blocks on **one side only** (either side), maximum 2 in tandem.		KA41
		KA42
		KA43
		KA44
		KA45

Max. Vac/Vdc	Maximum Load		
	Resistive	Inductive	Continuous
32/30	.25 A	.10 A	.5 A
120/100	8 VA	3 VA	.5 A

Hermetically Sealed Power Reed Contact Blocks

Table 19.172: Hermetically Sealed Power Reed Contact Blocks *[110] [111] [113]*

Description	Symbol	Type *[112]*
The maximum number of logic and/or power reed contact blocks per operator is as indicated on individual selection tables for standard contact blocks, **except**: • On 3 position selector switches with cams C, D, E, F, G, L, or M, mount reed blocks on **one side only** (either side), maximum 2 in tandem. • On 4 position selector switches, mount reed blocks on **one side only** (either side), maximum 2 in tandem. • On joysticks or on Type KR8 or SKR8 push-pull operators, mount reed blocks on **one side only** (either side), maximum 2 in tandem.		KA51
		KA52
		KA53
		KA54
		KA55

Volts	Make		Break		Continuous
	A	VA	A	VA	
AC NEMA C300 *[114]*					
120	10.00	1200	1.000	120	3.0
240	5.00		.500		
DC NEMA Q150 *[115]*					
115	.50	58	.50	58	3.0

[107] Any Class 9001 Type K, SK or KX operator can be used in an area classified as Class I, Division 2 hazardous locations, if:
1. Only logic (KA40 series) or power (KA50 series) reed contact blocks are used.
2. All Type K and SK illuminated operators are UL approved for use in Class I Division 2 areas. (Add Form Y243 to single lamp Push-To-Test pilot lights.)
3. Type KX illuminated operators do not use 4 lamp light modules, or 2 lamp light modules other than the transformer type. (Add Form Y243 to single lamp Push-To-Test pilot lights.)
4. The operators are mounted in any NEMA 4 & 13 enclosures.

[108] UL Listed: File E10054(N), CCN NOIV.
[109] Any Class 9001 Type K, SK, or KX operator mounted in a Class 9001 Type KY, KYSS, KYAF, SKY enclosure may be used, except potentiometer operators.
[110] Not for use in pendant stations.
[111] When ordering, add prefix 9001 to the catalog number.
[112] All contact blocks listed below accept #12–18 solid or stranded wire.
[113] The power reed contact blocks can be used with standard industrial relays and starters through NEMA Size 4. Minimum voltage is 5 V and the minimum current is 1 mA.
[114] Inductive Rating—35% Power Factor.
[115] Inductive and Resistive Ratings


© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type K, SK, and KX Contact Block "H" Numbers

The design of Class 9001 Type KA contact blocks allows them to be mounted side by side and/or in tandem. This enables you to specify an operator and a specific arrangement of contact blocks (shipped fully assembled) with a single Type number.


Table 19.173: "H" Codes

	Suffix No. (Add to Operator Type)	Positions					
		1	2	3	4	5	6
Example: A Type KR1B push button with 2 Type KA1 contact blocks would be Class 9001 Type KR1BH2.	H1	KA1					
	H2	KA1	KA1				
	H3	KA1	KA1	KA1			
	H4	KA1	KA1	KA1	KA1		
	H5	KA2					
	H6	KA3					
	H7	KA2	KA2				
	H8	KA3	KA3				
	H9	KA4	KA1				
	H10	KA4	KA5				
	H11	KA1	KA1		KA1		
	H12	KA2	KA3	KA2	KA3		
	H13		KA1				
	H14		KA3				
	H15	KA2	KA3	KA2			
	H16	KA2	KA3	KA2	KA3		
	H17	KA1	KA1	KA2			
	H18	KA3	KA1	KA2			
	H19	KA1	KA1	KA3		KA3	
	H21	KA2	KA3	KA1	KA1	KA1	
	H23	KA1	KA1	KA1	KA1	KA1	KA1
	H24	KA1	KA2				
	H25	KA5	KA3				



NOTE: For "H" Codes not in this table, contact your local Schneider Electric Customer Care Center.

Mounting Hole for All Types K, SK, and KX Control Units

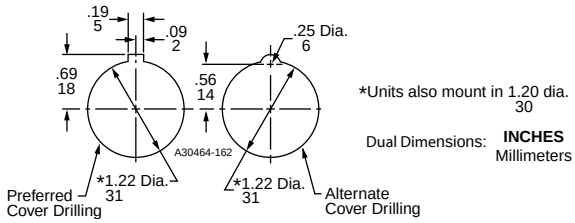


Hole Punch: Use Greenlee Tool #60242 to punch mounting hole and notch.


Maximum Contact Block Usage(Includes Types K, SK and KX)

- **2 blocks mounted side by side only:** Any 2, 3 or 4 position **spring return** selector switch (non-illuminated, illuminated or keyed).
- **2 blocks mounted in tandem 1 side only:** Any 2 operator interlocked push button.
- **2 blocks mounted in tandem (total of four blocks):** Any selector push button, keyed push button, 2, 3, or 4 position **maintained** selector switch (non-illuminated, illuminated or keyed), push-pull operators (non-illuminated or illuminated), joy stick, dual push button.
- **3 blocks mounted in tandem (total of six blocks):** Single momentary push buttons (non-illuminated or illuminated).

Table 19.174: Dimensions When Using Contact Blocks



Standard Blocks



Reed Blocks

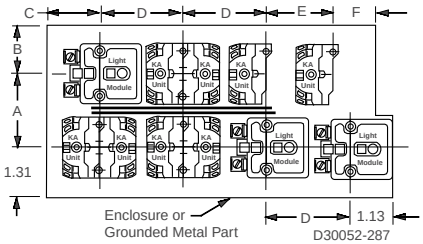


Table 19.175: Basic Operators (Without Color Caps, Mushroom Buttons, Knobs, Selector Switch Cams, Contact Blocks, Light Modules, or Legend Plates)


Description	For UL Types/NEMA	
	1, 3R, 4, 12, 13 *[116]*	4, 4X, 13 *[116]*
Non-Illuminated Push Button (Extended Guard)	KR2	SKR2
Non-Illuminated Push Button (No Guard)	KR3	SKR3
Non-Illuminated Push Button (Mushroom Button/ Screw-On)	KR20	SKR20
Non-Illuminated Dual Push Button (Momentary)	KR6	—
Non-Illuminated Dual Push Button (Momentary Interlocked)	KR67	—
Non-Illuminated Dual Push Button (Maintained Interlocked)	KR7	—
Momentary Pull—Maintained Neutral—Momentary Push	KR8 *[117] [118]*	SKR8 *[117]*
Maintained Pull—Maintained Push	KR9 *[117] [118]*	SKR9 *[117]*
Illuminated Push Button (Full Guard—Plastic Top)	K1L *[119]*	SK1L *[119]*
Illuminated Push Button and Push-To-Test (No Guard)	K2L *[119] [120]*	SK2L *[119] [120]*
Illuminated Push Button (Full Guard—Metal Top)	K3L *[119]*	—
Standard Pilot Light	KP	SKP
3 Position Maintained Selector Switch	KS4 *[117]*	SKS4 *[117]*
3 Position Spring Return Both Sides To Center—Selector Switch	KS5 *[117]*	SKS5 *[117]*
3 Position Spring Return Left To Center—Selector Switch	KS6 *[117]*	SKS6 *[117]*
3 Position Spring Return Right To Center—Selector Switch	KS7 *[117]*	SKS7 *[117]*


Table 19.176: Min. Centerline Spacing, Type K & SK Control Units


Legend Plate	Operator	Centerline Spacing (in.)					
		A	B	C	D	E	F
Legend Plate Orientation Position #1							
KN2 KN5	Standard Push Button	1.75	1.31	1.44	2.25	1.69	0.88
	1.375 in. Dia. Mushroom	1.75	1.31	1.44	2.25	1.69	0.88
	2.25 in. Dia. Mushroom	2.25	1.31	1.44	2.25	2.25	1.12
	Selector Switch Knobs	1.75	1.31	1.44	2.25	1.69	0.88
KN3	Standard Push Button	2.00	1.31	1.44	2.25	1.75	0.88
	1.375 in. Dia. Mushroom	2.00	1.31	1.44	2.25	1.75	0.88
	2.25 in. Dia. Mushroom	2.25	1.31	1.44	2.25	2.25	1.12
	Selector Switch Knobs	2.00	1.31	1.44	2.25	1.75	0.88
KN4	Standard Push Button	1.94	1.31	1.44	2.25	1.62	0.88
	1.375 in. Dia. Mushroom	1.94	1.31	1.44	2.25	1.62	0.88
	2.25 in. Dia. Mushroom	2.25	1.31	1.44	2.25	2.25	1.12
	Selector Switch Knobs	1.74	1.31	1.44	2.25	1.62	0.88
KN6	Standard Push Button	2.38	1.62	1.44	2.25	2.25	1.12
	1.375 in. Dia. Mushroom	2.38	1.62	1.44	2.25	2.25	1.12
	2.25 in. Dia. Mushroom	2.38	1.62	1.44	2.25	2.25	1.12
	Selector Switch Knobs	2.38	1.62	1.44	2.25	2.25	1.12
Legend Plate Orientation Position #2							
KN2 KN5	Standard Push Button	1.62	1.31	1.44	2.25	1.75	0.88
	1.375 in. Dia. Mushroom	1.62	1.31	1.44	2.25	1.75	0.88
	2.25 in. Dia. Mushroom	2.25	1.31	1.44	2.25	2.25	1.12
	Selector Switch Knobs	1.62	1.31	1.44	2.25	1.75	0.88
KN3	Standard Push Button	1.75	1.31	1.44	2.25	2.00	0.88
	1.375 in. Dia. Mushroom	1.75	1.31	1.44	2.25	2.00	0.88
	2.25 in. Dia. Mushroom	2.25	1.31	1.44	2.25	2.25	1.12
	Selector Switch Knobs	1.75	1.31	1.44	2.25	2.00	0.88
KN4	Standard Push Button	1.62	1.31	1.44	2.25	1.94	1.00
	1.375 in. Dia. Mushroom	1.62	1.31	1.44	2.25	1.94	1.00
	2.25 in. Dia. Mushroom	2.25	1.31	1.44	2.25	2.25	1.12
	Selector Switch Knobs	1.62	1.31	1.44	2.25	1.94	1.00
KN6	Standard Push Button	2.25	1.31	1.62	2.38	2.38	0.88
	1.375 in. Dia. Mushroom	2.25	1.31	1.62	2.38	2.38	0.88
	2.25 in. Dia. Mushroom	2.25	1.31	1.62	2.38	2.38	1.12
	Selector Switch Knobs	2.25	1.31	1.62	2.38	2.38	0.88

[116] When ordering, add prefix 9001 to the catalog number.
[117] Operator can be converted to an illuminated operator by removing the liner (6512240601) and adding a light module.
[118] These operators can be supplied with 1-3/8 in or 2-1/4 in dia. mushroom buttons. For 1-3/8 in.: add ( ) 20 to type number. For 2-1/4 in.: Add ( ) 21 to type number. The ( ) refers to the color chosen. Voids UL and NEMA 6 Rating.
[119] Operator can be converted to a non-illuminated operator by adding liner (6512240601).
[120] Operator includes jumper wires for push-to-test conversion.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XB6DW•••B


XB6CE•••B


XB6AF•••B


XB6 Complete Devices


Table 19.177: Illuminated Push Buttons (12–24 Vac/Vdc LED included)
Complete Units with Quick Connectors/Solder Tabs


Type of Operator	Type of Contact		Color	Rectangular	Square	Round
	N.O.	N.C.		Catalog Number		
Flush, spring return	1	—	White	XB6DW1B1B	XB6CW1B1B	XB6AW1B1B
			Green	XB6DW3B1B	XB6CW3B1B	XB6AW3B1B
	—	1	Red	XB6DW4B2B	XB6CW4B2B	XB6AW4B2B
	1	1	White	XB6DW1B5B	XB6CW1B5B	XB6AW1B5B
			Green	XB6DW3B5B	XB6CW3B5B	XB6AW3B5B
			Red	XB6DW4B5B	—	XB6AW4B5B
			Yellow	XB6DW5B5B	XB6CW5B5B	—
			Blue	XB6DW6B5B	—	XB6AW6B5B
			Green	XB6DF3B1B	XB6CF3B1B	XB6AF3B1B
			Yellow	XB6DF5B1B	—	—
	1	1	White	XB6DF1B5B	XB6CF1B5B	XB6AF1B5B
			Green	XB6DF3B5B	XB6CF3B5B	XB6AF3B5B
			Red	XB6DF4B5B	—	—
Extended, spring return	1	—	White	—	XB6CE1B1B	—
			Green	—	—	XB6AE3B1B
			Green	—	—	XB6AE3B5B


© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XB6AV••B


XB6DA••B


XB6CA••B


XB6AA••B


XB6AS8345B



XB6AS9345B

Table 19.178: Pilot Lights (120 Vac LED)
Complete Units with Quick Connectors/Solder Tabs

Color	Rectangular	Square	Round
	Catalog Number		
Green	—	—	XB6AV3GB
Red	—	—	XB6AV4GB
Yellow	—	—	XB6AV5GB

Table 19.179: Push Buttons (Non-Illuminated)
Complete Units with Quick Connectors/Solder Tabs

Type of Push	Type of Contact		Color	Rectangular	Square	Round
	N.O.	N.C.		Catalog Number		
Flush, spring return	1	—	White	XB6DA11B	XB6CA11B	—
			Black	—	XB6CA21B	XB6AA21B
			Green	XB6DA31B	—	XB6AA31B
			Blue	XB6DA61B	—	—
	—	1	Black	XB6DA22B	—	—
			Black	—	XB6CA25B	XB6AA25B
			Green	XB6DA35B	—	XB6AA35B
			Red	XB6DA45B	XB6CA45B	—

Table 19.180: Trigger Action Emergency Stop Mushroom Head Push Buttons (Color Red) *[1]*

Shape of Head	Type of Push	Type of Contact		Diameter of Head (mm)	Catalog Number
		N.O.	N.C.		
	Turn-to-release	—	1	30	XB6AS8342B
		1	1	30	XB6AS8345B
	Key release	—	1	30	—
		1	1	30	—

[1] Complies with ISO 13850 standards for Emergency Stop push buttons when used with circular Legend Plate ZB6Y7330.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Class 9003
Type K Rotary Cam Switches

Applications		Used in building control panels and consoles, Type K cam switches allow control of processes and utilities in industry and buildings, and direct control for simple machines.					
							
Functions	Off-On/On-Off switches	1 to 6-pole	1 to 6-pole				
	Stepping switches	2 to 12-position, 1 to 4-pole	—				
	Changeover switches	1 to 5-pole	1 to 4-pole				
	Measurement switches	Voltmeter and ammeter	—				
	Reversing switches	2 and 3-pole	2 and 3-pole				
	Reversing star-delta switches	Star-delta	Star-delta				
	Pole change switches	2 and 3-speed	2-speed				
Conventional rated thermal current (Ith)		20 A	32 A	50 A	63 A	115 A	150 A
Electrical operating characteristics		690 V	690 V	690 V	690 V	690 V	690 V
		AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase
		230 V - 2.2 kW - 8.3 A	230 V - 5.5 kW	230 V - 7.5 kW	230 V - kW	230 V - 5 kW	230 V - 22 kW
		AC - 15	AC - 15	AC - 15	–	–	–
		230 V - 4 A	230 V - 14 A	230 V - 6 A			
Front plate degree of protection		IP 40 IP 65 (with seal)	IP 40				
Product Composition		Complete switches and custom Adaptable sub-assemblies	Complete switches				
Compatibility		Ø 22 control and signalling units	–				
Mounting	Front Mounting	Multi-fixing Single Ø 22 hole	By 4 holes on 48 mm centers			By 4 holes on 68 mm centers	
	Rear Mounting	Screw fixing, 4 holes on 36 mm centers	Screw fixing, 4 holes on 48 mm centers			Screw fixing, 4 holes on 68 mm centers	
Front plate dimensions (mm)		45 x 45 60 x 60 (adaptable sub-assemblies)	64 x 64			88 x 88	
Operating heads		Black and red standard and long handles Key operator Metallic head Metallic legend with black marking or black legend with white marking	Black standard handle Metallic legend, black marking				
Approvals		UL-CSA EN/IEC 60947-3 EN/IEC 60947-5-1	cULus EN/IEC 60947-3				
Type		Type K2	Type K30–K150				
Cam switch model *[1]*		**Class 9003, K2**	**K30**	**K50**	**K63**	**K115**	**K150**

[1] Incomplete part numbers. Contact your local supplier for assistance.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Instructions for 9003K2 Key Sheet

The Key Sheet for ordering a 9003K2 cam switch is on page 19-72, and an example of a completed key sheet is on page 19-73. The instructions below are for filling out the key sheet on page 19-72.

1. Select the box for K2 (20 A).
2. Identify the Product quantity in the box provided.
3. Verify front mounting by selecting the box: Front Mounting.
4. If ordering a base/contact block only, select 22 mm plastic or 22 mm metal mounting. Then complete the following:
   a. ③ Switching Angle (positions)
   b. ④ Contact scheme and jumpers (pre-wired)
5. If ordering a complete switch (base/contact block, head, legend), check the box. Then complete the following:
   a. ① Operating head preference
   b. ② Legend preference
   c. ③ Switching angle (positions)
   d. ④ Contact scheme and jumpers (pre-wired)
6. Operating head preference ① (identify the operating head preferred)
7. Legend preference ② (identify the legend preference)
8. Switching angle (positions) ③ and special legend marking
   a. Identify whether the switch need is 30° or 60°, or 45° or 90° switching angle.
   b. Fill in the legend markings desired at the positions indicated. Zero degrees is always straight up.
9. The rotation of the operator stops clockwise at the top or 0° position. If full rotation through 360° is desired, the Full rotation through 360° box must be checked.
10. Contact scheme and jumpers (pre-wired) ④
    a. If jumpers are desired to be pre-wired, draw a horizontal line between the terminals to be jumpered per the example on page 19-73.
    b. Refer to the Legend at the bottom of page 19-72 for contact sequences, i.e.: X indicates contact closure. See page 19-73 for examples of filling in this portion of the key sheet.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

9003K2 Cam Switch Order Form

Order No. _____ **Date :** _____

Agency: _____

Branch: _____

Customer: _____

Address: _____

Delivery instructions:

9003K2 (20 A): ☐

Product quantity: ☐ **Front mounting** ☐

Base/contact block only (no operating head):

∅22 plastic: ☐ ∅22 metal: ☐

Complete: ③ ④

Complete switch (base/contact block, head, legend) ☐

Complete: ① ② ③ ④

For 22 mm plastic mounting:

① Operating head reference: **9003K**

② Legend reference: **9003KZ.....**

or for mounting with metal base:

① Operating head reference: **KAX Z.....**

② Legend reference: **XBC Y .....**

Special legend marking:

As per diagram on left: ☐ As per form: ☐ **FAX**

Accessories / comments: .....


.....

Product reference:

Type : **K.....**


③ Switching angle (positions)

30° or 60° 45° **or** 90°

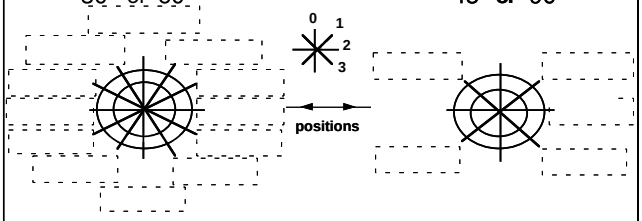

Full rotation through 360°: ☐

④ **Contact scheme and jumpers (pre-wired):**

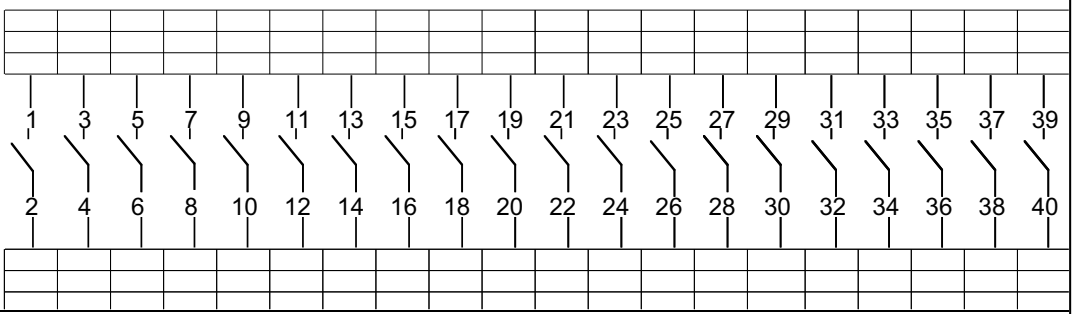

✳	x	1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39
		2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40

(x) Key withdrawal position for key operators; by default, withdrawal in all positions.

Conditions for provision of spring return function:

R , Spring return to 30° from 0° position or to last position after a 90° angle (for maximum of 3 contacts simultaneously)

✕ Contact closed in 1 position.	✕ ✕ Contact closed with break between the 2 positions (for angle >= 45°)	✕ ✕ ✕ Contact closed and maintained between several successive positions	✕ ✕ Contact closed and maintained between two positions	✕ ✕ **Overlap of two contacts between two positions**	✳ **Contact overlapping on previous and next positions**

☐ Check the box to confirm selection ..... Fill in with text

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

9003K2 Cam Switch Order Form—Example

Order No. _____ **Date :** _____

Agency: _____
Branch: _____
Customer: _____
Address: _____

Delivery instructions:

9003K2 (20 A): X

Product quantity: 1 | **Front mounting** X

Base/contact block only (no operating head):
∅22 plastic: ☐ ∅22 metal: ☐
Complete: ③ ④


Complete switch (base/contact block, head, legend) X
Complete: ① ② ③ ④

Product reference:
Type : K . . . . . .


For 22 mm plastic mounting:
① Operating head reference: **9003K AC1B**
② Legend reference: **9003KZ18**
or for mounting with metal base:
① Operating head reference: **KAX Z . . . . . .**
② Legend reference: **XBC Y . . . . .**

③ Switching angle (positions)

30° or 60°



45° or 90°




Full rotation through 360°: ☐

Special legend marking:
As per diagram on left: ☐ As per form: ☐ FAX

Accessories / comments: KZ 36 . . . . . .
. . . . . .

④ **Contact scheme and jumpers (pre-wired):**

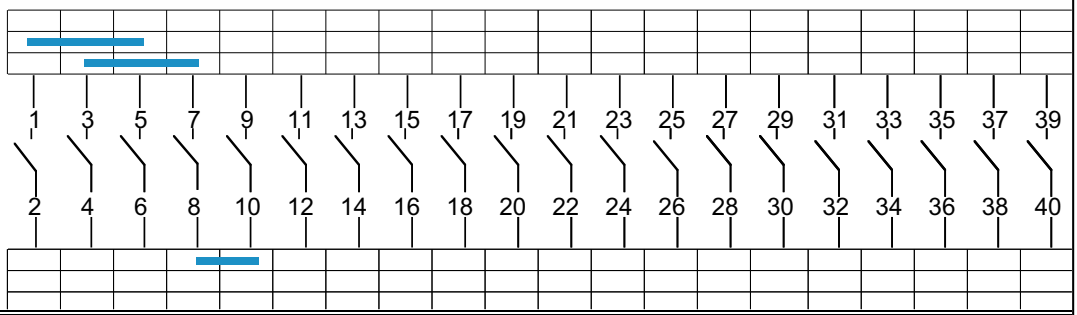

	x		1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39
			2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40
A		330°	× ×
0		0°	× ×
1		30°	× ×
2		60°	× ×

(x) Key withdrawal position for key operators; by default, withdrawal in all positions.

Conditions for provision of spring return function:
R , Spring return to 30° from 0° position or to last position after a 90° angle (for maximum of 3 contacts simultaneously)

×	Contact closed in 1 position.	× ×	Contact closed with break between the 2 positions (for angle >= 45°)	× ×	Contact closed and maintained between several successive positions	× ×	Contact closed and maintained between two positions
×	**Overlap of two contacts between two positions**	×	**Contact overlapping on previous and next positions**				

☐ Check the box to confirm selection . . . . . Fill in with text

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XALD101H29H7



XALK174H7



XALD211H29H7



XALD321H29H7



XAL Control Stations, Enclosures, and Accessories

Table 19.181: Start or Stop Function Polycarbonate; Light gray base, RAL7035; Dark gray lid, RAL7016

Description	Type of Push	Type of Contact		Marking	Catalog Number
		N.O.	N.C.		
Marking on Legend Holder					
1 momentary push button	Flush black	1	—	Start	XALD101H29H7
	Flush red	—	1	Stop	XALD111H29H7
Marking on Legend Holder					
1 mushroom head push button Ø 40 mm, momentary	Red	—	1	Stop on red legend	XALD164H29H7

Table 19.182: Trigger Action Emergency Stop Polycarbonate; Light gray base, RAL7035; Yellow lid, RAL1012

Description	Type	Type of Contact		Catalog Number
		N.O.	N.C.	
1 mushroom head push button Ø 40 mm, red Turn-to-release	Trigger action *[1]*	—	1	XALK178H7
1 mushroom head push button Ø 40 mm, red Key release (Key No. 455)	Trigger action *[1]*	—	1	XALK188H7
1 mushroom head push button Ø 40 mm, red Push-pull	Trigger action *[2]*	—	1	XALK198H7

Table 19.183: Start-Stop Function Polycarbonate; Light gray base, RAL7035; Dark gray lid, RAL7016

Description	Type of Push	Type of Contact		Text	Catalog Number
		N.O.	N.C.		
2 momentary push buttons	1 flush black 1 flush red	1 —	— 1	Start Stop	XALD211H29H7
	1 flush black 1 flush black	1 1	— —	Forward Reverse	XALD251H29H7

Table 19.184: Three Function Polycarbonate; Light gray base, RAL7035; Dark gray lid, RAL7016

Description	Type of Push	Type of Contact		Text	Catalog Number
		N.O.	N.C.		
3 momentary push buttons (no markings)	1 flush black 1 flush red 1 flush black	1 — 1	— 1 —	Open Stop Close	XALD351H29H7
		1 — 1	— 1 —	Forward Stop Reverse	XALD311H29H7
		1 — 1	— 1 —	Up Stop Down	XALD321H29H7

Table 19.185: Empty Enclosures *[3]*

Description	Number of Holes	Catalog Number
For normal environments, CSA approved and UL Listed (with stainless steel lid mounting screws)		
Light gray base RAL7035 Dark gray lid RAL7016	1 2 3 4 5	XALD01H7 XALD02H7 XALD03H7 XALD04H7 XALD05H7
Light gray base RAL7035 Yellow lid RAL1012	1	XALK01H7

[1] Emergency Stop (EN / IEC 13850)
[2] Emergency Off (IEC 60364-5-53)
[3] For customer assembly using XB5 operators and standard screw-terminal contact blocks, see XB5 Non-Illuminated Operators, page 19-30.
Either mounting method can be used: contact block ZENL mounting on metal plate, or contact block ZBE mounting on operator with mounting collar.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

XAP Enclosures and Accessories



XAPA1100



XAPA1104

Table 19.186: Undrilled Enclosures, Glass-Reinforced Polyester

Type		H x W Dimensions		Catalog Number
		IN	mm	
NEMA 4, 4X, 13 Usable depth 3.27 in. (83 mm)	Without hinges	3.34 x 5.75	85 x 146	XAPA1100
		3.34 x 8.90	85 x 226	XAPA2100
		5.95 x 9.49	151 x 241	XAPA3100

Table 19.187: Drilled Insulated Enclosures, Glass-Reinforced Polyester *[4]*

Type	Number of Knockouts 22 mm	Number of Rows		H x W Dimensions		Catalog Number
		Vertical	Horizontal	IN	mm	
NEMA 4, 4X, 13 Usable depth 3.27 in. (83 mm) 1.58 in. (40 mm) centerline spacing of holes	1	1	1	3.35 X 5.75	85 X 146	XAPA1110
	2	1	2	3.35 X 5.75	85 X 146	XAPA1120
	4	2	2	3.35 X 5.75	85 X 146	XAPA1104
	8	2	4	3.35 X 8.90	85 X 226	XAPA2108
	16	4	4	5.94 X 9.49	151 X 241	XAPA3116

Table 19.188: Drilled Die Cast Enclosures (Painted Gray RAL7032) *[5]*

	Type	Material	Usable Depth		Number of 22 mm holes	H x W x D Dimensions		Catalog Number
			IN	mm		IN	mm	
 XAPG29703	NEMA 4, 13 1.18 in. (30 mm) centerline spacing of holes for horizontal mount	Zinc	1.93	49	2	3.15 x 3.15 x 2.03	80 x 80 x 51.5	XAPG19702
					3	5.12 x 3.15 x 2.03	130 x 80 x 51.5	XAPG29703
					4	6.90 x 3.15 x 2.03	175 x 80 x 51.5	XAPG39704
			2.93	74.5	4	6.90 x 3.15 x 3.03	175 x 80 x 77	XAPG39804
	NEMA 4, 13 1.58 in. (40 mm) centerline spacing of holes for vertical mount	Zinc	1.93	1.93	1	3.15 x 3.15 x 2.03	80 x 80 x 51.5	XAPG19201
					2	5.12 x 3.15 x 2.03	130 x 80 x 51.5	XAPG29202
					3	6.90 x 3.15 x 2.03	175 x 80 x 51.5	XAPG39203
			2.93	74.5	1	3.15 x 3.15 x 3.03	80 x 80 x 77	XAPG19501
					2	5.12 x 3.15 x 3.03	130 x 80 x 77	XAPG29502
					3	6.90 x 3.15 x 3.03	175 x 80 x 77	XAPG39503
					4	8.66 x 3.15 x 3.03	220 x 80 x 77	XAPG49504
		Aluminum	2.93	74.5	5	12.20 x 3.35 x 3.03	310 x 85 x 77	XAPG59505



XAPE302



XAPE303

Table 19.189: Drilled Flush Plates *[5]*

Type	Material	Number of 22 mm holes	H x W x D Dimensions		Catalog Number
			IN	mm	
NEMA 4, 13 1.18 in. (30 mm) centerline spacing of holes	Anodized Aluminum	1	2.83 x 2.83	72 x 72	XAPE301
		2	4.13 x 2.83	105 x 72	XAPE302
		3	5.43 x 2.83	138 x 72	XAPE303
		4	6.73 x 2.83	171 x 72	XAPE304
		5	8.03 x 2.83	204 x 72	XAPE305

Table 19.190: Optional Back Box (for finger protection, if required)

Type	Material	For Use With	Catalog Number
Protective rear covers	Insulating Fiberglass	Flush plate XAPE301	XAPE901
		Flush plate XAPE302	XAPE902
		Flush plate XAPE303	XAPE903
		Flush plate XAPE304	XAPE904
		Flush plate XAPE305	XAPE905

[4] Uses standard XB5 products such as XB5 Complete Devices, page 19-27. Do not use ZENL style contact blocks.
[5] Can use either XB4 or XB5 products.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



NEMA 1 Surface Mounting Type BG201



NEMA 1 Flush Mounting (w/o pullbox) Type BF201



NEMA 4 Type BW243



NEMA 7 and 9 Type BR103

9001B Standard Duty Control Stations

Table 19.191: Control Stations

No. of Buttons	Nameplate Markings and Features	Contact Symbol *[6]*	Surface Mounting NEMA1	Stainless Steel Flush Plate *[7]*	Watertight and Dusttight NEMA4	For Hazardous Locations NEMA 7 & 9 *[8]*
			Type *[9]*	Type *[9]*	Type *[9]*	Type *[9]*
	Stop (Mushroom Button)	3	—	—	BW151	BR103
	Stop (Lockout)	3	—	—	BW148	BR104
	Off-On (Selector Switch)	19	BG111	—	—	—
	Hand-Off-Auto (Selector Switch)	17	BG112	—	—	—
2	Start-Stop	145	BG201	BF201	BW240	BR204
	Start-Stop (Mushroom on Stop)	145	BG203	—	BW250	—
	Start-Stop (Lockout on Stop)	145	BG204	—	BW241	BR204
	Forward-Reverse	146	BG206	—	BW242	—
	Open-Close	146	BG207	—	BW244	—
	Up-Down	146	BG208	—	BW243	BR208
	Raise-Lower	146	BG209	—	—	—
	On-Off	145	—	—	BW245	—
	On-Off	146	—	BF211	—	—
	Universal (w/o legend inserts)	25	BG214	—	BW260	—
	Start-Stop (Maintained Contact)	10	BG215	—	BW255	—
	On -Off (Maintained Contact)	10	—	—	BW256	BR216
	Universal (Maintained contact w/o legend inserts)	10	—	—	—	BR218
	Forward-Reverse-Stop	109	BG302	—	—	—
	Opn-Close-Stop	109	BG303	—	—	—
	Up-Down-Stop	109	BG305	—	—	—
	Start-Jog-Stop	109	BG316	—	—	—
	Universal (w/o legend inserts)	8	BG307	—	—	—
	Start-Stop, Red Pilot Light: 120Vac/dc	145 & 121	BG308	—	—	—

For Replacement Interiors, see Replacement Interiors for Type B Standard Duty Push Button Stations, page 19-77.

For Ratings, see Electrical Contact Ratings, page 19-77.

[6] See Replacement Parts for Type B Standard Duty Control Stations, page 19-77.
[7] Uses standard 2.0 or 2.13 in. deep wall boxes, single gang for Types BF1 and BF2, two gang for Type BF3
[8] Also rated for Class I, Division I and II, Groups B, C, or D; Class II, Division I and II, Groups E, F, or G
[9] When ordering, add prefix 9001 to the catalog number.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Replacement Parts for Type B Standard Duty Control Stations

NOTE: Contact block assemblies for all Type BG stations include cover and contact block. Replacement contact block assemblies and terminal block wiring receptacles for push buttons have provision for 1 N.O. & 1 N.C. circuit on each button. Unneeded circuits need not be wired.

Table 19.192: Mounting Bracket

Description	Catalog Number
C-Shaped Mounting Bracket for 9001BR Interior	3110112001



Type BGC214
(Type BGC contact block assemblies include cover.)



Type BGB214




BOC361

Table 19.193: Electrical Contact Ratings *[10]*

AC—NEMA B600							DC—NEMA P600		
Volts	Inductive 35% Power Factor				Continuous Carrying Amperes	Resistive 75% Power Factor	Volts	Inductive and Resistive	
	Make		Break					Make and Break Amperes	Continuous Carrying Amperes
	A	VA	A	VA		Make, Break and Continuous Carrying Amperes			
120	30.5	3600	3.75	360	5	5	120	1.1	5
240	15	3600	1.5	360	5	5	240	0.55	5
480	7.5	3600	.75	360	5	5	600	0.2	5
600	6	3600	.6	360	5	5			

Contact Symbols

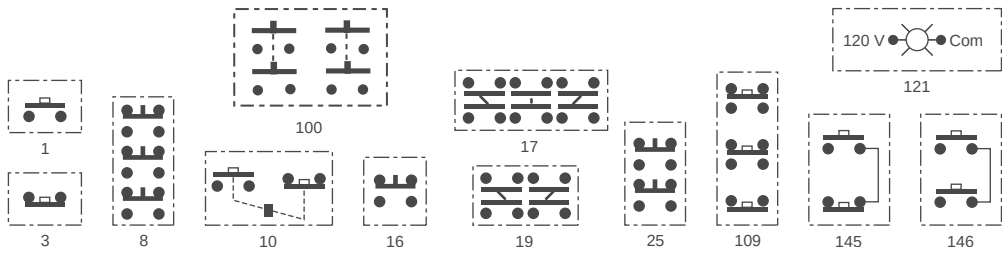


[10] OSHA Regulation, Section 1910.70, Overhead and Gantry Cranes, limits the voltage of pendant push buttons to 150 Vac or 300 Vdc.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

9001KY and 9001SKY Control Stations

Table 19.194: Empty Enclosures (for Customer Assembly) *[11]*

	UL Types 1, 3 and 13/ NEMA 1, 3, and 13	UL Types 1, 3, 4 and 13/ NEMA 1, 3, 4 and 13	UL Types 1, 3, 4, 4X and 13/ NEMA 1, 3, 4, 4X and 13	
				
No of Holes	**Sheet Steel**	**Die Cast Zinc**	**Stainless Steel (304)**	**Polymeric (Plastic)**
	Type	**Type**	**Type**	**Type**
1	KYAF1	KY1	KYSS1	SKY1
2	KYAF2	KY2 *[12]*	KYSS2	SKY2
3	KYAF3	KY3 *[12]*	KYSS3	SKY3
4	KYAF4	KY4 *[12]*	KYSS4	SKY4
6	KYAF6	KY6	KYSS6	—

NOTE: See Table 19.197 Assembled Control Stations , page 19-78



KYG1Y
(mushroom head not included)

Table 19.195: Guarded Enclosures

	UL Types 1, 3, 4 and 13/ NEMA 1, 3, 4 and 13		
No of Holes	**Die Cast Zinc**		
	Cover Color	**Box Color**	**Type**
1	Gray	Gray	KYG1 *[13]*
1	Yellow	Gray	KYG1Y *[13]*

NOTE: See Table 19.197 Assembled Control Stations , page 19-78



K26

Table 19.196: Stainless Steel (302) NEMA 1 Flush Plates *[14]*

No of Holes	Description	Type
1	1 Hole flush plate, cover screws, insulating liners	K25
2	2 Hole flush plate, cover screws, insulating liners	K26
3	3 Hole flush plate, cover screws, insulating liners	K27
4	4 Hole flush plate, cover screws, insulating liners	K28

Assembled 9001KY/SKY Control Stations

Table 19.197: Assembled Control Stations

	No of Holes	Operator Style and Features	Type	Consists of			
				Enclosure	Operators	Contact Blocks	Legend Plates
	UL Types 1, 3, 4 and 13/NEMA 1, 3, 4 and 13 Die Cast Zinc Enclosure *[15]*						
 Type KYK31	1	Selector Switch (3 Pos Maintained)	—	KY1	KS43B	KA1	Hand-Off-Auto
		Selector Switch (2 Pos Maintained)	—	KY1	KS11B	KA1	Off-On
		Push Button (Momentary)	KYK11	KY1	KR1B	KA1	Start
		Push Button (Momentary)	—	KY1	KR1R	KA1	Stop
		Mushroom Button (Momentary)	KYK14	KY1	KR4R	KA1	Stop
		Push Button (with Lockout)	—	KY1	KR3R, K4	KA1	Stop
		Break Glass Operator	KYK116	KY1	K15	KA1	To Stop—Break Glass
		Break Glass Operator (Red Enclosure)	KYK117	KY1S1	K15	KA1	To Stop—Break Glass
	2	2 Push Buttons (Lockout on Stop)	—	KY2	KR1B, KR3R, K4	KA1, KA1	Jog-Stop
		2 Push Buttons	KYK218	KY2	KR1B, KR3R	KA1, KA1	On-Off
		2 Push Buttons	KYK26	KY2	KR1B, KR1B	KA1, KA1	Open-Close
		2 Push Buttons	KYK25	KY2	KR1B, KR1B	KA1, KA1	Up-Down
		2 Push Buttons	KYK21	KY2	KR1B, KR3R	KA1, KA1	Start-Stop
		2 Push Buttons (with Sealed Contacts) *[16]*	—	KY2	KR1B, KR3R	KA51, KA51	Start-Stop
		2 Push Buttons (Lockout on Stop)	KYK23	KY2	KR1B, KR3R, K4	KA1, KA1	Start-Stop
		2 Push Buttons (Maintained/Interlocked)	KYK27	KY2	KR11GR	KA1	Start-Stop
		1 Push Button, 1 Mushroom Button	—	KY2	KR1B, KR4R	KA1, KA1	Start-Stop

[11] When ordering, add prefix 9001 to the catalog number.
[12] Only KN200 series legend plates will fit upright on these enclosures with their long axis vertical.
[13] Includes 1" NPT threaded conduit opening.
[14] To be used with a standard 2 x 3 in. general purpose switch box. A 2.5 in. deep switch box should be used if two Type KA contact blocks are mounted side by side. If two Type KA contact blocks are mounted in tandem, a 3.5 in. deep box should be used.
[15] Uses 9001K metal operators and metal legend plates.
[16] Control Station consists of components that are UL listed for use in Class 1, Division 2, Groups A, B, C, or D.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


Table 19.197 Assembled Control Stations (cont'd.)

	No of Holes	Operator Style and Features	Type	Consists of			
				Enclosure	Operators	Contact Blocks	Legend Plates
 Type KYSS300	3	3 Push Buttons	KYK31	KY3	KR1B, KR1B, KR3R	KA1, KA1, KA1	Forward; Reverse; Stop
		3 Push Buttons (Lockout on Stop)	—	KY3	KR1B, KR1B, KR3R, K4	KA1, KA1, KA1	Forward; Reverse; Stop
		3 Push Buttons (With Sealed Contacts & Lockout on Stop) *[17]*	—	KY3	KR1B, KR1B, KR3R, K4	KA51, KA51, KA51	Forward; Reverse; Stop
		3 Push Buttons	KYK33	KY3	KR1B, KR1B, KR3R	KA1, KA1, KA1	Open; Close; Stop
		Red 120v Pilot Light, 2 Push Buttons	KYK317	KY3	KP1R31, KR1B, KR3R	KA2, KA3	Start; Stop
		3 Push Buttons	KYK32	KY3	KR1B, KR1B, KR3R	KA1, KA1, KA1	Up; Down; Stop
		3 Push Buttons (Lockout on Stop)	—	KY3	KR1B, KR1B, KR3R, K4	KA1, KA1, KA1	Up ; Down; Stop
	UL Types 1, 3, 4 and 13/NEMA 1, 3, 4 and 13—Stainless Steel (304) *[18]*						
	1	Push Button (Momentary)	KYSS101	KYSS1	KR1B	KA1	Start
		Push Button (Momentary)	—	KYSS1	KR1B	KA3	Stop
		Selector Switch (2 Pos Maintained)	—	KYSS1	KS11B	KA1	Off-On
		Selector Switch (3 Pos Maintained)	KYSS111	KYSS1	KS43B	KA1	Hand-Off-Auto
	2	2 Push Buttons	KYSS201	KYSS2	KR1B, KR3R	KA1, KA3	Start; Stop
		2 Push Buttons (Lockout on Stop)	—	KYSS2	KR1B, KR3R, K5	KA1, KA3	Start; Stop
		2 Push Buttons (Maintained with Interlock)	—	KYSS2	KR11U	KA1, KA1	Start; Stop
		2 Push Buttons	—	KYSS2	KR1B, KR1B	KA1, KA1	Up; Down
 Type SKY201	**UL Types 1, 3, 4. 4X and 13/NEMA 1, 3, 4, 4X and 13—Stainless Steel (304)** *[19]*						
	1	Push Button (Momentary)	—	KYSS1	SKR1B	KA1	Start
		Push Button (Momentary)	KYSK103	KYSS1	SKR3R	KA3	Stop
		Selector Switch (2 Pos Maintained)	—	KYSS1	SKS11B	KA1	Off-On
		Selector Switch (3 Pos Maintained)	KYSK111	KYSS1	SKS43B	KA1	Hand-Off-Auto
	2	2 Push Buttons	KYSK201	KYSS2	SKR1B, SKR3R	KA1, KA3	Start; Stop
		2 Push Buttons (Lockout on Stop)	—	KYSS2	SKR1B, SKR3R, K5	KA1, KA3	Start; Stop
		2 Push Buttons (Maintained with Interlock)	—	KYSS2	SKR11U	KA1, KA1	Start; Stop
		2 Push Buttons	—	KYSS2	SKR1B, SKR1B	KA1, KA1	Up; Down
	UL Types 1, 3, 4. 4X and 13/NEMA 1, 3, 4, 4X and 13—Polymeric (Plastic) *[19]*						
		Selector Switch (3 Pos Maintained)	SKY111	SKY1	SKS43B	KA1	Hand-Off-Auto
	1	Selector Switch (2 Pos Maintained)	—	SKY1	SKS11B	KA1	Off-On
		Selector Switch (2 Pos Maintained with Sealed Contacts) *[17]*	—	SKY1	SKS11B	KA51	Off-On
		Push Button (with Lockout)	SKY105	SKY1	SKR3R, K5	KA3	Stop
	2	2 Push Buttons	SKY201	SKY2	SKR1B, SKR3R	KA1, KA3	Start-Stop
		2 Push Buttons (Lockout on Stop)	SKY203	SKY2	SKR1B, SKR1R, K5	KA1, KA3	Start-Stop
		2 Push Buttons (With Sealed Contacts) *[17]*	—	SKY2	SKR1B, SKR3R	KA51, KA51	Start-Stop
		2 Push Buttons (With Sealed Contacts) *[17]*	—	SKY2	SKR1B, SKR3R	KA51, KA51	On-Off
		2 Push Buttons	—	SKY2	SKR1B, SKR1B	KA1, KA1	Up-Down
	3	3 Push Buttons	SKY302	SKY3	SKR1B, SKR1B, SKR3R	KA1, KA1, KA3	Up-Down-Stop
		3 Push Buttons	—	SKY3	SKR1B, SKR1B, SKR3R	KA1, KA1, KA3	Open-Close-Stop
		Red 120v Pilot Light, 2 Push Buttons	—	SKY3	SKP1R31, SKR1B, SKR3R	KA1, KA3	Start-Stop
 Type KYG1Y2	**UL Types 1, 3, 4 and 13/NEMA 1, 3, 4 and 13 Die Cast Zinc Enclosures with Integral Guard**						
	1	Guarded Enclosure (grey) with 120V Red LED Pilot Light	—	KYG1	KP38LRR9	—	order separately
		Guarded Enclosure (grey) with 120V Green LED Pilot Light	—	KYG1	KP38LGG9	—	order separately
		Guarded Enclosure (Yellow Cover) with Red Push-Pull Mushroom	KYG1Y1 *[20]*	KYG1Y	KR9R	KA3	Push to Stop/ Pull to Start
		Guarded Enclosure (Yellow Cover) with Red Turn-To Release Mushroom	KYG1Y2 *[20]*	KYG1Y	KR16	KA3	Emergency Stop


[17] Control Station consists of components that are UL listed for use in Class 1, Division 2, Groups A, B, C, or D.
[18] Uses 9001K metal operators and plastic legend plates.
[19] Uses 9001SK plastic operators and plastic legend plates.
[20] Includes 1" NPT threaded conduit opening.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Harmony® eXLhoist

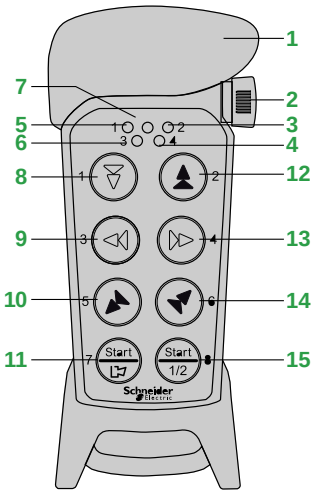


Front view of ZART8LS remote device

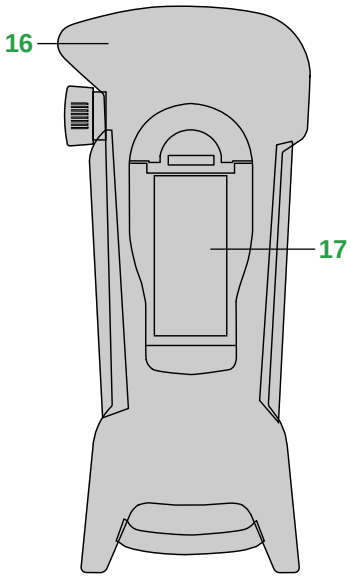


Rear view of remote device

Remote Control Device Description	
Front View	
1	Rubber cover
2	Stop button
3	LED 2 (red)
4	LED 4 (red)
5	LED 1 (red)
6	LED 3 (red)
7	Top LED (red, green)
8	Button 1
9	Button 3
10	Button 5
11	Button 7–left start button
12	Button 2
13	Button 4
14	Button 6
15	Button 8–right start button
Rear View	
16	Rubber protection cover
17	Battery pack




Front view of base station

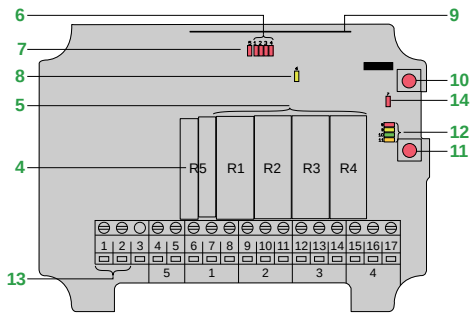

Internal board view of base station

Base Stataion	
Front View	
1	4 x Ø5 mm/0.20 in. holes for standard mounting on a support
2	4 x screws to maintain the cover of the receiver
3	2 x cable glands for cables Ø 6...13 mm/ *0.25...0.50 in.*
Internal Board View	
4	Stop relays
5	Relays R1 ...R4
6	Relay LEDs (red)
7	Stop relay LED (red)
8	Power LED (yellow)
9	Radio module
10	Function button (cancel)
11	Select button (OK)
12	Function LEDs (8 = red, 9 = yellow, 10 = green, 11 = orange)
13	Terminal block for input power
14	PLd (Performance Level d) status LED
Expansion Board View	
15	Relays R6...R11
16	Relay LEDs (red)
17	Communication LED (green)

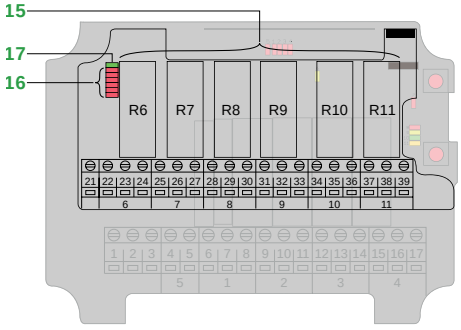

Expansion board view of base station

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


ZART8LS


ZARB10WS


ZARC701


ZARC702


ZARC703


ZARC705


ZARC706


ZARC707

Remote Control Device and Base Station

Table 19.198: Remote Control Device

Description	Characteristics		Reference		Weight kg/lb
	Motion push buttons	Auxiliary push buttons	Standard	MBC[1]	
With LEDs	6	1	ZART8LS	—	0.300/0.661

Table 19.199: Base Station

Description	Characteristics		Power Supply (V)	Reference		Weight kg/lb
	Outputs	Inputs		Standard	MBC[1]	
Wired connection cable gland	10 relays + 2 safety relays	—	∿ 48–240	ZARB10WS	—	0.430/ 0.947
Wired connection (pre-wired with 1.5 m/4.92 ft cable)	10 relays + 2 safety relays	—	∿ 48–240	ZARB10WSP	—	0.880/ 1.940

Accessories

Table 19.200: Accessories

Description	Characteristics	Reference	Weight kg/lb
Multi-charger power supply 6W, 5 Vdc /1.2 A (for ZARC702 Li-Ion rechargeable battery only)	∿100–240 V power supply	ZARC701	0.100/0.220
Li-Ion rechargeable battery with battery table charger	83 x 46 mm/ 3.268 x 1.811 in.	ZARC702	0.050/0.110
Battery pack for 3 x AAA (batteries not included)	83 x 46 mm/ 3.268 x 1.811 in.	ZARC704	0.020/0.044
Battery table charger, (for ZARC702 Li-Ion rechargeable battery only)	5 Vdc power supply	ZARC703	0.120/0.265
Front label cover for ZART8LS push buttons	120 x 60 mm/ 4.724 x 2.362 in.	ZARC705	0.005/0.011
Rubber protection cover for ZART8LS	Rubber material, black	ZARC706	0.107/0.24
Shoulder belt to support ZART8LS	Nylon material, black	ZARC707	0.130/0.29

[1] MBC: Multi base control (tandem).

© 2026 Schneider Electric
All Rights Reserved
3/25/2026




ZARTxx + ZARB05WSP

Table 19.201: Transmitter — Pocket Remote

Description	Battery	Number of Pushbuttons	Reference	Weight kg/lb
Single-step pushbutton	2 x 1.5 V AAA/LR06 Alkaline *[2]*	3	ZART03	0.135/0.298
		4	ZART04	
		6	ZART06	
		8	ZART08	
		10	ZART10	

Table 19.202: Receiver — Pocket Remote

Description	Relay outputs	Power supply V	Reference	Weight kg/lb
Wired connection (pre-wired with 1.5 m/4.92 ft cable)	5 relays	12–24	ZARB05WSP	0.400/0.882
	11 relays	12–24	ZARB11WSP	

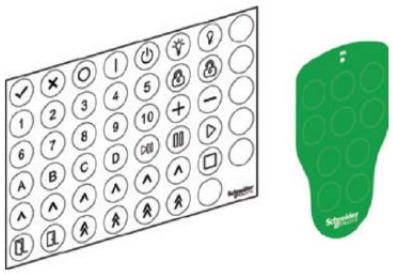

ZARC620

Table 19.203: Accessories — Pocket Remote

Description	For use with	Sold in lots of *[3]*	Reference	Weight kg/lb
Customizable label kit for remote transmitter66 x 114 mm/2.60 x 4.49 in.	ZART03, ZART04, ZART06, ZART08, ZART10	1	ZARC620 *[4]*	0.135/0.298

[2] 2 batteries are included in packaging.
[3] Pack consists of 5 sheets of label kit.
[4] 1 polyester base layer for graphic printing, 1 set of unique legends.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Type BW Pendant Stations and Accessories

This pre-assembled, two-button station now comes complete with internal and external strain relief. Oversized finger grips on the rear of the enclosure make it easy to grip and operate.

- Well suited for standard hoist applications
- Push button legend inserts
- Field-installable mushroom button
- Full cover gasket, to exclude harmful contaminants

Table 19.204: BW90 and BW100 Pendant Stations – with cord connector and strain relief

Description		Legend Insert Markings	Mechanical Interlock	Enclosure Color		Contact Symbol	Replacement Interior *[5]*	
				Yellow	Red		9001 Type	Contact Symbol
 BW90 / BW100	Single Speed	Up-Down	Yes	BW92Y	—	146	BOC368	146
		Forward-Reverse	Yes	BW93Y	—	146	BOC368	146
		On-Off *[6]*	Yes	BW94Y	—	10	—	147
		Start-Stop	No	BW95Y	—	145	—	25
		Start-Stop *[6]*	Yes	BW96Y	—	10	—	147
		On-Off *[6]*	No	—	—	146	—	25
		Up-Down	Yes	BW98Y	—	100	—	—
		without Inserts	Yes	BW90YU	—	147	—	25
		without Inserts	No	BW91YU	—	25	—	25
		without Inserts *[6]*	Yes	—	—	147	—	147
	Two Speed	without Inserts	Yes	BW100YU	BW100RU	150	—	150
		Up-Down	Yes	BW102Y	—	150	—	150

Table 19.205: Hanger Brackets

Description		Form
 Y236	External Bracket (cannot be field installed)	Y236

Table 19.206: Strain Relief Replacement

Description		Type
 BWSR	Strain Relief Replacement	BWSR

Table 19.207: Interchangeable Legend Inserts for Type BW Pendant Stations *[7]*

Marking	Type
Forward	B255
Reverse	B256
Up	B253
Down	B254


Table 19.208: Replacement Enclosures

Description	Color	Type
Box & Cover with 4 screws	Yellow	BWRY
	Red	BWRR
	Black	BWRB

Table 19.209: Electrical Contact Ratings *[8]*

AC—NEMA B600							DC—NEMA P600		
Volts	Inductive 35% Power Factor				Continuous Carrying Amperes	Resistive 75% Power Factor	Volts	Inductive and Resistive	
	Make		Break			Make, Break and Continuous Carrying Amperes		Make and Break Amperes	Continuous Carrying Amperes
	A	VA	A	VA					
120	30.5	3600	3.75	360	5	5	120	1.1	5
240	15	3600	1.5	360	5	5	240	0.55	5
480	7.5	3600	.75	360	5	5	600	0.2	5
600	6	3600	.6	360	5	5			

Contact Symbols (Type BW Pendant Staions)

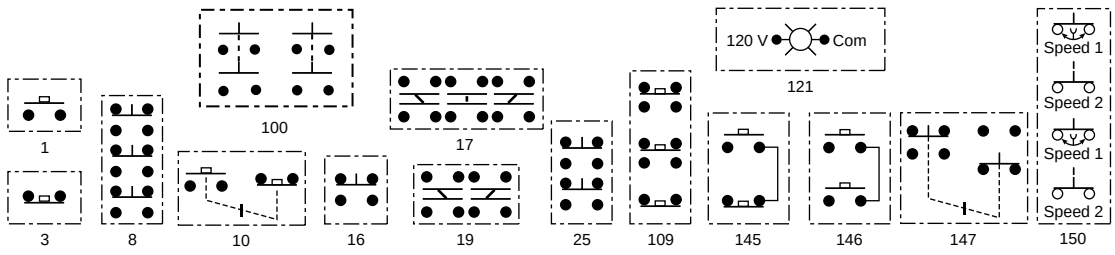

[5] Includes gasket
[6] Maintained Contact
[7] Order must specify a quantity of 10 or multiples of 10.
[8] OSHA Regulation, Section 1910.70, Overhead and Gantry Cranes, limits the voltage of pendant push buttons to 150 Vac or 300 Vdc.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

XAC Pistol Grip Stations and General Purpose Pendants

XAC pendant stations are designed for standard- or medium-duty control circuit applications.

- Single- or two-speed versions
- Double insulated
- Shock and corrosion resistant
- 2, 4, 6, 8, 12 element versions
- Ease of operation



XACA201



XACA06



XACA03 with operators

Table 19.210: Pistol Grip Stations

Description	Speeds	Function		Catalog Number
		1 speed	2 speed	
1 N.O. contact per operator 2 Mechanically interlocked operators	1	↕		XACA201 *[9]*
2 N.O. (staggered) contacts per operator 2 Mechanically interlocked operators	2		↕	XACA207 *[9]*
1 N.O. + 1 N.C. 2 Mechanically interlocked operators	1	↕		XACA205 *[9]*
1 N.O. contact per direction 1 Mechanically interlocked 2 way toggle	1	↕		XACD21A0101 *[10]*
NOTE: Legends are required to achieve NEMA4 rating.				

Table 19.211: General Purpose Pendants *[11][12]*

Enclosures	Catalog Number
2 hole enclosure	XACA02H7
3 hole enclosure	XACA03H7
4 hole enclosure	XACA04H7
6 hole enclosure	XACA06H7
8 hole enclosure	XACA08H7
12 hole enclosure	XACA12H7

To place a custom pendant order, use the worksheet Type XACA Worksheet, page 19-85 as a guide. Orders must be placed through the Product Selector in Quote to Cash. There is a 10% charge for assembly.

XAC Contact Blocks

Table 19.212: Contact Blocks for Operators in Cover

Description	Wiring Diagram	Catalog Number
1 N.O./spring return/1 speed	—	ZB2BE101
1 N.C./spring return/1 speed	—	ZB2BE102
1 N.O. early close & 1 N.C. & 1 N.O./spring return/2 speed	Figure 1	XENG1191
1 N.C. & 2 N.O./spring return/1 speed	Figure 2	XENG1491
1 N.O. & 1 N.O. latching/1 speed/interlocked	Figure 3	XENG3781
1 N.O. & 1 N.C. latching/1 speed/interlocked	Figure 4	XENG3791
3 N.C.—all ↕ direct acting	Figure 5	XENT1192



ZB2BE10



XENG37

XENG1191



XACS10

Table 19.213: Contact Blocks for Operators in Base of Enclosure *[13]*

Description	Catalog Number
1 N.O./1 speed	XACS101
1 N.C./1 speed	XACS102
2 N.C./1 speed	XACS104

Wiring Diagrams




Figure 1




Figure 2




Figure 3




Figure 4




Figure 5

[9] These units are available with factory installed E-stops. Add a "3" to the end of the catalog number for standard E-stop or add a "4" for a trigger action E-stop.
[10] These units are available with a factory installed E-stop. Use XACD22 ••• for a standard E-stop or XACD24••• for a trigger action E-stop.
[11] Standard enclosures include internal mounting plate, cable sleeve for 8 to 26 mm, internal cable clamp, suspension ring and cable tie.
[12] For ordering information on custom built XACA pendants, visit our website at www.Schneider-Electric.us.
[13] Cannot be used with **XACA03** pendant.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


Type XACA Worksheet

Use this worksheet to assist in component selection. Custom orders for XACA pendant stations must be placed through the Product Selector in Quote to Cash. There is a 10% charge for assembly.


XACA Order Guide Instructions

Custom built pendant stations

1. Determine the number of operators needed, then choose an enclosure with a corresponding number of holes.
2. Select the type of operator, contact block, and appropriate nameplate for each function required.
3. Check for special functions that may be required. These items could include mechanical interlocks, adapters for self-supporting cable, lower support rings, protective guards, etc.

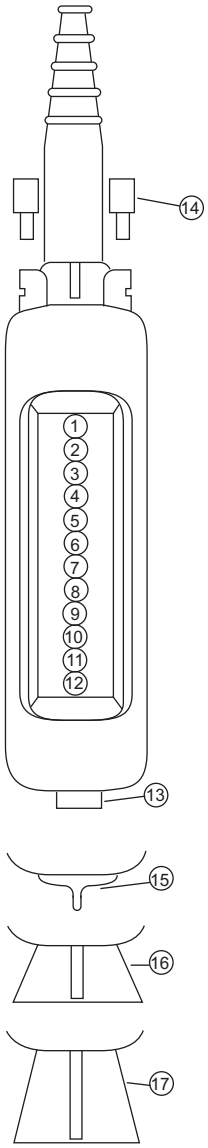

Mechanical Interlock (XACA009)



Catalog number of enclosure **XACA** ☐☐☐☐

Functions (optional)	Mechanical interlock (draw a vertical line between the 2 units to be interlocked ▲)	Legends	Contact blocks and pilot light bodies	Push button Pilot light or Blanking plug
	1			
	2			
	3			
	4			
	5			
	6			
	7			
	8			
	9			
	10			
	11			
	12			

▲ Mechanical interlock XACA009 — Number of XACA009 required

Unit mounted in base of station (facing downwards)

	13			

Attachments

Position	Type	Catalog No.
14	Adapters for self-supporting cable type BBAP (available only with cable sleeve Ø8–26 mm)	**XACB961**
15	Lower support ring	**XACA971**
16	Protective guard for base mounted selector switch or 40 mm emergency-stop push button	**XACA982**
17	Protective guard for key switch	**XACA983**

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XVBL3•



XVBL4B•



XVBL6B•
5 Joule



XVBL8B•
10 Joule

XVB 70 mm Diameter Beacons

Table 19.214: XVB Beacons with Steady Light

Description	Light Source and Voltage	Color	Catalog Number
Complete unit, includes: 1 lens unit 1 base unit (direct or tube mounting)	Bulb (10 W max) not included 250 V max (must order bulb separately *[1]*)	Green	XVBL33
		Red	XVBL34
		Amber	XVBL35
		Blue	XVBL36
		Clear	XVBL37
		Yellow	XVBL38

Table 19.215: XVB Beacons with Flashing Light (one flash per second)


Description	Light Source and Voltage	Color	Catalog Number
Complete unit, includes: 1 lens unit 1 base unit (direct or tube mounting)	Bulb (10 W max) not included 24 Vac 24–48 Vdc (must order bulb separately *[1]*)	Green	XVBL4B3
		Red	XVBL4B4
		Amber	XVBL4B5
	Bulb (10 W max) not included 48–230 Vac (must order bulb separately *[1]*)	Red	XVBL4M4
		Amber	XVBL4M5
		Yellow	XVBL4M8

Table 19.216: XVB Beacons with 10 Joule Strobe (2.75 in./70 mm diameter) *[2]*

Description	Light Source and Voltage	Color	Catalog Number *[3]*
Complete unit, includes: 1 lens unit 1 base unit (direct or tube mounting)	Strobe 24 Vac/Vdc (includes bulb)	Red	XVBL8B4
		Amber	XVBL8B5
		Blue	XVBL8B6
		Clear	XVBL8B7
		Yellow	XVBL8B8
	Strobe 120 Vac (includes bulb)	Red	XVBL8G4
		Amber	XVBL8G5
		Blue	XVBL8G6
		Yellow	XVBL8G8
NOTE: There are no replacement lenses for strobes.			

[1] For bulbs, see Table 19.222 XVB Accessories, page 19-88.
[2] **Important:** Discharge tube elements are not suitable for continuous-operation signaling due to temperature rise caused by the discharge tube.
[3] For 5 Joule units, specify XVBL6••, instead of XVBL8••.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

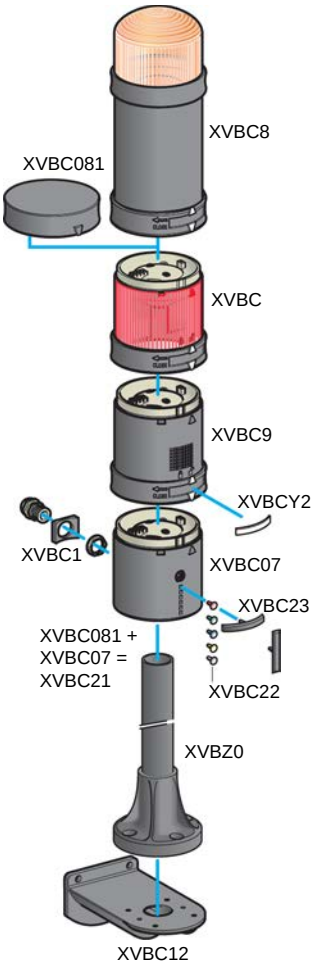

XVB 70 mm Components

Table 19.217: XVB Lens Units for Steady Light

Description	Light Source and Voltage	Color	Catalog Number
Illuminated lens unit	Bulb (10 W max) not included 250 Vac/Vdc max (must order bulb separately *[4]*)	Green	XVBC33
		Red	XVBC34
		Orange	XVBC35
		Blue	XVBC36
		Clear	XVBC37
		Yellow	XVBC38

Table 19.218: XVB Lens Unit for Flashing Light

Description	Light Source and Voltage	Color	Catalog Number
Illuminated lens unit	Bulb (10 W max) not included 24 Vac 24–48 Vdc (must order bulb separately *[4]*)	Green	XVBC4B3
		Red	XVBC4B4
		Orange	XVBC4B5
		Blue	XVBC4B6
		Yellow	XVBC4B8
	Bulb (10 W max) not included 48–230 Vac (must order bulb separately *[4]*)	Green	XVBC4M3
		Red	XVBC4M4
		Orange	XVBC4M5
		Blue	XVBC4M6
		Yellow	XVBC4M8

NOTE: There are no replacement lenses units for the XVBC8•• strobes.

Table 19.219: XVB Lens Units with 10 Joule Strobe

Description	Light Source and Voltage	Color	Catalog Number *[5]*
Lens unti with integral 10 Joule strobe	Strobe 24 Vac/Vdc (includes bulb)	Red	XVBC8B4
		Orange	XVBC8B5
		Blue	XVBC8B6
		Clear	XVBC8B7
		Yellow	XVBC8B8
	Strobe 120 Vac (includes bulb)	Red	XVBC8G4
		Orange	XVBC8G5
		Blue	XVBC8G6
		Yellow	XVBC8G8

Table 19.220: Audible Sounder Units

Description	Supply Voltage	Catalog Number
Sounder unit 90 dB at 1 m	12–48 Vac/Vdc	XVBC9B
Adjustable from 75–90 dB Continuous or intermittent modes	120–230 Vac	XVBC9M

Table 19.221: Base Units + Cover

Description	Catalog Number
Base unit + cover for direct or tube mounting, bottom or side cable entry (includes gasket)	XVBC21


[4] For bulbs, see Table 19.222 XVB Accessories, page 19-88.
[5] For 5 Joule units, specify XVBC6••, instead of XVBC8••

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XVB 70 mm Accessories

Table 19.222: XVB Accessories

Description	Characteristics		Catalog Number	
	in.	mm		
Black tube with integral black plastic mounting base (includes gasket)	4.72	120	XVBZ02	XVBZ02A *[6]*
	15.75	400	XVBZ03	—
	31.50	800	XVBZ04	—
Support tube concealment cover	3.94	100	XVBC020	
Incandescent bulbs bayonet type BA 15d, 10 Watts	24 Vac/Vdc		DL1BLB	
	120 Vac/Vdc		DL1BLG	
	230 Vac/Vdc		DL1BLM	
Incandescent bulbs bayonet type BA 15d, 7 Watts	24 Vac/Vdc		DL1BEB	
	120 Vac/Vdc		DL1BEG	
	230 Vac/Vdc		DL1BEM	
Steady-On LED bulbs bayonet type BA 15d (sold as single) *[7]*	24 Vac/Vdc	White	DL1BDB1	
		Green	DL1BDB3	
		Red	DL1BDB4	
		Blue	DL1BDB6	
		Yellow	DL1BDB8	
		Amber	DL1BDB5	
	120 Vac	White	DL1BDG1	
		Green	DL1BDG3	
		Red	DL1BDG4	
		Blue	DL1BDG6	
		Yellow	DL1BDG8	
		Amber	DL1BDG5	
Flashing LED bulbs	24 Vac/Vdc	White	DL1BKB1	
		Green	DL1BKB3	
		Red	DL1BKB4	
		Amber	DL1BKB5	
	120 Vac	Red	DL1BKG4	
Adapter for side entry through base unit	With CM12 (p. 13.5) cable gland, for cable size of 0.4 to 0.55 in. (10 to 14 mm) diameter		XVBC14	
Conduit adapter	1/2 in. NPT (for customer supplied tubing)		XVBC00	



XVBZ0•




XVBC020



XVBC12


Wiring Diagrams, Base Units

Screw terminals
Torque to 4.4 in-lb (0.5 N•m)



XVBL

2 x 16 AWG (1.5 mm^2)
1 x 14 AWG (2.5 mm^2)

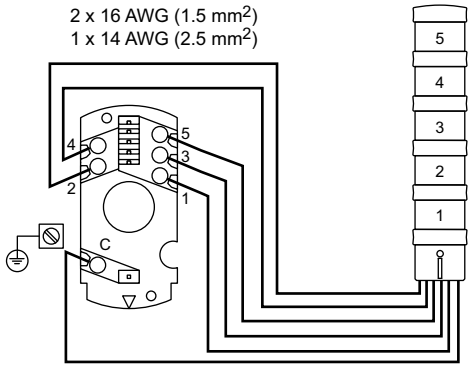

XVBC

[6] Aluminum tube.
[7] For 240 Vac, replace the B or G in the catalog number with M—for example, DL1BD**M**1. For flashing LEDs, refer to catalog 9001CT0001.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XVC4B5


XVC4B35S


XVCZ11


XVC1B5K
XVC1B5SK


XVCZ13


XVCZ23

XVC Tower Lights and Accessories

Table 19.223: XVC4 Tower Lights — 40 mm diameter (1.5 inches)

Description	Light source (included)	Voltage	Signaling colors [8]		Catalog Number
			Steady	Flashing	
With support tube mounting					
Without buzzer	LED for steady light only	24 Vdc	R	–	XVC4B1
			R, O	–	XVC4B2
			R, O, G	–	XVC4B3
			R, O, G, B	–	XVC4B4
			R, O, G, B, C	–	XVC4B5
		100-240 Vac	R, O, G	–	XVC4M3
With buzzer + flashing light	LED for steady or flashing light [9]	24 Vdc	R	R	XVC4B15S
			R, O	R, O	XVC4B25S
			R, O, G	R, O, G	XVC4B35S
			R, O, G, B	R, O, G, B	XVC4B45S
			R, O, G, B, C	R, O, G, B, C	XVC4B55S
		100-240 Vac	R	R	XVC4M15S
			R, O, G	R, O, G	XVC4M35S
For base mounting					
Without buzzer	LED for steady light only	24 Vdc	R	–	XVC4B1K
			R, O	–	XVC4B2K
			R, O, G	–	XVC4B3K
			R, O, G, B	–	XVC4B4K
			R, O, G, B, C	–	XVC4B5K

Table 19.224: Accessories for XVC4

Description	Diameter mm	Minimum height to be added mm	Catalog Number
Die-cast metal mounting base (for use with XVC4•• and XVC4••5S with support tube)	90	32	XVCZ11

Table 19.225: XVC Tower Lights — 100 mm diameter (4 inches)

Description	Light source (included)	Voltage Vdc	Signaling colors [8]		Catalog Number
			Steady	Flashing	
For base mounting					
Without buzzer With flashing light	LED for steady or flashing light [9]	24	R	R	XVC1B1K
			R, O, G	R, O, G	XVC1B3K
		100-240 Vac	R, O, G	R, O, G	XVC1M3K
			R, O, G, B, C	R, O, G, B, C	XVC1M5K
With buzzer + flashing light	LED for steady or flashing light [9]	24	R, O, G	R, O, G	XVC1B3SK

Table 19.226: Accessories for XVC1

Description	Diameter mm	Height mm	Catalog Number
Mount tube and base	140	300	XVCZ13
L-shape mount bracket	—	—	XVCZ23

[8] Signaling colors: R = Red, G = Green, O = Orange, B = Blue, C = Clear. The colors are listed in the mounting order of the illuminated units from top to bottom.
[9] Flashing light function selected by wiring or programming.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XVC6B5K


XVC6B55SK


XVCZ02


XVCZ12

Table 19.227: XVC6 Tower Lights, 60 mm diameter (2.375 inches)

Description	Light source (included)	Voltage	Signaling colors *[10]*		Catalog Number
			Steady	Flashing	
With support tube mounting					
Without buzzer	LED for steady light only	24 Vdc	R	–	XVC6B1
			R, O, G	–	XVC6B3
			R, O, G, B	–	XVC6B4
			R, O, G, B, C	–	XVC6B5
		100-240 Vac	R, O, G	–	XVC6M3
			R, O, G, B	–	XVC6M4
With buzzer + flashing light	LED for steady or flashing light *[11]*	24 Vdc	R, O, G	R, O, G	XVC6B35S
			R, O, G, B	R, O, G, B	XVC6B45S
			R, O, G, B, C	R, O, G, B, C	XVC6B55S
		100-240 Vac	R	R	XVC6M15S
			R, O, G	R, O, G	XVC6M35S
			R, O, G, B	R, O, G, B	XVC 6M45S
For base mounting					
Without buzzer	LED for steady light only	24 Vdc	R, O, G	–	XVC6B3K
		100-240 Vac	R, O, G	–	XVC6M3K
With buzzer + flashing light	LED for steady or flashing light *[11]*	24 Vdc	R	R	XVC6B15SK
			R, O	R, O	XVC6B25SK
			R, O, G	R, O, G	XVC 6B35SK
			R, O, G, B	R, O, G, B	XVC6B45SK
			R, O, G, B, C	R, O, G, B, C	XVC6B55SK
		100-240 Vac	R	R	XVC6M15SK
			R, O, G	R, O, G	XVC6M35SK
			R, O, G, B	R, O, G, B	XVC6M45SK
			R, O, G, B, C	R, O, G, B, C	XVC6M55SK


Table 19.228: Accessories for XVC6

Description	Diameter mm	Minimum height to be added mm	Catalog Number
Die-cast metal mounting base for XVC6B• and XVC6B•5S with support tube.	100	30	XVCZ02
Stamped metal mounting base for XVC6B• K and XVC6B•5SK	84	21.6	XVCZ12

[10] Signaling colors: R = Red, G = Green, O = Orange, B = Blue, C = Clear. The colors are listed in the mounting order of the illuminated units from top to bottom.

[11] Flashing light function selected by wiring or programming.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

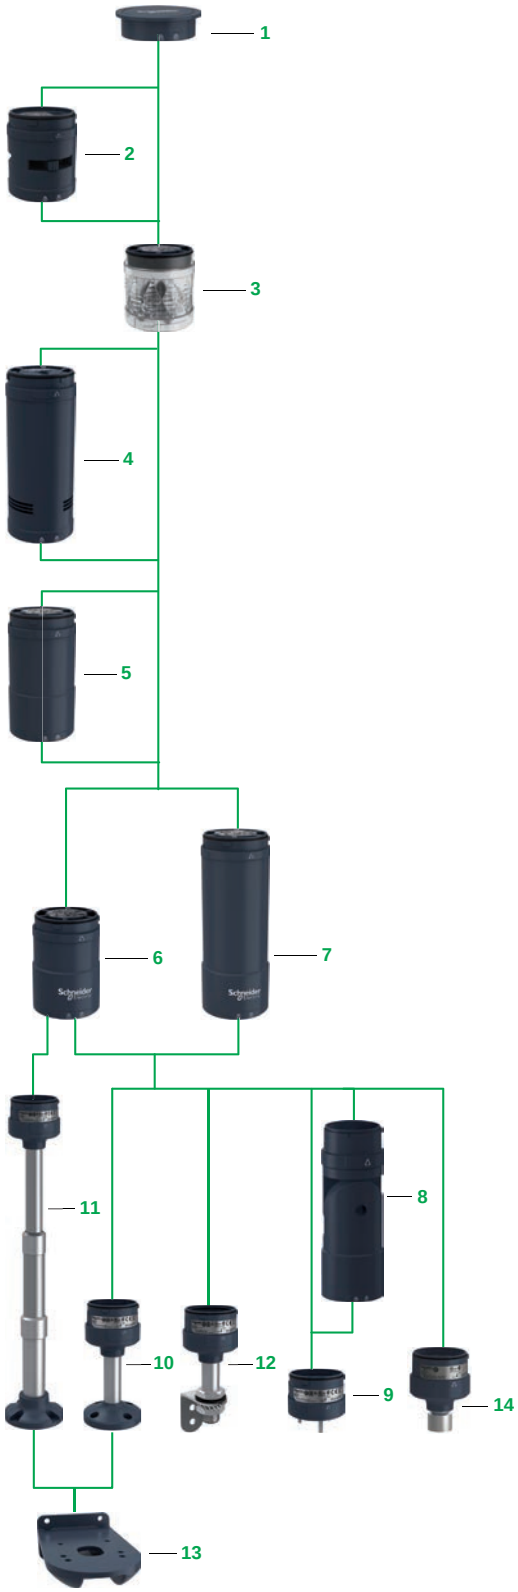

Tower Lights For Customer Assembly (up to 5 units)

Tower Lights		
The XVU tower lights are customer assembled products comprising:		
1		Top cover (black or silver)
2		Buzzer unit (black or silver)*[12]*
3		Illuminated units:*[13]*
	3.1	LED illuminated units with steady or blinking light signaling (colors: green, red, orange,blue, white, or yellow)
	3.2	Multi-color LED unit (colors: green, red, orange, blue, white, or yellow. Patterns: steady, blinking, flashing, or rotating)
	3.3	Pulse signal multi-color LED unit (colors: green, red, orange, or blue. Patterns: steady, blinking, flashing, or rotating) *[14][15]*
4		Sound units
	4.1	Sound unit
	4.2	Sound unit, plus signal *[15]*
5		Extender unit (black or silver)
6		Base unit, DC (black or silver)
7		Base unit, AC (black or silver)
8		Flexible mounting unit
9		Direct mounting plate (black or silver)
10		100 mm/*3 .927 in.*, 400 mm/*15.748 in.*, or 800 mm/*31.496 in.* pole with integrated mounting plate (black or silver for 100 mm pole, and black for 400 mm and 800 mm pole)
11		Adjustable height pole from 210 to 385 mm/*8.268 to 15.157 in.*[16] with integrated mounting plate
12		100 mm/*3.927 in.*, 250 mm/*9.842 in.*, or 400 mm/*15.748 in.* pole with metal bracket (black)
13		Mounting plate for use on vertical support (black)*[17]*
14		½" NPT conduit adapter for customer supplied tubing

Composition

- XVU tower lights are customer assembled signaling units that are mounted vertically or horizontally with the support of a mounting accessory.
- Maximum of 5 illuminated units or 4 illuminated units with 1 audible unit can be assembled. The illuminated or audible unit*[18]*, stack vertically.
- With the indicator marks on these units they can be easily assembled.
- Electrical connections between each unit are made automatically as they are mechanically assembled.
- The signaling units are identical in size and their positioning is unrestricted.

Mounting

- Horizontal mounting: Fixed into support panel with direct mounting plate, poles or adjustable height pole with integrated mounting plate
- Vertical mounting: Fixed into support panel with mounting plate using pole with metal bracket or mounting plate for use on vertical support
- Horizontal or vertical mounting: Fixed into support panel with mounting plate using flexible mounting unit
- Mounting plate with aluminium 1/2" NPT adapter.

Cabling

By means of spring cage connection terminal block incorporated in mounting unit (Direct mounting plate, pole with plate, adjustment pole)

[12] Always mounted on the top .
[13] Up to 5 LED illuminated units without sound unit; Up to 4 LED illuminated units with sound unit .
[14] Pulse signal multi-color LED unit cannot be combined with standard sound unit (**XVUC9V**).
[15] Up to 4 illuminated and sound units when pulse signal technology is used.
[16] Only for DC body unit.
[17] Compatible with XVUZ02, XVUZ02Q, XVUZ03, XVUZ400, XVUZ800, and XVUZ05.
[18] Sound unit cannot be combined with buzzer unit at the same time.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Illuminated Units, High Flash LED Units


XVUC23
XVUC43


XVUC24
XVUC44


XVUC25
XVUC45


XVUC6
XVUC46


XVUC27
XVUC47


XVUC28
XVUC48


XVUC29
XVUC29P

Illuminated LED Units: IP 65						
Description	Signaling Type	Characteristics		Color	Reference	Weight kg/*lb*
		Voltage	Power			
High brightness LED Units	Steady	24 V	2.5 W	Green	XVUC23	0.064/*0.141*
		24 V	2.0 W	Red	XVUC24	0.064/*0.141*
		24 V	2.0 W	Orange	XVUC25	0.064/*0.141*
		24 V	2.5 W	Blue	XVUC26	0.064/*0.141*
		24 V	2.5 W	White	XVUC27	0.064/*0.141*
		24 V	2.5 W	Yellow	XVUC28	0.064/*0.141*
	Blinking	24 V	1.2 W	Green	XVUC43	0.064/*0.141*
		24 V	0.9 W	Red	XVUC44	0.064/*0.141*
		24 V	0.9 W	Orange	XVUC45	0.064/*0.141*
		24 V	1.2 W	Blue	XVUC46	0.064/*0.141*
		24 V	1.2 W	White	XVUC47	0.064/*0.141*
		24 V	1.2 W	Yellow	XVUC48	0.064/*0.141*
Multi-color LED unit	Steady/ blinking/ flashing/ rotating	24 V	1.5 W	Multi-color (green, red, orange, blue, white, and yellow)	XVUC29	0.064/*0.141*
Pulse signal Multi-color LED unit *[19]*	Steady/ blinking/ flashing/ rotating	24 V	1.7 W	Multi-color (green, red, orange, and blue)	XVUC29P	0.069/*0.152*

[19] 1 signal wire, 2 power wires. Adaptable for both NPN and PNP. Controlled by PLC dynamically.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XVUC9S


XVUC9SQ


XVUC9V




XVUC21BQ


XVUC21M

Audible and Base Units

Audible Units: IP 54

Description	Characteristics		Color	Reference	Weight kg/*lb*
	Voltage	Power			
Buzzer, adjustable 70...85 dB at 1 m/*3.281 ft* (4 configurations of audible signal)	24 V	1.7 W	Black	XVUC9S	0.077/*0.170*
			Silver	XVUC9SQ	0.077/*0.170*
Sound, adjustable 0...86 dB at 1m/*3.281 ft* (4 channels)	24 V	1.7 W	Black	XVUC9V	0.217/*0.480*
Sound unit, pulse signal 0...86 dB at 1m/*3.281 ft* (16 channels)*[20]*	24 V	4.1 W	Black	XVUC9VP	0.219/*0.483*

Base Units: IP 65

Description	Voltage	Color	Reference	Weight kg/*lb*
Base unit with top cover*[21]*	24 Vac/Vdc	Black	XVUC21B	0.110/*0.243*
		Silver	XVUC21BQ	0.110/*0.243*
	100 to 240 Vac	Black	XVUC21M *[22]*	0.235/*0.518*
		Black	XVUC21MP *[23]*	0.235/*0.518*

[20] 1 signal wire, 2 power wires. Adaptable for both NPN and PNP. 16 channels can be controlled by PLC.
[21] Direct mounting plate XVUZ01● needed for direct mounting.
[22] NPN type.
[23] PNP type.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Accessories

Accessories

Description	Voltage	Height of aluminum pole mm/*in.*	Color	Reference	Weight kg/*lb*
Body extender	24 Vac/Vdc	—	Black	XVUC020	0.093/*0.205*
Direct Mounting Plate		—	Black	XVUZ01 *[24]*	0.063/*0.139*
				XVUZ03 *[25]*	0.063/*0.139*
				XVUZ04 *[26]*	0.063/*0.139*
			Silver	XVUZ01Q *[25]*	0.063/*0.139*
Mounting plate with aluminum pole		100/*3.927*	Black	XVUZ02	0.132/*0.291*
		100/*3.927*	Silver	XVUZ02Q	0.132/*0.291*
		400/*15.748*	Black	XVUZ400	0.236/*0.520*
		800/*31.496*	Black	XVUZ800	0.430/*0.945*
Mounting plate with adjustable height aluminum pole *[27]*		210 to 385/ *8.268 to 15.157*	Black	XVUZ05	0.253/*0.558*
Flexible mounting unit for use on horizontal or vertical support, IP 55		—	Black	XVUZ06	0.193/*0.425*
Metal bracket with aluminum pole, IP42		100/*3.927*	Black	XVUZ100T	0.220/*0.485*
		250/*9.842*	Black	XVUZ250T	0.240/*0.529*
		400/*15.74*	Black	XVUZ400T	0.320/*0.705*
Mounting plate for use on vertical support		—	Black	XVUZ12	0.360/*0.794*
Mounting plate with aluminium 1/ 2" NPT adapter		—	Black	XVUZ00	0.095/*0.209*


XVUC020


XVUZ01Q


XVUZ400


XVUZ05


XVUZ100T


XVUZ06


XVUZ12


XVUZ00

[24] Three-pin mounting.
[25] Two-pin mounting.
[26] Four-pin mounting.
[27] Only for use with DC body unit.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XVR 08•••


XVR 10•••


XVR 12•••


XVR 13•••


XVR Z081


XVC Z13


XVC Z23

XVR Pre-Wired Beacons and Accessories

Table 19.229: XVR Pre-Wired Rotating Mirror Beacons

Diameter (mm)	Sound Option	Enclosure Rating	Voltage	Color	Catalog Number
Ø 84	Without buzzer	IP 23 (IP 65 with accessories)	24 Vac/Vdc	Red	XVR08B04
				Orange	XVR08B05
				Green	XVR08B03
				Blue	XVR08B06
Ø 106	Without buzzer	IP 23 (IP 55 with accessories)	24 Vac/Vdc	Red	XVR10B04
				Orange	XVR10B05
Ø 120	Without buzzer	IP 23	24 Vac/Vdc	Red	XVR12B04
				Orange	XVR12B05
				Blue	XVR12B06
Ø 120	With buzzer	IP 23	24 Vac/Vdc	Red	XVR12B04S
				Orange	XVR12B05S
				Blue	XVR12B06S
Ø 130	Without buzzer	IP 23 Resistant to vibration	24 Vdc	Red	XVR13B04
				Orange	XVR13B05

Table 19.230: XVR Accessories

Description	Diameter (mm)	Height (mm)	Catalog Number
Rubber base to increase the IP degree of protection	84	—	XVRZ081
Mount tube and base	106, 120 and 130	300	XVCZ13
L-shape mounting bracket	84, 106 and 120	—	XVCZ23

© 2026 Schneider Electric
All Rights Reserved
3/25/2026



XVR3B04S




XVR3E06

XVR Complete Pre-Cabled Motor-Less Rotating/Flashing Beacons

Table 19.231: Complete, Pre-cabled Motor-less Rotating/Flashing Beacons


Diameter (Ø mm/in.)	Sound option	IP Degree of Protection	Voltage V	Color	Reference Number	Weight (kg/lb)
100/3.94	Without buzzer	IP 65 (upright) IP 23 (sideways, inverted)	12–24	Green	XVR3B03	0.484/1.067
				Red	XVR3B04	
				Orange	XVR3B05	
				Blue	XVR3B06	
			100–230	Green	XVR3M03	
				Red	XVR3M04	
				Orange	XVR3M05	
				Blue	XVR3M06	
	With buzzer	IP 23 (upright, sideways, inverted)	12–24	Green	XVR3B03S	0.538/1.186
				Red	XVR3B04S	
				Orange	XVR3B05S	
				Blue	XVR3B06S	
	Without buzzer	IP 65 (upright IP 23 (sideways, inverted)	100–230	Green	XVR3M03S	
				Red	XVR3M04S	
				Orange	XVR3M05S	
				Blue	XVR3M06S	
			48	Green	XVR3E03	0.484/1.067
				Red	XVR3E04	
				Orange	XVR3E05	
				Blue	XVR3E06	

Dimensions

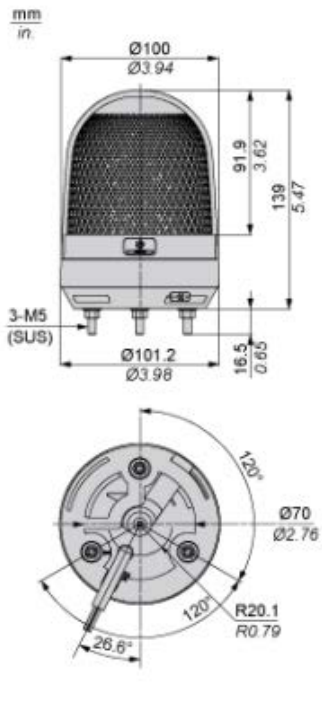


Panel Cut-out

Straight wiring



Side wiring



© 2026 Schneider Electric
All Rights Reserved
3/25/2026


XVS14BMW


XVS72BM


XVS Sirens and Electronic Alarms

Table 19.232: XVS Sirens and Electronic Alarms


Description	Voltage	Color	Catalog Number
Multisound siren 105 dB, 43 tones	12/24 Vdc	White	XVS14BMW
Electronic alarms 90 dB, 16 tones Panel Mount DIN72	12/24 Vac/Vdc	PNP, Black	XVS72BMBP
		PNP, White	XVS72BMWP
		NPN, Black	XVS72BMBN
		NPN, White	XVS72BMWN

Table 19.233: XVS Dimensions (mm)

XVS 14BMW

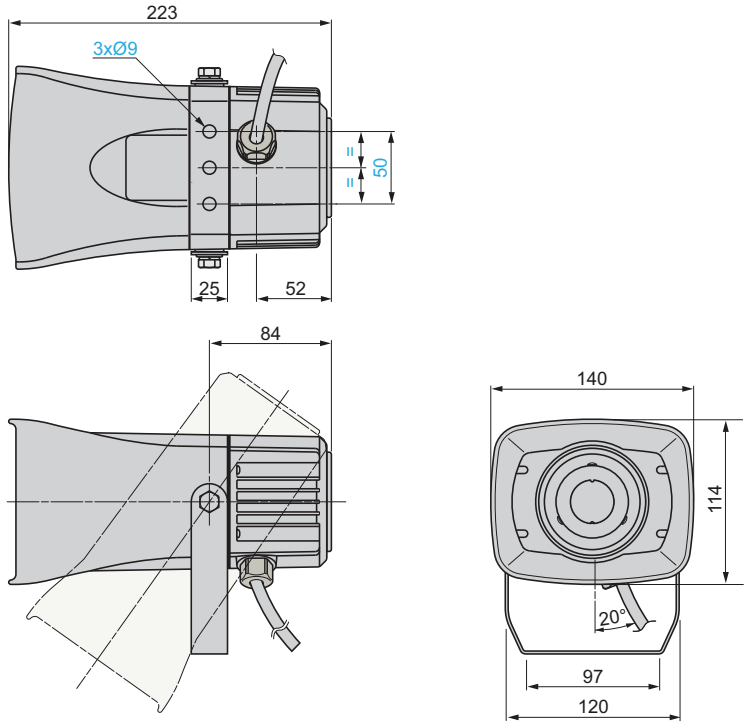

XVS 72BM●●

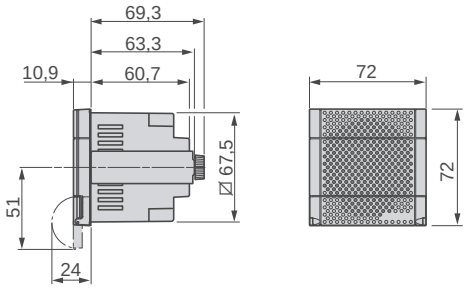

XVSV Editable Voice Alarms

Table 19.234: XVSV Editable Voice Alarms

Description	Voltage V	Color	Reference	Weight kg/lb
Editable alarms, DIN72	12–24	NPN, Black	XVSV7BBN	0.142/0.313
		NPN, White	XVSV7BWN	
		PNP, Black	XVSV7BBP	
Editable alarms, DIN96	12–24	NPN, Black	XVSV9BBN	0.268/0.591
		NPN, White	XVSV9BWN	
		PNP, Black	XVSV9BBP	
	100–230	NPN, Black	XVSV9MBN	0.267/0.589
		NPN, White	XVSV9MWN	
Wall mounting plate for DIN72 and DIN96			XVSZ016	0.148/0.326


XVSV7BBN and XVSV9MWN

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Heavy Duty Industrial Foot Switches—Oiltight, Watertight, Dusttight and Driptight Enclosure, NEMA 2, 4 and 13



9002AW2
Type AW Foot Switch with Top Pedal Shield and Side Shields



9002AW132
Type AW with Oversized Pedal Shield and Side Shields



9002AW117
Type AW Foot Switch with Oversized Pedal Shield, Side Shields and Safety Door



9002AW1
Type AW Foot Switch without Pedal Shield



9002AW124

⚠ DANGER

HAZARDOUS APPLICATIONS

Do not use foot switches on machines without point-of-operation protection.

Failure to follow these instructions will result in death, serious injury, or equipment damage.

Foot Switch Selection

Foot switches are used to control many industrial processes, while leaving the operator's hands free to perform other functions. The type or model of foot switch suitable for each application will vary depending on factors such as the control function required, degree of protection required, production methods, unusual conditions, government regulations, etc. In some applications more than one foot switch may be required, as when two or more persons are operating a machine. In these cases, safe practice and regulations require that the foot switches be wired in series making it necessary that each operator's foot switch be actuated before the machine will cycle.

Only the user can be aware of all the conditions and factors present during setup, operation and maintenance of the machine; therefore, only the user can determine which foot switch(es) can be properly used. When selecting a foot switch for a particular application, the user should refer to the applicable ANSI standards and OSHA regulations. The National Safety Council's Accident Prevention Manual also provides much useful information.

In some applications, such as power presses, additional operator protection such as point-of-operation guarding must be provided when a foot switch is used as an actuator. This is necessary since the operator's hands and other parts of the body are free to enter the pinch point area and serious injury can occur. The shielding provided on foot switches cannot protect an operator from injury. For this reason the foot switch cannot be substituted for or take the place of point-of-operation protection.

A Trilingual Danger Sign regarding the need for point-of-operation protection is supplied with each foot switch. The sign incorporates three languages: English, Spanish and French. Additional copies of the sign are available by contacting your Square D sales office.

Type AW Fully Shielded Foot Switch with Oversized Pedal Shield, Side Shields and Safety Door. The Safety Door is interlocked with the pedal to prevent operation due to shock or vibration. It prevents accidental pedal operation by requiring a simple but intentional motion to lift the door before inserting the foot.

Operating Temperature:
–30 to +60 °C (–22 to +140 °F)

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Table 19.235: Foot Switch Catalog Numbers *[1]*


Description	Features	Fully Shielded with Oversized Pedal Shield, Side Shields and Safety Door	With Oversized Pedal Shield and Side Shields	With Pedal Shield and Side Shields	UNSHIELDED (See Warning note *[2]*)
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
Single Pole *[3]* Double Throw	Spring Return With Mechanical Latch	AW117 —	AW132 —	AW2 AW7	AW1 —
Two Pole *[3]* Double Throw	Spring Return With Mechanical Latch	AW124 *[4]* —	AW133 —	AW14 AW15	AW13 —
Two Stage *[3]* (One Pole Each Stage) Table 1	Spring Return With Mechanical Latch in 1st Stage With Mechanical Latch in 2nd Stage	AW119 — —	AW134 — —	AW6 AW9	AW5 — —
Four Stage *[3]* (One Pole Each Stage) Table 2	Spring Return	AW123	—	—	AW21
Single Pole Single Throw	Maintained Contact—Push On/Push Off	—	—	AW12	AW11
Replacement Cover Assembly	—	—	—	AC8 *[5]*	—

File: E78403
CCN: NKCR


File: LR25490
Class: 3211–03

For **replacement parts** for Class 9002 Type AW: See instruction bulletin 65013-010-31.
Also see Table 19.237 Contact Symbol—Two Stage, page 19-100 and Table 19.238 Contact Symbol—Four Stage, page 19-100.


Approximate Dimensions

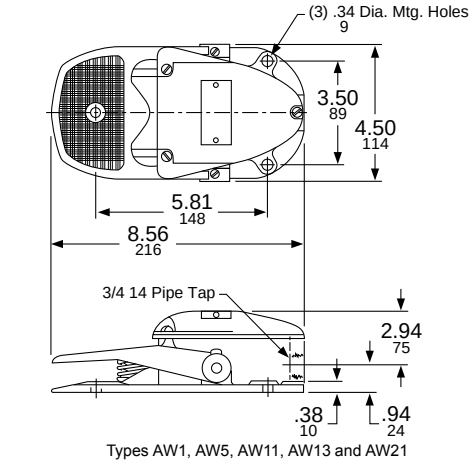

Types AW1, AW5, AW11, AW13 and AW21

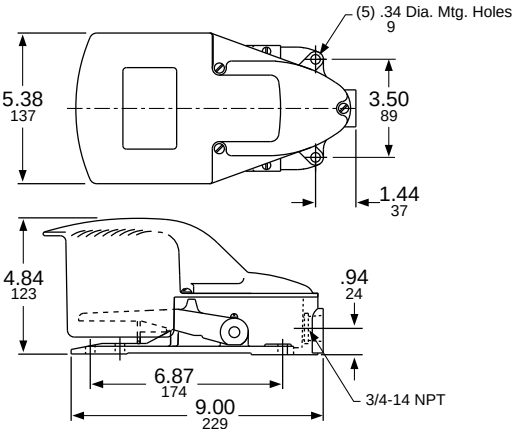

Types AW2, AW6, AW12, AW14 and AW22

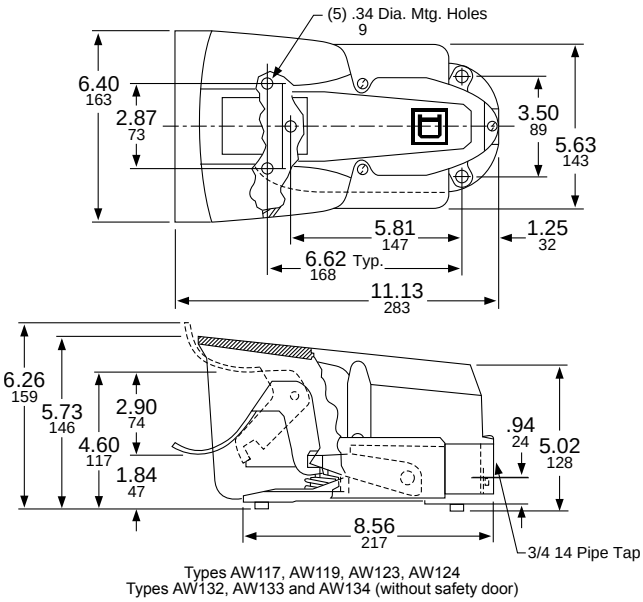

Types AW117, AW119, AW123, AW124
Types AW132, AW133 and AW134 (without safety door)

Dual Dimensions: **INCHES**
Millimeters

[1] When ordering, add prefix "9002" to the catalog number.
[2] WARNING: These foot switches must not be used to operate machines or equipment where the possibility of operator injury exists. Typical uses include Emergency Stop functions, "Dead Man" controls, signal functions (lights, bells, etc.).
[3] A single pole snap switch that contains two double break contact elements (1 N.O. and 1 N.C.) must be used on circuits of same polarity. A double pole snap switch contains two electrically separated sets of contact elements allowing use on circuits of opposite polarity. Each set that contains two double break contact elements (1 N.O. and 1 N.C.) must be used on circuits of same polarity.
[4] 2 N.O. and 2 N.C. isolated, direct acting contacts.
[5] For replacement cover drilled to accept latch. For Series C foot switches order AC9. No replacement cover available for Series A or B devices drilled to accept latch. AC8 is spring return only.

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Table 19.236: Maximum Current Ratings For Control Circuit Contacts

Type	Volts	AC Amperes			Volts	DC Amperes		
		Inductive 35% Power Factor		Resistive 75% Power Factor		Inductive and Resistive		
						Make and Break		
		Make	Break	Make, Break and Continuous		Single Throw	Double Throw	Continuous
AW1 through AW09, AW117, AW119, AW132	120 240 480 600	40 20 10 8	15 10 6 5	15 10 6 5	125 250 600	2.0 0.5 0.1	0.5 0.2 0.02	15 15 15
AW13, AW14, AW15, AW133	120 240 480 600	30 15 7.5 6	3 1.5 0.75 0.6	3 1.5 0.75 0.6	125 250 600 —	1.0 0.3 0.1 —	0.2 0.1 — —	10 10 10 —
AW11, AW12	115 230	36 18	6 3	— —	125 250	2.2 1.1	— —	— —
AW21 AW123	120 240 480 600	15.0 7.5 3.75 3.0	1.5 0.75 0.375 0.3	10 10 10 10	— — — —	— — — —	— — — —	— — — —
AW124	120 240 480 600	60 30 15 12	6 3 1.5 1.2	10 10 10 10	120 240 600	1.1 0.55 0.2	— — —	10 10 10

NOTE: Double throw switches are rated 250 Vdc maximum.

Table 19.237: Contact Symbol—Two Stage

Snap Switch		Pedal		
Unit	Circuit	Up	Half Down	Full Down
1	A1	0	1	1
	B1	1	0	0
2	A2	1	1	0
	B2	0	0	1

NOTE: 0 = Open 1 = Closed

Table 19.238: Contact Symbol—Four Stage

Snap Switch		Pedal Position				
Unit	Circuit	Up ⟶ Down				
1	1A1	0	0	1	1	1
	1B1	1	1	0	0	0
	2A1	0	1	1	1	1
	2B1	1	0	0	0	0
2	1A2	1	1	1	0	0
	1B2	0	0	0	1	1
	2A2	1	1	1	1	0
	2B2	0	0	0	0	1

© 2026 Schneider Electric
All Rights Reserved
3/25/2026

Section 20

Relays and Timers


RXM


RSL


RSB


SSP


SSL


SSM


8501X


RE17


RM17, RM35

General Purpose Relays 20-2

Harmony™ RSL Interface Relays 20-2
Harmony™ RSB Interface Relays 20-3
Harmony™ RXG Interface Relays 20-4
Harmony™ RXM Plug-In Relays 20-6
Harmony™ RPM Plug-In Relays 20-9
Harmony™ RUM Plug-In Relays 20-11
Harmony™ RPF Power Relays 20-13
199 Power Relays 20-14
725 Power Relays 20-17
389F Power Relays 20-19
300 Power Relays 20-21
Square D™ Universal Relays 20-23
Square D™ Plug-in Relays 20-25
Square D™ Miniature Control Relays 20-26
Square D™ Power Relays 20-28
750H Hazardous Location Series 20-29

Solid State Relays 20-31

Harmony™ SSL Relays 20-31
Harmony™ SSM Relays 20-32
Harmony™ SSL, SSM and SSP 20-33
Square D™ NEMA Style AC Relays 20-38
Square D™ NEMA Style DC Relays 20-40

Timers 20-44

Harmony™ RE17, RE22, and RENF (NFC) Timers 20-44
Harmony™ RE48 Panel Mount Timers 20-47
Harmony™ REXL Miniature Plug-In Timers 20-48
820 Series Time Delay and Sensor Relays 20-49
Square D™ JCK General Purpose Plug-In Timers 20-51

Control and Measurement Relays 20-53

Harmony™ Current Measurement Relays 20-53
Harmony™ Phase Measurement Relays 20-54
Harmony™ Voltage Measurement Relays 20-55
Harmony™ Level Control Relays and Pump Control Relays 20-56
Harmony™ Speed, Frequency, Temperature, and NFC Control Relays 20-57

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RSL 1PV••



RSL 1PR••



RSL 1AB••



RSL ZVA•



RSL ZRA•



RSL Z2



RSL Z3

Harmony™ RSL Interface Relays

Harmony RSL slim interface relays save valuable panel space with a 6 mm width and have a 6 A general purpose load rating. Features include:

- Pre-assembled option: relay and socket are combined into one catalog number.
- Universal AC/DC sockets have built-in protection from transients and reverse polarity voltages (see catalog DIA3ED2090304EN-US for more detailed information).
- Accessories, which include isolators, ID tags, and bus jumper save valuable installation time.
- SPDT (1 C/O) design

Refer to Online EZ Selector.

Table 20.1: Pre-assembled Relay and Socket Combination (sold in lots of 10)

Socket Supply Voltage	Pre-Assembled Catalog Number[1]		Replacement Relays Catalog Number
	Screw Connector	Spring Terminal	
12 Vac/Vdc	RSL1PVJU	RSL1PRJU	RSL1AB4JD
24 Vac/Vdc	RSL1PVBU	RSL1PRBU	RSL1AB4BD
48 Vac/Vdc	RSL1PVEU	RSL1PREU	RSL1AB4ED
110 Vac/Vdc	RSL1PVFU	RSL1PRFU	RSL1AB4ND
230 Vdc	RSL1PVPU	RSL1PRPU	RSL1AB4ND

Table 20.2: Relays (sold in lots of 10)

Relay Coil Voltage[2]	Catalog Number
12 Vdc	RSL1AB4JD
24 Vdc	RSL1AB4BD
48 Vdc	RSL1AB4ED
60 Vdc	RSL1AB4ND

Table 20.3: Sockets (sold in lots of 10)

Control Voltage	Socket Type		For Use with Relays:
	Screw Connector Catalog Number	Spring Terminal Catalog Number	
12 Vac/Vdc	RSLZVA1	RSLZRA1	RSL1AB4JD
24 Vac/Vdc			RSL1AB4BD
48 Vac/Vdc	RSLZVA2	RSLZRA2	RSL1AB4ED
60 Vac/Vdc			RSL1AB4ND
110 Vac/Vdc	RSLZVA3	RSLZRA3	RSL1AB4ND
230 Vac/Vdc	RSLZVA4	RSLZRA4	RSL1AB4ND

Table 20.4: Accessories

Description	Compatibility	Catalog Number
ID tags (2 sheets of 64 tags)	With all RSL and SSL series sockets	RSLZ5
Bus jumper (10 x 20-pole jumpers)		RSLZ2
Butterfly isolator (10 isolators)		RSLZ3

Approvals for RSL Relays

c UL us — File: E173076 CCN: NRNT2, NRNT8 — CSA — File: 240278 Class: 3211 04 — CE — IEC 61810-1 — RoHS Compliant

Approvals for RSLZ Sockets

c UL us — File: E172326 CCN: SWIV2, SWIV8 — CSA — File: 254977 Class: 3211 07 — CE — IEC 61984 — RoHS Compliant

[1] Relays are mounted on sockets equipped with LED and protection circuit.
[2] The RSL sockets will accept an AC or DC input voltage; however, the relay always receives a filtered DC voltage.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RSB1A160F7



RSB2A080BD



RSZE1S48M



RSB1A120JD Relay
+ RZM031FPD Socket
+ RSZE1S35M Module



RSB1A160BD Relay
+ RSZE1S48M Socket

Harmony™ RSB Interface Relays

Harmony RSB interface relays and sockets provide the optimum combination of robust performance and space saving for the most demanding applications. Relays are rated at 8 A, 12 A, and 16 A (250 Vac / 28 Vdc). Features include:

- Optional protection modules for protection against electrical transients
- Optional plastic hold-down ejector clips
- Socket or printed circuit board installation options

Refer to Online EZ Selector.

Table 20.5: Relays (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)		
	SPDT (1 C/O) -12 A Res.	SPDT (1 C/O) -16 A Res.	DPDT (2 C/O) -8 A Res.
	Catalog Number*[3]*	Catalog Number*[3]*	Catalog Number*[3]*
12 Vdc	RSB1A120JD	RSB1A160JD	RSB2A080JD
24 Vdc	RSB1A120BD	RSB1A160BD	RSB2A080BD
48 Vdc	RSB1A120ED	RSB1A160ED	RSB2A080ED
110 Vdc	RSB1A120FD	RSB1A160FD	RSB2A080FD
24 Vac	RSB1A120B7	RSB1A160B7	RSB2A080B7
48 Vac	RSB1A120E7	RSB1A160E7	RSB2A080E7
120 Vac	RSB1A120F7	RSB1A160F7	RSB2A080F7
220 Vac	RSB1A120M7	RSB1A160M7	RSB2A080M7
230 Vac	RSB1A120P7	RSB1A160P7	RSB2A080P7
240 Vac	RSB1A120U7	RSB1A160U7	RSB2A080U7

Table 20.6: Sockets – 12 A, 300 Vac (sold in lots of 10)

Contact Terminal Arrangement	Connection	For Use with Relays	Catalog Number
Separate*[4]*	Box lug connector	RSB1A120••	RSZE1S35M
		RSB1A160••*[5]* RSB2A080••	RSZE1S48M

Table 20.7: Protection Modules (sold in lots of 10)

Description	Compatibility	Voltage	Catalog Number
Diode	RSZ•••••• sockets (RSB series), RGZ•••••• sockets (RXG series)	6–230 Vdc	RZM040W
RC circuit		24–60 Vac	RZM041BN7
		110–240 Vac	RZM041FU7
Diode + green LED		6–24 Vdc	RZM031RB
		24–60 Vdc	RZM031BN
		110–230 Vdc	RZM031FPD
Varistor + green LED		6–24 Vac/Vdc	RZM021RB
		24–60 Vac/Vdc	RZM021BN
		110–230 Vac/Vdc	RZM021FP

Table 20.8: Accessories (sold in lots of 10)

Description	Compatibility	Catalog Number
Plastic hold-down ejector clip	RSZ•••••• sockets (RSB series)	RSZR215
ID tags		RSZL300

Approvals for RSB Relays

c UL us — File: E173076, CCN: NRNT2, NRNT8 | CSA — File: 215736, Class: 3211 07 | CE — IEC 61810-1 | RoHS Compliant

Approvals for RSZ Sockets

c UL us — File: E173076, CCN: NRNT2, NRNT8 | CSA — File: 254977, Class: 3211 07 | CE — IEC 61810-1 | RoHS Compliant

RZM modules are RoHS compliant.

[3] To order a relay complete with socket (sold in lots of 20): add suffix S to the catalog numbers selected above.
Example: RSB 2A080RD + RSZ E1S48M becomes RSB 2A080RDS.
[4] The inputs and outputs are on separate sides.
[5] When using the RSB1A160•• relay with socket RSZ E1S48M, terminals 11 and 21, 14 and 24, 12 and 22 must be linked.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RGZE1S35M Socket + RXG12BD Relay



RXG11••



RXG22••



RXG13••



RXG15••

New!

Harmony™ RXG Interface Relays

The Harmony RXG interface relay range is comprised of 10 A relays with 1 C/O contact and 5 A relays with 2 C/O contacts all in the same optimal foot print. The mating sockets feature separate contact terminals with reliable screw connections that attach either to a convenient 35 mm DIN rail or flexible panel mounting. The entire offer is a complete system solution with protection modules (diode, diode + LED, RC circuit, or varistor + LED), plastic ejector/maintaining clip and ID Tags to identify relays.

- Standard hold-down ejector clip integrated with socket
- Optional protection modules for protection against electrical transients
- Industry standard footprint for seamless compatibility with competitive sockets
- UL Listed combination (Relay + Socket) for expedited system certification

Refer to Online EZ Selector.

Table 20.9: Relays: Standard Cover, without LED, with Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	SPDT (1 C/O) - 10 A	DPDT (2 C/O) - 5 A
	Catalog Number	Catalog Number
6 Vdc	—	RXG21RD
12 Vdc	—	RXG21JD
24 Vdc	RXG11BD	RXG21BD
24 Vac	RXG11B7	RXG21B7
48 Vac	—	RXG21E7
120 Vac	RXG11F7	RXG21F7
230 Vac	RXG11P7	RXG21P7

Table 20.10: Relays: Standard Cover, with LED, with Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	SPDT (1 C/O) - 10 A	DPDT (2 C/O) - 5 A
	Catalog Number	Catalog Number
6 Vdc	RXG12RD	—
12 Vdc	RXG12JD	RXG22JD
24 Vdc	RXG12BD	RXG22BD
48 Vdc	RXG12ED	RXG22ED
110 Vdc	RXG12FD	RXG22FD
24 Vac	RXG12B7	RXG22B7
48 Vac	RXG12E7	RXG22E7
120 Vac	RXG12F7	RXG22F7
220 Vac	—	RXG22M7
230 Vac	RXG12P7	RXG22P7

Table 20.11: Relays: Standard Cover, with LED, without Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	SPDT (1 C/O) - 10 A	DPDT (2 C/O) - 5 A
	Catalog Number	Catalog Number
12 Vdc	RXG13JD	—
24 Vdc	RXG13BD	RXG23BD
24 Vac	RXG13B7	RXG23B7
48 Vac	—	RXG23E7
120 Vac	RXG13F7	RXG23F7
220 Vac	—	RXG23M7
230 Vac	RXG13P7	RXG23P7

Table 20.12: Relays: Clear Cover, without LED, without Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	SPDT (1 C/O) - 10 A	DPDT (2 C/O) - 5 A
	Catalog Number	Catalog Number
24 Vdc	RXG15BD	RXG25BD
24 Vac	—	RXG25B7
230 Vac	RXG15P7	RXG25P7

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


RGZE1S48M


RZM031RB


RSZL300

Table 20.13: Sockets (sold in lots of 10)

Contact Terminal Arrangement	Connection	For Use with Relays	Catalog Number
Separate*[6]*	Box lug connector	RXG1•••	RGZE1S35M*[7]*
		RXG2•••	RGZE1S48M*[7]*

Table 20.14: Protection Modules (sold in lots of 10)

Description	Voltage	Compatibility	Catalog Number
Diode	6 to 230 Vdc	RSZ•••••• sockets (RSB series), RGZ•••••• sockets (RXG series)	RZM040W
RC circuit	24 to 60 Vac		RZM041BN7
	110 to 240 Vac		RZM041FU7
Diode + green LED	6 to 24 Vdc		RZM031RB
	24 to 60 Vdc		RZM031BN
	110 to 230 Vdc		RZM031FPD
Varistor + green LED	6 to 24 Vdc/Vac		RZM021RB
	24 to 60 Vdc/Vac		RZM021BN
	110 to 230 Vdc/Vac		RZM021FP

Table 20.15: Accessories (sold in lots of 10)

Description	For Use With	Catalog Number
Plastic ejector clip	RXG series (RSZ•••••• sockets)	RGZR215
Socket ID tags		RSZL300
Relay ID tags	RXG series relays	RGZL520

Approvals for RXG Relays

c UL us LISTED — File: E173076 CCN: NRNT, NRNT7*[8]*

c UL us — File: E173076 CCN: NRNT2, NRNT8

CSA — File: 254977 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

Approvals for RGZ Sockets

c UL us — File: E172326 CCN: SW1V2, SW1V8

CSA — File: 254977 Class: 3211 07

CE — RoHS Compliant

RELAYS AND TIMERS
20

[6] The inputs and outputs are on separate sides.
[7] Please note that RGZE1S35M and RGZE1S48M sockets come standard with the RGZR215 ejector clip
[8] When used with the appropriate RGZ socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RXM4AB2BD + RXZE2S114M + RXZR335 + RXZL520



RXM2AB1B7



RXM2AB2BD



RXM2AB3BD

Harmony™ RXM Plug-In Relays

Harmony RXM miniature plug-in relays and sockets provide a complete system solution in response to the most demanding applications ranging from 3 to 12 A. Some of the features include:

- Test button with removable lock-down door for testing the contacts (depending on model)
- Green LED indication of relay status (depending on model)
- Mechanical indication of relay status (standard)
- Optional protection modules to protect against electrical spikes
- Bus jumpers for connecting multiple terminals reduce installation time

Online EZ Selector

Table 20.16: Relays: without LED, with Test button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)		
	DPDT (2 C/O) -12 A Res.	3PDT (3 C/O) - 10 A Res.	4PDT (4 C/O) - 8 A Res.
	Catalog Number	Catalog Number	Catalog Number
12 Vdc	RXM2AB1JD	RXM3AB1JD	RXM4AB1JD
24 Vdc	RXM2AB1BD	RXM3AB1BD	RXM4AB1BD
48 Vdc	RXM2AB1ED	RXM3AB1ED	RXM4AB1ED
110 Vdc	RXM2AB1FD	RXM3AB1FD	RXM4AB1FD
220 Vdc	—	—	RXM4AB1MD
24 Vac	RXM2AB1B7	RXM3AB1B7	RXM4AB1B7
48 Vac	RXM2AB1E7	RXM3AB1E7	RXM4AB1E7
120 Vac	RXM2AB1F7	RXM3AB1F7	RXM4AB1F7
230 Vac	RXM2AB1P7	RXM3AB1P7	—
240 Vac	—	—	RXM4AB1U7

Table 20.17: Relays: with LED, with Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)		
	DPDT (2 C/O) -12 A Res.	3PDT (3 C/O) - 10 A Res.	4PDT (4 C/O) - 8 A Res.
	Catalog Number	Catalog Number	Catalog Number
12 Vdc	RXM2AB2JD	RXM3AB2JD	RXM4AB2JD
24 Vdc	RXM2AB2BD	RXM3AB2BD	RXM4AB2BD
48 Vdc	RXM2AB2ED	—	RXM4AB2ED
110 Vdc	RXM2AB2FD	RXM3AB2FD	RXM4AB2FD
125 Vdc	—	—	RXM4AB2GD
24 Vac	RXM2AB2B7	RXM3AB2B7	RXM4AB2B7
48 Vac	RXM2AB2E7	RXM3AB2E7	RXM4AB2E7
120 Vac	RXM2AB2F7	RXM3AB2F7	RXM4AB2F7
230 Vac	RXM2AB2P7	RXM3AB2P7	RXM4AB2P7

Table 20.18: Relays: with LED, without Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	DPDT (2 C/O) -12 A Res.	4PDT (4 C/O) - 8 A Res.
	Catalog Number	Catalog Number
24 Vdc	RXM2AB3BD	RXM4AB3BD
24 Vac	—	RXM4AB3B7
120 Vac	—	RXM4AB3F7
230 Vac	—	RXM4AB3P7

Table 20.19: Relays: Low level Contacts, without LED, with Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)
	4PDT (4 C/O) -3 A Res.
	Catalog Number
24 Vdc	RXM4GB1BD
120 Vac	RXM4GB1F7
230 Vac	RXM4GB1P7

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RXM4GB2F7

Table 20.20: Relays: Low Level Contacts, with LED, with Test button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)
	4PDT (4 C/O) -3 A Res.
	Catalog Number
12 Vdc	RXM4GB2JD
24 Vdc	RXM4GB2BD
48 Vdc	RXM4GB2ED
110 Vdc	—
24 Vac	RXM4GB2B7
48 Vac	RXM4GB2E7
120 Vac	RXM4GB2F7
230 Vac	RXM4GB2P7
240 Vac	RXM4GB2U7

- For sockets and accessories, see page 20-8.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Sockets and Accessories for Harmony™ RXM Relays

Refer to Online EZ Selector.



RXZE2S108M



RXM040W



RXZ400

Table 20.21: Sockets (sold in lots of 10)

Contact Terminal Arrangement	Connection	For Use with Relays	Catalog Number
Mixed[9]	Screw clamp terminals	RXM2•••••[10] RXM4•••••[10]	RXZE2M114[11]
	Box lug connector	RXM2••••• RXM4•••••	RXZE2M114M[11]
Separate[12]	Box lug connector	RXM2•••••	RXZE2S108M[13]
		RXM3•••••	RXZE2S111M[11]
		RXM4•••••	RXZE2S114M
	Spring Terminal	RXM2•••••	—

Table 20.22: Protection Modules (sold in lots of 10)

Description	Voltage	Compatibility	Catalog Number
Diode	6–250 Vdc	RXZ•••••• sockets (RXM series), RPZF1 and RPZF2 sockets (RPM series)	RXM040W
RC circuit	24–60 Vac		RXM041BN7
	110–240 Vac		RXM041FU7
Varistor	6–24 Vac/Vdc		RXM021RB
	24–60 Vac/Vdc		RXM021BN
	110–240 Vac/Vdc		RXM021FP

Table 20.23: Accessories (sold in lots of 10)

Description	Compatibility	Catalog Number
Metal hold-down clip	RXZ sockets (RXM series)	RXZ400
Plastic hold-down ejector clip	RXZ sockets (RXM series)	RXZR335
Bus jumper, 2-pole (Ith: 5 A max.)	RXZE2S sockets (RXM series)	RXZS2
Panel mounting adapter[14]	RXM series relays, RPM1 and RPM2 series relays	RXZE2FA
Relay ID tags (sheet of 108 tags)	RXM series relays, RPM series relays, RUM series relays	RXZL520
Socket ID tags	RXZ sockets (RXM series, except RXZE2M114), RUZS sockets (RUM series)	RXZL420

Approvals for RXM Relays

c UL us LISTED — File: E164862 CCN: NLDX, NLDX7[15]

c UL us — File: E164862 CCN: NLDX2, NLDX8

CSA — File: 230765 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

Approvals for RXZ Sockets

c UL us — File: E172326 CCN: SWIV2, SWIV8

CSA — File: 230765 Class: 3211 07

CE — IEC 61984

RoHS Compliant

[9] The inputs and outputs are mixed on both sides.
[10] When mounting relay RXM2••••• on socket RXZE2M••••, the thermal current must not exceed 10 A.
[11] Thermal current Ith: 10 A
[12] The inputs and outputs are on separate sides.
[13] Thermal current Ith: 12 A
[14] Test button and lock-down door become inaccessible.
[15] When used with the appropriate RXZ socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RPZF4 Socket
+RPM42P7 Relay



RPM13••



RPM23••



RPM33••



RPM43••

Harmony™ RPM Plug-In Relays

Harmony RPM plug-in relays and sockets provide a complete system solution for the most demanding applications up to 15 A. Some of the features include:

- Test button with removable lock-down door for testing the contacts (depending on model)
- Green LED indication of relay status (depending on model)
- Mechanical indication of relay status (standard)
- Optional modules to protect against electrical spikes

Refer to Online EZ Selector.

Table 20.24: Relays: without LED, with Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)			
	SPDT (1 C/O) - 15 A Res.	DPDT (2 C/O) - 15 A Res.	3PDT (3 C/O) - 15 A Res.	4PDT (4 C/O) - 15 A Res.
	Catalog Number	Catalog Number	Catalog Number	Catalog Number
12 Vdc	—	RPM21JD	—	—
24 Vdc	RPM11BD	RPM21BD	—	RPM41BD
24 Vac	RPM11B7	RPM21B7	—	—
120 Vac	RPM11F7	RPM21F7	RPM31F7	RPM41F7
230 Vac	RPM11P7	RPM21P7	—	RPM41P7

Table 20.25: Relays: with LED, with Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)			
	SPDT (1 C/O) - 15 A Res.	DPDT (2 C/O) - 15 A Res.	3PDT (3 C/O) - 15 A Res.	4PDT (4 C/O) - 15 A Res.
	Catalog Number	Catalog Number	Catalog Number	Catalog Number
12 Vdc	RPM12JD	RPM22JD	RPM32JD	RPM42JD
24 Vdc	RPM12BD	RPM22BD	RPM32BD	RPM42BD
48 Vdc	—	RPM22ED	—	RPM42ED
110 Vdc	—	RPM22FD	—	RPM42FD
24 Vac	RPM12B7	RPM22B7	RPM32B7	RPM42B7
48 Vac	—	RPM22E7	—	RPM42E7
120 Vac	RPM12F7	RPM22F7	RPM32F7	RPM42F7
230 Vac	RPM12P7	RPM22P7	RPM32P7	RPM42P7

Table 20.26: Relays: with LED, without Test Button and Lock-Down Door (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	DPDT (2 C/O) - 15 A Res.	4PDT (4 C/O) - 15 A Res.
	Catalog Number	Catalog Number
24 Vdc	RPM23BD	—
125 Vdc	—	—
24 Vac	RPM23B7	—
120 Vac	RPM23F7	—
230 Vac	—	RPM43P7

© 2025 Schneider Electric
All Rights Reserved
3/25/025


RPZF2



RXM041BN7


RUW241P7


RUW101MW


RPZ3FA

Sockets and Accessories for Harmony™ RPM Relays

Table 20.27: Sockets (sold in lots of 10)

Contact Terminal Arrangement	Connection	For Use with Relays	Catalog Number
Mixed*[16]*	Screw terminals	RPM1•••	RPZF1
		RPM2•••	RPZF2
		RPM3•••	RPZF3
		RPM4•••	RPZF4

Table 20.28: Protection Modules (sold in lots of 10)

Description	Voltage	Compatibility	Catalog Number
Diode	6–250 Vdc	RXZ sockets (RXM series), RPZF1, RPZF2	RXM040W
		RPZF3 RPZF4	RUW240BD
RC circuit	24–60 Vac	RXZ sockets (RXM series), RPZF1, RPZF2	RXM041BN7
	110–240 Vac		RXM041FU7
	110–240 Vac	RPZF3 RPZF4	RUW241P7
Varistor	6–24 Vac/Vdc	RXZ sockets (RXM series), RPZF1, RPZF2	RXM021RB
	24–60 Vac/Vdc		RXM021BN
	110–240 Vac/Vdc		RXM021FP
	24 Vac/Vdc	RPZF3 RPZF4	RUW242B7
	240 Vac/Vdc	RPZF3 RPZF4	RUW242P7

Table 20.29: Timer Module*[17]* (sold in lots of 1)

Description	Voltage	Compatibility	Catalog Number
On-delay timer, interval timer, repeat cycle timer/starting on-delay, repeat cycle timer/starting off-delay, off-delay timer, one-shot timer, timing on de-energization, on-delay timer	24–240 Vac/Vdc	RPZF3 RPZF4	RUW101MW

Table 20.30: Accessories (sold in lots of 10)

Description	Compatibility	Catalog Number
Metal hold-down clip (for single-pole relays)	RPZF1	RPZR235
DIN rail mounting adapter *[18]*	RPM1•••	—
	RPM2•••	—
	RPM3•••	—
	RPM4•••	—
Panel mounting adapter*[18]*	RPM1•••	RPZ1FA
	RPM2•••	RXZE2FA
	RPM3•••	RPZ3FA
	RPM4•••	—
ID tags (sheet of 108 tags)	RXM series relays, RPM series relays, RUM series relays	RXZL520

Approvals for RPM Relays

c UL us LISTED — File: E164862 CCN: NLDX, NLDX7*[19]*

c UL us — File: E164862 CCN: NLDX2, NLDX8

CSA — File: 230765 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

Approvals for RPZ Sockets

c UL us — File: E172326 CCN: SWIV2, SWIV8

CSA — File: 230765 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

[16] The inputs and outputs are mixed on both sides.
[17] See timer module description (selection of functions and time delays) in catalog **DIA3ED2090304EN-US**.
[18] Test button and lock-down door become inaccessible
[19] When used with the appropriate RPZ socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RUZSF3M Socket
+ RUMF32BD Relay



RUMC31F7



RUMF22BD



RUMC23F7

New!

Harmony™ RUM Plug-In Relays

Harmony RUM plug-in relays and sockets provide a complete system solution for the most demanding applications up to 10 A. Some of the features include:

- Test button with lock-down door for testing the contacts (depending on model)
- Green LED indication of relay status (depending on model)
- Mechanical indication of relay status (standard)
- Optional protection modules to protect against electrical spikes
- Bus jumpers for connecting multiple terminals reduce installation time.

Refer to Online EZ Selector.

Table 20.31: Relays: without LED, with Test Button, and Lock-Down Door (sold in lots of 10)

Pins	Coil Voltage	Number and type of contacts - Thermal current (Ith)	
		DPDT (2 C/O) -10 A Res.	3PDT (3 C/O) -10 A Res.
		Catalog Number	Catalog Number
Octal	12 Vdc	RUMC21JD	RUMC31JD
	24 Vdc	RUMC21BD	RUMC31BD
	48 Vdc	—	RUMC31ED
	60 Vdc	—	RUMC31ND
	110 Vdc	—	RUMC31FD
	125 Vdc	—	RUMC31GD
	220 Vdc	—	RUMC31MD
	24 Vac	RUMC21B7	RUMC31B7
	48 Vac	—	RUMC31E7
	120 Vac	RUMC21F7	RUMC31F7
	230 Vac	RUMC21P7	RUMC31P7
Blade	110 Vdc	RUMF21FD	—

Table 20.32: Relays: with LED, Test Button, and Lock-Down Door (sold in lots of 10)

Pins	Coil Voltage	Number and type of contacts - Thermal current (Ith)	
		DPDT (2 C/O) -10 A Res.	3PDT (3 C/O) -10 A Res.
		Catalog Number	Catalog Number
Octal	12 Vdc	RUMC22JD	RUMC32JD
	24 Vdc	RUMC22BD	RUMC32BD
	48 Vdc	—	RUMC32ED
	60 Vdc	—	—
	110 Vdc	—	RUMC32FD
	125 Vdc	—	RUMC32GD
	24 Vac	RUMC22B7	RUMC32B7
	48 Vac	—	RUMC32E7
	120 Vac	RUMC22F7	RUMC32F7
	230 Vac	RUMC22P7	RUMC32P7
Blade	12 Vdc	—	RUMF32JD
	24 Vdc	RUMF22BD	RUMF32BD
	110 Vdc	—	RUMF32FD
	24 Vac	RUMF22B7	RUMF32B7
	120 Vac	RUMF22F7	RUMF32F7
	230 Vac	RUMF22P7	RUMF32P7

Table 20.33: Relays: with LED, without Push Button, and Lock-Down Door (sold in lots of 10)

Pins	Coil Voltage	Number and type of contacts - Thermal current (Ith)	
		DPDT (2 C/O) -10 A Res.	3PDT (3 C/O) -10 A Res.
		Catalog Number	Catalog Number
Octal	120 Vac	RUMC23F7	—
	230 Vac	RUMC23P7	RUMF33P7
Blade	48 Vdc	RUMF23ED	RUMF33ED
	110 Vdc	RUMF23FD	RUMF33FD
	120 Vac	—	RUMF33F7

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Sockets and Accessories for Harmony™ RUM Relays

Refer to Online EZ Selector.



RUZC2M



RUW241P7



RUW101MW



RUZC200

Table 20.34: Sockets (sold in lots of 10)

Contact Terminal Arrangement	Connection	For Use with Relays	Catalog Number
Mixed *[20]*	Box lug connector (screw terminals)	RUMC2•••••	RUZC2M
		RUMC3•••••	RUZC3M
Separate*[21]*		RUMC2•••••	RUZSC2M
		RUMC3•••••	RUZSC3M
		RUMF2•••••	RUZSF3M
		RUMF3•••••	

Table 20.35: Protection Modules (sold in lots of 10)

Description	Compatibility	Voltage	Catalog Number
Diode	RUZ··· sockets (RUM series)	6–250 Vdc	RUW240BD
RC circuit		110–240 Vac	RUW241P7
Varistor		24 Vac/Vdc	RUW242B7
		240 Vac/Vdc	RUW242P7

Table 20.36: Timer Module*[22]* (sold in lots of 1)

Description	Compatibility	Voltage	Catalog Number
On-delay timer, interval timer, repeat cycle timer/starting on-delay, repeat cycle timer/starting off-delay, off-delay timer, one-shot timer, timing on de-energization, on-delay timer.	RUZ··· sockets (RUM series)	24–240 Vac/Vdc	RUW101MW

Table 20.37: Accessories (sold in lots of 10)

Description	Compatibility	Catalog Number
Metal hold-down clip	RUZ sockets (RUM series)	RUZC200
Bus jumper, 2-pole (Ith: 5 A)	RUZS sockets (RUM series)	RUZS2
Relay ID tags (sheet of 108 tags)	RXM series relays, RPM series relays, RUM series relays	RXZL520
Socket ID tags	RXZ sockets (RXM series, except RXZE2M114), RUZS sockets (RUM series),	RUZL420

Approvals for RUM Relays

c UL us LISTED — File: E164862 CCN: NLDX, NLDX7*[23]*

c UL us — File: E164862 CCN: NLDX2, NLDX8

CSA — File: 230765 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

Approvals for RUZ Sockets

c UL us — File: E172326 CCN: SWIV2, SWIV8

CSA — File: 230765 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

[20] The inputs and outputs are mixed on both sides.
[21] The inputs and outputs are on separate sides.
[22] See timer module description (selection of functions and time delays) in catalog **DIA3ED2090304EN-RUM-US**.
[23] When used with the appropriate RUZ socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


RPF2AP7


RPF2BBD

Harmony™ RPF Power Relays

Harmony RPF power relays respond to the most demanding applications up to 30 A. Features include:

- UL Listed
- Sealed construction
- Motor load ratings: 1 hp @ 120 Vac / 3 hp @ 240 Vac (N/O contacts only)
- DIN rail and panel mounting capability
- Short circuit rating of 5,000 A rms @ 3 hp, 240 Vac (N/O contacts only)

Refer to Online EZ Selector.

Table 20.38: Relays (sold in lots of 10)

Coil Voltage	Number and type of contacts - Thermal current (Ith)	
	DPST (2 N/O) - 30 A at 277 Vac, 20 A at 28 Vdc	DPDT (2 C/O) - 30 A at 277 Vac, 20 A at 28 Vdc, 3A (NC)
	Catalog Number	Catalog Number
12 Vdc	RPF2AJD	RPF2BJD
24 Vdc	RPF2ABD	RPF2BBD
24 Vac	RPF2AB7	RPF2BB7
120 Vac	RPF2AF7	RPF2BF7
230 Vac	RPF2AP7	RPF2BP7

Approvals for RPF Relays

c UL us LISTED — File: E43641 CCN: NLDX, NLDX7

CSA — File: 040787 Class: 3211-07

CE — IEC 61810-1

RoHS Compliant

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



199 Series Relay

199 Power Relays

199—SPST-NO-DM, 40 A; SPDT, 40 A; DPST-NO, 40 A; DPDT, 40 A

Table 20.39: Standard Part Numbers

Rated Contact Current	Contact Configuration	Coil Voltage	Coil Resistance (Ω)	Special Features	Standard Part Number
40 A*[24]*	SPST-NO-DM	120 Vac	290		199ADX-4
		24 Vdc	290	Blowout Magnet	199DBX-3
					199DX-3
		48 Vdc	1200	Blowout Magnet	199DBX-16
	SPDT	120 Vac	290		199AX-4
		12 Vdc	70		199X-2
		24 Vdc	290		199X-3
	DPST-NO	120 Vac	290		199AX-9
		240 Vac	1200		199AX-10
		12 Vdc	70		199X-7
		24 Vdc	290		199X-8
	DPDT	24 Vac	12		199AX-13
		120 Vac	290	Blowout Magnet	199ABX-14
					199AX-14
		240 Vac	1200		199AX-15
		12 Vdc	70		199X-12
		24 Vdc	290	Blowout Magnet	199BX-13
					199X-13
		110 Vdc	6000	Blowout Magnet	199BX-14
					199X-14

199 Specifications (UL 508)

Part Numbers	199AX, 199X, 199ABX *[25]*, 199BX *[25]*	199ADX, 199DX, 199DYX, 199DBX *[25]*
Contact Characteristics		
Contact Configuration	SPST, SPDT, DPST, DPDT	SPST-DM, SPST-DB
Contact Material	Silver alloy	
Thermal (Carrying) Current	40 A	
Maximum Switching Voltage	600 V(rms)	
Rated Switching Current at Voltage	Resistive: 40 A at 300 Vac 50/60 Hz; 5 A at 480 Vac 50/60 Hz; 5 A at 600 Vac 50/60 Hz; 40 A at 28 Vdc	Resistive: 40 A at 300 Vac 50/60 Hz; 12 A at 480 Vac 50/60 Hz; 10 A at 600 Vac 50/60 Hz; 40 A at 28 Vdc
	Motor: 2 hp at 120–600 Vac 50/60 Hz	
	Tungsten: 15 A at 120 Vac 50/60 Hz	
	Pilot Duty: A600	
Minimum Switching Requirement	1 A at 5 Vac/Vdc	
Coil Characteristics		
Coil Voltage Range*[26]*	6–600 Vac 50/60 Hz; 6–250 Vdc2	
Operating Range (% of Nominal)	85%–110% (AC); 80%–110% (DC)	
Average Consumption (Maximum)	10 VA (AC); 4 W (DC)	
Drop-Out Voltage Threshold	10% (AC/DC)	

Table 20.40: Additional DC Ratings with Blowout Magnet

Load Voltage	Contact Rating
110 Vdc	20 A
220 Vdc	8 A
325 Vdc	4 A
500 Vdc	2 A

Table 20.41: Auxiliary Switch Ratings (Non-Standard Option)

Load Type	Contact Rating
Resistive Load 120/250 Vac (50/60 Hz)	10 A
Motor Load 125/250 Vac (50/60 Hz)	0.25 hp
Tungsten Load 125 Vac (50/60 Hz)	3 A


[24] 50 A versions and additional options available. Call Customer Service for more information (847-441-2540).
[25] For ratings with blowout magnet, refer to Table 20.40 Additional DC Ratings with Blowout Magnet , page 20-14
[26] For available standard coil voltages, refer to Standard Part Numbers, page 20-14

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


Table 20.42: Contact Ratings and Electrical Endurance (per IEC 609471, 6094741)

Contact Ratings	Load Voltage	Frequency	Load Type	Estimated Electrical Endurance	See Note(s)
AC Load					
40 A	300 V	50/60 Hz	Resistive	50,000 cycles	*[27][28]*
2 hp	120–600 V		Motor	50,000 cycles	*[29][28]*
15 A	120 V		Tungsten	20,000 cycles	*[28][30]*
A600	—	—	Pilot Duty	100,000 cycles	*[28]*
DC Load					
40 A	28 V	DC	Resistive	100,000 cycles	*[28]*
20 A	110 V				
8 A	220 V				
4 A	325 V				
2 A	500 V				


Dimensions, in, (mm)

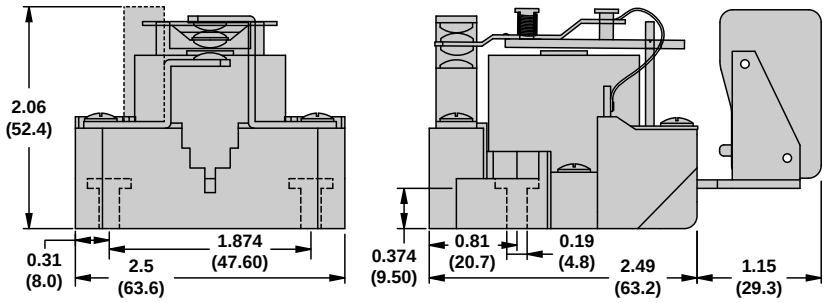

SPDT—Short Base (shown with optional Auxiliary Switch)

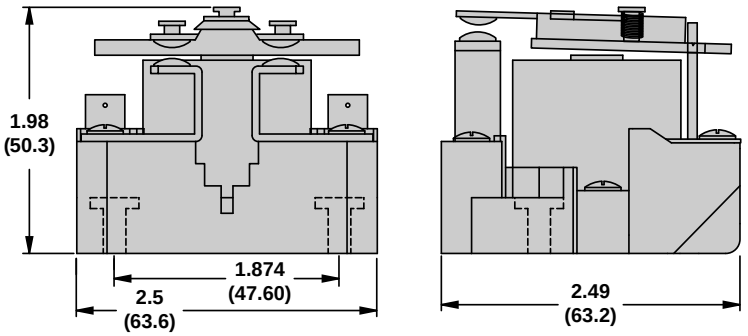


SPST-NO-DM

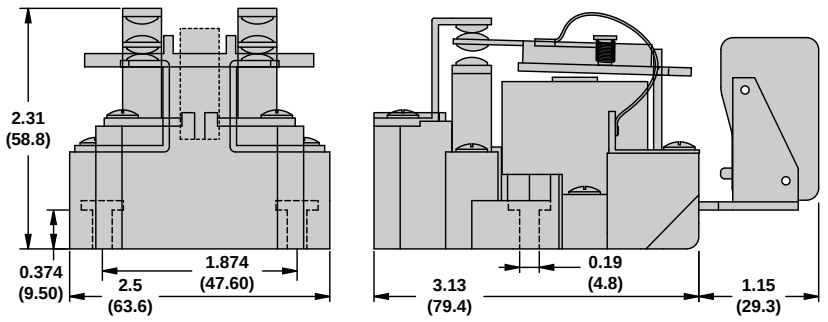

DPDT—Long Base (shown with optional Auxiliary Switch)


[27] Resistive AC load ratings are based on a power factor of 0.85–1.0.
[28] All ratings are based on applying the rated nominal power to the relay coil so as to provide a “clean” make and break that does not result in any contact chatter or multiple actuation of the contacts.
[29] Motor horsepower ratings are based on a power factor of 0.4–0.5, and an initial inrush current not exceedin
[30] The tungsten rating is based on cold-filament inrush current not exceeding 15 times the rated steady-state lamp current.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

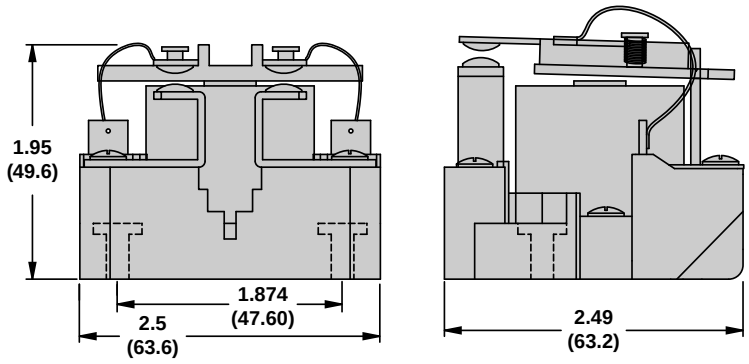


DPST-NO


Wiring Diagrams




SPDT




SPST-NC-DB




SPST-NO-DM



DPDT



DPST-NC



DPST-NO

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

725 Power Relays

725—SPST-NO, 30 A; DPST-NO, 25 A



Plug-In Socket Mount with full-feature cover



Panel/DIN Mount with blade terminals



Panel/DIN Mount with screw terminals

Table 20.43: Standard Coil Voltages

Rated Contact Current	Contact Configuration	Coil Voltage	Coil Resistance (Ω)	Mounting Style	Terminal Style	Standard Part Number
25 A	DPST-NO	24 Vac	275	DIN and panel	Blade terminals	725BXXBC3ML-24A
					Screw terminals	725BXXSC3ML-24A
		120 Vac	5200	DIN and panel	Blade terminals	725BXXBC3ML-120A
					Screw terminals	725BXXSC3ML-120A
				Plug-in (socket)	Blade terminals	725BXXBM4L-120A
		240 Vac	21000	DIN and panel	Blade terminals	725BXXBC3ML-240A
					Screw terminals	725BXXSC3ML-240A
		12 Vdc	75	DIN and panel	Blade terminals	725BXXBC3ML-12D
					Screw terminals	725BXXSC3ML-12D
		24 Vdc	300	DIN and panel	Blade terminals	725BXXBC3ML-24D
					Screw terminals	725BXXSC3ML-24D
				Plug-in (socket)	Blade terminals	725BXXBM4L-24D
30 A	SPST-NO	24 Vac	275	DIN and panel	Blade terminals	725AXXBC3ML-24A
					Screw terminals	725AXXSC3ML-24A
				Plug-in (socket)	Blade terminals	725AXXBM4L-24A
		120 Vac	5200	DIN and panel	Blade terminals	725AXXBC3ML-120A
					Screw terminals	725AXXSC3ML-120A
				Plug-in (socket)	Blade terminals	725AXXBM4L-120A
		240 Vac	21000	DIN and panel	Blade terminals	725AXXBC3ML-240A
					Screw terminals	725AXXSC3ML-240A
		12 Vdc	75	DIN and panel	Blade terminals	725AXXBC3ML-12D
					Screw terminals	725AXXSC3ML12D
		24 Vdc	300	DIN and panel	Blade terminals	725AXXBC3ML-24D


725 Specifications

Part Number	725AXX	725BXX
Contact Characteristics		
Contact Configuration	SPST-NO	DPST-NO
Contact Material	Silver alloy	
Thermal (Carrying) Current	30 A	25 A
Maximum Switching Voltage	300 V	
Current Ratings at Voltage	Resistive: 30 A at 277 Vac 50/60 Hz, 6,000 cycles	Resistive: 25 A at 277 Vac 50/60 Hz; 25 A at 30 Vdc, 6,000 cycles
	Motor: 1.5 hp at 120 Vac 50/60 Hz; 3.0 hp at 277 Vac 50/60 Hz, 6,000 cycles	Motor: 1.0 hp at 120 Vac 50/60 Hz; 2.0 hp at 277 Vac 50/60 Hz, 6,000 cycles
	Tungsten: 1.5 kW at 120 Vac 50/60 Hz, 6,000 cycles	Tungsten: 1.3 kW at 120 Vac 50/60 Hz, 6,000 cycles
Minimum Switching Requirement	100 mA at 5 Vdc (0.5 W)	
Coil Characteristics		
Coil Voltage Range[31] Standard Coil Voltages, page 20-17	6–240 Vac 50/60 Hz (All AC coils are rectified); 6–110 Vdc[31] Standard Coil Voltages, page 20-17	
Operating Range (% of Nominal)	75%–110% (AC/DC)	
Average Consumption	2.5 VA (AC); 1.9 W (DC)	
Insulation System Per UL 508	Class B (130°C)	


[31] For available standard coil voltages, refer to the

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


Dimensions, in, (mm)

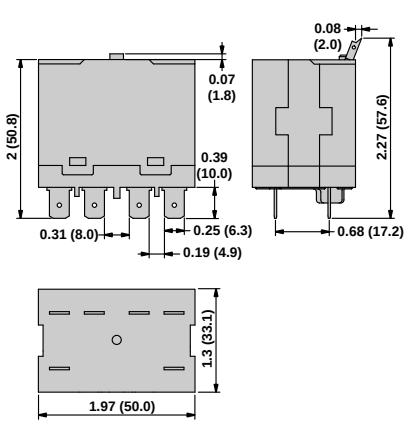


Plug-in Socket Mount (Blade Terminals)

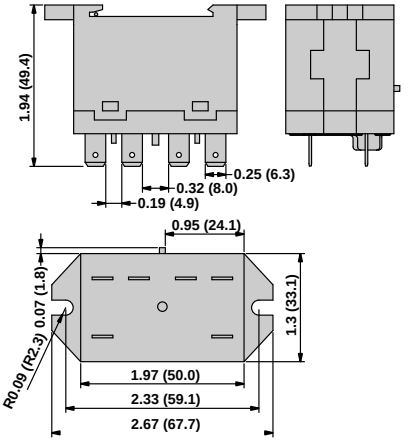


C3 – DIN/Panel Mount (Blade Terminals)

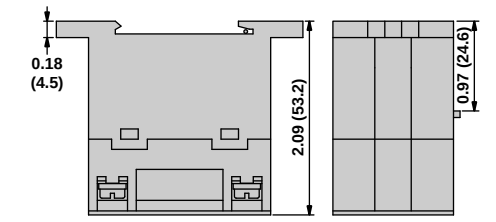

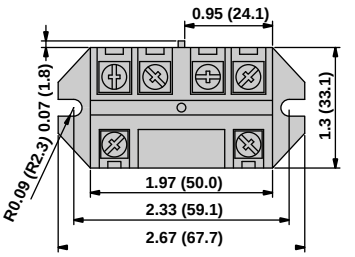


C3 – DIN/Panel Mount (Screw Terminals)

Wiring Diagrams

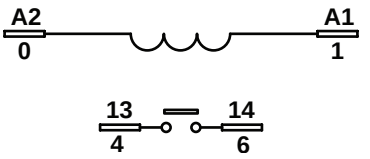

SPST-NO

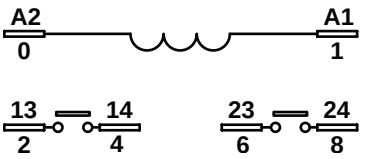

DPST-NO

© 2025 Schneider Electric
All Rights Reserved
3/25/025

389F Power Relays

389F—SPST, 30 A; DPDT, 20–25 A; SPDT, 25–30 A; 3PDT, 20 A



Plug-In (Socket) Cover



Side Flange Cover

Table 20.44: Standard Part Numbers

Rated Contact Current	Contact Configuration	Coil Voltage	Coil Resistance (Ω)	Cover Style	Standard Part Number
20 A	3PDT	120 Vac	1700	Plug-in (socket)	389FXCXC-120A
				Side flange	389FXCXC1-120A
				Side flange	389FXCXC1-240A
		12 Vdc	100	Side flange	389FXCXC1-12D
		24 Vdc	400	Plug-in (socket)	389FXCXC-24D
				Side flange	389FXCXC1-24D
25 A	DPDT	24 Vac	72	Plug-in (socket)	389FXBXC-24A
				Side flange	389FXBXC1-24A
		120 Vac	1700	Plug-in (socket)	389FXBXC-120A
				Side flange	389FXBXC1-120A
		240 Vac	7200	Side flange	389FXBXC1-240A
		12 Vdc	100	Plug-in (socket)	389FXBXC-12D
				Side flange	389FXBXC1-12D
		24 Vdc	400	Plug-in (socket)	389FXBXC-24D
				Side flange	389FXBXC1-24D
	SPDT	24 Vac	72	Side flange	389FXAXC1-24A
		12 Vdc	100	Side flange	389FXAXC1-12D
30 A	SPDT-DM-DB	24 Vdc	400	Side flange	389FXHXC1-24D
	SPST-NO-DM	24 Vdc	400	Side flange	389FHXXC1-24D


389F Specifications

Part Number	389FXAX 389FXBX	389FXCX	389FXHX 389FHXX
Contact Characteristics			
Contact Configuration	SPDT; DPDT	3PDT	SPSTNODM; SPDTDMDB
Contact Material	Silver alloy		
Thermal (Carrying) Current	25 A	20 A	30 A
Maximum Switching Voltage	600 V	300 V	600 V
Rated Switching Current at Voltage (Conforming to IEC AC-1 and DC-1)	NO and NC: 25 A at 250 Vac NO and NC: 15 A at 28 Vdc	NO and NC: 20 A at 250 Vac NO and NC: 15 A at 28 Vdc	NO and NC: 30 A at 250 Vac NO and NC: 30 A at 28 Vdc
Current Ratings at Voltage (Conforming to UL)	Resistive: 25 A at 300 Vac 50/60 Hz; 5 A at 600 Vac 50/60 Hz; 13 A at 28 Vdc, 100,000 cycles Motor: 1.5 hp at 200–240 Vac 50/60 Hz; 1 hp at 120–200 and 480–600 Vac*[32]* 50/60 Hz, 6,000 cycles Pilot Duty: B600, 6,000 cycles FLA/LRA: 22/98 A at 120 Vac, 6,000 cycles Ballast: 20 A, 277 Vac 50/60 Hz, 6,000 cycles	Resistive: 20 A at 150 Vac 50/60 Hz, 15 A at 250 Vac, 50/60 Hz 13 A at 28 Vdc, 50,000 cycles Motor: 0.5 hp at 120–240 Vac 50/60 Hz; 6,000 cycles Pilot Duty: B300, 6,000 cycles Ballast: 20 A, 150 Vac 50/60 Hz 6.67 A at 277 Vac 6,000 cycles	Resistive: 30 A at 300 Vac 50/60 Hz 10 A at 600 Vac 50/60 Hz 30 A at 28 Vdc, 100,000 cycles Motor: 1.5 hp at 200–600 Vac 50/60 Hz; 1 hp at 120–200 Vac 50/60 Hz, 6,000 cycles Pilot Duty: A600, 6,000 cycles FLA/LRA: 22/98 A at 120 Vac, 6,000 cycles; 17/60 A at 300 Vac, 6,000 cycles*[32]* Ballast: 25 A, 277 Vac 50/60 Hz, 6,000 cycles
Minimum Switching Requirement	100 mA at 5 Vdc		
Coil Characteristics			
Coil Voltage Range*[33]*Table 20.44 Standard Part Numbers, page 20-19	12–240 Vac 50/60 Hz; 12–24 Vdc*[33]*Table 20.44 Standard Part Numbers, page 20-19		
Operating Range (% of Nominal)	85%–110% (AC); 80%–110% (DC)		
Average Consumption	2 VA (AC); 1.5 W (DC)		
Drop-out Voltage Threshold	10% minimum (AC/DC)		
General Characteristics			
Electrical Life at Rated Load*[34]*	100,000 operations for IEC AC-1, 50,000 operations for IEC DC-1		
Mechanical Life at No Load (Unpowered)	5,000,000 operations		
Operate Time at Nominal Coil Voltage	20 ms (maximum)		
Dielectric Strength	Between coil and contact: 2200 Vac; between poles: 2200 Vac; between contacts: 1600 Vac		
Operating Temperature Range	-30 to +55°C (-22 to +131°F)		
Storage Temperature Range	-30 to +85°C (-22 to +185°F)		
Weight (Average)	84 g (3.0 oz)		
Product Certifications	UL (E164862), CE (per IEC 60947), CSA (File: 044087 Class: 3211-07), RoHS		


[32] Break all lines for 1 hp at 600 Vac, 50/60 Hz.
[33] For available standard coil voltages, refer to the
[34] The NO and NC contacts were tested independently

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Dimensions, in, (mm)

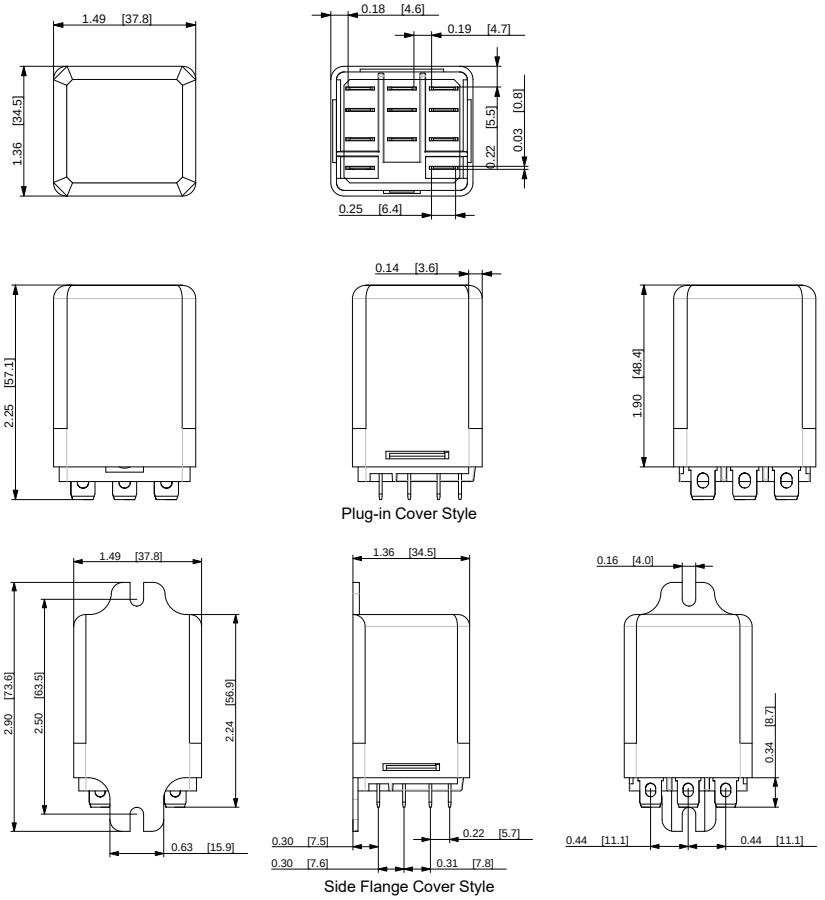

Wiring Diagrams

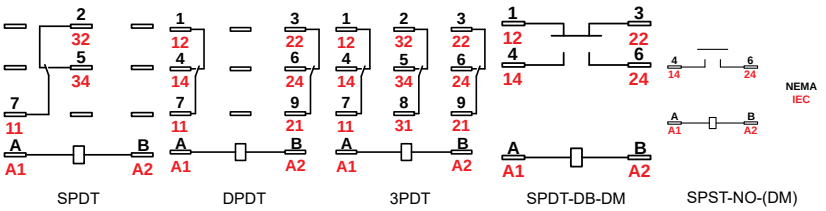

20 RELAYS AND TIMERS

© 2025 Schneider Electric
All Rights Reserved
3/25/2025





Side Flange Cover

300 Power Relays
300—DPDT, 30 A

Table 20.45: Standard Part Numbers

Rated Contact Current	Contact Configura-tion	Coil Voltage	Coil Resistance (Ω)	Cover Style	Standard Part Number
30 A	DPDT	24 Vac	54	Side flange mount	300XBXC1-24A
		120 Vac	1270	Side flange mount	300XBXC1-120A
		240 Vac	5400	Side flange mount	300XBXC1-240A
		12 Vdc	57	Side flange mount	300XBXC1-12D
		24 Vdc	300	Side flange mount	300XBXC1-24D

300 Specifications

Part Number	300XBXX *[35]*
Contact Characteristics	
Contact Configuration	DPDT
Contact Material	Silver alloy
Thermal (Carrying) Current	30 A
Maximum Switching Voltage	600 V
Current Ratings at Voltage *[35]*	Resistive: 30 A at 300 Vac 50/60 Hz; 30 A at 28 Vdc; 15 A at 600 Vac 50/60 Hz Motor: 1 hp at 120 Vac 50/60 Hz; 6,000 cycles; 2 hp at 208–600 Vac 50/60 Hz *[36]*, 6,000 cycles Pilot Duty: 5.5 A at 120 Vac 50/60 Hz, 6,000 cycles; 1.2 A at 600 Vac 50/60 Hz, 6,000 cycles
Minimum Switching Requirement	500 mA at 5 Vdc
Coil Characteristics	
Coil Voltage Range *[37]*	12–240 Vac 50/60 Hz; 12–24 Vdc
Operating Range (% of Nominal)	85%–110% (AC); 80%–110% (DC)
Average Consumption	3.4 VA (AC at 60 Hz); 2.3 W (DC)
Drop-out Voltage Threshold	15% (AC); 10% (DC)
General Characteristics	
Electrical Life at Rated Load	6,000 operations
Mechanical Life at No Load (Unpowered)	5,000,000 operations
Operate Time at Nominal Coil Voltage	20 ms
Dielectric Strength	Between coil and contact: 4000 Vac; Between poles: 2500 Vac; Between contacts: 2500 Vac
Operating Temperature Range	−40 to +55°C (−40 to +131°F)
Storage Temperature Range	−40 to +85°C (−40 to +185°F)
Weight (Average)	without blowout magnet: 85 g (3.0 oz) with blowout magnet: 95 g (3.4 oz)
Product Certifications	UL (E164862), CSA (File: 044087 Class: 3211-07), RoHS


Table 20.46: Additional DC Ratings with Blowout Magnet

Load Voltage	Contact Reading
150 Vdc	5 A

[35] For additional ratings with blowout magnet, refer to Table 20.46 Additional DC Ratings with Blowout Magnet, page 20-21
[36] Break all lines for 2 hp / 480–600 Vac, 50/60 Hz.
[37] For available standard coil voltages, refer to Table 20.45 Standard Part Numbers, page 20-21


© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Dimensions, in, (mm)

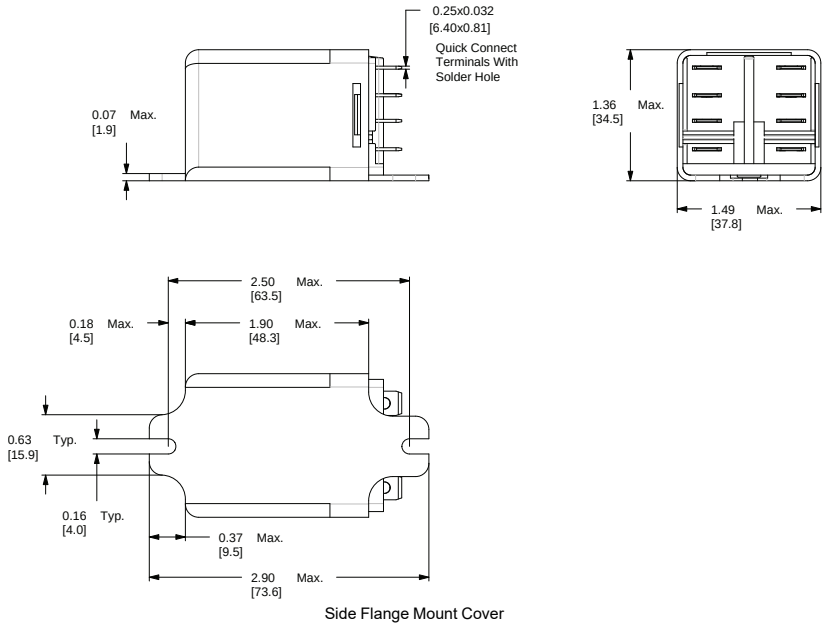

Side Flange Mount Cover

Wiring Diagrams



DPDT

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


8501KPDR12•••


8501KFR13•••


8501KUDR12P14•••


8501NR61


8501NR52


8501NR82


8501NR52 Socket
+8501KPR13P14V2 Relay


8501NR82 Socket
+8501KUDR12P14V Relay

New!

Square D™ Universal Relays

8501K relays are designed for multi-pole switching applications at 240 Vac or lower. These relays have industry standard wiring and pin terminal arrangements which allow for their use as replacements for many competitive relays without wiring or hardware modifications.

- 10 A relays
- DPDT or 3PDT
- Green pilot light option
- Motor load (hp) ratings
- DPDT latching models available
- AC or DC operation
- RoHS Compliant

Table 20.47: Relays: Standard Cover, without LED

Pins	Coil Voltage	Number and Type of Contacts - Thermal current (Ith)	
		DPDT (2 C/O) - 10 A	3PDT (3 C/O) - 10 A
		Catalog Number	Catalog Number
Octal	12 Vdc	8501KPDR12V51	—
	24 Vdc	8501KPDR12V53	8501KPDR13V53
	48 Vdc	8501KPDR12V56	—
	24 Vac	8501KPR12V14	8501KPR13V14
	120 Vac	8501KPR12V20	8501KPR13V20
	240 Vac	8501KPR12V24	—
Blade	24 Vdc	—	8501KUDR13V53
	24 Vac	—	8501KUR13V14
	120 Vac	8501KUR12V20	8501KUR13V20

Table 20.48: Relays: Flange Mount Cover

Pins	Coil Voltage	Number and Type of Contacts - Thermal current (Ith)
		DPDT (2 C/O) - 10 A
		Catalog Number
Blade	24 Vac	8501KFR12V14
	120 Vac	8501KFR12V20

Table 20.49: Relays: Standard Cover, with LED

Pins	Coil Voltage	Number and Type of Contacts - Thermal current (Ith)	
		DPDT (2 C/O) - 10 A	3PDT (3 C/O) - 10 A
		Catalog Number	Catalog Number
Octal	12 Vdc	8501KPDR12P14V51	—
	24 Vdc	8501KPDR12P14V53	8501KPDR13P14V53
	24 Vac	8501KPR12P14V14	8501KPR13P14V14
	120 Vac	8501KPR12P14V20	8501KPR13P14V20
Blade	24 Vdc	8501KUDR12P14V53	—
	120 Vac	—	8501KUR13P14V20

Table 20.50: Sockets

Contact Terminal Arrangement	Connection	For Use with Relays	Sold in Lots of	Catalog Number[1]
Mixed	Screw Connector	8501KPR12••• 8501KPDR12•••	1	8501NR51
		8501KPR12••• 8501KPDR12•••	10	8501NR51B
		8501KPR13••• 8501KPDR13•••	1	8501NR61
		8501KPR13••• 8501KPDR13•••	10	8501NR61B
Separate	Screw Connector	8501KPR12••• 8501KPDR12•••	1	8501NR52
		8501KPR12••• 8501KPDR12•••	10	—
		8501KPR13••• 8501KPDR13•••	1	8501NR62
		8501KPR13••• 8501KPDR13•••	10	—
		8501KUR12••• 8501KUDR12•••	1	8501NR82
		8501KUR12••• 8501KUDR12•••	10	8501NR82B
		8501KUR13••• 8501KUDR13•••	1	8501NR82
		8501KUR13••• 8501KUDR13•••	10	8501NR82B

[1] Please note that the B suffix only designates quantities of 10 and is not printed on the socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



8501NH7



8501NH82

Table 20.51: Accessories (Sold in Lots of 10)

Description	For Use With	Sold in Lots of	Catalog Number
Metal Restraining Srap	8501NR51 sockets 8501NR52 sockets 8501NR62 sockets 8501NR82 sockets	1	8501NH7
Metal Hold-Down Clip	8501NR52 sockets 8501NR62 sockets	10	—
	8501NR82 sockets		8501NH82

Approvals for 8501 KPR, KUR, and KFR Relays

c UL us LISTED — File: E3190 CCN: NLDX, NLDX7[2]

c TÜV us — File: E3190 CCN: NLDX2, NLDX8

CSA — File: 260367 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

Approvals for 8501NR Sockets

c TÜV us — File: E66924 CCN: SWIV2, SWIV8

CSA — File: 211268 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

[2] When used with the appropriate 8501NR socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


8501RS41P14V20


8501RS42P14V20


8501RS43P14V20


8501RS44P14V20


8501NR41 Socket
+8501RS41P14V20 Relay


8501NR42 Socket
+8501RS42P14V20 Relay


8501NR43 Socket
+8501RS43P14V20 Relay


8501NR34 Socket
+8501RS44P14V20 Relay

Square D™ Plug-in Relays

8501R miniature plug-in relays have a 15 A resistive rating. The compact size of these relays makes them ideal for downsizing equipment and applications where space is at a premium.

- SPDT through 4PDT
- AC or DC operated
- Horsepower rated
- Socket compatible
- Green LED pilot light option
- Silver alloy contacts

Table 20.52: Relays: Standard Cover, without LED

Coil Voltage	Number and Type of Contacts - Thermal current (Ith)			
	SPDT (1 C/O) - 15 A	DPDT (2 C/O) - 15 A	3PDT (3 C/O) - 15 A	4PDT (4 C/O) - 15 A
	Catalog Number	Catalog Number	Catalog Number	Catalog Number
12 Vdc	8501RSD41V51	8501RSD42V51	—	—
24 Vdc	8501RSD41V53	8501RSD42V53	8501RSD43V53	8501RSD44V53
24 Vac	8501RS41V14	8501RS42V14	8501RS43V14	8501RS44V14
120 Vac	8501RS41V20	8501RS42V20	—	8501RS44V20

Table 20.53: Relays: Standard Cover, with LED

Coil Voltage	Number and Type of Contacts - Thermal current (Ith)			
	SPDT (1 C/O) - 15 A	DPDT (2 C/O) - 15 A	3PDT (3 C/O) - 15 A	4PDT (4 C/O) - 15 A
	Catalog Number	Catalog Number	Catalog Number	Catalog Number
24 Vdc	8501RSD41P14V53	8501RSD42P14V53	8501RSD43P14V53	8501RSD44P14V53
24 Vac	—	8501RS42P14V14	—	—
120 Vac	8501RS41P14V20	8501RS42P14V20	8501RS43P14V20	8501RS44P14V20

Table 20.54: Sockets

Contact Terminal Arrangement	Connection	For Use with Relays	Sold in Lots of	Catalog Number[3]
Separate[4]	Screw Connector	8501RS41••• 8501RSD41•••	1	8501NR41
			10	8501NR41B
		8501RS42••• 8501RSD42•••	1	8501NR42
			10	8501NR42B
		8501RS43••• 8501RSD43•••	1	8501NR43
		8501RS44••• 8501RSD44•••	1	8501NR34

Table 20.55: Accessories (Sold in Lots of 10)

Description	For Use With	Sold in Lots of	Catalog Number
Plastic ID Clip	8501NR41 socket	Supplied with socket	—
Metal Hold-Down Clip	8501NR42 socket 8501NR43 socket 8501NR34 socket	10	8501NH42

Approvals for 8501 RS41, RSD41, RS42, RSD42, RS43, RSD43, RS44, and RSD44

c UL us LISTED — File: E3190 CCN: NLDX, NLDX7[5]

c UL us — File: E3190 CCN: NLDX2, NLDX8

CSA — File: 260367 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

Approvals for 8501NR Sockets

c UL us — File: E66924 CCN: SWIV2, SWIV8

CSA — File: 211268 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

[3] Please note that the B suffix only desginates quantities of 10 and is not printed on the socket.
[4] The inputs and outputs are on separate sides.
[5] When used with the appropriate 8501NR socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



8501NR45 Socket
+8501RS14V20 Relay



8501RS14V14



8501RSD34V51

Square D™ Miniature Control Relays

8501R relays are suited for use as logic elements and power switching output devices. The short stroke motion of the armature provides long mechanical life required for high speed operation of control systems. Different contact compositions allow these relays to be used in a variety of applications. Bifurcated crossbar (gold overlay silver) is suitable for high contact reliability and low level switching requirements. Silver alloy is best suited for inductive loads. Class I Division II sealed relays can be used in specified hazardous locations.

- 4PDT
- Complete socket line
- Horsepower rated
- AC or DC operation
- Green pilot light option

Table 20.56: Relays: Standard Cover, without LED

Coil Voltage	Number and Type of Contacts — Thermal current (Ith)	
	4PDT (4 C/O) — 6 A	4PDT (4 C/O) — 3 A
	Catalog Number	Catalog Number
24 Vdc	8501RSD14V53	—
24 Vac	8501RS14V14	—
120 Vac	8501RS14V20	8501RS24V20

Table 20.57: Relays: Standard Cover, with LED

Coil Voltage	Number and Type of Contacts — Thermal current (Ith)
	4PDT (4 C/O) — 6 A
	Catalog Number
24 Vdc	8501RSD14P14V53
120 Vac	8501RS14P14V20

Table 20.58: Relays: Hermetically Sealed Miniature Control Relays

Coil Voltage	Number and Type of Contacts — Thermal current (Ith)
	4PDT (4 C/O) — 5 A
	Catalog Number
12 Vdc	8501RSD34V51
24 Vdc	8501RSD34V53
110 Vac	8501RS34V20

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


8501NR45

Table 20.59: Sockets

Contact Terminal Arrangement	Connection	For Use With Relays	Sold in Lots of	Catalog Number*[6]*
Separate*[7]*	Screw Clamp Terminals	8501RS(D)14••• 8501RS(D)24••• 8501RS(D)34•••	1	8501NR45
		8501RS(D)14••• 8501RS(D)24••• 8501RS(D)34•••	10	8501NR45B
	Spring Clamp Terminals	8501RS(D)14••• 8501RS(D)24••• 8501RS(D)34•••	10	—

Table 20.60: Accessories (Sold in Lots of)

Description	For Use With	Sold in Lots of	Catalog Number
Clip-in ID tags	RXZE2S114S socket	10	RSZL300

Approvals for 8501 RS14, RSD14, RS24, and RSD24 Relays

c UL us LISTED — File: E3190 CCN: NLDX, NLDX7*[8]*
c UL us — File: E3190 CCN: NLDX2, NLDX8
CSA — File: 260367 Class: 3211 07
CE — IEC 61810-1
RoHS Compliant

Approvals for 8501 RS34 and RSD34 Relays

c UL us LISTED — File: E123950 CCN: NLDX, NLDX7*[8]* ANSI/ISA 12.12.01
c UL us — File: E196809 CCN: NQMJ2, NQMJ8
CSA — File: 211268 Class: 3218 06
CE — IEC 61810-1
RoHS Compliant

Approvals for 8501NR Sockets

c UL us — File: E66924 CCN: SWIV2, SWIV8
CSA — File: 211268 Class: 3211 07
CE — IEC 61810-1
RoHS Compliant

[6] Please note that the B suffix only desginates quantities of 10 and is not printed on the socket.
[7] The inputs and outputs are on separate sides.
[8] When used with the appropriate 8501NR socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



8501CDO6V51

Square D™ Power Relays

8501C relays are ideally suited for controlling single-phase motors, electric heaters, pumps, conveyors, material handling equipment, and other applications.

- 40 A contact rating
- Motor load (hp) ratings
- Durable open-frame construction
- UL Listed
- CSA certified
- CE approved
- RoHS compliant

Table 20.61: Relays: AC Rated Contacts, 40 A at 277 V (sold in lots of 1)

Coil Voltage	Number and type of contacts - Thermal current (Ith)			
	SPST: 1 NO / 0 NC	DPST: 2 NO / 0 NC	SPDT: 1 NO / 1 NC	DPDT: 2 NO / 2 NC
	Catalog Number	Catalog Number	Catalog Number	Catalog Number
12 Vdc	8501CDO6V51	—	—	8501CDO16V51
24 Vdc	—	—	—	8501CDO16V53
24 Vac	8501CO6V14	—	8501CO15V14	8501CO16V14
120 Vac	8501CO6V20	8501CO7V20	8501CO15V20	8501CO16V20
240 Vac	8501CO6V24	8501CO7V24	—	8501CO16V24
277 Vac	8501CO6V04	—	—	8501CO16V04
480 Vac	8501CO6V29	8501CO7V29	—	8501CO16V29

Table 20.62: Relays: DC Rated Contacts, 20 A at 110 V (sold in lots of 1)

Coil Voltage	Number and type of contacts - Thermal current (Ith)
	SPST: 1 NO / 0 NC
	Catalog Number
110 Vdc	8501CDO21V60

Table 20.63: Relays: DC Rated Contacts, 10 A at 110 V (sold in lots of 1)

Coil Voltage	Number and type of contacts - Thermal current (Ith)
	DPDT: 1 NO / 0 NC
	Catalog Number
24 Vdc	8501CDO22V53
120 Vac	8501CO22V20

Approvals for Square D Power Relays

File: E78351
CCN: NLDX, NLDX7

File: 218139
Class: 3211 04

IEC 60947-4-1

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

UL Listed when used with corresponding sockets



750H Hazardous Location Relay


750H Hazardous Location Series
DPDT, PDT 12A

Contact Rating	Contact Configuration	Nominal Voltage	Coil Resistance (Ω)	Standard Part Number
12 A	DPDT	24 Vac, 50/60 Hz	72	750XBXH-24A
		120 Vac, 50/60 Hz	1700	750XBXH-120A
		12 Vdc	120	750XBXH-12D
		24 Vdc	470	750XBXH-24D
		110 Vdc	10000	750XBXH-110D
	3PDT	120 Vac, 50/60 Hz	1700	750XCXH-120A
		240 Vac, 50/60 Hz	7200	750XCXH-240A
		24 Vdc	470	750XCXH24D

750H Specifications

Part Number		750XBXH	750XCXH
Contact Characteristics			
Terminal Style		Octal	
Contact Material		Silver Alloy	
Load Type		Standard	
Contact Configuration		DPDT	3PDT
Carrying Current		12A	
Maximum Switching Voltage		300 V	
Rated Switching Current Conforming to UL and ANSI/ ISA 12.12.01)	Resistive	12 A at 120 Vac, 50/60 Hz, 100,000 cycles 12 A at 240 Vac, 50/60 Hz, 100,000 cycles 12 A at 28 Vdc, 100,000 cycles	
	Motor	1/2 hp at 240 Vac, 50/60 Hz , 100,000 cycles 1/3 hp at 120 Vac, 50/60 Hz , 100,000 cycles	
	Pilot Duty	B300 — 100,000 cycles	
Minimum Switching Requirement		100 mA at 5 Vdc	
Coil Characteristics			
Maximum Operating Voltage		110% (AC/DC)	
Maximum Pickup Voltage		85% (AC); 80% (DC)	
Drop-out Voltage Threshold		15% (AC); 10% (DC)	
Average Consumption		2.75 VA at 60 Hz (AC); 1.2 W (DC)	


Dimensions, in. (mm)

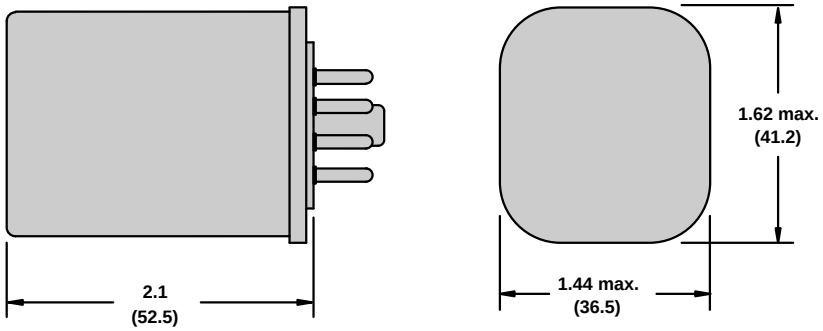


750H

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Wiring Diagrams

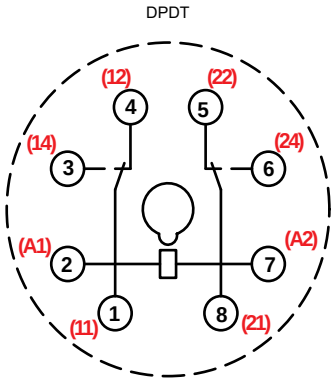

NEMA
(IEC)

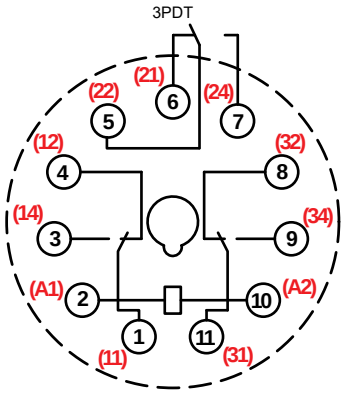

NEMA
(IEC)

Relay Accessories


1


2


3


4


5



6


7


8

Description		Function	For Use with Relays	Pkg. Min.	Standard Part Number
1	Socket	DIN or panel mounting with screw terminals		10	—
2	Socket	DIN or panel mounting with elevator terminals, module	750XBXH	10	70–750E8–1
3	Socket	DIN or panel mounting with screw terminals and clamping plates		10	70–464–1
4	Socket	Panel mounting with screw terminals and clamping plates		10	70–169–1
5	Socket	DIN or panel mounting	750XCXH	10	—
6	Socket	DIN or panel mounting with elevator terminals		10	70–750E11–1
7	Socket	DIN or panel mounting with screw terminals and clamping plates		10	70–465–1
8	Socket	Panel mounting with screw terminals and clamping plates		10	—

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



SSL1A12JD



SSLZVA1



RSL Z2



RSL Z3

Harmony™ SSL Relays

Harmony SSL solid state relays offer the advantages of several input and output configurations for both AC and DC switching applications. Their compact size and modular design reduces space and allows easy mounting on the socket. Key features include:

- Available with zero voltage switching for resistive load and random switching for inductive load applications.
- Socket with reverse polarity protection circuit and LED indicator for easy identification of control status.

Refer to Online EZ Selector.

Table 20.64: Relays (sold in lots of 12)

Switching	Input Voltage	Output Voltage	Contact Configuration	Load Current Range	SPDT (1 C/O) Catalog Number
DC switching	3–12 Vdc	1–24 Vdc	SPST N.O. (1 N/O)	3.5 A	SSL1D03JD
		1–48 Vdc	SPST N.O. (1 N/O)	0.1 A	SSL1D101JD
	15–30 Vdc	1–24 Vdc	SPST N.O. (1 N/O)	3.5 A	SSL1D03BD
	16–30 Vdc	1–48 Vdc	SPST N.O. (1 N/O)	0.1 A	SSL1D101BD
Zero voltage switching	3–12 Vdc	24–280 Vac	SPST N.O. (1 N/O)	2 A	SSL1A12JD
	15–30 Vdc	24–280 Vac	SPST N.O. (1 N/O)	2 A	SSL1A12BD
Random switching	3–12 Vdc	24–280 Vac	SPST N.O. (1 N/O)	2 A	SSL1A12JDR
	15–30 Vdc	24–280 Vac	SPST N.O. (1 N/O)	2 A	SSL1A12BDR

Table 20.65: Sockets (sold in lots of 10)

Control Voltage	For Use with Relays	Socket Type	
		Screw Connector Catalog Number	Spring Terminal Catalog Number
5 Vdc	SSL1D03JD SSL1D101JD SSL1A12JD SSL1A12JDR	SSLZVA1	SSLZRA1
24 Vdc	SSL1D03BD SSL1D101BD SSL1A12BD SSL1A12BDR	SSLZVA1	SSLZRA1

Table 20.66: Accessories

Description	Compatibility	Catalog Number
ID tags (2 sheets of 64 tags)	RSL series sockets, SSL series sockets	RSLZ5
Bus jumper (10 x 20-pole jumper)		RSLZ2
Butterfly isolator (10 isolators)		RSLZ3

Approvals for SSL Relays

c UL us — File: E173076 CCN: NRNT2, NRNT8

CSA — File: 257594 Class: 3211 07

CE — IEC 60950–1

RoHS Compliant

Approvals for SSLZ Sockets

c UL us — File: E172326 CCN: SWIV2

CSA — File: 254977 Class: 3211 07

CE — IEC 60950–1

RoHS Compliant

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Harmony™ SSM Relays

Harmony SSM solid state relays are ready-to-use modular relays with SCR/MOSFET outputs for greater switching density. The unique IP20 housing design and integrated heat sink with no exposed metal surface offers compactness and enhances operating conditions of the relay. SSM relays are DIN rail mounted and available with zero voltage switching for resistive load and random switching for inductive load applications. The SSM relay range comprises:

- SSM1: Single channel, single-phase relays with 6 A and 12 A ratings
- SSM2: Dual channel, single-phase relays with 6 A rating

Refer to Online EZ Selector.



SSM1A36BD



SSM1A312BD

Table 20.67: SSM1 Single Channel Solid State Relays (sold in lots of 1)

Switching	Input Voltage	Ouput Voltage	Contact Configura-tion	Load Current Range	Motor Load Rating	Catalog Number
DC switching	4–32 Vdc	1–60 Vdc	SPST N.O. (1 N/O)	6 A	–	SSM1D26BD
			SPST N.O. (1 N/O)	12 A	–	SSM1D212BD
		1–100 Vdc	SPST N.O. (1 N/O)	6 A	–	SSM1D36BD
			SPST N.O. (1 N/O)	12 A	–	SSM1D312BD
Zero voltage switching	4–32 Vdc	24–280 Vac	SPST N.O. (1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A16BD
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A112BD
		48–600 Vac	SPST N.O. (1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A36BD
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A312BD
	18–36 Vac	24–280 Vdc	SPST N.O. (1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A16B7
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A112B7
		48–600 Vac	SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A312B7
	90–140 Vac	24–280 Vac	SPST N.O. 1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A16F7
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A112F7
	200–265 Vac	24–280 Vac	SPST N.O. (1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A16P7
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A112P7
Random switching	4–32 Vdc	24–280 Vac	SPST N.O. (1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A16BDR
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A112BDR
		48–600 Vac	SPST N.O. (1 N/O)	6 A	1/6 hp @ 240 Vac	SSM1A36BDR
			SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A312BDR
	18–36 Vac	24–280 Vac	SPST N.O. (1 N/O)	12 A	1/3 hp @ 240 Vac	SSM1A112B7R



SSM2A16BDR

Table 20.68: SSM2 Dual Channel Solid State Relays (sold in lots of 1)

Switching	Input Voltage	Ouput Voltage	Contact Configura-tion	Load Current Range	Catalog Number *[1]*
Zero voltage switching	4–32 Vdc	24–280 Vac	DPST N.O. (2 N/O)	6	SSM2A16BD
Random switching	4–32 Vdc	24–280 Vac	DPST N.O. (2 N/O)	6	SSM2A16BDR

Approvals for SSM Relays

c UL us — File: E359576 CCN: NMFT2, NMFT8

CSA — File: 257594 Class: 3211 04

CE — IEC 60950-1

RoHS Compliant

[1] 4–pin connector for dual channel output only. Mating connector: MOLEX 050579404 or equivalent.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Harmony™ SSL, SSM and SSP

Harmony SSL, SSM and SSP relays do not have any moving parts to wear out. Combined with vibration resistance, arc-less switching and the lack of acoustical noise, solid state relays are the ideal product for switching applications that demand reliable execution. For added reliability, the Harmony SSL, SSM and SSP solid state relays use Direct Copper Bonding (DCB) technology to decrease internal temperatures and improve the overall quality of the product. The SSR solid state relay range comprises:

- Relays for DIN rail mounting: SSRD
- Relays for panel mounting: SSRP

Key features include:

- Input voltage range 3–32 Vdc, 90–280 Vac
- Breaking capacities up to 125 A
- Zero voltage turn on, low EMI/RFI
- No moving parts
- Shock and vibration resistant
- No acoustical noise
- Fast response
- Arc-less switching
- Long life (>10^9 operations typical)

Refer to Online EZ Selector.

Table 20.69: Pre-assembled solid state slim relays

1 NO contact Switching	Voltage Range		Load Current Range	Reference	Weight
	Control Input	Load Output			
	V	V	A		kg/lb
Relays mounted on screw sockets (sold in lots of 30)					
DC Switching	4 to 12	1 to 24	3.5	SSL1D03JDPV (SSL1D03JD + SSLZVA1)	0.033/0.073
Zero voltage switching	4 to 12	24 to 250	2	SSL1A12JDPV (SSL1A12JD+SSLZVA1)	0.033/0.073
DC Switching	16 to 30	1 to 24	3.5	SSL1D03BDPV (SSL1D03BD+SSLZVA1)	0.033/0.073
	16 to 30	1 to 48	0.1	SSL1D101BDPV (SSL1D101BD +SSLZVA1)	0.033/0.073
Zero voltage switching	16 to 30	24 to 250	2	SSL1A12BDPV (SSL1A12BD+SSLZVA1)	0.033/0.073
Random switching	16 to 30	24 to 250	2	SSL1A12BDRPV (SSL1A12BDR +SSLZVA1)	0.033/0.073
Relays mounted on spring sockets (sold in lots of 30)					
DC Switching	4 to 12	1 to 24	3.5	SSL1D03JDPR (SSL1D03JD+SSLZRA1)	0.033/0.073
DC Switching	16 to 30	1 to 24	3.5	SSL1D03BDPR (SSL1D03BD +SSLZRA1)	0.033/0.073
Zero voltage switching	16 to 30	24 to 250	2	SSL1A12BDPR (SSL1A12BD +SSLZRA1)	0.033/0.073
Random switching	16 to 30	24 to 250	2	SSL1A12BDRPR (SSL1A12BDR +SSLZRA1)	0.033/0.073

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



SSP1D425BD



SSM1A120••



SSM1A445••



SSRHP07

Table 20.70: Relays and sockets for customer assembly

SSL single-phase solid state relays (sold in lots of 12)					
Switching	Voltage Range		Load Current Range	Reference	Weight
	Control Input	Load Output			
	V	V	A		kg/lb
DC Switching	3 to 12	1 to 24	3.5	SSL1D03JD	0.004/0.009
		1 to 48	0.1	SSL1D101JD	0.004/0.009
	15 to 30	1 to 24	3.5	SSL1D03BD	0.004/0.009
	16 to 30	1 to 48	0.1	SSL1D101BD	0.004/0.009
Zero voltage switching	4 to 12	24 to 250	2	SSL1A12JD	0.033/0.073
Random switching	4 to 12	24 to 250	2	SSL1A12BD	0.033/0.073
DC Switching	16 to 30	1 to 48	0.1	SSL1A12JDR	0.033/0.073
Zero voltage switching	16 to 30	24 to 250	2	SSL1A12BDR	0.033/0.073

Sockets equipped with LED and protection circuit (sold in lots of 10)					
Control Voltage (Nominal)	For Use With Relays	Socket Type			
		Screw Connector		Spring Terminals	
V		Unit Reference	Weight kg/lb	Unit Reference	Weight kg/lb
5	SSL1D03JD SSL1D101JD SSL1A12JD SSL1A12JDR	SSLZVA1	0.029/ 0.063	SSLZRA1	0.029/0.063
24	SSL1D03BD SSL1D101BD SSL1A12BD SSL1A12BDR	SSLZVA1	0.029/ 0.063	SSLZRA1	0.029/0.063
60	SSL1D03ND SSL1D101ND SSL1A12ND SSL1A12NDR	SSLZVA2	0.029/ 0.063	—	0.029/0.063
110	SSL1D03ND SSL1D101ND SSL1A12ND SSL1A12NDR	SSLZVA3	0.029/ 0.063	—	0.029/0.063
230	SSL1D03ND SSL1D101ND SSL1A12ND SSL1A12NDR	SSLZVA4	0.029/ 0.063	—	0.029/0.063

Table 20.71: SSM1 single-phase solid state relays (12 and 18 mm)

Description	Compatibility	Reference	Weight kg/lb
Clip-in legends (2 sheets of 64 legends)	SSL sockets	RSLZ5	0.001/0.002
Bus jumper (10 x 20-pole jumper)	SSL sockets	RSLZ2	0.001/0.002
Partition plate (10 partition plates)	SSL sockets	RSLZ3	0.001/0.002

Table 20.72: SSM1 single-phase solid state relays (12 and 18 mm)

Switching	Voltage range		Load current range	Reference	Weight kg/lb
	Control input	Load output			
	V	V			
DC switching	4...32	1...60	6	SSM1D26BD	0.050/0.110
			12	SSM1D212BD	0.090/0.198
		1...100	6	SSM1D36BD	0.050/0.110
			12	SSM1D312BD	0.090/0.198
Zero voltage switching	4...32	24...280	6	SSM1A16BD	0.050/0.110
			12	SSM1A112BD	0.090/0.198
		48...600	6	SSM1A36BD	0.050/0.110
			12	SSM1A312BD	0.090/0.198
	18...36	24...280	6	SSM1A16B7	0.050/0.110
			12	SSM1A112B7	0.090/0.198
		48...600	12	SSM1A312B7	0.090/0.198
	90...140	24...280	6	SSM1A16F7	0.050/0.110
			12	SSM1A112F7	0.090/0.198
	200...265	24...280	6	SSM1A16P7	0.050/0.110
			12	SSM1A112P7	0.090/0.198
Random switching	4…32	24…280	6	SSM1A16BDR	0.050/0.110
			12	SSM1A112BDR	0.090/0.198
		48…600	6	SSM1A36BDR	0.050/0.110
			12	SSM1A312BDR	0.090/0.198
	18…36	24…280	12	SSM1A112B7R	0.090/0.198

Table 20.73: SSM2 single-phase solid state relays, dual channel

Switching	Voltage range		Load current range	Reference	Weight kg/lb
	Control input	Load output			
	V	V			
Zero voltage switching	4...32	24...280	6	SSM2A16BD	0.090/0.198
Random switching	4...32	24...280	6	SSM2A16BDR	0.090/0.198

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Table 20.74: SSM3 three-phase solid state relays

Switching	Voltage range		Load current range	Reference	Weight kg/lb
	Control input	Load output			
	V	V			
Zero voltage switching	4...32	48…600	25	SSM3A325BD	0.740/1.631
	90…140	48…600	25	SSM3A325F7	0.740/1.631
	180...280	48…600	25	SSM3A325P7	0.740/1.631
	4...32	48…600	25	SSM3A325BDR	0.740/1.631

Table 20.75: SSP1 single-phase solid state relays

Switching	Voltage range		Load current range	Reference	Weight kg/lb
	Control input	Load output			
	V	V			
Relays with embedded thermal pad - Easy Series					
DC switching	3.5…32	1…150	12	SSP1D412BDT	0.089/0.196
			25	SSP1D425BDT	0.089/0.196
			40	SSP1D440BDT	0.089/0.196
Zero voltage switching	3…32	24…300	10	SSP1A110BDT	0.089/0.196
			25	SSP1A125BDT	0.089/0.196
			50	SSP1A150BDT	0.089/0.196
			75	SSP1A175BDT	0.089/0.196
	4…32	48…660	50	SSP1A450BDT	0.089/0.196
			75	SSP1A475BDT	0.089/0.196
			90	SSP1A490BDT	0.089/0.196
			125	SSP1A4125BDT	0.089/0.196
	90…280	24…300	10	SSP1A110M7T	0.089/0.196
			25	SSP1A125M7T	0.089/0.196
			50	SSP1A150M7T	0.089/0.196
		48…660	50	SSP1A450M7T	0.089/0.196
			75	SSP1A475M7T	0.089/0.196
			90	SSP1A490M7T	0.089/0.196
			125	SSP1A4125M7T	0.089/0.196
Relays without embedded thermal pad					
DC switching	3.5…32	1…150	12	SSP1D412BD	0.089/0.196
			25	SSP1D425BD	0.089/0.196
			40	SSP1D440BD	0.089/0.196
Zero voltage switching	3…32	24…300	10	SSP1A110BD	0.089/0.196
			20	SSP1A125BD	0.089/0.196
			50	SSP1A150BD	0.089/0.196
			75	SSP1A175BD	0.089/0.196
	4…32	48…660	50	SSP1A450BD	0.089/0.196
			75	SSP1A475BD	0.089/0.196
			90	SSP1A490BD	0.089/0.196
	90…280	24…300	25	SSP1A125M7	0.089/0.196
			50	SSP1A150M7	0.089/0.196
		48…660	50	SSP1A450M7	0.089/0.196
			90	SSP1A490M7	0.089/0.196
Relays with embedded thermal pad and smart diagnostic features					
Zero voltage switching	3...32	24...300	25	SSP1A125BDS	0.097/0.214
	4...32	48...660	75	SSP1A475BDS	0.097/0.214
			125	SSP1A4125BDS	0.097/0.214

Table 20.76: SSP1*E single-phase relays — Easy Series

Switching	Voltage range		Load current range	Reference	Weight kg/lb
	Control input	Load output			
	V	V			
Relays with embedded thermal pad - Easy Series					
Zero voltage switching	4...32	20...300	10	SSP1A110BDE	0.115 /0.254
			25	SSP1A125BDE	
			50	SSP1A150BDE	
			75	SSP1A175BDE	
			90	SSP1A190BDE	
			125	SSP1A110BDE	



SSP1E

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Table 20.77: SSP3 three-phase solid state relays

Switching	Voltage range		Load current range	Reference	Weight kg/lb
	Control input	Load output			
	V	V			
Relays with embedded thermal pad					
Zero voltage switching	4...32	48...530	25	SSP3A225BDT	0.240/0.529
			50	SSP3A250BDT	0.240/0.529
	18…36	48...530	50	SSP3A250B7T	0.240/0.529
	180…280	48...530	25	SSP3A225P7T	0.240/0.529
			50	SSP3A250P7T	0.240/0.529
Random switching	4...32	48...530	25	SSP3A225BDRT	0.240/0.529
			50	SSP3A250BDRT	0.240/0.529
	180…280	48...530	50	SSP3A250P7RT	0.240/0.529
Relays without embedded thermal pad					
Zero voltage switching	4…32	48…530	25	SSP3A225BD	0.240/0.529
			50	SSP3A250BD	0.240/0.529
	18…36	48…530	25	SSP3A225B7	0.240/0.529
			50	SSP3A250B7	0.240/0.529
	90…140	48…530	50	SSP3A250F7	0.240/0.529
	180…280	48…530	50	SSP3A250P7	0.240/0.529
Random switching	4…32	48…530	25	SSP3A225BDR	0.240/0.529
			50	SSP3A250BDR	0.240/0.529
	18…36	48…530	25	SSP3A225B7R	0.240/0.529

Table 20.78: Heat sinks for customer assembly

Mounting	Number and type of relays supported	Surface area	Thermal rsistance	Reference	Weight kg/lb
		cm^2/in^2	oC/W		
Panel mount	Up to 3 SSP1 units 1 SSP3 unit	6,823/1,058	0.2	SSRHP02	2.592/5.714
	Up to 3 SSP1 units 1 SSP3 unit	4,406/683	0.5	SSRHP05	1.440/3.174
	1 SSP1 unit	1,640/254	0.7	SSRHP07	0.526/1.159
	Up to 3 SSP1 units 1 SSP3 unit	1,425/221	1	SSRHP10	0.620/1.367
	1 SSP1 unit	336/52.10	2.5	SSRHP25	0.100/0.220
DIN rail mount	Up to 3 SSP1 units 1 SSP3 unit	1,425/221	1	SSRHD10	0.630/1.389

Table 20.79: Accessories

Description	Type of relays supported	Unit reference	Weight kg/lb
Copper terminal lug for AWG 6 (13.3 mm^2) to AWG 0 (53.5 mm^2) Sold in lots of 10	SSP1	SSRAL1	0.042/0.093

Approvals for SSRP and SSRD Relays

c UL us File: E258297 CCN: NRNT2, NRNT8

CSA File: 230765 Class: 3211 07

CE IEC 60950-1

RoHS Compliant

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


SSP3A225P7


Harmony™ SSP Relays


Harmony SSP solid state relays are three-phase panel mounted relays with IP20 housing. The SCR outputs allow them to be used in various power switching applications. These power relays with 25 A and 50 A current rating are EMC compliant. SSP relays are integrated with an R-C snubber circuit and TVS (Transient Voltage Suppression). They are available with zero voltage switching for resistive load and random switching for inductive load applications.

Refer to Online EZ Selector.

Table 20.80: SSP Three-Phase Solid State Relays (sold in lots of 1)

Switching	Input Voltage	Ouput Voltage	Contact Configura-tion	Load Current Range	Motor Load Rating	Catalog Number *[2]*
Zero voltage switching	4–32 Vdc	48–530 Vac	3PST N.O. (3 N/O)	25 A	3/4 hp @ 120 Vac 1 hp @ 240 Vac 3 hp @ 480 Vac 4.4 hp @ 530 Vac	SSP3A225BD
				50 A	1.5 hp @ 120 Vac 3 hp @ 240 Vac 7.5 hp @ 480 Vac 8.8 hp @ 530 Vac	SSP3A250BD
	18–36 Vac	48–530 Vac	3PST N.O. (3 N/O)	25 A	3/4 hp @ 120 Vac 1 hp @ 240 Vac 3 hp @ 480 Vac 4.4 hp @ 530 Vac	SSP3A225B7
				50 A	1.5 hp @ 120 Vac 3 hp @ 240 Vac 7.5 hp @ 480 Vac 8.8 hp @ 530 Vac	SSP3A250B7
	90–140 Vac	48–530 Vac	3PST N.O. (3 N/O)	50 A	1.5 hp @ 120 Vac 3 hp @ 240 Vac 7.5 hp @ 480 Vac 8.8 hp @ 530 Vac	SSP3A250F7
	180–280 Vac	48–530 Vac	3PST N.O. (3 N/O)	50 A	1.5 hp @ 120 Vac 3 hp @ 240 Vac 7.5 hp @ 480 Vac 8.8 hp @ 530 Vac	SSP3A250P7
Random switching	4–32 Vdc	48–530 Vac	3PST N.O. (3 N/O)	25 A	3/4 hp @ 120 Vac 1 hp @ 240 Vac 3 hp @ 480 Vac 4.4 hp @ 530 Vac	SSP3A225BDR
				50 A	1.5 hp @ 120 Vac 3 hp @ 240 Vac 7.5 hp @ 480 Vac 8.8 hp @ 530 Vac	SSP3A250BDR
	18–36 Vac	48–530 Vac	3PST N.O. (3 N/O)	25 A	3/4 hp @ 120 Vac 1 hp @ 240 Vac 3 hp @ 480 Vac 4.4 hp @ 530 Vac	SSP3A225B7R


SSRHP02


SSRHP05



SSRHP10

Table 20.81: Accessories

Description	Compatibility	Thermal Resistance	Catalog Number
Heat sink panel mount (lot of 10)	1 x SSP 1 x SSRP 2 x SSRP 3 x SSRP	0.2 °C/W	SSRHP02
	1 x SSP 1 x SSRP 2 x SSRP 3 x SSRP	0.5 °C/W	SSRHP05
	1 x SSP 1 x SSRP 2 x SSRP	1 °C/W	SSRHP10
	1 x SSRP	2.5 °C/W	SSRHP25
Heat sink DIN rail mount (lot of 1)	1 x SSP 1 x SSRP 2 x SSRP	1 °C/W	SSRHD10

Approvals for SSP Relays

c UL us — File: E359576 CCN: NMFT2, NMFT8

CSA — File: 257594 Class: 3211 04

CE — IEC 60950-1

RoHS Compliant

[2] Add a T to the end of the part number to order the SSP with a thermal pad interface.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025




8501XO40V02 AC Control Relay



8501XMO40V02 AC Master Relay

AC Control and Master Relays Dimensions



Dual Dimensions: **INCHES**
Millimeters



8501XO40XTE1V02 AC Timing Relay

Square D™ NEMA Style AC Relays

Class 8501 Type X relays combine a rugged, heavy-duty design with modular construction for greater flexibility. They are ideal for applications where long life, high reliability, and ease of maintenance are important. The Type X family offers a complete line of relays and accessories for most control applications. The 8501X relay consists of a standard 4 pole base to which it is possible to add additional contacts, timer, and latch functionality. Instantaneous and Master contacts are converted from N.O. to N.C. by flipping the contact cartridge within the base. The 8501X relay can either be built from individual part numbers or ordered pre-assembled.

AC Control Relays

- Straight-through wiring
- Plug-in contact cartridges for easy contact conversion and replacement
- Contact conversion without removing terminal screws or wires
- Self-lifting pressure wire connectors
- Replaceable coil

Table 20.82: AC Control Relays (lots of 1)

No. of N.O. 10 A Convertible Instantaneous Contacts*[1]*	Type*[1][2]*
0	XO00
2	XO20
3	XO30
4	XO40
6	XO60
8	XO80
10	XO1000
12	XO1200

AC Master Relays

- 20 ampere contact rating due to use of master contact cartridges.*[3]*
- Provisions for standard cartridges to be used in contact cavities not occupied by master cartridges in 2-8 pole AC relay.

Table 20.83: AC Master Relays

No. of N.O. 20 A Convertible Contacts	Type*[2][4]*
2	XMO20
4	XMO40
6	XMO60

Table 20.84: Dimension A (See Figure at Left) and Weights

No. of Poles	Dim. A		Shipping Weight, lb
	in.	mm	
0–4	3.95	100	2.0
6–8	5.16	131	2.3
10–12	6.36	162	2.7

AC Timing Relays

- Easily convertible On or Off Delay
- Two adjustable timing ranges
- Repeat accuracy well above ±10%
- Convertible 1 N.O. and 1 N.C. timed contacts
- Large knob for easy adjustment of time delay
- Off Delay mode times out even after loss of power

Table 20.85: AC Timing Relays (lots of 1)

Timing Mode	No. of N.O. 10 A Convertible Instantaneous Contacts	Timed Convertible Contacts		Timing Relay	
				0.2–60 s	5–180 s
		N.O.	N.C.	Type *[2]*	Type *[2]*
On Delay	0	1	1	XO00XTE1	XO00XTE2
	2	1	1	XO20XTE1	XO20XTE2
	4	1	1	XO40XTE1	XO40XTE2
Off Delay	0	1	1	XO00XTD1	XO00XTD2
	2	1	1	XO20XTD1	XO20XTD2
	4	1	1	XO40XTD1	XO40XTD2


[1] A maximum of 8 N.C. contacts is allowed on 9–12 pole relays.
[2] Voltage code must be specified to order these products. Refer to Table 20.89 and insert the code as shown in Table 20.90.
[3] Maximum of six 8501 Type XC4 master cartridges may be used on only 7 and 8 pole AC devices.
[4] Attachments not permitted on this relay.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



8501XO40XLV02 Latching Relay

AC Latching Relays Dimensions

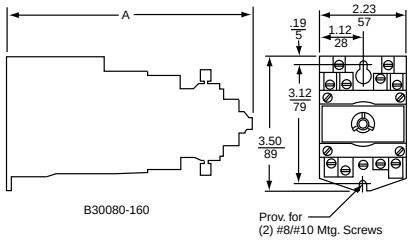

Dual Dimensions: **INCHES**
Millimeters

AC Latching Relays

- Mechanical latch holds all contacts switched even after removal of power from replaceable latching coil.
- Provides sequence memory in the event of power loss. Ideal for press control, process control, and punch presses.
- Replaceable unlatch coil to switch contacts back to original state.

Table 20.86: AC Latching Relays (lots of 1)

N.O. 10 A Convertible Instantaneous Contacts	Latching Relay Type *[5]*
2	XO20XL
3	XO30XL
4	XO40XL
6	XO60XL
8	XO80XL

Table 20.87: Dimension A (See Figure at Left) and Weights

No. of Poles	Dim. A		Shipping Weight, lb
	in.	mm	
2–4	6.54	166	2.8
6–8	7.74	197	3.1

- For replacement coils, see Table 20.104.

Table 20.88: AC Contact Ratings

Type of Cartridge	V	Inductive 35% Power Factor					Resistive 75% Power Factor
		NEMA Rating	Make		Break		Continuous Amperes	Make, Break and Continuous Amperes
			A	VA	A	VA		
Standard or Overlapping	120	A600	60	7200	6	720	10	10
	240		30		3			
	480		15		1.5			
	600		12		1.2			
Master*[6]*	—	A600	Same as standard cartridge above except substitute 20 A for the continuous ampere rating					
Logic Reed	—	—	150 Vac, 150 mA, 8 W Maximum					

- For DC ratings, see Table 20.94.

Table 20.89: Voltage Codes

AC Voltages - Hz	Code
12–60	V11
24–60	V01
24–50	V12
48–60	V18
48–50	V16
120–60/110–50	V02
208–60	V08
240–60/220–50	V03
277–60	V04
480–60/440–50	V06
600–60/550–50	V07

Table 20.90: How to Order

To Order Specify:	Catalog Number		
	Class	Type	Voltage Code
• Class Number • Type Number • Voltage Code	8501	XO40	V02

Approvals for Square D NEMA Style Relays

File: E78403
CCN: NKCR

File: 060905
Class: 3211 03

IEC 60947–1


[5] Voltage code must be specified to order these products. Refer to Table 20.89 and insert the code as shown in Table 20.90.
[6] Maximum of six 8501 Type XC4 master cartridges may be used on only 7 and 8 pole AC devices.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



8501XDO40V53 Control Relay


DC Control Relays Dimensions (in./mm)





8501XDO40XTE1V02 Timing Relay

DC Timing Relays Dimensions (in./mm)

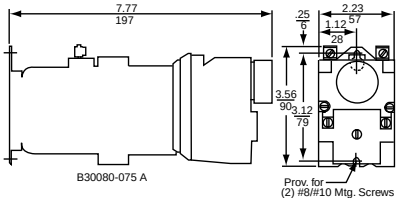

Square D™ NEMA Style DC Relays

DC Control Relays

- Replaceable, highly reliable pure DC power plant: no economizing resistors, overlapping contacts or dual-wound coil.
- Uses the same Type XB adder decks and attachments as the AC version.
- Offers all the features of the AC relay.
- Available in up to 8 poles.
- All contact poles are usable since no overlapping contacts are needed.

Table 20.91: DC Control Relays

Normally Open 5 A Convertible Instantaneous Contacts	Control Relay Type*[7]*
0	XDO00
2	XDO20
4	XDO40
6	XDO60
8	XDO80

Table 20.92: Dimension A (See Figure at Left) and Weights

No. of Poles	Dim. A		Shipping Weight lb.
	in.	mm	
0–4	5.17	131	3.1
6–8	6.37	162	3.4
10–12	7.60	193	3.8

DC Timing Relays

- Easily convertible On Delay or Off Delay.
- Two adjustable timing ranges.
- Repeat accuracy well above ±10%.
- Convertible 1 N.O. and 1 N.C. timed contacts.
- Large knob for easy adjustment of time delay.
- Off Delay mode times out even after loss of power.

Table 20.93: DC Timing Relays

Timing Mode	Normally Open 5 A Convertible Instantaneous Contacts	Timed Convertible Contacts		Timing Relay*[7]*	
				0.2–60 s	5–180 s
		N.O.	N.C.	Type	Type
On Delay	0	1	1	XDO00XTE1	XDO00XTE2
	2	1	1	XDO20XTE1	XDO20XTE2
	4	1	1	XDO40XTE1	XDO40XTE2
Off Delay	0	1	1	XDO00XTD1	XDO00XTD2
	2	1	1	XDO20XTD1	XDO20XTD2
	4	1	1	XDO40XTD1	XDO40XTD2

Table 20.94: DC Contact Ratings

Type of Cartridge	DC Ratings					
	Volts	Inductive			Resistive	
		NEMA Rating	Make and Break Amperes 138 VA Max.	Continuous Amperes	Make and Break Amperes	Continuous Amperes
Standard	125 250	P600	1.1 0.55	5 5	4 0.8	5 5
Overlapping	125	P150	1.1	5	4	5
Logic Reed	—	—	30 Vdc, 60 mA	—	—	—

- For AC ratings, see Table 20.88.

NOTE: Do not use any 8501 Type XC4 Master Cartridges on any DC-operated device.


[7] Voltage code must be specified to order these products. Refer to Table 20.98 and insert the appropriate code as shown in Table 20.99.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



8501XDO80XDLV62 Latching Relay

DC Latching Relays Dimensions (in./mm)

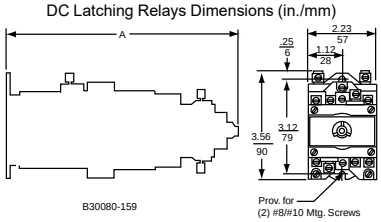



8501XUDO40V53 Utility Relay

DC Latching Relays

- Mechanical latch holds all contacts switched even after removal of power from replaceable latching coil.
- Provides sequence memory in the event of power loss.
- Ideal for sequencing applications such as press control, process control and punch presses.
- Replaceable unlatch coil to switch contacts back to original state.

Table 20.95: DC Latching Relays

Normally Open 5 A Convertible Instantaneous Contacts	Latching Relay *[8]*
	Type
2	XDO20XDL
4	XDO40XDL
6	XDO60XDL
8	XDO80XDL

NOTE: Unlatch coil is rated for intermittent duty and should be connected through a N.O. contact of the relay if the input signal is maintained. Order one more N.O. contact than the application requires to use as a coil clearing contact.

Table 20.96: Dimension A (See Figure at Left) and Weights

No. of Poles	Dim. A		Shipping Weight, lb.
	in.	mm	
2–4	7.76	197	3.9
6–8	8.98	228	4.2

DC Utility Relays

Ideal for utility plant applications where reliable performance and a pure DC power plant is required. In addition to the Type XDO relay features, the Type XUDO provides:

- Up to 12 poles N.O. or N.C.
- Nominal 125 Vdc coil, capable of handling 140 Vdc continuously and picking up at 105 Vdc after having been operated at 140 Vdc continuously. Other voltages with comparable operating characteristics are available.
- Enclosed device capable of operating in 145°F ambient.

Table 20.97: DC Utility Relays

Number of 5 A Convertible Contacts		Open Type*[8]*
N.O.	N.C.	Type
4 0	0 4	XUDO40 XUDO04
8 0	0 8	XUDO80 XUDO08
12 0	0 12	XUDO1200 XUDO0012

Table 20.98: Voltage Codes—8501 XUDO and XDO Relays

DC Voltages for 8501 XUDO Relays ONLY	Code	DC Voltages for 8501 XDO Relays	Code
6	V50	6	V50
12	V51	12	V51
24	V53	24	V53
48	V56	32	V54
125	V63	48	V56
250	V67	72	V58
—	—	90	V59
—	—	115/125	V62
—	—	230/250	V66

Table 20.99: How to Order

To Order Specify:	Catalog Number		
	Class	Type	Voltage Code
• Class Number • Type Number • Voltage Code	8501	XDO40	V53


- For replacement coils, see Table 20.103.
- For UL and CSA approvals, see Square D NEMA Style AC Relays.

[8] Voltage code must be specified to order these products. Refer to Table 20.98 and insert the appropriate code as shown in Table 20.99.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Attachments and Accessories for Square D™ NEMA Style Relays

Table 20.100: Type X™ Relays

	Description	Type
	**Mechanical Latch Attachment**—Mounts on any 2 through 8-pole relay (except XMO master relay). The Type XL and XDL latch attachments are identical in size and mounting provisions. The Type XLAC latch attachment has a continuous-duty-rated coil which is replaceable. **The Type XDLDC latch attachment has an intermittent–rated coil (replaceable) and should be connected through a N.O. contact of the basic relay if the input signal is maintained to the unlatch coil.** AC Latch Attachment DC Latch Attachment	XL *[9]* XDL*[9]*
	**Pneumatic Timer Attachment**—Mounts only on any 0 through 4-pole AC or DC relays (except XMO master relay). It provides 1 N.O. and 1 N.C. convertible timed contacts, which are the same Type XC1 cartridges used on the basic relay. Two timing ranges are available, and conversion from On Delay to Off Delay or vice versa is easy. **Off Delay** 0.2–60 seconds 5–180 seconds **On Delay** 0.2–60 seconds 5–180 seconds	XTD1 XTD2 XTE1 XTE2
	**Timer Lockout Cover**—Fits over the time delay adjustment knob of any Type XT timing attachment. The Lockout Cover is designed to protect the time setting against accidental adjustment. It mounts directly to the timing attachment with two included screws.	XJ1
	**Adder Decks**—Adder decks are used to expand the number of poles on a relay. The basic 4-pole relay can be easily converted to an 8-pole or 12-pole relay by installing one or two adder decks. The Class 8501 Type XB20 comes with 2 convertible contact cartridges and will accept 2 additional convertible contact cartridges. The Class 8501 Type XB40 comes with 4 convertible contact cartridges. The same Type XB adder deck is used for both the middle and upper decks of the AC or DC relay.	
	With 2 N.O. contact cartridges	XB20
	With 4 N.O. contact cartridges	XB40
	**Contact Cartridges**—The Type X relay offers 4 Types of contact cartridges. All are color–coded for visual identification of each Type.	
	Standard Cartridge—The standard cartridge, used for most applications, has a black case.	XC1
	Overlapping Cartridge—Same NEMA Type A600 AC rating as standard cartridge and a NEMA Type P150 DC rating. When it is used in the N.O. mode it will close early and when used in the N.C. mode it will open late. If two or more are used together, the N.O. contacts will close before the N.C. contacts open as the relay picks up. Overlap also occurs during dropout. Overlapping cartridge has a red case.	XC2
	May be ordered factory installed: • Substitute 1 N.O. and 1 N.C. overlapping cartridges for 2 standard cartridges. • Substitute 2 N.O. and 2 N.C. overlapping cartridges for 4 standard cartridges. • Substitute 3 N.O. and 3 N.C. overlapping cartridges for 6 standard cartridges. • Substitute 4 N.O. and 4 N.C. overlapping cartridges for 8 standard cartridges.	**Form** **Y1591** **Y1592** **Y1593** **Y1594**
	Master Cartridge—Features the same contact ratings as the Type XC1 standard cartridge except it has a 20 ampere continuous current rating instead of 10 amperes. It can be used in circuits where a master relay is required. Master cartridge has a blue case. **Maximum of 6 master cartridges may be used on any 7 and 8-pole AC relays. Do not use any master cartridges on 9-12-pole AC or any DC-operated devices. Note: If master cartridges are added to a standard relay, attachments (latch mechanism, timers, etc.) cannot be used.**	XC4
	**Mounting Track**—The mounting track has pre-punched mounting holes to simplify mounting the track on the control panel. The relay mounting screws are factory installed on the track so that the relays can be hung prior to tightening the screws. 9 in. long for 4 relays 18 in. long for 8 relays 27 in. long for 12 relays 36 in. long for 16 relays	XM4 XM8 XM12 XM16
	**Manual Test Tool**—Provides a means of manually switching the contacts of a basic relay or timing relay and holding all contacts in their switched state until the tool is removed. This simplifies the checking of control circuits without power on the coil or contacts.	XA1
	Transient Suppressor—Consists of an R-C circuit designed to suppress coil generated transients to approximately 200 percent of peak voltage. It is particularly useful when switching the Type X relay near solid state equipment. It is designed for use on coils up to 120 Vac.	XS1
	**NEMA 1 Enclosure**—Formed from sheet steel to provide strength and rigidity. Two conduit knockouts are located in both the top and bottom of the enclosure. The enclosure is furnished with self tapping screws for mounting the relay inside the enclosure. Accommodates a single 4 or 8-pole AC or DC relay, 12-pole AC relay, 4-pole AC latching relay, and 4-pole AC timing relay. **NOTE:** The 4-pole DC latching relay, 4-pole DC timing relay, 8-pole AC and DC latching relays and 12-pole utility auxiliary relay will not fit.	Class 9991 Type UE7

[9] See Table 20.101.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Table 20.101: Mechanical Latch Attachment Voltage Codes

AC Voltage	Code	DC Voltage	Code
24–60	V01	6	V50
24–50	V12	12	V51
120–60/110–50	V02	18	V99
208–60	V08	24	V53
240–60/220–50	V03	48	V56
277–60	V04	72	V58
480–60/440–50	V06	90	V59
600–60/550–50	V07	115/125	V62
		230/250	V66

Table 20.102: How to Order

To Order Specify:	Catalog Number	
	Class	Type
• Class Number • Type Number • Voltage Code for mechanical latch attachment • Form for factory installed overlapping contacts	8501	XTE1

Table 20.103: DC Relay Coil Selection

Equipment To Be Serviced		Coil Prefix, or Class and Type	Hz	Suffix (The complete coil number consists of prefix or the Class and Type, followed by suffix.)												Coil Burden Watts
Class	Type			6 V	12 V	18 V	24 V	32 V	48 V	64 V	72 V	90 V	110 V	115/125 V	220 V	230/250 V	
8501	XD	9998 XD	—	19	28	34	37	40	46	49	52	55	—	58	—	67	18
	XDL	9998 XDL	—	19	28	34B	37B	40B	46B	49B	52B	55B	—	58B	—	67B	50
	XUD	9998 XUD	—	19	28	—	37	—	46	—	—	—	—	58 *[10]*	—	67*[11]*	16

Table 20.104: AC Relay Coil Selection

Equipment To Be Serviced		Coil Prefix or Class and Type	Suffix (The complete coil number consists of prefix or the Class and Type, followed by suffix.)												Coil Volt-Amperes	
Class	Type		—	24 V	110-115 V	120 V	208 V	220 V	240 V	277 V	380 V	440 V	480 V	550 V	600 V	In-rush	Sealed
8501	XO, XMO	9998 X *[12]*	60	23	—	44	51	52	53	55	—	—	62	—	65	148	23
			50	24	44	—	52	53	—	—	—	62	—	65	—	143	25

[10] 125 Vdc only
[11] Not dual rated—250 Vdc only
[12] To order an unlatch coil, add the letter L to the type number and the letter B to the suffix number. Example: for a 120 V 60 Hz unlatch coil, order a Class 9998 Type XL44B.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RE17LAMW



RE17LMBM



RE17RLMU

Harmony™ RE17, RE22, and RENF (NFC) Timers

The Harmony RE17 and RE22 timer range is comprised of both 8 A relay and 0.7 A solid state outputs. Thanks to its space saving 17.5 mm design, this relay is ideal for applications that require a lot of control in a small foot print. The RE17 series is designed to attach to a 35 mm DIN rail.

- Multi-function, dual function, or single function
- Multi-range (7 selectable ranges)
- Multi-voltage
- Solid state or relay output options

Table 20.105: RE17 Series Timers

Supply Voltage	Timing Ranges	Output Type	Rated Current	Functions	Function Descriptions *[1]*	Catalog Number
24–240 Vac/ Vdc	0.1 s to 100 h	SPST Solid State	0.7 A	A	Power On delay	RE17LAMW
24–240 Vac	0.1 s to 100 h	SPST Solid State	0.7 A	H	Interval	RE17LHBM
				C	Off delay with control signal	RE17LCBM
				L, Li	Asymmetrical flasher	RE17LLBM
				A, At, B, C, H, Ht, D, Di, Ac, Bw	Multi-function	RE17LMBM
24 Vdc, 24–240 Vac	0.1 s to 100 h	SPDT Relay	8 A	B	Interval with control signal	RE17RBMU
				C	Off delay with control signal	RE17RCMU
				A, At	Power on delay	RE17RAMU
				H, Ht	Interval	RE17RHMU
				L, Li	Asymmetrical flasher	RE17RLMU
				A, At, B, C, H, Ht, D, Di, Ac, Bw	Multi-function	RE17RMMU
				Ad, Ah, N, O, P, Pt, T, Tt, W	Multi-function	RE17RMXMU
				A, At, B, C, H, Ht, D, Di	Multi-function	RE17RMEMU
12 Vdc	0.1 s to 100 h	SPDT Relay	8 A	L, Li	Asymmetrical flasher	RE17RLJU
				A, At, B, C, H, Ht, D, Di, Ac, Bw	Multi-function	RE17RMJU
12–240 Vac	0.1 s to 100 h	SPDT Relay	8 A	A, At, B, C, H, Ht, D, Di, Ac, Bw	Multi-function	RE17RMMW
12–240 Vac	0.1 s to 100 h	SPDT Relay	8 A	A, At, B, C, H, Ht, D, Di, Ac, Bw	Multi-function	RE17RMMWS

Approvals for RE17 Timers

c UL us LISTED — File: E173076 CCN: NRNT, NRNT7

File: 248382 Class: 3211–06

CE — IEC 61812–1

RoHS Compliant

[1] For detailed function definitions, see Table 20.113.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Table 20.106: RE22 Series Timer References

Timing Ranges	Functions	No. of relay outputs	Voltages V	Reference	Weight kg/lb
Single function					
10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	Ac	2	24…240	RE22R2ACMR	0.105/ 0.231
	Qg	2	24…240	RE22R2QGMR	0.105/ 0.231
	Qt	2	24…240	RE22R2QTMR	0.105/ 0.231
7 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 10 min	K	1	24…240	RE22R1KMR*[2][3]*	0.100/ 0.220
		2	24…240	RE22R2KMR*[2][3]*	0.100/ 0.220
7 selectable timing ranges 0.5 s, 1 s, 3 s, 10 s, 30 s, 100 s, 300 s	Qc	1	24/24...240	RE22R1QCMU	0.080/ 0.176
Single range selection 30 s	Qe	2	24…240	RE22R2QEMR	0.090/ 0.198
		2	380…415	RE22R2QEMT	0.090/ 0.198
Dual function					
10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	A, Aw	1	24…240	RE22R1AMR	0.100/ 0.220
		2	24…240	RE22R2AMR	0.105/ 0.231
	C, Ct	1	24…240	RE22R1CMR	0.100/ 0.220
	C	2	24…240	RE22R2CMR	0.105/ 0.231
	Ac, Act	1	24…240	RE22R1ACMR	0.100/ 0.220
	Ak, Akt	1	24…240	RE22R1AKMR	0.100/ 0.220
	D, Dw	1	24…240	RE22R1DMR	0.100/ 0.220
		2	24…240	RE22R2DMR	0.105/ 0.231
	H, Hw	1	24…240	RE22R1HMR	0.100/ 0.220
		2	24…240	RE22R2HMR	0.105/ 0.231
	Wt, W	2	24…240	RE22R2MWMR	0.105/ 0.231
7 selectable timing ranges 0.5 s, 1 s, 3 s, 10 s, 30 s, 100 s, 300 s	K, He	1	24…240	RE22R1MKMR*[2][3]*	0.100/ 0.220
10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	A, At, Aw	1	24…240	RE22R1MAMR	0.100/ 0.220
	A, At, Aw, Ac, Act, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt	1	24…240	RE22R1MYMR	0.100/ 0.220
	A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, Qg, Qgt, Qt, Qtt, W, Wt	2	24…240	RE22R2MYMR	0.105/ 0.231
	L, Li, Lt, Lit	1	24…240	RE22R1MLMR	0.100/ 0.220
Multifunction					
7 selectable timing ranges 1 s, 10 s, 1min, 10 min, 1h, 10 h, 100 h	Q	1	24/24…240	RE22R1QMU	0.090/ 0.198
		1	230–380	RE22R1QMQ	0.090/ 0.198
Dual function					
7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At	2	24/24…240	RE22R2AMU	0.090/ 0.198
Multifunction					
7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, Di, D, Ac, Bw	2	24/24…240	RE22R2MMU	0.090/ 0.198
			12	RE22R2MJU	0.090/ 0.198
			12…240	RE22R2MMW	0.090/ 0.198
	Ad, Ah, N, O,P, Pt, Tl, Tt, W	2	24/24...240	RE22R2MXMU	0.090/ 0.198

[2] The diagnostic button is not available for the K function related references (RE22R1KMR, RE22R2KMR, and RE22R1MKMR).
[3] 1 or 2 relay outputs: 5 A - 250 V.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025





Harmony NFC timing relay with Smartphone mobile app

Table 20.107: NFC Timing Relays with Relay Output

Timing ranges	Functions	No. of Relay Outputs	Voltages V	Reference	Weight kg/lb
Multifunction					
0.05 s to 999 h	A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Di, H,Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, Tl, Tt,W	2	24…240	RENF22R2MMW	0.0904/0.1993

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


RE48ATM12MW


RE48AMH13MW


RUZC3M


RE48ASOC11AR


RE48AIPCOV

Harmony™ RE48 Panel Mount Timers

The Harmony RE48 panel mount timer range is comprised of 5 A relay outputs. The unit can be mounted either on a panel or on a DIN rail with the optional octal socket. Thanks to the large selector knob, the user can quickly and easily see the current value selected and change it if needed.

- Time unit selector knob
- Multifunction, single function, or dual function
- 1.2 second to 300 hour timing range
- Wide input voltage range
- 5 A relay outputs
- Panel-mounted or plug-in
- LED indication

Table 20.108: RE48 Series Timers

Supply Voltage	Timing Ranges	Pin Configuration	Output Type	Rated Current	Functions	Function Descriptions *[4]*	Catalog Number
24–240 Vac/Vdc	1.2 s to 300 h	8–Pin Octal	DPDT Relay	5 A	A	Power On delay	RE48ATM12MW
					A1, A2, H1, H2	Delay On Energization, Pulse-on Energization	RE48AMH13MW
24–240 Vac/Vdc	1.2 s to 300 h	11–Pin Octal	DPDT Relay	5 A	L, Li	Asymmetrical flasher	RE48ACV12MW
					A, B, C, Di	Multi-function	RE48AML12MW

Table 20.109: Sockets (sold in lots of 10)

Description	Connection	Compatibility	Catalog Number
Mixed 8–Pin DIN Rail Mountable Socket	Box lug connector, DIN rail mount	RE48ATM12MW, RE48AMH13MW	RUZC2M
Mixed 11–Pin DIN Rail Mountable Socket		RE48ACV12MW, RE48AML12MW	RUZC3M

Table 20.110: Accessories (sold in lots of 10)

Description	Compatibility	Catalog Number
Protective cover IP64	RE48 Series Timers	RE48AIPCOV

Approvals for RE48 Timers

c UL us — File: E173076 CCN: NRNT2, NRNT8

CSA — File: 248382 Class: 3211 07

CE — IEC 61812-1

RoHS Compliant

[4] For detailed function definitions, see Table 20.113.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



REXL2TM



REXL4TM



RXZE2M114M



RXZE2S114M

Harmony™ REXL Miniature Plug-In Timers

The Harmony REXL miniature plug-in timer range is comprised of DPDT and 4PDT single On-delay function timers. The unit is designed to be mounted in a socket in a panel. Thanks to the large selector knob, the user can quickly and easily see the current value selected and change it if needed. Features include:

- Miniature and plug-in (21 x 27 mm / 0.827 x 1.062 in.)
- Single function: function A = delay on energization
- Rated current at 5 A
- 7 timing ranges (0.1 s to 100 h)
- Multivoltage
- Excellent immunity to interference
- Power on and relay energized indication by 2 LEDs

Table 20.111: REXL Series Timers

Supply Voltage	Timing Ranges	Pin Configuration	Output Type	Rated Current	Functions	Function Descrip-tions *[5]*	Catalog Number
12 Vdc	0.1 s to 100 h	8-Pin Quick Connect (Blade)	DPDT Relay	5 A	A	Power On delay	REXL2TMJD
24 Vdc	0.1 s to 100 h	8-Pin Quick Connect (Blade)	DPDT Relay	5 A	A	Power On delay	REXL2TMBD
24 Vac	0.1 s to 100 h	8-Pin Quick Connect (Blade)	DPDT Relay	5 A	A	Power On delay	REXL2TMB7
120 Vac	0.1 s to 100 h	8-Pin Quick Connect (Blade)	DPDT Relay	5 A	A	Power On delay	REXL2TMF7
230 Vac	0.1 s to 100 h	8-Pin Quick Connect (Blade)	DPDT Relay	5 A	A	Power On delay	REXL2TMP7
24 Vdc *[6]*	0.1 s to 100 h	14-Pin Quick Connect (Blade)	4PDT Relay	5 A	A	Power On delay	REXL4TMBD
24 Vac *[6]*	0.1 s to 100 h	14-Pin Quick Connect (Blade)	4PDT Relay	5 A	A	Power On delay	REXL4TMB7
120 Vac	0.1 s to 100 h	14-Pin Quick Connect (Blade)	4PDT Relay	5 A	A	Power On delay	REXL4TMF7
230 Vac	0.1 s to 100 h	14-Pin Quick Connect (Blade)	4PDT Relay	5 A	A	Power On delay	REXL4TMP7

Table 20.112: Sockets (sold in lots of 10)

Contact Terminal Arrangement	Connection	For Use with Relays	Catalog Number
Mixed	Box lug connector	REXL2TM••, REXL4TM••	RXZE2M114M
Separate	Box lug connector	REXL2TM••	RXZE2S108M
	Box lug connector	REXL4TM••	RXZE2S114M

Approvals for REXL Timers

c UL us — File: E173076 CCN: NRNT2, NRNT8

CSA — File: 248382 Class: 3211 07

CE — IEC 61812-1

RoHS Compliant

Table 20.113: Timer Function Description

Function	Function Description *[7]*	Timer
A	Power on delay relay	RE17, RE48, REXL
A1, A2	Delay on energization	RE48
Ac	On-delay and off-delay relay with control signal	RE17
Ad	Pulse delayed relay with control signal	RE17
At	Power on delay relay (summation) with control signal	RE17
B	Interval relay with control signal	RE17, RE48
Bw	Double interval relay with control signal	RE17
C	Off-delay relay with control signal	RE17, RE48
D	Symmetrical flasher relay (starting pulse off)	RE17
Di	Symmetrical flasher relay (starting pulse on)	RE17, RE48
H	Interval relay	RE17
H1, H2	Pulse-on energization	RE48
Ht	Interval relay (summation) with control signal	RE17
L	Asymmetrical flasher relay (starting pulse off)	RE17, RE48
Li	Asymmetrical flasher relay (starting pulse on)	RE17, RE48
N	Retriggerable interval relay with control signal on	RE17
O	Retriggerable interval delayed relay with control signal on	RE17
P	Pulse delayed relay with fixed pulse length	RE17
Pt	Pulse delayed relay (summation and fixed pulse length) with control signal off	RE17
T	Bistable relay with control signal on	RE17
Tt	Retriggerable bistable relay with control signal on	RE17
W	Interval relay with control signal off	RE17

[5] For detailed function definitions, see Table 20.113.
[6] For 48 Vdc supply, additional resistor 560 ohms 2 W / 24 Vdc. For 48 Vac, additional resistor 390 ohms 4 W / 24 Vac.
[7] See catalog 9050CT0001 for timing diagrams and detailed descriptions.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



821 Relay



822 Relay

820 Series Time Delay and Sensor Relays


820 Series—SPDT, 15 A; DPDT, 15 A

Input Voltage	Functions Available	Timing Range	Contact Configuration	Rated Current	Standard Part Number
12–240 Vac/Vdc	A,B,C,D,E,F,G,H,I,J	10 ms to 10 days SPDT	SPDT	15 A	821TD10HUNI
			DPDT	15 A (2 pairs of contacts)	822TD10HUNI

820 Specifications

Part Number	821TD10HUNI	822TD10HUNI
Input Characteristics		
Input Voltage Range	12–240 Vac/Vdc	12–240 Vac/Vdc
Operating Voltage (% of Nominal)	85% of 12 V to 110% of 240 V	85% of 12 V to 110% of 240 V
Maximum Power Consumption	3 VA 1.7W	3 VA 1.7W
Output Characteristics		
Contact Configuration	SPDT	DPDT
Output Current Rating	15 A	15 A
Contact Material	Silver alloy	Silver alloy
Switching Capability	N/A	
Minimum Switching Requirement	15 A @ 240 Vac, 50/60 Hz, 24 Vdc 1/2 hp @ 120 Vac 1 hp @ 240 Vac Pilot duty B300	15 A @ 240 Vac, 50/60 Hz, 24 Vdc 1/2 hp @ 120 Vac 1 hp @ 240 Vac Pilot duty B300
Timing Characteristics		
Functions Available	Multifunction	Multifunction
Time Scales	8	8
Time Ranges	100 ms to 1 s 1 s to 10 s 0.1 min to 1 min 1 min to 10 min 0.1 hr to 1 hr 1 hr to 10 hr 0.1 day to 1 day 1 day to 10 days	100 ms to 1 s 1 s to 10 s 0.1 min to 1 min 1 min to 10 min 0.1 hr to 1 hr 1 hr to 10 hr 0.1 day to 1 day 1 day to 10 days
Tolerance	5% of mechanical setting	5% of mechanical setting
Repeatability at Constant Voltage and Temperature	0.2%	0.2%
Reset Time	150 ms maximum	150 ms maximum
Trigger Pulse Length	50 ms minimum	50 ms minimum


Dimensions, in. (mm)

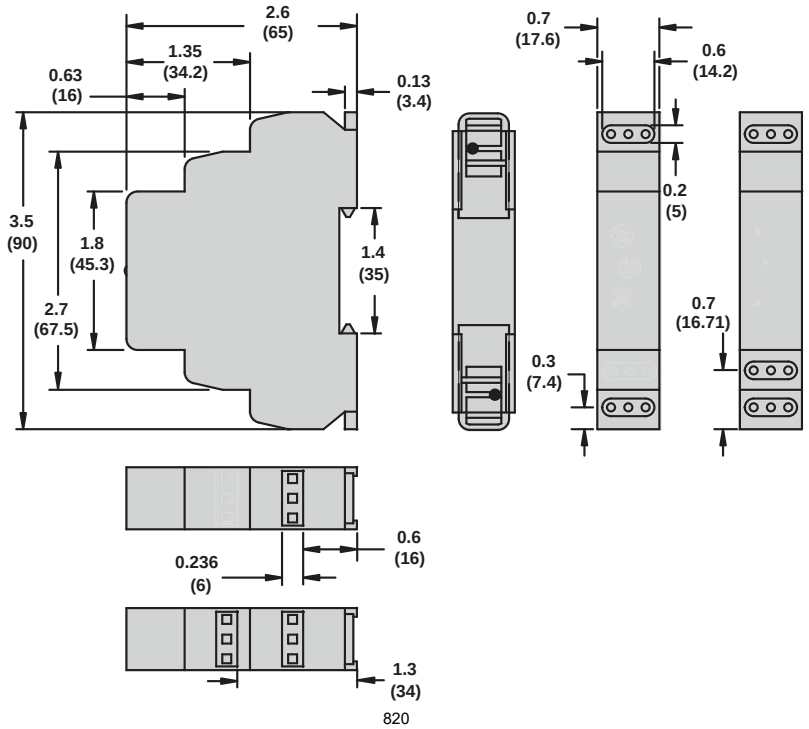

820

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Wiring Diagram

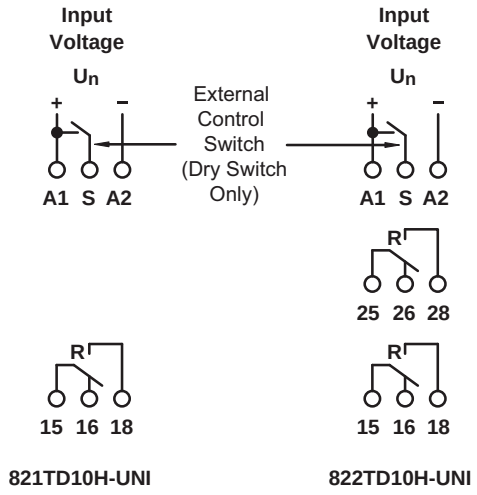

821TD10H-UNI

822TD10H-UNI

15—Common
16—Normally Closed
18—Normally Open

25—Common
26—Normally Closed
28—Normally Open

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



9050JCK11V14

Square D™ JCK General Purpose Plug-In Timers

Square D 9050JCK timing relays are designed to provide low-cost timing in a plug-in housing. The Types JCK11 through 59 provide ±1% repeat accuracy. The Types JCK60 and 70 offer ±0.1% repeat accuracy. These timers are directly interchangeable with many other 8 and 11 pin octal base timers.

- Up to ±0.1% repeat accuracy
- Timing from 0.05 seconds to 999 hours
- Available in 7 timing modes
- DPDT contacts (2 N.O. and 2 N.C.)
- 10 A contact rating
- Transient protected
- Hold down spring available
- Variable or fixed time delay
- Horsepower rated
- RoHS compliant

Table 20.114: Variable Time Delay

Knob Adjustable Timing Range	On Dela*[1]*	Off Delay*[2][1]*	Off Delay Power Trigger*[1]*	Interval*[1]*	One Shot *[2][1]*	One Shot Power Trigger*[1]*	Repeat Cycle*[3][1]*
0.1–10 seconds	JCK11	JCK21	JCK21PT	JCK31	JCK41	JCK41PT	JCK51
0.3–30 seconds	JCK12	JCK22	JCK22PT	JCK32	JCK42	JCK42PT	JCK52
0.6–60 seconds	JCK13	JCK23	JCK23PT	JCK33	JCK43	JCK43PT	JCK53
1.2–120 seconds	JCK14	JCK24	JCK24PT	JCK34	JCK44	JCK44PT	JCK54
1.8–180 seconds	JCK15	JCK25	JCK25PT	JCK35	JCK45	JCK45PT	JCK55
0.1–10 minutes	JCK16	JCK26	JCK26PT	JCK36	JCK46	JCK46PT	JCK56
0.3–30 minutes	JCK17	JCK27	JCK27PT	JCK37	JCK47	JCK47PT	JCK57
0.6–60 minutes	JCK18	JCK28	JCK28PT	JCK38	JCK48	JCK48PT	JCK58
1.2–120 minutes	JCK19	JCK29	JCK29PT	JCK39	JCK49	JCK49PT	JCK59

Table 20.115: Fixed Time Delay

Timing Mode	Type*[1][4][5]*	Timing Range (seconds)
On Delay	JCK1F(XXXX)	0.1 to 180
		181 to 3600
Off Delay *[2]*	JCK2F(XXXX)	0.1 to 180
		181 to 3600

Table 20.116: Voltage Codes

Voltage	Code
24 Vac/Vdc	V14
120 Vac/110 Vdc	V20
240–50/60 Vac	V24

Table 20.117: How to Order

To Order Specify:	Catalog Number		
	Class	Type	Voltage Code
• Class Number • Type Number • Voltage Code	9050	JCK11	V20

[1] Voltage code must be specified to order this product. Refer to the standard voltage codes listed in Table 20.116 and insert as shown in Table 20.117.
[2] Initiating contact can be up to 50 feet from the timer.
[3] Two dials are provided for independently adjustable repeat cycle timing ranges.
[4] (XXXX) denotes the timing period in seconds.
[5] Fixed repeat cycle timers can be supplied with the same or different On-Time and Off-Time.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



9050JCK60V14



9050JCK70V14



8501NR61



8501NR52



8501NH7

Type JCK60 and JCK70 Timers

NOTE: Type JCK60 and JCK70 Timers are rated for AC supply voltage only. They are not rated for DC coil.

Type JCK60

This On-Delay timer uses four push button thumbwheels to set the time delay. One switch is used for the range. The remaining three are used for the time setting.

Table 20.118: Selection

Timing Modes	Timing Ranges		Type
On Delay	0.01s 0.1s S 0.1m M 0.1h H	0.05–9.99 seconds 00.1–99.9 seconds 001–999 seconds 00.1–99.9 minutes 001–999 minutes 00.1–99.9 hours 001–999 hours	JCK60*[6]*

Type JCK70

This multifunction multirange time delay relay uses five push button thumbwheel switches. Three switches are used for the time delay, one switch is used for the timing range, and the other switch is used to select the timing mode.

Table 20.119: Selection

Timing Modes	Timing Ranges	Type
On Delay Interval Off Delay One Shot Repeat Cycle-Off*[7]* Repeat Cycle-On On/Off Delay 1 Shot Falling Edge Watchdog Trigger On Delay	Same as JCK60	JCK70*[6]*

Table 20.120: Sockets

Contact Terminal Arrangement	Connection	For Use with Relays	Sold in Lots of	Catalog Number*[8]*
Mixed*[9]*	Screw Connector	JCK11–19 JCK31–39 JCK51–59 JCK60 JCK1 F JCK3 F JCK5 F	1	8501NR51
			10	8501NR51B
		JCK21–29 JCK41–49 JCK70 JCK2F JCK4F	1	8501NR61
			10	8501NR61B
Separate*[10]*	Screw Connector	JCK11–19 JCK31–39 JCK51–59 JCK60 JCK1 F JCK3 F JCK5 F	1	8501NR52
		JCK21–29 JCK41–49 JCK70 JCK2F JCK4F	1	8501NR62

Table 20.121: Accessories (sold in lots of 10)

Description	For Use With	Sold in Lots of	Catalog Number
Metal Restraining Strap	8501NR51 sockets 8501NR52 sockets 8501NR61 sockets 8501NR62 sockets	1	8501NH7

Approvals for 9050JCK Timers

c UL us — File: E3190 CCN: NLDX2

c UL us LISTED — File: E3190 CCN: NLDX, NLDX7*[11]*

CSA — File: 260367 Class: 3211 07

CE — IEC 61810-1

RoHS Compliant

[6] Voltage code must be specified to order this product. Refer to the standard voltage codes listed in Table 20.116 and insert as shown in Table 20.117.
[7] The repeat cycle mode uses the same on-time and off-time.
[8] Please note that the B suffix only desginates quantities of 10 and is not printed on the socket.
[9] The inputs and outputs are mixed on both sides.
[10] The inputs and outputs are on separate sides.
[11] When used with the appropriate 8501NR socket.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RM17JC00MW



RM35JA31MW



RM35JA32MW

1 C/O =



2C/O =



Harmony™ Current Measurement Relays

Harmony Current Measurement Relays are designed to measure under and overcurrent conditions, without external sensors. Current measurement relays enable continuous monitoring of the operation of electrical and mechanical loads such as motors and heaters. They are DIN rail mountable and the control status is indicated by an LED.

RM17JC Current Control Relay

- Monitors AC currents
- Designed to monitor overcurrent
- Equipped with an integrated current transfmormer

RM35JA Current Control Relays

- Selection between overcurrent or undercurrent
- Automatic DC or AC recognition
- Selectable memory function

Table 20.122: Harmony Current Measurement Relays

Supply Voltage	Measurement Range		Output 5 A	Width		Catalog Number
	Range[1]	Terminals		Inches	mm	
24–240 Vac/dc	2–20 A	N/A	1 C/O	0.69	17.50	RM17JC00MW
	2–20 mA	E1-M	2 C/O	1.38	35.00	RM35JA31MW
	10–100 mA	E2-M				
	50–500 mA	E3-M				
	0.15–1.5 A	E1-M				RM35JA32MW
	0.5–5 A	E2-M				
	1.5–15 A	E3-M				

Table 20.123: Output Characteristics and Measurement Circuit Characteristics

Type of Relay		RM17JC00MW	RM35JA31MW	RM35JA32MW
Setting accuracy		Plus or minus 10% of the full scale value		
Repeat accuracy (with constant parameters)		Plus or minus 0.5%		
Hysteresis		15% of the threshold setting, fixed	5 to 50% of the threshold setting, adjustable	
Time delay accuracy (with constant parameters)		N/A	Plus or minus 2%	
Time delay on pick-up		500 ms	300 ms	
Conforming to standards		NF EN 60255-6		
Ambient air temperature around the device	Storage	-40 to 158 degrees F (-40 to +70°C)		
	Opera-tional	-4 to 122 degrees F (-20 to +50°C)		

Approvals for Harmony Current Measurement Relays

c UL us LISTED — File: E173076 CNN: NRNT, NRNT7


SP® — File: 248382 Class: 3211 07

CE — CE: 73/23/EEC and EMC 89/336/EEC


GL, C-Tick, GOST, RoHS

Approximate Dimensions

RM35JA3•MW

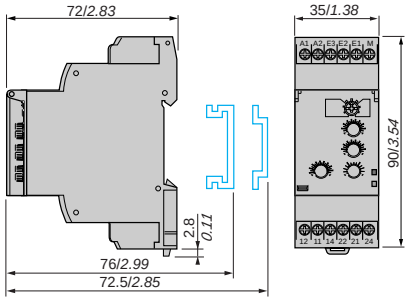

RM17JC00MW

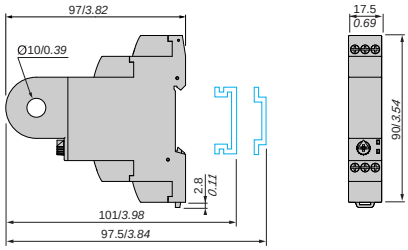

Dual Dimensions: **INCHES**
Millimeters

RELAYS AND TIMERS
20

[1] Above 15 A, a current transformer can be connected (for RM35JA3•MW). See page 57 of catalog 8430CT0601 for suggested wiring.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Harmony™ Phase Measurement Relays

Harmony Phase Measurement Relays monitor their own power supply. Relay status is indicated by an LED and they are DIN rail mountable.

RM17TG•0 measurement and control relays are for monitoring of 3-phase supplies for the correct sequencing of phases L1, L2, and L3, as well as the total loss of one or more phases.



RM17TG•0

Table 20.124: 3-Phase Supply Control Relays

Supply Voltage	Detection Threshold	Output 5 A	Width		Catalog Number
			inches	mm	
208–480 Vac	<100 Vac	1 C/O	0.69	17.50	RM17TG00
208–440 Vac		2 C/O			RM17TG20

Table 20.125: Multifunction 3-Phase Supply Control Relays

Supply Voltage	Voltage Range	Output 5 A	Width		Catalog Number
			inch	mm	
208–480 Vac	Selectable voltages: 208, 220, 380, 400, 415, 440, 480	1 C/O	0.69	17.50	RM17TT00 RM17TA00 RM17TU00 RM17TE00



RM17TE00



RM17TA00

Table 20.126: RM17TT, RM17TA, RM17TU, and RM17TE Multifunction Control Relays monitor the following on 3-phase supplies:

Function	RM17TT	RM17TA	RM17TU	RM17TE
Sequence of phases L1, L2 and L3	Yes	Yes	Yes	Yes
Phase failure with regeneration (0.7 x selected voltage range)	Yes	Yes	Yes	Yes
Asymmetry (phase imbalance)	No	Yes	No	Yes
Undervoltage	No	No	Yes	No
Overvoltage and undervoltage	No	No	No	Yes

Table 20.127: 3-Phase Supply and Motor Temperature Control Relays

Supply Voltage	Measurement Range	Output 5 A	Width		Catalog Number
			inch	mm	
220–480 Vac	208–480 Vac	2 N.O.	1.38	35.00	RM35TM50MW RM35TM250MW



RM35TM••MW



RM35TF30

Table 20.128: RM35TM Control Relays monitor the following on 3-phase supplies:

Function	RM35TM50MW	RM35TM250MW
Sequence of phases L1, L2 and L3	Yes	Yes
Phase failure	Yes	Yes
Motor temperature via PTC probe	Yes	Yes
Selection (with or without memory)	No	Yes
Test-reset button	No	Yes

RM35TF30 measurement and control relay is for monitoring of phase sequence, phase failure, asymmetry, undervoltage and overvoltage in window mode.

Table 20.129: Multifunction 3-Phase Supply Control Relays

Supply Voltage	Measurement Range	Output 5 A	Width		Catalog Number
			inch	mm	
220–480 Vac	194–528 Vac	2 C/O	1.38	35.00	RM35TF30

Approvals for Harmony Phase Measurement Relays


File: E173076
CNN: NRNT, NRNT7

File: 248382
Class: 3211 07

CE: 73/23/EEC and EMC 89/336/EEC

GL, C-Tick, GOST, RoHS

Approximate Dimensions

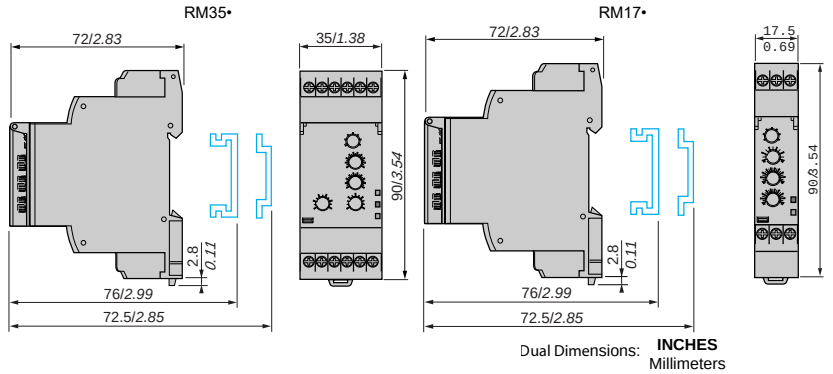



20 RELAYS AND TIMERS

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


RM17UB310


RM17UAS••

Harmony™ Voltage Measurement Relays

Harmony Voltage Measurement Relays are DIN rail mountable and relay status is indicated by an LED. Single phase and DC voltage measurement and control relays RM17UAS•• and RM17UBE•• monitor:

- Overvoltage
- Undervoltage
- Overvoltage and undervoltage
- Nominal voltages

Table 20.130: Single-phase and DC voltage control relays

Supply Voltage	Ranges Controlled	Output 5 A	Width		Catalog Number
			in.	mm	
12 Vdc	9–15 Vdc	1 C/O	0.69	17.50	RM17UAS14*[2]*
24–48 Vac/Vdc	20–80 Vac/Vdc				RM17UAS16*[2]*
110–240 Vac/Vdc	65–260 Vac/Vdc				RM17UAS15*[2]*
24–48 Vac/Vdc	20–80 Vac/Vdc				RM17UBE16*[3]*
110–240 Vac/Vdc	65–260 Vac/Vdc				RM17UBE15*[3]*

Multifunction voltage control relays RM35UA1•MW monitor both AC and DC voltages.

- Automatic Vdc or Vac recognition
- Selection between overvoltage and undervoltage

Table 20.131: Multifunction voltage control relays

Supply Voltage	Measurement Range		Output 5 A	Width		Catalog Number
	Range*[4]*	Terminals		in.	mm	
24–240 Vac/Vdc	0.05–0.5 V	E1-M	2 C/O	1.38	35.00	RM35UA11MW
	0.3–3 V	E2-M				
	0.5–5 V	E3-M				
	1–10 V	E1-M				RM35UA12MW
	5–50 V	E2-M				
	10–100 V	E3-M				
	15–150 V	E1-M				RM35UA13MW
	30–300 V	E2-M				
	60–600 V	E3-M				


RM35UA1•MW

3-phase voltage control relays monitor:

- Failure of one or more phases
- Voltage between phases
- Absence of neutral
- Voltage between phases and neutral
- Overvoltage and undervoltage

Table 20.132: Three-phase voltage control relays

Rated 3-Phase Supply Voltage Vac	Measurement Range	Output 5 A	Width		Catalog Number
			in.	mm	
220–480 phase-phase	195–528 Vac	1 C/O + 1 C/O 1 per threshold	1.38	35.00	RM35UB330*[5]*
120–277 phase-neutral	183–528 Vac	1 C/O	0.69	17.50	RM17UB310*[5]*
120–277 phase-neutral	114–329 Vac	1 C/O + 1 C/O 1 per threshold	1.38	35.00	RM35UB3N30*[5]*


RM35UB3•••

1 C/O =



2 C/O =



Approvals for Harmony Voltage Measurement Relays


c UL us LISTED — File: E173076 CNN: NRNT, NRNT7

SA® — File: 248382 Class: 3211 07

CE — CE 73/23/EEC and EMC 89/336/EEC

GL, C-Tick, GOST, RoHS

Approximate Dimensions

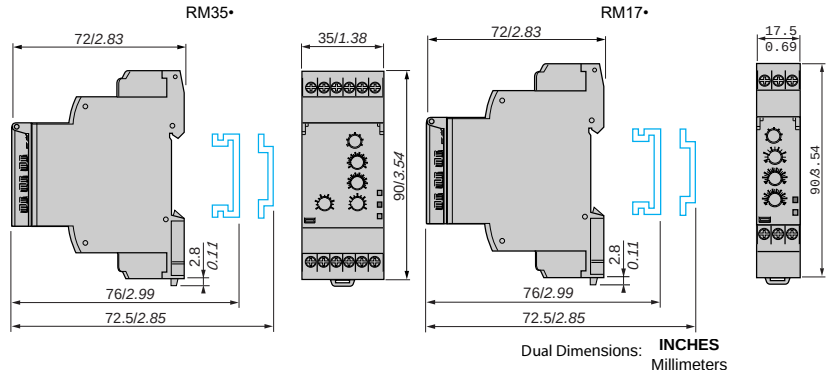

Dual Dimensions: **INCHES** Millimeters

[2] Provides overvoltage or undervoltage protection.
[3] Provides overvoltage and undervoltage protection in window mode.
[4] Provides overvoltage and undervoltage protection between phases and neutral and absence of neutral.
[5] Provides overvoltage and undervoltage protection between phases.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RM35LM33MW



RM35LV14MW





RM79696006

Harmony™ Level Control Relays and Pump Control Relays

Harmony level control relays control one or two levels with fill or empty function. The settings are protected by a sealable cover, control status is indicated by an LED, and they are DIN rail mountable. RM35LM is designed to control levels of conductive liquid, and RM35LV is designed to control levels of other materials.

Application examples for RM35LM:

- Detecting pump seal failures
- Spring, town, industrial and sea water
- Metallic salt, acid or base solutions
- Liquid fertilizers
- Non-concentrated alcohol (<40%)

Application examples for RM35LV:

- Liquids in the food-processing industry: milk, beer, coffee, etc.
- Chemically pure water
- Fuels, liquid gasses (inflammable)
- Oil, concentrated alcohol (>40%)
- Ethylene, glycol, paraffin, varnish and paints

Table 20.133: Level Control Relays

Time Delay on Crossing the Threshold	Function	Output Relay	Supply Voltage 50/60 Hz	Measurement Ranges	Catalog Number
0.1–5 seconds, 0 + 10%	Detection by resistive probes	2 C/O, 5 A	24–240 Vac/Vdc	250–5 k	RM35LM33MW
				5 k–100 k	
				50 k–1 M	
	Detection by discrete sensors	1 C/O, 5 A		—	RM35LV14MW

Table 20.134: Electrode Holders

Description	Material	Catalog Number
Electrode for use up to 662°F (350°C)	Stainless steel isolated by ceramic	RM79696006

Pump Control Relay

Harmony pump control relay RM35BA10 can operate on a single-phase or 3-phase supply. It incorporates three functions in a signal unit:

- Over and under current measurement
- Phase presence control
- Single or three phase

It has two operating modes which are designed to control a pump via two external signal inputs (Y1 Y2). These two signals are controlled by volt-free contacts. Control inputs Y1 and Y2 can be connected to:

- Level sensor
- Level relay
- Pressure sensor
- Push button

Table 20.135: Pump Control Relay

Description	Current Range Controlled	Supply Voltage	Output	Catalog Number
Pump Control Relay	1–10 A	208–480 Vac, 3 phase	1 C/O 5 A	RM35BA10
		230, single-phase		

Approvals for Harmony Level Control and Pump Control Relays

c UL us LISTED — File: E173076 CNN: NRNT, NRNT7


CSA — File: 248382 Class: 3211 07

CE — CE 73/23/EEC and EMC 89/336/EEC


GL, C-Tick, GOST, RoHS

Approximate Dimensions (mm/in.)

RM35LM33MW, RM35LV14MW



RM35BA10

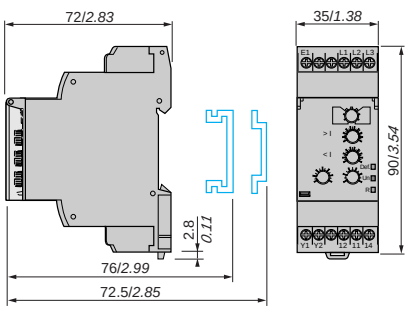

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RM35S0MW



RM35HZ21FM



RM35AT•0MW

1 C/O =



2 N/O =



Harmony™ Speed, Frequency, Temperature, and NFC Control Relays

Harmony speed control relay RM35SOMW monitors underspeed and overspeed conditions, with or without memory, with inhibition by an external contact. It operates with either N.O. or N.C. sensors. Adjustable time between impulses is 0.05 s to 10 min. Power-on inhibition time is adjustable from 0.6 to 60 s. Inhibition is controlled by an external contact. Settings are protected by a sealable cover, control status is indicated by an LED, and it is DIN rail mountable.

Table 20.136: Speed Control Relay

Function	Time Delay	Measurement Input	Supply	Out-put	Catalog Number
Under-speed	0.05 s to 10 min	3-wire PNP or NPN proximity sensor	24–240 Vac/ Vdc	1 C/O 5A	RM35S0MW
Over-speed		Namur type proximity sensor 0–30 V voltage Volt-free contact			

Harmony frequency control relay RM35HZ monitors its own supply voltage. Settings are protected by a sealable cover, control status is indicated by an LED, and it is DIN rail mountable.

Table 20.137: Frequency Control Relay

Function	Controlled	Supply Voltage	Output	Catalog Number
Over frequency and under frequency (50 or 60 Hz)	40–60 Hz (50 Hz) / 50–70 Hz (60 Hz)	120–277 Vac	1 C/O + 1 C/O 5 A	RM35HZ21FM

Harmony temperature control relays are designed for monitoring the temperature in elevator (lift) rooms, in compliance with directive EN81. For use with PT100 input (customer supplied). Features adjustable control, control status indicated by an LED, and is DIN rail mountable.

Table 20.138: Temperature Control Relays

Function	Supply Voltage	Vac	Output	Catalog Number
Over temperature 93 to 114°F (34 to 46°C)	24–240 Vac/Vdc	—	1 C/O 5 A	RM35ATL0MW

Approvals for Harmony Speed, Frequency, and Temperature Control Relays

c UL us LISTED — File: E173076 CNN: NRNT, NRNT7

SA — File: 248382 Class: 3211 07

CE — CE: 73/23/EEC and EMC 89/ 336/EEC


GL, C-Tick, GOST, RoHS

Approximate Dimensions (mm/in.)


RM35S0MW



RM35HZ21FM

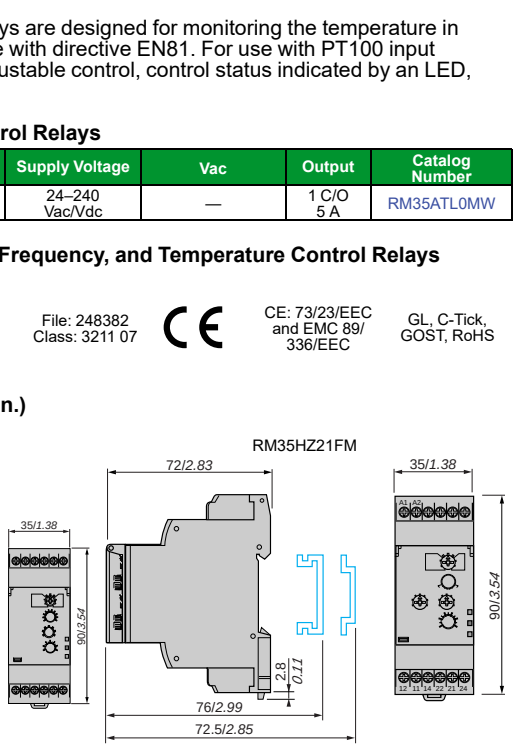

RM35AT••MW

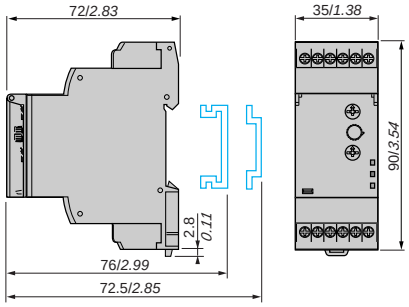

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



RMNF22



NFC control relay with Smartphone mobile app



Table 20.139: NFC Contol Relays with Relay Output

Function	Measurement Range V	Time Delay	Output	Reference	Weight kg/lb
• Phase sequence • Phase loss • Asymmetry • Undervoltage • Overvoltage • Under-frequency • Over-frequency	208...480 A	Adjustable 0.1 s…60 min (Phase loss and Phase sequence instant trigger)	2 CO 8 A (individually configurable)*[6]*	RMNF22TB30	0.125/0.276


[6] With or without memory mode is selectable for all functions in the app.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Section 21
Terminal Blocks


NSYTRV


NSYTRR


NSYTRP


9080GRE6


NSYEBCD12614


9080GCB


9080GB2


9080GF6


9080LB


9080FB



DZ5

Selection Guide 21-1
- Terminal Block Selection Guide 21-1

IEC Style Terminal Blocks 21-3
- Spring Terminal Blocks 21-3
  - Passthrough 21-3
  - Grounding 21-4
  - Double and Triple Deck, Grounding, Component Carriers, Blade Isolators 21-5
  - Miniature Spring Passthrough and Grounding 21-6
- Screw Terminal Blocks 21-7
  - Passthrough and Grounding 21-7
  - Lug/Lug, Double and Triple Deck Passthrough, Grounding 21-9
  - Blade Isolators, Component Carriers, Fused, Measuring, Grounding 21-10
  - Miniature Passthrough and Hybrid Passthrough 21-11
- Push-in Terminal Blocks 21-12
  - Passthrough and Grounding 21-13
  - Double Deck Passthrough, Blade Isolators, Component Carriers 21-15
- Accessories 21-16
  - Linergy Marking Accessories 21-16
  - Linergy Labeling System 21-17
  - Mounting Track and End Clamps 21-18

NEMA Style Terminal Blocks 21-19
- Type G Terminal Blocks 21-19
  - Selection Guide 21-19
  - Terminal Block Assemblies 21-21
- Type G Terminal Block Accessories 21-22
  - Mounting Track, End Clamps, Jumpers, Fanning Strips 21-22
  - Marking Accessories 21-23

Thermal-Magnetic Circuit Protectors 21-24
- Type GCB Circuit Protectors 21-24
- Type GB2 Circuit Protectors 21-25

Power Distribution Blocks 21-26
- IEC NSYEB Power Distribution Blocks 21-26
  - Enclosed Power Distribution Blocks 21-26
- NEMA Type LB Power Distribution Blocks 21-27
  - LB Open Power Distribution Blocks 21-27

Fuseholders 21-28
- Type FB Fuseholders 21-28
- TeSys DF Fuseholders 21-29

Cable Ends 21-30
- DZ5 and AZ5 Cable Ends 21-30
- AR1 and AT1 Cable End Accessories 21-31

Advantys Telefast ABE 7 Pre-Wired System 21-32
- Prewired Connection System 21-32
  - Telefast ABE 7 Pre-Wired Sub-Bases 21-32

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Passthrough

Table 21.2: Spring Passthrough Blocks *[1]*

Description		Maximum Voltage	Maximum Current	Block			End Barrier*[2]*		
				Color	Catalog Number	Std. Pack *[3]*	Color	Catalog Number	Std. Pack *[3]*
 5.2 mm (0.21 in.) wide	Two Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR22	50	Grey	NSYTRACR22	50
				Blue	NSYTRR22BL		Blue	NSYTRACR22BL	
				Orange	NSYTRR22AR		Grey	NSYTRACR22	
 5.2 mm (0.21 in.) wide	Three Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR23	50	Grey	NSYTRACR23	50
				Blue	NSYTRR23BL		Blue	NSYTRACR23BL	
				Orange	NSYTRR23AR		Grey	NSYTRACR23	
 5.2 mm (0.21 in.) wide	Four Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR24	50	Grey	NSYTRACR24	50
				Blue	NSYTRR24BL		Blue	NSYTRACR24BL	
				Orange	NSYTRR24AR		Grey	NSYTRACR24	
 6.2 mm (0.24 in.) wide	Two Terminals Solid or Stranded Copper Wire 28–10 AWG	600 V	30 A	Grey	NSYTRR42	50	Grey	NSYTRACR42	50
				Blue	NSYTRR42BL		Grey	NSYTRACR42	
				Orange	NSYTRR42AR		Grey	NSYTRACR42	
 6.2 mm (0.24 in.) wide	Three Terminals Solid or Stranded Copper Wire 28–10 AWG	600 V	30 A	Grey	NSYTRR43	50	Grey	NSYTRACR43	50
				Blue	NSYTRR43BL		Grey	NSYTRACR43	
 6.2 mm (0.24 in.) wide	Four Terminals Solid or Stranded Copper Wire 28–10 AWG	600 V	30 A	Grey	NSYTRR44	50	Grey	NSYTRACR44	50
				Blue	NSYTRR44BL		Grey	NSYTRACR44	
 8.2 mm (0.32 in.) wide	Two Terminals Solid or Stranded Copper Wire 28–8 AWG	600 V	50 A	Grey	NSYTRR62	50	Grey	NSYTRACR62	50
				Blue	NSYTRR62BL		Grey	NSYTRACR62	
 8.2 mm (0.32 in.) wide	Three Terminals Solid or Stranded Copper Wire 24–8 AWG	600 V	50 A	Grey	NSYTRR63	50	Grey	NSYTRACR63	50
 10.2 mm (0.40 in.) wide	Two Terminals Solid or Stranded Copper Wire 16–6 AWG	600 V	66 A	Grey	NSYTRR102	50	Grey	NSYTRACRR102	50
				Blue	NSYTRR102BL		Grey	NSYTRACRR102	
 12.2 mm (0.48 in.) wide	Two Terminals Solid or Stranded Copper Wire 16–4 AWG	600 V	85 A	Grey	NSYTRR162	50	Grey	NSYTRACR162	50
				Blue	NSYTRR162BL		Grey	NSYTRACR162	

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant


For track and accessories, see Mounting Track and End Clamps, page 21-18.

[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[2] One end-barrier is required for each assembly of like blocks.
[3] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Grounding

Table 21.3: Spring Grounding Blocks *[4]*

Description		Block			End Barrier *[5]*		
		Color	Catalog Number	Std. Pack *[6]*	Color	Catalog Number	Std. Pack *[6]*
 5.2 mm (0.21 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 28–12 AWG	Green / Yellow	NSYTRR22PE	50	Grey	NSYTRACR22	50
 5.2 mm (0.21 in.) wide	Grounding Block Three Terminals Solid or Stranded Copper Wire 28–12 AWG	Green /Yellow	NSYTRR23PE	50	Grey	NSYTRACR23	50
 5.2 mm (0.21 in.) wide	Grounding Block Four Terminals Solid or Stranded Copper Wire 28–12 AWG	Green /Yellow	NSYTRR24PE	50	Grey	NSYTRACR24	50
 6.2 mm (0.24 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 28–10 AWG	Green /Yellow	NSYTRR42PE	50	Grey	NSYTRACR42	50
 6.2 mm (0.24 in.) wide	Grounding Block Three Terminals Solid or Stranded Copper Wire 28–10 AWG	Green /Yellow	NSYTRR43PE	50	Grey	NSYTRACR43	50
 6.2 mm (0.24 in.) wide	Grounding Block Four Terminals Solid or Stranded Copper Wire 28–10 AWG	Green /Yellow	NSYTRR44PE	50	Grey	NSYTRACR44	50
 8.2 mm (0.32 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–8 AWG	Green / Yellow	NSYTRR62PE	50	Grey	NSYTRACR62	50
 10.2 mm (0.40 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 16–6 AWG	Green /Yellow	NSYTRR102PE	50	Grey	NSYTRACR102	50
 12.2 mm (0.48 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 16–4 AWG	Green /Yellow	NSYTRR162PE	50	Grey	NSYTRACR162	10

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[4] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[5] One end-barrier is required for each assembly of like blocks.
[6] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Double and Triple Deck, Grounding, Component Carriers, Blade Isolators

Table 21.4: Spring Double and Triple Deck Passthrough [7]

Description		Max. Voltage	Max. Current [8]	Block			End Barrier [9]		
				Color	Catalog Number	Std. Pack [10]	Color	Catalog Number	Std. Pack [10]
 5.2 mm (0.21 in.) wide	Double Deck Block, Two Terminals In and Two Out, Solid or Stranded Copper Wire, 28–12 AWG	600 V	20 A	Grey	NSYTRR24D	50	Grey	NSYTRACRE24	50
				Blue	NSYTRR24DBL		Grey	NSYTRACRE24	
 6.2 mm (0.24 in.) wide	Double Deck Block, Two Terminals In and Two Out, Solid or Stranded Copper Wire, 28–10 AWG	600 V	30 A	Grey	NSYTRR44D	50	Grey	NSYTRACRE44	50
				Blue	NSYTRR44DBL		Grey	NSYTRACRE44	
 5.2 mm (0.21 in.) wide	Triple Deck Block, Three Terminals In and Three Out, Solid or Stranded Copper Wire, 28–12 AWG	600 V	20 A	Grey	NSYTRR26T	50	Grey	NSYTRACRE26	50
				Blue	NSYTRR26TBL		Grey	NSYTRACRE26	

Table 21.5: Spring Grounding Double Deck [7]




Description		Block			End Barrier [9]		
		Color	Catalog Number	Std. Pack [10]	Color	Catalog Number	Std. Pack [10]
 5.2 mm (0.21 in.) wide	Grounding Block, Two Terminals In and Two Out, Solid or Stranded Copper Wire, 28–12 AWG	Green/Yellow	NSYTRR24DPE	50	Grey	NSYTRACRE24	50
 6.2 mm (0.24 in.) wide	Grounding Block, Two Terminals In and Two Out, Solid or Stranded Copper Wire, 28–10 AWG	Green/Yellow	NSYTRR44DPE	50	Grey	NSYTRACRE44	50

Table 21.6: Spring Component Carriers [7]

Description		Max. Voltage	Max. Current [8]	Color	Catalog Number	Std. Pack [10]	End Barrier [9]		
							Color	Catalog Number	Std. Pack [10]
 5.2 mm (0.21 in.) wide	Component Carrier, Two Terminals, Solid or Stranded Copper Wire, 28–12 AWG	300 V	16 A	Grey	NSYTRR22TB	50	Grey	NSYTRACR23	50
	For fuse 5 x 20 mm	Depends on fuse or diode used		Black	NSYTRASF520	10	Not required		
	For fuse 5 x 20 mm 110–250 V LED				NSYTRASF520M	10			
	For fuse 5 x 20 mm 12–30 V LED				NSYTRASF520B	10			
	For component			Grey	NSYTRASV1	10			
	With 1N4007 diode				NSYTRASV2	10			
 5.2 mm (0.21 in.) wide	Component Carrier, One Terminal In and Two Out, Solid or Stranded Copper Wire, 28–12 AWG	300 V	16 A	Grey	NSYTRR23TB	50	Grey	NSYTRACR24	50
	For fuse 5 x 20 mm	Depends on fuse or diode used		Black	NSYTRASF520	10	Not required		
	For fuse 5 x 20 mm 110–250 V LED				NSYTRASF520M	10			
	For fuse 5 x 20 mm 12–30 V LED				NSYTRASF520B	10			
	For component			Grey	NSYTRASV1	10			
	With 1N4007 diode				NSYTRASV2	10			

Table 21.7: Spring Blade Isolators [7]

Description		Max. Voltage	Max. Current [8]	Block			End Barrier [9]		
				Color	Catalog Number	Std. Pack [10]	Color	Catalog Number	Std. Pack [10]
 5.2 mm (0.21 in.) wide	Blade Isolator, Two Terminals, Solid or Stranded Copper Wire, 28–12 AWG	600 V	16 A	Grey	NSYTRR22SC	50	Grey	NSYTRACR23	50
				Orange	NSYTRR22SCAR		Grey	NSYTACR23	
 5.2 mm (0.21 in.) wide	Blade Isolator, Three Terminals, Solid or Stranded Copper Wire, 28–12 AWG	600 V	16 A	Grey	NSYTRR23SC	50	Grey	NSYTACR24	50
				Orange	NSYTRR23SCAR		Grey	NSYTACR24	
 5.2 mm (0.21 in.) wide	Blade Isolator, Two Terminals In and Two Out, Solid or Stranded Copper Wire, 28–12 AWG	300 V	10 A	Grey	NSYTRR24SCD	50	Not required for this block.		

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[7] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

[8] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.

[9] One end-barrier is required for each assembly of like blocks.

[10] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Miniature Spring Passthrough and Grounding

Table 21.8: Miniature Spring Passthrough DIN Rail Mounting *[11]*

Description		Maximum Voltage	Maximum Current *[12]*	Block			End Barrier *[13]*		
				Color	Catalog Number	Std. Pack *[14]*	Color	Catalog Number	Std. Pack *[14]*
 5.2 mm (0.21 in.) wide	Two Terminals Solid or Stranded Copper Wire 28–12 AWG Mount on DIN Rail 15 x 7.2 mm	600 V	20 A	Grey	NSYTRR22M	50	Grey	NSYTRACRM22	50
				Blue	NSYTRR22MBL		Grey	NSYTRACRM22	
 10.4 mm (0.41 in.) wide	Four Terminals Solid or Stranded Copper Wire 28–12 AWG Mount on DIN Rail 15 x 7.2 mm	600 V	20 A	Grey	NSYTRR24M	50	Grey	NSYTRACRM22	50
				Blue	NSYTRR24MBL		Grey	NSYTRACRM22	

Table 21.9: Miniature Spring Grounding Type *[11]*

Description		Block			End Barrier *[13]*		
		Color	Catalog Number	Std. Pack *[14]*	Color	Catalog Number	Std. Pack *[14]*
 5.2 mm (0.21 in.) wide	Grounding Block, Two Terminals, Solid or Stranded Copper Wire 28–12 AWG Mount on DIN Rail 15 x 7.2 mm	Green/Yellow	NSYTRR22MPE	50	Grey	NSYTRACRM22	50

Table 21.10: Miniature Spring Passthrough Direct Mounting and for Micro-Perforated Mounting Plates *[11]*

Description		Maximum Voltage	Maximum Current *[12]*	Block			End Barrier *[13]*		
				Color	Catalog Number	Std. Pack *[14]*	Color	Catalog Number	Std. Pack *[14]*
 5.2 mm (0.21 in.) wide	Direct Mounting (Flange) Two Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR22MF	50	Grey	NSYTRACRM22	50
				Blue	NSYTRR22MFBL		Grey	NSYTRACRM22	
				Grey	NSYTRR22MFF *[15]*		Grey	NSYTRACRM22 or NSYTRACRMF22 *[15]*	
 10.4 mm (0.41 in.) wide	Direct Mounting (Flange) Four Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR24MF	50	Grey	NSYTRACRM22	50
				Blue	NSYTRR24MFBL		Grey	NSYTRACRM22	
				Grey	NSYTRR24MFF *[15]*		Grey	NSYTRACRM22 or NSYTRACRMF22 *[15]*	
 5.2 mm (0.21 in.) wide	For Micro-Perforated Mounting Plates Two Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR22MP	50	Grey	NSYTRACRM22	50
				Blue	NSYTRR22MPBL		Grey	NSYTRACRM22	
 10.4 mm (0.41 in.) wide	For Micro-Perforated Mounting Plates Four Terminals Solid or Stranded Copper Wire 28–12 AWG	600 V	20 A	Grey	NSYTRR24MP	50	Grey	NSYTRACRM22	50
				Blue	NSYTRR24MBL		Grey	NSYTRACRM22	

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739, CCN: XCFR2 File: 256444, Class: 6228-01 RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[11] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[12] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.
[13] One end-barrier is required for each assembly of like blocks.
[14] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.
[15] With flange. Can only be used at the end of a group of terminals.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Passthrough and Grounding

Table 21.11: Screw Type Passthrough Blocks *[16]*

Description		Maximum Voltage	Maximum Current *[17]*	Block			End Barrier *[18]*		
				Color	Catalog Number	Std. Pack *[19]*	Color	Catalog Number	Std. Pack *[19]*
 5.2 mm (0.21 in.) wide	Two Terminals Solid or Stranded Copper Wire 26–12 AWG	600 V	20 A	Grey	NSYTRV22	50	Grey	NSYTRAC22	50
				Blue	NSYTRV22BL		Blue	NSYTRAC22BL	
				Orange	NSYTRV22AR		Grey	NSYTRAC22	
				Red	NSYTRV22RD		Grey	NSYTRAC22	
				White	NSYTRV22WH		Grey	NSYTRAC22	
 6.2 mm (0.24 in.) wide	Two Terminals Solid or Stranded Copper Wire 26–10 AWG	600 V	00 A	Grey	NSYTRV42	50	Grey	NSYTRAC22	50
				Blue	NSYTRV42BL		Blue	NSYTRAC22BL	
				Orange	NSYTRV42AR		Grey	NSYTRAC22	
				Red	NSYTRV42RD		Grey	NSYTRAC22	
				Green	NSYTRV42GN		Grey	NSYTRAC22	
				White	NSYTRV42WH		Grey	NSYTRAC22	
				Black	NSYTRV42BK		Grey	NSYTRAC22	
				Brown	NSYTRV42BR		Grey	NSYTRAC22	
				Yellow	NSYTRV42YE		Grey	NSYTRAC22	
 8.2 mm (0.32 in.) wide	Two Terminals Solid or Stranded Copper Wire 24–8 AWG	600 V	50 A	Grey	NSYTRV62	50	Grey	NSYTRAC22	50
				Blue	NSYTRV62BL		Blue	NSYTRAC22BL	
 10.2 mm (0.40 in.) wide	Two Terminals Solid or Stranded Copper Wire 20–6 AWG	600 V	65 A	Grey	NSYTRV102	50	Grey	NSYTRAC22	50
				Blue	NSYTRV102BL		Blue	NSYTRAC22BL	
 12.2 mm (0.48 in.) wide	Two Terminals Solid or Stranded Copper Wire 16–4 AWG	600 V	85 A	Grey	NSYTRV162	50	Grey	NSYTRAC162	50
				Blue	NSYTRV162BL		Grey	NSYTRAC162	
 16 mm (0.63 in.) wide	Two Terminals Solid or Stranded Copper Wire 14–1/0 AWG	600 V	150 A	Grey	NSYTRV352	50	Not required for these blocks.		
				Blue	NSYTRV352BL				
 20 mm (0.79 in.) wide	Two Terminals Solid or Stranded Copper Wire 6–1/0 AWG	600 V	150 A	Grey	NSYTRV502	50	Not required for these blocks.		
				Blue	NSYTRV502BL				

NOTE: For a complete listing of these products, see catalog 9080CT1301.

File: E87739; CCN: XCFR2 File: 256444; Class: 6228-01 RoHS Compliant For track and accessories, see page 21-18.

[16] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[17] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.
[18] One end-barrier is required for each assembly of like blocks.
[19] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Table 21.12: Screw Type Grounding Blocks *[20]*

Description		Block			End Barrier *[21]*		
		Color	Catalog Number	Std. Pack *[22]*	Color	Catalog Number	Std. Pack *[22]*
 5.2 mm (0.21 in.) wide	Two Terminals, Solid or Stranded Copper Wire, 26–12 AWG	Green/Yellow	NSYTRV22PE	50	Grey	NSYTRAC22	50
 6.2 mm (0.24 in.) wide	Two Terminals, Solid or Stranded Copper Wire, 26–10 AWG	Green/Yellow	NSYTRV42PE	50	Grey	NSYTRAC22	50
 8.2 mm (0.32 in.) wide	Two Terminals, Solid or Stranded Copper Wire, 24–8 AWG	Green/Yellow	NSYTRV62PE	50	Grey	NSYTRAC22	50
 10.2 mm (0.40 in.) wide	Two Terminals, Solid or Stranded Copper Wire, 20–6 AWG	Green/Yellow	NSYTRV102PE	50	Grey	NSYTRAC22	50
 12.2 mm (0.48 in.) wide	Grounding Block, Two Terminals, Solid or Stranded Copper Wire, 16–4 AWG	Green/Yellow	NSYTRV162PE	50	Grey	NSYTRAC162	50
 16 mm (0.63 in.) wide	Two Terminals, Solid or Stranded Copper Wire, 14–1/0 AWG	Green/Yellow	NSYTRV352PE	50	Not required for this block.		
 20 mm (0.79 in.) wide	Two Terminals, Solid or Stranded Copper Wire, 6–1/0 AWG	Green/Yellow	NSYTRV502PE	50	Not required for this block.		

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739; CCN: XCFR2 File: 256444; Class: 6228-01 RoHS Compliant For track and accessories, see page 21-18.

[20] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[21] One end-barrier is required for each assembly of like blocks.
[22] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Lug/Lug, Double and Triple Deck Passthrough, Grounding

Table 21.13: Passthrough, Lug/Lug, and Lug/Clamp *[23]*

Description			Block				Partition Cover		
			Maximum Current*[24]*	Color	Catalog Number	Std. Pack *[25]*	Color	Catalog Number	Std. Pack *[25]*
 20.3 mm (0.80 in.) wide	Passthrough Solid or Stranded Copper Wire 4–3/0 AWG	Screw thread M8 Maximum Voltage–600 V	192 A	Grey	NSYTRV702	10	Not required for this block.		
 40 mm (1.58 in.) wide	Lug to Lug Solid or Stranded Copper Wire 2–4/0 AWG	Screw thread M12 Maximum Voltage–600 V	230 A	Grey	NSYTRV952BB	10	Grey	NSYTRAC952	10
 40 mm (1.58 in.) wide	Solid or Stranded Copper Wire 2–4/0 AWG	Screw thread M12 Maximum Voltage–600 V	230 A	Grey	NSYTRV952BC	10	Grey	NSYTRAC952	10
 46 mm (1.81 in.) wide	Lug to Lug Solid or Stranded Copper Wire 2–300 AWG/kcmil	Screw thread M12 Maximum Voltage–600 V	285 A	Grey	NSYTRV1502BB	10	Grey	NSYTRAC952	10

Table 21.14: Screw Type Double and Triple Deck Passthrough *[23]*

Description		Maximum Voltage	Maximum Current*[24]*	Block			End Barrier *[26]*		
				Color	Catalog Number	Std. Pack *[25]*	Color	Catalog Number	Std. Pack *[25]*
 6.2 mm (0.24 in.) wide	Double Deck, One Pole, Three Terminals Solid or Stranded Copper Wire 26–10 AWG	150 V	30 A	Grey	NSYTRV43	50	Grey	NSYTRAC23	50
				Blue	NSYTRV43BL		Grey	NSYTRAC23	
 6.2 mm (0.24 in.) wide	Double Deck, One Pole, Four Terminals Solid or Stranded Copper Wire 26–10 AWG	150 V	30 A	Grey	NSYTRV44	50	Grey	NSYTRAC24	50
				Blue	NSYTRV44BL		Grey	NSYTRAC24	
 5.2 mm (0.21 in.) wide	Double Deck, Two Poles, Four Terminals Solid or Stranded Copper Wire 26–12 AWG	600 V	20 A	Grey	NSYTRV24D	50	Grey	NSYTRACE24	50
				Blue	NSYTRV24DBL		Grey	NSYTRACE24	
 6.2 mm (0.24 in.) wide	Double Deck, Two Poles, Four Terminals Solid or Stranded Copper Wire 26–10 AWG	600 V	30 A	Grey	NSYTRV44D	50	Grey	NSYTRACE24	50
				Blue	NSYTRV44DBL		Grey	NSYTRACE24	
 5.2 mm (0.21 in.) wide	Triple Deck, Three Poles, Six Terminals Solid or Stranded Copper Wire 26–10 AWG	600 V	20 A	Grey	NSYTRV26T	50	Grey	NSYTRACE26	50

Table 21.15: Screw Type Grounding Double Deck *[23]*

Description		Block			End Barrier *[26]*		
		Color	Catalog Number	Std. Pack *[25]*	Color	Catalog Number	Std. Pack *[25]*
 6.2 mm (0.24 in.) wide	Grounding Block, One Pole, Three Terminals Solid or Stranded Copper Wire 26–12 AWG	Green/Yellow	NSYTRV43PE	50	Grey	NSYTRAC23	50
 6.2 mm (0.24 in.) wide	Grounding Block, One Pole, Four Terminals Solid or Stranded Copper Wire 26–12 AWG	Green/Yellow	NSYTRV44PE	50	Grey	NSYTRAC24	50
 5.2 mm (0.21 in.) wide	Grounding Block, One Pole, Four Terminals Solid or Stranded Copper Wire 26–12 AWG	Green/Yellow	NSYTRV24DPE	50	Grey	NSYTRACE24	50
 6.2 mm (0.24 in.) wide	Grounding Block, One Pole, Four Terminals Solid or Stranded Copper Wire 26–10 AWG	Green/Yellow	NSYTRV44DPE	50	Grey	NSYTRACE24	50

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online.

File: E87739
CCN: XCFR2

File: 256444
Class: 6228-01

RoHS Compliant

For track and accessories, see page 21-18.

[23] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[24] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.
[25] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.
[26] One end-barrier is required for each assembly of like blocks.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Blade Isolators, Component Carriers, Fused, Measuring, Grounding

Table 21.16: Screw Type Blade Isolators [27]

Description		Maximum Voltage	Maximum Current [28]	Block			End Barrier [29]		
				Color	Catalog Number	Std. Pack [30]	Color	Catalog Number	Std. Pack [30]
 6.2 mm (0.24 in.) wide	Blade Isolator Two Terminals Solid or Stranded Copper Wire 26–10 AWG	600 V	16 A	Grey	NSYTRV42SC	50	Not required for this block.		
				Grey with Test Points	NSYTRV42ST				
				Orange with Test Points	NSYTRV42STAR				
 6.2 mm (0.24 in.) wide	Blade Isolator Double Deck Four Terminals Solid or Stranded Copper Wire 26–10 AWG	300 V	30 A	Grey	NSYTRV42SCD	50	Grey	NSYTRACE24	50

Table 21.17: Screw Type Component Carrier [27]


Description		Maximum Voltage	Maximum Current [28]	Color	Catalog Number	Std. Pack [30]	End Barrier [29]
 6.2 mm (0.24 in.) wide	Component Carrier Two Terminals Solid or Stranded Copper Wire 26–10 AWG	600 V	16 A	Grey	NSYTRV42TB	50	Not required for this block
	For fuse 5 x 20 mm	Depends on fuse or diode used		Black	NSYTRASF520	10	Not required
	For fuse 5 x 20 mm 110–250 V LED				NSYTRASF520M	10	
	For fuse 5 x 20 mm 12–30 V LED				NSYTRASF520B	10	
	For component			Grey	NSYTRASV1	10	
	With 1N4007 diode				NSYTRASV2	10	

Table 21.18: Fused Terminal Blocks [27]

Description			Color	Catalog Number	Std. Pack [30]	End Barrier [29]		
						Color	Catalog Number	Std. Pack [30]
 12 mm (0.47 in.) wide	Fuse Block For G-fuse cartridge 5x20 mm Solid or Stranded Copper Wire 24–6 AWG Maximum Voltage 300 V Maximum Current 20 A[28]	Without Indicator Lamp	Black	NSYTRV162SF	50	Not required for this block.		
 8.2 mm (0.32 in.) wide	Lever-Type Fuse For G-fuse cartridge 5x20 mm Solid or Stranded Copper Wire 26–10 AWG Maximum Voltage 600 V Maximum Current 12 A[28]	Without Indicator Lamp	Black	NSYTRV42SF5	50	Not required for this block.		
		With Light Indicator, 12–30 V AC/DC[31]	Black	NSYTRV42SF5LD	50			
		With Light Indicator, 110–250 V AC/DC[31]	Black	NSYTRV42SF5LA	50			
 10.2 mm (0.40 in.) wide	Lever-Type Fuse For G-fuse cartridge 6.3x32 mm Solid or Stranded Copper Wire 26–8 AWG Maximum Voltage 600 V Maximum Current 10 A[28]	Without Indicator Lamp	Black	NSYTRV42SF6	50	Not required for this block.		
		With Light Indicator, 12–30 V AC/DC[31]	Black	NSYTRV42SF6LD	50			
		With Light Indicator, 110–250 V AC/DC[31]	Black	NSYTRV42SF6LA	50			

These measuring transducer terminal blocks with screw connection technology are characterized by easy operation and clarity. All switching statuses are clearly visible. The extensive range of flexible accessories saves cost and time when executing transducer test circuit tasks.

Table 21.19: Measuring and Grounding Terminal Blocks [27]

Description		Maximum Voltage	Maximum Current [28]	Block			End Barrier [29]		
				Color	Catalog Number	Std. Pack [30]	Color	Catalog Number	Std. Pack [30]
 8.2 mm (0.32 in.) wide	Blade Isolator Double Deck Solid or Stranded Copper Wire 24–8 AWG	600 V	30 A	Grey	NSYTRV62TTD	50	Grey	NSYTRACT22	50
 8.2 mm (0.32 in.) wide	Passthrough Two Terminals Solid or Stranded Copper Wire 24–8 AWG	600 V	30 A	Grey	NSYTRV62TT	50			
 8.2 mm (0.32 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–8 AWG	N/A	N/A	Green/ Yellow	NSYTRV62TTPE	50			

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[27] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[28] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.
[29] One end-barrier is required for each assembly of like blocks.
[30] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.
[31] When voltage is applied within the minimum and maximum limits, the LED will illuminate.


© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Miniature Passthrough and Hybrid Passthrough

Table 21.20: Screw Type Miniature Passthrough *[32]*

Description		Maximum Voltage	Maximum Current *[33]*	Block			End Barrier *[34]*		
				Color	Catalog Number	Std. Pack *[35]*	Color	Catalog Number	Std. Pack *[35]*
 5.2 mm (0.21 in.) wide	Two Terminals Solid or Stranded Copper Wire 24–12 AWG Mount on DIN rail, 5 x 5 mm	600 V	20 A	Grey	NSYTRV22M	50	Grey	NSYTRACM22	50
				Blue	NSYTRV22MBL		Grey	NSYTRACM22	
 6.2 mm (0.24 in.) wide	Two Terminals Solid or Stranded Copper Wire 24–10 AWG Mount on DIN rail, 5 x 5 mm	600 V	30 A	Grey	NSYTRV42M	50	Grey	NSYTRACM22	50
				Blue	NSYTRV42MBL		Grey	NSYTRACM22	

Table 21.21: Screw Type Miniature Grounding Blocks *[32]*

Description		Block			End Barrier *[34]*		
		Color	Catalog Number	Std. Pack *[35]*	Color	Catalog Number	Std. Pack *[35]*
 5.2 mm (0.21 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–12 AWG Mount on DIN rail, 5 x 5 mm	Green/Yellow	NSYTRV22MPE	50	Grey	NSYTRACM22	50
 6.2 mm (0.24 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–10 AWG Mount on DIN rail, 5 x 5 mm	Green/Yellow	NSYTRV42MPE	50	Grey	NSYTRACM22	50

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[32] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[33] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.
[34] One end-barrier is required for each assembly of like blocks.
[35] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Table 21.22: Hybrid Blocks—Screw and Insulation Displacement Connection (IDC) Passthrough *[36]*

Description		Maximum Voltage	Maximum Current *[37]*	Block			End Barrier *[38]*		
				Color	Catalog Number	Std. Pack *[39]*	Color	Catalog Number	Std. Pack *[39]*
 5.2 mm (0.21 in.) wide	Two Terminals Solid or Stranded Copper Wire 24–16 AWG	600 V	10 A	Grey	NSYTRH12	50	Grey	NSYTRACH12	50
 5.2 mm (0.21 in.) wide	Three Terminals Solid or Stranded Copper Wire 24–16 AWG	600 V	10 A	Grey	NSYTRH13	50	Grey	NSYTRACH13	50
 6.2 mm (0.24 in.) wide	Three Terminals Solid or Stranded Copper Wire 20–14 AWG	600 V	15 A	Grey	NSYTRH22	50	Grey	NSYTRACH22	50

Table 21.23: Hybrid Grounding Block—Screw and Insulation Displacement Connection (IDC) Passthrough *[36]*

Description		Block			End Barrier *[38]*		
		Color	Catalog Number	Std. Pack *[39]*	Color	Catalog Number	Std. Pack *[39]*
 5.2 mm (0.21 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–16 AWG	Green/Yellow	NSYTRH12PE	50	Grey	NSYTRACH12	50

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[36] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

[37] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.

[38] One end-barrier is required for each assembly of like blocks.


[39] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Passthrough and Grounding

Push-in technology terminal blocks feature simple handling and direct, tool-free connections. When pushing in solid wires or wires with ferrules, the contact spring is automatically opened and ensures the required pressure force against the current bar.

Table 21.24: Push-in Passthrough Blocks *[40]*

Description		Maximum Voltage	Maximum Current *[41]*	Block			End Barrier *[42]*		
				Color	Catalog Number	Std. Pack *[43]*	Color	Catalog Number	Std. Pack *[43]*
 5.2 mm (0.21 in.) wide	Two Terminals Solid or Stranded Copper Wire 24–12 AWG	600 V	20 A	Grey	NSYTRP22	50	Grey	NSYTRACR22	50
				Blue	NSYTRP22BL		Blue	NSYTRACR22BL	
				Orange	NSYTRP22AR		Grey	NSYTRACR22	
 5.2 mm (0.21 in.) wide	Three Terminals Solid or Stranded Copper Wire 24–12 AWG	600 V	20 A	Grey	NSYTRP23	50	Grey	NSYTRACR23	50
				Blue	NSYTRP23BL		Blue	NSYTRACR23BL	
				Orange	NSYTRP23AR		Grey	NSYTRACR23	
 5.2 mm (0.21 in.) wide	Four Terminals Solid or Stranded Copper Wire 24–12 AWG	600 V	20 A	Grey	NSYTRP24	50	Grey	NSYTRACR24	50
				Blue	NSYTRP24BL		Blue	NSYTRACR24BL	
 6.2 mm (0.24 in.) wide	Two Terminals Solid or Stranded Copper Wire 24–10 AWG	600 V	30 A	Grey	NSYTRP42	50	Grey	NSYTRACR42	50
				Blue	NSYTRP42BL		Grey	NSYTRACR42	
 6.2 mm (0.24 in.) wide	Three Terminals Solid or Stranded Copper Wire 24–10 AWG	600 V	30 A	Grey	NSYTRP43	50	Grey	NSYTRACP43	50
				Blue	NSYTRP43BL		Grey	NSYTRACP43	
 6.2 mm (0.24 in.) wide	Four Terminals Solid or Stranded Copper Wire 24–10 AWG	600 V	30 A	Grey	NSYTRP44	50	Grey	NSYTRACP44	50
				Blue	NSYTRP44BL		Grey	NSYTRACP44	

NOTE: For a complete listing of these products, see catalog 9080CT1301.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[40] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

[41] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.

[42] One end-barrier is required for each assembly of like blocks.

[43] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Table 21.25: Push-in Grounding Blocks *[44]*

Description		Block			End Barrier *[45]*		
		Color	Catalog Number	Std. Pack *[46]*	Color	Catalog Number	Std. Pack *[46]*
 5.2 mm (0.21 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–12 AWG	Green/Yellow	NSYTRP22PE	50	Grey	NSYTRACR22	50
 5.2 mm (0.21 in.) wide	Grounding Block Three Terminals Solid or Stranded Copper Wire 24–12 AWG	Green/Yellow	NSYTRP23PE	50	Grey	NSYTRACR23	50
 5.2 mm (0.21 in.) wide	Grounding Block Four Terminals Solid or Stranded Copper Wire 24–12 AWG	Green/Yellow	NSYTRP24PE	50	Grey	NSYTRACR24	50
 6.2 mm (0.24 in.) wide	Grounding Block Two Terminals Solid or Stranded Copper Wire 24–10 AWG	Green/Yellow	NSYTRP42PE	50	Grey	NSYTRACR42	50
 6.2 mm (0.24 in.) wide	Grounding Block Three Terminals Solid or Stranded Copper Wire 24–10 AWG	Green/Yellow	NSYTRP43PE	50	Grey	NSYTRACP43	50
 6.2 mm (0.24 in.) wide	Grounding Block Four Terminals Solid or Stranded Copper Wire 24–10 AWG	Green/Yellow	NSYTRP44PE	50	Grey	NSYTRACP44	50

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 702070 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[44] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[45] One end-barrier is required for each assembly of like blocks.
[46] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Double Deck Passthrough, Blade Isolators, Component Carriers


Table 21.26: Push-in Double Deck Passthrough and Grounding Terminal Blocks *[47]*

Description		Maximum Voltage	Maximum Current *[48]*	Block			End Barrier *[49]*		
				Color	Catalog Number	Std. Pack *[50]*	Color	Catalog Number	Std. Pack *[50]*
 5.2 mm (0.21 in.) wide	Double Deck Passthrough Four Terminals Solid or Stranded Copper Wire 26–12 AWG	600 V	20 A	Grey	NSYTRP24D	50	Grey	NSYTRACRE24	50
				Blue	NSYTRP24DBL		Grey	NSYTRACRE24	
 5.2 mm (0.21 in.) wide	Double Deck Grounding Block Four Terminals Solid or Stranded Copper Wire 26–12 AWG	N/A	N/A	Green/Yellow	NSYTRP24DPE	50	Grey	NSYTRACRE24	50

Table 21.27: Push-in Blade Isolators *[47]*

Description		Maximum Voltage	Maximum Current *[48]*	Block			End Barrier *[49]*		
				Color	Catalog Number	Std. Pack *[50]*	Color	Catalog Number	Std. Pack *[50]*
 5.2 mm (0.21 in.) wide	Blade Isolator Two Terminals Solid or Stranded Copper Wire 26–12 AWG	300 V	20 A	Grey	NSYTRP22SC	50	Grey	NSYTRACPK22	50
 5.2 mm (0.21 in.) wide	Blade Isolator Three Terminals Solid or Stranded Copper Wire 26–12 AWG	300 V	20 A	Grey	NSYTRP23SC	50	Grey	NSYTRACPK23	50
 5.2 mm (0.21 in.) wide	Blade Isolator Four Terminals Solid or Stranded Copper Wire 26–12 AWG	300 V	20 A	Grey	NSYTRP24SC	50	Grey	NSYTRACPK24	50

Table 21.28: Push-In Type Component Carriers *[47]*

Description		Maximum Voltage	Maximum Current *[48]*	Color	Catalog Number	Std. Pack *[50]*	End Barrier *[49]*		
							Color	Catalog Number	Std. Pack *[50]*
 5.2 mm (0.21 in.) wide	Component Carrier Two Terminals Solid or Stranded Copper Wire 26–12 AWG	300 A	20 A	Grey	NSYTRP22TB	50	Grey	NSYTRACPK22	50
	For fuse 5 x 20 mm	Depends on fuse or diode used		Black	NSYTRASF520	10	Not required		
	For fuse 5 x 20 mm 110–250 V LED				NSYTRASF520M	10			
	For fuse 5 x 20 mm 12–30 V LED				NSYTRASF520B	10			
	For component			Grey	NSYTRASV1	10			
	With 1N4007 diode				NSYTRASV2	10			
 6.2 mm (0.24 in.) wide	Component Carrier Two Terminals Solid or Stranded Copper Wire 24–12 AWG	300 A	20 A	Grey	NSYTRP42TB	50	Grey	NSYTRACR42	50
	For fuse 5 x 20 mm	Depends on fuse or diode used		Black	NSYTRASF520	10	Not required		
	For fuse 5 x 20 mm 110–250 V LED				NSYTRASF520M	10			
	For fuse 5 x 20 mm 12–30 V LED				NSYTRASF520B	10			
	For component			Grey	NSYTRASV1	10			
	With 1N4007 diode				NSYTRASV2	10			

NOTE: For a complete listing of these products, see **Linergy TR Terminal Blocks** online or catalog **9080CT1301**.

File: E87739 CCN: XCFR2

File: 256444 Class: 6228-01

RoHS Compliant

For track and accessories, see Mounting Track and End Clamps, page 21-18.

[47] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

[48] These maximum current values assume the use of insulated copper conductors with 167 °F (75 °C) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.

[49] One end-barrier is required for each assembly of like blocks.

[50] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Linergy Marking Accessories

Table 21.29: Markers *[51]*

Description		Marking	Catalog Number	Std Pack*[52]*
	Black horizontal markings on white background For 5.2 mm (0.21 in.) wide blocks Lateral sides for NSYTRV terminal blocks Central shaft for NSYTRR / NSYTRP / NSYTRH terminal blocks	1 to 10	NSYTRAB510	10
		11 to 20	NSYTRAB520	10
		21 to 30	NSYTRAB530	10
		31 to 40	NSYTRAB540	10
		41 to 50	NSYTRAB550	10
		51 to 60	NSYTRAB560	10
		61 to 70	NSYTRAB570	10
		71 to 80	NSYTRAB580	10
		81 to 90	NSYTRAB590	10
		91 to 100	NSYTRAB5100	10
		1 to 100	NSYTRAB51100	1
		L1, L2, L3, N, PE	NSYTRAB5L1N	10
	Black horizontal markings on white background For 6.2 mm (0.24 in.) wide blocks Lateral sides for NSYTRV terminal blocks Central shaft for NSYTRR / NSYTRP / NSYTRH terminal blocks	1 to 10	NSYTRAB610	10
		11 to 20	NSYTRAB620	10
		21 to 30	NSYTRAB630	10
		31 to 40	NSYTRAB640	10
		41 to 50	NSYTRAB650	10
		51 to 60	NSYTRAB660	10
		61 to 70	NSYTRAB670	10
		71 to 80	NSYTRAB680	10
		81 to 90	NSYTRAB690	10
		91 to 100	NSYTRAB6100	10
		1 to 100	NSYTRAB61100	1
		L1, L2, L3, N, PE	NSYTRAB6L1N	10
	Black horizontal markings on white background For 8.2 mm (0.32 in.) wide blocks Lateral sides for NSYTRV terminal blocks Central shaft for NSYTRR / NSYTRP / NSYTRH terminal blocks	1 to 10	NSYTRAB810	10
		11 to 20	NSYTRAB820	10
		21 to 30	NSYTRAB830	10
		31 to 40	NSYTRAB840	10
		41 to 50	NSYTRAB850	10
		51 to 60	NSYTRAB860	10
		61 to 70	NSYTRAB870	10
		71 to 80	NSYTRAB880	10
		81 to 90	NSYTRAB890	10
		91 to 100	NSYTRAB8100	10
		1 to 100	—	—
		L1, L2, L3, N, PE	—	—
	Flat markers Black horizontal markings on white background Lateral sides for NSYTRV terminal blocks Central shaft for NSYTRR / NSYTRP / NSYTRH terminal block	1 to 10	NSYTRAB1010	10
		11 to 20	NSYTRAB1020	10
		21 to 30	NSYTRAB1030	10
		31 to 40	NSYTRAB1040	10
		41 to 50	NSYTRAB1050	10
		51 to 60	NSYTRAB1060	10
		61 to 70	NSYTRAB1070	10
		71 to 80	NSYTRAB1080	10
		81 to 90	NSYTRAB1090	10
		91 to 100	NSYTRAB10100	10
		1 to 100	—	—
		L1, L2, L3, N, PE	—	—
	Flat markers Black horizontal markings on white background For 5.2 mm (0.21 in.) wide blocks Lateral sides for NSYTRV terminal blocks Central shaft for NSYTRR / NSYTRP / NSYTRH terminal blocks	1 to 10	NSYTRABF510	10
		11 to 20	NSYTRABF520	10
		21 to 30	NSYTRABF530	10
		31 to 40	NSYTRABF540	10
		41 to 50	NSYTRABF550	10
		51 to 60	—	—
		61 to 70	—	—
		71 to 80	—	—
		81 to 90	—	—
		91 to 100	—	—
		1 to 100	—	—
		L1, L2, L3, N, PE	—	—
	Flat markers Black horizontal markings on white background For 6.2 mm (0.24 in.) wide blocks Lateral sides for NSYTRV terminal blocks Central shaft for NSYTRR / NSYTRP / NSYTRH terminal block	1 to 10	NSYTRABF610	10
		11 to 20	NSYTRABF620	10
		21 to 30	NSYTRABF630	10
		31 to 40	NSYTRABF640	10
		41 to 50	NSYTRABF650	10
		51 to 60	—	—
		61 to 70	—	—
		71 to 80	—	—
		81 to 90	—	—
		91 to 100	—	—
		1 to 100	—	—
		L1, L2, L3, N, PE	—	—

NOTE: Refer to catalog 9080CT1301 for additional labeling options.

[51] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[52] For blocks 12.2 mm (0.48 in.) or wider, the strip must be broken and the individual marking characters used.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Linergy Labeling System

Table 21.30: Blank Markers *[53]*


Description		Catalog Number	Std. Pack
 Blank marking cards for 5.2 mm (0.21 in.) wide blocks	72 characters (6 strips)	NSYTRABPV5	10
	Plotter adapter for marking cards	NSYTRABMP1	1
 Blank marking cards for 6.2 mm (0.24 in.) wide blocks	60 characters (6 strips)	NSYTRABPV6	10
	Plotter adapter for marking cards	NSYTRABMP1	1
 Blank marking cards for 8.2 mm (0.32 in.) wide blocks	42 characters (6 strips)	NSYTRABPV8	10
	Plotter adapter for marking cards	NSYTRABMP1	1
 Blank flat marking cards for 5.2 mm (0.21 in.) wide blocks	72 characters (6 strips)	NSYTRABFPV5	10
	Plotter adapter for marking cards	NSYTRABMP2	1
 Blank flat marking cards for 6.2 mm (0.24 in.) wide blocks	60 characters (6 strips)	NSYTRABFPV6	10
	Plotter adapter for marking cards	NSYTRABMP2	1

RoHS Compliant


NOTE: Refer to catalog 9080CT1301 for additional labeling options.

[53] Some products may be discontinued. Refer to www.se.com/us for the most current product information.


© 2026 Schneider Electric
All Rights Reserved
3/11/2026




NSYSDR200D and NSYSDR200



NSYSDR200BD and NSYSDR200B



NSYSTRAD155

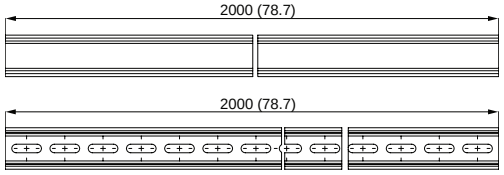


Mounting Track and End Clamps


Table 21.31: DIN 3 Track—78.74 inches (2 meter) length *[1]*

Description	Length		Catalog Number	Std. Pack *[2]*
	In.	mm		
DIN 3				
Symmetrical rail 35x15 mm depth, 1.5 mm thick galvanized steel, Prepunched	78.74	2000	NSYSDR200D	20
Symmetrical rail 35x15 mm depth, 1.5 mm thick galvanized steel, No mounting holes	78.74	2000	NSYSDR200	20
Symmetrical rail 35x7.2 mm depth, 1 mm thick galvanized steel, Prepunched	78.74	2000	NSYSDR200BD	20
Symmetrical rail 35x7.2 mm depth, 1 mm thick galvanized steel, No mounting holes	78.74	2000	NSYSDR200B	20
DIN 2				
Symmetrical rail 15x5 mm depth, 1 mm thick galvanized steel, Prepunched	78.74	2000	NSYTRADR155	5
End Clamps				
 Plastic clip-on end clamp for 35 mm DIN 3 track	0.21	5.2	NSYTRAAB35	50
 Plastic clip-on end clamp with screw for 35 mm DIN 3 track	0.37	9.5	NSYTRAABV35	50
 Plastic clip-on end clamp for 15 mm DIN 2 track	0.21	5.2	NSYTRAAB15	50
 Polycarbonate end clamp for 35 mm DIN 3 track	0.31	8	9080MHA10	50
RoHS Compliant				

SQUARE D by Schneider Electric



9080MHA10

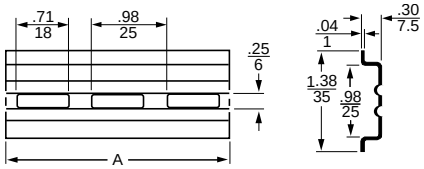

9080MH3**

Table 21.32: DIN 3 Track – Various Lengths *[1]*

Description		Length		Class 9080 Type	Std. *[2]* Pack
		In.	mm		
Symmetrical rail 35 x 7.5 mm (1.38 in. x 0.295 in.) in compliance with EN 50022 standard (DIN 46277-3).	Galvanized steel, no mounting holes	3	0.08	9080MH203	10
		6	0.15	9080MH206	
		7	0.18	9080MH207	
		8	0.20	9080MH208	
		12	0.30	9080MH212	
		16	0.41	9080MH216	
		19.68	500	9080MH220	
		39.37	1000	9080MH239	
		78.74	2000	9080MH279	
	Galvanized steel, prepunched	3	0.08	9080MH303	
		4	0.10	9080MH304	
		5	0.13	9080MH305	
		6	0.15	9080MH306	
		7	0.18	9080MH307	
		8	0.20	9080MH308	
		9	0.23	9080MH309	
		10	0.25	9080MH310	
		11	0.28	9080MH311	
		12	0.30	9080MH312	
		13	0.33	9080MH313	
		14	0.36	9080MH314	
		15	0.38	9080MH315	
		16	0.41	9080MH316	
		17	0.43	9080MH317	
		18	0.46	9080MH318	
		19.68	500	9080MH320	
		39.37	1000	9080MH339	
		78.74	2000	9080MH379	
High rise track	Aluminum	39.37	1000	9080MH439	2

[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[2] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Selection Guide

Table 21.33: Type G Selection Guide *[1]*

Description		Max. Voltage	Max. Current *[2]*	Blocks			End Barriers *[3]*		Blocks per ft.	Maximum Wire Combinations	
				Color	Type	Std. Pack *[4]*	Type	Std. Pack *[4]*		Copper Wire (stranded or solid)	
	Solderless Box Lug for #22 to #8 AWG wire. Mounts on standard 9080GH track or 35 mm DIN 3 track. Fingersafe per DIN 60529.	600 V	60 A	Natural	9080GR6	50	9080GM6B	10	34	1 **#8** 1 **#10** 1–3 **#12** 1–4 **#14**	1–4 **#16** 1–5 **#18** 1–8 **#20** 1–10 **#22**
				Black	9080GRB6		9080GMB6B				
				Blue *[1]*	9080GRL6		9080GML6B				
				Green *[1]*	9080GRG6		9080GMG6B				
				Gray	9080GRE6		9080GME6B				
				Orange *[1]*	9080GRS6		9080GMS6B				
				Red	9080GRR6		9080GMR6B				
				Yellow *[1]*	9080GRY6		9080GMY6B				
				Brown *[1]*	9080GRN6		9080GMN6B				
	Solderless Box Lug for #22 to #10 AWG wire. Can be mounted directly to a panel or can be mounted on 9080GH track.	600 V	40 A	Natural	9080GK6	50	9080GK6B	50	34	1–4 **#16** 1 **#10** 1–2 **#12** 1–2 **#14**	1–4 **#16** 1–5 **#18** 1–8 **#20** 1–10 **#22**
				Black	9080GKB6						
				Blue	9080GKL6						
				Green	9080GKG6						
				Gray *[1]*	9080GKE6						
				Orange	9080GKS6						
				Red	9080GKR6						
				Yellow *[1]*	9080GKY6						
	High Density Solderless Box Lug for #22 to #10 AWG wire. Mounts on standard 9080GH track or 35 mm DIN 3 track. Fingersafe per DIN 60529.	600 V	30 A	Natural	9080GM6	50	9080GM6B	10	51	1 **#10** 1 **#12** 1 **#14** 1–2 **#16**	1–2 **#18** 1–5 **#20** 1–8 **#22** 1–2 **#16**
				Black	9080GMB6		9080GMB6B				
				Blue *[1]*	9080GML6		9080GML6B				
				Green *[1]*	9080GMG6		9080GMG6B				
				Gray	9080GME6		9080GME6B				
				Orange *[1]*	9080GMS6		9080GMS6B				
				Red	9080GMR6		9080GMR6B				
				Yellow *[1]*	9080GMY6		9080GMY6B				
				Brown *[1]*	9080GMN6		9080GMN6B				
	Solderless Box Lug for #18 to #4 AWG wire. Mounts on standard 9080GH track or 35 mm DIN 3 track.	600 V	85 A	Natural	9080GC6	50	9080GC6B	10	28	1 **#4** 1 **#6** 1–2 **#8** 1–4 **#10**	1–5 **#12** 1–6 **#14** 1–6 **#16** 1–8 **#18**
	Solderless Box Lug for #12 to #1/0 AWG wire. Mounts on standard 9080GH track or 35 mm DIN 3 track.	600 V	170 A	Natural	9080GD6	10	9080GD6B	10	17	1 **1/0** 1 **#1** 1 **#2** 1–2 **#4**	1–3 **#6** 1–5 **#8** 1–6 **#10** 1–7 **#12**
	Solderless Box Lug for #6 AWG to 250 kcmil wire. *[5]* Mounts on standard 9080GH track or 35 mm DIN 3 track.	600 V	255 A	Natural	9080GE6	10	None Required		10	1 250 kcmil *[5]* 1 **4/0** 1 **3/0** 1 **2/0** 1 **1/0**	1 **#1** 1 **#2** 1 **#4** 1 **#6**

File: E60616 CCN: XCFR2

File: 062144 Class:3211– 07

RoHS Compliant

For standard or custom assemblies, see Terminal Block Assemblies, page 21-21.
For mounting track and accessories, see Mounting Track, End Clamps, Jumpers, Fanning Strips, page 21-22.
For DIN 3 track and end clamps, see Mounting Track and End Clamps, page 21-18.

Table 21.34: How to Order


To Order Specify	Catalog Number	
	Class	Type
• Class Number	9080	GR6
• Type Number		


[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[2] These maximum current values assume the use of insulated copper conductors with 75 °C (167 °F) temperature rating,temperature rating, and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of that wire or combination of wires (as listed in the above table) which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the number, size, insulation class, and other characteristics of the wires used. The lower of the UL and CSA ratings are shown.
[3] One end-barrier is required for each assembly of like blocks.
[4] Orders must specify standard package quantity or multiples of that quantity.
[5] Terminals are tin plated, making them suitable for use with either copper or aluminum wire.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Selection Guide

Table 21.35: Type G Selection Guide *[6]*

Description		Max. Voltage	Max. Current *[7]*	Blocks		End Barriers *[8]*		Blocks per ft.	Maximum Wire Combinations	
				Type	Std. Pack *[9]*	Type	Std. Pack *[9]*		Copper Wire (stranded or solid)	
	Self-Lifting Pressure Wire Connector for #18 to #12 AWG wire. Mounts on standard 9080GH track or 35 mm DIN 3 track.	600 V	40 A	9080GP6	50	9080GP6B	10	32	1 or 2 1 or 2 1 or 2 1 or 2	#12 #14 #16 #18
	Flat Terminal Connector for #22 to #12 AWG wire. Screws are #6-32 x 5/16 in. for ring or spade lugs, 5/16 in. wide maximum. Mounts on standard 9080GH track or 35 mm DIN 3 track. Fingersafe per DIN 60529.	600 V	40 A	9080GA6	50	9080GP6B	10	32	1 or 2 Conductors Per Screw #12–22	
	Circuit Isolating Switch *[10]* with self-lifting pressure connectors for #18 to #10 AWG wire. Mounts on standard 9080GH track or 35 mm DIN 3 track.	600 V	30 A	9080GG6 *[6]*	10	9080GF6B	10	16	1 1 1 1–4 1–4	#10 #12 #14 #16 #18
	Slip-on Connectors for #22 to #12 AWG wire. Tabs accept 0.250 x 0.032 in. slip-on connectors Mounts on standard 9080GH track or 35 mm DIN 3 track.	600 V	20 A	9080GS6	10	9080GF6B	10	16	1–2 1–2 1–2 1–2 1–2 1–2	#12 #14 #16 #18 #20 #22
	Fuse Block for 13/32 in. Dia. x 1-1•2 in. ferrule fuse with self-lifting pressure connectors. Fuse puller is included as standard. Fuses are not included. Mounts on standard 9080GH track or 35 mm DIN 3 track. Fingersafe per DIN 60529.	600 V	30 A	9080GF6	10	9080GF6B	10	16	1 1 1 1–4 1–4	#10 #12 #14 #16 #18
	Fuse Puller *[11]*	—	—	9080GH63	50	N/A		N/A	N/A	
	Blown Fuse Indicator/ Pullers are neon pilot lights which plug on to the fuse in a standard Type GF6 fuse block.	120–240 V	—	9080GLP3	10	N/A		N/A	N/A	
		277–600 V	—	9080GLP6	10	N/A		N/A		

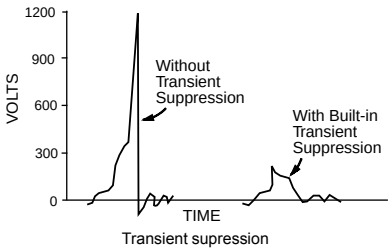

Transient supression

For standard or custom assemblies, see Terminal Block Assemblies, page 21-21.
For mounting track and accessories, see Mounting Track, End Clamps, Jumpers, Fanning Strips, page 21-22.
For DIN 3 track and end clamps, see Mounting Track and End Clamps, page 21-18.

Table 21.36: How to Order

To Order Specify	Catalog Number	
	Class	Type
• Class Number	9080	GP6
• Type Number		

Terminal Blocks:

File: E60616
CCN: XCFR2

File: 062144
Class: 3211–07

RoHS Compliant

Blown Fuse Indicator:


File: E63698
CCN: JDV5

File: 025490
Class: 3211–07

RoHS Compliant

[6] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[7] These maximum current values assume the use of insulated copper conductors with 75 °C (167 °F) temperature rating, and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of that wire or combination of wires (as listed in the above table) which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the number, size, insulation class, and other characteristics of the wires used. The lower of the UL and CSA ratings are shown.
[8] One end-barrier is required for each assembly of like sections.
[9] Orders must specify standard package quantity or multiples of that quantity.
[10] Not intended to make or break a live circuit. Power must be disconnected from the circuit before operation of the switch.
[11] Fuse puller is supplied as standard with Class 9080 Type GF6 fuse block. The 9080GH63 is a replacement fuse puller.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

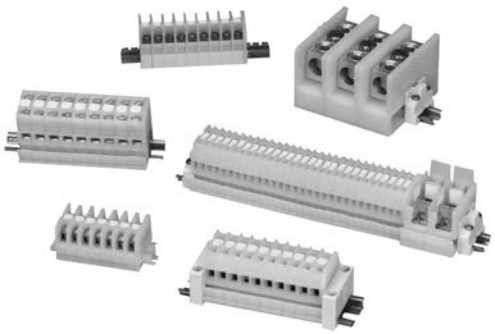

Terminal Block Assemblies

Custom Terminal Block Assemblies

Order an assembly built as required for the application. As standard, custom assemblies use 9080GH mounting track with screw on end clamps. Other options are available from the table below.

One terminal block type: The number of blocks in the assembly is added to the end of the catalog number of the desired block. Example: an assembly of **25** 9080GR6 blocks would be **9080GR625**.

More than one terminal block type in an assembly: A detailed drawing or sketch of the desired assembly must accompany the order.

Table 21.37: Custom Terminal Block Assembly Options *[12]*

Option	Suffix	Example
Substitute slip-in end clamps	**C**	9080GR625C
Substitute snap-off channel	**B**	9080GR625BC *[13]*
For direct mount assembly of 9080GK6 blocks	**D**	9080GK67D
Add a blank vinyl marking strip	**M**	9080GR625M
Add pre-marked (1–25 only) marking strip	**MPO**	9080GR625MPO
Mount on 35 mm DIN 3 track instead of 9080GH track	**T**	9080GR625T

Table 21.38: How to Order

To Order Specify	Catalog Number	
• Class Number	Class	Type
• Type Number	9080	GA612

[12] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

[13] The 9080GH10 screw-on end clamp is **not** recommended for use with snap-off channel. It is recommended that the 9080GH11 slip-in end clamp be used. Therefore, when the suffix **B** is used, it should be followed by the suffix **C**.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Mounting Track, End Clamps, Jumpers, Fanning Strips



GH1 Standard Track



GH2 Snap-Off Track



GH3 High Rise

Table 21.39: 3/4 in. Mounting Track *[14]*

Style	Length (in.)	Type	Std. Pack *[15]*
Standard Track	3	9080GH103	5
	4	9080GH104	5
	5	9080GH105	5
	6	9080GH106	5
	7	9080GH107	5
	8	9080GH108	5
	9	9080GH109	5
	10	9080GH110	5
	12	9080GH112	5
	13	9080GH113	5
	14	9080GH114	5
	15	9080GH115	5
	16	9080GH116	5
	18	9080GH118	5
	24	9080GH124	5
	36	9080GH136	5
	48	9080GH148	5
	72	9080GH172	5
Snap-Off Track	36	9080GH236	20
	48	9080GH248	20
	72	9080GH272	20
High Rise	36	9080GH336	2

NOTE: For additional track and appropriate end clamps, see Mounting Track and End Clamps, page 21-18.

Table 21.40: End Clamps, Jumpers, and Fanning Strips *[14]*

Description		Type	Std. Pack *[15]*
End Clamps			
	Screw-on End Clamp (Not recommended for use on snap-off mounting track)	9080GH10	50
	(Discontinued) Slip-in End Clamp (Not for use with 9080 GE6, GK6 blocks)	9080GH11	50
Jumpers			
	(Discontinued) 2-pole jumper for GM6	9080GH700	20
	6-pole jumper for GM6	9080GH710	10
	6-pole jumper for GK6, GR6	9080GH73	10
	2-pole jumper for GC6	9080GH74	10
	6-pole jumper for GC6	9080GH75	10
	2-pole jumper for GD6	9080GH76	10
	2-pole jumper for GA6, GP6	9080GH78	10
	(Discontinued) 6-pole jumper for GA6, GP6	9080GH79	10
Fanning Strips			
	(Discontinued) Snap-together fanning strip section for GK6, GR6 blocks	9080GH52	10

[14] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[15] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Marking Accessories

Table 21.41: Marking and Additional Accessories *[16]*

Description		Type	Std. Pack *[17]*
	25 ft blank vinyl marking strip	9080GH220	1
Vinyl marking strip numbered 1-25 	For GK6, GR6	9080GH21	5
	For GA6, GP6	9080GH22	5
	For GM6	9080GH230	5
	Blank pin-feed marking tabs—6 x 20 (total 120) marking tabs for GD6, GR6, and GT6 blocks	9080GH200	20
	Pre-marked 01 to 50 (2 sets) plus 20 various marking tabs (total 120 marking tabs) for GD6, GR6, and GT6 blocks	9080GH210	5
	Marking strip end plug for GK6, GR6, GM6, GA6, GP6, GC6, GD6, GE6, and GT6 blocks	9080GH60	50
	Transition barrier between GK6 and all other G blocks	9080GH61	50
	Cover for GR6 or GR6T blocks	9080GH62	50
	(Discontinued) Angle bracket kit—for mounting 9080GH or MH track to panel at 45° angle. Includes 2 brackets and hardware for mounting the track to the brackets	9080MH82	1

Table 21.42: How to Order

To Order Specify	Catalog Number	
	Class	Type
• Class Number • Type Number	9080 (prefix)	GH10

[16] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[17] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026



GCB100

GCB Thermal-Magnetic Circuit Protectors

Table 21.43: 9080GCB Thermal-Magnetic Circuit Protectors *[1]*

Maximum Current *[2]*	Internal Resistance Ω	Maximum Voltage	Catalog Number
0.1	133	250 Vac 65 Vdc	9080GCB01
0.5	6.6		9080GCB05
0.8	2.55		9080GCB08
1.0	1.97		9080GCB10
1.2	1.22		9080GCB12
1.5	0.86		9080GCB15
2.0	0.49		9080GCB20
2.5	0.31		9080GCB25
3.0	0.20		9080GCB30
4.0	0.10		9080GCB40
5.0	0.08		9080GCB50
7.0	0.03		9080GCB70
10.0	<0.02	125 Vac 65 Vdc	9080GCB100
15.0	<0.02		9080GCB150

Table 21.44: Inrush Ratio Correction Table

NOTE: For resistive loads, use inrush correction factor of 1.0.

Inrush Ratio	1:1 to 1:4	1:5	1:6	1:7	1:8
Factor	1.3	1.4	1.5	1.6	1.7

Table 21.45: Ambient Temperature Correction Table

Ambient Temperature	70 °F (21.1 °C)	100 °F (37.8 °C)	120 °F (48.9 °C)	140 °F (60 °C)	160 °F (71.1 °C)	180 °F (82.2 °C)	200 °F (93.3 °C)
Factor	1.0	1.1	1.2	1.3	1.4	1.5	1.6

Table 21.46: Tripping Times in Seconds at 70 °F (21.1 °C)

NOTE: When several protectors are channel mounted adjacent to each other, the "no trip" current will be 80% of rated current at 70 °F.

Percent Rated Current	100%	200%	300%	400%	500%	600%	1000%	2000% and greater
Tripping Time (s)	no trip	10–40	38	1.5–9	0.8–6	0.003–4	0.003–2	Max. 0.02

Selection

To properly select a Class 9080 Type GCB circuit protector, follow these steps:

- Determine the inrush correction factor from Table 21.44.
- Determine the temperature correction factor from Table 21.45.
- Determine the sealed current of the load that is being protected.
- Multiply the sealed current by the two correction factors and choose the closest circuit protector.

NOTE: Choosing a circuit protector with a value lower than the calculated value might cause nuisance tripping, while choosing the larger might provide a protector that will not properly protect the load .

File: E233026
CCN:QVNU2

File: 025490
Class: 3211–07

Example: Solenoid with sealed current of 0.75 A, an inrush ratio of 1:6, and in an ambient temperature of 85ºF: 0.75 x 1.5 x 1.05 = 1.18. Choose the 1.2 A protector.

Tripping Time: Tripping time of the circuit protector is determined from Table 21.46. Divide the circuit protector value by the temperature correction factor from Table 21.45 to determine actual rated current referenced in Table 21.46.

Table 21.47: How to Order

To Order Specify	Catalog Number	
	Class	Type
• Class Number	9080	GH10
• Type Number		

[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

[2] These maximum current values assume the use of insulated copper conductors with 167 ºF (75 ºC) temperature rating and are calculated based on NEC Article 310, Table 310-16. In most cases this value is the maximum ampacity of the wire which has the greatest current carrying capacity. The actual allowable current for a particular application depends on the size, insulation class, and other characteristics of the wire used. The UL ratings are shown. The CSA rating may be higher or lower. Refer to the catalog for CSA ratings.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

GB2 Thermal-Magnetic Circuit Protectors



1-Pole GB2CB




Table 21.48: GB2CB One Pole Thermal-Magnetic Circuit Protectors *[1]*

Description	Max. Voltage	Thermal Rating	Catalog Number *[2]*
One pole Thermal Magnetic Circuit Protector	300 Vac	0.5 A	GB2CB05
		1 A	GB2CB06
		2 A	GB2CB07
		3 A	GB2CB08
		4 A	GB2CB09
		5 A	GB2CB10
		6 A	GB2CB12
		8 A	GB2CB14
		10 A	GB2CB16
		12 A	GB2CB20

File: 081630
Class: 3215–30

IEC 157-1
VDE 0660



2-Pole GB2CD




Table 21.49: GB2CD Two Pole Thermal-Magnetic Circuit Protectors *[1]*

Description	Max. Voltage	Thermal Rating	Catalog Number *[2]*
Two pole Thermal Magnetic Circuit Protector	300 Vac	0.5 A	GB2CD05
		1 A	GB2CD06
		2 A	GB2CD07
		3 A	GB2CD08
		4 A	GB2CD09
		5 A	GB2CD10
		6 A	GB2CD12
		8 A	GB2CD14
		10 A	GB2CD16
		12 A	GB2CD20

File: 081630
Class: 3215–30

IEC 157-1
VDE 0660

[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[2] Must order in multiples of 6.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Enclosed Power Distribution Blocks

- Finger safe from the front, for isolation of live parts
- Up to 760 A, to meet a wide range of application needs
- Short-Circuit Current Rating up to 100 kA with fuses, not limited by the 10 kA default
- Panel or 35 mm DIN rail mount, for application flexibility
- Gangable to create multipole configurations
- Flexible stranded wire compliant, expands usability
- The UL Listed blocks meet feeder circuit spacing requirements.
- For the short-circuit current ratings, wire classes, tightening torques, dimensions, and more, see catalog 9080CT9603.



NSYEBAD11614



NSYEBAP13618

Table 21.50: Power Distribution Blocks with AL Lugs (accepts CU or AL conductors) *[1]*

Wire Range		Mounting	Current Rating	Type
Line Side	Load Side			
CU (1) 14–2 AWG (2.5–35 mm²)	CU (4) 14–10 AWG (2.5–6 mm²)	35 mm DIN rail or panel mount	CU 115A	NSYEBAD11614
CU (1) 14 AWG–3/0 (2.5–70 mm²) AL (1) 6 AWG–3/0	CU (1) 14 AWG–3/0 (2.5–70 mm²) AL (1) 6 AWG–3/0	Panel mount	CU 200 A AL 155 A	NSYEBAP12611
CU (1) 14 AWG–3/0 (2.5–70 mm²) AL (1) 6 AWG–3/0	CU (4) 14–2 AWG (2.5–35 mm²) AL (4) 6–2 AWG	35 mm DIN rail	CU 200 A AL 155 A	NSYEBAD12614
CU (1) 14 AWG–3/0 (2.5–70 mm²) AL (1) 6 AWG–3/0	CU (4) 14–2 AWG (2.5–35 mm²) AL (4) 6–2 AWG	Panel mount	CU 200 A AL 155 A	NSYEBAP12614
CU (1) 6 AWG–400 kcmil (16–185 mm²) CU (1) 14 AWG–3/0 (2.5–70 mm²) AL (1) 6 AWG–400 kcmil AL (1) 6 AWG–3/0	CU (8) 14–2 AWG (2.5–35 mm²) AL (8) 6–2 AWG	35 mm DIN rail	CU 335 A AL 270 A	NSYEBAD13618
CU (1) 6 AWG–400 kcmil (16–185 mm²) CU (1) 14 AWG–3/0 (2.5–70 mm²) AL (1) 6 AWG–400 kcmil AL (1) 6 AWG–3/0	CU (8) 14–2 AWG (2.5–35 mm²) AL (8) 6–2 AWG	Panel mount	CU 335 A AL 270 A	NSYEBAP13618
CU (2) 6 AWG–250 kcmil (16–120 mm²) AL (2) 6 AWG–250 kcmil	CU (2) 6 AWG–250 kcmil (16–120 mm²) AL (2) 6 AWG–250 kcmil	Panel mount	CU 510 A AL 410 A	NSYEBAP25622
CU (2) 4 AWG–500 kcmil (25–240 mm²) AL (2) 4 AWG–500 kcmil	CU (8) 14 AWG–2/0 (2.5–50 mm²) AL (8) 6 AWG–2/0 kcmil	Panel mount	CU 760 A AL 620 A	NSYEBAP27628



NSYEBCD12614

Table 21.51: Power Distribution Blocks with CU Lugs (accepts only CU conductors)

Wire Range		Mounting	Current Rating	Type
Line Side	Load Side			
CU (1) 14 AWG–3/0 (2.5–70 mm²)	CU (4) 14–2 AWG (2.5–35 mm²)	35 mm DIN rail	CU 200 A	NSYEBCD12614
CU (1) 14 AWG–3/0 (2.5–70 mm²)	CU (4) 14–2 AWG (2.5–35 mm²)	Panel mount	CU 200 A	NSYEBCP12614
CU (1) 6 AWG–400 kcmil (16–185 mm²) CU (1) 14 AWG–3/0 (2.5–70 mm²)	CU (8) 14–2 AWG (2.5–35 mm²)	Panel mount	CU 335 A	NSYEBCP13618
CU (2) 6 AWG–250 kcmil (16–120 mm²)	CU (2) 6 AWG–250 kcmil (16–120 mm²)	Panel mount	CU 510 A	NSYEBCP25622
CU (2) 4 AWG–500 kcmil (25–240 mm²)	CU (8) 14 AWG–2/0 (2.5–50 mm²)	Panel mount	CU 760 A	NSYEBCP27628



NSYEBP2

Table 21.52: Terminal Plugs (for plugging unused openings)

Plug Size	For use with	Type
2 AWG	NSYEB**13618	NSYEBP2
2/0 AWG	NSYEB**13618, NSYEB**27628	NSYEBP20
250 kcmil	NSYEB**25622	NSYEBP250
400 kcmil	NSYEB**13618	NSYEBP400
500 kcmil	NSYEBAP27622, NSYEB**27628	NSYEBP500

UL E323110 QPQS All except NSYEB***13618 and NSYEB***25622

File: 70361 Class: 6228-01

RoHS Compliant

UL E60616 XCFR2 NSYEB***13618 NSYEB***25622

CE Marked

UL 94V-0 flammability rating

[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026



9080LBA365212L




9080LBA161104



9080LBC365212L



9080LBC263206L



LB22 Plastic Cover

LB Open Power Distribution Blocks

Table 21.53: Aluminum Power Distribution Blocks *[2]*

Lug Wire Range *[3]*		Aluminum *[4]*		
Main	Branch	One Pole Type	Two Pole Type	Three Pole Type
(1) #14–2/0	(1) #14–2/0	9080LBA162101L	9080LBA262101L	9080LBA362101L
(1) #6–350 kcmil	(1) #6–350 kcmil	9080LBA163101L	9080LBA263101L	9080LBA363101L
(1) #2–600 kcmil	(1) #4–600 kcmil	9080LBA164101L	N/A	9080LBA364101L
(2) #4–350 kcmil	(2) #4–350 kcmil	9080LBA165202L	9080LBA265202L	9080LBA365202L
(2) #4–500 kcmil	(2) #4–500 kcmil	9080LBA1652021L	9080LBA2652021L	9080LBA3652021L
(1) #14–2/0	(4) #14–4	9080LBA162104L	9080LBA262104L	9080LBA362104L
(1) #14–2/0	(6) #14–4	N/A	N/A	9080LBA362106L
(1) #4–500 kcmil	(6) #14–2	9080LBA163106L	9080LBA263106L	9080LBA363106L
(1) #2–600 kcmil	(8) #14–2	9080LBA164108L	9080LBA264108L	9080LBA364108L
(1) #4–500 kcmil	(6) #14–2/0	9080LBA165106L	9080LBA265106L	9080LBA365106L
(1) #4–500 kcmil	(12) #14–2	9080LBA165112L	9080LBA265112L	9080LBA365112L
(2) #14–2/0	(6) #14–4	9080LBA163206L	9080LBA263206L	9080LBA363206L
(2) #4–500 kcmil	(8) #14–2/0	9080LBA165208L	9080LBA265208L	9080LBA365208L
(2) #4–500 kcmil	(12) #14–4	9080LBA165212L	9080LBA265212L	9080LBA365212L

Table 21.54: Miniature Aluminum Power Distribution Blocks *[2]*

Lug Wire Range *[3]*		Aluminum *[4]*		
Main	Branch	One Pole Type	Two Pole Type	Three Pole Type
(1) #14–2	(1) #14–2	9080LBA161101	N/A	9080LBA361101
(1) #14–2	(4) #18–10	9080LBA161104	9080LBA261104	9080LBA361104

Table 21.55: Copper Power Distribution Blocks *[2]*

Lug Wire Range *[3]*		Copper *[5]*		
Main	Branch	One Pole Type	Two Pole Type	Three Pole Type
(1) #14–2/0	(1) #14–2/0	9080LBC162101L	N/A	9080LBC362101L
(1) #6–350 kcmil	(1) #6–350 kcmil	9080LBC163101L	N/A	9080LBC363101L
(1) #14–2/0	(4) #14–4	9080LBC162104L	9080LBC262104L	9080LBC362104L
(1) #4–500 kcmil	(6) #14–2	9080LBC163106L	9080LBC263106L	9080LBC363106L
(2) #14–2/0	(6) #14–4	9080LBC163206L	9080LBC263206L	9080LBC363206L
(2) #4–500 kcmil	(8) #14–2/0	9080LBC165208L	N/A	9080LBC365208L
(2) #4–500 kcmil	(12) #14–2	9080LBC165212L	N/A	9080LBC365212L

File: E60616
CCN: XCFR2

File: 70361
Class: 6228-01

RoHS Compliant

Table 21.56: Plastic Covers (0.045 in. thick) *[2]*

For LBA Type*[6]*	Type	Dim. A	Dim. B
LBA161...	9080LB11	0.824	2.31
LBA261...	9080LB12	1.459	2.31
LBA361	9080LB13	2.094	2.31
LBA162..., LBC162	9080LB21L	1.062	2.750
LBA262..., LBC262	9080LB22L	1.875	2.750
LBA362..., LBC362 *[7]*	9080LB23L	2.688	2.750
LBA163..., LBC163	9080LB31L	1.782	3.813
LBA263..., LBC263	9080LB32	3.313	3.813
LBA363.... LBC363	9080LB33L	4.844	3.813
LBA164...	9080LB41	2.125	4.563
LBA264...	9080LB42	4.000	4.563
LBA364...	9080LB43	5.875	4.563
LBA165..., LBC165	9080LB51L	2.719	5.313
LBA265..., LBC265	9080LB52L	5.656	5.313
LBA365..., LBC365	9080LB53L	8.375	5.313

Table 21.57: How to Order

To Order Specify	Catalog Number
• Class Number (prefix)	9080
• Type Number	LBA162101

Application Information

Voltage Rating-Class B and C–600 V

Blocks are rated based on NEC Table 310-16 using 167 °F (75 °C) wire

Aluminum blocks are tin-plated high conductive aluminum. Copper blocks are tin-plated high conductive copper.

Housing material:

- Miniature Blocks are made from high impact thermoplastic rated at 257 °F (125 °C) max. and –40 °F (–40 °C) min.
- Full Size Blocks are made from general purpose phenolic rated at 302 °F (150 °C) max. and –40 °F (-40 °C) min.

All blocks have a flammability rating of UL 94V-0.

For the short-circuit current ratings and dimensions, see catalog **9080CT9603**.

[2] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[3] Lugs suitable for use with 75 °C (167 °F) conductors.
[4] Aluminum blocks will accept either aluminum or copper conductors.
[5] Copper blocks will accept copper conductors only.
[6] These covers must be ordered in multiples of 5. Each cover comes with two self-tapping screws.
[7] Will not work on a 9080LBA362106 block.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026



FB3211



FB3211R

Application Information *[1]*

Clip material:

- All 30 and 60 A fuse clips are copper alloy tin plated.
- All 100 and 200 A fuse clips are one piece aluminum with copper spring tin plated.
- All Class H, R and J fuses are standard with reinforced fuse clips.

Lug termination:

- All 30 A blocks have pressure wire connectors.
- All 60, 100 and 200 A blocks have box lug connectors.

Fuseholders and Track Adapter

Table 21.58: 250 V—Classes H and R *[1]*

Rating (A) *[2]*	No. of Poles	Class H Type	Class R *[3][4]* Type	Lug Wire Range
30*[5]*	1	9080FB1211	9080FB1211R	#14–10 Cu
	2	9080FB2211	9080FB2211R	
	3	9080FB3211	9080FB3211R	
60*[5]*	1		9080FB1221R	#14–2 Cu or Al
	2		9080FB2221R	

Table 21.59: 600 V—Classes H and R *[1]*

Rating (A) *[2]*	No. of Poles	Class H Type	Class R *[3][4]* Type	Lug Wire Range
30*[6]*	1	9080FB1611		#14–10 Cu
	2	9080FB2611		
	3	9080FB3611	9080FB3611R	
60*[6]*	1		9080FB1621R	#14–2 Cu or Al
	3		9080FB3621R	
100*[6]*	3		9080FB3631R	#6–2/0 Cu or Al

Table 21.60: 600 V Series—Miniature Fuse Dimension (13/32 x 1-1/2 in.) *[1]*

Rating (A) *[2]*	No. of Poles	Type M Type	Class CC *[3][4]* Type	Lug Wire Range
30*[5]*	1	9080FB1611M	9080FB1611CC	#14–10 Cu
	2	9080FB2611M	9080FB2611CC	
	3	9080FB3611M	9080FB3611CC	

Table 21.61: 600 V—Class H Only (Copper Only) *[1]*

Rating (A) *[2]*	No. of Poles	Class H Type	Lug Wire Range
30*[6]*	1	9080FB1611	#14–10 Cu
	2	9080FB2611	
	3	9080FB3611	
100*[6]*	3	9080FB3631C	#6–2/0 Cu

Table 21.62: 600 V—Class J *[1]*

Rating (A) *[2]*	No. of Poles	Class J *[3]* Type	Lug Wire Range
30*[6]*	2	9080FB2611J	#2–14 AWG Cu—Al
	3	9080FB3611J	
	3	9080FB3621J	

Table 21.63: Track Adapter *[1]*

Description		Type	Std. Pack *[7]*
	35 mm DIN 3 Track Adapter For 9080 FB*211, FB*211R, FB*611M, and FB*611CC Fuseholders	9080FBDIN3	100

Table 21.64: Fuse Sizes—(Diameter x Length)

A	Class of Fuse			
	Class H/R— 300 V	Class H/R— 600 V	Class M/CC— 600 V	Class J— 600 V
30	9/16 x 2 in.	13/16 x 5 in.	13/32 x 1-1/2 in.	13/16 x 2-1/4 in.
60	13/16 x 3 in.	1-1/16 x 5-1/2 in.	N/A	1-1/16 x 2-3/8 in.
100	1 x 7-7/8 in.	1 x 7-7/8 in.	N/A	N/A
200	1-1/2 x 7-1/8 in.	1-3/4 x 9-5/8 in.	N/A	N/A

	File: E40747 CCN: IZLT2	Type M fuseholders
	File: E40747 CCN: IZLT	Types H, R, J, and CC
	File: 70360 Class: 6225–01	

Flammability rating of all FB fuse blocks is UL 94V-0. RoHS Compliant

Table 21.65: How to Order

To Order Specify	Catalog Number
• Class Number	9080
• Type Number	FB1211

[1] Some products may be discontinued. Refer to www.se.com/us for the most current product information.
[2] Specified wire ranges are based on 167 °F (75 °C) wire. Wires with temperature ratings other than 167 °F (75 °C) are approved while observing NEC Article 310 wire tables for allowable ampacities of insulated conductors.
[3] Class R, J and CC fuse blocks are tested and approved for 200,000 AIC in accordance with UL 512.
[4] Class R and CC fuseholders accept current limiting Class R & CC fuses only.
[5] Base is high impact thermoplastic—maximum operating temperature 257 °F (125 °C).
[6] Base is general purpose phenolic—maximum operating temperature 302 °F (150 °C).
[7] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026



DFCC1



DFCC2V

Modular Fuseholders

Table 21.66: Modular Fuse Holders, TeSys DF *[1]*

Rated Thermal Current	Type of Fuse	Composition	Blown Fuse Indicator	Standard Pack Quantity	Catalog Number
30 A	Class CC	1 Pole	No	1 Pole	DFCC1
			Yes		DFCC1V
		2 Pole	No	2 Pole	DFCC2
			Yes		DFCC2V
		3 Pole	No	3 Pole	DFCC3
			Yes		DFCC3V

File: E310269, CCN: IZLT

Also see **TeSys DF and LS1 Fuse Carriers** on www.se.com/us

[1] For additional fuse holders and information, refer to Catalog **9080CT0801**.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

With and Without Marking Flags, Dual Wire

Conform to NF C 63-023 Standard **Mark and terminate wires simultaneously**	Strip the wire, insert it into the cable end and crimp it. Up to 7 markers can be used.





DZ5CE005




Table 21.67: Without Marking Flag

Wire Size		Sleeve color	Dimensions (mm)				Catalog Number [1][2]	Std. Pack [3]
AWG	mm²		A	B	C	D		
26	0.25	Yellow	11	6.2	1.2	2.2	DZ5CE002L6	1000
			13	8.2			DZ5CE002	
24	0.34	Green	11	6.2			DZ5CE003L6	
			13	8.2			DZ5CE003	
22	0.50	White	11	6.2	1.4	3	DZ5CE005L6[4]	
			13	8.2			**DZ5CE005**[4]	
			16.8	12			DZ5CE005L12	
20	0.75	Blue	11	6.2	1.6	3.1	DZ5CE007L6[4]	
			13	8.2			**DZ5CE007**[4]	
18	1.00	Red	11.5	6.2	1.8	3.4	DZ5CE010L6[4]	
			13.5	8.2			**DZ5CE010**[4]	
			16.8	12			DZ5CE010L12	
16	1.50	Black	11.5	6.2	2.1	4	DZ5CE015L6[4]	
			13.5	8.2			**DZ5CE015**[4]	
			22.8	17.7			DZ5CE0153[4]	
14	2.00	Yellow	14.5	8.2	2.35	4.2	**DZ5CE020**	
14	2.50	Gray	14.5	8.2	2.7	4.6	**DZ5CE025**[4]	
			24	17.7			DZ5CE0253[4]	
12	4.00	Orange	17.3	9.8	3.3	5.5	**DZ5CE042**[4]	
			25.5	17.5			DZ5CE043[4]	
10	6.00	Green	20	11.5	3.95	7	DZ5CE062	100
			26	17.5			DZ5CE063	



DZ5CA007 (Blue)




Table 21.68: With Marking Flag

26	0.25	Yellow	13	8.2	1.2	2.2	DZ5CA002	1000
24	0.34	Green					DZ5CA003	
22	0.50	White			1.4	3	DZ5CA005[4]	
20	0.75	Blue			1.6	3.1	DZ5CA007[4]	
18	1.00	Red	13.5		1.8	3.4	DZ5CA010[4]	
16	1.50	Black			2.1	4	**DZ5CA015**[4]	
14	2.50	Gray	14.5		2.7	4.6	DZ5CA025[4]	



DZ5CA042




Table 21.69: Marking Flag Optional [5]

12	4.00	Orange	19.5	11.5	3.3	5.5	**DZ5CA042**[4]	1000
			25.5	17.5	3.3	5.5	DZ5CA043[4]	
10	6.00	Green	20	11.5	3.95	7	DZ5CA062	100
			26	17.5	3.95	7	**DZ5CA063**	
8	10.00	Brown	21.5	12	4.95	8.4	**DZ5CA102**	
			27	17.5	4.95	8.4	DZ5CA103	
6	16.00	White	23.5	12	6.35	9.8	**DZ5CA162**	
			29	17.5	6.35	9.8	**DZ5CA163**	
4	25.00	Black	30	17.5	8.15	12	**DZ5CA253**	
2	35.00	Red	30	16	9	13.5	DZ5CA352	20
			39	25	9	13.5	DZ5CA353	
0	50.00	Blue	36	20	11	15.7	DZ5CA502	
			41	25	11	15.7	DZ5CA503	



AZ5DE010





Table 21.70: Dual Wire Cable Ends

			A	B	C	D	E		
22	0.50	White	13	8	1.4	2.5	4.7	AZ5DE005	500
20	0.75	Blue			1.6	2.8	5.0	AZ5DE007	
18	1.00	Red	13.5		1.8	3.4	5.4	AZ5DE010	
16	1.50	Black			2.1	3.6	6.6	AZ5DE015	
14	2.50	Gray	24	10	2.7	4.2	7.8	AZ5DE025	250


RoHS Compliant

[1] **Bold faced** catalog numbers are stocked in the United States.
[2] CE Marked.
[3] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.
[4] These catalog numbers are UL Component Recognized (File E164872 CCN ZMMT2) provided the AT1PA crimping tool is used to crimp the cable end.
[5] Will accept an AR1SC03 cable marker.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026



AR1SC02



AR1SC03



AR1MB01

Cable End Markers and Tools

Table 21.71: Cable End Markers & Accessories

Style	Catalog Number	Std. Pack *[6]*
Adjustable collar type marker holder for #14 to #2 wire	AR1SC01	100
Clip-on marker holder for #18 to #16 wire (7 markers max.)	AR1SC02	
Cable end marker tags for DZ5CA042 to DZ5CA253	AR1SC03	
Card of 200 yellow markers with black numeral 0 thru 9	AR1MA01*[7]*	1
Card of 200 yellow markers with black letters A thru Z	AR1MB01 *[7]*	1
Card of 200 black markers with a white 0 marked on them	AR1MC010	200
Card of 200 brown markers with a white 1 marked on them	AR1MC011	200
Card of 200 red markers with a black 2 marked on them	AR1MC012	200
Card of 200 orange markers with a black 3 marked on them	AR1MC013	200
Card of 200 yellow markers with a black 4 marked on them	AR1MC014	200
Card of 200 green markers with a black 5 marked on them	AR1MC015	200
Card of 200 blue markers with a black 6 marked on them	AR1MC016	200
Card of 200 violet markers with a black 7 marked on them	AR1MC017	200
Card of 200 gray markers with a black 8 marked on them	AR1MC018	200
Card of 200 white markers with a black 9 marked on them	AR1MC019	200
Card of 200 blank yellow markers	AR1MA0196	1
Card of 200 blank green markers	AR1MA0197	1
Card of 200 yellow markers with a black + marked on them	AR1MA0198	1
Card of 200 yellow markers with a black—marked on them	AR1MA0199	1
Complete set of numeral markers 0 thru 9, plus one card each of the "+" "-", yellow blanks, and green blanks/one AT1PA1 positioning tool. Each kit has 200 of each item.	AR1MA01	1
Complete set of letter markers A thru Z, plus one card each of the "+" "-", yellow blanks, and green blanks/one AT1PA1 positioning tool. Each kit has 200 of each item.	AR1MB01	1

Table 21.72: Cable End Tools

Description	Catalog Number
Cable end marker positioning tool	AT1PA1
Automatic stripping and cutting tool for 0.8 mm to 4 mm cable, adjustable stripping length	AT1PA7
Crimping tool for cable ends 0.5 mm^2 to 16 mm^2	AT1PA2
Crimping tool for cable ends 10 mm^2 to 35 mm^2	AT1PA4
Organizing case for cable ends—holds stripping tool and cable ends (not supplied)	AT1HB2



AT1PA1



AT1PA2



AT1PA4



AT1PA7

[6] Orders must specify the standard package quantity (Std. Pack) or multiples of that quantity.
[7] Complete the catalog number by adding the number or letter desired.
Examples: AR1 MA015 is a card of 200 yellow markers with a black 5 marked on them.
R1 MB01T is a card of 200 yellow markers with a black T marked on them.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026



Telefast ABE 7 Pre-Wired Sub-Bases

Telefast is a substitution of traditional screw terminal blocks for a fast connection of high-density I/O modules to operative parts. It offers protection, distribution, visualization, and adaptation of the signals.

Features:

- A selection of most used and qualified Telefast sub-bases for rapid connection of I/O modules (discrete, analog, and counter) to sensors or actuator
- A substitute for the terminal block, remotely locating and partly eliminating the single-wire connection
- Provide relay and connection functions, with or without polarity distribution, reduce wiring time, and eliminate the risk of error Functions
- Adapting I/O current/voltage for PLCs
- Distributing signals, commons (24 or 0V) and earth for connecting 1/2/3 wire signals
- Channel isolation, protection, and LED diagnostics
- Various relay contact combinations 1N/O, 1C/O, 2C/O
- Prewiring cabinets
- Easy wiring suitable for PLC high-density I/O modules

Visit **Telefast ABE 7** on www.se.com/us for the latest product information.

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

© 2026 Schneider Electric
All Rights Reserved
3/11/2026

Section 22
Machine Safety Products

Machine Safety 22-2

Harmony XPS 22-2
Harmony XPS Safety Modules 22-2
Modicon MCM 22-2
MCM Safety Controllers 22-2



Harmony XPS Safety Modules



Modicon MCM Safety Controllers

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Harmony XPS Safety Modules

Refer to Catalog **DIA3ED2181204EN** and **Harmony XPS Safety Modules** online for available products, a complete list of product documents, and quick access to the Harmony XPS Safety Modules product selector.

Harmony XPS Basic

Harmony XPS Basic offers the most optimized solution for applications with hardwired safety modules.

Harmony XPS Universal

Harmony XPS Universal combines the simplicity of application of hardwired safety modules with a diversity of messages where previously more complex and expensive fieldbus technology was required.

Each product has a uniquely numbered sealing strip used to seal the transparent front cover flap.

Features:

- 22.5 and 45 mm width.
- 2 rows of terminals both on the top and bottom side (screw or spring removable terminals)
- Transparent sealable lid in the front face, to protect the selector switches from manipulation.
- Side connection for extension unit requires no external wiring except in XPSB, XPSUAB & XPSUEP.
- IP40 housing, IP20 terminals.
- DIN-rail & direct wall mounting possibility
- Time delay selection available in front face from 0 to 900s
- Fully market coverage with only two supply variants: 24 Vac/dc & wide range power supply from 48…240 Vac/dc.



MCM Safety Controllers

Refer to Catalog **DIA3ED2140901EN** and **Modicon MCM Safety Controllers** online for available products and a complete list of product documents.

Industrial Edge control for IIoT

Modicon IIoT-native edge controllers manage complex interfaces across assets and devices or directly into the cloud, with embedded safety and cybersecurity. Modicon provides performance and scalability for a wide range of industrial applications up to high performance multi-axis machines and high-available redundant processes.

Visit www.se.com/us for the latest information on **Safety Controllers and Modules** products.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Section 23

Automation Products



Modicon Zelio Logic Controller



Modicon M221



Modicon M262



Modicon M241 PLC



Modicon M340 PAC



Lexium 28 Servo Solution



Harmony ST6 HMI



Lexium Cobot (Collaborative Robot)



Modicon M173

Programmable Controllers 23-2

- Zelio Logic Smart Relays 23-2
- Modicon PLCs 23-2
  - Modicon™ M221 PLC 23-2
  - Modicon™ M241 PLC 23-2
  - Modicon™ M251 PLC 23-3
  - Modicon™ M258 PLC 23-3
  - Modicon™ M262 Logic/Motion Controller 23-4
  - Modicon™ Momentum™ PLC 23-4
- PLC and PAC Software 23-5
- Modicon PACs 23-6
  - Modicon™ M340 PAC 23-6
  - Modicon™ M580 ePAC 23-6

HMI Products 23-7

- Harmony™ Small Panels 23-7
  - Harmony ST6 Basic HMI 23-7
  - Harmony™ STO Small Touchscreen HMI 23-8
  - Harmony™ STU Small Touchscreen HMI 23-8
  - Harmony™ SCU Small HMI Controllers 23-8
- Harmony™ Advanced Panels 23-9
- Harmony™ Universal Panels 23-10
- Accessories for HMI Products 23-12
- Harmony™ Industrial PC Products 23-13
  - Harmony P6 Modular Box PCs and Displays 23-13
  - Harmony™ Edge Box 23-14

Software for HMI Products 23-15

- EcoStruxure™ HMI Configuration Software 23-15
  - EcoStruxure™ Machine SCADA Expert 23-15
  - EcoStruxure™ Operator Terminal Expert 23-15
  - EcoStruxure™ Secure Connect Advisor 23-15

Distributed I/O Products 23-16

- Modicon™ TM3 Bus Coupler Modules 23-16
- Modicon™ STB Distributed I/O Platform 23-16
- Modicon™ Telefast™ ABE7 23-16
- Modicon™ I/O Blocks (IP67) 23-16
- Modicon™ Momentum™ Controller and IP20 Monoblock I/Os 23-17

Network Products and Systems 23-18

- Ethernet TCP/IP 23-18
- CANopen 23-18

Motion Control and Robotics 23-19

- Lexium™ Linear Motion 23-19
- Lexium™ Integrated Drives 23-20
- Lexium™ Servo Drives and Motors 23-21
- Motion and Drive Controllers 23-22
- Multi Carrier Systems and Stepper Drives 23-23

Controllers (PLC) for Commercial Machines 23-24

- Modicon M171/M172/M173 HVAC Solutions 23-24

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Zelio Logic Smart Relays

For applications that require more flexibility than a simple relay, timer or counter, but are too simple for the smallest Nano PLC, Zelio Logic smart relays are available. Designed to accept and control outputs just like a relay, Zelio Logic features logic programming with Function Block Diagram (FBD) or Ladder Logic Programming using either the front panel or by utilizing ZelioSoft software. For more information, refer to www.se.com/us/en Zelio Logic or catalog DIA3ED2111202EN.

Catalog Number	Description	Inputs	Outputs	Supply Volts
SR2A101FU	SR2 with Display	6 Digital	4 Relay	120 Vac
SR2B121BD	SR2 with Display	8 Digital, 4 Analog	4 Relay	24 Vdc
SR2B121FU	SR2 with Display	8 Digital	4 Relay	120 Vac
SR2D101FU	SR2 without Display	6 Digital	4 Relay	120 Vac
SR3B101BD	SR3 with Display	6 Digital, 4 Analog	4 Relay	24 Vdc
SR3B101FU	SR3 with Display	6 Digital	4 Relay	120 Vac
SR3B261BD	SR3 with Display	16 Digital, 6 Analog	10 Relay	24 Vdc
SR3B261FU	SR3 with Display	16 Digital	10 Relay	120 Vac
SR3XT101FU	SR3 Expansion	6 Digital	4 Relay	—
SR3XT61FU	SR3 Expansion	4 Digital	2 Relay	—

Catalog Number	Description
SR2MEM02	Memory Cartridge
SR2USB01	USB Programming Cable



TM221ME16T



TM221CE16R

Modicon™ M221 PLC

Providing “Best in Class” performance for compact machine automation, the Modicon M221 PLC features intuitive machine programming using **EcoStruxure™ Machine Expert Basic Software** (formerly SoMachine), ready-to-use applications and standard function blocks. Its flexible and scalable machine control allows you to easily upgrade to higher performance platforms when necessary. With Ethernet, USB and serial ports, the Modicon M221 PLC provides optimum connectivity for simplified machine integration and maintenance. See catalog DIA3ED2140110EN.

Catalog Number	Description	Inputs	Outputs	Supply Volts
TM221C16R	Compact PLC 16 I/O Relay	9 Digital, 2 Analog	7 Relay	120 AC
TM221C24R	Compact PLC 24 I/O Relay	14 Digital, 2 Analog	10 Relay	120 AC
TM221C40R	Compact PLC 40 I/O Relay	24 Digital, 2 Analog	16 Relay	120 AC
TM221CE16R	Ethernet Compact PLC 16 I/O Relay	9 Digital, 2 Analog	7 Relay	120 AC
TM221CE16T	Ethernet Compact PLC 16 I/O PNP Transistor	9 Digital, 2 Analog	7 PNP	24 DC
TM221CE24R	Ethernet Compact PLC 24 I/O Relay	14 Digital, 2 Analog	10 Relay	120 AC
TM221CE24T	Ethernet Compact PLC 24 I/O PNP Transistor	14 Digital, 2 Analog	10 PNP	24 DC
TM221CE40R	Ethernet Compact PLC 40 I/O Relay	24 Digital, 2 Analog	16 Relay	120 AC
TM221CE40T	Ethernet Compact PLC 40 I/O PNP Transistor	24 Digital, 2 Analog	16 PNP	24 DC
TM221ME16R	Ethernet Modular PLC 16 I/O Relay	8 Digital, 2 Analog	8 Relay	24 DC
TM221ME16T	Ethernet Modular PLC 16 I/O PNP Transistor	8 Digital, 2 Analog	8 PNP	24 DC



TM241CE40T

Modicon™ M241 PLC

Designed for high-performance compact machines, incorporating speed and position control functions–the Modicon M241 PLC features a dual core processor–that provides tremendous processing power and memory size for complex applications. Machine programming is highly intuitive using EcoStruxure Machine Expert Software (formerly SoMachine), function blocks and ready-to-use applications. And, the M241 PLC’s simplified motor control integration and wiring allow for quick start-up and commissioning.

Catalog Number	Communication	Inputs	Outputs	Supply Volts
TM241CE24R	Modbus TCP, EthernetIP, Modbus Serial, Ascii *[1]*	14 Digital	4 PNP, 6 Relay	24 dc
TM241CE24T		14 Digital	10 PNP	
TM241CE40R		24 Digital	4 PNP, 12 Relay	
TM241CE40T		24 Digital	16 PNP	
TM241CEC24R	Modbus TCP, EthernetIP, Modbus Serial, Ascii, CanOpen, CAN J1939 *[1]*	14 Digital	4 PNP, 6 Relay	
TM241CEC24T		14 Digital	10 PNP	
TM241CEC24U		14 Digital	10 NPN	
Additional versions available, please see Modicon M241 Micro PLC or catalog DIA3ED2140107EN for additional information.				

[1] NOTE: Profibus DB is available via TM4 expansion module.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



TM251MESE



TM251MESC

Modicon™ M251 PLC

The Modicon M251 PLC provides innovative, high-performance solutions for modular machines and distributed architectures with line control. Its intuitive EcoStruxure Machine Expert software (formerly SoMachine), ready-to-use applications and function blocks allow you to optimize your programming time. And, its flexible and scalable machine control allows you to change the PLC hardware type to fit the application, using the same programming across the range. The M251 PLC allows you to stay connected everywhere via Ethernet, wireless access, web servers and remote visualization, simplifying machine integration and maintenance. Its integrated Ethernet switch—on a separate channel from the machine control network—allows data exchange with other machines and system networks, while keeping the machine control on a dedicated high-performance local network.

Catalog Number	Description	Com 1	Com 2	Supply Volts
The M251 can be further enhanced using the TM3 (I/O & Safety). TM4 (communication), and TMC (I/O) expansion modules.				
TM251MESE	Dual Channel Ethernet PLC	Dual Port Ethernet	Ethernet as Master	24 dc
TM251MESC	Ethernet and CANopen PLC	Dual Port Ethernet	CANopen as Master	24 dc
Additional versions available, please see Modicon M251 and catalog DIA3ED2140108EN for additional information.				



Modicon TM3 Expansion I/O Modules for M221, M241, and M251

Catalog Number	Description
TM3 I/O Expansion Modules for M221, M241, M251 PLCs. Up to 7 modules per PLC. Add TM3XTRA1 + TM3XREC1 to add 8-14 TM3 modules. Additional TM3 modules are available.	
TM3AI4	I/O Module 4 Analog Inputs
TM3AI8	I/O Module 8 Analog Inputs
TM3AM6	I/O Module 4 Analog Inputs and 2 Analog Outputs
TM3AQ2	I/O Module 2 Analog Outputs
TMA3Q4	I/O Module 4 Analog Outputs
TMA3DI16	I/O Module 16 Inputs
TM3DI8	I/O Module 8 Inputs
TM3DI8A	I/O Module 8 Inputs 120 Vac
TM3DM8R	I/O Module 8 IO Relays
TM3DQ16R	I/O Module 16 Outputs Relays
TM3DQ16T	I/O Module Outputs Transistor PNP
TM3DQ8R	I/O Module 8 Outputs Relays
TM3DQ8T	I/O Module Outputs Transistor PNP
TM3TI4	I/O Module 4 Inputs Temperature
TM3TI8T	I/O Module 8 Inputs Temperature
TM3XTRA1	I/O Expansion Transmitter for 8–14 TM3 Modules
TM3XREC1	I/O Expansion Receiver for 8–14 TM3 Modules



Modicon™ M258 PLC

The Modicon M258 logic controller is a compact, high-performance and fully expandable PLC. It forms a part of Flexible Machine Control approach, a key component of Machine Struxure, which brings you maximum flexibility and ensures the most optimized control solution. This PLC is designed for machine manufacturers (OEMs) focusing on applications such as packaging, conveying and storage, textiles and woodworking, etc. It offers high-performance solutions for speed control, counting, axis control, and communication functions. The Modicon M258 logic controller's dual-core processor provides extremely high performance. Core 1 is dedicated exclusively to managing program tasks and offers the maximum resources for real-time execution of the application code. Core 2 is dedicated to executing communication tasks, which have no impact on the application performance. More information is available at Modicon M258 PLC and in catalog DIA6ED2100402EN.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



TM262M15MESS8T

New!

Modicon™ M262 Logic/Motion Controller

As the latest controller for Logic and Motion with cloud protocols (MQTT, HTTP, JSON, OPC UA) and encryption (TLS), the Modicon M262 is made for you. Modicon controllers are a key part of our EcoStruxure™ Machine that provides complete architecture from Connected Products and Edge Control to Apps, Analytics, and services. Modicon M262 controllers embed Industrial Internet of Things (IIoT) protocols and encryption to provide direct cloud connectivity and digital services. The Modicon M262 Logic/Motion controller offer is made for performance-demanding machines. M262 controllers are IIoT-ready (MQTT, HTTP, OPC UA, TLS) and combine logic, motion, and safety control applications. **TM262L** is for logic control of multiple input/output arrangements. **TM262M** is for motion control of up to 16 synchronized axes, embedding a safety control application capable of attaining Safety Integrity Level (SIL) 3. More information is available at Modicon M262 and in catalog DIA3ED2180503EN.

Catalog Number	I/O	Execution Speed ns/Instruction	Maximum No. of Sync Axes	Embedded Communication Networks		
				Ethernet	Sercos	Serial
Logic Controllers						
TM262L10MESE8T	4 fast digital inputs / 4 fast digital outputs	5	—	2	—	1
TM262L20MESE8T		3	—	2	—	1
Motion Controllers						
TM262M15MESS8T	4 fast digital inputs / 4 fast digital outputs + 1 encoder input (Incremental/ SSI, 5/24 Vdc)	5	4 Axes	2	1	1
TM262M25MESS8T		3	8 Axes	2	1	1
TM262M35MESS8T		3	16 Axes	2	1	1



Modicon™ Momentum™ PLC

The small footprint and open architecture of the Momentum PLC product line make it extremely versatile for a variety of automation applications. The Momentum PLC is ideal for PC-based control, distributed control, distributed I/O, and traditional, standalone PLC control. The Momentum PLC product line includes I/O bases and communication adapters that are interchangeable and snap together to deliver optimal flexibility throughout the control system life cycle. Using Ethernet as its communications backbone, the Modicon Momentum CPU delivers all the performance benefits of real-time control. The open architecture of the Momentum CPU makes it a universal controller for distributed I/O, compatible with many of the major fieldbus and control network environments. An integral Ethernet port in the Momentum CPU allows users to perform a wide range of functions over Ethernet, including data acquisition, peer-to-peer communications, and I/O scanning. Embedded web pages enable the use of a standard web browser to read status and diagnostic information from the processor. The Momentum CPU not only seamlessly connects I/O and other control devices via open standards; it delivers the performance of a full function, real-time controller for stand-alone and distributed system configurations in one money saving unit. Additional information can be found at Modicon Momentum on the www.se.com/us website.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



EcoStruxure Machine Expert Software

EcoStruxure Machine Expert (formerly known as SoMachine) is the OEM solution software for developing, configuring, and commissioning the entire machine in a single software environment, including logic, motion control, HMI, and related network automation functions. EcoStruxure Machine Expert allows you to program and commission all the elements in Schneider Electric's Flexible and Scalable Control platform, the comprehensive solution-oriented offer for OEMs, which helps you achieve the most optimized control solution for each machine's requirements. Flexible and Scalable Control platforms include:

Match your controller to the available software package:

MachineStruxure Product Range	Schneider Electric Software	Software Distribution
Zelio Logic: Smart Relays 10 to 40 I/O	Zelio Soft: Zelio Logic configuration software	Free to Download
Modicon M171 / M172: HVAC Logic Controller	EcoStruxure Machine Expert HVAC	Available to order
Modicon M221 Nano PLC	EcoStruxure Machine Expert Basic	Free to Download
Modicon Motion: M221, M241, M251, M258, M262LMC058	EcoStruxure Machine Expert NOTE: Vijeo™ Designer and Basic are included	Available to order
Harmony™ HMI: SCU and XBT GC		
PacDrive Motion Controller	EcoStruxure Machine Expert	Available to order

More information is available at EcoStruxure Machine Expert on www.se.com/us and in catalog DIA3ED2180701EN.



EcoStruxure Control Expert Software

EcoStruxure Control Expert software is the common programming, debugging, and operating software for Modicon M340, M580, M580S, Premium, Momentum, and Quantum ranges.

Features

- 5 IEC61131-3 languages + Legacy LL984
- FDT / DTM standard for EcoStruxure Field Device integration
- Cybersecurity and traceability
- Change Configuration on the Fly (CCOTF)
- Standard objects and libraries
- Customizable integrated Function Block Library (DFB)
- PLC simulator on PC, built-in test and diagnostic
- Animation tables, operator screens and trending tool
- Integrated conversion tools from Concept, ProWORX, PL7 Pro
- ACR available for Section 508/VPAT requirements

More details are available at EcoStruxure Control Expert Software on www.se.com/us and catalog MKTED2140504EN.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Modicon™ M340 PAC

Our latest midrange PAC is the most integrated ever! Highly requested by industrial OEMs and end users, the all-power-inside concept boasts high-performance processing and small size to create a system that provides flexibility beyond any before. With up to three built-in CPU communication ports, large memory options, sixty-four channel high-density modules, and embedded web servers, the Modicon M340 is a powerful solution for industrial OEMs and end users demanding more productivity in their PACs.

The Modicon M340 PAC supports advanced communications such as enhanced Ethernet/IP which support Ethernet/IP, Modbus TCP/IP, and daisy chain loop communications on the same four-port, rack mounted switch module. It will also support DNP3.0 in serial or Ethernet in a rack-mounted RTU module. The Modicon M340 PAC is programmed with Unity Pro software, which allows users to dramatically reduce setup time and effort with features like drag ‘n drop CANopen bus setup and standard IEC 61131–3 language selection. Designers gain fast, easy and efficient startups.

More information is available at Modicon M340 PAC on www.se.com/us and in the latest Modicon M340 catalogs and brochures.



Modicon™ M580 ePAC

The Modicon M580 ePAC (Ethernet Programmable Automation Controllers) features openness, flexibility, robustness and sustainability. The M580 ePAC is designed with an Ethernet backbone to optimize connectivity and communications. The microprocessor has three native Ethernet ports on the chip. Schneider Electric collaborated with the supplier to design the microprocessor, and in 2013 the supplier agreed to provide the microprocessor for 20 years, helping to protect customers' long-term investments. The powerful processors offer high levels of computation for complex networked communication, display and control applications.

The M580 ePAC is designed for cybersecurity. It has an Achilles Level 2 certification. Achilles Level 2 certification by Wurldtech is considered to be the best cybersecurity certification available for PACs. The M580 has other advanced embedded cyber security features that are defined by IEC 62443. This includes, but is not limited to the ability to disable unused services, control of remote access to the PAC and integrity checks of Unity Pro executable files. The M580 ePAC supports X80 common I/O modules which can be easily integrated into its architecture.

More details are available at Modicon M580 PAC Controller on www.se.com/us and in catalog DIA6ED2151012EN.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Harmony Small Panels HMI Products

The Harmony STO, STU, SCU, and ST6, Small Panels have been specifically designed to satisfy the requirement for panels that are compact and easy to use. These terminals are easy to configure, and they work seamlessly with other Schneider Electric equipment to provide a complete automation solution, dedicated to simple or compact machines.



Harmony ST6 Basic HMI Range

New!

Harmony ST6 Basic HMI

Harmony ST6 is available in three models:

- Basic HMI
- Basic Web HMI
- Basic Modular HMI

Features

- High-resolution screen powered by EcoStruxure Operator Terminal Expert software, with multi-screen and layout objects (Dock Panel) functions, to combine more information in one page for easy operation.
- Tool-free fastener for fast and easy mounting.
- Ability to access all HTML5 servers with Basic Web HMI, **Harmony** STW6 version.
- Availability of Web Viewer function on **Harmony** HMIST6 and HMISTM6 versions that allows remote visualization of the HMI application on PC/Tablet/Smartphone.
- Basic HMI, **Harmony** ST6, and STM6 with the best-in-class user interface for multi-device connection: 2 x Ethernet ports with Dual IP, 2x COM (except 4” model)/USB host and device.
- Basic Web HMI, **Harmony** STW6 with 2 x Ethernet ports with one IP address for daisy chain connection (except 4" model).
- Enhanced cybersecurity from application to firmware level.
- EcoStruxure Secure Connect Advisor, pre-installed on **Harmony** HMIST6 and HMISTM6 versions, for secure remote maintenance of HMI and connected devices.

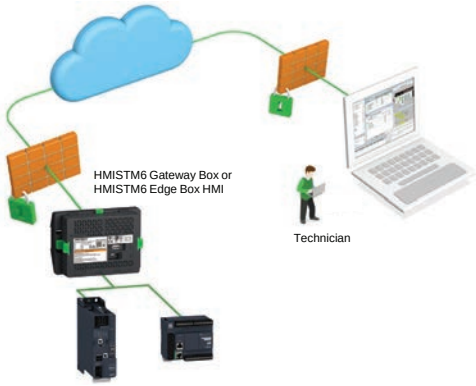


Table 23.1: Harmony ST6 Basic Range

Description	Catalog Number
ST6 Basic HMI	
4-inch wide touch panel display, 1 COM, 1 Ethernet, USB host and device, 24 Vdc	HMIST6200
7-inch wide touch panel display, 2 COM, 2 Ethernet, USB host and device, 24 Vdc	HMIST6400
10-inch wide touch panel display, 2 COM, 2 Ethernet, USB host and device, 24 Vdc	HMIST6500
12-inch wide touch panel display, 2 COM, 2 Ethernet, USB host and device, 24 Vdc	HMIST6600
15-inch wide touch panel display, 2 COM, 2 Ethernet, USB host and device, 24 Vdc	HMIST6700
STW6 Basic Web HMI	
4-inch wide touch panel display, 1 Ethernet, USB host and device, 24 Vdc	HMISTW6200
7-inch wide touch panel display, 1 Ethernet, USB host and device, 24 Vdc, 1 IP address for daisy chain connection	HMISTW6400
10-inch wide touch panel display, 1 Ethernet, USB host and device, 24 Vdc, 1 IP address for daisy chain connection	HMISTW6500
12-inch wide touch panel display, 1 Ethernet, USB host and device, 24 Vdc, 1 IP address for daisy chain connection	HMISTW6600
15-inch wide touch panel display, 1 Ethernet, USB host and device, 24 Vdc, 1 IP address for daisy chain connection	HMISTW6700
STM6 Basic Modular HMI	
4-inch wide touch panel display, 1 COM, 2 Ethernet, USB host and device, 24 Vdc	HMISTM6200
7-inch wide touch panel display, 1 COM, 2 Ethernet, USB host and device, 24 Vdc	HMISTM6400

For complete information, see **Harmony ST6** on www.se.com/us and product catalog DIA5ED2181202EN.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Harmony™ STO Small Touchscreen HMI

With screen quality based on ppi similar to Harmony GTU, the Harmony STO7 series of 4.3-inch color screens support crisp, clear visualization on a high quality display. This enables you to create more attractive and distinguished applications for industry.

Features

- TFT color screen with 480 x 272 pixels
- Removable logo stickers
- Larger screen with full-size ratio in the 4.3 inch class
- Three versions for various communication types
- 26 MB application memory
- Operating temperature: 32—122 °F (0—50 °C)
- Programs with EcoStruxure™ Operator Terminal Expert
- IP65, NEMA 4X (indoor use)
- Certifications include CE, cULus, Class 1 Div 2

Catalog Number	Colors	Com Port	Ethernet
HMISTO705	64k	1 x RS232	—
HMISTO715	64k	1 x RS422/485	—
HMISTO735	64k	—	1 x 10/100BaseT

For complete information and the latest updates, see:

- Product Range **Harmony STO & STU** on www.se.com/us
- Product Catalog DIA5ED2130607EN



Harmony™ STU Small Touchscreen HMI

The Harmony STU is a compact HMI that is mounted using a 22 mm diameter hole - similar to a push button. This helps reduce overall cost by minimizing the labor for installing the HMI. The STU is a cost-effective solution for machine builders.

Features:

- 3.5 or 5.7 inch TFT color display, QVGA (320 x 240)
- Resistive touch screen
- One USB v2.0 host-type A port + one USB v2.0 mini-B port
- Serial and Ethernet communication ports
- Powered by 24 Vdc
- Operating temperature: 32–122°F (0–50°C)
- Configured by Vijeo Designer
- IP65, NEMA 4X (indoor use)
- Certifications include CE, cULus, Class 1 Div. 2, Marine

Catalog Number	Screen Size	Com Port	Ethernet
HMISTU655	3.5 in. TFT Color (320x240)	RS232C/RS485 (RJ45)	Ethernet (RJ45)
HMISTU855	5.7 in. TFT Color (320x240)	RS232C/RS485 (RJ45)	Ethernet (RJ45)

For complete information and the latest updates, see:

- Product Range **Harmony STO & STU** on www.se.com/us
- Product Catalog DIA5ED2130607EN



Harmony™ SCU Small HMI Controllers

The ultra-compact range of Harmony SCU small HMI controllers is part of Schneider Electric's Flexible Machine Control concept. The Harmony SCU HMI Controllers product offer brings together HMI and control functions within a single product. This reduces the amount of equipment required and the associated costs throughout the life cycle of the machine. Mounting through a 22 mm hole considerably simplifies installation.

Features:

- 3.5 or 5.7 inch TFT color display, QVGA (320 x 240), resistive touch screen
- One USB v2.0 host type A port + one USB v2.0 mini-B port
- Serial, Ethernet and CANopen communication ports
- Removable terminal blocks for I/O connections
- Powered by 24 V dc
- Operating temperature: 32–122°F (0–50°C)
- IP65 NEMA 4X (indoor use)
- Certifications include CE, cULus, Class 1 Div. 2

Catalog Number	Screen Size	Digital Inputs	High Speed Counter Inputs	Digital Relay Outputs	Pulse Train Outputs	Analog Inputs	Temperature Inputs	Analog Outputs
HMISCU6A5	3.5 in.	14	2	8	2	—	—	—
HMISCU6B5	3.5 in.	6	2	6	2	2	2	2
HMISCU8A5	5.7 in.	14	2	8	2	—	—	—
HMISCU8B5	5.7 in.	6	2	6	2	2	2	2

For complete information and the latest updates, see:

- Product Range **Harmony SCU** on www.se.com/us
- Product Catalog DIA5ED2130505EN

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


HMIGTO1300


HMIGTO2300


HMIGTO3510

Harmony™ Advanced Panels HMI Products

The Harmony Advanced Panels are touch screen HMIs that are designed for the most demanding industrial applications. Choose between several platforms and screen sizes for the best cost and performance to suit your needs.

Harmony™ GTO Optimized Panels

The Harmony GTO Optimized Panels are ideal for OEMs that need a cost-effective solution with enough functionality for demanding applications. The GTO's build-in connectivity includes serial ports, Ethernet, and USB. Via Ethernet, they support a Web server, FTP, e-mail, and remote access from a PC, smart phone, or tablet applications. The panels are designed for industrial environments. A stainless steel version is available that is resistant to high-pressure cleaning (conforming to DIN 40050–9).

Features:

- TFT color LCD display with 50,000 hour backlight
- Resistive analog touch screen
- One USB v2.0 host type A port + one USB v2.0 mini-B port
- Powered by 244 V dc
- Configured by Vijeo Designer
- IP65, NEMA 4X (indoor use), IP66K for Stainless Steel models
- Certifications include CE, cULus, Class 1 Div. 2, Marine

Table 23.2: GTO Optimized Panels

Catalog No.	Screen Size	Stainless Steel	Function Keys	Com Ports	Ethernet	SD Card Socket	Operating Temp
HMIGTO1300	3.5 in. QVGA (320x240)	—	Yes	2 Ports	—	—	32—131 °F (0—55 °C)
HMIGTO1310	3.5 in. QVGA (320x240)	—	Yes	1 Port	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO2300	5.7 in. QVGA (320x240)	—	—	2 Ports	—	—	32—131 °F (0—55 °C)
HMIGTO2310	5.7 in. QVGA (320x240)	—	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO2315	5.7 in. QVGA (320x240)	Yes	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO3510	7.0 in. WVGA (800x480)	—	Yes	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO4310	7.5 in. VGA (640x480)	—	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO5310	10.4 in. VGA (640x480)	—	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO5315	10.4 in. VGA (640x480)	Yes	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO6310	12.1 in. SVGA (800x600)	—	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)
HMIGTO6315	12.1 in. SVGA (800x600)	Yes	—	2 Ports	1 Port	Yes	32—131 °F (0—55 °C)

For complete information and the latest updates, see:

- Product Range Harmony GTO on www.se.com/us
- Product Catalog DIA5ED2130616EN

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Harmony™ GTU Universal Panels

The Harmony GTU Universal Panels are a high performance HMI product range designed with the uniqueness of modularity that allows you to select and assemble the best combination of display unit and CPU module for the application requirements. Harmony GTU features operator efficiency, simplified installation and flexibility that fits almost any system. This product range includes: display modules (Advanced and Smart) and CPU box modules (Premium and Open).

Key features of the Harmony GTU:

Premium Box CPU Module:
- Harmony proprietary OS
- SD Card for OS and application
- Second SD Card socket for user data
- 2x USB 2.0 (Type A) and 1x USB 2.0 (mini-B)

Open Box CPU Module:
- Window Embedded 7 OS
- CFast Card for OS and application
- SD and CFast Card sockets for user data
- 3x USB 2.0 (Type A) and 1x USB 2.0 (mini-B)
- DVI-D output for external monitor

CPU Box Type	Catalog Number	Operating System	Video Out	Com Ports	Ethernet	USB 2.0 Ports	Memory Card Socket
Standard Box	HMIG2U	Proprietary OS	—	1x RS232 1x RS485	2x 100 Mb	2x (Type A) 1x (mini-B)	On board Flash (1 GB) 64 MB user data
Premium Box	HMIG3U	Proprietary OS	—	2 Ports	2 Ports	3x (Type A) 1x (mini-B)	1x CD for system (included) 1x SD socket for user data
Open Box	HMIG5U2	WES7 OS	DVI-D	2 Ports	2 Ports	3x (Type A) 1x (mini-B)	1x CFast for system (included) 1x CFast socket for user data 1x SD socket for user data
Open Box	HMIG5U21	Windows 10 IoT Enterprise	DVI-D	2 Ports	2 Ports	3x (Type A) 1x (mini-B)	1x CFast for system (included) 1x CFast socket for user data 1x SD socket for user data
Open Box	HMIG5U22	Windows 10 IoT Enterprise	DVI-D	2 Ports	2 Ports	3x (Type A) 1x (mini-B)	1x CFast for system (included) 1x CFast socket for user data 1x SD socket for user data



HMIDT732FC

Common Features:

- Modular design, any combination of display module and CPU box
- Two serial and two Ethernet ports for communications
- Powered by 12–24 Vdc
- Operating temperature: 32–140°F (0–60°C)
- Configured by Vijeo Designer
- IP66/67, NEMA 4X (indoor use)
- Certifications include: CE, cULus, Class 1 Div. 2, Marine

Smart Display Module:
- 16M color TFT LCD display (4:3 format)
- Resistive analog touch screen, multi-touch capable
- Front panel USB 2.0 ports, 1x (Type A) and 1x (mini-B)
- Sensor for automatic backlight brightness control

Advanced Display Module:
- 262k color TFT LCD display (16:9 format)
- Resistive analog touch screen, single touch

Display Type	Catalog No.	Screen Size	Front USB Ports	Brightness Sensor	Built-in Wireless LAN	Multi-touch Capable *[1]*
Smart Display (4:3 or 16:9) 16 M Colors	HMIDT542	10.4 in. SVGA (800x600)	Yes	Yes	—	Yes
	HMIDT642	12. 1 in. XGA (1024x768)	Yes	Yes	—	Yes
	HMIDT643	12.1 in. XGA (1024x768)	Yes	Yes	Yes	Yes
	HMIDT732	15.0 in. XGA (1024x768)	Yes	Yes	—	Yes
	HMIDT752	15.0 in. W FWXGA (1366x768)	Yes	Yes	—	Yes
	HMIDT952	19.0 in. W FWXGA (1366x768)	Yes	Yes	—	Yes
Advanced Display (16:9) 262k Colors	HMIDT351	7.0 in. WVGA (800x480)	—	—	—	—
	HMIDT551	10.1 in. WVGA (1280x800)	—	—	—	—
	HMIDT651	12.1 in. WVGA (1280x800)	—	—	—	—

For complete information and the latest updates, see:
- Product Range Harmony GTU HMI on www.se.com/us
- Product Catalog DIA5ED2140401EN

[1] Projects created in Vijeo Designer do not support multi-touch.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



HMIG3X Base Unit

New!

Harmony GTUX™ Universal Panels

Harmony GTUX is a modularly designed robust terminal suitable for harsh outdoor environments. Features like high brightness and UV protection against direct sunlight, protection against water and dust, and supporting a wide range of temperatures make it an ideal choice for direct outdoor operation in O&G, WWW, and MMM segments.

Features

- A wide temperature range from −30 °C to +70 °C
- Sunlight readable: High brightness LCD (1000 cd/m²), anti-glare surface
- Robustness: UV protection, conformal coated (fully coated)
- Dust and water proof: IP66F, IP67F, and NEMA4X (outdoor use)
- Environmental standard: Class 1, Div 2, ATEX/IECEx Zone 2/22
- Variety of interfaces, including dual Ethernet ports
- Modular design with stainless front face

Table 23.3: Harmony GTUX Base Units

CPU Box Type	Catalog Number	Operating System	Conformal Coated	Com Ports	Ethernet	USB 2.0 Ports	Memory Card Socket
eXtreme Box	HMIG3X	Proprietary OS	Partially coated	1x RS232/422/485 1x RS485	2x 10/100/1000BaseT	2x (Type A) 1x (mini-B)	2x SD card
eXtreme Box Fully Coated	HMIG3XFH	Proprietary OS	Fully coated 3C3	1x RS232/422/485 1x RS485	2x 10/100/1000BaseT	2x (Type A) 1x (mini-B)	2x SD card



HMIDT35X Display

Table 23.4: Touchscreen Displays

CPU Box Type	Catalog Number	Screen Size	Conformal Coated	Operating Temperature	Supply Voltage	Touch Screen	Memory Card Socket
eXtreme Displays	HMIDT35X	7 in. W WVGA (800x480)	Partially coated	−30 to +65 °C	12–24 Vdc	Single Touch Analog Resistive	1000 cd/m²
	HMIDT35XFH	7 in. W WVGA (800x480)	Fully coated 3C3	−30 to +65 °C	12–24 Vdc	Single Touch Analog Resistive	1000 cd/m²
	HMIDT65X	12.1 in. W WXGA (1280x800)	Partially coated	−30 to +70 °C	12–24 Vdc	Single Touch Analog Resistive	1000 cd/m²
	HMIDT65XFH	12.1 in. W WXGA (1280x800)	Fully coated 3C3	−30 to +70 °C	12–24 Vdc	Single Touch Analog Resistive	1000 cd/m²
	HMIDT75X	15.6 in. W FWXGA (1366x768)	Partially coated	−20 to +60 °C	12–24 Vdc	Single Touch Analog Resistive	1000 cd/m²
	HMIDT75XFH	15.6 in. W FWXGA (1366x768)	Fully coated 3C3	−20 to +60 °C	12–24 Vdc	Single Touch Analog Resistive	1000 cd/m²


For complete information and the latest updates, see:

- Product Range **Harmony GTUX eXtreme HMI** on www.se.com/us
- Product Catalog DIA5ED2181203EN

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

USB Accessories for Harmony™ HMI Terminals

Harmony HMI functionality can be extended with USB connected accessories. These innovative accessories are easy to install and can be operated with HMI terminals. Their configuration is part of the overall HMI project and is stored in the terminal memory. The illuminated switch panel is mounted with a 22 mm hole, simplifying installation.

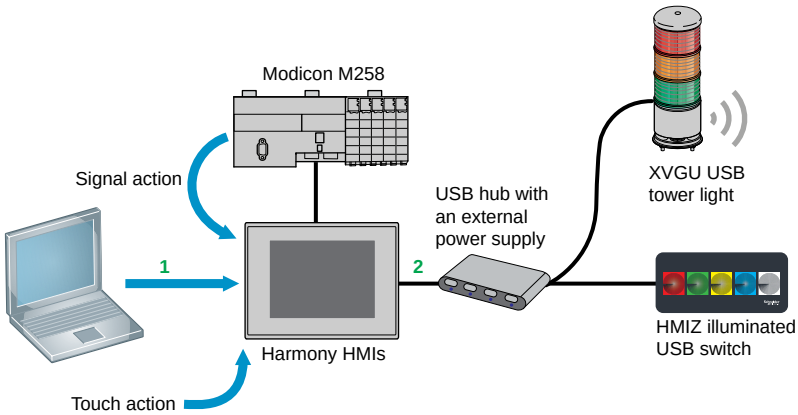



Harmony™ XVGU Tower Light

The monolithic USB tower lights of the Harmony XVGU product range have LEDs that are unique and simple-to-use. The states and patterns are directly set and modified in the HMI application. The XVGU tower lights provide long distance indication of the operating status or sequences of a machine or installation, both visually by illuminated signaling units with 360° visibility, and audibly by a buzzer.

Key features of the Harmony XVGU USB Tower Light:

- Unique one-piece LED tower design, 60 mm
- Three transparent signaling layers
- Two-tone buzzer with three level volume control and multi-color programmable lights
- Variety of signal patterns (flashing/non-flashing lights)
- Power and signaling managed by the HMI
- Installation options (on direct base or tube plate)
  Catalog Number: XVGU3SHAV (100 mm length pole with mounting base

  Catalog Number: XVGU3SWV (direct base mounting)

  See Catalog DIA5ED2130901EN for more information.

Harmony™ HMIZRA1 Illuminated Switch Panel



HMIZRA1
Illuminated Switch Panel

The illuminated USB switch is uniquely designed for easy visualization and quick acknowledgement of alarm (wide view angle and brightness). This switch with tactile feedback can also be used as function keys in HMI applications that involve repetitive operations in dirty environments. This keeps the touch panel clean and protected by avoiding continuous finger contact.

Key features of the Illuminated USB Switch:

- Five programmable switches with tactile feedback
- Dynamic light changes and flashing to display machine status
- Easy mounting with one-cable connection and a 22.5 mm hole
- Programmable six-color LED illumination per switch
- Connect to the Harmony HMI via USB
- Mount to the panel through a 22 mm hole
- Powered by the HMI via the USB cable
- Configured in Vijeo Designer
- IP65, NEMA 4X (indoor use)
- Certifications include CE, cULus, Class 1 Div. 2

Catalog Number: HMIZRA1

More details are available at Harmony Accessories and in catalog DIA5ED2130901EN

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Harmony™ Panel PC

The Harmony Panel PC is a family of panel-mounted all-in-one industrial PCs, certified for automation applications.
Features of the Harmony Panel PCs:

- TFT color LCD display, available in 10.4, 12.1, 15.0, and 19.0 in. screen sizes
- Resistive analog touch screen
- Stainless steel models available
- Variety of CPUs and performance levels
- Options for mass storage (HDD, SDD, memory card, DVD-RW, RAID)
- Variety of Windows operating systems options
- Options for add-in card slots
- Communication options including COM ports, Ethernet, and USB
- Fanless models available
- Supply power, 100...240 V ac or 24 V dc with option for battery back-up
- Vijeo Designer Run-time trial mode pre-installed
- IP65, NEMA 4X (indoor use)
- Certifications inlcude CE, cULus, Class 1 Div. 2



Harmony P6
Modular Box PCs and Displays

New!

Harmony P6 Modular Box PCs and Displays

Harmony P6 Industrial PC connects Operational Technology (OT) to the field of Information Technology for the IIoT.

This range features interface modularity with slot-in design for HDD/SSD and optional PCI/PCIe slots and slot-in design of operational interfaces. The two standard Ethernet ports allow OT and IT communications to be separated if necessary.

Features

- Versatile and open to applications running Windows software at the Edge: HMI, SCADA, IIoT Edge, engineering and maintenance tools, and thin clients.
- Best-in-class visualization and control with associated software enhancing the operator experience.
- Leverage crew reactivity for business maximization with 4 high-performing Intel CPU cores for industry.
- Modern display design for best visibility and operability for increased ease of use.
- Consistent operator workstations at the edge with modularity to make Box PCs, Panel PCs, and monitors for the ergonomic environment while using the application.
- Designed accordingly to IEC62443 Cybersecurity standard for control systems.
- Enhanced security with associated software, Achilles and Trellix.
- EcoStruxure Secure Connect for remote connections.
- New online configurator with an enlarged line-up, linked with EcoStruxure Plant Builder V5 for faster deliveries

For more information, visit the Harmony P6 product overview on www.se.com/us and catalog DIA5ED2140501EN.


© 2025 Schneider Electric
All Rights Reserved
3/25/2025



HMIBSC



HMIBMI

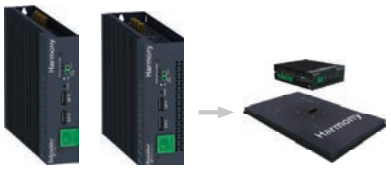

HMIBMO

Harmony™ Edge Box

Harmony Edge Box offers edge control for EcoStruxure™ Machine and EcoStruxure Plant.

HMIBMI

- Intel Atom “Apollo lake” E3930 Dual-core 1.8 GHz fanless
- 4 GB RAM, 2x Ethernet, 1x COM, 2x USB, 1x DP (working with modular display HMIDM mounted)
- 64 or 128 GB eMMC (soldered), 1x mini PCIe slot *[2]*, antenna connectors
- Runs Node-RED to wired devices on the Industrial Internet of Things

HMIBMO

- Intel Atom “Apollo lake” E3930 Dual-core 1.8 GHz fanless
- 4 or 8 GB RAM, 2x Ethernet (supporting real time), 2x COM, 4x USB, 2x DP (both working with modular display HMIDM mounted)
- 64 or 250 GB M.2 SSD, 1x mini PCIe slot (without optional interface) *[2]*, antenna connectors
- Expandable model with HDD/SSD 2.5" slot and optional interface for Mini PCIe *[2]*
- Runs Node-RED to wired devices on the Industrial Internet of Things

Table 23.5: Harmony™ Edge Box

Family	Catalog Number	Operating System	CPU	Storage	RAM	TPM	Configured to order
HMIBMO Optimized	HMIBMIEA5DD1E01	Win10 IOT Enterprise	Intel Atom E3930 Dual Core	64 GB M.2 SSD	4 GB	Yes	Yes
	HMIBMIEA5DD1101	Win10 IOT Enterprise	Intel Atom E3930 Dual Core	64 GB M.2 SSD	4 GB	No	No
	HMIBMIEA5DD110L	Win10 IOT Enterprise	Intel Atom E3930 Dual Core	250 GB M.2 SSD	8 GB	No	No
	HMIBMIEA5DD1001	No OS	Intel Atom E3930 Dual Core	64 GB M.2 SSD	4 GB	No	No
	HMIBMIEA5DD100A	No OS	Intel Atom E3930 Dual Core	250 GB M.2 SSD	8 GB	No	Yes
HMIBMI IIoT	HMIBMIEA5DD1E01	Win10 IOT Enterprise	Intel Atom E3930 Dual Core	64 GB eMMC	4 GB	Yes	Yes
	HMIBMIEA5DD1101	Win10 IOT Enterprise	Intel Atom E3930 Dual Core	64 GB eMMC	4 GB	No	No
	HMIBMIEA5DD110L	Win10 IOT Enterprise	Intel Atom E3930 Dual Core	128 GB eMMC	4 GB	No	No
	HMIBMIEA5DD1001	No OS	Intel Atom E3930 Dual Core	64 GB eMMC	4 GB	No	No
	HMIBMIEA5DD100A	No OS	Intel Atom E3930 Dual Core	64 GB eMMC	4 GB	No	No

[2] Mini PCIe cards not requiring optional interface (no external connector): Cellular WiFi, Saved RAM, etc. Mini PCIe cards requiring optional interface: COM, USB, Audio, Video, Fieldbus, I/O, etc.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



EcoStruxure™ Machine SCADA Expert

Lite SCADA for line management

EcoStruxure Machine SCADA Expert (formerly known as Vijeo XL) is a powerful software for developing HMI, SCADA, OEE and Dashboard projects dedicated to Line Management & Lite Supervision applications to run in Magelis Industrial PC and GTU Open Box. The bundle offer "Magelis Industrial PC and GTU Open Box saves you time and resources on validation of hardware, software and OS.

For More information, refer to EcoStruxure Machine SCADA Expert and Catalog DIA5ED2171201EN



EcoStruxure™ Operator Terminal Expert

Touchscreen Configuration Software

A new-generation of software providing a superior user experience with the latest UI design and gestures:

Operate intuitively

- Go beyond the limitations of the physical screen size to improve productivity

Reduce time to market

- Efficient and intuitive engineering for faster customization and modification

Improve efficiency

- High usability and image quality for the operator (experience design)

Catalog Number	Description
HMIEELCZLSPAZZ	EcoStruxure Operator Terminal Expert, Basic Buildtime License (Digital)
HMIPELCZLSPAZZ	EcoStruxure Operator Terminal Expert, Professional Buildtime License (Digital)
HMIPELCZLGPAZZ	EcoStruxure Operator Terminal Expert, Professional Buildtime Group License (Digital)
HMIPELCZLTPAZZ	EcoStruxure Operator Terminal Expert, Professional Buildtime Team License (Digital)
HMIRTWCZLSPAZZ	EcoStruxure Operator Terminal Expert, Runtime License (Digital)





EcoStruxure™ Secure Connect Advisor

- Provides a secure connection between remote display units on the work site (via SiteManager Embedded) and computers or smart devices in the office (via LinkManager) over a secure central server (GateManager).
- With EcoStruxure Secure Connect Advisor, maintenance personnel can access Schneider Electric software and update it remotely and securely via the HMI, PLC, and other connected devices as if they were on site.
- Troubleshooting and repairs can be performed remotely upon request.

Table 23.6: EcoStruxure Secure Connect Advisor for Harmony iPCs/GTO/GTU/ST6

Catalog Number	Description
VJOCNTPACKESS	Secure Connect Essential Pack
VJOCNTPACKENT	Secure Connect Enterprise Pack
VJOCNTFREE30	Secure Connect 30 days Free Trial
VJOCNTLML	Secure Connect LinkManager License
VJOCNTSMBASIC	Secure Connect SiteManager Basic License
VJOCNTSMEXT5	Secure Connect SiteManager Ext 5 Lic
VJOCNTSMEXT10	Secure Connect SiteManager Ext 10 Lic
VJOCNTGMPREM	Secure Connect GateManager Prem Access
VJOCNTSTAT	Secure Connect User statistics

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

New!



TM3BCEIP TM3BCCO TM3BCSL

Modicon™ TM3 Bus Coupler Modules

The Modicon TM3 Bus Coupler enables the creation of separate groups of industrial TM3 I/Os, each positioned as near to the machine as possible, that are managed by a master controller via a fieldbus.

The TM3 Bus Coupler is offered with the following options:

- TM3BCEIP: EtherNet/IP and Modbus/TCP support
- TM3BCCO: CANopen support
- TM3BCSL: Modbus Serial Line support

Main features:

- Full and simple integration with Modicon M221, M241, M251, and M262 controllers
- Digitization: WebServer embedded, cybersecurity, and discovery service
- Connectivity: Two isolated RJ45 ports, USB port, EtherNet/IP and Modbus/TCP support, CANopen and Modbus serial line support
- Used in third party controller architectures

Table 23.7: Modicon TM3 Bus Couplers


Catalog Number	Description
TM3BCEIP	Ethernet interface, Modicon TM3 bus coupler module
TM3BCCO	CANopen interface, Modicon TM3 bus coupler module
TM3BCSL	Serial Line interface, Modicon TM3 bus coupler module

More information is available in catalog DIA3ED2140109EN.



Modicon™ STB Distributed I/O Platform

The Modicon STB is a highly modular distributed I/O platform, integrated wiring solution, and power management system that delivers effective and targeted control. Compatible with most major fieldbus networks: Modbus, Ethernet, CANopen, Devicenet, PROFIBUS, and Interbus. More information is available at Modicon STB Modular Distributed I/O.

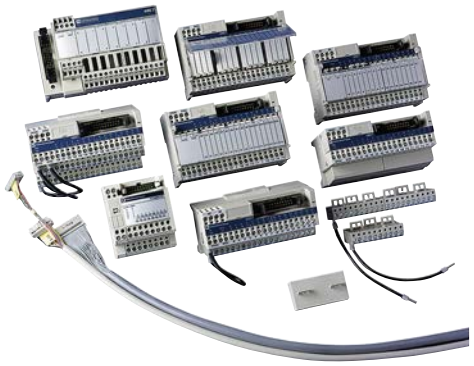

Modicon™ Telefast™ ABE7 Sub-bases, IP20

The Modicon Telefast ABE7 pre-wired system enables connection and adaptation of control signals of industrial PLC cards that are fitted with HE10 connectors. It rationalizes cabling by replacing PLC terminals and traditional terminal blocks—thus improving simplicity and economy. For more information, refer to Advantsys Telefast ABE7 and catalog DIA3ED2160602EN.



Modicon™ TM7 I/O Blocks, IP67

Compact and flexible, the TM7 IP67 I/O Blocks allow connection of sensors and actuators at the heart of processes or machines in severe environments. The wide range of modules provides solutions to match your exact needs. It includes connectivity to CANopen.

For more information, refer to Modicon TM7 Remote I/O for Harsh Environments and catalog DIA3ED2140405EN

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Modicon™ Momentum™ Distributed I/O and PLC

The small footprint and open architecture of the Momentum PLC product line make it extremely versatile for a variety of automation applications. The Momentum PLC is ideal for PC-based control, distributed control, distributed I/O, and traditional, standalone PLC control. Momentum PLC options and accessories include: I/O bases, processor adapters, option adapters and communication adapters that are interchangeable and snap together to deliver optimal flexibility throughout the control system lifecycle. Using Ethernet as its communications backbone, the Modicon Momentum M1E Processor delivers all the performance benefits of real-time control. The open architecture of the M1E processor makes it a universal controller for distributed I/O, compatible with many of the major fieldbus and control network environments. An integral Ethernet port in the M1E allows users to perform a wide range of functions over Ethernet, including data acquisition, peer-to-peer communications, and I/O scanning.



Five embedded web pages enable the use of a standard web browser to read status and diagnostic information from the processor. The most recent addition to the Momentum product offer is the Momentum M1E ConneXium switch. This model combines the power and functionality of the M1E processor with the communication versatility of four Modbus Ethernet TCP/IP ports. The award winning M1E not only seamlessly connects I/O and other control devices via open standards; it delivers the performance of a full function, real-time controller for stand-alone and distributed system configurations in one money-saving unit.

For more information, refer to Modicon Momentum and catalog MKTED205061EN-US

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Ethernet TCP/IP Products

The recognition of Ethernet TCP/IP, both in organizations and on the internet, has made it the communication standard of today. Its wide use is leading to a reduction in connection costs, increased performance and the addition of new functions, which all combine to ensure its durability.
Ethernet TCP/IP meets the connection requirements of every application:

- Twisted pair copper cables for simplicity and low cost
- Optical fiber for immunity to interference and for long distances
- Communication redundancy, inherent in the IP (internet protocol)
- Remote point-to-point access via the telephone network or the Internet for the cost of a local call

Ethernet TCP/IP, a truly open technology, supports all types of communication:

- Web pages
- File transfer
- Industrial messaging

With its high speed, the network no longer limits the performance of the application. The architecture can evolve without any difficulty. The products or devices remain compatible, ensuring the long-term durability of the system.
More information on Ethernet and Ethernet Products is available in catalog MKTED208054EN-US.

ConneXium Industrial Firewalls

The ConneXium line of networking products offers a complete range of Ethernet switches (managed and unmanaged), hubs, transceivers, gateways, cabling, and diagnostic monitoring software for demanding industrial environments. With fiber and redundant capabilities, along with advanced filtering and security features, ConneXium products improve the performance and security of the network. More details can be found at www.se.com/us/en.

CANopen Network Products


CANopen is an open network that is supported by over 400 companies world wide and promoted by CAN in Automation. CANopen is standardized in the EN50325-4 and in ISO15745-2 for its device description.

The main reason for using a network is the performance and the flexibility to adapt the network exactly to the requirements of the application. CANopen provides a unique feature for the adaptation of the data transmission. Based on the producer/consumer model, CANopen allows for a data transmission broadcast, peer-to-peer, change-of-state and cyclic communication. This means it transmits data only when required or on a specified time base. Process data objects can be individually configured. Parameters can be changed at runtime.

CANopen combines ease of installation with inexpensive devices. CANopen provides an integrated equipotential bounding in the cable. Therefore, an additional cable or stranded copper ribbon to achieve the same potential on all network devices is not necessary. Installation costs are heavily reduced.

More information on CANopen and CANopen Products is available in catalog MKTED208054EN-US.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Motion Configurator

Our Motion Configurator helps users find the best solution for their application needs, providing full guidance through the selection process even for multiple product ranges. It grants easy access and use for everybody, even those with no expertise in robotics and motion. You will be guided to choose between Lexium servo drives, integrated drives, motors, and robotics series. Create and compare the optimal bundles for your machine application.

How does the Motion Configurator work?

When launching the tool, you will easily go through the main steps:

- Provide the settings and specificities for your application.
- Compare and select the perfect bundle among the proposed results.
- Make the most of your configuration by saving it, sharing it with your team, and downloading the documentation and the bill of materials.
- Manage your configurations and directly order them easily with mySchneider logged-in experience.

New!

Lexium Cobot (Collaborative Robots)

Lexium Cobots take on monotonous, tedious, repetitive or physically demanding tasks. They can work in environments which are hazardous to people and can be easily applied to existing or new production lines in a variety of different industries.



Cobot and Controller

Table 23.8: Lexium Cobot and Controller Options

Payload (Max.)	Power (Max.)	Operating Radius	Controller Catalog Number	Cobot Catalog Number
6.61 lb (3 kg)	150 W	24.65 in (626 mm)	LXMRL03C1000	LXMRL03S0000
11.02 lb (5 kg)	350 W	37.56 in (954 mm)	LXMRL07C1000	LXMRL05S0000
15.43 lb (7 kg)	350 W	32.24 in (819 mm)		LXMRL07S0000
26.46 lb (12 kg)	500 W	52.24 in (1327 mm)	LXMRL12C1000	LXMRL12S0000
39.68 lb (18 kg)	600 W	42.24 in (1073 mm)		LXMRL18S0000

Links to Websites and Downloads:

Lexium Cobot on www.se.com/us

Catalog DIA7ED2220801EN: Lexium Cobot Collaborative Robots

PacDrive 3 Robotics



Delta robots for pick and place solutions. The robotics solution is an add-on to the PacDrive product line, designed to satisfy the rapidly rising demand for the integration of robots into machine design: using Lexium 52, Lexium 62 servo motors or Lexium 62 ILM integrated servo motors for robot kinematics with up to 6 axes allows full integration into the PacDrive automation solution. Users can select library functions for integrating robots into the IEC 61131-3-compliant machine program structures of PacDrive LMC Eco/Pro/Pro 2 controllers.

Links to Websites and Downloads:

PacDrive 3 Robotics on www.se.com/us

Catalog DIA3ED2160301EN: PacDrive 3 General Presentation

Catalog DIA3ED2160307EN: Lexium T and P Delta Robots

Lexium Cartesian Robots

Portal axes, Linear tables, Cantilever axes, Multi axes systems.

Links to Websites and Downloads:

Catalog DIA7ED2210101EN: Lexium Cartesian Robots

Lexium CAS 4: Cantilever axes with moving axis body Standardized telescopic axes for a wide range of linear movements.

Lexium MAX: Multi-axis systems for 1, 2 or 3-dimensional positioning solutions.

Lexium PAS, PAD: Portal axes with movable carriage and fixed axis.

Lexium TAS: Linear tables with movable carriage and fixed axis.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Lexium 32i Integrated Servo

Lexium 32i Series Integrated Servo Drives

With servo motor and drive integrated in one housing, the Lexium 32i is designed for application areas requiring high precision and advanced motor control. Unlike traditional servo drives that are installed in a cabinet, the Lexium 32i servo drive is installed directly on the machine to help you improve cost, energy, and can reduce cabinet space by up to 60%. Thanks to standard safety functions (STO), communication options, backup memory card, and its modular design the Lexium 32i sets itself apart in the market place to meet the needs of today's machine builders.

Table 23.9: Lexium 32i Characteristics

Input Voltage	Single phase: 115–240 Vdc 3-phase: 208–480 Vac
Motor Size	400 W–2.1 kW
Control Options	CANopen, CANmotion, EtherCAT, ProfiNet

Links to Websites and Downloads:

Lexium 32i Integrated Servo Drives on www.se.com/us

SoMove FDT Standalone Commissioning (Free) Software

Motion Sizer (Free) Software



Lexium 62 ILM

Lexium 62 ILM Integrated Servo Modules

Lexium 62 ILM integrated servo modules can be controlled with all PacDrive LMC Pro and Eco series motion controllers via Sercos communication. All of the system's main components are equipped with electronic name plates that allow the controller to automatically detect and configure the drives.

Links to Websites and Downloads:

Lexium 62 ILM on www.se.com/us

Catalog DIA7ED2160306EN: Lexium 62 ILM Integrated Servo Modules

Lexium ILA, ILE, ILS Integrated Drives

The Lexium ILA, ILE, and ILS drive series is an integrated, or combination, drive and motor series. This series comes in 3 different motor versions (DC brushless, stepper, and servo). Safe Torque Off (STO), highly customizable cable entry and communication options combined with detailed user guides, function blocks, and sample code, make this product ideal for use with both our Modicon and 3rd party controllers.



Lexium ILA
Combination Stepper Motor



Lexium ILE
Combination DC Brushless Motor



Lexium ILS
Combination Stepper Motor

Table 23.10: Lexium ILx Characteristics

Input Voltage	12–48 Vdc
Motor Size	150–305 W
Control Options	CANopen, Modbus TCP/IP, Ethernet/IP, EtherCAT, Ethernet Powerlink, Modbus RS485, DeviceNet, Profibus DP, Pulse & Direction, & Motion Table

Links to Websites and Downloads:

Lexium ILA, ILE, and ILS Integrated Drives on www.se.com/us

Lexium CT Commissioning (Free) Software

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


Lexium 28
Servo Drive


BCH2 Servo Motor

Lexium 28 Series Servo Drives and Motors

Optimized for easy integration and commissioning through Pulse & Direction, Analog, CanOpen, or CanMotion technology. Thanks to its compact form factor, and Safe Torque Off (STO) capability; the Lexium 28 range of AC-servo drives and motors from Schneider Electric delivers industry-leading performance and value.

Table 23.11: Lexium 28 Characteristics

Input Voltage	200/240 Vac
Motor Size	50 W–4. 5 kW
Control Options	CANopen, CANmotion, EtherCat, Pulse & Direction, Analog, & Motion Table

Links to Websites and Downloads:

Lexium 28 Servo Drives and Motors on www.se.com/us

Catalog DIA7ED2150401EN: Lexium 28 Servo Drives and BCH2 Servo Motors

SoMove Commissioning (Free) Software

Motion Sizer (Free) Software


Lexium 32
Servo Drive


BMH Servo Motor


BSH Servo Motor

Lexium 32 Series Servo Drives and Motors

The Lexium 32 servo drive offer is designed to simplify the life cycle of machines. SoMove setup software, a backup memory card, side-by-side mounting, and easily accessible color-coded plug-in connectors all help to make installation, setup, and maintenance easier. The compact size of the servo drives and servo motors provides maximum power in the minimum space, which helps to reduce overall machine size and costs. The ability to use 3rd party motors, multiple communication cards, as well as standard encoders, enable adaptation to numerous types of control system architecture for industry. An integrated safety function and access to additional safety functions reduce design times and make it easier to comply with safety standards.

Table 23.12: Lexium 32 Characteristics

Input Voltage	Single phase: 115–240 Vdc 3–phase: 208–480 Vac
Motor Size	150 W–7 kW (up to 11 kW with 3rd party motors)
Control Options	CANopen, CANmotion, Modbus TCP, Modbus Serial, EtherCat, Sercos III, Profibus DP, DeviceNet, EtherNet/IP, Pulse & Direction, Analog, & Motion Table

Links to Websites and Downloads:

Lexium 32 Servo Drives and Motors on www.se.com/us

SoMove FDT Standalone (Free) Commissioning Software

Motion Sizer (Free) Software

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



PacDrive Family

PacDrive 3 for Motion Centric Machines

PacDrive 3 is based upon proven logic motion technology, which unifies PLC, motion, and robotics control functionality on a single hardware platform. With its centralized system architecture, PacDrive 3 is the ideal solution for controlling a broad range of servo-driven production and packaging machines, as well as material handling equipment and robotics, using fully integrated, IEC 61131-3-compliant program structures. More than 80,000 machines worldwide are controlled by PacDrive to this day.



PacDrive 3 Robotics
Lexium T and Lexium P Delta Robots

Links to Websites and Downloads on www.se.com/us

PacDrive 3 – A Complete Solution for Motion Centric Machines

Catalog DIA3ED2160301EN: PacDrive 3 General Presentation

Motion Sizer (Free) Software

EcoStruxure™ Machine Expert Programming Software

PacDrive 3 LMC Pro / LMC Eco Controllers

PacDrive LMC motion controllers are a broad family of twelve different controllers, with a powerful CPU for applications requiring 0 to 130 synchronized axes (at 1 msec network update rate)

- up to 130 servo axes, and up to 255 virtual axes
- with multiple fieldbuses used in parallel to Sercos: CANopen, Profibus DP, etc.

All controllers are software-compatible, thanks to EcoStruxure™ Machine Expert programming software, a Logic Motion Runtime software: v same runtime v same libraries v same engineering tool v same diagnostic tools v same support of drives, IOs, etc. Up to 4096 dynamic electronic cam disks can be programmed to operate in parallel. The program can switch between electronic cam disks during operation. All controllers have an integrated PLC (5 µsec for 1000-bit instructions).



Links to Websites and Downloads:

PacDrive 3 LMC Pro / LMC Eco on www.se.com/en

PacDrive 3 LMC Eco/Pro2 Motion Controllers Catalog Document Number DIA7ED2160303EN

Modicon M262 Logic/Motion Controller

IIoT-ready Logic and Motion Controller for Performance Machines



With embedded Cloud protocols such as MQTT, OPC UA Server and Client, API, and TLS encryption, **Modicon** M262, our IIoT-ready logic and motion controller, can be directly connected to the cloud and push data to EcoStruxure Machine Advisor while taking care of cybersecurity. As an edge controller, it provides benchmark performance with 3 ns/inst. for logic applications and up to 24 synchronized axes in 4 ms or 8 axes in 1 ms for motion with an all-in-one motion controller. With its dual-core CPU, it efficiently manages parallel application and communication.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Image Callout

Lexium MC12 Multi Carrier

The Lexium MC 12 Multi Carrier System is an innovative transportation system for moving, positioning or grouping objects in machines for discrete processes. It consists of long stator motors on which multiple carrier units can be moved independently from each other. This creates new freedom for designing faster and more flexible machines with less footprint. Typical fields of applications are, for example, packaging and filling processes or assembly applications.

Links to Websites and Downloads:

Lexium MC12 Multi Carrier on www.se.com/us

Lexium MC12 Catalog Document Number DIA7ED2210701EN



Lexium SD3 Stepper Drives and Motors

Lexium SD3 and Motors

3-phase stepper drives and stepper motors for motion control.

The Lexium SD3 with its excellent constant velocity characteristics is ideal for applications such as scanning. High torque is available even at low speeds. Therefore, the stepper motor is particularly suitable for short-distance positioning, such as labelling. It also provides a high holding torque, yet another advantage that makes it an optimum solution in applications such pick and place, etc.

Links to Websites and Downloads:

SD3 Stepper Drives and Motors on www.se.com/us

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Modicon M171/M172/M173

Flexible and Scalable Performance

Whether you specialize in chillers, Air Handling Units for commercial buildings, residential, or industrial applications, with Modicon M171/M172/M173 logic controllers, EcoStruxure Machine is well positioned: Multiple BMS connectivity, embedded or as an option, and an embedded web server make remote control and remote access simple to implement, while a unique software environment supports the development of algorithms and functions that can be used on any platform.

Connected

Modicon M171/M172/M173 logic controllers offer a wide choice of connectivity options to support integration with a variety of BMS: A ready-to-connect device, the Modicon M172 embeds Ethernet, Modbus, and BACnet protocols as standard and LonWorks or Konnex protocols as optional. Furthermore, the integrated webserver enables solutions for remote control or cloud connectivity. It simplifies the maintenance thanks to the built-in WebVisu that is compatible with standard Web browsers.

Efficient

EcoStruxure Machine Expert - HVAC 2.0 provides advanced algorithms for greater energy efficiency in Modicon M171/M172/M173-based automation. Ready-to-use TVDAs (tested, validated, and documented architectures) and AFBs- (application function block) libraries dedicated to HVAC applications are reducing the time to market.

Sustainable

Modicon M171/M172/M173 products adhere to refrigerant compliance and RoHS guidelines. Also see more information on sustainability products on www.se.com/us.



Links to Websites and Downloads on www.se.com/us

Modicon M171/M172/M73 Logic Controllers on www.se.com/us

Modicon M171/M172/M173 Catalog Document Number DIA3ED2151001EN

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

M171 Logic Controllers

Features:

- Simple and compact machines
- Minimal installation time — (DIN rail or flush mounting)



TM171OD14R



TM171OBM22R



TM171OF22R

Links to Websites and Downloads on www.se.com/us

- Catalog: **Modicon M171/M172/M173 Logic Controllers for HVAC and Pumping Applications** Document Number DIA3ED2151001EN
- Visit **Modicon M171/M172/M73 Logic Controllers** on www.se.com/us for:
  - Complete product and accessory listings
  - Product selector
  - Related catalogs and technical documentation
  - Software and firmware downloads

M172 Logic Controllers

Logic controllers for any size of connectable or connected HVAC machine: manage small to large HVAC machines, and boosters for buildings, connectable to BMS or the cloud.



TM172PDG28SI



TM172DCLFG

Links to Websites and Downloads on www.se.com/us

- Catalog: **Modicon M171/M172/M173 Logic Controllers for HVAC and Pumping Applications** Document Number DIA3ED2151001EN
- Visit **Modicon M171/M172/M73 Logic Controllers** on www.se.com/us for:
  - Complete product and accessory listings
  - Product selector
  - Related catalogs and technical documentation
  - Software and firmware downloads

M173 Logic Controllers

New!

Features:

- Sustainability Product
- 1MB — to support simple and complex programs
- Adaptive — One unit for super compact machines; for bigger machines, just add I/O expansions
- Multiple connection capabilities (Modbus RTU client and server, CANopen, USB-C, Remote display bus
- Flexible and configurable
- Integrated EEVD
- Ready-to-use assets — many templates, libraries, function blocks available
- IoT on deck — straightforward connection to the Secure Interface: cybersecure IoT module



TM173ODM22R



TM173OBM22R

Table 23.13: Modicon TM173O PLCs

Description	Catalog Number
TM173 optimized, display, 22 IOs, 24 Vac/dc, 2 x RS485	TM173ODM22R
TM173 optimized, display, 22 IOs, 24 Vac/dc, 2 x RS485, 2 x SSR	TM173ODM22S
TM173 optimized, 22 IOs, 24 Vac/dc, 2 x RS485	TM173OBM22R

Links to Websites and Downloads on www.se.com/us

- Catalog: **Modicon M171/M172/M173 Logic Controllers for HVAC and Pumping Applications** Document Number DIA3ED2151001EN
- Visit **Modicon M171/M172/M73 Logic Controllers** on www.se.com/us for:
  - Complete product and accessory listings
  - Product selector
  - Related catalogs and technical documentation
  - Software and firmware downloads

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Section 24

Universal Enclosures



Panel**SeT** SFN



Spacial Steel Enclosures



Thalassa Polyester Enclosures



Ventilation Systems with Filters

Product Summary 24-2

- PanelSeT SFN Modular Steel Enclosures 24-2
- Spacial™ Steel Enclosures 24-2
- Thalassa™ Polyester Enclosures 24-2
- ClimaSys™ Thermal Management System 24-3
- Our Software Suite 24-3
- NEMA® and UL Enclosure Ratings 24-3
- UL Listing 24-3

Product Selection 24-4

- Spacial™ Steel Enclosures 24-4
  - Steel Floor-Standing Enclosures 24-4
  - Stainless Steel Floor-Standing Enclosures 24-5
  - Steel Wall-Mounting Enclosures 24-6
- Thalassa™ Polyester Enclosures 24-7
  - Polyester Wall-Mounting Enclosures 24-7
- ClimaSys™ Thermal Management System 24-7
  - Ventilation Systems with Filters 24-7
  - Thermal Control 24-8

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



New!

PanelSeT SFN Modular Steel Enclosures

Panel**SeT** SFN is a newly designed modular steel floor standing enclosure that is suitable to build panel assemblies.

- Reduced carbon footprint: manufactured with 50% steel produced from recycled materials and renewable energy.
- Increased robustness: for better reliability of industrial processes and equipment durability.
- Unparalleled flexibility in panel-building operations, and stock and flow management.
- Improved operational efficiency with new functionalities reducing time throughout the entire process.

Refer to catalog UEMKCAT034EN: **Universal Enclosures Quick Selection Guide** on www.se.com/us.

Also, for a complete listing of products and related documentation, visit **PanelSeT** on www.se.com/us.



Spacial™ Steel Enclosures

Metal enclosures and boxes

From our small boxes to large modular floor-standing enclosures, with the Spacial range you can find the optimal fit for your applications. Our extensive range of easy-to-use accessories helps you save time during your projects.

Select between steel or stainless steel to better suit the installation environment. In our stainless-steel offer you can find the optimal solution where cleanliness or protection in highly corrosive environments are required.

Steel: Indoor non-clean industrial environment

The environment in industrial plants can subject electric and electronic components to dust, splashing oil, and impacts. Such environments require a range of enclosures that are suited to harsh conditions yet are easy to install.

- **Universal range**, for industry.
- **EMC (electromagnetic compatibility) range**, against electromagnetic disturbances (treated with Aluzinc).

304L - 316L stainless steel: Demanding industrial environment

Food and beverage, pharmaceutical, petrochemical, and infrastructure industries have particularly demanding hygiene and corrosion resistance requirements. Our Spacial range is available in two grades of stainless steel:

- **304L stainless steel**, for resistance to corrosion and ease of cleaning (often used in food production environments).
- **316L stainless steel, also known as "marine stainless steel,"** for very high resistance to corrosion (used in saline or chlorinated environments).
- **Range of ATEX enclosures**, for potentially explosive atmospheres.

Product family names:
Spacial S24: *Steel safety boxes*
Spacial S3CM: *Steel enclosures for HMI*
Spacial SDB: *Boxes for harsh environments*
Spacial SBM: *Comprehensive range of steel industrial boxes*
Spacial S3D and S3DC: *Steel wall-mounting enclosures*
Spacial SM: *Compact metal enclosures*
Spacial SF: *Modular metal enclosures*
Spacial S3X: *Stainless-steel wall-mounting enclosures*
Spacial SMX: *Stainless-steel monobloc floor-standing enclosures*
Spacial SFX: *Stainless-steel modular enclosures*

For a complete listing of Spacial steel enclosures and related documentation, visit **Metallic Enclosures** and **Stainless-Steel Enclosures** on www.se.com/us.



Thalassa™ Polyester Enclosures

Insulated enclosures and boxes

Without the right protection, harsh environments can expose your installation to chemicals or other substances.

Developed to help protect your equipment in outdoor applications or harsh conditions, our Thalassa offer ranges from boxes to floor-standing enclosures made from fiberglass reinforced polyester.

Our Thalassa industrial boxes in ABS or polycarbonate are strong, easy to install, and designed to be used in highly demanding environments.

Insulating polyester and plastic materials (ABS, polycarbonate): Outdoor infrastructures and severe industrial environments

Outdoor infrastructures and electrical installations are exposed to direct sunlight, rain, saline mist, extreme temperatures, oil splashes, chemical and corrosive agents, and are in contact with the public.

- **Universal range**, for industry.
- **Range of ATEX enclosures**, for potentially explosive atmospheres.

Product family names:
Thalassa PLS: *Insulating polyester and polycarbonate modular boxes*
Thalassa TBP: *Polycarbonate industrial boxes for all-purpose applications*
Thalassa TBS: *ABS industrial boxes for all-purpose applications*
Thalassa PLM: *Polyester wall-mounting enclosures*
Thalassa PLA: *Polyester floor-standing enclosures*

For a complete listing of Thalassa enclosures and related documentation, visit **Industrial Enclosures** on www.se.com/us.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

ClimaSys™ Thermal Management System

Thermal Management

Preserving and keeping the right temperature inside your enclosure is vital for maximizing the average service life of your installed devices. With our ClimaSys offer you can find the right solution, be it ventilation, cooling or heating, including control units for temperature, humidity and much more.

Product family names:

ClimaSys CR: *Insulated resistance heaters*
ClimaSys CC: *Thermal control*

For a complete listing of products and related documentation, visit **Thermal Management Systems** on www.se.com/us.



ClimaSys CR



ClimaSys CC

Our Software Suite

Spacial.pro


Spacial.pro allows you to make switchboard proposals based on the standard Spacial™ offer. A full project with several sets of switchboards is quoted in minutes, with automatic creation of the bill of material and 2D drawings for front and side views.

ProClima

Calculate the right choice for your thermal management requirements, according to the environment and the electrical/electronic devices installed inside the enclosure.

Spacial.ref and Thalassa.ref

These digital rules assist you in selecting the appropriate components for your application from our extensive product range. The tool automates product and accessory selection to help save you time and money.

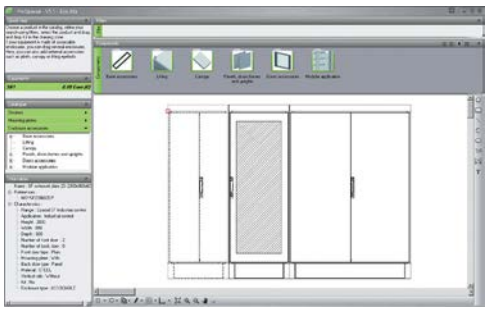

NEMA® and UL Enclosure Ratings

Table 24.1: NEMA and UL Enclosure and Component Ratings

Enclosures		Type of protection *[1]*												
		1	2	3	3R	3S	4	4X	5	6	6P	12	12K	13
Steel wall-mounting enclosures	S3DC	●	●	● *[2]*	● *[2]*		● *[2]*	● *[2]*				● *[3]*	● *[3]*	● *[3]*
	CRN	●	● *[2]*	● *[2]*	● *[2]*		● *[2]*		● *[2]*			●		●
Stainless-steel wall-mounting enclosures	S3X	●	● *[2]*	● *[2]*	● *[2]*		● *[2]*	● *[2]*	● *[2]*			●	● *[3]*	● *[2]*
Steel floor-standing enclosures	SM	●	● *[2]*	● *[2]*	● *[2]*		● *[2]*		● *[2]*			●	●	● *[2]*
Steel modular enclosures	SF	●										●	●	
Stainless-steel floor-standing enclosures	SMX	●	● *[2]*	● *[2]*	● *[2]*		● *[2]*	● *[2]*	● *[2]*			●	●	● *[2]*
Stainless-steel modular enclosures	SFX	●										●	●	
Thermoplastic boxes	TBS - TBP	●		●		●	●	●						
Polyester modular boxes	PLS	●	●	●	●	●	●	●				●		●
Polyester wall-mounting enclosures	PLM	●	●	●	●	●	●	●				●		●
Polyester floor-standing enclosures	PLA	●	●	● *[2]*	● *[2]*		● *[2]*	● *[2]*	● *[2]*			●		●

Components		Type of protection *[1]*												
		1	2	3	3R	3S	4	4X	5	6	6P	12	12K	13
Ventilation system	CV											●	●	
Thermal regulation system	CC											●	●	

UL Listing

Table 24.2: UL File Numbers for Enclosures



Standard Enclosure Type	UL File Number
NSYSM	E103582
NSYSF	E80264
NSYSMX	E103582
NSYSFX	UL Certification pending
NSYSCRN	E103582
NSYSCRNG	E80264
NSYS3DC	E80264
NSYS3X	E103582
NSYSPLA	E103582
NSYSPLM	E103582

[1] In some ranges the classification depends on the model and version. The detailed protection types are indicated in the UL certifications.
[2] 1 door
[3] 2 doors

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Steel Floor-Standing Enclosures

Table 24.3: Spacial Steel Floor-Standing Enclosures

Height: mm (in)	Width: mm (in)	Depth: mm (in)	# Doors	NSYSM Welded *[1]*	NSYSF Modular *[1]*		Accessories, Floor-Standing Enclosures			
				Without mounting plate	Without mounting plate	2 Side panels	Mounting plate	Cable-gland plate, 1 entry	Plinth height 100 mm (3.9 in)	
									Front/back	Sides
										
1200 (47.2)	600 (23.6)	400 (15.7)	1	—	NSYSF12640	NSY2SP124	NSYMP126	NSYEC641	NSYSPF6100	NSYSPS4100
1200 (47.2)	600 (23.6)	600 (23.6)	1	—	NSYSF12660	NSY2SP126	NSYMP126	NSYEC661	NSYSPF6100	NSYSPS6100
1200 (47.2)	800 (31.5)	300 (11.8)	1	NSYSM12830	—	—	NSYMP128	—	NSYSPF8100	NSYSPS3100
1200 (47.2)	800 (31.5)	400 (15.7)	1	—	NSYSF12840	NSY2SP124	NSYMP128	NSYEC841	NSYSPF8100	NSYSPS4100
1200 (47.2)	800 (31.5)	600 (23.6)	1	—	NSYSF12860	NSY2SP126	NSYMP128	NSYEC861	NSYSPF8100	NSYSPS6100
1200 (47.2)	1000 (39.4)	300 (11.8)	2	NSYSM1210302D	—	—	NSYMP1210	—	NSYSPF10100	NSYSPS3100
1200 (47.2)	1200 (47.2)	400 (15.7)	2	NSYSM1212402D	—	—	NSYMP1212	—	NSYSPF12100	NSYSPS4100
1400 (55.1)	600 (23.6)	300 (11.8)	1	NSYSM14630	—	—	NSYMP146	—	NSYSPF6100	NSYSPS3100
1400 (55.1)	600 (23.6)	400 (15.7)	1	NSYSM14640	NSYSF14640	NSY2SP144	NSYMP146	NSYEC641	NSYSPF6100	NSYSPS4100
1400 (55.1)	800 (31.5)	300 (11.8)	1	NSYSM14830	—	—	NSYMP148	—	NSYSPF8100	NSYSPS3100
1400 (55.1)	800 (31.5)	400 (15.7)	1	NSYSM14840	NSYSF14840	NSY2SP144	NSYMP148	NSYEC841	NSYSPF8100	NSYSPS4100
1400 (55.1)	1000 (39.4)	400 (15.7)	2	NSYSM1410402D	—	—	NSYMP1410	—	NSYSPF10100	NSYSPS4100
1400 (55.1)	1200 (47.2)	400 (15.7)	2	NSYSM1412402D	—	—	NSYMP1412	—	NSYSPF12100	NSYSPS4100
1600 (63.0)	600 (23.6)	300 (11.8)	1	NSYSM16630	—	—	NSYMP166	—	NSYSPF6100	NSYSPS3100
1600 (63.0)	600 (23.6)	400 (15.7)	1	NSYSM16640	—	—	NSYMP166	—	NSYSPF6100	NSYSPS4100
1600 (63.0)	600 (23.6)	600 (23.6)	1	—	NSYSF16660	NSY2SP166	NSYMP166	NSYEC661	NSYSPF6100	NSYSPS6100
1600 (63.0)	600 (23.6)	800 (31.5)	1	—	NSYSF16680	NSY2SP168	NSYMP166	NSYEC681	NSYSPF6100	NSYSPS8100
1600 (63.0)	800 (31.5)	300 (11.8)	1	NSYSM16830	—	—	NSYMP168	—	NSYSPF8100	NSYSPS3100
1600 (63.0)	800 (31.5)	400 (15.7)	1	NSYSM16840	—	—	NSYMP168	—	NSYSPF8100	NSYSPS4100
1600 (63.0)	800 (31.5)	600 (23.6)	1	—	NSYSF16860	NSY2SP166	NSYMP168	NSYEC861	NSYSPF8100	NSYSPS6100
1600 (63.0)	800 (31.5)	800 (31.5)	1	—	NSYSF16880	NSY2SP168	NSYMP168	NSYEC881	NSYSPF8100	NSYSPS8100
1600 (63.0)	1000 (39.4)	300 (11.8)	2	NSYSM1610302D	—	—	NSYMP1610	—	NSYSPF10100	NSYSPS3100
1600 (63.0)	1000 (39.4)	400 (15.7)	2	NSYSM1610402D	—	—	NSYMP1610	—	NSYSPF10100	NSYSPS4100
1600 (63.0)	1200 (47.2)	300 (11.8)	2	NSYSM1612302D	—	—	NSYMP1612	—	NSYSPF12100	NSYSPS3100
1600 (63.0)	1200 (47.2)	400 (15.7)	2	NSYSM1612402D	—	—	NSYMP1612	—	NSYSPF12100	NSYSPS4100
1800 (70.9)	400 (15.7)	400 (15.7)	1	—	NSYSF18440	NSY2SP184	—	NSYEC441	NSYSPF4100	NSYSPS4100
1800 (70.9)	400 (15.7)	500 (19.7)	1	—	NSYSF18450	NSY2SP185	—	NSYEC451	NSYSPF4100	NSYSPS5100
1800 (70.9)	400 (15.7)	600 (23.6)	1	—	NSYSF18460	NSY2SP186	—	NSYEC461	NSYSPF4100	NSYSPS6100
1800 (70.9)	600 (23.6)	300 (11.8)	1	NSYSM18630	—	—	NSYMP186	—	NSYSPF6100	NSYSPS3100
1800 (70.9)	600 (23.6)	400 (15.7)	1	NSYSM18640	NSYSF18640	NSY2SP184	NSYMP186	NSYEC641	NSYSPF6100	NSYSPS4100
1800 (70.9)	600 (23.6)	500 (19.7)	1	NSYSM18650	NSYSF18650	NSY2SP185	NSYMP186	NSYEC651	NSYSPF6100	NSYSPS5100
1800 (70.9)	600 (23.6)	600 (23.6)	1	—	NSYSF18660	NSY2SP186	NSYMP186	NSYEC661	NSYSPF6100	NSYSPS6100
1800 (70.9)	600 (23.6)	800 (31.5)	1	—	—	NSY2SP188	NSYMP186	NSYEC681	NSYSPF6100	NSYSPS8100
1800 (70.9)	800 (31.5)	300 (11.8)	1	NSYSM18830	—	—	NSYMP188	—	NSYSPF8100	NSYSPS3100
1800 (70.9)	800 (31.5)	400 (15.7)	1	NSYSM18840	NSYSF18840	NSY2SP184	NSYMP188	NSYEC841	NSYSPF8100	NSYSPS4100
1800 (70.9)	800 (31.5)	500 (19.7)	1	NSYSM18850	NSYSF18850	NSY2SP185	NSYMP188	NSYEC851	NSYSPF8100	NSYSPS5100
1800 (70.9)	800 (31.5)	600 (23.6)	1	NSYSM18860	NSYSF18860	NSY2SP186	NSYMP188	NSYEC861	NSYSPF8100	NSYSPS6100
1800 (70.9)	800 (31.5)	600 (23.6)	2	—	NSYSF188602D	NSY2SP186	NSYMP188	NSYEC861	NSYSPF8100	NSYSPS6100
1800 (70.9)	1000 (39.4)	400 (15.7)	1	NSYSM181040	NSYSF181040	NSY2SP184	NSYMP1810	NSYEC1041	NSYSPF10100	NSYSPS4100
1800 (70.9)	1000 (39.4)	400 (15.7)	2	NSYSM1810402D	NSYSF1810402D	NSY2SP184	NSYMP1810	NSYEC1041	NSYSPF10100	NSYSPS4100
1800 (70.9)	1000 (39.4)	500 (19.7)	1	—	NSYSF181050	NSY2SP185	NSYMP1810	NSYEC1051	NSYSPF10100	NSYSPS5100
1800 (70.9)	1000 (39.4)	500 (19.7)	2	NSYSM1810502D	—	—	NSYMP1810	—	NSYSPF10100	NSYSPS5100
1800 (70.9)	1000 (39.4)	600 (23.6)	1	—	NSYSF181060	NSY2SP186	NSYMP1810	NSYEC1061	NSYSPF10100	NSYSPS6100
1800 (70.9)	1000 (39.4)	600 (23.6)	2	—	NSYSF1810602D	NSY2SP186	NSYMP1810	NSYEC1061	NSYSPF10100	NSYSPS6100
1800 (70.9)	1200 (47.2)	400 (15.7)	2	NSYSM1812402D	NSYSF1812402D	NSY2SP184	NSYMP1812	NSYEC1241	NSYSPF12100	NSYSPS4100
1800 (70.9)	1200 (47.2)	500 (19.7)	2	NSYSM1812502D	NSYSF1812502D	NSY2SP185	NSYMP1812	NSYEC1251	NSYSPF12100	NSYSPS5100
1800 (70.9)	1200 (47.2)	600 (23.6)	2	—	NSYSF1812602D	NSY2SP186	NSYMP1812	NSYEC1261	NSYSPF12100	NSYSPS6100
1800 (70.9)	1600 (63.0)	400 (15.7)	2	NSYSM1816402D	—	—	NSYMP1816	—	NSYSPF16100	NSYSPS4100
1800 (70.9)	1600 (63.0)	500 (19.7)	2	NSYSM1816502D	—	—	NSYMP1816	—	NSYSPF16100	NSYSPS5100
2000 (78.7)	300 (11.8)	500 (19.7)	1	—	NSYSF20350	NSY2SP205	—	NSYEC351	NSYSPF3100	NSYSPS5100
2000 (78.7)	300 (11.8)	600 (23.6)	1	—	NSYSF20360	NSY2SP206	—	NSYEC361	NSYSPF3100	NSYSPS6100
2000 (78.7)	400 (15.7)	400 (15.7)	1	—	NSYSF20440	NSY2SP204	—	NSYEC441	NSYSPF4100	NSYSPS4100
2000 (78.7)	400 (15.7)	500 (19.7)	1	—	NSYSF20450	NSY2SP205	—	NSYEC451	NSYSPF4100	NSYSPS5100
2000 (78.7)	400 (15.7)	600 (23.6)	1	—	NSYSF20460	NSY2SP206	—	NSYEC461	NSYSPF4100	NSYSPS6100
2000 (78.7)	400 (15.7)	800 (31.5)	1	—	NSYSF20480	NSY2SP208	—	NSYEC481	NSYSPF4100	NSYSPS8100
2000 (78.7)	600 (23.6)	300 (11.8)	1	NSYSM20630	—	—	NSYMP206	—	NSYSPF6100	NSYSPS3100
2000 (78.7)	600 (23.6)	400 (15.7)	1	NSYSM20640	NSYSF20640	NSY2SP204	NSYMP206	NSYEC641	NSYSPF6100	NSYSPS4100
2000 (78.7)	600 (23.6)	500 (19.7)	1	NSYSM20650	NSYSF20650	NSY2SP205	NSYMP206	NSYEC651	NSYSPF6100	NSYSPS5100
2000 (78.7)	600 (23.6)	600 (23.6)	1	—	NSYSF20660	NSY2SP206	NSYMP206	NSYEC661	NSYSPF6100	NSYSPS6100
2000 (78.7)	600 (23.6)	800 (31.5)	1	—	NSYSF20680	NSY2SP208	NSYMP206	NSYEC681	NSYSPF6100	NSYSPS8100
2000 (78.7)	800 (31.5)	300 (11.8)	1	NSYSM20830	—	—	NSYMP208	—	NSYSPF8100	NSYSPS3100
2000 (78.7)	800 (31.5)	400 (15.7)	1	NSYSM20840	NSYSF20840	NSY2SP204	NSYMP208	NSYEC841	NSYSPF8100	NSYSPS4100
2000 (78.7)	800 (31.5)	500 (19.7)	1	NSYSM20850	NSYSF20850	NSY2SP205	NSYMP208	NSYEC851	NSYSPF8100	NSYSPS5100
2000 (78.7)	800 (31.5)	600 (23.6)	1	NSYSM20860	NSYSF20860	NSY2SP206	NSYMP208	NSYEC861	NSYSPF8100	NSYSPS6100

[1] See Table 24.2 UL File Numbers for Enclosures, page 24-3.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Table 24.3 Spacial Steel Floor-Standing Enclosures (cont'd.)

Height: mm (in)	Width: mm (in)	Depth: mm (in)	# Doors	NSYSM Welded [2]	NSYSF Modular [2]		Accessories, Floor-Standing Enclosures			
				Without mounting plate	Without mounting plate	2 Side panels	Mounting plate	Cable-gland plate, 1 entry	Plinth height 100 mm (3.9 in)	
									Front/back	Sides
2000 (78.7)	800 (31.5)	600 (23.6)	2	—	NSYSF208602D	NSY2SP206	NSYMP208	NSYEC861	NSYSPF8100	NSYSPS6100
2000 (78.7)	800 (31.5)	800 (31.5)	1	—	NSYSF20880	NSY2SP208	NSYMP208	NSYEC881	NSYSPF8100	NSYSPS8100
2000 (78.7)	1000 (39.4)	400 (15.7)	1	—	NSYSF201040	NSY2SP204	NSYMP2010	NSYEC1041	NSYSPF10100	NSYSPS4100
2000 (78.7)	1000 (39.4)	400 (15.7)	2	NSYSM2010402D	NSYSF2010402D	NSY2SP204	NSYMP2010	NSYEC1041	NSYSPF10100	NSYSPS4100
2000 (78.7)	1000 (39.4)	500 (19.7)	1	—	NSYSF201050	NSY2SP205	NSYMP2010	NSYEC1051	NSYSPF10100	NSYSPS5100
2000 (78.7)	1000 (39.4)	500 (19.7)	2	NSYSM2010502D	NSYSF2010502D	NSY2SP205	NSYMP2010	NSYEC1051	NSYSPF10100	NSYSPS5100
2000 (78.7)	1000 (39.4)	600 (23.6)	1	—	NSYSF201060	NSY2SP206	NSYMP2010	NSYEC1061	NSYSPF10100	NSYSPS6100
2000 (78.7)	1000 (39.4)	600 (23.6)	2	—	NSYSF2010602D	NSY2SP206	NSYMP2010	NSYEC1061	NSYSPF10100	NSYSPS6100
2000 (78.7)	1000 (39.4)	800 (31.5)	1	—	NSYSF201080	NSY2SP208	NSYMP2010	NSYEC1081	NSYSPF10100	NSYSPS8100
2000 (78.7)	1200 (47.2)	400 (15.7)	2	NSYSM2012402D	NSYSF2012402D	NSY2SP204	NSYMP2012	NSYEC1241	NSYSPF12100	NSYSPS4100
2000 (78.7)	1200 (47.2)	500 (19.7)	2	NSYSM2012502D	NSYSF2012502D	NSY2SP205	NSYMP2012	NSYEC1251	NSYSPF12100	NSYSPS5100
2000 (78.7)	1200 (47.2)	600 (23.6)	2	NSYSM2012602D	NSYSF2012602D	NSY2SP206	NSYMP2012	NSYEC1261	NSYSPF12100	NSYSPS6100
2000 (78.7)	1200 (47.2)	800 (31.5)	2	—	NSYSF2012802D	NSY2SP208	NSYMP2012	NSYEC1281	NSYSPF12100	NSYSPS8100
2000 (78.7)	1600 (63.0)	400 (15.7)	2	NSYSM2016402D	—	NSY2SP204	NSYMP2016	NSYEC1641	NSYSPF16100	NSYSPS4100
2000 (78.7)	1600 (63.0)	500 (19.7)	2	NSYSM2016502D	NSYSF2016502D	NSY2SP205	NSYMP2016	NSYEC1651	NSYSPF16100	NSYSPS5100
2000 (78.7)	1600 (63.0)	600 (23.6)	2	NSYSM2016602D	NSYSF2016602D	NSY2SP206	NSYMP2016	NSYEC1661	NSYSPF16100	NSYSPS6100
2200 (86.6)	400 (15.7)	600 (23.6)	1	—	NSYSF22460	NSY2SP226	—	NSYEC461	NSYSPF4100	NSYSPS6100
2200 (86.6)	600 (23.6)	600 (23.6)	1	—	NSYSF22660	NSY2SP226	NSYMP226	NSYEC661	NSYSPF6100	NSYSPS6100
2200 (86.6)	600 (23.6)	800 (31.5)	1	—	NSYSF22680	NSY2SP228	NSYMP226	NSYEC681	NSYSPF6100	NSYSPS8100
2200 (86.6)	800 (31.5)	600 (23.6)	1	—	NSYSF22860	NSY2SP226	NSYMP228	NSYEC861	NSYSPF8100	NSYSPS6100
2200 (86.6)	800 (31.5)	800 (31.5)	1	—	NSYSF22880	NSY2SP228	NSYMP228	NSYEC881	NSYSPF8100	NSYSPS8100
2200 (86.6)	1000 (39.4)	600 (23.6)	1	—	NSYSF221060	NSY2SP226	NSYMP2210	NSYEC1061	NSYSPF10100	NSYSPS6100
2200 (86.6)	1200 (47.2)	600 (23.6)	2	—	NSYSF2212602D	NSY2SP226	NSYMP2212	NSYEC1261	NSYSPF12100	NSYSPS6100
2200 (86.6)	1200 (47.2)	800 (31.5)	2	—	NSYSF2212802D	NSY2SP228	NSYMP2212	NSYEC1281	NSYSPF12100	NSYSPS8100

Stainless Steel Floor-Standing Enclosures

Table 24.4: Spacial Stainless Steel Floor-Standing Enclosures

Height: mm (in)	Width: mm (in)	Depth: mm (in)	# Doors	NSYSMX [2]	NSYSFX Modular [2]		Accessories, Stainless Steel		
				Without mounting plate	Without mounting plate	2 Side panels	Mounting plate	Plinth height 100 mm (3.9 in)	
								Front/back	Sides
									
1400 (55.1)	1000 (39.4)	300 (11.8)	2	NSYSMX141030	—	—	NSYMP1410	NSYSPXF10100H	NSYSPXS3100H
1600 (63.0)	800 (31.5)	400 (15.7)	1	NSYSMX16840	—	—	NSYMP168	NSYSPXF8100H	NSYSPXS4100H
1800 (70.9)	600 (23.6)	400 (15.7)	1	NSYSMX18640	NSYSFX18640	NSY2SPX184	NSYMP186	NSYSPXF6100H	NSYSPXS4100H
1800 (70.9)	800 (31.5)	400 (15.7)	1	NSYSMX18840	NSYSFX18840	NSY2SPX184	NSYMP188	NSYSPXF8100H	NSYSPXS4100H
1800 (70.9)	1200 (47.2)	400 (15.7)	2	NSYSMX181240	NSYSFX181240	NSY2SPX184	NSYMP1812	NSYSPXF12100H	NSYSPXS4100H
1800 (70.9)	1600 (63.0)	400 (15.7)	2	NSYSMX181640	—	—	NSYMP1813	NSYSPXF16100H	NSYSPXS4100H
2000 (78.7)	600 (23.6)	500 (19.7)	1	—	NSYSFX20650	NSY2SPX205	NSYMP206	—	—
2000 (78.7)	800 (31.5)	400 (15.7)	1	—	NSYSFX20840	NSY2SPX204	NSYMP208	—	—
2000 (78.7)	800 (31.5)	500 (19.7)	1	NSYSMX20850	—	—	NSYMP208	NSYSPXF8100H	NSYSPXS5100H
2000 (78.7)	800 (31.5)	600 (23.6)	1	—	NSYSFX20860	NSY2SPX206	NSYMP208	—	—
2000 (78.7)	1000 (39.4)	400 (15.7)	2	NSYSMX201040	—	—	NSYMP2010	NSYSPXF10100H	NSYSPXS4100H
2000 (78.7)	1000 (39.4)	600 (23.6)	2	—	NSYSFX201060	NSY2SPX206	NSYMP2010	—	
2000 (78.7)	1200 (47.2)	500 (19.7)	2	NSYSMX201250	—	—	NSYMP2012	NSYSPXF12100H	NSYSPXS5100H
2000 (78.7)	1200 (47.2)	600 (23.6)	2	—	NSYSFX201260	NSY2SPX206	NSYMP2012	—	—
2000 (78.7)	1600 (63.0)	600 (23.6)	2	NSYSMX201660	—	—	NSYMP2016	NSYSPXF16100H	NSYSPXS6100H

[2] See Table 24.2 UL File Numbers for Enclosures, page 24-3.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Steel Wall-Mounting Enclosures

Table 24.5: Spacial Steel Wall-Mounting Enclosures



CRN/CRNG



S3DC



S3X Stainless Steel



Mounting Plate

Height: mm (in)	Width: mm (in)	Depth: mm (in)	# Doors *[3]*	Spacial Steel Wall-Mounting Enclosures *[4]*			Mounting Plate
				CRN/CRNG	S3DC	S3X Stainless steel	
200 (7.9)	200 (7.9)	150 (5.9)	1	NSYCRN22150 *[5]*	—	—	NSYMM22
200 (7.9)	300 (11.8)	150 (5.9)	1	NSYCRN23150 *[5]*	—	—	NSYMM32
250 (9.8)	200 (7.9)	150 (5.9)	1	NSYCRN252150	—	—	NSYMM2520
300 (11.8)	200 (7.9)	150 (5.9)	1	—	NSYS3DC3215	NSYS3X3215	NSYMM32
300 (11.8)	250 (9.8)	150 (5.9)	1	NSYCRN325150	—	NSYS3X302515	NSYMM3025
300 (11.8)	250 (9.8)	200 (7.9)	1	NSYCRN325200	—	—	NSYMM3025
300 (11.8)	300 (11.8)	150 (5.9)	1	NSYCRN33150	NSYS3DC3315	NSYS3X3315	NSYMM33
300 (11.8)	300 (11.8)	200 (7.9)	1	NSYCRN33200	NSYS3DC3320	—	NSYMM33
300 (11.8)	400 (15.7)	200 (7.9)	1	NSYCRN34200	—	—	NSYMM43
300 (11.8)	450 (17.7)	150 (5.9)	1	NSYCRN345150 *[5]*	—	—	NSYMM3045
400 (15.7)	300 (11.8)	150 (5.9)	1	NSYCRN43150	NSYS3DC4315	NSYS3X4315	NSYMM43
400 (15.7)	300 (11.8)	200 (7.9)	1	NSYCRN43200	NSYS3DC4320	NSYS3X4320	NSYMM43
400 (15.7)	400 (15.7)	200 (7.9)	1	NSYCRN44200	NSYS3DC4420	NSYS3X4420	NSYMM44
400 (15.7)	600 (23.6)	200 (7.9)		—	—	NSYS3X4620	—
400 (15.7)	600 (23.6)	250 (9.8)	1	NSYCRN46250	—	—	NSYMM64
400 (15.7)	600 (23.6)	300 (11.8)	1	NSYCRN46300	—	—	NSYMM64
500 (19.7)	400 (15.7)	150 (5.9)	1	NSYCRN54150	—	—	NSYMM54
500 (19.7)	400 (15.7)	200 (7.9)	1	NSYCRN54200	NSYS3DC5420	NSYS3X5420	NSYMM54
500 (19.7)	400 (15.7)	250 (9.8)	1	NSYCRN54250	NSYS3DC5425	—	NSYMM54
500 (19.7)	500 (19.7)	200 (7.9)	1	—	NSYS3DC5520	—	NSYMM55
500 (19.7)	500 (19.7)	250 (9.8)	1	NSYCRN55250	NSYS3DC5525	—	NSYMM55
600 (23.6)	400 (15.7)	150 (5.9)	1	NSYCRN64150	—	—	NSYMM64
600 (23.6)	400 (15.7)	200 (7.9)	1	NSYCRN64200	NSYS3DC6420	NSYS3X6420	NSYMM64
600 (23.6)	400 (15.7)	250 (9.8)	1	NSYCRN64250	NSYS3DC6425	—	NSYMM64
600 (23.6)	500 (19.7)	150 (5.9)	1	NSYCRN65150	—	—	NSYMM65
600 (23.6)	500 (19.7)	200 (7.9)	1	NSYCRN65200	—	—	NSYMM65
600 (23.6)	500 (19.7)	250 (9.8)	1	NSYCRN65250	—	—	NSYMM65
600 (23.6)	600 (23.6)	200 (7.9)	1	NSYCRN66200	NSYS3DC6620	—	NSYMM66
600 (23.6)	600 (23.6)	250 (9.8)	1	NSYCRN66250	NSYS3DC6625	NSYS3X6625	NSYMM66
600 (23.6)	600 (23.6)	300 (11.8)	1	NSYCRN66300	NSYS3DC6630	—	NSYMM66
600 (23.6)	800 (31.5)	300 (11.8)	1	NSYCRN68300	—	—	NSYMM86
700 (27.6)	500 (19.7)	200 (7.9)	1	NSYCRN75200	—	—	NSYMM75
700 (27.6)	500 (19.7)	250 (9.8)	1	NSYCRN75250	NSYS3DC7525	NSYS3X7525	NSYMM75
800 (31.5)	600 (23.6)	200 (7.9)	1	NSYCRN86200	NSYS3DC8620	—	NSYMM86
800 (31.5)	600 (23.6)	250 (9.8)	1	NSYCRN86250	NSYS3DC8625	NSYS3X8625	NSYMM86
800 (31.5)	600 (23.6)	300 (11.8)	1	NSYCRN86300	NSYS3DC8630	—	NSYMM86
800 (31.5)	600 (23.6)	400 (15.7)	1	NSYCRNG86400	NSYS3DC8640	—	NSYMM86
800 (31.5)	800 (31.5)	200 (7.9)	1	NSYCRN88200	—	—	NSYMM88
800 (31.5)	800 (31.5)	250 (9.8)	1	—	NSYS3DC8825	—	NSYMM88
800 (31.5)	800 (31.5)	300 (11.8)	1	NSYCRN88300	NSYS3DC8830	NSYS3X8830	NSYMM86
800 (31.5)	1000 (39.4)	300 (11.8)	2	NSYCRNG810300D	—	—	NSYMM108
800 (31.5)	1200 (47.2)	300 (11.8)	2	NSYCRNG812300D	—	—	NSYMM128
1000 (39.4)	600 (23.6)	250 (9.8)	1	NSYCRN106250	NSYS3DC10625	—	NSYMM106
1000 (39.4)	600 (23.6)	300 (11.8)	1	NSYCRN106300	—	—	NSYMM106
1000 (39.4)	600 (23.6)	400 (15.7)	1	NSYCRNG106400	—	—	NSYMM106
1000 (39.4)	800 (31.5)	250 (9.8)	1	NSYCRN108250	NSYS3DC10825	—	NSYMM108
1000 (39.4)	800 (31.5)	300 (11.8)	1	NSYCRN108300	NSYS3DC10830	NSYS3X10830	NSYMM108
1000 (39.4)	800 (31.5)	400 (15.7)	1	NSYCRNG108400	NSYS3DC10840	—	NSYMM108
1000 (39.4)	1000 (39.4)	300 (11.8)	2	NSYCRNG1010300D	NSYS3DC101030	NSYS3X101030	NSYMM1010
1000 (39.4)	1200 (47.2)	300 (11.8)	2	NSYCRNG1012300D	—	—	NSYMM1210
1000 (39.4)	1200 (47.2)	400 (15.7)	2	NSYCRNG1012400D	—	—	NSYMM1210
1200 (47.2)	600 (23.6)	300 (11.8)	1	NSYCRNG126300	—	—	NSYMM126
1200 (47.2)	600 (23.6)	400 (15.7)	1	NSYCRNG126400	—	—	NSYMM126
1200 (47.2)	800 (31.5)	300 (11.8)	1	NSYCRNG128300	NSYS3DC12830	NSYS3X12830	NSYMM128
1200 (47.2)	800 (31.5)	400 (15.7)	1	NSYCRNG128400	NSYS3DC12840	—	NSYMM128
1200 (47.2)	1000 (39.4)	300 (11.8)	2	NSYCRNG1210300D	NSYS3DC121030	NSYS3X121030	NSYMM1210
1200 (47.2)	1000 (39.4)	400 (15.7)	2	NSYCRNG1210400D	—	—	NSYMM1210
1200 (47.2)	1200 (47.2)	300 (11.8)	2	NSYCRNG1212300D	—	—	NSYMM1212
1200 (47.2)	1200 (47.2)	400 (15.7)	2	NSYCRNG1212400D	—	—	NSYMM1212
1400 (55.1)	1000 (39.4)	300 (11.8)	2	NSYCRNG1410300D	—	—	NSYMM1410

[3] IP66 with one door, IP55 with two doors
[4] See Table 24.2 UL File Numbers for Enclosures, page 24-3.
[5] Two cable gland plates, one on top and one on bottom.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Polyester Wall-Mounting Enclosures

Table 24.6: Thalassa Polyester Wall-Mounting Enclosures

	Height: mm (in)	Width: mm (in)	Depth: mm (in)	ABS/PC Wall-Mounting Enclosures IP66 *[6]*	Polyester Wall-Mounting Enclosures IP66 *[6]*	Polyester Wall-Mounting ATEX Enclosures *[6]*	Mounting Plate
				Plain door	Plain door		
 ABS/PC Wall-Mounting Enclosure IP66— Plain Door	310 (12.2)	215 (8.5)	160 (6.3)	NSYPLM32G	—	—	NSYMM32
	308 (12.1)	255 (10 0)	160 (6.3)	—	NSYPLM3025G	NSYPLMEX3025	NSYMM3025
	430 (16.9)	330 (13.0)	200 (7.9)	—	NSYPLM43G	NSYPLMEX43	NSYMM43
	530 (20 9)	430 (16.9)	200 (7.9)	—	NSYPLM54G	NSYPLMEX54	NSYMM54
	647 (25.5)	436 (17.2)	250 (9.8)	—	NSYPLM64G	NSYPLMEX64	NSYMM64
	747 (29.4)	536 (21.1)	300 (11.8)	—	NSYPLM75G	NSYPLMEX75	NSYMM75
	847 (33.3)	636 (25.0)	300 (11.8)	—	NSYPLM86G	NSYPLMEX86	NSYMM86
	1056 (41.6)	852 (33.5)	350 (13.8)	—	NSYPLM108G	NSYPLMEX108	NSYMM108



Ventilation Systems with Filters

Specially recommended for installations in which the ambient temperature is lower than the desired temperature inside the enclosure, a high protection rating is required: IP54 or IP55, and the surrounding environment is relatively clean, allowing air to enter the enclosure.

- 38 to 850 m^3/h.
- Five input voltages: AC: 400/440 V, 230 V, 115 V (50/60 Hz), DC: 48 V and 24 V.
- Broad range of accessories (filters, IP55 and EMC covers, anti-vandalism kit).
- **UL Listing:** E80264

Table 24.7: Ventilation Systems with Filters

Fan flow rate (50 Hz)			Voltage	Catalog Number					
				Fan with filter	Outlet grill	Color kit	IP55	IP55 stainless steel	EMC
Free with filter	With 1 outlet grill	With 2 outlet grills		RAL 7035		RAL 7032			
38	25	33	230 V	NSYCVF38M230PF	NSYCAG92LPF	NSYCAG92LPC	—	—	—
38	27	35	115 V	NSYCVF38M115PF					
58	39	47	24 Vdc	NSYCVF38M24DPF					
44	34	41	48 Vdc	NSYCVF38M48DPF					
85	63	71	230 V	NSYCVF85M230PF	NSYCAG125LPF	NSYCAG125LPC	NSYCAP125LZF	NSYCAG125LXF	NSYCAG125SLE
79	65	73	115 V	NSYCVF85M115PF					
80	57	77	24 Vdc	NSYCVF85M24DPF					
79	59	68	48 Vdc	NSYCVF85M48DPF					
165	153	161	230 V	NSYCVF165M230PF	NSYCAG223LPF	NSYCAG223LPC	NSYCAP223LZF	NSYCAP223LXF	NSYCAP223LE
164	153	161	115 V	NSYCVF165M115PF					
188	171	179	24 Vdc	NSYCVF165M24DPF					
193	171	179	48 Vdc	NSYCVF165M48DPF					
302	260	268	230 V	NSYCVF300M230PF					
302	263	271	115 V	NSYCVF300M115PF					
262	221	229	24 Vdc	NSYCVF300M24DPF					
247	210	218	48 Vdc	NSYCVF300M48DPF					
562	473	481	230 V	NSYCVF560M230PF	NSYCAG291LPF	NSYCAG291LPC	NSYCAP291LZF	NSYCAP291LXF	NSYCAP291LE
582	485	494	115 V	NSYCVF560M115PF					
838	718	728	230 V	NSYCVF850M230PF					
983	843	854	115 V	NSYCVF850M115PF					
931	798	809	400/440 V	NSYCVF850M400PF					

[6] See Table 24.2 UL File Numbers for Enclosures, page 24-3.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025



Thermal Control

Thermostats control the temperature inside the enclosure and send a signal when maximum or minimum temperature values have been reached.

- Temperature control: adjustable thermostats; single or double.
- Relative humidity control: adjustable humidistat.
- Temperature and relative humidity control: adjustable hygrotherm.

Table 24.8: Control temperature



N.C. thermostat

Control a resistance heater or an alarm	
Setting range	Catalog Number
0 to +60 °C	NSYCCOTHC
+32 to +140 °F	NSYCCOTHCF



N.O. thermostat

Control a fan or an alarm	
Setting range	Catalog Number
0 to +60 °C	NSYCCOTHO
+32 to +140 °F	NSYCCOTHOF



Double thermostat

Control a resistance heater and a fan	
Setting range	Catalog Number
0 to +60 °C	NSYCCOTHD
+32 to +140 °F	NSYCCOTHDF



Thermostat with inverse contact

Control a resistance heater or a fan	
Setting range	Catalog Number
0 to +60 °C	NSYCCOTHI
+32 to +140 °F	NSYCCOTHIF



Electronic thermostat

Control a resistance heater or a fan		
Setting range	Display	Catalog Number
+5 °C to +50 °C	°C or °F	NSYCCOTH30VID
		NSYCCOTH120VID
		NSYCCOTH230VID

7 different operating modes.
Option of installing one or two external sensors.



Electronic hygrotherm

Control temperature and relative humidity		
Setting range	Display	Catalog Number
+5 °C to +50 °C	°C or °F	NSYCCOHYT30VID
		NSYCCOHYT120VID
		NSYCCOHYT230VID

3 different operating modes.
Option of installing an external sensor.



Electronic hygrostat

Control relative humidity		
Setting range	Display	Catalog Number
20% to 80%	% RH	NSYCCOHY230VID

2 different operating modes.



Temperature sensor

PTC external temperature sensor (double insulation)
Catalog Number
NSYCCAST

Table 24.9: Insulated resistance heaters



Insulated resistance heater with fan		
Power (W)	Voltage (V)	Catalog Number
100	120–240 AC	NSYCR100WU2C
10	120–240 AC	NSYCR10WU2C
147	120–240 AC	NSYCR150WU2C
20	120–240 AC	NSYCR20WU2C
55	120–240 AC	NSYCR50WU2C
177	230 AC	NSYCR170W230VVC

Table 24.10: Ultra-thin resistance heaters



Ultra-thin heaters		
Power (W)	Voltage (V)	Catalog Number
10	120	NSYCRS10W120V
10	240	NSYCRS10W240V
25	120	NSYCRS25W120V
25	240	NSYCRS25W240V
50	120	NSYCRS50W120V
50	240	NSYCRS50W240V
100	120	NSYCRS100W120V
100	240	NSYCRS100W240V
200	120	NSYCRS200W120V
200	240	NSYCRS200W240V

Table 24.11: Thermofans



Thermofans		
Power (W)	Voltage (V)	Catalog Number
400/550	230 AC	NSYCRP1W230VTVC
400/550	120 AC	NSYCRP1W120VTVC

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Section 25

EcoStruxure™ and Schneider Electric Services

Overview of EcoStruxure™ 25-2

EcoStruxure™ Power 25-3

EcoStruxure™ Building 25-4

EcoStruxure™ IT 25-5

EcoStruxure™ Plant and Machine 25-6

EcoStruxure™ Grid 25-7


Schneider Electric Services 25-8




EcoStruxure™ Power



EcoStruxure™ Building



EcoStruxure™ IT



EcoStruxure™ Plant and Machine



EcoStruxure™ Grid

© 2025 Schneider Electric
All Rights Reserved
3/25/2025


EcoStruxure™: IoT-enabled Architecture and Platform

What is EcoStruxure?

EcoStruxure is Schneider Electric's IoT-enabled, plug-and-play, open, interoperable architecture and platform, in Homes, Buildings, Data Centers, Infrastructure and Industries.

EcoStruxure delivers one architecture, serving four end markets (Building, Data Center, Industry, Infrastructure), with six domains of expertise: *[1]*

- EcoStruxure Power
- EcoStruxure Building
- EcoStruxure IT
- EcoStruxure Plant and Machine
- EcoStruxure Grid

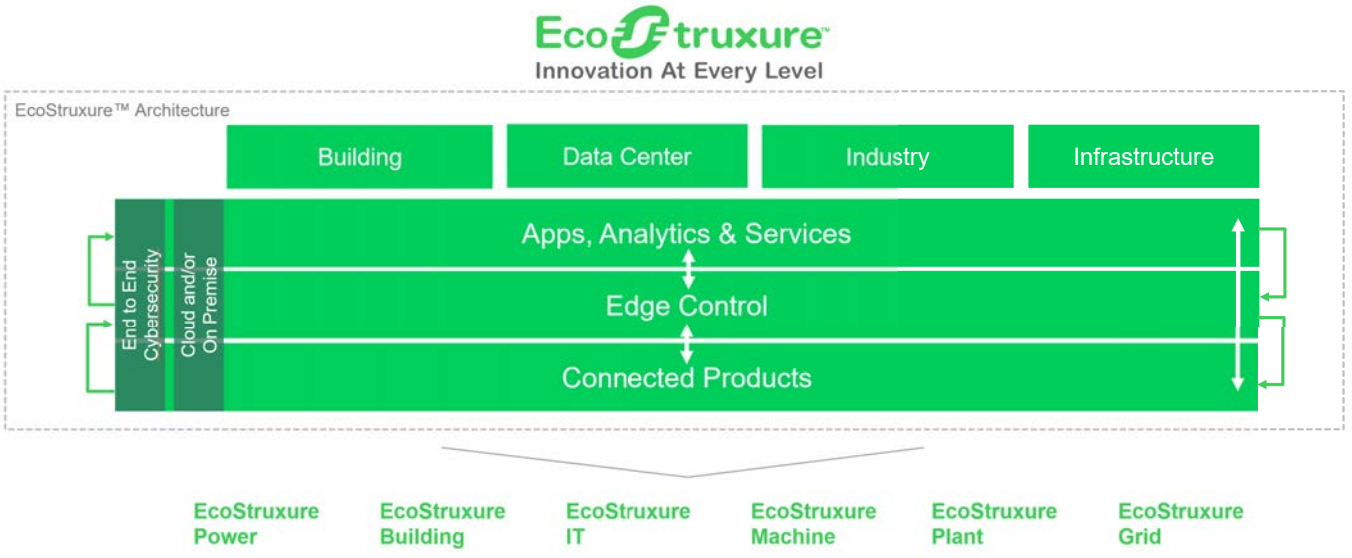

Apps, Analytics, and Services *[1]*

Interoperability is imperative to supporting the diverse hardware and systems in building, data center, industry, and grid end markets. EcoStruxure enables a breadth of agnostic applications, analytics & services for seamless enterprise integration.

Edge Control *[1]*

Mission-critical scenarios can be unpredictable, so control of devices at the edge of the IoT network is a must. This essential capability provides real-time solutions that enable local control at the edge, protecting safety and uptime.

Connected Products *[1]*

The Internet of Things starts with the best things. Our IoT-enabled best-in-class connected products include breakers, drives, UPSs, relays, sensors, and more. Devices with embedded intelligence drive better decision-making throughout operations.

What is EcoStruxure Platform?

At the heart of our IoT system architecture is the EcoStruxure Platform. Connecting everything in your enterprise from the shop floor to the top floor. Collecting critical data, from sensors to the cloud. Analyzing data to discover meaningful insights. Enabling you to act based on real-time information and business logic.

The EcoStruxure Platform is the foundational technology backbone on which Schneider Electric solutions are built and delivered.


Visit EcoStruxure Platform on se.com/us

[1] EcoStruxure™ is continually evolving and expanding. The printed Digest may not reflect all available connected products, apps, analytics, and services. Refer to EcoStruxure™ on se.com/us for the latest information.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

EcoStruxure™ Power

Schneider Electric's EcoStruxure Power offers advanced power system communication at every level of your operation. Connected products such as MasterPact MTZ circuit breakers are a key component of EcoStruxure Power, providing real-time operations data, smart analytics, and improved safety and security to your facility and processes. Welcome to the future of power distribution. *[1]*

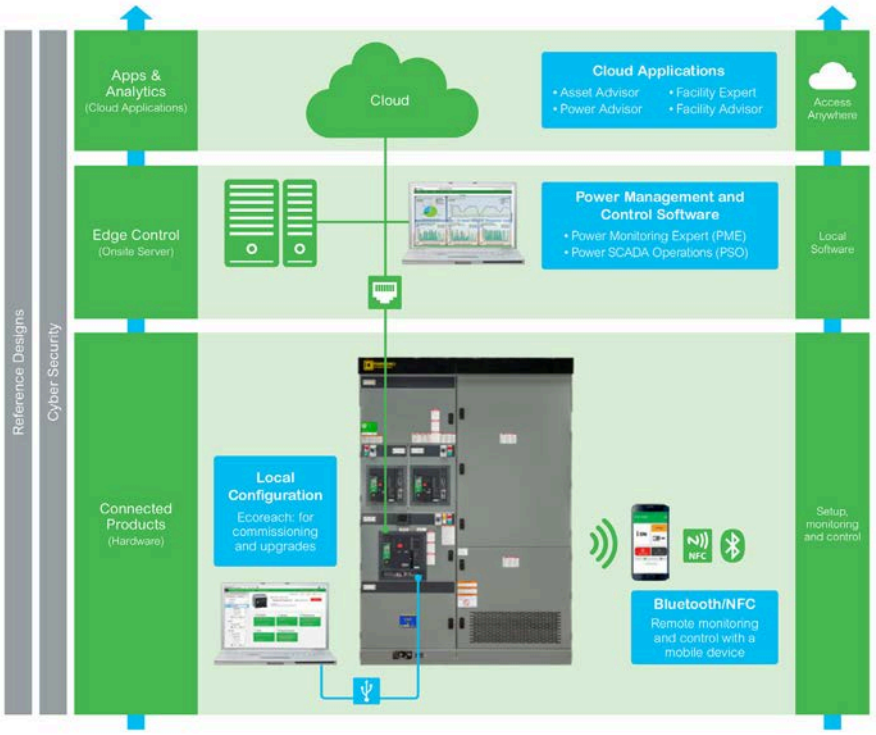

Visit EcoStruxure Power on www.se.com/us for the latest information.

Apps, Analytics & Services *[1]*

Get actionable predictive maintenance information that protects your customers, safeguard your reputation and minimizing financial impact.

- EcoStruxure Asset Advisor
- EcoStruxure Power Advisor
- EcoStruxure Resource Advisor

Edge Control *[1]*

Track equipment and maintenance activity to reduce downtime, energy use, and maintenance costs while improving site planning and revealing additional capacity.

- EcoStruxure Power Monitoring Expert
- EcoStruxure Power Operation
- EcoStruxure Substation Operation

Connected Products *[1]*

Monitor power distribution, anticipate needs, pinpoint concerns, and control assets remotely.

- MasterPacT MTZ Circuit Breakers Connectivity
- PowerLogic Power and Energy Meters
- Enerlin'X Com'X Energy Servers and Data Loggers
- Smart Systems
- Galaxy VX UPS
- Premset MV Switchgear

[1] EcoStruxure™ is continually evolving and expanding. The printed Digest may not reflect all available connected products, apps, analytics, and services. Refer to EcoStruxure™ on se.com/us for the latest information.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

EcoStruxure™ Building

From design, through integration to commissioning, EcoStruxure™ Building brings best-in-class engineering efficiency to your building. Combined with our asset and energy performance services, we enable lifetime efficiency of your building ensuring productivity and comfort for occupants. *[1]*



Visit EcoStruxure Building on se.com/us for the latest information

Apps, Analytics, and Services *[1]*

Gain actionable insights via apps, analytics and services based on best-in-class expertise, processes and predictive technology.

- EcoStruxure Resource Advisor
- Digital Services for Buildings
- EcoStruxure Workplace Advisor
- Connected Services / Field Services

Edge Control *[1]*

Simplify integration between buildings and systems with EcoStruxure Building Management.

- Building Management

Connected Products *[1]*

Build a solid foundation with connected devices ranging from valves actuators and controllers, to circuit breakers, sensors and meters.


- MasterPacT MTZ Circuit Breakers Connectivity
- PowerLogic Power and Energy Meters
- Altivar Drives
- PowerPacT Circuit Breakers
- Smart Systems
- Uninterruptible Power Supply (UPS)
- SpaceLogic – Smart and Connected Devices

[1] EcoStruxure™ is continually evolving and expanding. The printed Digest may not reflect all available connected products, apps, analytics, and services. Refer to EcoStruxure™ on se.com/us for the latest information.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

EcoStruxure™ IT

In a connected world, it's now more important than ever to protect critical information and data. Ensure that your data center's physical infrastructure can adapt quickly to support both future demand driven by IoT and growth (in the cloud and at the edge) without ever compromising availability or operational efficiency. *[1]*

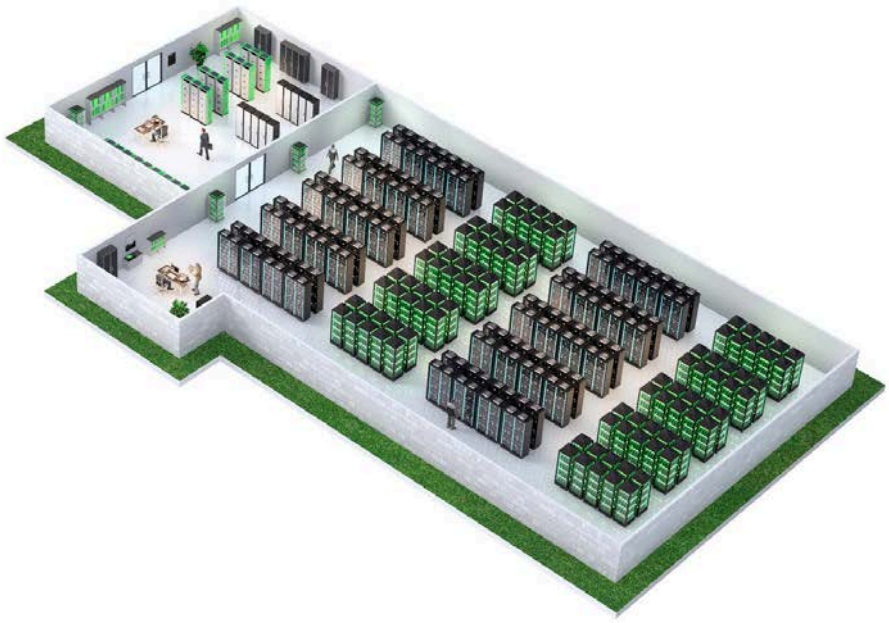

Visit EcoStruxure IT on se.com/us for the latest information

Apps, Analytics & Services *[1]*

Increasing resiliency and visibility through live sensor data, predictive analytics and smart alarming.

- EcoStruxure IT Advisor
- EcoStruxure Asset Advisor

Edge Control *[1]*

For real-time monitoring, incident management, analysis and asset utilization.

- EcoStruxure IT Expert

Connected Products *[1]*

Connecting the domains of IT, mechanical and power room for resiliency and efficiency.


- Visit EcoStruxure IT on se.com/us for the latest connected products.

[1] EcoStruxure™ is continually evolving and expanding. The printed Digest may not reflect all available connected products, apps, analytics, and services. Refer to EcoStruxure™ on se.com/us for the latest information.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

EcoStruxure™ Plant and Machine

Schneider Electric is leading the digital transformation of industrial automation markets. Delivered through our EcoStruxure architecture, our IIoT technologies, including integrated software, are ready for smart manufacturing and can deliver new business opportunities for plants and machine builders — increasing profitability and productivity. *[1]*

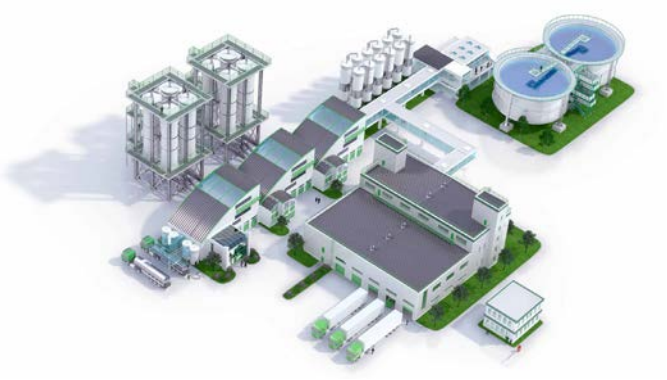



Apps, Analytics & Software *[1]*

Our full portfolio of software, apps, and analytics offer tools and information in a format that is easily actionable to turn plant personnel into business decision makers, who can contribute easily to optimizing your system.

- Industrial Automation Software
- Aveva System Platform (formerly Wonderware)
- EcoStruxure Machine Advisor
- EcoStruxure Secure Connect Advisor
- EcoStruxure Augmented Operator Advisor
- EcoStruxure Machine Expert Software (Formerly SoMachine)
- EcoStruxure Control Advisor
- EcoStruxure Maintenance Advisor
- EcoStruxure Asset Advisor
- EcoStruxure Resource Advisor

Edge Control *[1]*

Our connected control platforms provide better insight into operations, reduce time to market, reduce process energy consumption and improve productivity.

- Harmony Industrial PCs
- Modicon M580 PAC Controller
- EcoStruxure - Foxboro DCS
- EcoStruxure - Triconex Safety Instrumented System
- EcoStruxure Solutions for Machines
- Building Management Systems

Connected Products *[1]*

Our connected products bring intelligence to your system, enabling your assets to provide advanced process data for smarter operations.

Visit EcoStruxure Plant and EcoStruxure Machine on se.com/us for the latest connected products.

[1] EcoStruxure™ is continually evolving and expanding. The printed Digest may not reflect all available connected products, apps, analytics, and services. Refer to EcoStruxure™ on se.com/us for the latest information.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

EcoStruxure™ Grid

From seamless local production and integration at the grid edge, to bridging demand and supply, EcoStruxure™ Grid increases your grid's efficiency for sustainable networks. *[1]*



Apps, Analytics, and Services *[1]*

Smart grid analytics for efficient operations, predictive maintenance and investment plans. A complete services portfolio - from field instruments to control room - to help optimize assets, people, equipment and plant, at every stage of your asset life cycle.

- EcoStruxure ADMS
- EcoStruxure ArcFM
- EcoStruxure Asset Advisor
- EcoStruxure Microgrid Advisor
- EcoStruxure Grid Metering Operation
- Field Services

Edge Control *[1]*

Secure, reliable & efficient grid, substation & meter management.

- EcoStruxure Substation Operation
- EcoStruxure Microgrids
- EcoStruxure Grid Metering Operation

Connected Products *[1]*

Remote control & monitoring insights on mobile tools for safer maintenance and operations.


Visit EcoStruxure Grid se.com/us for the latest connected products.

- PowerLogic
- EcoStruxure ADMS
- ArcFM Geographic Information Systems (GIS)
- EcoStruxure DERMS (Distributed Energy Resource Management System)

[1] EcoStruxure™ is continually evolving and expanding. The printed Digest may not reflect all available connected products, apps, analytics, and services. Refer to EcoStruxure™ on se.com/us for the latest information.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Decarbonizing and electrifying faster with Schneider Electric Services, your lifelong partner

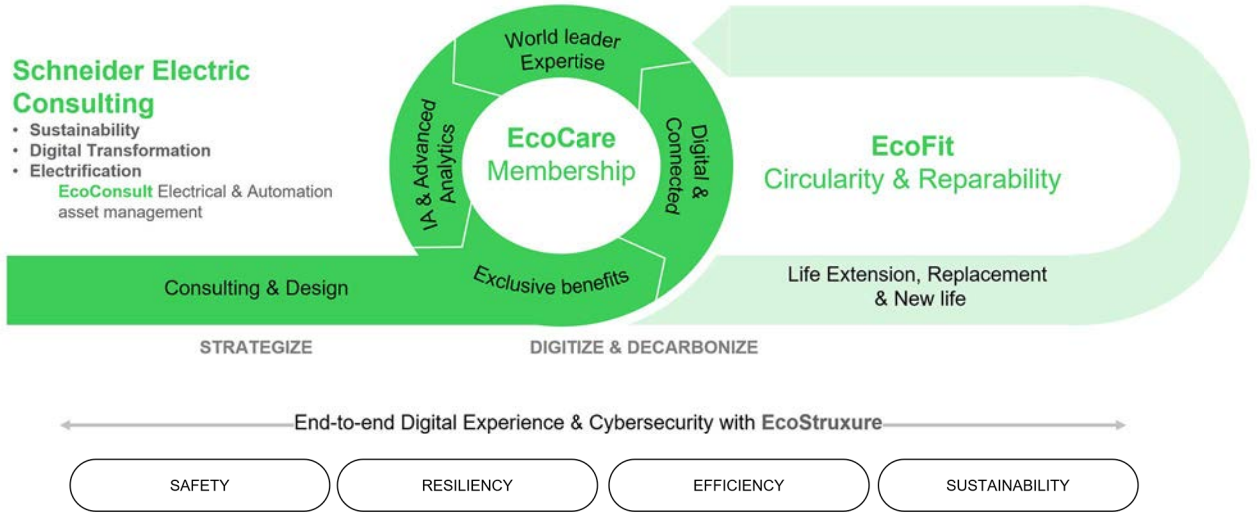

Building, Industry, Data Center & Infrastructure

EcoConsult services for electrical distribution and automation systems. Our consultants help you identify potential safety, compliance, and performance issues to reduce risk and improve reliability. We offer a complete set of solutions for studies, audits, and design that include digital twin technologies, short circuit, coordination, arc flash, power quality, NFPA compliance and more.

EcoCare services membership helps you achieve up to 75% less unplanned downtime, up to 40% less on-site activities, and planned downtime, and extend the lifetime of your equipment.[1] Access fast priority support, 24/7 monitoring and alarming, calendar-based preventive maintenance or condition-based, exclusive rates on all services, and more.

EcoFit™ our unique approach to modernization and circularity services. Outdated equipment and installations waste energy, increase operating costs and put your business continuity at risk every day. You can solve these problems and modernize your equipment with EcoFit™. It enables high performance with digital technologies and supports your decarbonization journey.

se.com/us/services

[1] These percentages are non-contractual and are based on Schneider Electric's experience and expertise concerning the main root cause of downtime observed and for which Schneider Electric has developed solutions.

© 2025 Schneider Electric
All Rights Reserved
3/25/2025

Conductor Ampacity Based on the 2023 National Electrical Code®

Ampacity based on NEC® Table 310.16 – Allowable Ampacities of Insulated Conductors Rated Up to and Including 2000 Volts, 60° Through 90°C (140° Through 194°F), Not More Than Three Current-Carrying Conductors in Raceway, Cable, or Earth (Directly Buried), Based on Ambient Temperature of 30°C (86°F).

Size	Temperature Rating of Conductor. [See Table 310.104(A).]						Size
	60°C (140°F)	75°C (167°F)	90°C (194°F)	60°C (140°F)	75°C (167°F)	90°C (194°F)	
AWG or kcmil	Types TW, UF	Types RHW, THHW, THW, THWN, XHHW, USE, ZW	Types TBS, SA, SIS, FEP, FEPB, MI, RHH, RHW-2, THHN, THHW, THW-2, THWN-2, USE-2, XHH, XHHW, XHHW-2, ZW-2	Types TW, UF	Types RHW, THHW, THW, THWN, XHHW, USE	Types TBS, SA, SIS, THHN, THHW, THW-2, THWN-2, RHH, RHW-2, USE-2, XHH, XHHW, XHHW-2, ZW-2	AWG or kcmil
	Copper			Aluminum or Copper-Clad Aluminum			
18**	—	—	14	—	—	—	—
16**	—	—	18	—	—	—	—
14**	15	20	25	—	—	—	—
12**	20	25	30	15	20	25	12**
10**	30	35	40	25	30	35	10**
8	40	50	55	35	40	45	8
6	55	65	75	40	50	55	6
4	70	85	95	55	65	75	4
3	85	100	115	65	75	85	3
2	95	115	130	75	90	100	2
1	110	130	145	85	100	115	1
1/0	125	150	170	100	120	135	1/0
2/0	145	175	195	115	135	150	2/0
3/0	165	200	225	130	155	175	3/0
4/0	195	230	260	150	180	205	4/0
250	215	255	290	170	205	230	250
300	240	285	320	195	230	260	300
350	260	310	350	210	250	280	350
400	280	335	380	225	270	305	400
500	320	380	430	260	310	350	500
600	350	420	475	285	340	385	600
700	385	460	520	315	375	425	700
750	400	475	535	320	385	435	750
800	410	490	555	330	395	445	800
900	435	520	585	355	425	480	900
1000	455	545	615	375	445	500	1000
1250	495	590	665	405	485	545	1250
1500	525	625	705	435	520	585	1500
1750	545	650	735	455	545	615	1750
2000	555	655	750	470	560	630	2000

Note 1 Refer to Section 310.15(1)(1) for the ampacity correction factors where the ambient temperature is other than 30°C (86°F). Refer to 310.15(C)(1) for more than three current-carrying conductors.
** See Section 240.4(D) for conductor overcurrent protection limitations.

For conduit fill see 2023 NEC Chapter 9 Table 1.

For Information on Temperature Ratings of Terminations to Equipment See NEC 110.14(C).

120/240 Volt Single Phase Dwelling Services and Feeders [Section 310.12]

For one family dwellings and the individual dwelling units of two family and multifamily dwellings, service and feeder conductors supplied by a single phase, 120/240 volt system shall be permitted to be sized as follows:

A. For a service rated 100 through 400 A, the service conductors supplying the entire load associated with a one family dwelling, or the service conductors supplying the entire load associated with an individual dwelling unit in a two family or multifamily dwelling, shall be permitted to have an ampacity not less than 83 percent of the service rating. If no adjustment or correction factors are required Table 310.12(A) shall be permitted to be applied.

B. For a feeder rated 100 through 400 A, the feeder conductors supplying the entire load associated with a one family dwelling, or the feeder conductors supplying the entire load associated with an individual dwelling unit in a two-family or multifamily dwelling, shall be permitted to have an ampacity not less than 83 percent of the feeder rating. If no adjustment or correction factors are required Table 310.12(A) shall be permitted to be applied.

C. In no case shall a feeder for an individual dwelling unit be required to have an ampacity greater than that specified in 310.12(A) or (B).

D. Grounded conductors shall be permitted to be sized smaller than the ungrounded conductors, if the requirements of Sections 220.61 and 230.42 for service conductors or the requirements of Sections 215.2 and 220.61 for feeder conductors are met.

Where correction or adjustment factors are required by 310.15(B) or (C), they shall be applied to the ampacity associated with the temperature rating of the conductor.

NEC 210.19 Conductors—Min. Ampacity and Size

For branch circuits not more than 1000 volts, conductors shall have an ampacity not less than the maximum load to be served. Conductors shall be sized to carry not less than the larger of (a) or (b).

a. Where a branch circuit supplies continuous loads or any combination of continuous and noncontinuous loads, the minimum branch-circuit conductor size shall have an ampacity not less than the noncontinuous load plus 125 percent of the continuous load.

b. The minimum branch-circuit conductor size shall have an ampacity not less than the maximum load to be served after the application of any adjustment or correction factors.

Exception: If the assembly, including the overcurrent devices protecting the branch circuit(s), is listed for operation at 100 percent of its rating, the allowable ampacity of the branch-circuit conductors shall be permitted to be not less than the sum of the continuous load plus the noncontinuous load in accordance with 110.14(C).

Correction Factors

Based on NEC Table 310.15(B)(1)(1) Ambient Temperature Correction Factors Based on 30°C (86°F)

Ambient Temperature (°C)	Temperature Rating of Conductor			Ambient Temperature (°F)
	60°C	75°C	90°C	
10 or less	1.29	1.20	1.15	50 or less
11–15	1.22	1.15	1.12	51–59
16–20	1.15	1.11	1.08	60–68
21–25	1.08	1.05	1.04	69–77
26–30	1.00	1.00	1.00	78–86
31–35	0.91	0.94	0.96	87–95
36–40	0.82	0.88	0.91	96–104
41–45	0.71	0.82	0.87	105–113
46–50	0.58	0.75	0.82	114–122
51–55	0.41	0.67	0.76	123–131
56–60	—	0.58	0.71	132–140
61–65	—	0.47	0.65	141–149
66–70	—	0.33	0.58	150–158
71–75	—	—	0.50	159–167
76–80	—	—	0.41	168–176
81–85	—	—	0.29	177–185

Adjustment Factors – See NEC Table 310.15 (C)(1)

Where the number of current-carrying conductors in a raceway or cable exceeds three, the allowable ampacities shall be reduced as shown in the following table:

Number of Conductors*	Percent of Values in Table 310.16 through Table 310.19 as Adjusted for Ambient Temperature if Necessary
4 through 6	80
7 through 9	70
10 through 20	50
21 through 30	45
31 through 40	40
41 and Above	35

* Number of conductors is the total number of conductors in the raceway or cable, including spare conductors. The count shall be adjusted in accordance with Sections 310.15(E) and (F). The count shall not include conductors that are connected to electrical components but that cannot be simultaneously energized.

NEC 210.20(A) Continuous and Noncontinuous Loads

Where a branch-circuit supplies continuous loads or any combination of continuous and noncontinuous loads, the rating of the overcurrent device shall not be less than the noncontinuous load plus 125 percent of the continuous load.

NEC 240.4 Protection of Conductors

Conductors, other than flexible cords, flexible cables, and fixture wires, shall be protected against overcurrent in accordance with their ampacities specified in 310.14, unless otherwise permitted or required in 240.4(A) through (H).

NEC 240.4 (D) Small Conductors

Unless specifically permitted in 240.4(E) or (G), the overcurrent protection shall not exceed that required by (D)(1) through (D)(8) after any correction factors for ambient temperature and number of conductors have been applied.

NEC 430.22(A) Direct-Current Motor-Rectifier Supplied

For dc motors operating from a rectified power supply, the conductor ampacity on the input of the rectifier shall not be less than 125 percent of the rated input current to the rectifier. For dc motors operating from a rectified single-phase power supply, the conductors between the field wiring output terminals of the rectifier and the motor shall have an ampacity of not less than the following percentages of the motor full-load current rating:

(1) Where a rectifier bridge of the single-phase, half-wave type is used, 190 percent.

(2) Where a rectifier bridge of the single-phase, full-wave type is used, 150 percent.

© 2024 Schneider Electric
All Rights Reserved

Product Selection made EASY.

Our online product selector tools are designed to assist you through the product selection process with the click of a button.



Save Time

Click-to-answer questions guide you through selecting the right product for your application!

Dive Deeper

Direct links to detailed product information at your fingertips.

Share your Projects

Email data sheets directly from product selectors.

Manage Large Projects

Create a project list online to keep you organized.

Efficient

Distributors can add product selector results directly to their cart and checkout.

Join the Movement

Try our online product selectors and other tools and see why thousands of customers are using them to make their jobs easier.

se.com/us/en/work/support/resources-and-tools/calculators-and-online-tools/

Other Digital Self-Service Tools:

mySchneider App

Access tailored services, 24/7 self-service and expert help. Anywhere, anytime, any project.

Digest Plus

Find the latest product information including catalogs, trip curves and more.

Technical FAQs

Find the answers you need from our online database of frequently asked questions.

Product Competitor Cross Reference Tool

Find the replacement for competitor and obsolete part numbers.

Schneider Electric USA, Inc.

800 Federal Street
Andover, MA 01810 USA
888-778-2733

se.com/us

June 2024
Document Number **0100CT2401**

Life Is On Schneider Electric

©2024 Schneider Electric. All Rights Reserved. Schneider Electric and Life is On, Square D are trademarks and the property of Schneider Electric SE, its subsidiaries, and affiliated companies. All other trademarks are the property of their respective owners.