

Section 1

Load Centers



QO™ Miniature Circuit Breakers



QO™ Load Centers



Homeline™ Miniature Circuit Breakers



Homeline™ Load Centers



CSEDs



Energy Monitor



Wiring Devices



Schneider Boost and Inverter

| | |
|--|-------------|
| EZ Selector - Selection Assistance | 1-2 |
| QO™ Miniature Circuit Breakers | 1-3 |
| QO™ Load Centers | 1-8 |
| Homeline™ Miniature Circuit Breakers | 1-19 |
| Homeline™ Load Centers | 1-23 |
| QO/Homeline Load Center Value Packs and Accessories | 1-28 |
| QO/Homeline Load Center Dimensions | 1-34 |
| Combination Service Entrance Devices (CSEDs) | 1-37 |
| Solar Ready Plug-On Neutral (PoN) CSEDs | 1-45 |
| Circuit Breakers for CSEDs | 1-46 |
| Accessories and Hubs for CSEDs | 1-47 |
| Schneider Energy Monitor, Boost, Inverter | 1-48 |
| Wiring Devices | 1-49 |
| Enclosed Devices | 1-50 |



QO Load Center


QO™ and Homeline™ Load Center EZ Selector - Selection Assistance

EZ Selector

Steps to select a load center.

- Select product type:
 - Homeline™ 1 inch format (HOM)
 - QO™ 3/4 inch format with plug-on neutral (QO) (P)
 - QO™ 3/4 inch format (QO)
- Select enclosure type: indoor or outdoor (RB = rainproof)
- Select single phase (1) or three phase (3)
- Select type of main:
 - Main circuit Breaker (M)
 - Main lugs (L)
 - Generator panel (GP)
- Select main ampacity rating
- Select pole spaces and max. number of 1-pole, single-phase circuits
- Select cover style:
 - Surface (box mounted on surface)
 - Surface (box mounted on surface, hinged cover included)
 - Flush (box recessed, cover is flush to wall)
- Value pack (VP)
- Select ground bar option:
 - Ground bar factory installed (T)
 - Ground bar included, field installation (G)
- Select special application:
 - Riser panel with gutter
 - Mfg housing, single phase 3-wire, convertible mains
 - Manufactured housing, single phase, 3-wire
 - Manufactured housing, single phase, 2-wire

QO™ and Homeline™ Load Centers — Catalog Number Description

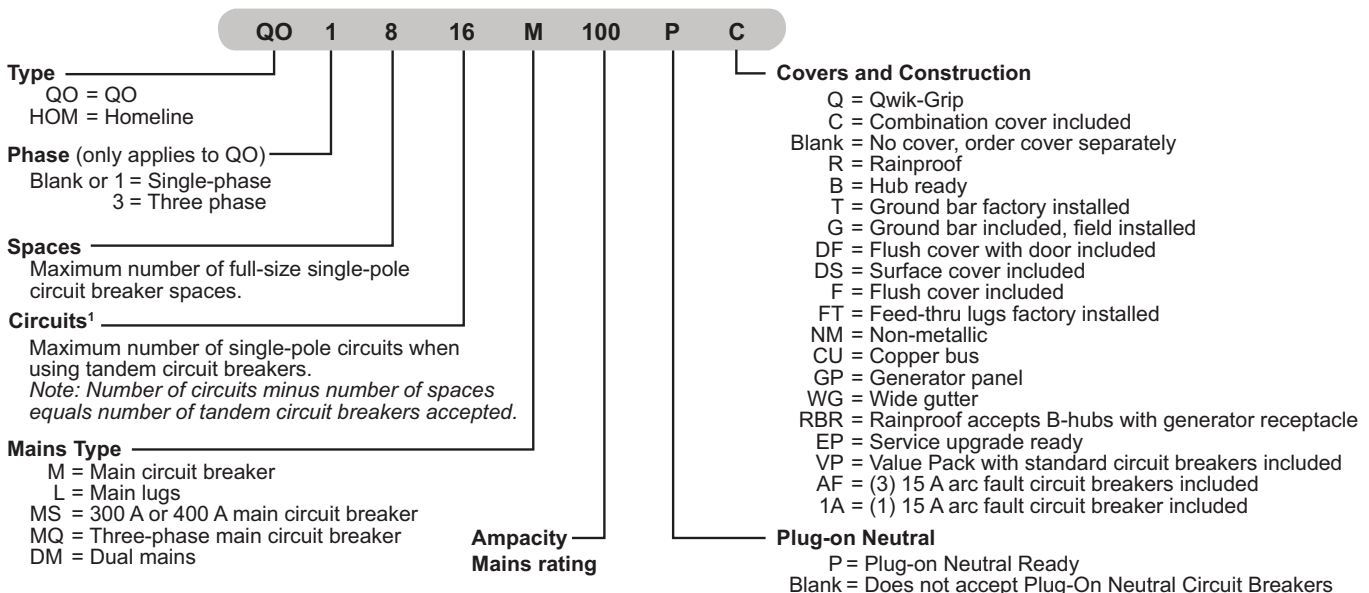

Additional Information

- See **Circuits** [1].
- Search our technical FAQs page: <https://www.se.com/us/en/faqs/home/>
- Refer to catalog [1100CT0501](#).

[1] QO Plug-on neutral load center catalog numbers indicate the number of spaces only. The tables in this document containing QO plug-on neutral load centers list the maximum number of single-pole circuits when using tandem breakers.

QO Standard Plug-On Circuit Breakers

Square D brand QO miniature circuit breakers are plug-on products for use in QO and QON load centers, NQ panelboards, NQ OEM interiors or Speed-D™ switchboard distribution panels. Bolt-on QOB circuit breakers are for use in NQOB and NQ panelboards or interiors. [1]

The Square D exclusive Qwik-Open™ mechanism, with a trip reaction within 1/60th of a second, is standard on all 1P 15 and 20 A QO circuit breakers.

Table 1.1: Standard QO Plug-On Circuit Breakers



| Amperes Rating [2] | 1P—120/240 Vac | 2P—120/240 Vac Common Trip | 2P—240 Vac [3] Common Trip | 3P—240 Vac Common Trip |
|--------------------------------------|----------------|----------------------------|----------------------------|------------------------|
| 10 k AIR | | | | |
| 10 A | QO110 | QO210 | — | QO310 |
| 15 A | QO115 [4] [5] | QO215 [4] | QO215H | QO315 [4] |
| 20 A | QO120 [4] [5] | QO220 [4] | QO220H | QO320 [4] |
| 25 A | QO125 [4] | QO225 [4] | QO225H OBS | QO325 [4] |
| 30 A | QO130 [4] | QO230 [4] | QO230H | QO330 [4] |
| 35 A | QO135 [4] | QO235 [4] | — | QO335 [4] |
| 40 A | QO140 [4] | QO240 [4] | QO240H | QO340 [4] |
| 45 A | QO145 OBS | QO245 [4] | — | QO345 [4] |
| 50 A | QO150 [4] | QO250 [4] | QO250H OBS | QO350 [4] |
| 60 A | QO160 [4] | QO260 [4] | QO260H OBS | QO360 [4] |
| 70 A | QO170 [4] | QO270 [4] | QO270H OBS | QO370 [4] |
| 80 A | — | QO280 [4] | QO280H OBS | QO380 [4] |
| 90 A | — | QO290 [4] | QO290H OBS | QO390 [4] |
| 100 A | — | QO2100 [4] | QO2100H | QO3100 [4] |
| 110 A | — | QO2110 [4] | — | — |
| 125 A | — | QO2125 [4] | — | — |
| 150 A | — | QO2150 [4] [6] [7] | — | — |
| 175 A | — | QO2175 [4] [6] [7] | — | — |
| 200 A | — | QO2200 [4] [6] [7] | — | — |
| Molded Case Switch 60 A max.—240 Vac | | — | QO200 | QO300 OBS |
| 22 k AIR [4] | | | | |
| 15 A | QO115VH [5] | QO215VH [8] | — | QO315VH [8] |
| 20 A | QO120VH [5] | QO220VH [8] | — | QO320VH [8] |
| 25 A | — | QO225VH [8] | — | QO325VH [8] |
| 30 A | QO130VH | QO230VH [8] | — | QO330VH [8] |
| 40 A | QO140VH | QO240VH [8] | — | QO340VH [8] |
| 50 A | — | QO250VH [8] | — | QO350VH [8] |
| 60 A | QO160VH | QO260VH [8] | — | QO360VH [8] |
| 70 A | — | QO270VH [8] | — | QO370VH [8] |
| 80 A | — | QO280VH [8] | — | QO380VH [8] |
| 90 A | — | QO290VH [8] | — | QO390VH [8] |
| 100 A | — | QO2100VH [8] [9] | — | QO3100VH [8] |
| 110 A | — | QO2110VH [8] [9] | — | — |
| 125 A | — | QO2125VH [8] [9] | — | — |
| 150 A | — | QO2150VH [6] [8] [7] | — | — |
| 175 A | — | QO2175VH OBS | — | — |
| 200 A | — | QO2200VH [6] [8] [7] | — | — |
| 42 k AIR [4] | | | | |
| 40 A | — | QOH240 OBS | — | — |
| 45 A | — | QOH245 OBS | — | — |
| 50 A | — | QOH250 OBS | — | — |
| 60 A | — | QOH260 [10] | — | — |
| 70 A | — | QOH270 | — | — |
| 80 A | — | QOH280 | — | — |
| 90 A | — | QOH290 | — | — |
| 100 A | — | QOH2100 | — | — |
| 110 A | — | QOH2110 [10] | — | — |
| 125 A | — | QOH2125 | — | — |
| 65 k AIR [4] | | | | |
| 15 A | QH115 OBS | QH215 OBS | — | QH315 OBS |
| 20 A | QH120 [5] | QH220 | — | QH320 OBS |
| 25 A | QH125 OBS | QH225 OBS | — | QH325 [10] |
| 30 A | QH130 OBS | QH230 | — | QH330 OBS |

OBS This product is obsolete.

Refer to page 7-2 for Interrupting Ratings, Accessories, and Dimensions.

[1] See Digest Section 1 for load centers and Section 9 for panelboards and interiors.

[2] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.

[3] UL Listed 5 k AIR on corner grounded Delta systems.

[4] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[5] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

[6] Requires four spaces (1 AWG–300 kcmil Al/Cu.) Suitable for switching 120 Vac fluorescent lighting loads.

[7] Not suitable for use in 3Ø panels. Use only in 1Ø panel rated 150 A or greater.

[8] UL Listed for use ahead of QO, QO-GFI, QO-EPD, QOT, QO-AFI, and QO-PL 10 k AIR circuit breakers to permit their application at 22 kA fault level.

[9] 100 A maximum branch mounted opposite.

[10] Order only. Contact your local Field Office.

Table 1.2: QO/QOB 48 Vdc 5 kA

| Ampere Rating | Poles | Suffix |
|---------------|-------|--------|
| 10–60 A | 2 | 5272 |

QO/QOB Ring Terminal

Table 1.3: QO/QOB Ring Terminal—Factory-Installed Only

| Ampere Rating | Poles | Suffix |
|---------------|---------|--------|
| 10–30 A | 1, 2, 3 | 5237 |
| 35–60 A | 1, 2 | 5238 |
| 35–50 A | 3 | |
| 70–110 A | 2 | |
| 60–100 A | 3 | 5273 |

Wire Sizes for QO/QOB Circuit Breakers

Table 1.4: Wire Sizes for QO/QOB Circuit Breakers

| Circuit Breaker Type | Ampere Rating [11] | Wire Size (AWG/kcmil) |
|--------------------------|--------------------|--------------------------|
| QO 1P | 10–30 A | 14–8 Al/Cu |
| | 10–30 A | (2) 14–10 Cu |
| | 35–70 A | 8–2 Al/Cu |
| QO 2P | 10–30 A | 14–8 Al/Cu |
| | 10–30 A | (2) 14–10 Cu |
| | 35–70 A | 8–2 Al/Cu |
| | 80–125 A | 4–2/0 Al/Cu |
| QO 3P | 10–30 A | 14–8 Al/Cu, (2) 14–10 Cu |
| | 35–70 A | 8–2 Al/Cu |
| | 80–125 A | 4–2/0 Al/Cu |
| QOB-VH | 110–150 A | 4–300 Al/Cu |
| QOT | 15–20 A | 12–8 Al 14–8 Cu |
| QO-AFI, QO-GFI or QO-EPD | 15–30 A | 12–8 Al 14–8 Cu |
| | 40, 50, 60 A | 12–4 Al 14–6 Cu |
| QO-PL | 10–60 A | 12–2 Al 14–2 Cu |

QOT and QO Tandem Circuit Breakers

QOT tandem circuit breakers have a mounting cam as shown. Installation into a QO load center can only be made in those positions having a mounting pan rail slot. Meets Paragraph 408.54 of the NEC®. UL Listed as Class CTL.



QOT 1P Tandem
1 Space Required




Table 1.5: QOT Tandem Circuit Breakers (CTL)—Not Compatible with Plug-on Neutral Systems

| Ampere Rating [11] | Cat. No. [12] |
|--|---------------|
| 1P—120/240 Vac | |
| 15 A and 15 A | QOT1515 |
| 15 A and 20 A | QOT1520 |
| 20 A and 20 A | QOT2020 |
| 2P—120/240 Vac Common Trip | |
| Order two QOT1515 or QOT2020 circuit breakers and handle tie QOTHT for common switching of center two poles. | |

Table 1.6: QO Tandem Circuit Breakers (non-CTL)—Compatible with Plug-on Neutral Systems

| Ampere Rating [11] | Cat. No. [12] |
|---|--|
| 1P—120/240 Vac—1 Space Required | |
| 15 A and 15 A | QO1515 |
| 15 A and 20 A | QO1520 |
| 20 A and 20 A | QO2020 |
| 20 A and 30 A | QO2030 |
| 30 A and 20 A | QO3020 |
| Two 1P Individual Trip—120/240 Vac—2 Spaces Required | |
| 15 A and 15 A | Order two QO1515 or QO2020 circuit breakers and handle tie QOTHT |
| 15 A and 20 A | |
| 20 A and 20 A | — |
| 20 A and 30 A | QO20303020 [13] |
| 30 A and 20 A | — |

NOTE: The torque values for these products can be found at www.se.com

[11] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.

[12] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[13] Includes two circuit breakers (one QO2030 and one QO3020) and handle tie QOTHT.



1P
QO-GFI



2P
QO-GFI

QO Ground-Fault Circuit Breakers (GFI)

Qwik-Gard™ circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 mA or more, for people protection. Do not connect to more than 250 feet of load conductor for the total one-way run to prevent nuisance tripping.

Table 1.7: QO-GFI Circuit Breakers

| Circuit Breaker Type | Ampere Rating [14] | Qwik-Gard Circuit Breakers With Ground Fault Circuit Interrupter | | | |
|--|--------------------|--|---------------------------|----------------------------|-----------------------------|
| | | 1P 120 Vac | | 2P Common Trip 120/240 Vac | 3P Common Trip 208Y/120 Vac |
| | | 10 k AIR 1 Space Required | 22 k AIR 1 Space Required | 10 k AIR 2 Spaces Required | 10 k AIR 3 Spaces Required |
| Ground-Fault Circuit Interrupter (Pigtail Neutral) | 15 | QO115GFI | QO115VHGFI | QO215GFI | QO315GFI |
| | 20 | QO120GFI | QO120VHGFI | QO220GFI | QO320GFI |
| | 25 | — | — | QO225GFI | — |
| | 30 | QO130GFI | — | QO230GFI | QO330GFI |
| | 35 | — | — | QO235GFI | — |
| | 40 | — | — | QO240GFI | QO340GFI |
| | 45 | — | — | QO245GFI | — |
| | 50 | — | — | QO250GFI | QO350GFI |
| Plug-On Neutral Ground-Fault Circuit Interrupter | 15 | QO115PGFI [16] | — | — | — |
| | 20 | QO120PGFI [16] | — | — | — |

QO Arc-Fault Circuit Breaker (QO-CAFI)

QO arc-fault circuit breakers provide protection for Series and Parallel Type Arcing as required by the NEC and local code adoption, and comply with UL 1699.

Table 1.8: QO-CAFI Circuit Breakers

| Circuit Breaker Type [17] | Ampere Rating | One-Pole 120 Vac | | Two-Pole 120/240 Vac |
|---|---------------|---------------------------|---------------------------|---------------------------|
| | | 10 k AIR 1 Space Required | 22 k AIR 1 Space Required | 10 k AIR 2 Space Required |
| Combination Arc-fault Interrupter (Pigtail Neutral) | 15 | QO115CAFI | QO115VHCAFI | QO215CAFI [18] |
| | 20 | QO120CAFI | QO120VHCAFI | QO220CAFI [18] |
| Plug-On Neutral Combination Arc-fault Interrupter | 15 | QO115PAF | QO115VHPAF | — |
| | 20 | QO120PAF | QO120VHPAF | — |



1P
QO-CAFI
Plug-On Neutral



1P
QO-CAFI
Pigtail

QO Dual Function Circuit Breaker

QO Combination Arc Fault and Ground Fault Circuit Interrupters (Dual Function) provide overload and short circuit protection, plus arc fault and ground fault protection in accordance with the NEC, UL 1699 and UL 943.

Table 1.9: QO-DF Circuit Breakers

| Circuit Breaker Type [17] | Ampere Rating | 1P 120 Vac 10 k AIR 1 Space Required | 1P 120 Vac 22 k AIR 1 Space Required |
|--|---------------|--------------------------------------|--------------------------------------|
| Combination Arc-fault and Ground Fault Circuit Interrupter (Pigtail Neutral) | 15 20 | QO115DF QO120DF | — QO120VHDF |
| Plug-On Neutral Combination Arc-fault and Ground Fault Circuit Interrupter | 15 20 | QO115PAFGF QO120PAFGF | QO115VHPAFGF QO120VHPAFGF |



1P QO-DF
Plug-on Neutral



1P QO-DF
Pigtail

[14] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.

[15] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.

[16] New Plug-On Neutral

[17] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[18] For 120/240 V only, not for 208Y/120 V.



QO220EPD

QO-EPD/EPE Circuit Breakers

QO-EPD/EPE circuit breakers provide overload and short circuit protection combined with Class B ground fault protection. They are designed to provide ground fault protection of equipment at a 30 mA level (EPD) or 100 mA level (EPE). They are not designed to protect people from electrical shock.

Table 1.10: QO-EPD Circuit Breakers

| Ampere Rating [19] | 1P 120 Vac 10 k AIR 1 Space Required | 2P Common Trip 120/240 Vac 10 k AIR 2 Spaces Required | |
|--------------------|---|--|---------------|
| 15 | QO115EPD | QO215EPD | QO315EPE [20] |
| 20 | QO120EPD | QO220EPD | QO320EPE [20] |
| 25 | QO125EPD OBS | QO225EPD | — |
| 30 | QO130EPD | QO230EPD | QO330EPE [20] |
| 40 | — | QO240EPD | QO340EPE [20] |
| 50 | — | QO250EPD | QO350EPE [20] |
| 60 | — | QO260EPD [21] | — |

OBS This product is obsolete.

QO Switch Neutral Common Trip Circuit Breakers (QO-SWN)

Switch Neutral Common Trip 2008 NEC® 514.11

Table 1.11: QO-SWN Circuit Breakers

| Ampere Rating [22] | 2 Wire 120 Vac 10 k AIR 2 Spaces Required |
|--------------------|---|
| 15 | QO215SWN |
| 20 | QO220SWN |

QO High Intensity Discharge Circuit Breakers (QO-HID)

HID circuit breakers are for use on circuits feeding fluorescent and high intensity discharge (HID) lighting systems such as mercury vapor, metal halide, or high pressure sodium. These circuit breakers are physically interchangeable with QO circuit breakers.

Table 1.12: QO-HID Circuit Breakers

| Ampere Rating [22] | 1P 120/240 Vac 10 k AIR | 2P Common Trip 120/240 Vac 10 k AIR | 3P Common Trip 240 Vac 10 k AIR |
|--------------------|----------------------------|---|---------------------------------------|
| 20 | — | QO220HID | QO320HID |



QO320HID

QO High Magnetic Trip Circuit Breakers (QO-HM)

High magnetic trip circuit breakers are recommended for applications where high initial inrush may occur and for individual dimmer applications.

Table 1.13: QO-HM Circuit Breakers

| Ampere Rating [22] | 120 Vac—10 k AIR | |
|--------------------|-------------------|--|
| | 1P | |
| 15 A | QO115HM [23] [24] | |
| 20 A | QO120HM [23] [24] | |

Non-Automatic (Standard) Miniature Switches

Miniature non-automatic switches have the same physical packaging as miniature circuit breakers, but open only when the handle is switched to the OFF position.

Non-automatic switches provide no overcurrent protection or short circuit protection. They must not be used on systems that have an available fault current greater than the values listed in the table. Non-automatic switches are UL Listed per UL 1087 and are CSA certified.

Table 1.14: QO Non-Automatic Miniature Switches, 240 Vac 10 kA

| Ampere Rating | 2P | 3P |
|---------------|-------|-----------|
| 60 | QO200 | QO300 OBS |

OBS This product is obsolete.

[19] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–125 A circuit breakers are suitable for use with 75°C conductors.

[20] See note in Instruction Bulletin when using in an enclosure with a QO403 or QON prefix.

[21] Suitable only for feeding 240 Vac and 208 Vac two-wire loads. Does not contain load neutral connection.

[22] 10–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 35–60 A circuit breakers are suitable for use with 75°C conductors.

[23] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[24] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

Accessories for QO/QOB Circuit Breakers

Table 1.15: Accessories for use with QO and QOB Miniature Circuit Breakers

| Description | | Cat. No. | Schedule |
|--|--|--|-----------------------------|
| Handle Attachments | | | |
| Handle Tie | Converts any two adjacent 120/240 Vac 1P QO circuit breakers to independent trip 2P Converts any two adjacent 120/240 Vac1P side-by-side QOT circuit breakers to independent trip 2P | QO1HT QO3HT | DE2E DE2E |
| Handle Clamp | Clamp for holding QO 1P handle in ON or OFF position Clamp for holding QO or Q1 either 1P, 2P or 3P circuit breaker handles in ON or OFF position | QO1LO HLO1 | DE2E DE2E |
| Handle Padlock Attachment for Padlocking in ON or OFF position | For padlocking 1P QO circuit breaker in ON or OFF position Loose attachment | QOHPL QO1PA | DE2E DE2E |
| | Fixed attachment | | |
| | For padlocking 1P side-by-side QOT circuit breaker in ON or OFF position | QOTHPA ^{oBS} | DE2E |
| | For padlocking 2P QO-GFI circuit breakers in either ON or OFF position, fixed attachment. | GFI2PA | DE2A |
| Handle Padlock Attachment for Padlocking in OFF position | For 2P and 3P QO and Q1 standard circuit breakers which require padlocking in either ON or OFF position. Loose attachment | QO1HPL QO1PL | DE2E DE2E |
| | Fixed attachment | | |
| | For padlocking 2P and 3P QO circuit breakers in OFF position only, fixed attachment. | QO2PAF | DE2E |
| Ring Terminal | For padlocking 1P QO, QO-GFI, QO-CAFI, QO-DF and QO-EPD circuit breakers in OFF position only, fixed attachment. | QOADV1PAF | DE2E |
| | For padlocking 2P QO-GFI, QO-CAFI and QO-EPD circuit breakers in OFF position only, fixed attachment. | QOGF2PAF | DE2E |
| | Ring terminals are available as a factory-installed option. | See Section 7 | DE2A |
| Sub-feed Lugs | 60 A 2P plug-on – 2 spaces required (6–2 Al/Cu) 125 A 2P plug-on – 2 spaces required (12–2/0 Al/Cu) 225 A 2P plug-on – 4 spaces required (4–300 Al/Cu) 125 A 3P plug-on – 3 spaces required (12–2/0 Al/Cu) | QO60SL ^{oBS} QO2125SL QO2225SL [25] QO3125SL | DE2A DE2A DE2A DE3 |
| Mechanical Interlock Attachment | For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be ON at a time (Not QOU) | QO2DTI | DE2E |
| With Retaining Kit | QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2Ps or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers. | QO2DTIM | DE2E |

^{oBS} This product is obsolete.



QO1PA



QO1PL



QO1HT



HLO1



QO1PAF



QO2DTI



QO1HPL



QOTHPA



QO1LO



QOHPL



QO2PAF



QOADV1PAF

[25] Not suitable for use in 3Ø panels. Use only in 1Ø panel rated 150 A or greater.

Factory-Installed Accessories for QO and QOB Miniature Circuit Breakers

Factory-installed electrical accessories take up an additional pole space on QO, QO-GFI, QO-EPD, QO-SWN and QOU circuit breakers. All AC electrical accessories shown below are rated for 50/60 Hz. Accessories are not available for QOB-VH (2P 150 A and 3P 110–150 A) circuit breakers or QO, QOU molded case switches. QO circuit breakers will accept only one accessory per circuit breaker. Undervoltage trip is not available on miniature circuit breakers. Factory-installed accessories are not available for QO-AFI or QO-CAFI Arc Fault Circuit Breakers, QO-CAFI, QO-DF, or QO-PDF circuit breakers, or on QO2150, QO2175, or QO2200 circuit breakers.

Table 1.16: Factory-Installed Accessories for QO/QOB Circuit Breakers^[26]

| Accessory | Description | Rated Voltage | Coil Burden | Cat. No. Suffix | Accessory | Description | Contact Comb. | Max. Voltage | Max. | Cat. No. Suffix |
|------------|--|-------------------------------|---------------------------|-----------------|--------------------|--|---------------|--------------------|------------|-----------------|
| Shunt Trip | Trips the circuit breaker from a remote location by means of a trip coil energized from a separate circuit. A 120 Vac shunt trip will operate at 55% or more of rated voltage. All other shunt trips will operate at 75% or more of rated voltage. Application <ul style="list-style-type: none"> For use with momentary or maintained push button. Not available on QO-GFI, QO-EPD, QO-AFI, QO-CAFI, QO-DF, or QO-PDF. Shunt trip terminals accept (2) 0.14– 0.12 AWG Cu. | 12 Vac/Vdc 24 Vac/Vdc | 60 VA 168 VA | -1042 | Auxiliary Switches | Monitors circuit breaker contact status and provides a remote signal indicating the circuit breaker contacts are OPEN or CLOSED. Application <ul style="list-style-type: none"> Auxiliary switch terminals accept (2) 14–12 AWG Cu leads. Leads (EH): Yellow for "A", Blue for "B", Striped common 18 AWG Cu. | 1A 1B | 120 Vac 120 Vac | 5 A 5 A | -1200 -1201 |
| | | 120 Vac 208 Vac 240 Vac | 72 VA 228 VA 288 VA | -1021 | Alarm Switches | Used with control circuits and is actuated only when the circuit breaker has tripped. Standard construction includes a normally-open contact. Application <ul style="list-style-type: none"> Leads: Alarm switch terminals accept (2) 14–12 AWG Cu leads. | 1A | 120 Vac | 5 A | -2100 |

Plug-on Neutral Load Center Main Lugs, Convertible Mains Single Phase 3W—120/240 Vac Indoor—UL Listed

QO Plug-on Neutral Load Centers and CAFI Breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.17: Convertible Main Lugs Plug-on Neutral Load Center (Compatible with QO Plug-on Circuit Breaker and QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits ^[1] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Load Center Covers | | Al | CU | Bus Rating | Equipment Ground Bar Kit (Factory-Included) | Box No. ^[2] | |
|--------|--|--------|--|------------------------------|------------------------------|-----------------------------------|---|---------------------------|-------|------------|---|------------------------|---|
| | | | | | | Flush/Surface | Mono-Flat | | | | | | |
| INDOOR | Convertible Mains—Factory-installed Main Lugs — 65 kA Short Circuit Current Rating—Copper Bus | | | | | | | | | | | | |
| | QOM1 Main Frame Size—Convertible to Main Circuit Breaker | | | | | | | | | | | | |
| | 125 A | 12 | 24 | 12 | | QO112L125PG | QOC16UF ^[3] QOC16US | — | 6–2/0 | | 125 | PKGTALP1 | 6 |
| | | 16 | 24 | 8 | | QO116L125PG | QOC24UF ^[3] QOC24US | — | 6–2/0 | | 125 | PKGTALP1 | 7 |
| | | 20 | 24 | 4 | | QO120L125PG | QOC20U100F ^[3] QOC20U100S | — | 6–2/0 | | 125 | PKGTALP1 | 6 |
| | | 24 | 34 | 10 | | QO124L125PG | QOC24UF ^[3] QOC24US | — | 6–2/0 | | 125 | PK15GTAL | 7 |
| | | 30 | 34 | 4 | | QO130L125PG | QOC30U125C | — | 6–2/0 | | 125 | PK23GTAL | 9 |
| | | 32 | 38 | 6 | | QO132L125PG | QOC32UF ^[3] | — | 6–2/0 | | 125 | PKGTALP1 | 8 |
| | Convertible Mains—Factory-installed Main Lugs, 65 kA Short Circuit Current Rating—Copper Bus | | | | | | | | | | | | |
| | QOM2 Main Frame Size—Convertible to Main Circuit Breaker | | | | | | | | | | | | |
| | 200 A | 12 | 24 | 12 | | QO112L200PG ^{obs} | QOC30UF ^[3] QOC30US | QOCMF30UCW ^[3] | 4–300 | 4–250 | 225 | PKGTALP1 | 9 |
| | | 24 | 36 | 12 | | QO124L200PG | QOC30UF ^[3] QOC30US | QOCMF30UCW ^[3] | 4–300 | 4–250 | 225 | PKGTALP1 | 9 |
| 30 | | 40 | 10 | | QO130L200PG | QOC30UF ^[3] QOC30US | QOCMF30UCW ^[3] | 4–250 | | 225 | PK23GTAL | 9 | |
| 40 | | 60 | 20 | | QO140L200PG | QOC40UF ^[3] QOC40US | — | 4–300 | 4–250 | 225 | PKGTALP2 | 10 | |
| 225 A | 42 | 52 | 10 | | QO142L225PG | QOC42UF ^[3] QOC42US | QOCMF42UCW ^[3] | 4–300 | | 225 | PK23GTAL | 11 | |
| | 54 | 64 | 10 | | QO154L225PG | QOC54UF ^[3] | QOCMF54UCW ^[3] | 4–300 | | 225 | PK23GTAL | 11 | |


Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.
^{obs} This product is obsolete.

[26] QOB circuit breakers with shunt trip, auxiliary switches, and/or alarm switches, which are no longer active commercial references, may be available Factory Assembled into NQ Panelboards.
 [1] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
 [2] See page 1-34
 [3] Available in gray and white. For white equivalencies, add the "W" suffix to the reference, or see page 1-29.

Field-Installed Main Circuit Breaker Kits, 1Ø

Table 1.18: QOM1 Frame Size—Use with Convertible Main Load Centers Only

| Main Circuit Breaker Rating [4] | Convertible Load Center Mains Rating | 22 k AIR [5] | Lug Wire Size [6] AWG/kcmil |
|---------------------------------|--------------------------------------|----------------------|-----------------------------|
| | | Main Circuit Breaker | |
| 50 A | 100–125 | QOM50VH | 12–2/0 Al or Cu |
| 60 A | 100–125 | QOM60VH | |
| 70 A | 100–125 | QOM70VH | |
| 80 A | 100–125 | QOM80VH | |
| 90 A | 100–125 | QOM90VH | |
| 100 A | 100–125 | QOM100VH | |
| 110 A | 125 | QOM110VH | |
| 125 A | 125 | QOM125VH | |



QOM1 Frame Size
50–125 Amperes



QOM2 Frame Size
100–225 Amperes

Table 1.19: QOM2 Frame Size—Use with Convertible Main Load Centers Only

| Main Circuit Breaker Rating [4] | Convertible Load Center Mains Rating | 22 k AIR [5] | Lug Wire Size [6] AWG/kcmil |
|---------------------------------|--------------------------------------|--------------------------|-----------------------------|
| | | Main Circuit Breaker [7] | |
| 100 A | 150–225 | QOM2100VH | 4–300 Al or Cu |
| 125 A | 150–225 | QOM2125VH | |
| 150 A | 150–225 | QOM2150VH | |
| 175 A | 200–225 | QOM2175VH | |
| 200 A | 200–225 | QOM2200VH | |
| 225 A | 225 | QOM2225VH | |

[4] Do not exceed the load center mains rating.

[5] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.


[6] Wire range listed for QOM circuit breaker kits is the wire range of that circuit breaker. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.

[7] Add suffix 1021 for 120, 208 or 240 Vac shunt trip.

Plug-on Neutral Load Center Main Breaker, Convertible Mains
1Ø3W—120/240 Vac Indoor—UL Listed

QO Plug-on Neutral Load Centers and CAFI Breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.20: Convertible Main Breaker Plug-on Neutral Load Centers (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Space-s | Max. 1P Circuits | Max. Tandem Breakers | Load Center Box and Interior | Load Center Covers | | Al | Cu | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [8] |
|---|---|---|------------------|----------------------|------------------------------|-------------------------------|----------------|-------|-------|------------|---|-------------|
| | | | | | | Flush/Surface | Mono-Flat | | | | | |
|  <p>INDOOR</p> <p>QO154M200P</p> | Convertible Mains — Factory-Installed Main Circuit Breaker— 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (see QO Standard Plug-On Circuit Breakers, page 1-3) [9], QOM1 Main Circuit Breaker Frame Size—Copper Bus | | | | | | | | | | | |
| | 100 A | 12 | 24 | 12 | QO112M100P | QOC12UF QOC12US | — | 6-2/0 | 6-1 | 125 | PK9GTA | 5 |
| | | 16 | 24 | 8 | QO116M100P | QOC20U100F[10] QOC200U100S | — | 6-2/0 | 6-1 | 125 | PK9GTA | 6 |
| | | 20 | 24 | 4 | QO120M100P | QOC20U100F[10] QOC200U100S | — | 6-2/0 | 6-1 | 125 | PK9GTA | 6 |
| | | 24 | 34 | 10 | QO124M100P | QOC24UF[10] QOC24US | — | 6-2/0 | | 125 | PK15GTA | 7 |
| | | 32 | 38 | 6 | QO132M100P | QOC32UF[10] | — | 6-2/0 | | 125 | PK15GTA | 8 |
| | 125 A | 24 | 34 | 10 | QO124M125P | QOC24UF[10] QOC24US | — | 6-2/0 | | 125 | PK15GTA | 7 |
| | | 32 | 38 | 6 | QO132M125P | QOC32UF[10] | — | 6-2/0 | | 125 | PK15GTA | 8 |
| | | Convertible Mains — Factory-Installed Main Circuit Breaker— 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (see QO Standard Plug-On Circuit Breakers, page 1-3) [9], QOM2 Main Circuit Breaker Frame Size—Copper Bus | | | | | | | | | | |
| | 150 A | 20 | 30 | 10 | QO120M150P OBS | QOC30UF[10] QOC30US | QOCMF30UCW[10] | 4-250 | | 225 | PK15GTA | 9 |
| | | 24 | 36 | 12 | QO124M150P | QOC30UF[10] QOC30US | QOCMF30UCW[10] | 4-250 | | 225 | PK15GTA | 9 |
| | | 30 | 40 | 10 | QO130M150P | QOC30UF[10] QOC30US | QOCMF30UCW[10] | 4-250 | | 225 | PK15GTA | 9 |
| | | 32 | 40 | 10 | QO132M150P | QOC40UF[10] QOC40US | — | 4-300 | 4-250 | 225 | PK15GTA | 10 |
| | 200 A | 20 | 30 | 10 | QO120M200P OBS | QOC30UF[10] QOC30US | QOCMF30UCW[10] | 4-300 | 4-250 | 225 | PK15GTA | 9 |
| | | 24 | 36 | 12 | QO124M200P | QOC30UF[10] QOC30US | QOCMF30UCW[10] | 4-300 | 4-250 | 225 | PK15GTA | 9 |
| | | 30 | 40 | 10 | QO130M200P | QOC30UF[10] QOC30US | QOCMF30UCW[10] | 4-250 | | 225 | PK15GTA | 9 |
| | | 40 | 60 | 20 | QO140M200P | QOC40UF[10] QOC40US | — | 4-300 | 4-250 | 225 | PK23GTA | 10 |
| | | 42 | 52 | 10 | QO142M200P | QOC42UF[10] QOC42US | QOCMF42UCW[10] | 4-300 | | 225 | PK18GTA | 11 |
| | | 54 | 72 | 18 | QO154M200P | QOC54UF[10] | QOCMF54UCW[10] | 4-300 | | 225 | PK23GTA | 12 |
| | | 60 | 72 | 12 | QO160M200PC [11] | — | — | 4-300 | | 225 | PK27GTA | 24 |
| | 225 A | 40 | 60 | 20 | QO140M225P OBS | QOC42UF[10] QOC42US | QOCMF42UCW[10] | 4-300 | | 225 | PK23GTA | 11 |
| | | 42 | 52 | 10 | QO142M225P | QOC42UF[10] QOC42US | QOCMF42UCW[10] | 4-300 | | 225 | PK18GTA | 11 |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

OBS This product is obsolete.

Field-Installed Main Lugs Kits, 1Ø

Table 1.21: 1Ø Field-Installed Main Lug Kits—Use with Convertible Main Load Centers Only

| Main Lugs Rating [12] | Use on Convertible Load Center with Mains Rating | Cat. No. | Lug Wire Size [13] AWG/kcmil Al or Cu |
|-----------------------|--|---------------|---------------------------------------|
| 125 A | 100–125 A | QOL125 [14] | 6–2/0 |
| 125 A | 100–125 A | QOL125VD [14] | 6–4/0 |
| 225 A | 150–225 A | QOL225 [14] | 6–300 |



QOL125

QOL225

[8] See [Indoor Knockout Information and Enclosure Dimensions, page 1-34](#).

[9] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

[10] Available in gray and white. For white equivalencies, add the "W" suffix to the reference, or see [page 1-29](#).

[11] For Certification to IEC 60439-1 contact the local Square D sales office; otherwise panels are NOT CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current Rating when QOXD...branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO...VS branch circuit breakers are used).

[12] Do not exceed the load center mains rating.

[13] Wire range listed for QOL lug kits is the wire range of that lug. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.

[14] If main circuit breaker knockout has been removed from the load center's trim, order appropriate filler plate from [Table 1.51, page 1-25](#)

QO™ Plug-On Neutral Load Centers with Qwik-Grip™

1Ø3W—120/240 Vac Indoor—UL Listed

The Square D QO plug-on neutral load centers with Qwik-Grip simplify rough-in by eliminating the need to remove knockouts, install wire connectors, and blindly pull wire into the load center. A quick bend of the wire using the wire bend guide on the Qwik-Grip insert and the wire slides into the slot. Once inserted, the Qwik-Grip shield snaps on to keep the wire behind the router for a secure, code-compliant installation.



QO Plug-on Neutral Load Center with Qwik-Grip™

Table 1.22: Plug-on Neutral Load Centers with Qwik-Grip (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Space-s | Max. Single Pole Circuits | Max. Tandem Circuit Breakers | Load Center Box and Interior | Indoor Cover with Door (Order Separately) | | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit | Box No. |
|--------|---|---------|---------------------------|------------------------------|------------------------------|---|-----------|--------------------------|-----|----------------------|-------------------------------|-------------------------------|
| | | | | | | Flush/Surface | Mono-Flat | Al | Cu | | | |
| INDOOR | Convertible Mains—Factory-Installed Main Lugs, 65 kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Circuit Breaker | | | | | | | | | | | |
| | 125 A | 24 | 34 | 10 | QO124L125PQG | QOC24UF ^[15] QOC24US | — | 6-2/0 | | 125 | PK15GTAL Included | 7Q |
| | | 30 | 34 | 4 | QO130L125PQG ^{OBS} | QOC30U125C | — | | | 125 | PK23GTAL Included | 9Q |
| | Convertible Mains—Factory—Installed Main Lugs, 65 kA Short Circuit Current Rating—Copper Bus, QOM2 Main Frame Size, Convertible to Main Circuit Breaker | | | | | | | | | | | |
| | 200 A | 30 | 40 | 10 | QO130L200PQG | QOC30UF ^[15] QOC30US | — | 6-300 | | 225 | PK23GTAL Included | 9Q |
| | 225 A | 42 | 52 | 10 | QO142L225PQG | QOC42UF ^[15] QOC42US | — | | | 225 | PK23GTAL | 9Q |
| | | 54 | 72 | 18 | QO154L225PQG ^{OBS} | QOC54UF ^[15] | — | 6-300 | 225 | PK23GTAL Included | 12Q | |
| | Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating—Copper Bus, QOM2 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker | | | | | | | | | | | |
| | 200 A | 30 | 40 | 10 | QO130M200PQ | QOC30UF ^[15] QOC30US | — | 4-250 | | 225 | PK23GTA (Order separately) | 11Q |
| | | 42 | 52 | 10 | QO142M200PQ | QOC42UF ^[15] QOC42US | — | | | 225 | PK23GTA (Order separately) | 11Q |
| | | 54 | 72 | 18 | QO154M200PQ ^{OBS} | QOC54UF ^[15] | — | | | 4-250 | 225 | PK23GTA (Order separately) |

^{OBS} This product is obsolete.

[15] Available in gray and white. For white equivalencies, add the "W" suffix to the reference, or see page 1-29.

QO Load Centers with Included Cover
1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.23: Load Centers with Included Cover (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

| Mains Rating | Short Circuit Current Rating | Spaces | Max. 1P Circuits [16] | Max. Tandem Circuit Breakers | Load Center [17] Box, Interior, and Cover | Al | Cu | Bus Rating | Equipment Ground Bar Kit | Box No. [18] |
|--|------------------------------|--------|-----------------------|------------------------------|---|-------|-------|------------|---------------------------|--------------|
| 125 A | 65 kA | 12 | 24 | 12 | QO112L125PGC | 6-2/0 | | 125 | PKGTALP1 Included | 5 |
| | 65 kA | 20 | 24 | 4 | QO120L125PGC OBS | 6-2/0 | | 125 | PKGTALP1 Included | 6 |
| | 65 kA | 24 | 34 | 10 | QO124L125PGC | 6-2/0 | | 125 | PK15GTA, LK100AN Included | 7 |
| Convertible Mains—Factory-Installed Main Lugs [19]—QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-3)—Copper Bus | | | | | | | | | | |
| 200 A | 65 kA | 30 | 40 | 10 | QO130L200PGC | 4-250 | | 225 | PK23GTA, LK100AN Included | 9 |
| 225 A | 65 kA | 42 | 52 | 10 | QO142L225PGC | 4-300 | | 225 | PK23GTA, LK100AN Included | 11 |
| | 65 kA | 54 | 72 | 18 | QO154L225PGC OBS | 4-300 | | 225 | PK23GTA, LK100AN Included | 12 |
| Convertible Mains—Factory-Installed Main Circuit Breaker—QOM1 Main Frame Size—Convertible to Main Lugs (See page 1-25 or Lower Amperage Main Circuit Breaker (See page 1-3)—Copper Bus [8][20] | | | | | | | | | | |
| 100 A | 22 kA | 12 | 24 | 12 | QO112M100PC | 6-2/0 | 6-1 | 125 | PK9GTA | 5 |
| | 22 kA | 16 | 24 | 8 | QO116M100PC OBS | 6-2/0 | 6-1 | 125 | PK9GTA | 6 |
| | 22 kA | 20 | 24 | 4 | QO120M100PC | 6-2/0 | 6-1 | 125 | PK9GTA | 6 |
| | 22 kA | 24 | 34 | 10 | QO124M100PC | 4-300 | | 125 | PK15GTA | 7 |
| Convertible Mains—Factory-Installed Main Circuit Breaker—QOM2 Main Frame Size—Convertible to Main Lugs (See page 1-25 or Lower Amperage Main Circuit Breaker (See page 1-3)—Copper Bus [8][20] | | | | | | | | | | |
| 150 A | 22 kA | 30 | 40 | 10 | QO130M150PC | 4-250 | | 225 | PK15GTA | 9 |
| | 22 kA | 42 | 52 | 10 | QO142M150PC | 4-300 | | 225 | PK18GTA | 11 |
| 200 A | 22 kA | 30 | 40 | 10 | QO130M200PC | 4-250 | | 225 | PK15GTA | 9 |
| | 22 kA | 40 | 60 | 20 | QO140M200PC | 4-300 | 4-250 | 225 | PK23GTA | 10 |
| | 22 kA | 42 | 52 | 10 | QO142M200PC | 4-300 | | 225 | PK18GTA | 11 |
| | 22 kA | 54 | 72 | 18 | QO154M200PC | 4-300 | | 225 | PK23GTA | 12 |

OBS This product is obsolete.

Plug-on Neutral Load Center Main Lugs, Convertible Mains
1Ø3W—120/240 Vac Rainproof—UL Listed

QO Plug-on Neutral Load Centers and CAFI Breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.24: Convertible Main Lugs Plug-on Neutral Load Center (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

| Mains Rating | Spaces | Max. Single Pole Circuits [16] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Al | Cu | Bus Rating | Equipment Ground Bar Kit (Factory Included) | Box No. [21] | |
|--|--|--------------------------------|------------------------------|------------------------------|---------------|-------|------------|---|--------------|----|
| R A I N P R O O F | Convertible Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating [22][19][23] QOM1 Main Circuit Breaker Frame Size, Convertible to Main Circuit Breaker — Equipment Ground Bar Included | | | | | | | | | |
| | 125 A | 12 | 24 | 12 | QO112L125PGRB | 6-2/0 | | 125 | PKGTALP1 | 3R |
| | | 16 | 24 | 8 | QO116L125PGRB | 6-2/0 | | 125 | PKGTALP1 | 4R |
| | | 24 | 34 | 10 | QO124L125PGRB | 6-2/0 | | 125 | PK15GTA | 4R |
| Convertible Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating [22][19][23] QOM2 Main Circuit Breaker Frame Size, Convertible to Main Circuit Breaker — Equipment Ground Bar Included | | | | | | | | | | |
| 200 A | 12 | 24 | 12 | QO112L200PGRB | 4-300 | 4-250 | 225 | PKGTALP1 | 5R | |
| | 30 | 40 | 10 | QO130L200PGRB | 4-250 | | 225 | PK23GTA | 6R | |
| | 40 | 60 | 20 | QO140L200PGRB | 4-300 | 4-250 | 225 | PKGTALP2 | 7R | |
| | 42 | 52 | 10 | QO142L225PGRB | 4-300 | | 225 | PK23GTA, LK100AN | 8R | |

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

[16] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

[17] Order F for flush device or S for surface device.

[18] See page 1-34

[19] UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.

[20] [9]22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

[21] See Enclosure Dimensions, page 1-36 or Indoor Enclosure Dimensions and Knockout Information, page 1-34

[22] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.

[23] Side hinge door device; allow 1-1/4 in. on left side for door to open.

**Plug-on Neutral Load Center Main Breaker, Convertible Mains
1Ø3W—120/240 Vac Rainproof—UL Listed**

QO Plug-on Neutral Load Centers and CAFI circuit breakers are engineered for a quick Plug-on Neutral connection on every unit.

Table 1.25: Convertible Main Breaker Plug-on Neutral Load Center (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [24] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Al | Cu | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [25] | |
|-----------------------------------|---|--------|--------------------------------|------------------------------|------------------------------|-------|-------|------------|---|--------------|--|
| RAI N P R O O F | Convertible Mains — Factory-Installed Main Breaker — 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (See page 1-3) [26] QOM1 Main Circuit Breaker Frame Size—Copper Bus | | | | | | | | | | |
| | 100 A | 12 | 24 | 12 | QO112M100PRB | 6-2/0 | 125 | PK9GTA | 3R | | |
| | | 16 | 24 | 8 | QO116M100PRB | 6-2/0 | 125 | PK9GTA | 4R | | |
| | | 20 | 24 | 4 | QO120M100PRB | 6-2/0 | 125 | PK9GTA | 4R | | |
| | | 24 | 34 | 10 | QO124M100PRB | 6-2/0 | 125 | PK15GTA | 4R | | |
| | 125 A | 24 | 34 | 10 | QO124M125PRB | 6-2/0 | 125 | PK15GTA | 4R | | |
| | Convertible Mains — Factory-Installed Main Breaker — 22 kA Short Circuit Current Rating Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker (See page 1-3) [26] QOM2 Main Circuit Breaker Frame Size—Copper Bus | | | | | | | | | | |
| | 150 A | 20 | 30 | 10 | QO120M150PRB | 4-300 | 4-250 | 225 | PK15GTA | 5R | |
| | | 30 | 40 | 10 | QO130M150PRB | 4-250 | | 225 | PK15GTA | 6R | |
| | 200 A | 20 | 30 | 10 | QO120M200PRB | 4-300 | 4-250 | 225 | PK15GTA | 5R | |
| | | 30 | 40 | 10 | QO130M200PRB | 4-250 | | 225 | PK15GTA | 6R | |
| | | 40 | 60 | 20 | QO140M200PRB | 4-300 | 4-250 | 225 | PK23GTA | 7R | |
| | | 42 | 52 | 10 | QO142M200PRB | 4-300 | | 225 | PK18GTA | 8R | |
| | 225 A | 42 | 52 | 10 | QO142M225PRB | 4-300 | | 225 | PK18GTA | 8R | |

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

[24] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

[25] See Enclosure Dimensions, page 1-36 or Indoor Enclosure Dimensions and Knockout Information, page 1-34

[26] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10 k AIR branch circuit breakers to permit their application on systems up to 22 kA

Backup Power Solutions
1Ø3W—120/240 Vac Backup Power—UL Listed


Table 1.26: Backup Power Solutions

| | Mains Rating (A) | Spaces | Max. Single Pole Circuits [27] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover | Equipment Grounding Bar Kit (Order Separately) | Main Wire Size AWG/kcmil | | Bus Rating | Box No. [28] | |
|-----------|--|--------|--------------------------------|------------------------------|-------------------------------------|--|--------------------------|-------|------------|--------------|-----|
| | | | | | | | Al | Cu | | | |
| INDOOR | Generator Panels—Manual Transfer for Sub-Feed Applications NEMA 1 (Indoor) | | | | | | | | | | |
| | Factory-Installed Main Circuit Breakers with Mechanical Interlock—10 kA Short Circuit Current Rating | | | | | | | | | | |
| | 30 | 4 | 8 | 4 | QO48M30DSGP | PK7GTA | 14–8 | 14–8 | 30 | 4 | |
| | 60 | 4 | 8 | 4 | QO48M60DSGP | | 8–2 | 8–2 | 60 | 4 | |
| | Split Bus Plug-on Neutral Load Centers—Manual Transfer for use with Temporary Backup Power Source Applications NEMA 1 (Indoor) | | | | | | | | | | |
| | 200 | 48 | 48 | 0 | 0 | QO122X26M200PC ^{OBS} | PK23GTA | 4–250 | 4–250 | — | 12 |
| 36 | | 69 | 34 | 0 | HOM1427X2242M200PC ^{OBS} | PK27GTA | 4–250 | 4–250 | — | 12 | |
| RAINFROOF | Generator Panels—Manual Transfer with Generator Power Inlet Plug for Sub-Feed Applications NEMA 3R (Outdoor) | | | | | | | | | | |
| | Factory-Installed Main Circuit Breakers with Mechanical Interlock—10 kA Short Circuit Current Rating | | | | | | | | | | |
| | 100 | 4 | 8 | 4 | 0 | QO1DM10020TRBR ^{OBS} | Factory-Installed | — | 8–2 | 100 | 17R |
| | | 4 | 8 | 4 | 0 | QO1DM10030TRBR | | — | | 100 | 17R |
| | | 4 | 8 | 4 | 0 | QO1DM10050TRBR | | — | | 100 | 17R |
| | Split Bus Plug-on Neutral Load Centers—Manual Transfer for use with Temporary Backup Power Source Applications NEMA 1 (Indoor) | | | | | | | | | | |
| 200 | 48 | 48 | 0 | 0 | QO122X26M200PC ^{OBS} | PK23GTA | — | 4–250 | — | 12 | |

^{OBS} This product is obsolete.

Table 1.27: Manual Power Transfer Accessories

| | Description | Cat. No. | Schedule |
|---|---|-------------|----------|
| Manual Transfer Equipment Kit | For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be "ON" at a time. | QO2DTI | DE2E |
| | QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2P or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers. | QO2DTIM | DE2E |
| | Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02. | PK4DTIM4LA | DE3A |
| | Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02. | PK4DTIM4HA | DE3A |
| | Secures two 2P circuit breakers to left side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02. | PK4DTIM4LAL | DE3A |
| Generator Circuit Breaker Interlock Kit | For use on "G" and "S" Series NEMA 1 and "G", "S1" and "S2" Series NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit. | QOCRBGK1C | DE3A |
| | For use on "G" and "S" Series NEMA 1 and "G" and "S1" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit. | QOCGK2C | DE3A |
| | For use on "S2" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit. | QORBGK2C | DE3A |

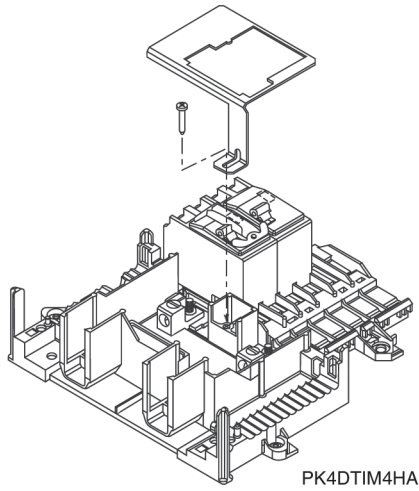

[27] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

[28] See page 1-34 or page 1-36

QO Standard Load Center Main Lugs and Main Breaker, Fixed Mains
1Ø3W—120/240 Vac Special Applications—UL Listed

Table 1.28: Low Amperage Fixed Main Lugs Indoor Load Centers (Accepts Only QO Plug-on Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. 1P Circuits [29] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Indoor Cover with Door (Order Separately) | | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [30] |
|--------|---|--------|-----------------------|------------------------------|---|---|---------|--------------------------|--------|------------|---|--------------|
| | | | | | | Flush | Surface | Al | Cu | | | |
| INDOOR | Fixed Mains—Factory-Installed Main Lugs—10 kA Short Circuit Current Rating [31] | | | | | | | | | | | |
| | 30 A | 2 | 2 | 0 | QO2L30S [32] [33] | Cover Included—Without Door | | 12–10 | 14–10 | 30 | PK3GTA1 | 1 |
| | 70 A | 2 | 4 | 2 | QO24L70F / S [34] [35] | Cover Included—Without Door | | 12–3 | 14–4 | 70 | PK4GTA | 2 |
| | 100 A | 6 | 12 | 6 | QO612L100F / S [34] [36] | Cover Included—Without Door | | 8–1 | | 100 | PK7GTA | 4 |
| | | 6 | 12 | 6 | QO612L100DF / S [34] [36] | Cover Included—With Door | | | | 100 | PK7GTA | 4 |
| | | 8 | 16 | 8 | QO816L100F / S [34] [36] | Cover Included—Without Door | | | | 100 | PK7GTA | 4 |
| | | 8 | 16 | 8 | QO816L100DF / S [34] [36] | Cover Included—With Door | | | | 100 | PK7GTA | 4 |
| | | 6 | 12 | 6 | QO612L100DFCU ^{obs} / QO612L100DSCU [34] [36] [37] | Cover Included—With Door | | | | 100 | PK7GTA | 4 |
| | | 8 | 16 | 8 | QO816L100DFCU ^{obs} / QO816L100DSCU [34] [36] [37] | Cover Included—With Door | | | | 100 | PK7GTA | 4 |
| | 125 A | 4 | 8 | 4 | QO148L125GF / S [34] [38] | Cover Included—Without Door | | 12–2/0 | 14–2/0 | 125 | PK7GTA [39] | 21 |

^{obs} This product is obsolete.

Table 1.29: Low Amperage Fixed Mains Indoor Load Centers with Factory Installed Ground Bar (Accepts Only QO Plug-On Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Short Circuit Current Rating | Spaces | Max. 1P Circuits [29] | Max. Tandem Circuit Breakers | Load Center [34] Box, Interior, and Cover | Equipment Ground Bar Kit (Order Separately) | Main Wire Size AWG/kcmil | | Bus Rating | Box No. [40] | |
|--------|---|------------------------------|--------|-----------------------|----------------------------------|---|---|--------------------------|-------|------------|--------------|--|
| | | | | | | | | Al | Cu | | | |
| INDOOR | Manufactured Housing: 1Ø2W 120 Vac—Main Lugs Only—CSA Certified | | | | | | | | | | | |
| | 30 A [41] | 10 kA | 2 | 2 | 0 | QO2L30TTS ^{obs} [42] | Factory-installed | 12–10 | 14–10 | 30 | 1 | |
| | 50 A | 10 kA | 2 | 4 | 2 | QO24L50TTS ^{obs} [43] | | — | 14–6 | 70 | 2 | |
| | 1Ø2W 120 Vac—Main Circuit Breaker—CSA Certified | | | | | | | | | | | |
| | 30 A | 10 kA | 3 | 5 | 2 | QO35FM30TTF ^{obs} / QO35FM30TTS | Factory-installed | [44] | | — | 3 | |
| | 1Ø3W 120/240 Vac—Main Lugs Only—CSA Certified | | | | | | | | | | | |
| | 70 A | 10 kA | 2 | 4 | 2 | QO24L70TS [43] | Factory Installed | 12–3 | 14–4 | 70 | 2 | |
| | 100 A | 10 kA | 6 | 12 | 6 | QO612L100TF ^{obs} | | 4–1 | | 100 | 4 | |
| | | | 6 | 12 | 6 | QO612L100DTF / S ^{obs} [45] | | | | 100 | 4 | |
| | | | 8 | 16 | 8 | QO816L100TF ^{obs} / QO816L100TS [45] | | | | 100 | 4 | |
| 8 | | | 16 | 8 | QO816L100DTF / QO816L100DTS [45] | 100 | | | | 4 | | |

^{obs} This product is obsolete.

Table 1.30: High Amperage Fixed Main Breaker and Main Lugs Indoor Load Centers (Accepts Only QO Plug-On Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. 1P Circuits [29] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Indoor Cover with Door (Order Separately) | | Main Wire Size AWG/kcmil | | Equipment Ground Bar Kit (Order Separately) | Box No. [30] | |
|-----------------|--|----------------|-----------------------|------------------------------|------------------------------|---|-------------|--------------------------|--------------------------|---|--------------|--|
| | | | | | | Flush | Surface | Al | Cu | | | |
| INDOOR | 300 A | 42 | 42 | 0 | QONQ42MS300 (Int) [46] | NC62NQVF | NC62NQVS | (1) 4–500 | | PK27GTA [47] or PK15GTA6 | 16 | |
| | | | | | MH62 (Box) [48] | | | or (2) 4–3/0 | | | | |
| | 400 A | 42 | 42 | 0 | QONQ42MS400 (Int) [46] | NC62NQVF | NC62NQVS | (1) 4–500 | | PK27GTA [47] or PK15GTA6 | 16 | |
| | | | | | MH62 (Box) [48] | | | or (2) 4–3/0 | | | | |
| | Fixed Mains—Factory-Installed Main Lugs—65 kA Short Circuit Current Rating [31] [49] | | | | | | | | | | | |
| | 400 A | 30 | 30 | 0 | QONQ30LS400 (Int) [46] | NC50NQVF | NC50NQVS | (1) 1/0–750 | | PK27GTA [47] or PK15GTA6 | 15 | |
| MH50 (box) [48] | | or (2) 1/0–300 | | | | | | | | | | |
| 400 A | 42 | 42 | 0 | QONQ42LS400 (Int) [46] | NC50NQVF | NC50NQVS | (1) 1/0–750 | | PK27GTA [47] or PK15GTA6 | 15 | | |
| | MH50 (box) [48] | or (2) 1/0–300 | | | | | | | | | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

- [29] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
- [30] See page 1-34
- [31] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
- [32] Will not accept QO-EPD or Qwik-Gard™ QO-GFI or QO-AFI circuit breakers.
- [33] Mains rated 25 A when Al wire is used.
- [34] Order F for flush device or S for surface device.
- [35] Use 10 AWG maximum size wire for GFI and AFI circuit breakers.
- [36] 70 A Max. branch circuit breaker and 100 A max. back fed main circuit breaker.
- [37] CU indicates copper bus.
- [38] Copper bus.
- [39] Factory-included.
- [40] See Table 1.73 Knockout Information, page 1-34
- [41] Mains rating 25 A when Al wire is used.
- [42] Will not accept Qwik-Gard™ QO-GFI or QO-AFI circuit breaker.
- [43] Use 10 AWG maximum size wire for GFI and AFI circuit breakers.
- [44] Main circuit breaker is a field-installed standard QO single pole circuit breaker. Order separately from page 1-2, page 1-3.
- [45] 70 A max. branch circuit breaker and 70 A max. back fed main circuit breaker.
- [46] Interior only, order box separately.
- [47] PK27GTA includes a 6–2/0 AWG Al/Cu lug.
- [48] PE1A Discount Schedule.
- [49] UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.

QO Standard Load Center Main Lugs, Fixed Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.31: Fixed Main Lugs Rainproof Load Centers (Accepts Only QO Plug-on Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [50] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [51] | |
|-----------|--|--------|--------------------------------|------------------------------|------------------------------|--------------------------|------|-------------------|---|--------------|-----|
| | | | | | | Al | Cu | | | | |
| RAINPROOF | Non-Metallic Enclosure | | | | | | | | | | |
| | Fixed Mains—Factory-installed Main Lugs—10 kA Short Circuit Current Rating | | | | | | | | | | |
| | 60 A | 2 | 4 | 2 | QO24L60NRNM | 14-4 | 14-4 | 60 | Factory-installed | 1NM | |
| | Metallic Enclosure | | | | | | | | | | |
| | Fixed Mains—Factory-installed Main Lugs—10 kA Short Circuit Current Rating | | | | | | | | | | |
| | 40 A | 2 | 2 | 0 | QO2L40RB [52] | 12-6 | 14-6 | 40 | PK3GTA1 | 1R | |
| | 70 A | 2 | 4 | 2 | QO24L70RB [52] | 12-3 | 14-4 | 70 | PK4GTA | 1R | |
| | 100 A | 6 | 12 | 6 | QO612L100RB [53] | 8-1 | | 100 | PK7GTA | 2R | |
| | | 6 | 12 | 6 | QO612L100TRB [53] | | | 100 | Factory-installed | 2R | |
| | | 8 | 16 | 8 | QO816L100RB [53] | | | 100 | PK7GTA | 2R | |
| | | 6 | 12 | 6 | QO612L100RBCU [53] [54] | | | 100 | PK7GTA | 2R | |
| | | 8 | 16 | 8 | QO816L100RBCU [53] [54] | | | 100 | PK7GTA | 2R | |
| | | 125 A | 4 | 8 | 4 | | | QO148L125GRB [54] | 12-2/0 | 14-2/0 | 125 |

Standard Load Center Main Breaker, Convertible Mains

1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.32: Convertible Main Breaker Load Centers (Accepts Only QO Plug-on Circuit Breakers - Not compatible with QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [50] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Al | Cu | Equipment Ground Bar Kit (Order Separately) | Bus Rating | Box No. [51] | |
|---|--------------|--------|--------------------------------|------------------------------|------------------------------|----|----------|---|------------|--------------|-----------|
| | | | | | | | | | | | RAINPROOF |
| Convertible to Main Lugs (See page 1-25 or Lower Amperage Main Circuit Breaker (See page 1-3) [55], [56]) | | | | | | | | | | | |
| QOM1 or QOM2 Main Circuit Breaker Frame Size—Copper Bus | | | | | | | | | | | |
| 125 A | 6 | 12 | 6 | QO1612M125FTRB [57] | 4-2/0 | | PK12GTA | 125 | 3R | | |
| 150 A | 8 | 16 | 8 | QO1816M150FTRB [57] | 4-250 | | PK15GTAL | 200 | 4R | | |
| 200 A | 8 | 16 | 8 | QO1816M200FTRB [57] | 4-250 | | PK15GTAL | 200 | 4R | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

[50] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

[51] See page 1-36 or Indoor Enclosure Dimensions and Knockout Information, page 1-34

[52] Use 10 AWG maximum size wire for GFI and AFI circuit breakers.

[53] 70 A Max. branch circuit breaker and 70 A max. back fed main circuit breaker.

[54] Copper bus.

[55] Side hinge door device; allow 1-1/4 in. on left side for door to open.

[56] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10 k AIR branch circuit breakers to permit their application on systems up to 22 kA

[57] QO1612M125FTRB provided with QOM1 frame main circuit breaker. QO1816M150FTRB and QO1816M200FTRB provided with QOM2 frame main circuit breaker.

QO Riser Panels

1Ø3W—120/240 Vac Special Applications—UL Listed

Table 1.33: Riser Panels for Offset Interior for Wide Gutter—30 A Maximum Branch Circuit Breaker on Left Side of Interior [58], [59] (Compatible with QO Plug-on Circuit Breakers and QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [60] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Load Center Cover | | Equipment Ground Bar Kit (Order Separately) | Main Wire Size AWG/kcmil | | Bus Ratings | Box No. [61] |
|---|---|--------|--------------------------------|------------------------------|------------------------------|-------------------|----------------|---|--------------------------|-----|-------------|--------------|
| | | | | | | Flush | Mono-Flat | | Al | Cu | | |
| INDOOR | Convertible Mains—Factory—Installed Main Lugs, 65 kA Short Circuit Current Rating Convertible to QOM1 22 kA Short Circuit Current Rating Main Circuit Breaker (See page) when used with QOC cover below—Copper Bus | | | | | | | | | | | |
| | 125 A | 12 | 24 | 12 | QO112L125PWG OBS | QOC20UFWG [62] | NQC20FWGW [62] | PK15GTA | 6–2/0 | 125 | 14 | |
| | | 20 | 24 | 4 | QO120L125PWG | QOC20UFWG [62] | NQC20FWGW [62] | PK15GTA | | 125 | 14 | |
| | Convertible Mains—Factory—Installed Main Lugs, 65 kA Short Circuit Current Rating Convertible to QOM2 22 kA Short Circuit Current Rating Main Circuit Breaker (See page) when used with QOC cover below—Copper Bus | | | | | | | | | | | |
| 200 A | 30 | 40 | 10 | QO130L200PWG | QOC30UFWG [62] | NQC30FWGW [62] | PK23GTA | 4–250 | 225 | 23 | | |
| Convertible Mains—Factory—Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible to Main Lugs (See page) or Lower Amperage QOM2 Main Circuit Breaker (See page) when used with QOC cover below—Copper Bus | | | | | | | | | | | | |
| 200 A | 24 | 36 | 12 | QO124M200PWG125 [63] | QOC30UFWG [62] | NQC30FWGW [62] | PK23GTA | 4–250 | 225 | 23 | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

OBS This product is obsolete.

Panelboard-style Covers for Riser Panels

Mono-Flat™ Front available for riser panels as an alternative to standard load center cover listed above. Provides a low-profile, aesthetically pleasing solution for high-traffic areas in upscale multi-family applications. Deadfront included. Lock kit not provided. Cover NQC30FWG CANNOT be used when panel has been converted to a main circuit breaker panel. [64]

| Mains Rating of Load Center | Cat. No. |
|-----------------------------|--------------|
| 125 A | NQC20FWG OBS |
| 200 A | NQC30FWG OBS |

OBS This product is obsolete.

Table 1.34: Auxiliary Gutter

| Cat. No. | Cover | Conduit Riser Size | Width | Height | Depth |
|---|-------|---------------------------|-------|--------|-------|
| UL Listed for use with standard 1Ø and 3Ø load centers for riser applications [65]. For auxiliary gutter-load center compatibility, see catalog number 1100CT0501 | | | | | |
| SDAG26 | Flush | 1-3/4, 2, 2-1/2 or [66] 3 | 13.50 | 26.12 | 3.75 |

Table 1.35: Tap Kits for Use with Auxiliary Gutter

| Cat. No. | Use with Auxiliary Gutter Cat. No. | Riser Wire | | Tap Off Wire | |
|----------------------------|------------------------------------|--------------------------------------|---------------------|--------------------------------------|---------------------|
| | | Lug Type | Al/Cu Wire Size | Lug Type | Al/Cu Wire Size |
| SDGT30020 | SDAG26 | Mechanical (Included) | (2) 6 AWG–300 kcmil | Mechanical (Included) | (1) 6–2/0 AWG |
| SDGT300300 | SDAG26 | Mechanical (Included) | (2) 6 AWG–300 kcmil | Mechanical (Included) | (1) 6 AWG–300 kcmil |
| SDGT300C10C | SDAG26 | Anderson VCEL030516H1 (Not included) | (2) 4 AWG–300 kcmil | Anderson VCEL02114S1 (Not Included) | (1) 8–1/0 AWG |
| SDGT300C300C OBS | SDAG26 | Anderson VCEL030516H1 (Not included) | (2) 4 AWG–300 kcmil | Anderson VCEL030516H1 (Not included) | (1) 4 AWG–300 kcmil |
| QOGL20 Grounding Terminals | SDAG26 | Mechanical (Included) | (2) 6–2/0 AWG | — | — |

OBS This product is obsolete.

[58] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
 [59] UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.
 [60] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
 [61] See page 1-34
 [62] Available in gray and white. For white equivalencies, add the “W” suffix to the reference, or see page 1-29.
 [63] Comes with 125 A main circuit breaker factory installed.
 [64] Order catalog number PK4FL for field-installed lock kit.
 [65] One tap kit required for each riser wire.
 [66] When used with B300 bolt-on hubs.

QO Standard Load Center Main Lugs and Main Breaker

3Ø4W, 208Y/120 Vac—3Ø4W, 240/120 Vac Delta—3Ø3W, 240 Vac Delta—Indoor and Rainproof—UL Listed

Table 1.36: Main Lugs and Main Breaker Load Centers (Accepts Only QO Plug-on Circuit Breakers—Not compatible with QO Plug-on Neutral Circuit Breakers)

| | Mains Rating | Max. Number of 1P QO circuit breakers | Load Center Box and Interior | Indoor Cover with Door (Order Separately) | | Main Wire Size AWG/kcmil | | Equipment Ground Bar Kit (Order Separately) | Box No. [67] |
|-----------|---|---------------------------------------|------------------------------|---|-----------|--------------------------|-------|---|--------------|
| | | | Cat. No. | Flush | Surface | Al | Cu | | |
| INDOOR | Fixed Mains—Factory-installed Main Lugs—Copper Bus—65 kA Short Circuit Current Rating [68] | | | | | | | | |
| | 60 A | 3 | QO403L60NF/S | Cover Included With Load Center (No Door) | | — | 10–6 | PK4GTA | 13 |
| | 125 A | 20 | QO320L125G [69] | QOC24UF | QOC24US | 6–20 | 6–20 | Factory-incl. [70] | 7 |
| | | 24 | QO324L125G [69] | QOC24UF | QOC24US | | | Factory-incl. [70] | 7 |
| | 200 A | 18 | QO318L200G [69] | QOC30UF | QOC30US | 6–250 | 6–250 | Factory-incl. [71] | 9 |
| | | 30 | QO330L200G [69] | QOC30UF | QOC30US | | | Factory-incl. [71] | 9 |
| | 225 A | 42 | QO342L225G [69] | QOC42UF | QOC42US | 6–300 | 6–300 | Factory-incl. [71] | 11 |
| | Convertible Mains—Factory-installed QDL Main Circuit Breaker—Copper Bus—25 kA Short Circuit Current Rating [72] | | | | | | | | |
| | 100 A | 27 | QO327M100 [73] | QOC30UF | QOC30US | 4–2/0 | 4–2/0 | PK15GTA | 9 |
| | 125 A | 30 | QO330MQ125 [74] [69] | QOC342MQF | QOC342MQS | 4–300 | 4–300 | PK18GTA | 12 |
| | | 30 | QO330MQ150 [74] [69] | QOC342MQF | QOC342MQS | | | PK18GTA | 12 |
| | 150 A | 42 | QO342MQ150 [74] [69] | QOC342MQF | QOC342MQS | 4–300 | 4–300 | PK23GTA | 12 |
| | | 30 | QO330MQ200 [74] [69] | QOC342MQF | QOC342MQS | | | PK18GTA | 12 |
| | 200 A | 42 | QO342MQ200 [74] [69] | QOC342MQF | QOC342MQS | 4–300 | 4–300 | PK23GTA | 12 |
| | | 30 | QO330MQ225 [74] [69] | QOC342MQF | QOC342MQS | | | PK23GTA | 12 |
| RAINPROOF | Fixed Mains—Factory-installed Main Lugs—Copper Bus—65 kA Short Circuit Current Rating [68] [75] | | | | | | | | |
| | 60 A | 3 | QO403L60NRB | Cover Included | | — | 10–6 | PK4GTA | 10R |
| | 125 A | 12 | QO312L125GRB | | | 6–2/0 | 6–2/0 | Factory Incl. [70] | 3R |
| | | 20 | QO320L125GRB | | | 6–250 | 6–250 | Factory Incl. [71] | 6R |
| | 200 A | 18 | QO318L200GRB | | | 6–300 | 6–300 | Factory Incl. [71] | 6R |
| | | 30 | QO330L200GRB | | | 6–300 | 6–300 | Factory Incl. [71] | 8R |
| | 225 A | 42 | QO342L225GRB | 4–2/0 | 4–2/0 | PK15GTA | 6R | | |
| | Convertible Mains—Factory-installed QDL Main Circuit Breaker—Copper Bus—25 kA Short Circuit Current Rating [72] [75] | | | | | | | | |
| | 100 A | 27 | QO327M100RB [73] | Cover Included | | 4–2/0 | 4–2/0 | PK15GTA | 6R |
| | 125 A | 30 | QO330MQ125RB [74] | | | 4–300 | 4–300 | PK18GTA | 14R |
| | | 30 | QO330MQ150RB [74] | | | 4–300 | 4–300 | PK18GTA | 14R |
| | 200 A | 30 | QO330MQ200RB [74] | | | 4–300 | 4–300 | PK18GTA | 14R |
| | | 42 | QO342MQ200RB [74] | | | 4–300 | 4–300 | PK23GTA | 14R |
| | 225 A | 42 | QO342MQ225RB [74] | 4–300 | 4–300 | PK23GTA | 14R | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115C as Type 1, Class 2.

Obs This product is obsolete.

Table 1.37: 3Ø, Main Circuit Breakers

| Amperage | 25 k AIR | 65 k AIR | 100 k AIR [76] |
|---|----------|----------|----------------|
| Field-installed alternate main circuit breakers for QO 3Ø main circuit breaker load centers rated 70–225 A. Do not exceed the load center main rating. | | | |
| 70 A | QDL32070 | QGL32070 | QJL32070 |
| 80 A | QDL32080 | QGL32080 | QJL32080 |
| 90 A | QDL32090 | QGL32090 | QJL32090 |
| 100 A | QDL32100 | QGL32100 | QJL32100 |
| 110 A | QDL32110 | QGL32110 | QJL32110 |
| 125 A | QDL32125 | QGL32125 | QJL32125 |
| 150 A | QDL32150 | QGL32150 | QJL32150 |
| 175 A | QDL32175 | QGL32175 | QJL32175 |
| 200 A | QDL32200 | QGL32200 | QJL32200 |
| 225 A | QDL32225 | QGL32225 | QJL32225 |



QO330MQ200



QO312L125G

Table 1.38: 3Ø, Main Lugs Kits

| Main Lugs Amperage Rating | Cat. No. | Lug Wire Size AWG/kcmil |
|---|----------|-------------------------|
| Field-installed main lugs for convertible 3Ø main circuit breaker load centers | | |
| 125 A | QOL3125 | 6–2/0 Cu/Al |
| 225 A | QOL3225 | 6–300 Cu/Al |

[67] See page 1-34

[68] UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.

[69] For Certification to IEC 60439-1 contact the local Square D sales office; otherwise panels are NOT CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current Rating when QOXD...branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO...VS branch circuit breakers are used).

[70] PK15GTA.

[71] PK23GTA and LK100AN.

[72] 25 kA short circuit current rating SCCR maximum with Square D Type QDL main circuit breaker, or 22 kA SCCR maximum with back-fed Type QO-VH main circuit breaker, feeding QO 10 k AIR branch circuit breakers.

[73] Includes factory-installed back fed QO3100VH main circuit breaker.

[74] 65 kA Short Circuit Current Rating maximum with field-installed Square D type QGL 65 k AIR minimum main circuit breaker feeding QO and Q1 10 k AIR minimum branch circuit breakers.

[75] Side hinge door device allow 1-1/4 in. on left side for door to open.

[76] When these 3P circuit breakers are used as the main circuit breaker of a 3Ø load center, the maximum AIR rating is 65 kA at 240 Vac and 100 kA at 208 Vac.



HOM 1P and 2P



HOM2200BB Branch Circuit Breaker
4 Spaces Required

Homeline Standard Plug-On Circuit Breakers

The Square D Homeline circuit breakers are in a 1 in. wide format for 1-pole circuit breakers. They are designed to plug into Homeline load centers.

Table 1.39: Standard HOM Plug-on Circuit Breakers

| Ampere Rating | AIR | 1P—120 Vac, 1 Space Required | 2P—120/240 Vac Common Trip 2 Spaces Required. |
|---------------|-------|------------------------------|---|
| 15 A | 10 kA | HOM115 [1][2] | HOM215 [2] |
| 20 A | 10 kA | HOM120 [1][2] | HOM220 [2] |
| 25 A | 10 kA | HOM125 [2] | HOM225 [2] |
| 30 A | 10 kA | HOM130 [2] | HOM230 [2] |
| 35 A | 10 kA | — | HOM235 [2] |
| 40 A | 10 kA | HOM140 [2] | HOM240 [2] |
| 45 A | 10 kA | — | HOM245 [2] |
| 50 A | 10 kA | HOM150 [2] | HOM250 [2] |
| 60 A | 10 kA | — | HOM260 [2] |
| 70 A | 10 kA | — | HOM270 [2] |
| 80 A | 10 kA | — | HOM280 [2] |
| 90 A | 10 kA | — | HOM290 [2] |
| 100 A | 10 kA | — | HOM2100 [2] |
| 110 A | 10 kA | — | HOM2110 [2] |
| 125 A | 10 kA | — | HOM2125 [2] |
| 150 A | 10 kA | — | HOM2150BB [2][3] |
| 175 A | 10 kA | — | HOM2175BB [2][3] |
| 200 A | 10 kA | — | HOM2200BB [2][3] |

Homeline High Magnetic Circuit Breakers (HOM-HM)

High magnetic trip circuit breakers are recommended for applications where high initial inrush current may occur.

Table 1.40: HOM-HM Circuit Breakers

| Amperes | 1P—120/240 Vac | 2Ps |
|---------|----------------|-----|
| 20 A | HOM120HM [2] | — |

Homeline Ground-Fault Circuit Breaker (HOM-GFI)

HOM-GFI circuit breakers provide overload and short circuit protection, combined with Class A ground fault protection. Class A denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 milliamperes or more.

Table 1.41: HOM-GFI Circuit Breakers

| Circuit Breaker Type | Ampere Rating | AIR | 1P—120 Vac 1 Space Required | 2P—120/240 Vac Common Trip 2 Spaces Required |
|---|---------------|-------|-----------------------------|--|
| Ground-Fault Circuit Interrupter(Pigtail Neutral) | 15 A | 10 kA | HOM115GFI | HOM215GFI |
| | 20 A | 10 kA | HOM120GFI | HOM220GFI |
| | 25 A | 10 kA | — | HOM225GFI |
| | 30 A | 10 kA | — | HOM230GFI |
| | 35 A | 10 kA | — | HOM235GFI |
| | 40 A | 10 kA | — | HOM240GFI |
| | 45 A | 10 kA | — | HOM245GFI |
| Plug-On Neutral Ground-Fault Circuit Interrupter | 15 A | 10 kA | HOM115PGFI | — |
| | 20 A | 10 kA | HOM120PGFI | — |



HOM 1P GFI
(With Ground Fault
Circuit Interrupter)
1 Space Required



HOM 2P GFI
(With Ground Fault
Circuit Interrupter)
2 Spaces Required

[1] UL Listed as SWD (switching duty) rated. Suitable for switching 120 Vac fluorescent lighting loads.

[2] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[3] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.



HOM 1P CAFE
Plug-on Neutral



HOM 1P CAFE
Pigtail



HOM 1P DF
Plug-on Neutral



HOM 1P DF
Pigtail

Homeline Combination Arc Fault Circuit Interrupters (HOM-CAFI)

Homeline Combination Arc Fault Circuit Interrupters—Provide overload and short circuit protection, plus arc fault protection in accordance with the NEC and UL 1699.

Table 1.42: HOM-CAFI Circuit Breakers

| Circuit Breaker Type | Ampere Rating | Poles 120 Vac | Cat. No. |
|--|---------------|------------------|--------------------|
| One-Pole | | | |
| Combination Arc-Fault Circuit Interrupter with Pigtail Neutral | 15 A | 1 | HOM115CAFI [4] |
| | 20 A | 1 | HOM120CAFI [4] |
| Plug-On Neutral Combination Arc-Fault Interrupter | 15 A | 1 | HOM115PCAIFI [4] |
| | 20 A | 1 | HOM120PCAIFI [4] |
| Two-Pole | | | |
| Combination Arc-Fault Circuit Interrupter with Pigtail Neutral | 15 A | 2 | HOM215CAFI [4] [5] |
| | 20 A | 2 | HOM220CAFI [4] [5] |

Homeline Dual Function Circuit Breaker (HOM-DF)

Homeline Combination Arc Fault and Ground Fault Circuit Interrupters (Dual Function)—Provide overload and short circuit protection, plus arc fault and ground fault protection in a single device in accordance with the NEC, UL 1699 and UL943.

Table 1.43: HOM-DF Circuit Breakers

| Circuit Breaker Type | Ampere Rating | Poles 120 Vac | Cat. No. |
|---|---------------|------------------|---------------|
| Combination Arc-Fault and Ground Fault Circuit Interrupter with Pigtail Neutral | 15 A | 1 | HOM115DF [4] |
| | 20 A | 1 | HOM120DF [4] |
| Plug-On Neutral Combination Arc-Fault and Ground Fault Circuit Interrupter | 15 A | 1 | HOM115PDF [4] |
| | 20 A | 1 | HOM120PDF [4] |

Homeline Equipment Protection Device (HOM-EPD)

Homeline Equipment Protection Device—Circuit Breakers with 30 mA Equipment Ground Fault Protection (UL Listed).

Table 1.44: HOM-EPD Circuit Breakers

| Amperes | 1P—120 Vac | 2P—120/240 Vac Common Trip |
|---------|------------|-------------------------------|
| 20 A | HOM120EPD | HOM220EPD |
| 30 A | — | HOM230EPD |
| 40 A | — | HOM240EPD |
| 50 A | — | HOM250EPD |

[4] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.

[5] For 120/240 V only, not for 208Y/120 V.

Homeline Tandem and Quad Tandem Circuit Breakers (HOMT)

Table 1.45: HOMT Tandem Circuit Breakers

| Ampere Rating [6] | AIR | 1P Tandem—120/240 Vac (One Space Required) |
|-------------------|-------|--|
| 15 and 15 A | 10 kA | HOMT1515 [7] |
| 15 and 20 A | 10 kA | HOMT1520 [7] |
| 20 and 20 A | 10 kA | HOMT2020 [7] |
| 30 and 15 A | 10 kA | HOMT3015 [7] |
| 30 and 20 A | 10 kA | HOMT3020 [7] |



HOMT Tandem Circuit Breaker

Table 1.46: HOMT Quad Tandem 1P Circuit Breakers

| Ampere Rating [6] | | AIR | 2P Tandem—120/240 Vac (Two Spaces Required) |
|-------------------|------|-------|---|
| 1P | 2P | | |
| (2) 15 A | 15 A | 10 kA | HOMT1515215 |
| (2) 15 A | 20 A | 10 kA | HOMT1515220 |
| (2) 15 A | 30 A | 10 kA | HOMT1515230 |
| (2) 15 A | 40 A | 10 kA | HOMT1515240 |
| (2) 15 A | 50 A | 10 kA | HOMT1515250 |
| (2) 20 A | 20 A | 10 kA | HOMT2020220 |
| (2) 20 A | 25 A | 10 kA | HOMT2020225 |
| (2) 20 A | 30 A | 10 kA | HOMT2020230 |
| (2) 20 A | 40 A | 10 kA | HOMT2020240 |
| (2) 20 A | 50 A | 10 kA | HOMT2020250 |



HOMT1515215
2 Spaces Required

NOTE: Typical catalog no. (e.g. HOMT 1515230) represents two 1P, outer poles (two 15 A 1P CBs) and one 2P inner circuit breaker with common trip (one 30 A 2P CB).

Table 1.47: HOMT Quad Tandem 2P Circuit Breakers

| Ampere Rating [6] | | AIR | (2) 2P Tandem—120/240 Vac (Two Spaces Required) |
|-------------------|------|-------|---|
| 2P | 2P | | |
| 15 A | 15 A | 10 kA | HOMT215215 |
| 15 A | 20 A | 10 kA | HOMT215220 |
| 15 A | 25 A | 10 kA | HOMT215225 |
| 15 A | 30 A | 10 kA | HOMT215230 |
| 15 A | 40 A | 10 kA | HOMT215240 |
| 15 A | 50 A | 10 kA | HOMT215250 |
| 20 A | 20 A | 10 kA | HOMT220220 |
| 20 A | 25 A | 10 kA | HOMT220225 |
| 20 A | 30 A | 10 kA | HOMT220230 |
| 20 A | 40 A | 10 kA | HOMT220240 |
| 20 A | 50 A | 10 kA | HOMT220250 |
| 25 A | 25 A | 10 kA | HOMT225225 |
| 25 A | 30 A | 10 kA | HOMT225230 |
| 25 A | 40 A | 10 kA | HOMT225240 |
| 25 A | 50 A | 10 kA | HOMT225250 |
| 30 A | 30 A | 10 kA | HOMT230230 |
| 30 A | 40 A | 10 kA | HOMT230240 |
| 30 A | 50 A | 10 kA | HOMT230250 |



HOMT225225
2 Spaces Required

NOTE: Typical catalog no. (i.e. HOMT215230) represents two 2P; outer poles (one 15 A 2P with common trip) and inner poles (one 30 A 2P with common trip).

[6] 15–20 A tandem or quad tandem circuit breakers are suitable for use with 60°C or 75°C conductors. 25–50 A tandem or quad tandem circuit breakers are suitable for use with 75°C conductors only.

[7] UL Listed as HACR type for use with air conditioning, heating and refrigeration equipment haing motor group combinations and marked for use with HACR type circuit breakers.

Homeline Circuit Breaker Wire Sizes

Table 1.48: Wire Sizes for Homeline Circuit Breakers

| Breaker Type | Ampere Rating | Wire Size (AWG/kcmil) [8] | |
|---------------|---------------|---------------------------|------------------------------|
| | | Aluminum | Copper |
| HOM 1P | 15–30 A | 14–8 AWG | 14–8 AWG or (2) 14–10 AWG |
| | 40–50 A | 8–2 AWG | 8–2 AWG |
| HOM 2P | 15–30 A | 14–8 AWG | 14–8 AWG or (2) 14–10 AWG |
| | 35–70 A | 8–2 AWG | 8–2 AWG |
| | 80–125 A | 4–2/0 AWG | 4–2/0 AWG |
| | 150–200 A | 4 AWG–300 kcmil | 4 AWG–300 kcmil |
| HOMT and Quad | 15–30 A | 14–8 AWG | 14–8 AWG |
| Quad Only | 40–50 A | 6–12 AWG | 6–14 AWG |
| HOM-GFI - 1P | 15–20 A | 14–10 AWG | 14–10 AWG |
| HOM-GFI - 2P | 15–50 A | 12–4 AWG | 14–6 AWG |

Accessories for Homeline Circuit Breakers

Table 1.49: Accessories for Use with Homeline Circuit Breakers

| Description | Cat. No. | |
|---|---------------|------------|
| Handle Attachments | | |
| Handle Tie: Converts any two adjacent 120/240 Vac single HOM circuit breakers to independent trip 2P | HOM1HT | |
| Handle Tie: Converts any two adjacent 120/240 Vac 1P side-by-side HOMT circuit breakers to independent trip 2P | HOMTHT | |
| Handle Clamp: Clamp for holding HOM 1P handle in the ON or OFF position | QO1LO | |
| Handle Blocking Device: Attaches to standard HOM 2P circuit breakers for holding the handle in the OFF position | HOM2HBD | |
| Handle Padlock Attachment: For padlocking 1P Standard HOM breakers in the ON or OFF position | HOM1PA | |
| Handle Padlock Attachment: For padlocking 2P Standard HOM circuit breakers in ON or OFF position | 15–70 A | HOM2PALA |
| | 80–125 A | HOM2PAHA |
| Handle Padlock Attachment: For padlocking 1P CAFI, DF, GFI, and EPD HOM breakers in ON or OFF position | HOMELEC1PA | |
| Handle Padlock Attachment: For padlocking 2P CAFI, GFI, and EPD HOM breakers in ON or OFF position | HOMELEC2PALA | |
| Handle Padlock Attachment: For padlocking center poles of Homeline Quad breakers in the OFF position | HOMQPA | |
| Handle Padlock Attachment: For padlocking main circuit breakers in convertible load center in OFF position | 50–125 A | QOM1PA [9] |
| | 100–225 A | QOM2PA [9] |
| Sub-Feed Lugs | | |
| 125 A 2P plug-on—2 spaces required | HOML2125 | |
| 225 A 2P plug-on—4 spaces required | HOML2225 [10] | |

OBS This product is obsolete.

[8] 15–30 A circuit breakers are suitable for use with 60°C or 75°C conductors. 40–125 A circuit breakers are suitable for use with 75°C conductors.

[9] 50–125 A QOM1 frame size; 100–225 A QOM2 frame size.

[10] Requires four spaces (1 AWG–300 kcmil Al/Cu). Use only in 1Ø panel rated 150 A or greater.

HOM Standard Load Center Main Lugs, Fixed Mains
1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.50: Fixed Main Lugs Load Centers (Accepts Only HOM Plug-on Circuit Breakers - Not compatible with HOM Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [1] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover [2] | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [3] | |
|--------|---|--------|-------------------------------|------------------------------|---|--------------------------|--------|------------|---|-------------|--|
| | | | | | | Al | Cu | | | | |
| INDOOR | Main Lugs—10 kA Short Circuit Current Rating Order HOM Circuit Breakers (See page 1-19) Factory-installed Fixed Main Lugs | | | | | | | | | | |
| | 70 A | 2 | 4 | 2 | HOM24L70F/S[4] [5] | 12-3 | 14-4 | 70 | PK3GTA1 | 2 | |
| | 100 A | 6 | 12 | 6 | HOM612L100F/S[4] [6] | 8-1 | | 100 | PK7GTA | 4 | |
| | 125 A | 4 | 8 | 4 | HOM48L125GC | 12-2/0 | 14-2/0 | 125 | PK7GTA Included | 21 | |

HOM Plug-on Neutral Load Center Main Lugs, Convertible Mains
1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.51: Convertible Main Lugs Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [1] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover [2] | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [3] | |
|--|--|--------|-------------------------------|-------------------------------|---|--------------------------|-------|-------------------|---|-------------|--|
| | | | | | | Al | Cu | | | | |
| INDOOR | Convertible Mains—Factory-installed Main Lugs | | | | | | | | | | |
| | QOM1 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| | 125 A | 8 | 16 | 8 | HOM816L125PC | 6-2/0 | 6-1 | 125 | PK9GTA | 6 | |
| | | 12 | 24 | 12 | HOM1224L125PC | | 6-1 | 125 | PK15GTA | 6 | |
| | | 16 | 32 | 16 | HOM1632L125PC ^{obs} | | 6-1/0 | 125 | PK15GTA | 8 | |
| | | 20 | 40 | 20 | HOM2040L125PC | | 6-1/0 | 125 | PK18GTA | 8 | |
| | | 30 | 60 | 30 | HOM3060L125PC | | 6-2/0 | 125 | PK23GTA | 10 | |
| | Convertible Mains—Factory-installed Main Lugs | | | | | | | | | | |
| | QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| | 225 A | 30 | 60 | 30 | HOM3060L225PC | 4-300 | 4-250 | 225 | PK23GTA | 10 | |
| | | 40 | 80 | 40 | HOM4080L225PC | | | 225 | PK27GTA | 12 | |
| | | 42 | 84 | 42 | HOM4284L225PC | | | 225 | PK27GTA | 12 | |
| | | 60 | 120 | 60 | HOM60120L225PC | | | 225 | PK27GTA | 25 | |
| | Convertible Mains—Factory-installed Main Lugs—Ground Bar Included | | | | | | | | | | |
| | QOM1 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| | 125 A | 8 | 16 | 8 | HOM816L125PGC | 6-2/0 | 6-1 | 125 | PKGTALP1 Included | 6 | |
| | | 12 | 24 | 12 | HOM1224L125PGC | | 6-1 | 125 | PKGTALP1 Included | 6 | |
| | | 20 | 40 | 20 | HOM2040L125PGC | | 6-1/0 | 125 | PKGTALP1 Included | 8 | |
| | | 24 | 48 | 24 | HOM2448L125PGC | | 6-1/0 | 125 | PKGTALP2 Included | 8 | |
| | Convertible Mains—Factory-installed Main Lugs—Ground Bar Included | | | | | | | | | | |
| QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See page 1-27) | | | | | | | | | | | |
| 225 A | 30 | 60 | 30 | HOM3060L225PGC | 4-300 | 4-250 | 225 | PKGTALP2 Included | 10 | | |
| | 16 | 32 | 16 | HOM1632L225PGC ^{obs} | | | 225 | PKGTALP1 Included | 9 | | |
| | 20 | 40 | 20 | HOM2040L225PGC | | | 225 | PKGTALP1 Included | 9 | | |
| | 40 | 80 | 40 | HOM4080L225PGC | | | 225 | PKGTALP3 Included | 12 | | |
| | 42 | 84 | 42 | HOM4284L225PGC | | | 225 | PKGTALP3 Included | 12 | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.
^{obs} This product is obsolete.

[1] Maximum single pole branch circuits utilizing HOM and/or HOMET circuit breakers.
 [2] C at end of catalog number indicates combination flush/surface cover included with device.
 [3] See page 1-34
 [4] F/S at end of catalog number indicates to order F for flush device or S for surface device. The cover does not have a door.
 [5] HOM-GFI and HOM-AFI branch circuit breakers are limited to number 10 maximum wire.
 [6] 70 A maximum branch circuit breaker, 100 A maximum back feed main circuit breaker.

Field-Installed Main Circuit Breaker Kits, 1Ø

Table 1.52: QOM1 Frame Size—Use with Convertible Main Load Centers Only



QOM1 Frame Size
50–125 Amperes

| Main Circuit Breaker Rating [7] | Convertible Load Center Mains Rating | 22 k AIR [8] | | Lug Wire Size [9] AWG/kcmil |
|---------------------------------|--------------------------------------|----------------------|--|-----------------------------|
| | | Main Circuit Breaker | | |
| 50 A | 100–125 | QOM50VH | | 12–2/0 Al or Cu |
| 60 A | 100–125 | QOM60VH | | |
| 70 A | 100–125 | QOM70VH | | |
| 80 A | 100–125 | QOM80VH | | |
| 90 A | 100–125 | QOM90VH | | |
| 100 A | 100–125 | QOM100VH | | |
| 110 A | 125 | QOM110VH | | |
| 125 A | 125 | QOM125VH | | |

Table 1.53: QOM2 Frame Size—Use with Convertible Main Load Centers Only



QOM2 Frame Size
100–225 Amperes

| Main Circuit Breaker Rating [7] | Convertible Load Center Mains Rating | 22 k AIR [8] | | Lug Wire Size [9] AWG/kcmil |
|---------------------------------|--------------------------------------|---------------------------|--|-----------------------------|
| | | Main Circuit Breaker [10] | | |
| 100 A | 150–225 | QOM2100VH | | 4–300 Al or Cu |
| 125 A | 150–225 | QOM2125VH | | |
| 150 A | 150–225 | QOM2150VH | | |
| 175 A | 200–225 | QOM2175VH | | |
| 200 A | 200–225 | QOM2200VH | | |
| 225 A | 225 | QOM2225VH | | |

[7] Do not exceed the load center mains rating.

[8] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

[9] Wire range listed for QOM circuit breaker kits is the wire range of that circuit breaker. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.

[10] Add suffix 1021 for 120, 208 or 240 Vac shunt trip.

HOM Plug-on Neutral Load Center Main Breaker, Convertible Mains
1Ø3W—120/240 Vac Indoor—UL Listed

Table 1.54: Convertible Main Breaker Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [11] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover [12] | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [13] | |
|--------|--|---|--------------------------------|------------------------------|--|--------------------------|----------------|------------|---|--------------|---------|
| | | | | | | Al | Cu | | | | |
| INDOOR | Main Circuit Breaker—22 kA Short Circuit Current Rating | | | | | | | | | | |
| | Convertible Mains—Factory-installed Main Circuit Breaker | | | | | | | | | | |
| | QOM1 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| | 100 A | 8 | 16 | 8 | HOM816M100PC | 6-1 | 125 | PK9GTA | 5 | | |
| | | 12 | 24 | 12 | HOM1224M100PC | 6-2/0 | 125 | PK15GTA | 6 | | |
| | | 20 | 40 | 20 | HOM2040M100PC | 6-1 | 125 | PK18GTA | 7 | | |
| | | 24 | 48 | 24 | HOM2448M100PC | 6-2/0 | 125 | PK23GTA | 8 | | |
| | | 30 | 60 | 30 | HOM3060M100PC | 6-2/0 | 125 | PK23GTA | 10 | | |
| | 125 A | 24 | 48 | 24 | HOM2448M125PC | 6-2/0 | 6-1/0 | PK23GTA | 8 | | |
| | | 30 | 60 | 30 | HOM3060M125PC | | 6-2/0 | PK23GTA | 10 | | |
| | | Convertible Mains—Factory-installed Main Circuit Breaker | | | | | | | | | |
| | QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| | 150 A | 30 | 60 | 30 | HOM3060M150PC | 4-250 | 225 | PK23GTA | 10 | | |
| | | 20 | 40 | 20 | HOM2040M200PC | | 225 | PK18GTA | 9 | | |
| | | 30 | 60 | 30 | HOM3060M200PC | | 225 | PK23GTA | 10 | | |
| | | 200 A | 40 | 80 | 40 | | HOM4080M200PC | 4-250 | 225 | PK27GTA | 12 |
| | | | 42 | 84 | 42 | | HOM4284M200PC | | 225 | PK27GTA | 12 |
| | | | 60 | 120 | 60 | | HOM60120M200PC | | 225 | PK27GTA | 25 |
| | | 225 A | 42 | 84 | 42 | | HOM4284M225PC | 4-300 | 4-250 | 225 | PK27GTA |
| | Split Bus Plug-on Neutral Load Center—Manual Transfer for use with Temporary Backup Power Source Applications NEMA 1 (indoor) | | | | | | | | | | |
| 200 A | 36 | 72 | 36 | HOM1428X224M200PC | 4-250 | — | PK27GTA | 12 | | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

1Ø, Field-Installed Mains Kits

Table 1.55: 1Ø Field Installed Main Lug Kits – Use with Convertible Main Load Centers Only



| Field-Installed Main Type | Frame Size | Main [14] Ampere Rating | Use on Convertible Load Center with Mains Rating | Cat. No. | Lug Wire Size [15] AWG/kcmil |
|---------------------------|------------|-------------------------|--|-----------|------------------------------|
| Main Lugs [16] | — | 125 A | 100–125 A | QOL125 | 6-2/0 Al or Cu |
| | | 125 A | 100–125 A | QOL125VD | 6-4/0 Al or Cu |
| | | 225 A | 150–225 A | QOL225 | 6-300 Al or Cu |
| Main Circuit Breaker [17] | QOM1 | 50 A | 100–125 A | QOM50VH | 12-2/0 Al or Cu |
| | | 60 A | 100–125 A | QOM60VH | |
| | | 70 A | 100–125 A | QOM70VH | |
| | | 80 A | 100–125 A | QOM80VH | |
| | | 90 A | 100–125 A | QOM90VH | |
| | | 100 A | 100–125 A | QOM100VH | |
| | | 110 A | 125 A | QOM110VH | |
| | 125 A | 125 A | QOM125VH | | |
| | QOM2 [18] | 100 A | 150–225 A | QOM2100VH | 4-300 Al or Cu |
| | | 125 A | 150–225 A | QOM2125VH | |
| | | 150 A | 150–225 A | QOM2150VH | |
| | | 175 A | 200–225 A | QOM2175VH | |
| | | 200 A | 200–225 A | QOM2200VH | |
| | | 200 A | 200–225 A | QOM2200VH | |
| 225 A | | 225 A | QOM2225VH | | |

[11] Maximum single pole branch circuits utilizing HOM and/or HOMET circuit breakers.
 [12] C at end of catalog number indicates combination flush/surface cover included with device.
 [13] See page 1-34
 [14] Do not exceed the load center mains rating.
 [15] Wire range listed for main device kits is the wire range of that device. To find out maximum wire size permitted in a particular load center per UL, see tables in page 1-8 and page 1-28 under Main Wire Size.
 [16] If main circuit breaker knockout has been removed from the load center's trim, order appropriate filler plate from page 1-29.
 [17] 22 k AIR main circuit breaker UL Listed for use ahead of HOM and HOMET 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
 [18] Add suffix 1021 for 120, 208, 240 Vac shunt trip.

HOM Plug-on Neutral Load Centers with Qwik-Grip
1Ø3W—120/240 Vac Indoor—UL Listed

The Square D Homeline plug-on neutral load centers with Qwik-Grip simplify rough-in by eliminating the need to remove knockouts, install wire connectors, and blindly pull wire into the load center. A quick bend of the wire using the wire bend guide on the Qwik-Grip insert and the wire slides into the slot. Once inserted, the Qwik-Grip shield snaps on to keep the wire behind the router for a secure, code-compliant installation.



HOM Plug-on Neutral Load Center with Qwik-Grip

Table 1.56: Plug-on Neutral Load Centers with Qwik-Grip (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

| Main Ratings | Spaces | Max. 1P Circuits | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit | Box No. |
|---|--------|------------------|------------------------------|-------------------------------------|--------------------------|-------|------------|----------------------------|---------|
| | | | | | Al | Cu | | | |
| 125 A | 24 | 48 | 24 | HOM2448L125PQGC | 6-2/0 | 6-1/0 | 125 | PKGTALP2 Included | 8Q |
| | 30 | 60 | 30 | HOM3060L125PQGC | 6-2/0 | 6-2/0 | 125 | PKGTALP2 Included | 10Q |
| Convertible Mains—Factory-Installed Main Lugs, 10 kA Short Circuit Current Rating—QOM2 Main Frame Size, Convertible to Main Circuit Breaker | | | | | | | | | |
| 225 A | 30 | 60 | 30 | HOM3060L225PQGC | 4-250 | | 225 | PKGTALP2 Included | 10Q |
| | 40 | 80 | 40 | HOM4080L225PQGC | 4-250 | | 225 | PKGTALP3 Included | 12Q |
| | 42 | 84 | 42 | HOM4284L225PQGC | 4-250 | | 225 | PKGTALP3 Included | 12Q |
| Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating—QOM2 Main Circuit Breaker Frame Size, Convertible to Main Lugs or Main Circuit Breaker | | | | | | | | | |
| 200 A | 30 | 60 | 30 | HOM3060M200PQC | 4-250 | | 225 | PK23GTA (Order separately) | 10Q |
| | 40 | 80 | 40 | HOM4080M200PQC | 4-250 | | 225 | PK27GTA (Order separately) | 12Q |
| | 42 | 84 | 42 | HOM4284M200PQC ^{Obs} | 4-250 | | 225 | PK27GTA (Order separately) | 12Q |

^{Obs} This product is obsolete.

Homeline Service Upgrade Load Centers
1Ø3W—120/240 Vac Special Applications—UL Listed

Table 1.57: Service Upgrade Load Centers with Removable End Walls (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

| Main Ratings | Spaces | Max. 1P Circuits [19] | Max. Tandem Circuit Breakers | Load Center Box and Interior | Extra Long Cover with Door (Order Separately) | | Main Wire Size AWG / Kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [20] |
|--|--------|-----------------------|------------------------------|------------------------------|---|-----------|----------------------------|-------|------------|---|--------------|
| | | | | | Flush | Surface | Al | Cu | | | |
| Convertible Mains—Factory-Installed Main Circuit Breaker—22KA QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See page 1-19)—Copper Bus [21] | | | | | | | | | | | |
| INDOOR | 200 A | 30 | 60 | 30 | HOM3060M200PCEP ^{Obs} [22] | HOMC30UFL | — | 4-250 | 225 | PK23GTA | 10 |

^{Obs} This product is obsolete.

[19] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

[20] See page 1-34

[21] 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

[22] Ships with standard length cover.

HOM Standard Load Center Main Lugs, Fixed Mains
1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.58: Fixed Main Lugs Load Centers (Accepts Only HOM Plug-on Circuit Breakers - Not compatible with HOM Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [23] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [24] | |
|-----------------------------------|--|--------|--------------------------------|------------------------------|-------------------------------------|--------------------------|--------|------------|---|--------------|--|
| | | | | | Cat. No. (DE3C) | Al | Cu | | Cat. No. (DE3A) | | |
| RAI N P R O O F | Main Lugs—10 kA Short Circuit Current Rating Factory-installed Fixed Main Lugs, 10 kA Short Circuit Current Rating | | | | | | | | | | |
| | 70 A | 2 | 4 | 2 | HOM24L70RB [25] | 12–3 | 14–4 | 70 | PK4GTA | 1R | |
| | 100 A | 6 | 12 | 6 | HOM612L100RB [26] | 8–1 | | 100 | PK7GTA | 2R | |
| | 125 A | 4 | 8 | 4 | HOM48L125GRB | 12–2/0 | 14–2/0 | 125 | PK7GTA Included | 15R | |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

HOM Plug-on Neutral Load Center Main Lugs, Convertible Mains
1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.59: Convertible Main Lugs Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

| | Mains Rating | Bus Rating | Spaces | Max. Single Pole Circuits [23] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [24] |
|-----------------------------------|--|------------|--------|--------------------------------|------------------------------|-------------------------------------|--------------------------|-------|------------|---|--------------|
| | | | | | | Cat. No. (DE3C) | Al | Cu | | Cat. No. (DE3A) | |
| RAI N P R O O F | Convertible Mains with Factory-installed Main Lugs [27], QOM1 Main Frame Size—Convertible to Main Circuit Breaker (See Below) | | | | | | | | | | |
| | 125 A | 125 | 8 | 16 | 8 | HOM816L125PRB | 6–2/0 | 6–1 | 125 | PK9GTA | 3R |
| | | 125 | 12 | 24 | 12 | HOM1224L125PRB | | | 125 | PK15GTA | 3R |
| | | 125 | 20 | 40 | 20 | HOM2040L125PRB | | | 125 | PK18GTA | 4R |
| | | 125 | 24 | 48 | 24 | HOM2448L125PRB | | | 125 | PK23GTA | 6R |
| | Convertible Mains with Factory-installed Main Lugs [27], QOM2 Main Frame Size—Convertible to Main Circuit Breaker (See Below) | | | | | | | | | | |
| | 225 A | 225 | 12 | 12 | 0 | HOM12L225PRB | 4–300 | 4–250 | 225 | PK9GTA | 5R |
| | | 225 | 16 | 32 | 16 | HOM1632L225PRB OBS | | | 225 | PK15GTA | 6R |
| | | 225 | 20 | 40 | 20 | HOM2040L225PRB | | | 225 | PK18GTA | 6R |
| | | 225 | 30 | 60 | 30 | HOM3060L225PRB | | | 225 | PK23GTA | 7R |
| | | 225 | 40 | 80 | 40 | HOM4080L225PRB | | | 225 | PK27GTA | 14R |
| | | 225 | 42 | 84 | 42 | HOM4284L225PRB | | | 225 | PK27GTA | 14R |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

OBS This product is obsolete.

HOM Plug-on Neutral Load Center Main Breaker, Convertible Mains
1Ø3W—120/240 Vac Rainproof—UL Listed

Table 1.60: Convertible Main Breaker Plug-on Neutral Load Centers (Compatible with HOM Plug-on Circuit Breakers and HOM Plug-on Neutral Circuit Breakers)

| | Mains Rating | Spaces | Max. Single Pole Circuits [23] | Max. Tandem Circuit Breakers | Load Center Box, Interior and Cover | Main Wire Size AWG/kcmil | | Bus Rating | Equipment Ground Bar Kit (Order Separately) | Box No. [24] | |
|-----------------------------------|--|--------|--------------------------------|------------------------------|-------------------------------------|--------------------------|-------|------------|---|--------------|--|
| | | | | | Cat. No. (DE3C) | Al | Cu | | Cat. No. (DE3A) | | |
| RAI N P R O O F | Main Circuit Breaker—22 kA Short Circuit Current Rating Convertible Mains with Factory-Installed Main Circuit Breaker, QOM1 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See Below) [28] | | | | | | | | | | |
| | 100 A | 8 | 16 | 8 | HOM816M100PRB | 6–2/0 | 6–1 | 125 | PK9GTA | 3R | |
| | | 12 | 24 | 12 | HOM1224M100PRB | | | 125 | PK15GTA | 3R | |
| | | 20 | 40 | 20 | HOM2040M100PRB | | | 125 | PK18GTA | 4R | |
| | 125 A | 8 | 16 | 8 | HOM816M125PRB OBS | 6–2/0 | 6–1 | 125 | PK9GTA | 3R | |
| | | 24 | 48 | 24 | HOM2448M125PRB | | | 125 | PK23GTA | 6R | |
| | Convertible Mains with Factory-installed Main Circuit Breaker, QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See Below) | | | | | | | | | | |
| | 150 A | 30 | 60 | 30 | HOM3060M150PRB | 4–250 | 4–250 | 225 | PK23GTA | 7R | |
| | | 12 | 12 | 0 | HOM12M200PRB | | | 225 | PK9GTA | 5R | |
| | | 20 | 40 | 20 | HOM2040M200PRB | | | 225 | PK18GTA | 6R | |
| | | 30 | 60 | 30 | HOM3060M200PRB | | | 225 | PK23GTA | 7R | |
| | | 40 | 80 | 40 | HOM4080M200PRB | | | 225 | PK27GTA | 14R | |
| | Convertible Mains with Factory-installed Main Circuit Breaker with Feed-thru Lugs, QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker (See Below) [27] | | | | | | | | | | |
| | 150 A | 8 | 16 | 8 | HOM816M150PFRB | 4–250 | 4–250 | 150 | PK15GTA | 6R | |
| 200 A | 8 | 16 | 8 | HOM816M200PFRB | 4–250 | 4–250 | 225 | PK15GTA | 6R | | |

Above listings through 200 A mains rating meet Federal Specification W-P-115c as Type 1, Class 2.

OBS This product is obsolete.

[23] Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.

[24] See page 1-36

[25] HOM-GFI and HOM-AFI branch circuit breakers are limited to number 10 maximum wire.

[26] 70 A maximum branch circuit breaker, 100 A maximum back feed main circuit breaker.

[27] Side hinge door device allow 1-1/4 in. on left side for door to open.

[28] 22 k AIR main circuit breaker UL Listed for use ahead of HOM and HOMT 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

Plug-on Neutral Indoor Load Center Value Packs

Table 1.61: Plug-on Neutral Indoor Load Center Value Packs (Compatible with Plug-on and Plug-on Neutral Circuit Breakers)

| Mains Rating | Spaces | Max. 1P Circuits [1] | Max. Tandem Circuit Breakers | Load Center Box, Interior, Cover and Branch Circuit Breakers | | Equipment Ground Bar Kit (Order Separately) Cat. No. | Main Wire Size AWG/kcmil Al/Cu | Bus Rating | Box No. [2] | |
|--|--------|----------------------|------------------------------|---|--|---|--------------------------------|------------|-------------|----|
| | | | | Cat. No. | Included Load Center/Circuit Breakers | | | | | |
| QO (Accepts Only QO Plug-On Circuit Breakers) QO—Copper Bus; Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs (See page 1-10) or QOM Main Circuit Breaker (See page 1-24) | | | | | | | | | | |
| 125 A | 24 | 34 | 10 | QO124L125PGCVP | (1) QO124L125PGC, (3) QO120, (2) QO230 | PK15GTA Included | 6-2/0 | 125 | 7 | |
| 225 A | 42 | 52 | 10 | QO142L225PGCVP OBS | (1) QO142L225PGC, (3) QO120, (2) QO230 | PK23GTA Included | 4-300 | — | 11 | |
| Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs or Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| 100 A | 24 | 34 | 10 | QO124M100PCVP | (1) QO124M100PC, (3) QO120, (2) QO230 | PK15GTA | 6-2/0 | 125 | 7 | |
| | 32 | 38 | 6 | QO132M100PCVP | (1) QO132M100PC, (3) QO120, (2) QO230 | PK18GTA | 6-2/0 | 125 | 8 | |
| 200 A | 42 | 52 | 10 | QO142M200PCVP | (1) QO142M200PC, (3) QO120, (2) QO230 | PK23GTA | 4-300 | — | 11 | |
| | 42 | 52 | 10 | QO142M200PCAFVP OBS | (1) QO142M200PC, (3) QO120, (2) QO230, (3) QO115PCAFI | PK23GTA | | | | |
| Homeline (Accepts Only HOM Plug-On Circuit Breakers); Convertible Mains—Factory-Installed Main Lugs, 10 kA Short Circuit Current Rating Convertible to appropriate QOM 22 kA Short Circuit Current Rating Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| 125 A | 12 | 24 | 12 | HOM1224L125PGCVP | (1) HOM1224L125PGC, (2) HOM120 | PKG TALP1 Included | 6-2/0 | 6-1 | 125 | 6 |
| 225 A | 30 | 60 | 30 | HOM3060L225PGCVP | (1) HOM3060L225PGC, (3) HOM120, (2) HOM230 | PKG TALP2 Included | 4-300 | 4-250 | 225 | 10 |
| Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs or Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| 100 A | 20 | 40 | 20 | HOM2040M100PCVP | (1) HOM2040M100PC, (2) HOM120, (1) HOM230 | PK18GTA | 6-1 | 6-3 | 125 | 7 |
| | 20 | 40 | 20 | HOM2040M100PC1AVP | (1) HOM2040M100PC, (2) HOM120, (1) HOM230, (1) HOM115PCAFI | PK18GTA | 6-1 | 6-3 | 125 | 7 |
| | 24 | 48 | 24 | HOM2448M100PCVP | (1) HOM2448M100PC, (3) HOM120, (2) HOM230 | PK23GTA | 6-2/0 | 6-1/0 | 125 | 8 |
| 200 A | 30 | 30 | 30 | HOM3060M150PCVP | (1) HOM3060M150PC, (3) HOM120, (2) HOM230 | PK23GTA | 4-250 | — | 225 | 10 |
| | 20 | 40 | 20 | HOM2040M200PCVP | (1) HOM2040M200PC, (3) HOM120, (2) HOM230 | PK18GTA | | | | |
| | 30 | 60 | 30 | HOM3060M200PCVP | (1) HOM3060M200PC, (3) HOM120, (2) HOM230 | PK23GTA | | | | |
| | 30 | 60 | 30 | HOM3060M200PC1AVP | (1) HOM3060M200PC, (3) HOM120, (2) HOM230, (1) HOM115PCAFI | PK23GTA | | | | |
| | 30 | 60 | 30 | HOM3060M200PCAFVP OBS | (1) HOM3060M200PC, (3) HOM120, (2) HOM230, (3) HOM115PCAFI | PK23GTA | | | | |
| | 40 | 80 | 40 | HOM4080M200PCVP | (1) HOM4080M200PC, (3) HOM120, (2) HOM230 | PK27GTA | | | | |
| | 40 | 80 | 40 | HOM4080M200PC1AVP | (1) HOM4080M200PC, (3) HOM120, (2) HOM230, (1) HOM115PCAFI | PK27GTA | | | | |
| | 40 | 80 | 40 | HOM4080M200PCAFVP | (1) HOM4080M200PC, (3) HOM120, (2) HOM230, (3) HOM115PCAFI | PK27GTA | | | | |

OBS This product is obsolete.

Table 1.62: Plug-on Neutral with Qwik-Grip Indoor Load Center Value Packs (Compatible with Plug-on and Plug-on Neutral Breakers)

| Main Ratings | Spaces | Max. 1P Circuits | Max. Tandem Circuit Breakers | Load Center Box, Interior, Cover and Branch Circuit Breakers | | Equipment Ground Bar Kit (Order Separately) Cat. No. | Main Wire Size AWG/kcmil Al/Cu | Bus Rating | Box No. [3] | |
|---|--------|------------------|------------------------------|---|---|---|--------------------------------|------------|-------------|----|
| | | | | Cat. No. | Included Load Center/Circuit Breakers | | | | | |
| QO Convertible Mains—Factory-Installed Main Lugs, up to 65 kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Circuit Breaker | | | | | | | | | | |
| 125 A | 24 | 34 | 10 | QO124L125PQGCVP OBS | (1) QO124L125PQGC, (3) QO120, (2) QO230 and (1) PKQGA Qwik-Grip assembly kit | PK15GTAL Included | 6-2/0 | — | 7Q | |
| QO Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating—Copper Bus, QOM2 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker | | | | | | | | | | |
| 200 A | 42 | 52 | 10 | QO142M200PQCVP | (1) QO142M200PQC, (3) QO120, (2) QO230 and (1) PKQGA Qwik-Grip assembly kit | PK23GTA (Order separately) | 4-250 | 225 | 11Q | |
| Homeline Convertible Mains—Factory-Installed Main Circuit Breaker, 22kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker | | | | | | | | | | |
| 100 A | 20 | 40 | 20 | HOM2040M100PQCVP | (1) HOM2040M100PQC, (2) HOM120, (1) HOM230 and (1) PKQGA Qwik-Grip assembly kit | PK18GTA (Order separately) | 6-2/0 | 6-1 | 125 | 7Q |
| 200 A | 30 | 60 | 30 | HOM3060M200PQCVP | (1) HOM3060M200PQC, (3) HOM120, (2) HOM230 and (1) PKQGA Qwik-Grip assembly kit | PK23GTA (Order separately) | 4-250 | 225 | 10Q | |
| | 40 | 80 | 40 | HOM4080M200PQCVP | (1) HOM4080M200PQC, (2) HOM120, (1) HOM230 and (1) PKQGA Qwik-Grip assembly kit | PK27GTA (Order separately) | | | | |

OBS This product is obsolete.

Table 1.63: Plug-on Neutral Rainproof Load Center Value Packs (Compatible with Plug-on and Plug-on Neutral Circuit Breakers)

| Main Ratings | Spaces | Max. 1P Circuits | Max. Tandem Circuit Breakers | Load Center Box, Interior, Cover and Branch Circuit Breakers | | Equipment Ground Bar Kit (Order Separately) Cat. No. | Main Wire Size AWG/kcmil Al/Cu | Bus Rating | Box No. [3] | |
|---|--------|------------------|------------------------------|---|--|---|--------------------------------|------------|-------------|----|
| | | | | Cat. No. | Included Load Center/Circuit Breakers | | | | | |
| Homeline (Accepts Only HOM Plug-On Circuit Breakers) Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible to Main Lugs or Lower Amperage QOM2 Main Circuit Breaker (See page 1-27) | | | | | | | | | | |
| 125 A | 12 | 24 | 12 | HOM1224M125PRBVP | (1) HOM1224M125PRB, (3) HOM120, (2) HOM230 | PK23GTA | 6-2/0 | 6-1 | 125 | 3R |
| 200 A | 30 | 60 | 30 | HOM3060M200PRBVP | (1) HOM3060M200PRB, (3) HOM120, (2) HOM230 | PK23GTA | 4-250 | 225 | 7R | |

[1] Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

[2] See page 1-34 or page 1-36

[3] See page 1-34

QO Load Center Accessories

Table 1.64: QO Load Center Accessories

| Description | | Cat. No. | Schedule | |
|---|---|-------------|----------|------|
| Circuit Identification Stickers | Circuit identification stickers for use on cover directory labels to identify branch circuits | PSDS | DE5 | |
| Cover Sealing Strap | Provides means of sealing trim mounting screws on QO load center covers | QO1SE | DE3A | |
| Door Lock Kits | Use with QO612L100DF/S, QO612L100DFCU/SCU, QO612L100DTF/S, QO816L100DF/S, QO816L100DFCU/SCU, QO816L100DTF/S, QO48M30DSGP, or QO48M60DSGP | PK8FL [4] | DE3A | |
| | Use with convertible mains, 1Ø and 3Ø 100–225 A, and fixed mains, 3Ø 125–225 A indoor load centers | PK6FL | DE3A | |
| | Use with 300 and 400 ampere indoor load centers | PK4FL | PE1A | |
| Filler Plates | Fills opening in covers if twistout is removed in error | QOFP | DE3A | |
| | Fills main circuit breaker opening in convertible load center covers 100–125 A | QOM1FP | DE3A | |
| | Fills main circuit breaker opening in convertible load center covers 150–225 A | QOM2FP | DE3A | |
| | Fills main circuit breaker opening in 3Ø load center covers (S01 and S02 Series) | KFP OBS | DE3A | |
| | Fills main circuit breaker opening in "Q" style 3Ø load center covers (S03 Series) | Q2FP | DE3A | |
| Ground Bar Kits | Ground Bar Assembly—3 connectors | PK3GTA1 | DE3A | |
| | Ground Bar Assembly—4 connectors | PK4GTA | DE3A | |
| | Ground Bar Assembly—7 connectors | PK7GTA | DE3A | |
| | Ground Bar Assembly—12 connectors | PK12GTA | DE3A | |
| | Ground Bar Assembly—15 connectors | PK15GTA | DE3A | |
| | Ground Bar Assembly—18 connectors | PK18GTA | DE3A | |
| | Ground Bar Assembly—23 connectors | PK23GTA | DE3A | |
| | Ground Bar Assembly—27 connectors | PK27GTA | DE3A | |
| | Ground Bar Assembly—21 connectors. Use in high amperage load centers. | PK15GTA6 | DE3A | |
| | Standard PK15GTA with a 1–4/0 Al/Cu Lug | PK15GTAL | DE3A | |
| | Standard PK18GTA with a 1–4/0 Al/Cu Lug | PK18GTAL | DE3A | |
| | Standard PK23GTA with a 1–4/0 Al/Cu Lug | PK23GTAL | DE3A | |
| | Ground Bar Pack—PK9GTA, PK9GTA, & LK100AN | PKGTALP1 | DE3A | |
| | Ground Bar Pack—PK9GTA, PK18GTA, & LK100AN | PKGTALP2 | DE3A | |
| | Ground Bar Pack—PK15GTA, PK18GTA, & LK100AN | PKGTALP3 | DE3A | |
| Insulator Kit for PK7GTA through PK27GTA | PKGTAB | DE3A | | |
| Handle Padlock Attachments | For padlocking main circuit breakers in convertible load centers OFF | 50A–125A | QOM1PA | DE2E |
| | For padlocking main circuit breakers in convertible load centers OFF | 100A–225A | QOM2PA | DE2E |
| Neutral Bonding Screw | For use on all Homeline and QO 125A convertible main load centers | 4028344850K | DE5 | |
| | For use on QO 150A–225A convertible main load centers | 4028345850K | DE5 | |
| Neutral / Ground Lugs | Field-installed for 12–2 Al or 14–4 Cu AWG wire | LK70AN | DE3A | |
| | Field-installed for 6–2/0 Al/Cu AWG wire | LK100AN | DE3A | |
| | Field-installed for 14–2/0 Al/Cu AWG wire | LK125AN | DE3A | |
| | Field-installed for 2–3/0 Al/Cu AWG wire | LK150AN | DE3A | |
| | Field-installed for 4 AWG to 300 kcmil Al/Cu wire. Use in Series S, 150–225A QO load center or S03 and below, 150–225A HOM load center | LK225AN | DE3A | |
| Replacement Cover Directory Label | 1 through 42 numbered universal replacement directory label for load center covers | LSDL | DE5 | |
| Retaining Kit for Breakers Used as Back-fed Mains | Secures circuit breaker to interior when used as a back-fed main. For QO612L100F/S, RB, QO612L100DF/S, QO816L100F/S, RB, QO816L100DF/S and QO148L125GF/S, GRB load centers | PK2MB | DE3A | |
| | Secures 3P circuit breaker without accessories to left side of interior when used as a back-fed main. For 3Ø load centers | PK3MB | DE3A | |
| | Secures circuit breaker to interior when used as a back-fed main for 2P QO 150–200 A circuit breakers | PK5RK OBS | DE3A | |
| | Secures ONE circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02 | PK4MB2LA | DE3A | |
| | Secures ONE circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02 | PK4MB2HA | DE3A | |
| Service Entrance Barriers | QO / Homeline 1Ø 100–125 A QOM1 convertible main load centers | PKSB1LA | DE3A | |
| | QO / Homeline 1Ø 150–225 A QOM2 convertible main load centers | PKSB1HA | DE3A | |
| | QO 3Ø convertible main load centers | PKSB3 | DE3A | |
| | QO 1Ø back-fed main breaker applications | PKSB1QOBF | DE3A | |
| | QO 3Ø back-fed main breaker applications | PKSB3BF | DE3A | |
| QO Load Center Manual Power Transfer Accessories | | | | |
| Generator Circuit Breaker Interlock Kit | For use on "G" and "S" Series NEMA 1 and "G", "S1" and "S2" Series NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit. | QOCRBGK1C | DE3A | |
| | For use on "G" and "S" Series NEMA 1 and "G" and "S1" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit. | QOCGK2C | DE3A | |
| | For use on "S2" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit. | QORBGK2C | DE3A | |
| Manual Transfer Equipment Kit | For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be "ON" at a time. | QO2DTI | DE2E | |
| | QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2P or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers. | QO2DTIM | DE2E | |
| | Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02. | PK4DTIM4LA | DE3A | |
| | Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02. | PK4DTIM4HA | DE3A | |
| | Secures two 2P circuit breakers to left side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02. | PK4DTIM4LAL | DE3A | |

OBS This product is obsolete.

[4] QO403L60NF/S does not have provisions for a field-installed lock.

Table 1.65: QO Load Center Accessories

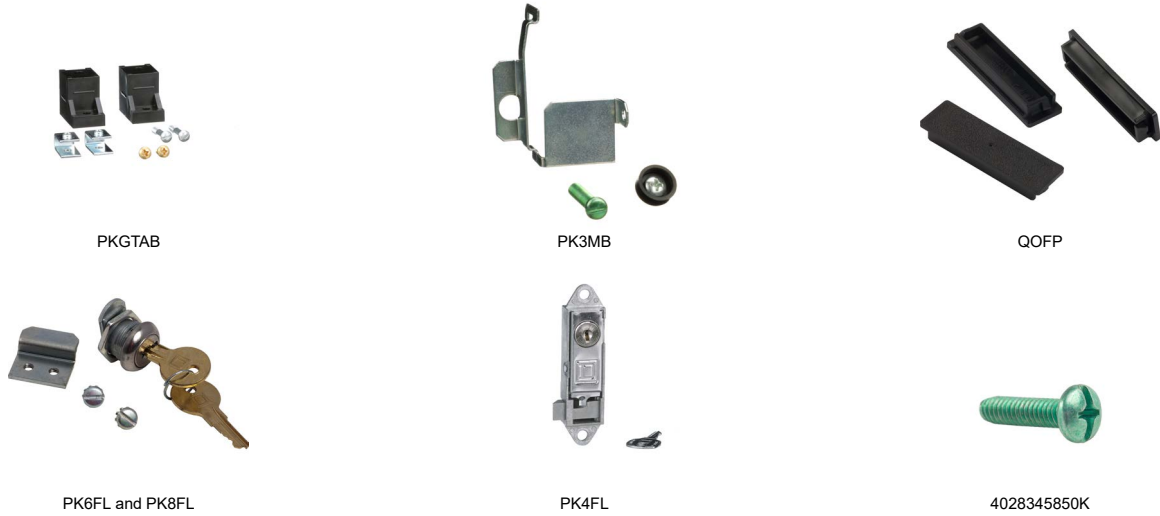


Table 1.66: QO Load Center Covers

| Mains Rating | Spaces | QO Standard Covers | | | QO Mono-Flat Covers | |
|--|---|--------------------|------------|--------------|-------------------------|--------------|
| | | Flush | Surface | Flush | Gray Covers | White Covers |
| | | Gray Covers | | White Covers | Gray Covers | White Covers |
| QO 1 Phase Load Center Covers — Convertible Mains | | | | | | |
| 100 A | 12 | QOC12UF | QOC12US | — | — | — |
| | 16 | QOC20U100F | QOC20U100S | — | — | — |
| | 20 | QOC20U100F | QOC20U100S | — | — | — |
| | 24 | QOC24UF | QOC24US | QOC24UFW | — | — |
| 125 A | 32 | QOC32UF | — | QOC32UFW | — | — |
| | 12 | QOC16UF | QOC16US | QOC16UFW | — | — |
| | 16 | QOC24UF | QOC24US | QOC24UFW | — | — |
| | 20 | QOC20U100F | QOC20U100S | — | — | — |
| | 24 | QOC24UF | QOC24US | QOC24UFW | — | — |
| | 30 | QOC30U125C | — | — | — | — |
| 150 A | 32 | QOC32UF | — | QOC32UFW | — | — |
| | 20 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| | 24 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| | 30 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| 200 A | 32 | QOC40UF | QOC40US | QOC40UFW | — | — |
| | 12 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| | 20 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| | 24 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| | 30 | QOC30UF | QOC30US | QOC30UFW | QOCMF30UC | QOCMF30UCW |
| | 40 | QOC40UF | QOC40US | QOC40UFW | — | — |
| | 42 | QOC42UF | QOC42US | QOC42UFW | QOCMF42UC | QOCMF42UCW |
| 225 A | 54 | QOC54UF | — | QOC54UFW | QOCMF54UC | QOCMF54UCW |
| | 60 | — | — | — | QOCMF60UC | QOCMF60UCW |
| | 40 | QOC42UF | QOC42US | QOC42UFW | QOCMF42UC | QOCMF42UCW |
| 225 A | 42 | QOC42UF | QOC42US | QOC42UFW | QOCMF42UC | QOCMF42UCW |
| | 54 | QOC54UF | — | QOC54UFW | QOCMF54UC | QOCMF54UCW |
| | QO Rise Panel (Wide Gutter) Covers | | | | | |
| 125 A | 12 | QOC20UFWGW | — | QOC20UFWGW | NQC20FWG ^[5] | NQC20FWGW |
| | 20 | QOC20UFWGW | — | QOC20UFWGW | NQC20FWG | NQC20FWGW |
| 200 A | 24 | QOC30UFWGW | — | QOC30UFWGW | NQC30FWG ^{Obs} | NQC30FWGW |
| | 30 | QOC30UFWGW | — | QOC30UFWGW | NQC30FWG | NQC30FWGW |
| QO 3-Phase Load Center Covers — Fixed Mains | | | | | | |
| 125 A | 12 | QOC16UF | QOC16US | QOC16UFW | — | — |
| | 20 | QOC24UF | QOC24US | QOC24UFW | — | — |
| | 24 | QOC24UF | QOC24US | QOC24UFW | — | — |
| 200 A | 18 | QOC30UF | QOC30US | QOC30UFW | — | — |
| | 30 | QOC30UF | QOC30US | QOC30UFW | — | — |
| 225 A | 42 | QOC42UF | QOC42US | QOC42UFW | — | — |
| QO 3-Phase Load Center Covers — Convertible Mains | | | | | | |
| 100 A | 27 | QOC30UF | QOC30US | QOC30UFW | — | — |
| 125 A | 30 | QOC342MQF | QOC342MQS | — | — | — |
| 150 A | 30 | QOC342MQF | QOC342MQS | — | — | — |
| | 42 | QOC342MQF | QOC342MQS | — | — | — |
| 200 A | 30 | QOC342MQF | QOC342MQS | — | — | — |
| | 42 | QOC342MQF | QOC342MQS | — | — | — |
| 225 A | 42 | QOC342MQF | QOC342MQS | — | — | — |

^{Obs} This product is obsolete.

Table 1.67: QO Load Center Covers



Homeline Load Center Accessories

Table 1.68: Homeline Load Center Accessories

| Description | | Cat. No. | Schedule | |
|---|--|---------------------------|----------|------|
| Circuit Identification Stickers | Circuit identification stickers for use on cover directory labels to identify branch circuits | PSDS | DE5 | |
| Door Lock Kit | Use with convertible indoor load center covers (Series S-1) | PK6FL | DE3A | |
| Filler Plates | Fills opening in covers if twistout is removed in error | HOMFP | DE3C | |
| | Fills main circuit breaker opening in convertible load centers | 100–125 A | QOM1FP | DE3A |
| | | 150–225 A | QOM2FP | DE3A |
| Generator Circuit Breaker Interlock Kit | For use on "S" Series NEMA 1 and NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a Homeline 2P (15–125 A) branch circuit breaker | HOMCRBGK1C | DE3D | |
| | For use on "S" Series NEMA 1 and "S1" Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a Homeline 2P (15–125 A) branch circuit breaker | HOMCGK2C | DE3D | |
| | For use on "S2" and "S3" Series NEMA 3R QOM2 load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a Homeline 2P (15–125 A) branch circuit breaker | HOMRBGK2C | DE3D | |
| Ground Bar Kits | Ground Bar Assembly - 3 connectors | PK3GTA1 | DE3A | |
| | Ground Bar Assembly - 4 connectors | PK4GTA1 | DE3A | |
| | Ground Bar Assembly - 7 connectors | PK7GTA1 | DE3A | |
| | Ground Bar Assembly - 9 connectors | PK9GTA1 ^{obs} | DE3A | |
| | Ground Bar Assembly - 15 connectors | PK15GTA1 | DE3A | |
| | Ground Bar Assembly - 19 connectors | PK18GTA1 | DE3A | |
| | Ground Bar Assembly - 23 connectors | PK23GTA1 | DE3A | |
| | Ground Bar Assembly - 27 connectors | PK27GTA1 | DE3A | |
| | Standard PK15GTA with a 1–4/0 Al/Cu Lug | PK15GTA | DE3A | |
| | Standard PK18GTA with a 1–4/0 Al/Cu Lug | PK18GTAL | DE3A | |
| | Ground Bar Pack - PK9GTA, PK9GTA & Lug | PKGTALP1 | DE3A | |
| | Ground Bar Pack - PK9GTA, PK18GTA & Lug | PKGTALP2 | DE3A | |
| | Ground Bar Pack - PK15GTA, PK18GTA & Lug | PKGTALP3 | DE3A | |
| | Insulator Kit for PK7GTA through PK27GTA | PKGTAB | DE3A | |
| Handle Padlock Attachment | For padlocking main circuit breakers in convertible load center, "OFF" | 50–125 A | QOM1PA | DE2E |
| | | 100–225 A | QOM2PA | DE2E |
| Neutral Bonding Screw | For use on all Homeline and QO 125A convertible main load centers | 4028344850K | DE5 | |
| | For use on QO 150A-225A convertible main load centers | 4028345850K | DE5 | |
| Neutral / Ground Lugs | Field-installed for 14–2 AWG Al or 14–4 AWG Cu wire | LK70AN | DE3B | |
| | Field-installed for 6–2/0 AWG Al/Cu wire | LK100AN | DE3B | |
| | Field-installed for 14–2/0 AWG Al/Cu wire | LK125AN | DE3B | |
| | Field-installed for 4 AWG to 300 kcmil Al/Cu wire. Use in Series S, 150-225A QO load center or S03 and below, 150-225A HOM load center | LK225AN | DE3A | |
| | Field-installed for 4 AWG–300 kcmil Al/Cu wire. Use in Series S04, 150–225 A HOM load center | LK225ANHOM ^{obs} | DE3A | |
| Replacement Cover Directory Label | 1 through 42 numbered universal replacement directory label for load center covers | LSDL | DE5 | |
| Retaining Kit for Breakers Used as Back-fed Mains | Secures circuit breaker to interior when used as a back-fed main. For HOM612L100F/S, RB and HOM48L125GC, GRB load centers | HOM1RK | DE3C | |
| | Secures ONE circuit breaker right side of interior when used as a back-fed main For 100–125 A convertible main load centers, Series S01 and S02 | HOM4RK2LA | DE3C | |
| | Secures ONE circuit breaker right side of interior when used as a back-fed main For 150–225 A convertible main load centers, Series S01 and S02 | HOM4RK2HA ^{obs} | DE3C | |
| | Secures circuit breaker to interior when used as a back-fed main For 2P 150–200 A circuit breakers | HOM5RK | DE3C | |
| Service Entrance Barriers | QO / Homeline 1Ø 100–125 A QOM1 convertible main load centers | PKSB1LA | DE3A | |
| | QO / Homeline 1Ø 150–225 A QOM2 convertible main load centers | PKSB1HA | DE3A | |
| | Homeline back-fed main breaker applications | PKSB1HOMBF | DE3A | |

^{obs} This product is obsolete.

Table 1.69: Homeline Load Center Replacement Covers



| Mains Rating | Spacers | Homeline Standard Covers | | Homeline Mono Flat Covers |
|--------------|---------|--------------------------|--------------------------|---------------------------|
| | | Combination Gray | Combination White | Gray |
| 100 A | 8 | HOMC8UC ^{obs} | — | — |
| | 12 | HOMC12UC ^{obs} | HOMC12UCW ^{obs} | — |
| | 24 | HOMC24UC | HOMC24UCW | — |
| 125 A | 8 | HOMC12UC | HOMC12UCW | — |
| | 16 | HOMC24UC | HOMC24UCW | — |
| | 20 | HOMC24UC | HOMC24UCW | — |
| | 24 | HOMC24UC | HOMC24UCW | — |
| 150 A | 16 | HOMC20UC | HOMC20UCW | — |
| | 20 | HOMC20UC | HOMC20UCW | — |
| | 30 | HOMC30UC | HOMC30UCW | — |

Table 1.69 Homeline Load Center Replacement Covers (cont'd.)

| Mains Rating | Spacers | Homeline Standard Covers | | Homeline Mono Flat Covers |
|--------------|---------|--------------------------|-------------|---------------------------|
| | | Combination | Combination | Gray |
| | | Gray | White | |
| 200 A | 12 | HOMC20UC | HOMC20UCW | — |
| | 16 | HOMC20UC | HOMC20UCW | — |
| | 20 | HOMC20UC | HOMC20UCW | — |
| | 30 | HOMC30UC [6] | HOMC30UCW | — |
| | 40 | HOMC42UC | — | — |
| | 42 | HOMC42UC | — | — |
| | 60 | HOMC60UC | — | HOMCMF60UC |
| 225 A | 16 | HOMC20UC | HOMC20UCW | — |
| | 20 | HOMC20UC | HOMC20UCW | — |
| | 30 | HOMC30UC | HOMC30UCW | — |
| | 40 | HOMC42UC | — | — |
| | 42 | HOMC42UC | — | — |
| | 60 | HOMC60UC ^{OBS} | — | HOMCMF60UC |

^{OBS} This product is obsolete.

QO and Homeline Qwik-Grip Load Center Accessories

Table 1.70: Qwik-Grip Load Center Accessories

| Description | Cat. No. | Schedule |
|------------------------------|---|----------|
| Qwik-Grip replacement shield | (1) Qwik-Grip shield PKQGS | DE3A |
| Qwik-Grip fillers | (4) Qwik-Grip fillers PKQGFP | DE3A |
| Qwik-Grip replacement insert | (1) Qwik-Grip insert PKQGI | DE3A |
| Qwik-Grip assembly kit | (4) Qwik-Grip shields, (4) Qwik-Grip fillers PKQGA | DE3A |

[6] Extra long version available HOMC30UFL

Surge Protective Devices (SPD)

Table 1.71: Load Center and CSED Surge Protection Devices

| Description | Cat. No. | Description | Surge Current per Phase | Schedule |
|---------------------------------------|---------------|---|-------------------------|----------|
| Surge Protective Devices | QO2175SB | QO Surgebreaker | 22.5 kA | DE1B |
| | HOM2175SB | HOM Surgebreaker | 22.5 kA | DE1B |
| | HEPD25 | 1Ø3W—120/240 V Compact SPD | 25 kA | DE1B |
| | SDSA2040 | 3Ø4W—208Y/120 V Compact SPD | 40 kA | DE1B |
| | SDSA2040D | 3Ø3W—240 V Compact SPD | 40 kA | DE1B |
| | QO250PSPD | QO Plug-on Neutral SPD | 50 kA | DE1B |
| | HOM250PSPD | HOM Plug-on Neutral SPD | 50 kA | DE1B |
| | HEPD50 | SurgeArrest Whole Home Electronic Protection | 50 kA | DE1B |
| | HEPD80 | SurgeArrest Whole Home Electronic Protection | 80 kA | DE1B |
| | SDSB80111 OBS | Surgebreaker Plus (all-in-one protection for appliances, ethernet, and telephone) | 80 kA | DE1B |
| Surge Protective Device Mounting Kits | HEPD25MKF | HEPD25 Flush Mount Kit | — | DE1B |
| | HEPD58MKF | HEPD50 and HEPD80 Flush Mount Kit | — | DE1B |

OBS This product is obsolete.



HEPD25



HEPD50



HEPD80



QO250PSPD



HOM250PSPD



QO2175SB



HOM2175SB

Indoor Enclosure Dimensions and Knockout Information

Table 1.72: Enclosure Dimensions

| Box No. | Dimensions | | | | | |
|---------|------------|-----|-------|------|------|----|
| | W | | H | | D | |
| | in. | mm | in. | mm | in. | mm |
| 1 | 3.81 | 97 | 6.72 | 171 | 3.00 | 76 |
| 2 | 4.81 | 122 | 9.30 | 236 | 3.19 | 81 |
| 3 | 4.81 | 122 | 9.30 | 236 | 3.19 | 81 |
| 4 | 8.88 | 226 | 12.57 | 319 | 3.80 | 97 |
| 5 | 14.25 | 362 | 14.92 | 379 | 3.75 | 95 |
| 6 | 14.25 | 362 | 17.92 | 455 | 3.75 | 95 |
| 7 | 14.25 | 362 | 20.92 | 531 | 3.75 | 95 |
| 8 | 14.25 | 362 | 26.04 | 661 | 3.75 | 95 |
| 9 | 14.25 | 362 | 29.86 | 758 | 3.75 | 95 |
| 10 | 14.25 | 362 | 33.78 | 858 | 3.75 | 95 |
| 11 | 14.25 | 362 | 37.98 | 965 | 3.75 | 95 |
| 12 | 14.25 | 362 | 39.37 | 1000 | 3.75 | 95 |

Table 1.73: Knockout Information

| Symbol | Knockouts | | | | | | | | |
|--------------|-----------|-----|---|-------|-------|---|-------|---|-------|
| | A | B | C | D | E | F | G | H | I |
| Conduit Size | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 | 3-1/2 |























Table 1.74: Indoor Knockout Information and Enclosure Dimensions for Qwik Grip Loadcenters

| Box No. | Dimensions | | | | | |
|---------|------------|-----|-------|------|------|----|
| | W | | H | | D | |
| | in. | mm | in. | mm | in. | mm |
| 7Q | 14.25 | 362 | 20.92 | 531 | 3.75 | 95 |
| 8Q | 14.25 | 362 | 26.04 | 661 | 3.75 | 95 |
| 9Q | 14.25 | 362 | 29.86 | 758 | 3.75 | 95 |
| 10Q | 14.25 | 362 | 33.78 | 858 | 3.75 | 95 |
| 11Q | 14.25 | 362 | 37.98 | 965 | 3.75 | 95 |
| 12Q | 14.25 | 362 | 39.37 | 1000 | 3.75 | 95 |

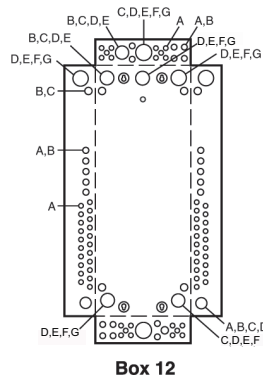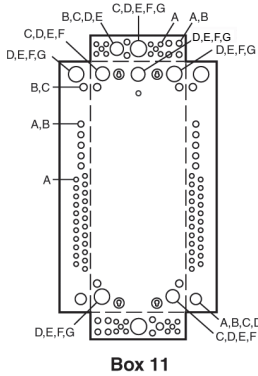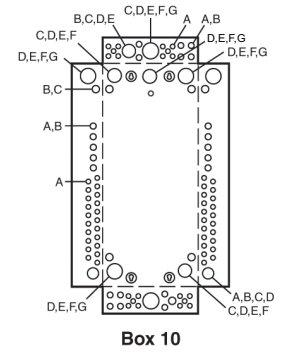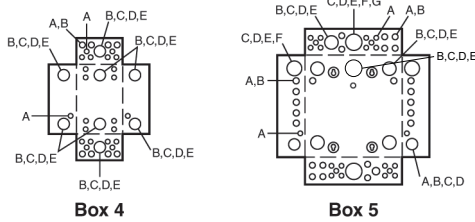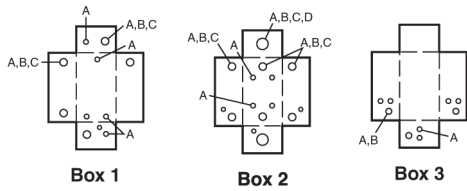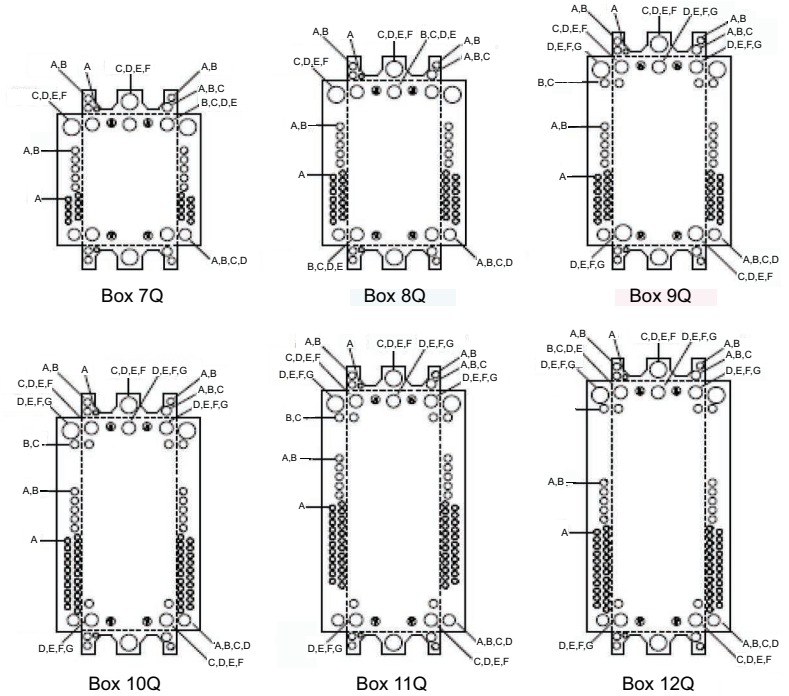

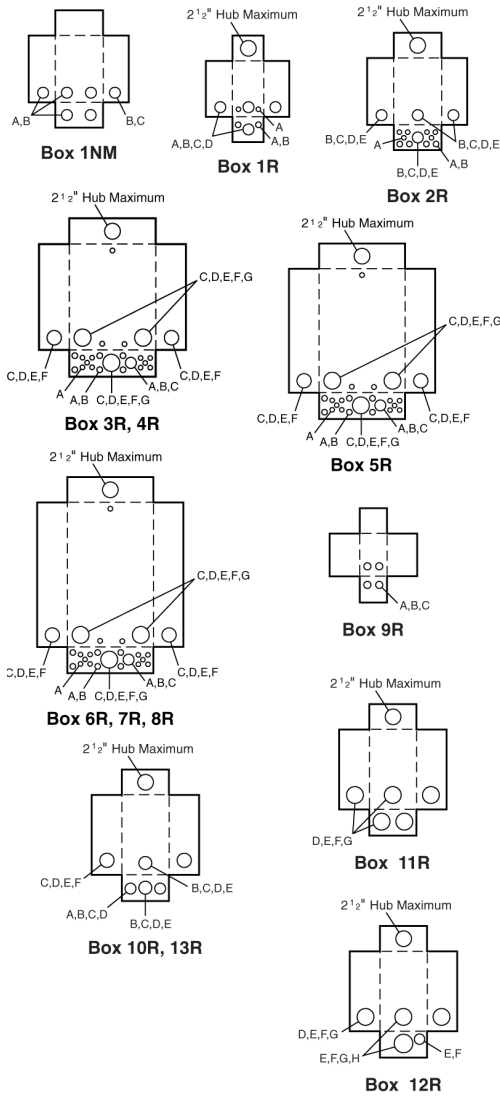


Enclosure Dimensions and Knockout Information

Table 1.75: Enclosure Dimensions

| Box No. | Dimensions | | | | | |
|---------|------------|-----|-------|------|------|-----|
| | W | | H | | D | |
| | in. | mm | in. | mm | in. | mm |
| 1NM | 6.52 | 166 | 8.79 | 223 | 3.90 | 99 |
| 1R [1] | 4.88 | 124 | 9.38 | 238 | 4.00 | 102 |
| 2R | 8.88 | 226 | 12.65 | 321 | 4.27 | 108 |
| 3R | 14.75 | 375 | 18.92 | 481 | 4.52 | 115 |
| 4R | 14.75 | 375 | 22.06 | 560 | 4.52 | 115 |
| 5R | 14.75 | 375 | 26.04 | 661 | 4.52 | 115 |
| 6R | 14.75 | 375 | 29.86 | 758 | 4.52 | 115 |
| 7R | 14.75 | 375 | 33.78 | 858 | 4.52 | 115 |
| 8R | 14.75 | 375 | 37.98 | 965 | 4.52 | 115 |
| 9R | 4.56 | 116 | 6.50 | 165 | 3.88 | 99 |
| 10R | 6.92 | 176 | 13.18 | 335 | 4.12 | 105 |
| 11R | 7.56 | 192 | 23.24 | 590 | 4.75 | 121 |
| 12R | 9.62 | 244 | 26.24 | 666 | 5.50 | 140 |
| 13R | 6.92 | 176 | 16.18 | 411 | 4.12 | 105 |
| 14R | 14.75 | 375 | 39.37 | 1000 | 4.52 | 115 |
| 15R | 8.88 | 226 | 14.80 | 376 | 4.27 | 108 |
| 16R | 8.55 | 217 | 24.75 | 629 | 4.16 | 106 |
| 17R | 8.88 | 226 | 12.65 | 321 | 4.27 | 108 |

Table 1.76: Knockout Information

| Symbol | Knockouts | | | | | | | |
|--------------|-----------|---------|-------|-----------|-----------|-------|-----------|-------|
| | A | B | C | D | E | F | G | H |
| Conduit Size | 1/2 in. | 3/4 in. | 1 in. | 1-1/4 in. | 1-1/2 in. | 2 in. | 2-1/2 in. | 3 in. |

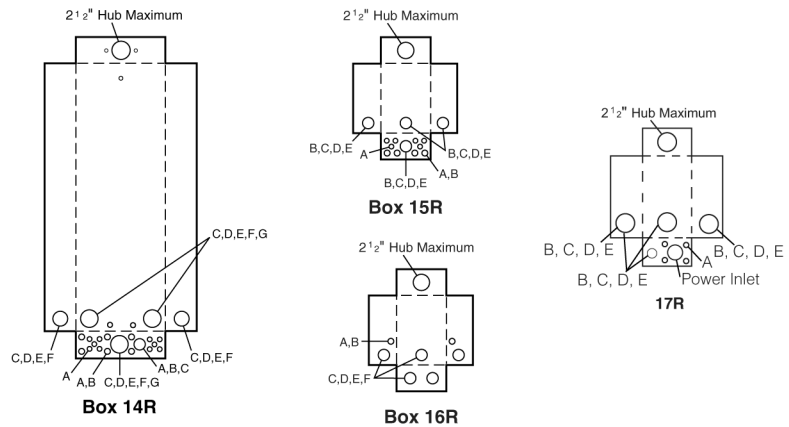

Bolt-On Hubs

Square D equipment with "R" or "RB" suffix, designated NEMA 3R rainproof construction, utilizes bolt-on hubs listed below. "RB" devices will accept 3/4 in. through 2-1/2 in. bolt-on hubs without the use of reducers. Off-center conduit thread openings and elongated mounting holes provide quick and easy adjustment to eliminate costly conduit offsets and bends. Catalog suffix "R" devices require 3 in. through 4 in. field cut opening. Hubs are suitable for use with conduit having ANSI standard taper pipe thread.



Table 1.77: Bolt-On Hubs UL Listed for Rainproof Devices

| Conduit Size | 3/4 in. | 1 in. | 1-1/4 in. | 1-1/2 in. | 2 in. | 2-1/2 in. |
|--------------|---------|-------|-----------|-----------|-------|-----------|
| Hub Cat. No. | B075 | B100 | B125 | B150 | B200 | B250 |

NOTE: Closing cap (Cat. No. BCAP) is provided factory-installed on each device having "RB" suffix.

Table 1.78: Bolt-On Hubs UL Listed for Mounting in Field-Cut Opening

| Conduit Size | 3 in. | 4 in. |
|--------------|---|-------|
| Hub Cat. No. | B300 | B400 |
| | Designed for mounting in field cut opening. Includes gasket and four mounting bolts and nuts. | |

[1] HOME250SPA and QO260NATR top endwall has no hub opening.

Catalog Number Logic for CSED

Table 1.79: Catalog Numbers for Combination Service Entrance Devices

| Number Segment | Character | Description | R | Q | C | 8 | 16 | D | 200 | C | H | X | S |
|--|-----------|---|---|---|---|---|----|---|-----|---|---|---|---|
| Socket Type | Q | QO Ringless | | | | | | | | | | | |
| | R | HOM Ringless | | | | | | | | | | | |
| | C | QO Ring type | | | | | | | | | | | |
| | S | HOM Ring type | | | | | | | | | | | |
| Service Disconnect Install | Blank | Field Installed | | | | | | | | | | | |
| | Q | Factory Installed | | | | | | | | | | | |
| Service Feed | Blank | Combination overhead/underground | | | | | | | | | | | |
| | C | Combination overhead/underground | | | | | | | | | | | |
| | O | Overhead only | | | | | | | | | | | |
| | U | Underground only | | | | | | | | | | | |
| | RA | "A" Hub provision in top endwall | | | | | | | | | | | |
| Spaces (Service Discounts or Branches) | # | Maximum # of 1-pole circuits | | | | | | | | | | | |
| | # | Maximum # of 1-pole spaces | | | | | | | | | | | |
| Interior | D | Dual main service disconnects (feed-thru lugs on meter mains only) | | | | | | | | | | | |
| | F | Single main service disconnect with feed-thru lugs | | | | | | | | | | | |
| | L | Main lug interior (service disconnects field installed) | | | | | | | | | | | |
| | M | Single main service disconnect | | | | | | | | | | | |
| Amperage Rating | 100 | 100 A | | | | | | | | | | | |
| | 125 | 125 A | | | | | | | | | | | |
| | 150 | 150 A | | | | | | | | | | | |
| | 200 | 200 A | | | | | | | | | | | |
| | 225 | 225 A | | | | | | | | | | | |
| | 400 | 400 A | | | | | | | | | | | |
| Enclosure Mounting Style | C | Surface mount or convertible to semi-flush (use appropriate flange kit) | | | | | | | | | | | |
| | F | Semi-flush mount only | | | | | | | | | | | |
| | R | Reverse mount only | | | | | | | | | | | |
| | S | Surface mount only | | | | | | | | | | | |
| | PF | Home PoN semi-flush mount device | | | | | | | | | | | |
| | PS | Home PoN surface mount device | | | | | | | | | | | |
| Meter Socket Bypass Type | H | Horn by-pass | | | | | | | | | | | |
| | K | K-4 bolt-on, no by-pass | | | | | | | | | | | |
| | L | Class 320 with lever by-pass | | | | | | | | | | | |
| | N | Class 320, No by-pass | | | | | | | | | | | |
| | B | Class 320 Manual by-pass | | | | | | | | | | | |
| | Blank | No by-pass | | | | | | | | | | | |
| | X | 2 piece lever by-pass cover | | | | | | | | | | | |
| Application | S | Solar ready | | | | | | | | | | | |
| | FMG | Florida Meter Group | | | | | | | | | | | |
| | MEG | Meter Equipment Group | | | | | | | | | | | |

This table is for interpreting existing part number only. All possible combinations are not available.

Table 1.80: Catalog Numbers Square D™ Energy Center

| Number Segment | Character | Description | QO | W | C | 60 | M | 200 | P | F | Y |
|--------------------------|-----------|--|----|---|---|----|---|-----|---|---|---|
| Architecture platform | QO | QO architecture platform | | | | | | | | | |
| Wiser Energy | W | Wiser Energy | | | | | | | | | |
| Socket Type | C | QO Ringless | | | | | | | | | |
| Spaces | # | Number of Spaces | | | | | | | | | |
| Interior | M | Single main service disconnect | | | | | | | | | |
| Amperage Rating | 200 | 200 A | | | | | | | | | |
| Plug-on-neutral | P | Plug-on-neutral ready | | | | | | | | | |
| Enclosure mounting style | F | Semi-flush mount only | | | | | | | | | |
| Application | Y | Universal — compatible with any solar inverter | | | | | | | | | |

Rainproof Meter Mains

Table 1.81: Rainproof Meter Mains

| Ampere Rating | Bypass Type | Service (Type of Feed) | | Short Circuit Current Rating | Cat. No. | Service Disconnect(s) | | | Load Center and Branch Circuit Breakers (Order separately [1]) | | | | Hub Type (Order separately [2]) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Service Ground Lug AWG/kcmil (Al/Cu) | Bus Rating | Weight Each (Lbs) and Pallet Qty. | | | | | |
|--|-------------|------------------------|---------------|------------------------------|-------------------------------|-----------------------|-----------------------------|--------------------|--|-------------|--------------------|------------|---------------------------------|---------------------------------------|--------------------------------------|------------|-----------------------------------|---|-------|----------|-----|---------|
| | | UL | UL and EUSERC | | | 2P Circuits (Max.) | Type (Order separately [3]) | Ampere Rating Max. | Max. Quantity | | Ampere Rating Max. | | | | | | | | | | | |
| | | | | | | | | | Spaces | 1P Circuits | | Tandems | | | | | | | | | | |
| Ring Type, QO™ | | | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | | | |
| 125 A | None | OH/UG | — | 10 kA | C125RB | 1 | QOM1-VH | 125 A | — | — | — | — | B | 4-1/0 | 8-1/0 | — | 15, 54 | | | | | |
| | | OH/UG | — | 22 kA | CM200S | 1 | QOM2-VH | 200 A | — | — | — | — | A | 4-250 | (2)8-2/0 | — | 26, 24 | | | | | |
| 200 A | None | OH/UG | — | 22 kA | C2M200S OBS | 1 | QOM2-VH | 200 A | — | — | — | — | A | 4-250 | (2)8-2/0 | — | 27, 20 | | | | | |
| | | OH/UG | — | 10 kA | C4L200S OBS | 2 | QO | 100 A | — | — | — | — | A | 4-250 | (2)8-2/0 | — | 27, 28 | | | | | |
| Ring Type, Homeline™ | | | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | | | |
| 125 A | None | OH/UG | OH/UG | 10 kA | SC8L125S | 4 | HOM | 125 A | — | — | — | — | A | 6-2/0 | 6-2/0 | 125 | 31, 24 | | | | | |
| 200 A | None | OH/UG | OH/UG | 10 kA | SC12L200S OBS | 6 | HOM | 200 A [4] | — | — | — | — | A-L | 4-250 | 8-2/0 | 200 | 40, 10 | | | | | |
| Semiflush Mount only | | | | | | | | | | | | | | | | | | | | | | |
| 125 A | None | OH/UG | OH/UG | 10 kA | SC8L125F OBS | 4 | HOM | 110 A | — | — | — | — | A or B300 | 6-2/0 | 6-2/0 | — | 37, 20 | | | | | |
| 200 A | None | OH [5]/UG | OH [5]/UG | 10 kA | SC12L200F OBS | 6 | HOM | 200 A [6] | — | — | — | — | A-L | 4-250 | 8-2/0 | 225 | 47, 10 | | | | | |
| Surface Mount—Supplied with Feed-Thru Lugs and provisions for Branch Circuit Breakers | | | | | | | | | | | | | | | | | | | | | | |
| 150 A | None | OH/UG | — | 10 kA | SC816D150C [7] [8] | 1 | HOM2150 [9] | 150 A | 8 | 16 | 8 | 100 A [10] | A or A-L | 6-300 | 8-1/0 | 200 | 48, 18 | | | | | |
| | | | UG | | SU816D150C [7] [8] OBS | 1 | | | | | | | | | | 50 A | | — | — | — | — | — |
| 200 A | None | UG | — | 10 kA | SC816D200C [7] [8] | 1 | HOM2200 [9] | 200 A | 8 | 16 | 8 | 100 A [10] | A or A-L | 6-300 | 8-1/0 | 200 | 48, 18 | | | | | |
| | | | UG | | SU816D200C OBS | 1 | | | | | | | | | | 50 A | | — | — | — | — | — |
| Ringless, QO™ | | | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | | | |
| 200 A | None | OH/UG | — | 10 kA | RC200S [11] | 1 | QOM2-VH | 200 A | — | — | — | — | A | 6-350 | (2)8-2/0 | — | 26, 24 | | | | | |
| | Lever | | | | RCM200SL [11] [12] | 1 | QOM2-VH | 200 A | | | | | | | | | | A | 6-350 | 8-1/0 | — | 60 / 14 |
| | None | | | | RC2M200S [11] | 1 | QOM2-VH | 200 A | | | | | | | | | | A | 6-350 | (2)8-2/0 | — | 27, 20 |
| | Horn | | | | RC2M200SH OBS [11] | 1 | QOM2-VH | 50 A | | | | | | | | | | A | 6-350 | (2)8-2/0 | — | 27, 20 |
| | Lever | | | | RC2M200SL OBS [11] | 1 | QOM2-VH | 200 A | | | | | | | | | | A | 6-350 | 8-1/0 | — | 60 / 14 |
| | | | | | [12] | 1 | QO-VH | 50 A | | | | | | | | | | | | 8-1/0 | | |
| | None | | | | QC12L200S OBS [11] | 6 | QO-VH | 200 A | | | | | | | | | | A | 6-350 | 8-2/0 | — | 43, 21 |
| | None | | | | [12] | 6 | QO-VH | 200 A | | | | | | | | | | A | 6-350 | 12-2/0 | 200 | 40, 21 |
| | | | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only, Supplied with Feed-Thru Lugs and provisions for Branch Circuit Breakers | | | | | | | | | | | | | | | | | | | | | | |
| 100 A | Horn | OH/UG | — | 22 kA | QC816F100CH [7] [11] [12] | 1 | QOM2100VH [9] | 100 A | 8 | 16 | 8 | 100 | A | 6-350 | 12-2/0 | 200 | 40, 21 | | | | | |
| 125 A | None | OH/UG | — | 22 kA | QC816F125S OBS | 1 | QOM2125VH [9] | 125 A | 8 | 16 | 8 | 100 | A | 6-350 | 8-2/0 | — | 43, 21 | | | | | |
| | None | OH/UG | — | 22 kA | QC816F125C [7] [11] | 1 | QOM2125VH [9] | 125 A | 8 | 16 | 8 | 100 | A | 6-350 | 12-2/0 | 125 | 40, 21 | | | | | |
| 150 A | None | OH/UG | — | 22 kA | QC816F150S [7] [11] [12] | 1 | QOM2150VH [9] | 150 A | 8 | 16 | 8 | 150 A [13] | A | 6-350 | 8-2/0 | 200 | 43, 21 | | | | | |
| | None | OH/UG | — | 22 kA | QC816F150C [7] [11] | 1 | QOM2150VH [9] | 150 A | 8 | 16 | 8 | 150 A [13] | A | 6-350 | 12-2/0 | 200 | 40, 21 | | | | | |
| | Lever | OH/UG | — | 22 kA | QC816F150SL OBS [7] [11] [12] | 1 | QOM2150VH [9] | 200 A | 8 | 16 | 8 | 150 A | A | 6-350 | 8-2/0 | — | 74 / 12 | | | | | |
| 200 A | None | OH/UG | — | 22 kA | QC816F200S OBS [7] [11] [12] | 1 | QOM2200VH [9] | 200 A | 8 | 16 | 8 | 200 A [6] | A | 6-350 | 8-2/0 | 200 | 43, 21 | | | | | |
| | Horn | OH/UG | — | 22 kA | QC816F200SH OBS [7] [11] [12] | 1 | QOM2200VH [9] | 200 A | 8 | 16 | 8 | 200 A [6] | A | 6-350 | — | — | — | | | | | |
| | Horn | OH/UG | — | 22 kA | QC816F200CH OBS [7] [11] | 1 | QOM2200VH [9] | 200 A | 8 | 16 | 8 | 200 A [6] | A | 6-350 | 12-2/0 | 200 | 40, 21 | | | | | |
| | Lever | OH/UG | — | 22 kA | QC816F200SL [7] [11] [12] | 1 | QOM2200VH [9] | 200 A | 8 | 16 | 8 | 200 A | A | 6-350 | 8-2/0 | 200 | 74 / 12 | | | | | |
| Ringless, Homeline™ | | | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | | | |
| 125 A | None | OH/UG | — | 10 kA | RC8L125S OBS [14] | 4 | HOM | 125 A [15] | — | — | — | — | A | 6-2/0 | 6-2/0 | 125 | 27, 32 | | | | | |

[1] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
 [2] To order hubs, see Accessories and Hubs for CSEDs, page 1-47
 [3] To order service disconnects, see Circuit Breakers for CSEDs, page 1-46 except as noted)
 [4] Use only 15–110 A and 150–200 A breakers.
 [5] Suitable for OH service with addition of tunnel kit (SCTK20). Order separately.
 [6] Use only 15–100 A and 150–200 A circuit breakers.
 [7] Supplied with load side feed-thru lugs, for 4 AWG–250 kcmil (Al/Cu) conductors.
 [8] Convertible to semiflush with SC200F flange kit (order separately).
 [9] Service disconnect supplied factory-installed.
 [10] A 100 A circuit breaker can be installed in bottom position only, all other positions are limited to 70 A max.
 [11] Device supplied with barrel lock provisions factory-installed.
 [12] 5th jaw factory-installed.
 [13] Use only 15–100 A and 150 A circuit breakers.
 [14] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).
 [15] 125 A Homeline™ 2P circuit breaker can be installed in top position only. All other positions are limited to 100 A max.

Table 1.81 Rainproof Meter Mains (cont'd.)

| Ampere Rating | Bypass Type | Service (Type of Feed) | | Short Circuit Current Rating | Cat. No. | Service Disconnect(s) | | | Load Center and Branch Circuit Breakers (Order separately [16]) | | | | Hub Type (Order separately [17]) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Service Ground Lug AWG/kcmil (Al/Cu) | Bus Rating | Weight Each (Lbs) and Pallet Qty. |
|--|-------------|------------------------|----------------|------------------------------|-------------------------------------|-----------------------|------------------------------|--------------------|---|-------------|--------------------|------------|----------------------------------|---------------------------------------|--------------------------------------|------------|-----------------------------------|
| | | UL | UL and EU-SERC | | | 2P Circuits (Max.) | Type (Order separately [18]) | Ampere Rating Max. | Max. Quantity | | Ampere Rating Max. | | | | | | |
| | | | | | | | | | Spaces | 1P Circuits | | Tandems | | | | | |
| 200 A | None | OH/UG | — | 10 kA | RC12L200S OBS | 6 | HOM | 200 A [19] | — | — | — | — | A | 6–350 | 8–2/0 | — | 43, 21 |
| 200 A | None | OH/UG | — | 22 kA | RC12L200C [20] | 6 | HOM | 200 A [19] | — | — | — | — | A | 6–350 | 12–2/0 | 200 | 40, 21 |
| Surface Mount Only, Supplied with Feed-Thru Lugs and provisions for Branch Circuit Breakers | | | | | | | | | | | | | | | | | |
| 100 A | Horn | OH/UG | — | 22 kA | RC816F100SH OBS [21] [20] [22] | 1 | QOM2100VH [23] | 100 A | 8 | 16 | 8 | 100 A | A | 6–350 | 8–2/0 | — | 43, 21 |
| 100 A | Horn | OH/UG | — | 22 kA | RC816F125SH OBS [21] [20] [22] | 1 | QOM2100VH [23] | 100 A | 8 | 16 | 8 | 100 A | | | 12–2/0 | — | 40, 21 |
| 125 A | Horn | OH/UG | — | 22 kA | RC816F125SH OBS [21] [20] [22] | 1 | QOM2125VH [23] | 125 A | 8 | 16 | 8 | 100 A | | | 8–2/0 | — | 43, 21 |
| 125 A | Horn | OH/UG | — | 22 kA | RC816F125CH [21] [20] [22] | 1 | QOM2125VH [23] | 125 A | 8 | 16 | 8 | 100 A | | | 12–2/0 | 200 | 40, 21 |
| 150 A | None | OH/UG | — | 22 kA | RC816F150S OBS [21] [20] | 1 | QOM2150VH [23] | 150 A | 8 | 16 | 8 | 150 A [24] | | | 8–2/0 | — | 43, 21 |
| | None | OH/UG | — | 22 kA | RC816F150C [21] [20] | 1 | QOM2150VH [23] | 150 A | 8 | 16 | 8 | 150 A [24] | | | 12–2/0 | 200 | 40, 21 |
| | Horn | OH/UG | — | 22 kA | RC816F150SH OBS [21] [20] [22] | 1 | QOM2150VH [23] | 150 A | 8 | 16 | 8 | 150 A [24] | | | 8–2/0 | — | 43, 21 |
| | Horn | OH/UG | — | 22 kA | RC816F150CH [21] [20] [22] | 1 | QOM2150VH [23] | 150 A | 8 | 16 | 8 | 150 A [24] | | | 12–2/0 | 200 | 40, 21 |
| 200 A | Lever | OH/UG | — | 22 kA | RC816F150SL OBS [20] [22] [25] | 1 | QOM2150VH [23] | 200 A | 8 | 16 | 8 | 150 A | | | 8–2/0 | 200 | 72 / 12 |
| | None | OH/UG | — | 22 kA | RC816F200S OBS [21] [20] [22] | 1 | QOM2200VH [23] | 200 A | 8 | 16 | 8 | 200 A [19] | | | 8–2/0 | 200 | 43, 21 |
| | None | OH/UG | — | 22 kA | RC816F200C [21] [20] | 1 | QOM2200VH [23] | 200 A | 8 | 16 | 8 | 200 A [19] | | | 12–2/0 | 200 [26] | 40, 21 |
| | Horn | OH/UG | — | 22 kA | RC816F200SH OBS [21] [20] [22] | 1 | QOM2200VH [23] | 200 A | 8 | 16 | 8 | 200 A [19] | | | 8–2/0 | — | 43, 21 |
| | Horn | OH/UG | — | 22 kA | RC816F200CH [21] [20] [22] | 1 | QOM2200VH [23] | 200 A | 8 | 16 | 8 | 200 A [19] | | | 12–2/0 | 200 | 40, 21 |
| 200 A | Lever | OH/UG | — | 22 kA | RC816F200SL OBS [21] [20] [22] [25] | 1 | QOM2200VH [23] | 200 A | 8 | 16 | 8 | 200 A | | | 8–2/0 | 200 | 72 / 12 |
| | Horn | OH/UG | — | 10 kA | RC816D200CH [27] [21] [22] [28] | 1 | HOM2200 [23] | 200 A | 8 | 16 | 8 | 100 A [29] | | | 6–300 | 6–1/0 | 200 |
| | | | | | | | | | | | | | | | | | |

OBS This product is obsolete.

[16] To order branch circuit breakers, see *QO Plug-On Circuit Breakers*, page 1-3
 [17] To order hubs, see *Accessories and Hubs for CSEDs*, page 1-47
 [18] To order service disconnects, see *Circuit Breakers for CSEDs*, page 1-46 except as noted
 [19] Use only 15–100 A and 150–200 A circuit breakers.
 [20] Device supplied with barrel lock provisions factory-installed.
 [21] Supplied with load side feed-thru lugs, for 4 AWG–250 kcmil (Al/Cu) conductors.
 [22] 5th jaw factory-installed.
 [23] Service disconnect supplied factory-installed.
 [24] Use only 15–100 A and 150 A circuit breakers.
 [25] Suitable for load wires to exit top endwall with addition of Tunnel Kit OHBL, see *Table 1.89 Accessories*, page 1-47, check with local utility for approval.
 [26] Not solar ready.
 [27] Convertible to semiflush with SC200F flange kit (order separately).
 [28] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).
 [29] A 100 A circuit breaker can be installed in bottom position only, all other positions are limited to 70 A max.

Meter Mains and All-In-Ones (100 to 225 A Maximum)

- Ring or ringless type meter socket designs available
- UL Listed, suitable only for use as service equipment
- Meets EUSERC standards
- Service disconnect(s) are supplied factory-installed, except where noted
- Semiflush-reverse design available, supplied with load center (indoor access)
- Supplied with 100% branch neutrals, all unused terminals may be used for equipment grounding wires.
- Meets Federal Specification W-P-115c as Type 1, Class 2

Table 1.82: All-In-One Combination Service Entrance Devices

| Ampere Rating | Bypass Type | Service (Type of Feed) UL and EUSERC | Short Circuit Current Rating | Cat. No. (DE3A) | Service Disconnect(s) | | | Load Center and Branch Circuit Breakers (Order separately [30]) | | | | Hub Type [37] (Order separately) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Service Ground Lug AWG/kcmil (Al/Cu) | Bus Rating | Weight Each (Lbs) and Pallet Qty. | | | | |
|--|-------------|--------------------------------------|------------------------------|---------------------------|-----------------------|--------------------------|--------------------|---|-------------|--------------------|------------|----------------------------------|---------------------------------------|--------------------------------------|------------|-----------------------------------|---------|--|--|--|
| | | | | | 2P Circuits (Max.) | Type (Factory Installed) | Ampere Rating Max. | Max. Quantity | | Ampere Rating Max. | | | | | | | | | | |
| | | | | | | | | Spaces | 1P Circuits | | Tan-dems | | | | | | | | | |
| Ring Type, Homeline™ | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | |
| 100 A | None | OH/UG | 10 kA | SC1624M100S | 1 | HOM2100 | 100 A | 16 | 24 | 8 | 100 A | A | 6-2/0 | 6-2/0 | 125 | 32, 24 | | | | |
| 125 A | None | OH/UG | 10 kA | SC1624M125S | 1 | HOM2125 | 125 A | 16 | 24 | 8 | 125 A [32] | A | 6-2/0 | 6-2/0 | 125 | 32, 24 | | | | |
| 200 A | None | OH/UG | 10 kA | SC2040M200C [33] | 1 | HOM2200 | 200 A | 20 | 40 | 20 | 100 A | A or A-L | 6-300 | 8-1/0 | 200 | 47, 18 | | | | |
| 200 A | None | UG | 10 kA | SU2040M200C OBS | 1 | HOM2200 | 200 A | 20 | 40 | 20 | 100 A | A or A-L | 6-300 | 8-1/0 | — | 47, 18 | | | | |
| Semiflush Mount Only | | | | | | | | | | | | | | | | | | | | |
| 100 A | None | OH/UG | 10 kA | SC1624M100F | 1 | HOM2100 | 100 A | 16 | 24 | 8 | 100 A | A | 6-2/0 | 6-2/0 | 125 | 44, 20 | | | | |
| 125 A | None | OH/UG | 10 kA | SC1624M125F | 1 | HOM2125 | 125 A | 16 | 24 | 8 | 110 A | A or B300 | 6-2/0 | 6-2/0 | 125 | 44, 20 | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | |
| 100 A | None | OH[34] | 10 kA | SO1020M100S | 1 | HOM2100 | 100 A | 10 | 20 | 10 | 80 A | A | 6-1 | 8-4 | 100 | 20, 42 | | | | |
| 200 A | None | OH[34] | 22 kA | SO2040M200S | 1 | QOM2200VH | 200 A | 20 | 40 | 20 | 200 A | A | 6-350 | 8-2/0 | 200 | 43, 21 | | | | |
| REVERSE All-In-One—Semiflush Mount with Service Disconnect (outdoor access) and Load Center (indoor access) | | | | | | | | | | | | | | | | | | | | |
| 200 A | None | UG | 10 kA | SU3040M200R OBS | 1 | QOM2200VH | 200 A | 30 | 40 | 10 | 200 A [35] | A or B300 | 6-300 | 12-1/0 | — | 60, 15 | | | | |
| 225 A | None | UG | 10 kA | SU3040M225R OBS | 1 | QOM2225VH | 225 A | 30 | 40 | 10 | 200 A [35] | A or B300 | 6-300 | 12-1/0 | — | 60, 15 | | | | |
| Ringless, Homeline | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | |
| 100 A | None | OH/UG [34] | 10 kA | RC1624M100S | 1 | HOM2100 | 100 A | 16 | 24 | 8 | 100 A | A | 6-2/0 | 6-2/0 | 125 | 32, 24 | | | | |
| 125 A | None | OH/UG [34] | 10 kA | RC1624M125S OBS | 1 | HOM2125 | 125 A | 16 | 24 | 8 | 125 A [32] | | | | — | | | | | |
| 125 A | Horn | OH/UG [34] | 22 kA | RC2040M125CH OBS [36][37] | 1 | QOM2125VH | 125 A | 20 | 40 | 20 | 125 A | | | | 200 | | 40, 21 | | | |
| 150 A | Horn | OH/UG [34] | 22 kA | RC2040M150SH [36] | 1 | QOM2150VH | 150 A | 20 | 40 | 20 | 150 A | | | | — | | 43, 21 | | | |
| | Horn | OH/UG [34] | 22 kA | RC2040M150CH [36][37] | 1 | QOM2150VH | 150 A | 20 | 40 | 20 | 150 A | | | | 200 | | 40, 21 | | | |
| 200 A | Lever | OH/UG [34] | 22 kA | RC3040M150SL [38] | 1 | QOM2150VH [32] | 200 A | 30 | 40 | 10 | 150 A | | | | 200 | | 76 / 12 | | | |
| | None | OH/UG [34] | 22 kA | RC2040M200S [36] | 1 | QOM2200VH | 200 A | 20 | 40 | 20 | 200 A | | | | 200 | | 43, 21 | | | |
| | None | OH/UG [34] | 22 kA | RC2040M200C [36] | 1 | QOM2200VH | 200 A | 20 | 40 | 20 | 200 A | | | | 200 | | 40, 21 | | | |
| | Horn | OH/UG [34] | 22 kA | RC2040M200SH OBS | 1 | QOM2200VH | 200 A | 20 | 40 | 20 | 200 A | | | | — | | 43, 21 | | | |
| | Horn | OH/UG [34] | 22 kA | RC2040M200CH [36] | 1 | QOM2200VH | 200 A | 20 | 40 | 20 | 200 A | | | | 200 | | 40, 21 | | | |
| | Lever | OH/UG [34] | 22 kA | RC3040M200SL [38] | 1 | QOM2200VH [32] | 200 A | 30 | 40 | 10 | 200 A | | | | 200 | | 76 / 12 | | | |
| None | OH/UG [34] | 22 kA | RC2040M200CGP | 1 | QOM2200VH | 200 A | 20 | 40 | 20 | 200 A | 200 | | | | 48 / 21 | | | | | |
| Ringless, QO | | | | | | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | | | | | | |
| 150 A | Horn | OH/UG [34] | 22 kA | QC2442M150SH OBS | 1 | QOM2150VH | 150 A | 24 | 42 | 18 | 150 A | A | 6-350 | 8-2/0 | — | 43, 21 | | | | |
| 200 A | None | OH/UG [34] | 22 kA | QC2442M200S OBS | 1 | QOM2200VH | 200 A | 24 | 42 | 18 | 200 A | | | | — | 43, 21 | | | | |
| | None | OH/UG [34] | 22 kA | QC2442M200C [36] | 1 | QOM2200VH | 200 A | 24 | 42 | 18 | 200 A | | | | 200 | 40, 21 | | | | |
| | Horn | OH/UG [34] | 22 kA | QC2442M200SH [36] | 1 | QOM2200VH | 200 A | 24 | 42 | 18 | 200 A | | | | — | 43, 21 | | | | |
| | Horn | OH/UG [34] | 22 kA | QC2442M200CH OBS [36][37] | 1 | QOM2200VH | 200 A | 24 | 42 | 18 | 200 A | | | | — | 40, 21 | | | | |
| | None | OH/UG [34] | 22 kA | QC3040M200S | 1 | QOM2200VH | 200 A | 30 | 40 | 10 | 200 A | | | | 200 | 40, 21 | | | | |
| 200 A | Horn | OH/UG [34] | 22 kA | QC3040M200SH OBS | 1 | QOM2200VH | 200 A | 30 | 40 | 10 | 200 A | | | | — | 40, 21 | | | | |

OBS This product is obsolete.

[30] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3
 [31] To order hubs, see Accessories and Hubs for CSEDs, page 1-47
 [32] 125 A Homeline™ 2P circuit breaker can be installed in top position only. All other positions are limited to 100 A max.
 [33] Convertible to semiflush with SC200F flange kit (order separately).
 [34] Device does not meet EUSERC Specifications.
 [35] Use only 15-110 A and 150-200 A circuit breakers.
 [36] Device supplied with barrel lock provisions factory-installed.
 [37] 5th jaw factory-installed.
 [38] Suitable for load wires to exit top endwall with addition of Tunnel Kit OHBL, (see Table 1.89 Accessories, page 1-47, check with local utility for approval).

Energy Center



QOWC60M200PFY Energy Center



Energy Center with Cover Removed

LOAD CENTERS
1

| Ampere Rating | Bypass Type | Service (Type of Feed) | | Short Circuit Current Rating | Cat. No. | Service Disconnect(s) | | | Load Center and Branch Circuit Breakers (Order separately [39]) | | | Hub Type [40] (Order separately) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Service Ground Lug AWG/kcmil (Al/Cu) | Bus Ratings | |
|--------------------------------|-------------|------------------------|----------------|------------------------------|---------------|-----------------------|------------------------------|----------------------|---|----------|---------|----------------------------------|---------------------------------------|--------------------------------------|-------------|--------------------|
| | | UL | UL and EU-SERC | | | 2P Circuits (Max.) | Type (Order separately [41]) | Ampere Rating (Max.) | Max. Quantity | | | | | | | Ampere Rating Max. |
| | | | | | | | | | Spaces | Circuits | Tandems | | | | | |
| Square D™ Energy Center | | | | | | | | | | | | | | | | |
| Semi-flush Mount Only | | | | | | | | | | | | | | | | |
| 200 A | — | UG | — | 22 kA | QOWC60M200PFY | — | QOM2 [42] | 200 A | 60 [43] | 61 | 10 | 200 A | A300L | 6–250 | 14–2/0 | 225 A |

Schneider Pulse CSED

Schneider Pulse smart panel intelligently interconnects a home's various energy sources, optimizes energy usage, extends battery run time, and helps minimize the need for a service level upgrade.



- QO™ product range
- Ringed meter socket, no bypass, meets EUSERC
- Specifications
- Service feed: Overhead / Underground (OH / UG)
- Ampere rating: 200 A Maximum
- Busbar rating: 225 A
- Short-circuit current: 22 KA
- Semiflush mounting (surface mounting to be announced)
- Plug-on neutral connections
- Total spaces: 44 (4 used by submains, 2 used by SPD, 2 used by monitor)
- Usable spaces: 36 (18 top interior, 18 bottom interior)
- Battery charging sources: solar, grid
- Submain rating: 125 A (both top and bottom interiors)
- Max solar back-feed: 145 A
- Factory installed power distribution block
- Backup controller (Microgrid Interconnect Device) available as factory or field installed
- Dimensions (W x H x D): 14.3 x 51.9 x 9.7 in.

Table 1.83: Schneider Pulse CSED

| Description | Catalog Number |
|---|----------------|
| Schneider Pulse CSED | CC18X18M200PCY |
| Schneider Pulse CSED with backup controller | CC18X18M200PCZ |
| Circuit breaker hold down kit (optional) | QOCRBGK2EC |

[39] To order branch circuit breakers, see [QO Plug-On Circuit Breakers](#), page 1-3
 [40] To order hubs, see [Accessories and Hubs for CSEDs](#), page 1-47
 [41] To order service disconnects, see [Circuit Breakers for CSEDs](#), page 1-46 except as noted)
 [42] One service disconnect with 2 — 110 A sub-main feeds.
 [43] Nine spaces are used for factory-installed components, leaving 51 available spaces for branch circuits.

Meter Mains and All-in-Ones (300–400 A Devices)

Meter Mains and All-in-Ones

- Ring or ringless type meter socket designs available
- UL Listed, suitable **only** for use as service equipment
- Meets EUSERC standards where indicated.

- Service disconnects are supplied factory-installed, except where noted
- Supplied with 100% branch neutrals; all unused terminals may be used for equipment grounding wires
- Meets Federal Specification W-P-115c as Type 1, Class 2

Meter Mains: Meets Federal Specification W-P-115c as Type 1, Class 2, UL Listed, suitable only for use as service equipment, 120/240 Vac, 1Ø3W, NEMA 3R Enclosure

Table 1.84: Meter Mains

| Ampere Rating | Bypass Type | Service (Type of Feed) | | Short-Circuit Current Rating | Cat. No. | Service Disconnect(s) [44] | | | Load Center and Branch Circuit Breakers (Order separately [45]) | | | | Hub Type (Order separately [46]) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Bus Rating | Service Ground Lug AWG/kcmil (Al/Cu) | Weight Each (Lbs) and Pallet Qty. |
|--|-------------------------|------------------------|----------------|------------------------------|---------------------------------|----------------------------|------------------------------|----------------------|---|----------|--------------------|---------|----------------------------------|---------------------------------------|------------|--------------------------------------|-----------------------------------|
| | | UL | UL and EU-SERC | | | 2P Circuits (Max.) | Type (Order separately [47]) | Ampere Rating (Max.) | Max. Quantity | | Ampere Rating Max. | | | | | | |
| | | | | | | | | | Spaces | Circuits | | Tandems | | | | | |
| Ring Type, QO | | | | | | | | | | | | | | | | | |
| Surface and Semiflush Mount [44] | | | | | | | | | | | | | | | | | |
| 400 A | None | UG | UG | 25 kA | CU12L400CN [48] | 1 | QDL22200 [49] | 200 A | — | — | — | — | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| 400 A | Class 320 Manual Bypass | UG | — | 25 kA | CU12L400CB [48] [50] | 1 | QDL22200 [49] | 200 A | — | — | — | — | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| | | | | | CU12L400FB OBS | 4 | QDL, QGL, QJL [51] | 200 A | — | — | — | — | | | — | | |
| 400 A | Class 320 Manual Bypass | UG | — | 25 kA | CU816D400CN [48] [54] | 1 | QDL22200 [49] | 200 A | 8 | 16 | 8 | 200 A | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| | | | | | CU816D400CB [48] [53] [50] | | QDL, QGL, QJL [51] | | | | | | | | | | |
| 400 A | Class 320 Manual Bypass | UG | — | 65 kA [44] | CUM400CB [48] [50] | 1 | LJL36400U31X [49] | 400 A | — | 2 [55] | — | 200 A | A-L | (2) Studs | — | 4–250 | 115, 4 |
| Ringless Type, QO | | | | | | | | | | | | | | | | | |
| 400 A | Class 320 Lever | UG | — | 25 kA | QU12L400SL [56] [50] | 1 | QDL22200 [49] | 200 A | — | — | — | — | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| | | | | | | 4 | QDL, QGL, QJL [51] | 200 A | — | — | — | — | | | | | |
| 400 A | Class 320 Lever | OH/UG | — | 25 kA | QCD400SL [56] | 1 | QDL, QGL, QJL [51] | 200 A | — | — | — | — | A-L | 4–600 (2) 1/0–350 | — | 12–2/0 | 75, 4 |
| | | | | | | 1 | QDL, QGL, QJL [51] | 200 A | — | — | — | — | | | | | |
| Surface Mount Only, Supplied with Feed-Thru Lugs and Provisions for Branch Circuit Breakers | | | | | | | | | | | | | | | | | |
| 400 A | [57] | UG | — | 25 kA | QU816D400SL [53] [56] [50] | 1 | QDL22200 [49] | 200 A | 8 | 16 | 8 | 200 A | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| | | | | | QU816D400CK OBS [54] [50] | | QDL, QGL, QJL [51] | 200 A | | | | | | | | | |
| 400 A | Class 320 Lever | OH/UG | — | 25 kA | QC816D400SL [53] [54] [56] | 1 | QDL22200 [49] | 200 A | 8 | 16 | 8 | 200 A | A-L | 4–600 (2) 1/0–350 | 200 | 12–2/0 | 77, 4 |
| | | | | | | 1 | QDL, QGL, QJL [51] | 200 A | | | | | | | | | |
| Surface and Semiflush Mount [44] | | | | | | | | | | | | | | | | | |
| 400 A | Class 320 Lever | UG | — | 25 kA | QU12L400CL OBS [56] [58] [50] | 1 | QDL22200 [49] | 200 A | — | — | — | — | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| | | | | | | 4 | QDL, QGL, QJL [51] | 200 A | — | — | — | — | | | | | |
| 400 A | Class 320 Lever | UG | — | 25 kA | QU816D400CL [56] [53] [58] [50] | 1 | QDL22200 [49] | 200 A | 8 | 16 | 8 | 200 A | A-L | (2) Studs | 200 | 4–250 | 98, 4 |
| | | | | | QU816D400FL OBS | 1 | QDL, QGL, QJL [51] | | | | | | | | — | | |
| 400 A | Class 320 Lever | UG | — | 65 kA [44] | QUM400CL [56] [50] | 1 | LJL36400U31X [49] | 400 A | — | 2 [55] | — | 200 A | A-L | (2) Studs | — | 4–250 | 120, 4 |
| 400 A | K-4 Bolt-On None | UG | — | 65kA [44] | QUM400CK OBS | 1 | LJL36400U31X [49] | 400 A | — | 2 [55] | — | 200 A | A-L | (2) Studs | — | 4–250 | 123, 4 |
| Ringless Type, Homeline | | | | | | | | | | | | | | | | | |
| Surface Mount Only, Supplied with Feed-Thru Lugs and Provisions for Branch Circuit Breakers | | | | | | | | | | | | | | | | | |

[44] UL short circuit current rating is equal to the lowest interrupting rating of any circuit breaker installed.

[45] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3

[46] To order hubs, see Accessories and Hubs for CSEDs, page 1-47

[47] To order service disconnects, see Circuit Breakers for CSEDs, page 1-46 except as noted)

[48] For use only on 120/240 Vac 1Ø3W system (4-jaw meter socket).

[49] Service disconnect supplied factory-installed.

[50] Device configuration is not included in EUSERC standards. Consult applicable utility for acceptance.

[51] Additional service disconnect for field-installation: order prefix QBL at 10 kA, QDL at 25 kA, QGL at 65 kA, or QJL at 100 kA. Order separately. For complete circuit breaker catalog number, see Digest Section 7.

[52] Order two pole circuit breakers for field installation: order catalog designation QO for 10 kA, QO-VH for 22 kA or QOH for 42 kA short circuit current rating. See Table 1.1 Plug-On Circuit Breakers, page 1-3 or Table 1.88 Circuit Breakers for use with Meter Mains and All-In-One Devices, page 1-46.

[53] QO panel is rated 200 A maximum.

[54] Supplied with load side feed-thru lugs for 6 AWG–250 kcmil (Al/Cu) conductors.

[55] Option for field installation of two Q-frame, 200 A max. 2-pole branch circuit breakers used as mains for two downstream load centers. Purchase installation kit BMK2Q400 and two Q-frame circuit breakers separately. Order QBL prefix at 10 kA, QDL prefix at 25 kA, or QGL prefix at 65 kA.

[56] Fifth jaw factory-installed.

[57] Device with suffix L has Class 320 lever bypass and device with suffix K has a K-4 bolt-on, no bypass.

[58] Knockout provided in cover for use with barrel lock kit SCBRLOCK (see Table 1.89 Accessories, page 1-47).

Table 1.84 Meter Mains (cont'd.)

| Ampere Rating | Bypass Type | Service (Type of Feed) | | Short-Circuit Current Rating | Cat. No. | Service Disconnect(s) [59] | | | Load Center and Branch Circuit Breakers (Order separately [60]) | | | | Hub Type (Order separately [61]) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Bus Rating | Service Ground Lug AWG/kcmil (Al/Cu) | Weight Each (Lbs) and Pallet Qty. |
|---------------|-----------------|------------------------|----------------|------------------------------|--------------------------|----------------------------|------------------------------|----------------------|---|----------|--------------------|---------|----------------------------------|---------------------------------------|------------|--------------------------------------|-----------------------------------|
| | | UL | UL and EU-SERC | | | 2P Circuits (Max.) | Type (Order separately [62]) | Ampere Rating (Max.) | Max. Quantity | | Ampere Rating Max. | | | | | | |
| | | | | | | | | | Spaces | Circuits | | Tandems | | | | | |
| 400 A | Class 320 Lever | OH/UG | — | 25 kA | RC816D400SL [63] [64] | 1 | QDL22200 [65] | 200 A | 8 | 16 | 8 | 200 A | A-L | 4-600 (2) 1/0-350 | 200 | 12-2/0 | 77, 4 |
| | | | | | | 1 | QDL, QGL, QJL [66] | | | | | | | | | | |

Obs This product is obsolete.

Table 1.85: All-in-One Combination Service Entrance Devices

| Surface and Semiflush Mount[59] | | | | | | | | | | | | | | | | | |
|---------------------------------|------------------|----|----------------|------------------------------|-------------------------------|--------------------|-------------------------------------|----------------------|--------|----------|---------|--------------------|----------------------------------|---------------------------------------|------------|--------------------------------------|-----------------------------------|
| Ring Type, Homeline | | | | | | | | | | | | | | | | | |
| Ampere Rating | Bypass Type | UL | UL and EU-SERC | Short-Circuit Current Rating | Cat. No. | 2P Circuits (Max.) | Type (Order separately [62]) | Ampere Rating (Max.) | Spaces | Circuits | Tandems | Ampere Rating Max. | Hub Type (Order separately [61]) | Line Side Main Lugs AWG/kcmil (Al/Cu) | Bus Rating | Service Ground Lug AWG/kcmil (Al/Cu) | Weight Each (Lbs) and Pallet Qty. |
| 300 A | Class 320 Manual | UG | — | 25 kA | SU3040D300CB [67][68][69] | 1 | QDL22200 [70] QDL, QGL, QJL [71] | 200 A 100 A | 30 | 40 | 10 | 200 A | A-L | (2) Studs | 200 | 4-250 | 100, 4 |
| | | | | | SU3040D300FB [67] [68][69] | 1 | | | | | | | | | | | |
| 400 A | None | UG | UG | 25 kA | SU3040D400CN [67] [68] | 1 | QDL22200 [70] QDL, QGL, QJL [71] | 200 A 200 A | 30 | 40 | 10 | 200 A | A-L | (2) Studs | 200 | 4-250 | 100, 4 |
| | | | | | SU3040D400FN [67] [68] | 1 | | | | | | | | | 200 | | |
| 400 A | Class 320 Manual | UG | — | 25 kA | SU3040D400CB [67] [68][69] | 1 | QDL22200 [70] | 200 A | 30 | 40 | 10 | 200 A | A-L | (2) Studs | 200 | 4-250 | 100, 4 |
| | | | | | SU3040D400FB [67] [68][69] | 1 | QDL, QGL, QJL [71] | | | | | | | | 200 A | | |
| Ringless, Homeline | | | | | | | | | | | | | | | | | |
| 400 A | Class 320 Lever | UG | — | 25 kA | RU3040D400CL [68] [72][69] | 1 | QDL22200 [70] | 200 A | 30 | 40 | 10 | 200 A | A-L | (2) Studs | 200 | 4-250 | 100, 4 |
| | | | | | RU3040D400FL [68] [72][69] | 1 | QDL, QGL, QJL [71] | | | | | | | | 200 A | | |
| 400 A | K-4 Bolt-on | UG | — | 25 kA | RU3040D400CK [68] [68][69] | 1 | QDL22200 [70] QDL, QGL, QJL [71] | 200 A 200 A | 30 | 40 | 10 | 200 A | A-L | (2) Studs | — | 4-250 | 100, 4 |
| | | | | | RU3040D400FK [68] [68][69] | 1 | — | | | | | | | | — | | |

Obs This product is obsolete.

[59] UL short circuit current rating is equal to the lowest interrupting rating of any circuit breaker installed.

[60] To order branch circuit breakers, see QO Plug-On Circuit Breakers, page 1-3

[61] To order hubs, see Accessories and Hubs for CSEDs, page 1-47

[62] To order service disconnects, see Circuit Breakers for CSEDs, page 1-46 except as noted

[63] Supplied with load side feed-thru lugs for 6 AWG–250 kcmil (Al/Cu) conductors.

[64] Fifth jaw factory-installed.

[65] Service disconnect supplied factory-installed.

[66] Additional service disconnect for field-installation: order prefix QBL at 10 kA, QDL at 25 kA, QGL at 65 kA, or QJL at 100 kA. Order separately. For complete circuit breaker catalog number, see Digest Section 7.

[67] For use only on 120/240 Vac 1Ø3W system (4-jaw meter socket).

[68] Knockout provided in cover for use with barrel lock kit SCBRLLOCK (see Accessories).

[69] Device configuration is not included in EUSERC standards. Consult applicable utility for acceptance.

[70] Service disconnect supplied factory-installed.

[71] Additional service disconnect for field-installation: order prefix QBL at 10 kA, QDL at 25 kA, QGL at 65 kA, or QJL at 100 kA. Order separately. For complete circuit breaker catalog number, see Digest Section 7.

[72] 5th jaw factory-installed.


Dimensions for CSEDs

Table 1.86: Knockouts

| Symbol | A | B | C | D | E | F | G | H | I | J |
|--------------------|-----|-----|---|-------|-------|---|-------|---|-------|---|
| Conduit Size (in.) | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 | 3-1/2 | 4 |

▲ Drip hood supplied factory-installed and is required for surface mount installation. For semi-flush installation, remove drip hood and install flange kit SC200F (order separately).
 ■ Unit supplied with blank top endwall (factory-installed) for surface mount installation. For semi-flush installation, install flange kit FK400 (order separately). Kit includes replacement top endwall (with knockouts) and flanges.
 ◆ Unit supplied with semi-flush top endwall factory installed and semi-flush flanges factory included.

LOAD CENTERS

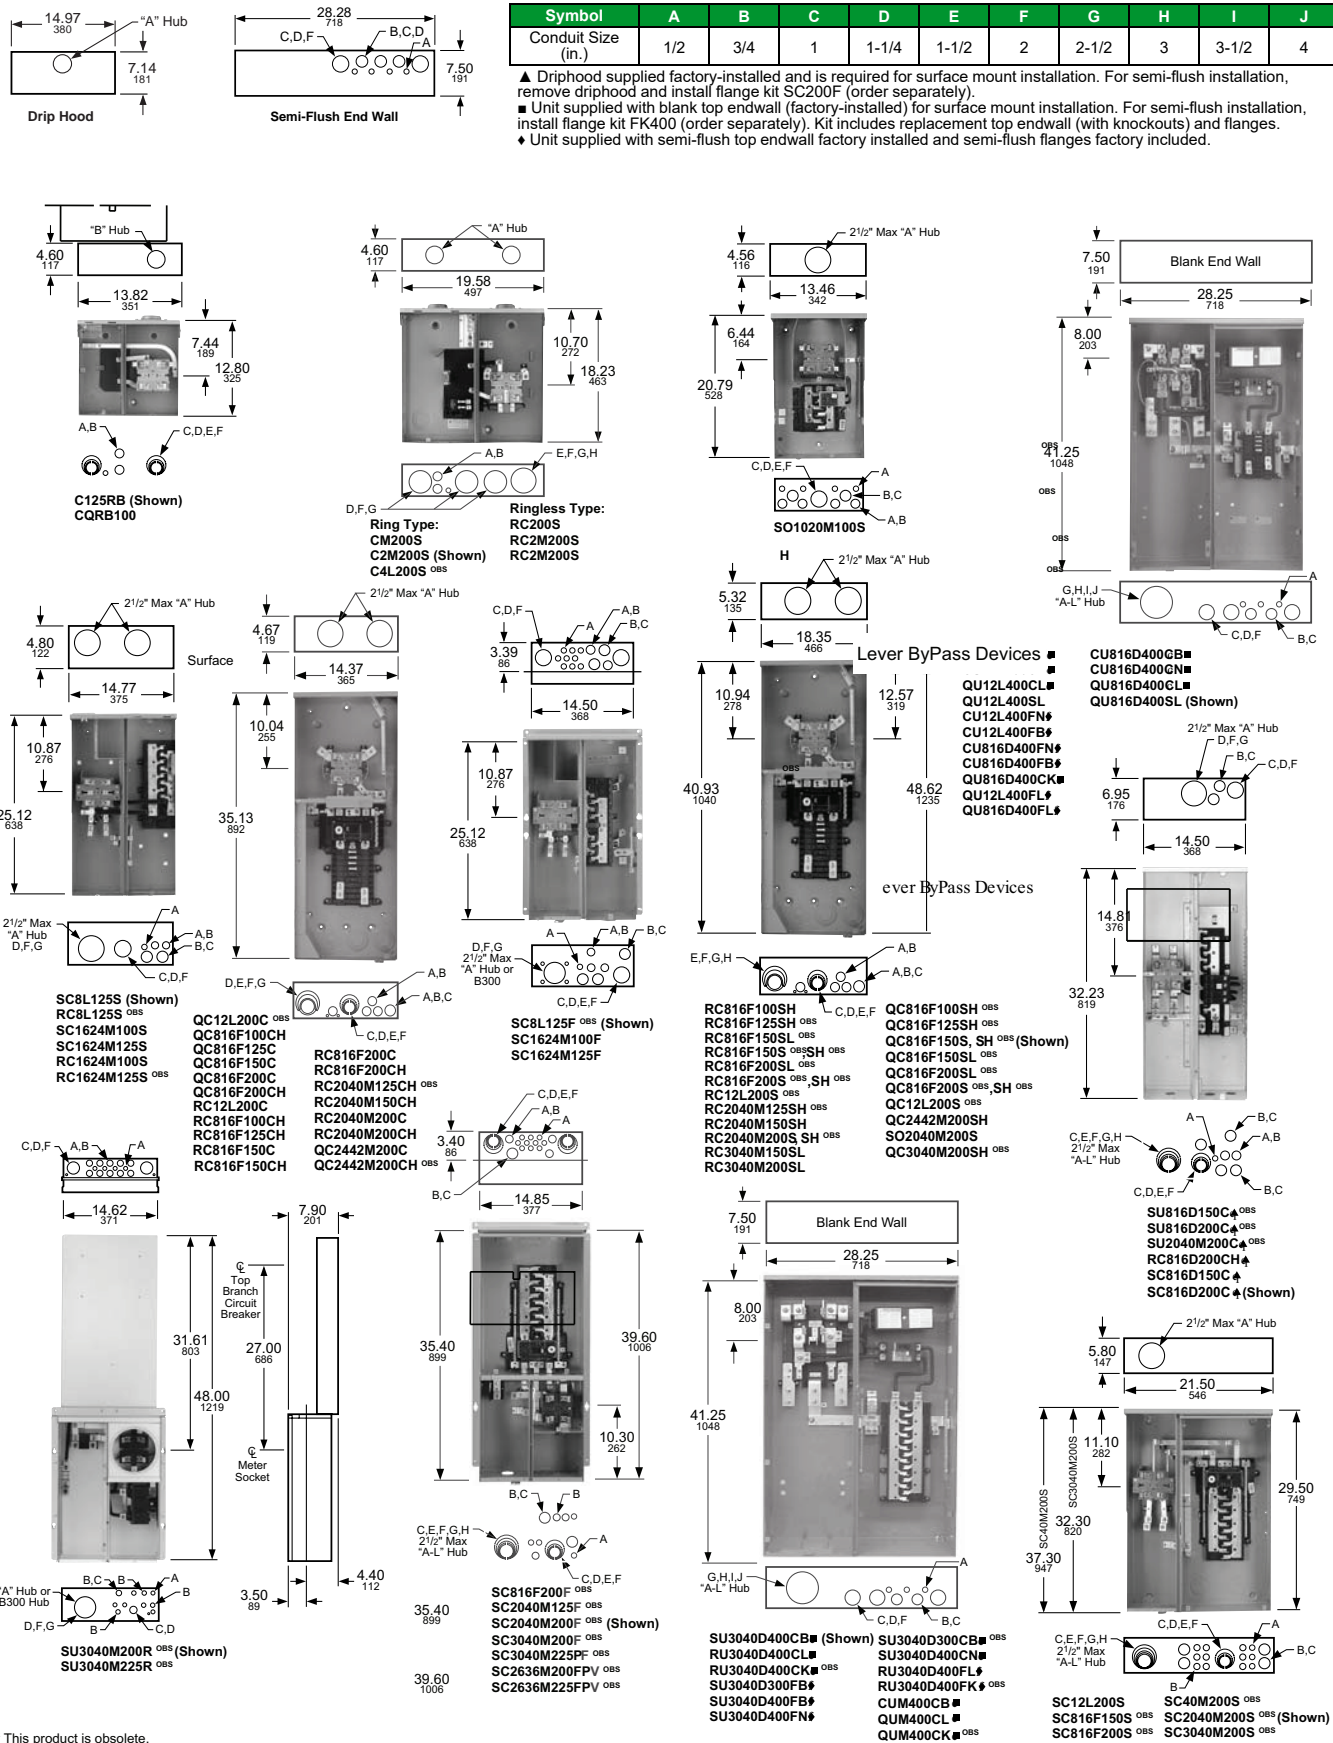

OBS This product is obsolete.

Solar Ready PoN CSEDs





- Ring or ringless type meter socket designs available
- UL Listed, suitable only for use as service equipment
- Service disconnect(s) are supplied factory-installed, except where noted
- Interiors accept plug-on neutral and pigtail style branch circuit breakers
- Supplied with a fully distributed neutral bar, all unused terminals may be used for equipment grounding wires
- Meets Federal Specification W-P-115c as Type 1, Class 2
- Solar ready kits for line side tap available, see accessories table
- All devices have a 3" KO in the bottom endwall
- Provisions for field installed CTs on All devices

| Amperage Rating | Bus Bar Amperage Rating | Bypass type | Service (Type of Feed) | Short Circuit Current Rating | Cat. No. | Service Disconnect(s) | | Load Center and Branch Circuit Breakers (Order separately pages....) | | | | Bus Rating | Hub Type | Line Side Main Lugs | Service Ground Lug |
|----------------------------|-------------------------|-------------|------------------------|------------------------------|-------------------------------|-----------------------|---|--|----------|---------|--------------------|------------|----------|---------------------|------------------------|
| | | | | | | 2P Circuits | Type (Factory installed except where noted) | Spaces | Circuits | Tandems | Ampere Rating Max. | | | | |
| Ring Type, QO | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | |
| 100 A | 225 A | None | UG | 22 kA | CU816F100PS ^{[1][2]} | 1 | QOM2100VH | 8 | 16 | 8 | 70 A | — | A-L | 4-250 | 14-2/0 CU 12-2/0 AL |
| 200 A | | None | UG | 22 kA | CU48F200PS ^{[1][2]} | 1 | QOM2200VH | 4 | 8 | 4 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | CU816F200PS ^{[1][2]} | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| Ring Type, Homeline | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | |
| 100 A | 225 A | None | UG | 22 kA | SU816F100PS ^{[1][2]} | 1 | QOM2100VH | 8 | 16 | 8 | 70 A | — | A-L | 4-250 | 14-2/0 CU 12-2/0 AL |
| 200 A | | None | UG | 22 kA | SU48F200PS ^{[1][2]} | 1 | QOM2200VH | 4 | 8 | 4 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | SU816F200PS ^{[1][2]} | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| 150 A | | None | OH/UG | 22 kA | SC816F150PS ^{[1][2]} | 1 | QOM2150VH | 8 | 16 | 8 | 150 A | 225 | | | 8-2/0 |
| 200 A | | None | OH/UG | 22 kA | SC816F200PS ^{[1][2]} | 1 | QOM2200VH | 8 | 16 | 8 | 200 A | 225 | | | |
| 200 A | | None | OH/UG | 22 kA | SC2040M200PS ^[2] | 1 | QOM2200VH | 20 | 40 | 20 | 200 A | 225 | | | |
| 200 A | | None | OH/UG | 22 kA | SC3042M200PS ^[2] | 1 | QOM2200VH | 30 | 42 | 12 | 200 A | 225 | | | |
| 200 A | | None | OH/UG | 22 kA | SC42M200PS ^[2] | 1 | QOM2200VH | 42 | 42 | 0 | 200 A | 225 | | | |
| 200 A | | None | OH/UG | 22 kA | SC816F200PF ^{[1][2]} | 1 | QOM2200VH | 8 | 16 | 8 | 200 A | 225 | | | |
| 125 A | 225 A | None | OH ^[3] /UG | 22 kA | SC2040M125PF ^[2] | 1 | QOM2125VH | 20 | 40 | 20 | 110 A | 225 | A-L | 4-250 | 8-2/0 |
| 200 A | | None | OH ^[3] /UG | 22 kA | SC2040M200PF ^[2] | 1 | QOM2200VH | 20 | 40 | 20 | 200 A | 225 | | | |
| 200 A | | None | OH ^[4] /UG | 22 kA | SC3042M200PF ^[2] | 1 | QOM2200VH | 30 | 42 | 12 | 200 A | 225 | | | |
| 225 A | | None | OH ^[4] /UG | 22 kA | SC3042M225PF ^[2] | 1 | QOM2225VH | 30 | 42 | 12 | 200 A | 225 | | | |
| Ringless, QO | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | |
| 100 A | 225 A | None | UG | 22 kA | QU48F100PS ^[1] | 1 | QOM2100VH | 4 | 8 | 4 | 70 A | — | A-L | 4-250 | 14-2/0 CU 12-2/0 AL |
| 100 A | | Lever | UG | 22 kA | QU48F100PSL ^[1] | 1 | QOM2100VH | 4 | 8 | 4 | 70 A | — | | | |
| 125 A | | None | UG | 22 kA | QU48F125PS ^[1] | 1 | QOM2125VH | 4 | 8 | 4 | 70 A | — | | | |
| 150 A | | None | UG | 22 kA | QU48F150PS ^[1] | 1 | QOM2150VH | 4 | 8 | 4 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | QU48F200PS ^[1] | 1 | QOM2200VH | 4 | 8 | 4 | 110 A | — | | | |
| 150 A | | None | UG | 22 kA | QU816F150PS ^[1] | 1 | QOM2150VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | QU816F200PS ^[1] | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | Lever | UG | 22 kA | QU816F200PSL ^[1] | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | QU816M200PS | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| Ringless, Homeline | | | | | | | | | | | | | | | |
| Surface Mount Only | | | | | | | | | | | | | | | |
| 100 A | 225 A | None | UG | 22 kA | RU48F100PS ^[1] | 1 | QOM2100VH | 4 | 8 | 4 | 70 A | — | A-L | 4-250 | 14-2/0 CU 12-2/0 AL |
| 100 A | | Lever | UG | 22 kA | RU48F100PSL ^[1] | 1 | QOM2100VH | 4 | 8 | 4 | 70 A | — | | | |
| 125 A | | None | UG | 22 kA | RU48F125PS ^[1] | 1 | QOM2125VH | 4 | 8 | 4 | 70 A | — | | | |
| 150 A | | None | UG | 22 kA | RU48F150PS ^[1] | 1 | QOM2150VH | 4 | 8 | 4 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | RU48F200PS ^[1] | 1 | QOM2200VH | 4 | 8 | 4 | 110 A | — | | | |
| 150 A | | None | UG | 22 kA | RU816F150PS ^[1] | 1 | QOM2150VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | RU816F200PS ^[1] | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | Horn | UG | 22 kA | RU816F200PSH ^[1] | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | Lever | UG | 22 kA | RU816F200PSL ^[1] | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |
| 200 A | | None | UG | 22 kA | RU816M200PS | 1 | QOM2200VH | 8 | 16 | 8 | 110 A | — | | | |

Table 1.87: Knockouts

| Symbol | A | B | C | D | E | F | G | H | I | J |
|--------------------|-----|-----|---|-------|-------|---|-------|---|-------|---|
| Conduit Size (in.) | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 | 3-1/2 | 4 |

[1] Supplied with load side feed-thru lugs, for 4AWG-250 kcmil Al/Cu conductors.
 [2] Meets EUSERC requirements.
 [3] Suitable for OH service with addition of tunnel kit (SCTKP20). Check with local utility for approval and order separately.
 [4] Suitable for OH service with addition of tunnel kit (SCTKP30). Check with local utility for approval and order separately.

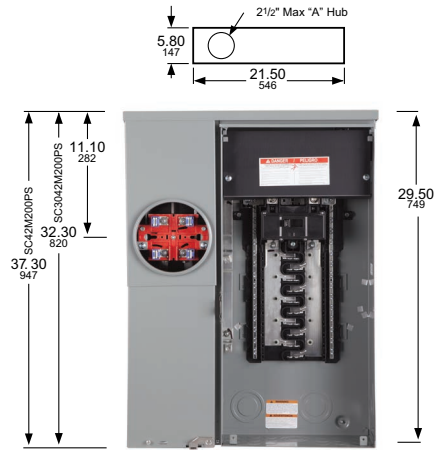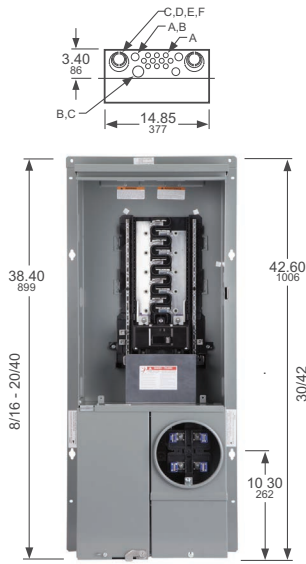

NOTE: See each catalog number's associated technical drawing online for additional dimensions and enclosure details.

Circuit Breakers for CSEDs

Table 1.88: Circuit Breakers for use with Meter Mains and All-In-One Devices

| Ampere Rating [1] | Type: HOM, 1P | Type: HOM, 2P | Type: QO, 1P | Type: QO, 2P | Type: QO-VH, 1P | Type: QO-VH, 2P |
|-------------------|-----------------|-----------------|----------------------|-----------------|------------------------|-------------------------|
| | Cat. No. (DE3D) | Cat. No. (DE3D) | Cat. No. (DE2A) | Cat. No. (DE2A) | Cat. No. (DE2A) | Cat. No. (DE2A) |
| 10 | — | — | QO110 | — | — | — |
| 15 | HOM115 | — | QO115 | — | QO115VH | — |
| 20 | HOM120 | — | QO120 | — | QO120VH | — |
| 25 | HOM125 | — | QO125 | — | QO125VH ^{OBS} | — |
| 30 | HOM130 | HOM230 | QO130 | QO230 | QO130VH | QO230VH |
| 35 | — | HOM235 | QO135 | QO235 | — | — |
| 40 | HOM140 | HOM240 | QO140 | QO240 | — | QO240VH |
| 45 | — | HOM245 | QO145 ^{OBS} | QO245 | — | — |
| 50 | HOM150 | HOM250 | QO150 | QO250 | — | QO250VH |
| 60 | — | HOM260 | QO160 | QO260 | — | QO260VH |
| 70 | — | HOM270 | QO170 | QO270 | — | QO270VH |
| 80 | — | HOM280 | — | QO280 | — | QO280VH |
| 90 | — | HOM290 | — | QO290 | — | QO290VH |
| 100 | — | HOM2100 | — | QO2100 | — | QO2100VH |
| 110 | — | HOM2110 | — | QO2110 | — | QO2110VH |
| 125 | — | HOM2125 | — | QO2125 | — | QO2125VH |
| 150 | — | HOM2150BB | — | QO2150 | — | QO2150VH |
| 175 | — | HOM2175BB | — | QO2175 | — | QO2175VH ^{OBS} |
| 200 | — | HOM2200BB | — | QO2200 | — | QO2200VH |

^{OBS} This product is obsolete.

| Ampere Rating [1] | Type: QOM1-VH, 2P | Type: QOM2-VH, 2P | Type: QDL, 2P [2] |
|-------------------|-------------------|-------------------|-------------------|
| | Cat. No. (DE3D) | Cat. No. (DE3D) | Cat. No. (DE2A) |
| 50 | QOM50VH [3] | — | — |
| 60 | QOM60VH | — | — |
| 70 | QOM70VH | — | QDL22070 |
| 80 | QOM80VH | — | QDL22080 |
| 90 | QOM90VH | — | QDL22090 |
| 100 | QOM100VH | QOM2100VH | QDL22100 |
| 110 | QOM110VH | — | QDL22110 |
| 125 | QOM125VH | QOM2125VH | QDL22125 |
| 150 | — | QOM2150VH | QDL22150 |
| 175 | — | QOM2175VH | QDL22175 |
| 200 | — | QOM2200VH | QDL22200 |
| 225 | — | QOM2225VH | — |

[1] Do not exceed mains rating of device

[2] For additional interrupting rating circuit breakers, order circuit breaker prefix QBL at 10 kA, QGL at 65 kA or QJL at 100 kA.

[3] Reference National Electrical Code Article 230-79.

Accessories and Hubs for CSEDs

Table 1.89: Accessories

| Description | Cat. No. |
|---|----------------------------------|
| Generator Kit: Interlocks main service disconnect and generator circuit breaker (order separately). For : Homeline™ CSED Devices RC816F-, RC2040M-, SO2040M- containing suffix -C or -CH QO CSED Devices QC816F-, QC2442M- containing suffix -C or -CH | RCGK2 QCGK3 |
| Backfed inverter circuit breaker retaining kit for SC2636M225FPV | PK2SCPV ^{OBS} |
| Fifth Jaw Kit for: Meter Main Types: C, RC, SC, QC All-In-One Types: SC, SU (100–225 A), QC, RC, SO | 5J |
| Bypass (Horn Type) for Ringless Type Meter Mains and All-In-Ones (100–200 A) (except for RC8L125S, RC1624M100S and RC1624M125S—use RCHB). | MMHB |
| Lexan Meter Socket Cover Plate for: Ring and Ringless Type Meter Mains Ring and Ringless Type All-In-Ones | 29007 |
| Meter Socket Sealing Rings for Ring Type Meter Mains and All-In-Ones: Snap Type Aluminum (Std.) Screw Type Aluminum Snap Type Stainless Steel | 2920910001 29008W ARP00026 |
| Anti-Inversion Kit . For use ONLY on 400 A Meter Mains and All-In-Ones with lever bypass. | MMLRK |
| Trim Kit for 2 in. X 6 in. stud wall, used with Reverse All-In-Ones, SU3040M200R, and SU3040M225R | SU2X6TRIM |
| Barrel Lock Kit (Barrel Lock not included), supplied with bracket and mounting screw, refer to listings for where used. | SCBRLLOCK ^{OBS} |
| Semiflush Flange Kit for: Meter Mains: SC816D150/200C and RC816D200CH All-In-Ones: SC2040M200C | SC200F |
| Semiflush Flange Kit for ring- and ringless-type Meter Mains and All-In-Ones (400 A Only) | FK400 |
| Lug Kit includes (4) lugs, for use with 2 AWG–600 kcmil Al/Cu conductors. Lugs are for standard 2-Hole mounting. Meter Main and All-In-One units supplied with (2) studs per phase and neutral will accept one lug per phase and neutral. Not for use on 400 A devices with "K" suffix. | C MELK4 |
| Branch Circuit Breaker Field Installation Kit for two Q-Frame Circuit Breakers (QBL, QDL, or QGL, order separately). For CUM400CB, QUM400CL or QUM400CK - includes (2) mounting pans, (4) wires. | BMK2Q400 |
| Overhead Feed Trough for 400 A ring- and ringless-type Meter Mains and All-In-Ones. | O CK400 |
| Touch-Up Paint (ASA49 Gray) | PK49SP |
| Ground Bar Kit, Meter Mains and All-In-Ones QC, RC, and SC (100–225 A) | PK15GTA |
| Filler Plate for: Meter Main Types: QC, CU All-In-One Types: QC | QOFP |
| Filler Plate for: Meter Main Types: RC, SC All-In-One Types: SC, RC, SU | HOMFP |
| Neutral Lug (6-2/0 AWG) for: Meter Main Types: RC, SC, QC All-In-One Types: SC, SU, QC, RC | LK100AN |
| Overhead Barrier Tunnel Kit for Ringless & Horn Bypass in RC/QC Devices | OHBS ^{OBS} |
| Overhead Barrier Tunnel Kit for Lever Bypass RC/QC Devices | OHBL |
| Solar Ready Kit for Type SC Semiflush Mounted Solar Ready Devices (includes lugs and replacement UL67 barrier) | SR69064AF |
| Solar Ready Kit for Type SC Surface Mounted Solar Ready Devices (includes lugs and replacement UL67 barrier) | SR69064AS |
| Energy Center Manual Transfer Kit | QO2DTEC |
| Energy Center Hold-Down Bracket Kit | QOCRBGK2EC |
| Solar Ready Kit for UG 200 A Max Meter Mains | SRKUGMM |
| Generator Kit for RU/SU/QU/CU- 200 A Max Meter Mains | SRUGK |

^{OBS} This product is obsolete.

Table 1.90: Hubs and Closing Plates

| Hub Series | Conduit Size (inches) | Cat. No. | Disc. Sch. |
|---|-----------------------|-----------|------------|
| Closing Plate for "A" Hub opening | | | |
| A | 1.00 | A100 | DE4 |
| | 1.25 | A125 | DE4 |
| | 1.50 | A150 | DE4 |
| | 2.00 | A200 | DE4 |
| | 2.50 | A250 | DE4 |
| Adapter plate to allow use of "A" Hubs on "A-L" size hub openings | | AAP | DE4 |
| Closing Plate for "A-L" Hub opening | | | |
| A-L | 2.00 | A200L [1] | DE4 |
| | 2.50 | A250L | DE4 |
| | 3.00 | A300L | DE4 |
| | 3.50 | A350L | DE4 |
| | 4.00 | A400L | DE4 |
| Closing Plate for "B" Hub opening | | | |
| B | 0.75 | B075 | DE1A |
| | 1.00 | B100 | DE1A |
| | 1.25 | B125 | DE1A |
| | 1.50 | B150 | DE1A |
| | 2.00 | B200 | DE1A |
| | 2.50 | B250 | DE1A |
| B300 | 3.00 | B300 | DE1A |

[1] Supplied with AAP adapter plate and "A" hub.

New!

Schneider Energy Monitor

The Schneider Energy Monitor (formerly Wiser Energy) helps manage electricity usage, from the circuit to the plug level with an easy-to-use app. This gives meaningful insight to take control of energy usage and reduce electric bills.

- Monitor what is powered on in the home
- Reduce electric bills with 24/7 real time tracking of home energy usage.
- Easy installation to home electrical panel.
- Circuit-level control using Control Relays for backup power and advanced load management.
- * Integrate the Schneider Inverter, Boost battery, and Connected Devices with the Schneider Home app.

More information can be found at:

<https://www.se.com/us/en/home/offers/connected-home/>

Table 1.91: Schneider Energy Monitor (formerly Wiser Energy)

| Description | Contents | CT Rating | Catalog Number |
|---|--|-----------|----------------|
| Schneider Energy Monitor (formerly Wiser Energy) is intended for installation in new or existing 120 V split-phase residential panels; cETLus listed | | | |
| Schneider Energy Monitor | Monitoring hub, Main CTS | 200 A | WISEREMZ |
| Schneider Energy Monitor Solar version | Monitoring hub, Main CTS, Solar CTS | | WISEREMPVZ |
| * Schneider Energy Monitor Solar version with PoE | Monitoring hub, Main CTS, Solar CTS, PoE | | SEMONITOR |
| Schneider Energy Monitor Solar add-on CT Kit | Solar CTS (hub purchased separately) | | WISERCTPV |
| Schneider Energy Monitor CT extension cable - 4 ft. | Solar CTS (hub purchased separately) | N/A | WISEREMCTEXT4 |
| Schneider Energy Monitor CT extension cable - 12 ft. | | | WISEREMCTEXT12 |
| Schneider Energy Monitor CT extension cable - 25 ft. | | | WISEREMCTEXT25 |
| Schneider Energy Monitor CT extension cable - 40 ft. | | | WISEREMCTEXT40 |

New!

Schneider Boost and Inverter

Schneider Boost and Inverter provide an easier solution for the increasingly complex needs of solar and battery installations. With fewer steps of power conversion, Boost battery can charge more efficiently from solar for maximum electricity bill savings. When installed with Schneider Pulse, Boost and Inverter provide backup power to protect the home from outages.



| Description | Catalog Number |
|--|----------------|
| Inverter, 7.7 kW for Residential Solar and Battery | HY8K1NA1 |
| Home Battery, Boost, 10 kWh, LFP | BAT10K1 |
| Backup Controller, Pulse, 120/240 Vac, 200 A, MID, 12 space QO breaker panel | BC200A1NAWM |
| Battery accessories for 2-stack installation | BA10KNA2S |
| Battery accessories for 3-stack installation | BA10KNA3S |

Visit [Schneider Home Solar and Energy Storage](https://www.se.com/us/en/home/solar-and-energy-storage/) on www.se.com/us.

New!

Square D™ Control Relays

Management and control at the circuit level.

Pair the Schneider Energy Monitor with Square D Control Relays to turn any of our QO™ load panels into a smart, connected panel, providing enhanced home automation and control over individual circuits.

- Smart: Schedule, monitor, and manage energy usage on each circuit
- Flexible: Modular and scalable load control can be added at any time to any circuit
- Easy to Maintain: Easily replace the impacted relay with minimal rewiring.



Table 1.92: Square D Control Relays

| Description | Catalog Number | Spaces | Circuits | Voltage | Works With | Cert. | Requires | W x H x D (mm) | W x H x D in. | A (Max) |
|---|----------------|--------|----------|-----------|-----------------|-------|------------------------|----------------|---------------|---------|
| Square D Control Relay 120 V Dual Relay | QO200PWX120 | 2 | 2 | 120/60 Hz | Wiser Home App* | cULus | WISEREMPVZ WISEREMZ | 127 x 36 x 66 | 5 x 1.4 x 2.6 | 20 |
| | QO200PWX240 | | | | | | | | | 30 |
| Square D Control Relay 240 V | QO260PWX240 | 4 | 1 | 240/60 Hz | Wiser Home App* | cULus | WISEREMPVZ WISEREMZ | 127 x 73 x 66 | 5 x 2.8 x 2.6 | 60 |
| | QO260PWX240 | | | | | | | | | 60 |

* WISEREMZ and WISEREMPVZ compatible with the Wiser Energy app until Fall 2024.



Dimmers, Switches, and Outlets

Management and control at the device level.

Square D X Series Wiring Devices

X Series connected products include outlets (receptacles).

With Matter compliance and intelligent connectivity, the new X Series connected wiring devices can be controlled through any major smart home platform such as Amazon, Alexa, Google Home, and Apple HomeKit.


This next chapter of X Series wiring devices offers the same stylish design and color selection as our non-connected X Series devices.

View the X Series products at <https://www.se.com/us/en/product-range/26420638> or scan the QR code.



Table 1.93: Square D X Series Wiring Devices

| Description | Catalog Number | Gang | Tech | Amp. Rating (A) | Voltage Rating (Vac) | No. of Poles | Device Type | Nominal Load 1 (W) | Load Type 1 | Nominal Load 2 (W) | Load Type 2 |
|--|----------------|------|---------------|-----------------|----------------------|--------------|-------------|--------------------|-----------------------|--------------------|--------------|
| Switch, X Series, single pole, 3 way, WiFi, Matter, white, matte finish, neutral required | SQR141U1WHWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | - | - |
| Switch, X Series, single pole, 3 way, WiFi, Matter, black, matte finish, neutral required | SQR141U1BKWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | - | - |
| Switch, X Series, single pole, 3 way, WiFi, Matter, light almond, matte finish, neutral required | SQR141U1LAWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | - | - |
| Switch, X Series, single pole, 3 way, WiFi, Matter, grey, matte finish, neutral required | SQR141U1GYWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | - | - |
| Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, white, matte finish, neutral required | SQR226U1WHWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | 150 | Dimmable LED |
| Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, black, matte finish, neutral required | SQR226U1BKWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | 150 | Dimmable LED |
| Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, light almond, matte finish, neutral required | SQR226U1LAWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | 150 | Dimmable LED |
| Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, Grey, matte finish, neutral required | SQR226U1GYWM | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | 150 | Dimmable LED |
| Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, white, matte finish, neutral required | SQR441U1WHWM | 1 | 2.4 GHz Wi-Fi | 15 | 125 | 2 | Duplex | - | - | - | - |
| Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, black, matte finish, neutral required | SQR441U1BKWM | 1 | 2.4 GHz Wi-Fi | 15 | 125 | 2 | Duplex | - | - | - | - |
| Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, light almond, matte finish, neutral required | SQR441U1LAWM | 1 | 2.4 GHz Wi-Fi | 15 | 125 | 2 | Duplex | - | - | - | - |
| Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, Grey, matte finish, neutral required | SQR441U1GYWM | 1 | 2.4 GHz Wi-Fi | 15 | 125 | 2 | Duplex | - | - | - | - |
| Dimmer, X Series, rocker, 600W, single pole, 3 way, WiFi, Matter, white, matte finish, wall plate, neutral required | SQR226U1WHWMP | 1 | 2.4 GHz Wi-Fi | 15 | 125 | 1 | Multi-way | 600 | Halogen, Incandescent | 150 | Dimmable LED |
| Socket-outlet, X Series, 15A, decorator, tamper resistant, WiFi, Matter, white, matte finish, wall plate, neutral required | SQR441U1WHWMP | 1 | 2.4 GHz Wi-Fi | 15 | 125 | 2 | Duplex | - | - | - | - |
| Switch, X Series, single pole, 3 way, WiFi, Matter, white, matte finish, wall plate, neutral required | SQR141U1WHWMP | 1 | 2.4 GHz Wi-Fi | 15 | 120 | 1 | Multi-way | 600 | Halogen, Incandescent | - | - |

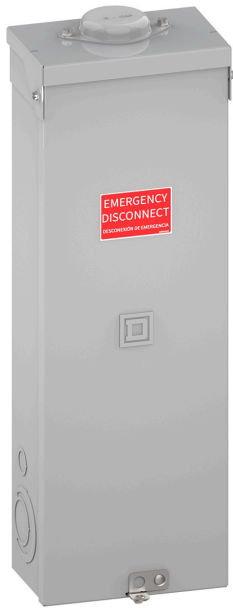

Enclosure



PowerPact Q-Frame
Molded Case Circuit Breaker

Service Entrance Devices

Table 1.94: Residential Enclosed Circuit Breakers with PowerPact Q Frame MCBs

| Enclosure | Mains Rating | Short Circuit Rating | Commercial Reference | Included in Package |
|-------------------|--------------|----------------------|----------------------|--|
| Rainproof NEMA 3R | 150 A | 25 kA | Q2150MRBE | Factory Installed: (1) QDL22150, (1) service entrance barrier, (1) emergency disconnect label & (1) service disconnect label |
| Rainproof NEMA 3R | 200 A | 25 kA | Q2200MRBE | Factory Installed: (1) QDL22200, (1) service entrance barrier, (1) emergency disconnect label & (1) service disconnect label |
| Rainproof NEMA 3R | 70-200 A | 10-100 kA | Q2200RBE [1] | Factory Installed: (1) emergency disconnect label & (1) service disconnect label Factory Included: (1) service entrance barrier[2] |

Table 1.95: Replacement Kit for Residential Enclosed Circuit Breakers with PowerPact Q Frame

| Mains Rating | Short Circuit Rating | Commercial Reference | Included in Package |
|--------------|----------------------|----------------------|--|
| 70 -200 A | 10-100 kA | PKSB1Q2 | (1) Service entrance barrier & (1) emergency disconnect label.[3] |

Table 1.96: PowerPact Q-Frame Molded Case Circuit Breakers for Residential Enclosed Circuit Breakers

| Service | Type 3R — Rainproof Circuit Breaker not included | Ampere rating | Short Circuit Rating | | | |
|-----------------------|--|---------------|----------------------|----------|----------|-----------|
| | | | 10 k AIR | 25 k AIR | 65 k AIR | 100 k AIR |
| 2P 240 Vac Maximum | Q2200RBE | 70 A | QBL22070 | QDL22070 | QGL22070 | QJL22070 |
| | | 80 A | QBL22080 | QDL22080 | QGL22080 | QJL22080 |
| | | 90 A | QBL22090 | QDL22090 | QGL22090 | QJL22090 |
| | | 100 A | QBL22100 | QDL22100 | QGL22100 | QJL22100 |
| | | 110 A | QBL22110 | QDL22110 | QGL22110 | QJL22110 |
| | | 125 A | QBL22125 | QDL22125 | QGL22125 | QJL22125 |
| | | 150 A | QBL22150 | QDL22150 | QGL22150 | QJL22150 |
| | | 175 A | QBL22175 | QDL22175 | QGL22175 | QJL22175 |
| | | 200 A | QBL22200 | QDL22200 | QGL22200 | QJL22200 |

[1] Suitable ONLY for breakers from 70A-200A. Not compatible with 225A breakers.

[2] Suitable only for 2P Q Frame MCBs only.

[3] Suitable ONLY for breakers from 70A-200A. Not compatible with 225A breakers

Non-Service Entrance Enclosed Devices
1Ø3W—120/240 Vac—240 Vac—UL Listed

Table 1.97: Enclosed Molded Case Switch, Switch Included, Does NOT provide overcurrent protection

| Service | Ampere Rating | General Purpose | Rainproof | Box No. [4] |
|-------------|---------------|-----------------|-----------|-------------|
| 240 Vac | 60 A[5][6] | QO260NATS | QO200TR | 2, 9R[7] |
| | | | QO200TRNM | 1NM |
| | | | QO260NATR | 1R |
| 120/240 Vac | 100 A[8] | QO2000NS | QO2000NRB | 13, 10R |



QO200TRNM



QO3100BNF
With Cover Removed

Table 1.98: Enclosed GFCI Circuit Breakers, GFCI Circuit Breaker Included—10 kA Short Circuit Current Rating

| Service | Ampere Rating | Type 3R—Rainproof Circuit Breaker Included | Circuit Breaker Only | Box No. [4] |
|-------------|---------------|--|----------------------|-------------------------------------|
| 120/240 Vac | 50 A | QOE250GFINM | QO250GFI | 1NM (Non-metallic) 1R (Metallic) |
| | | HOME250SPA | HOM250GFI | |
| | | QOE260GFINM | QO260GFI3W | |
| | 60 A | | | |

Table 1.99: 2-Pole Circuit Breaker Enclosures—22 kA Short Circuit Current Rating

| Service [9] | Ampere Rating | General Purpose [10] | Rainproof | Box No. [4] |
|---|----------------|--|------------|-------------|
| 120/240 Vac | 100 A 125 A | QO2100BNF/S QO2125BNF ^{OBS} QO2125BNS | QO2100BNRB | 13, 10R |
| | | | QO2125BNRB | 18, 13R |
| 240 Vac | 100 A | QO3100BNF/S | QO3100BNRB | 13, 10R |
| 60A Max. Circuit Breaker Enclosures—10 kA Short Circuit Current Rating Circuit breaker not included. Order separately from QO Plug-On Circuit Breakers, page 1-3. Will not accept QO-GFI circuit breaker nor QO circuit breakers with factory-installed accessories. | | | | |
| 240 Vac | 60 A[5] | — | QO2TR | 9R[7] |

^{OBS} This product is obsolete.

Table 1.100: Q Frame Enclosures and Q Frame Circuit Breakers

| Service | Enclosure Only [11] | | | Circuit Breaker (Order Separately) | | | | |
|---------------------------|-----------------------------------|-----------------------------------|--------------------|------------------------------------|----------|----------|----------|---------------|
| | Type 1—General Purpose [10] | Type 3R—Rainproof | Box No. [4] | Ampere Rating | 10 k AIR | 25 k AIR | 65 k AIR | 100 k AIR |
| 2P 240 Vac Maximum | Q22200NS [12] or Q23225NF/S | Q22200NRB [12] or Q23225NRB | 19, 11R 20, 12R | 70 A | QBL22070 | QDL22070 | QGL22070 | QJL22070 |
| | | | | 80 A | QBL22080 | QDL22080 | QGL22080 | QJL22080 |
| | | | | 90 A | QBL22090 | QDL22090 | QGL22090 | QJL22090 |
| | | | | 100 A | QBL22100 | QDL22100 | QGL22100 | QJL22100 |
| | | | | 110 A | QBL22110 | QDL22110 | QGL22110 | QJL22110 |
| | | | | 125 A | QBL22125 | QDL22125 | QGL22125 | QJL22125 |
| | | | | 150 A | QBL22150 | QDL22150 | QGL22150 | QJL22150 |
| | | | | 175 A | QBL22175 | QDL22175 | QGL22175 | QJL22175 |
| | | | | 200 A | QBL22200 | QDL22200 | QGL22200 | QJL22200 |
| | | | | 225 A | QBL22225 | QDL22225 | QGL22225 | QJL22225 |
| 3P 240 Vac | Q23225NF/S | Q23225NRB | 20, 12R | 70 A | QBL32070 | QDL32070 | QGL32070 | QJL32070 [13] |
| | | | | 80 A | QBL32080 | QDL32080 | QGL32080 | QJL32080 [13] |
| | | | | 90 A | QBL32090 | QDL32090 | QGL32090 | QJL32090 [13] |
| | | | | 100 A | QBL32100 | QDL32100 | QGL32100 | QJL32100 [13] |
| | | | | 110 A | QBL32110 | QDL32110 | QGL32110 | QJL32110 [13] |
| | | | | 125 A | QBL32125 | QDL32125 | QGL32125 | QJL32125 [13] |
| | | | | 150 A | QBL32150 | QDL32150 | QGL32150 | QJL32150 [13] |
| | | | | 175 A | QBL32175 | QDL32175 | QGL32175 | QJL32175 [13] |
| | | | | 200 A | QBL32200 | QDL32200 | QGL32200 | QJL32200 [13] |
| | | | | 225 A | QBL32225 | QDL32225 | QGL32225 | QJL32225 [13] |

[4] See Table 1.73 Knockout Information, page 1-34

[5] Not suitable for service equipment.

[6] Maximum 10 hp 240 Vac.

[7] Top endwall has no hub opening.

[8] Maximum 20 hp 240 Vac.

[9] Not for use with one pole QO circuit breakers. Circuit breakers not included. Order QO type circuit breakers separately from pages 1-2 and 1-3. Accepts QO circuit breakers with factory-installed accessories. Order equipment ground bar PKOGTA2, if required.


[10] Order F for flush, S for surface.

[11] Factory-installed groundable neutral assembly includes (2) ground lugs and (2) neutral lugs. Equipment ground kit PKOGTA2 also included.

[12] Accepts 200 A max. 2P Q Frame circuit breakers.

[13] Equipment ground bar kit PKOGTA2 factory-included.

Table 1.101: QOM2 Enclosures and QOM2 Circuit Breakers

| Service | Enclosure Only [14] | | | QOM2 Circuit Breaker (Order Separately) [15] | |
|--|-----------------------------|-------------------|--------------|--|---------------|
| | Type 1 General Purpose [16] | Type 3R Rainproof | Box No. [17] | Ampere Rating | 22 k AIR |
| | Cat. No. | Cat. No. | | | Cat. No. [18] |
|  2P 240 Vac Maximum | QOM22225NF/S | QOM22225NRB | 22, 16R | 100 A | QOM2100VH |
| | | | | 125 A | QOM2125VH |
| | | | | 150 A | QOM2150VH |
| | | | | 175 A | QOM2175VH |
| | | | | 200 A | QOM2200VH |
| | | | | 225 A | QOM2225VH |



QOM22225NS
With Cover Removed



Q22200NS
With Cover Removed



Q23225NF

(Order Q-Frame circuit breaker separately)

[14] Equipment ground bar kit PKOGTA2 factory-included.

[15] Add suffix 1021 for 120, 208 or 240 Vac shunt trip.

[16] Order F for flush, S for surface.

[17] See Table 1.73 Knockout Information, page 1-34

[18] DE3A Discount Schedule.