


WIRE BENDING SPACE DIMENSION X IS  
 2.50 FOR 30A & 60A DEVICES (#2 WIRE),  
 AND 5.12 FOR 100A DEVICES (#0 WIRE).  
 REFER TO NEC 430-10.

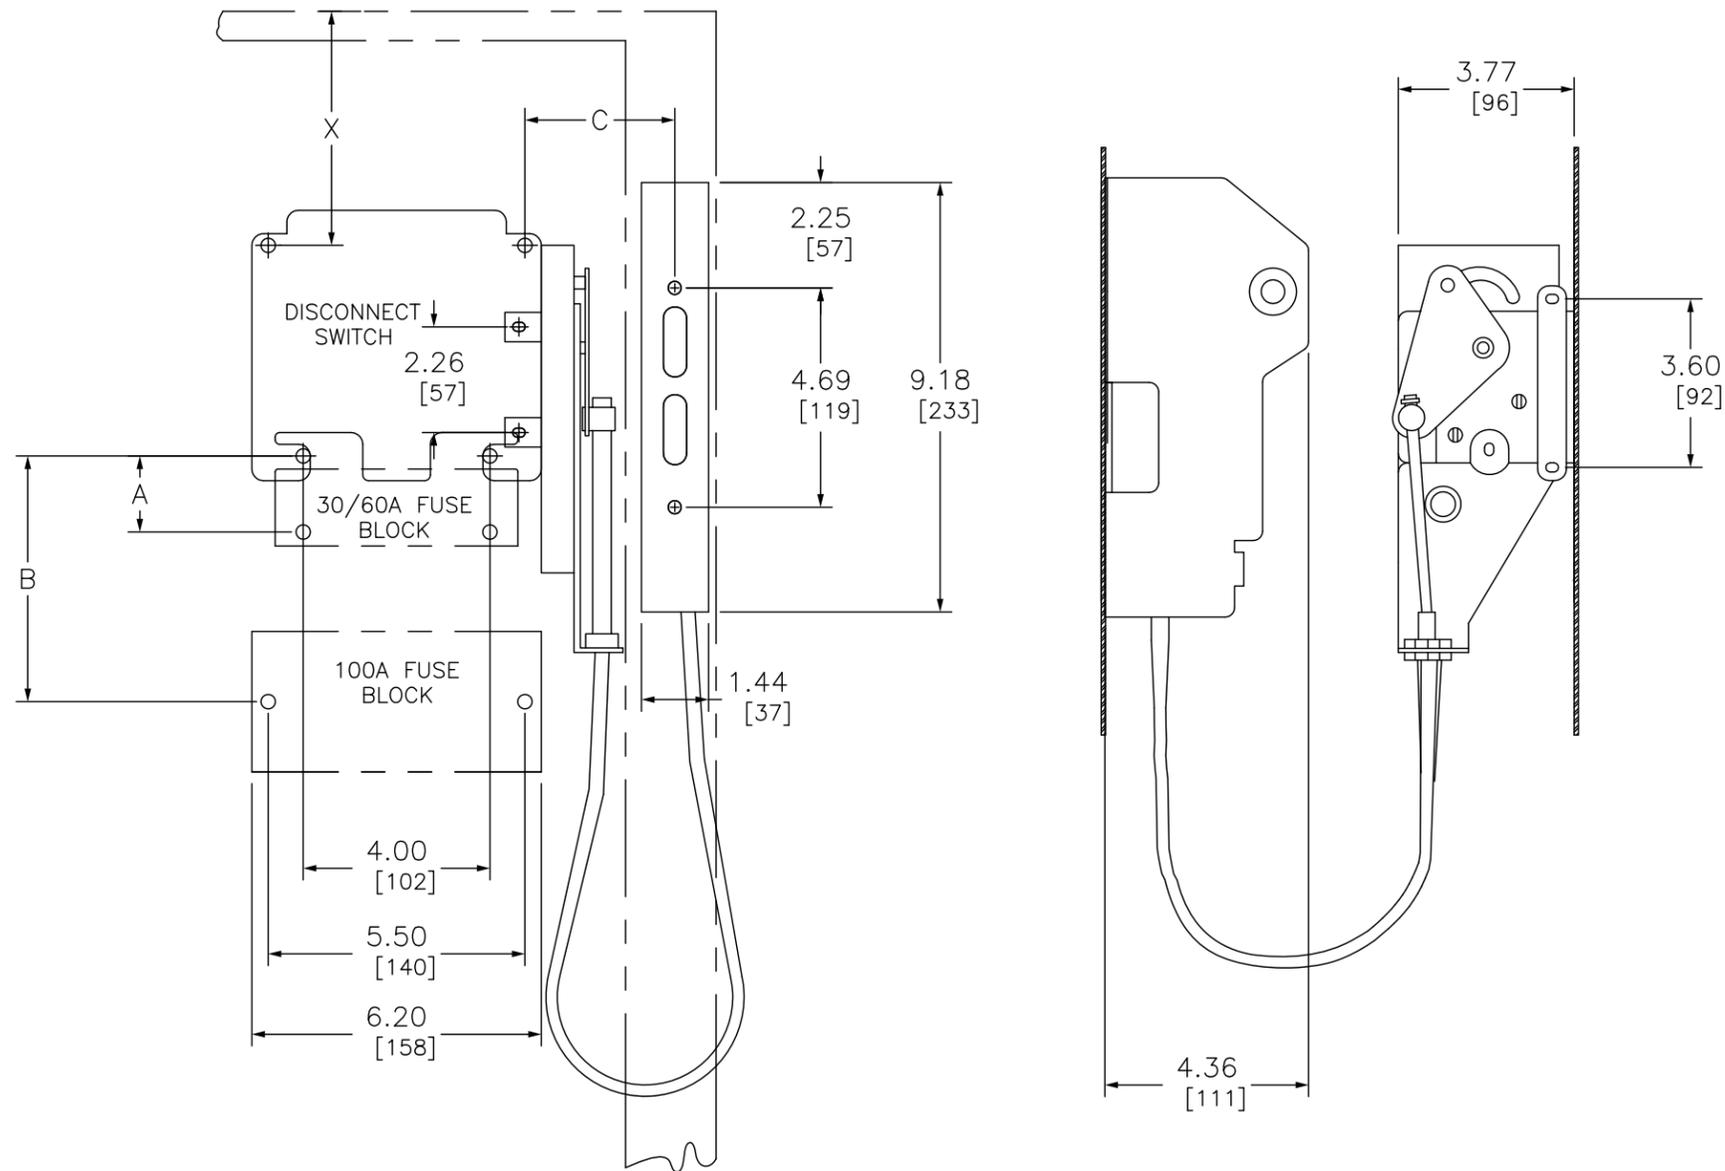

COMPATIBLE SWITCH AND FUSE TYPES

SWITCH TYPE	MAXIMUM VOLTAGE	FUSE TYPE CLASS	CLASS R FUSE KIT	DIMENSION	
				A	B
TCN30	—	UNFUSED	—	—	—
TCF30	30A, 250V	H, K, R	RFK03	1.625 [41]	—
TCF33	30A, 600V	H, K, R	RFK06	4.25 [108]	—
	30A, 600V	J	—	1.625 [41]	—
TDF60	60A, 250V	H, K, R	RFK06	2.25 [57]	—
	—	UNFUSED	—	—	—
TDF60	60A, 250V	H, K, R	RFK06	2.25 [57]	—
	30A, 600V	J	—	1.625 [41]	—
TDF63	30A, 600V	H, K, R	RFK06	4.25 [108]	—
	60A, 600V	H, K, R	RFK06H	4.75 [121]	—
TEF10	60A, 600V	J	—	1.625 [41]	—
	—	UNFUSED	—	—	—
TEN10	—	UNFUSED	—	—	—
TDF60	100A, 250V	H, K, R	RFK10	—	3.25 [83]
	100A, 600V	H, K, R	RFK10	—	5.25 [133]
	100A, 600V	J	—	—	3.25 [83]

TYPE	CABLE LENGTH	MAXIMUM BOX DEPTH	MAXIMUM DISTANCE FROM TOP RIGHT MOUNTING HOLE TO UPPER MOUNTING HOLE FOR HANDLE OPERATOR (DIM C)	
			MINIMUM C	MAXIMUM C
CFT30	36"	24"	1"	4"
CFT50	60"	36"	16"	24"
CFT10	120"	36"	4 FEET	5 FEET

NOTE: BEND RADIUS IN CABLE MUST NEVER BE LESS THAN 6 INCHES. ELECTRICAL CLEARANCES MUST BE MAINTAINED BETWEEN CABLE AND LIVE ELECTRICAL PARTS.

Catalog Number: 9422-CFT30, CFT50, CFT10  
 Ratings: —  
 UL File/Guide: E52369/WHTY2  
 CSA File/Guide: LR44199/321107  
 Meets Standards: —  
 Weight: 6.8 lbs  
 Wire Size: —  
 Terminal torque: —  
 Mounting Hwd.: (4) #10 screws

DUAL DIMENSIONS: INCHES  
 MILLIMETERS

DISCONNECT SWITCH CABLE MECHANISM NEMA



DWG# 9422CFT30  
 NO.