

Galaxy VL

UPS

Receiving and Unpacking

Latest updates are available on the Schneider Electric website

6/2023



Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.



Find the manuals here:
Trouvez les manuels ici:
在这里找到手册
Hier finden Sie die Handbücher:
Encuentre los manuales aquí:
Encontre os manuais aqui:

IEC



UL



IEC: https://www.productinfo.schneider-electric.com/galaxyvl_iec/
UL: https://www.productinfo.schneider-electric.com/galaxyvl_ul/

Table of Contents

Important Safety Instructions — SAVE THESE

INSTRUCTIONS5

 Safety Precautions6

 Storage Conditions7

 UPS Shipping Weights and Dimensions7

Receiving8

Remove the UPS from the Pallet.....9

Important Safety Instructions — SAVE THESE INSTRUCTIONS

Read these instructions carefully and look at the equipment to become familiar with it before trying to install, operate, service or maintain it. The following safety messages may appear throughout this manual or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.



The addition of this symbol to a “Danger” or “Warning” safety message indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages with this symbol to avoid possible injury or death.

DANGER

DANGER indicates a hazardous situation which, if not avoided, **will result in death or serious injury**.

Failure to follow these instructions will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, **could result in death or serious injury**.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, **could result in minor or moderate injury**.

Failure to follow these instructions can result in injury or equipment damage.

NOTICE

NOTICE is used to address practices not related to physical injury. The safety alert symbol shall not be used with this type of safety message.

Failure to follow these instructions can result in equipment damage.

Please Note

Electrical equipment should only be installed, operated, serviced, and maintained by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction, installation, and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

Per IEC 62040-1: "Uninterruptible power systems (UPS) -- Part 1: Safety Requirements," this equipment, including battery access, must be inspected, installed and maintained by a skilled person.

The skilled person is a person with relevant education and experience to enable him or her to perceive risks and to avoid hazards which the equipment can create (reference IEC 62040, section 3.102).

Safety Precautions

⚠ WARNING

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Do not unpack the units before the time of installation.
- Cover the units and store the units in a temperature controlled indoor environment free of conductive contaminants and humidity, where the units are protected from moisture until the time of start-up. Moisture inside the cabinet can create hazardous short circuits.

Failure to follow these instructions can result in death, serious injury, or equipment damage.




NOTICE

RISK OF EQUIPMENT DAMAGE

- Wait until the system is ready to be powered up before installing batteries in the system. The time duration from battery installation until the UPS system is powered up must not exceed 72 hours or 3 days.
- Batteries must not be stored more than six months due to the requirement of recharging. If the UPS system remains de-energized for a long period, Schneider Electric recommends that you energize the UPS system for a period of 24 hours at least once every month. This charges the batteries, thus avoiding irreversible damage.

Failure to follow these instructions can result in equipment damage.

Storage Conditions

		
Storage temperature: -25 °C to 55 °C (-13 °F to 131 °F)	Relative humidity: 10-80% non-condensing	Altitude: 0-10000 m (0-32000 ft)

UPS Shipping Weights and Dimensions

Commercial reference	Weight kg (lbs)	Height mm (in)	Width mm (in)	Depth mm (in)	Number of preinstalled power modules in the UPS	Number of power modules shipped separately ¹	Number of extra power modules that can be ordered ²
GVL0K500DS	468 (1032)	2145 (84.4)	950 (37.4)	1100 (43.3)	0	0	10
GVL200K500DS	620 (1367)	2145 (84.4)	950 (37.4)	1100 (43.3)	4	0	6
GVL300K500DS	620 (1367)	2145 (84.4)	950 (37.4)	1100 (43.3)	4	2	4
GVL400K500DS	620 (1367)	2145 (84.4)	950 (37.4)	1100 (43.3)	4	4	2
GVL500KDS	620 (1367)	2145 (84.4)	950 (37.4)	1100 (43.3)	4	6	0

Power Module Shipping Weights and Dimensions

Commercial reference	Weight kg (lbs)	Height mm (in)	Width mm (in)	Depth mm (in)
GVPM50KD	62 (137)	330 (13)	580 (22.8)	780 (30.7)

1. See Power Module Shipping Weights and Dimensions, page 7 for shipping weight and dimensions for the separately shipped power module.
2. See Power Module Shipping Weights and Dimensions, page 7 for shipping weight and dimensions for the extra power modules which are shipped separately.

Receiving

External Inspection


When the shipment arrives, inspect the shipping materials for any signs of damage or mishandling. Check tilt and impact indicators. Do not attempt to install the system if any damage is apparent. If any damage is noted, contact Schneider Electric customer support and file a damage claim with the shipping agency within 24 hours of receipt.

Compare the components of the shipment with the bill of lading. Report any missing items to the carrier and to Schneider Electric customer support immediately.

Verify that labelled units match the order confirmation.


Remove the UPS from the Pallet

1. Move the UPS cabinet as close as possible to the final location with a pallet truck or a forklift before unpacking.
2. Remove the packaging (cardboard, plastic, and foam corners).
3. Remove the ramp.

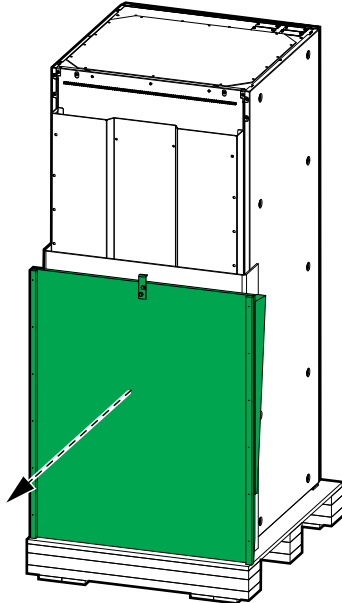


4. Open the front door.
5. Remove the front transportation bracket.

NOTE: Save the front transportation bracket for later use, refer to the UPS installation manual for details.

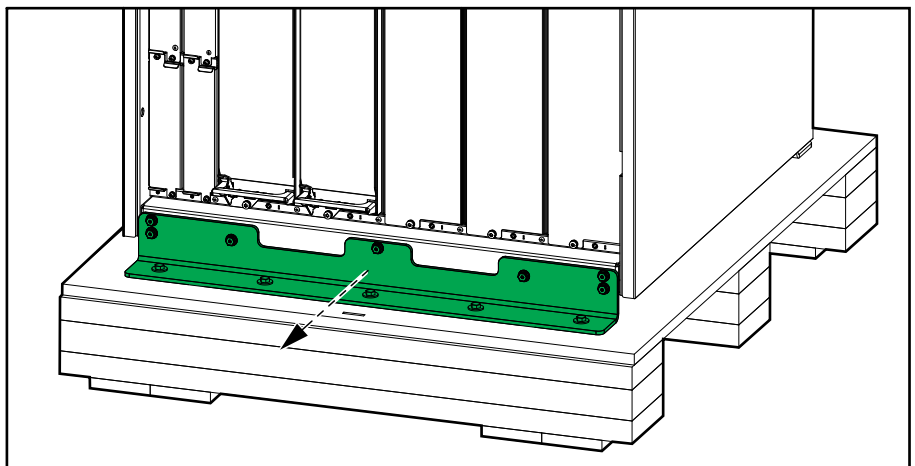

6. Close and lock the front door.

7. Attach the ramp to the pallet and remove the rear transportation bracket.

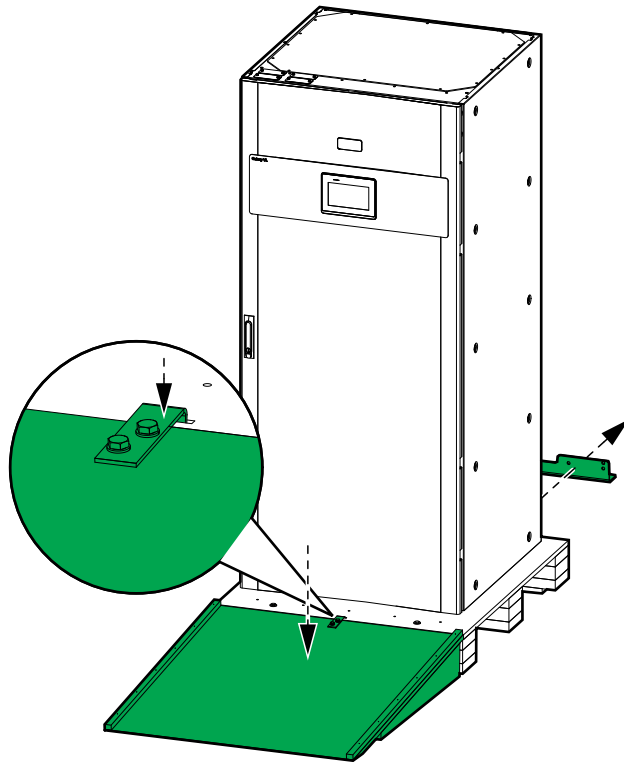


8. Roll the UPS carefully down the ramp.

⚠ CAUTION

HAZARD OF PERSONAL INJURY

- Make a clear path in front of the ramp.
- Do not stand in front of the ramp while rolling the UPS down the ramp.

Failure to follow these instructions can result in injury or equipment damage.

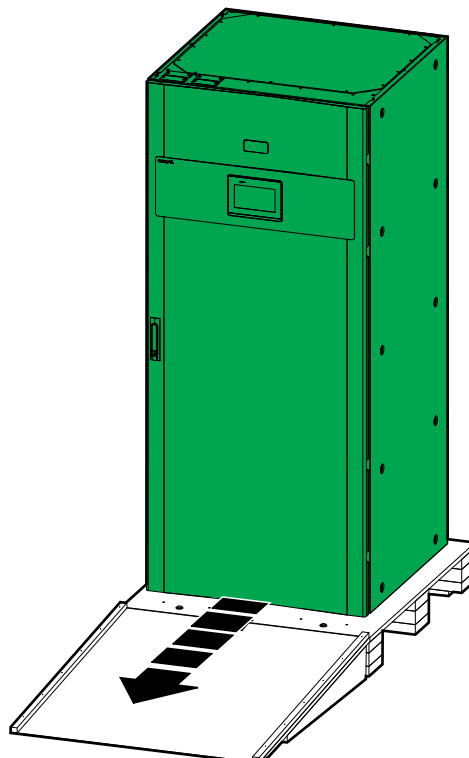

9. Roll the UPS to the final location.

⚠ WARNING
TIPPING HAZARD <ul style="list-style-type: none">• Only roll the UPS over even floors.• Move at a slow pace and pay close attention on the floor conditions and the balance of the UPS. Failure to follow these instructions can result in death, serious injury, or equipment damage.

10. Cover the UPS with the packaging bags until time of installation. Store manuals and documentation in the documentation compartment in the UPS door.

Schneider Electric
35 rue Joseph Monier
92500 Rueil Malmaison
France

+ 33 (0) 1 41 29 70 00



As standards, specifications, and design change from time to time,
please ask for confirmation of the information given in this publication.

© 2023 – 2023 Schneider Electric. All rights reserved.

990-71222-001