


SOURCE #1	
UTILITY	208V-3PH-4WZ-3W44-C
MINIMUM CIRCUIT CAPACITY	440 AMPS
NOMINAL VOLTAGE DROP	2 %
KVA AT POINT OF CONSUMER ENTRANCE	35 KVA



THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:	MODULAR DATACENTER INFRASTRUCTURE 120KW ISO NAM SCHNEIDER ELECTRIC IT MODULE SYSTEM ONE LINE DIAGRAM
DWG NO.:	PFM1CN120C1N14D
REV:	01
PROJECT:	120KW ISO NAM
SHEET:	1 OF 1
DRAWN:	M. UHRMAN
ENGINEER:	M. UHRMAN
DATE:	18 AUG 15
DATE:	18 AUG 15
DATE:	21 AUG 15
DATE:	N.A.

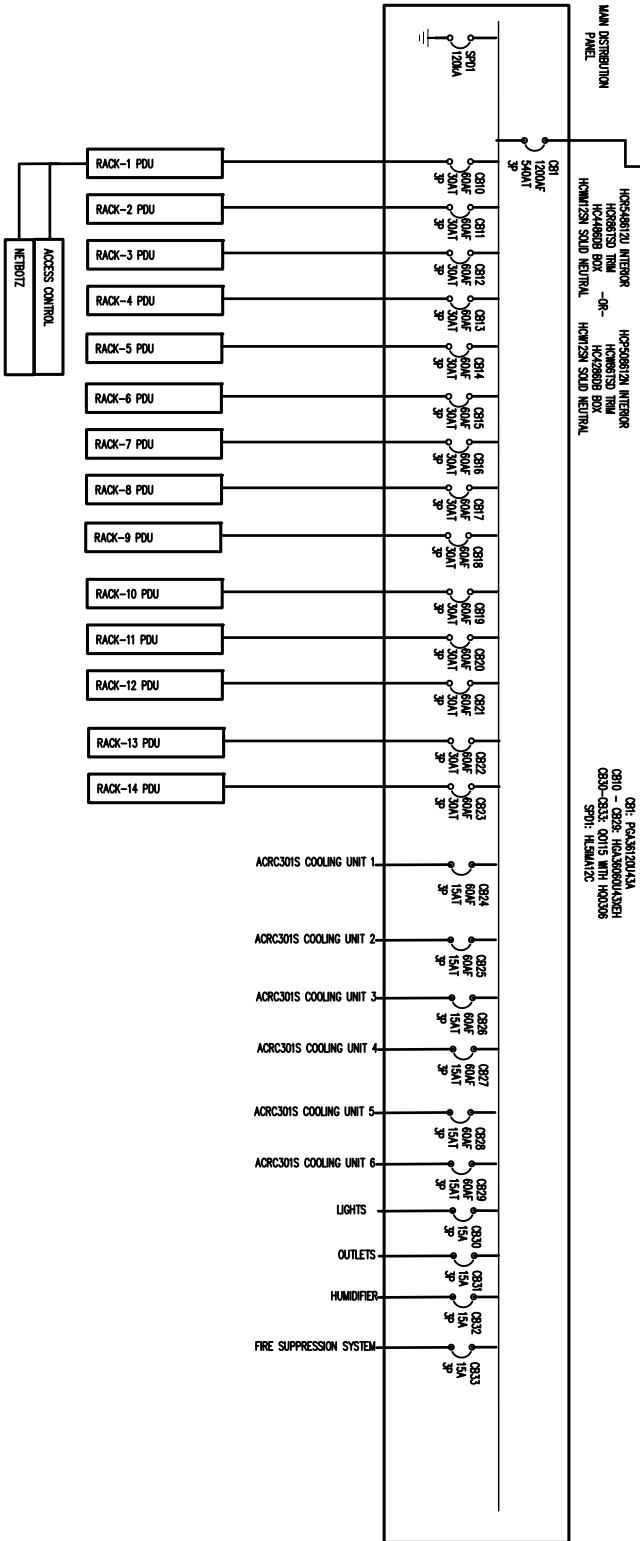