

Product End-of-Life Instructions


Lexium 62 – Range: 6A to 45A

Product Range

Lexium 62 – Range: 6A to 45A

Marketing Model

LXM62DD●●●●●● / LXM62DU●●●●●●

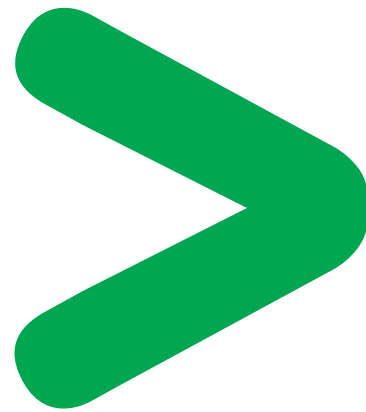

Size in mm:

H x L x D : 310 x 44.5 x 270

Weight (excluding packaging) in kg:

3.060



Schneider
Electric


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ Separation for special treatment ⇒ Other Dismantling ⇒ Shredding

CAUTION: The product contains capacitors which may cause an electrical shock. Before operating, remove all power and wait 15 minutes so as to discharge these capacitors.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

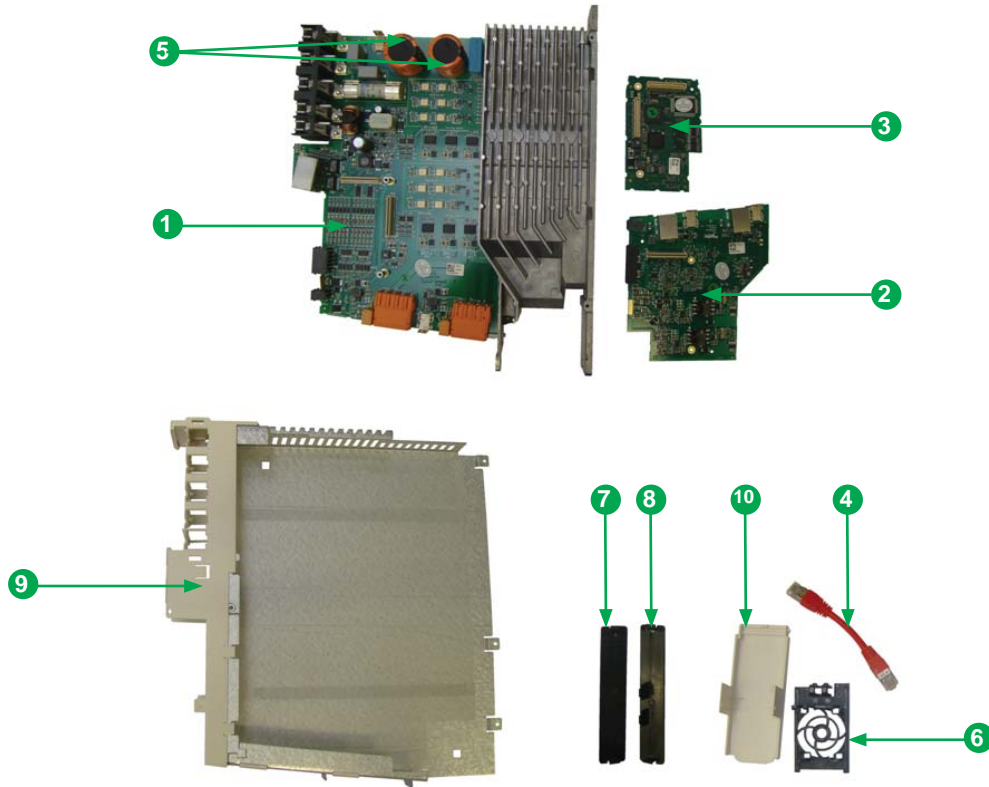

Recommendation	Number on drawing	Components	Weight (g)	Comment
Depollution	1	Printed Circuit Board Assembly (PCBA)	1663.20	–
	2	Printed Circuit Board Assembly (PCBA)	87.80	–
	3	Printed Circuit Board Assembly (PCBA)	36.55	–
	4	Sercos III Patch Cable	11.94	–
	5	Electrolytic Capacitors	69.94	–
Dismantling	6	Fan Cover	8.39	–
	7	Shock Protector left	9.32	–
	8	Shock Protector right	9.78	–
	9	Front Panel	51.48	–
	10	Front Flap	14.45	–

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V1.

Publication : Schneider Electric