

Product End-of-Life Instructions


ALTIVAR PROCESS

Product Range

Altivar process – Ranges: 90 to 800 kW - 400 V - 3 PH – IP21/IP23/IP54

Marketing Model

Altivar 650 – 315 kW / 400 V / 3-ph rating / IP54 (ref. ATV650C31N4F)

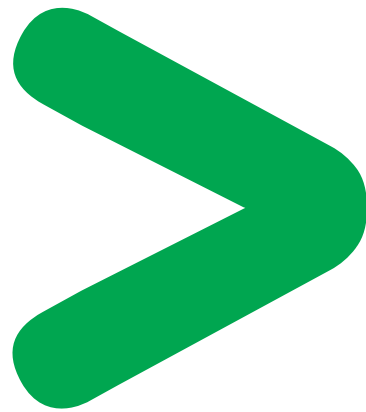

Size in mm:

W x H x D : 600 x 2350 x 664

Weight in g:

269000 to 1295000 for the product range.

539924 for ATV650C31N4F including packaging and batteries (weight of the battery is 3g)



Recommendation	Number on drawing	Components	Weight (g)	Comment
Operating hazards	1	Electrolytic capacitors	9808	–
Special treatment	2	Printed Circuit Board Assembly (PCBA) or power components	6969	26 PCBAs are included
	3	Manganese Dioxide Lithium Coin Battery	3	The battery is located inside the Keypad
Other dismantling	4	Plastic part	2249	–
	5	Aluminium	75867	–
	6	Steel	332242	–
	7	Copper	20493	–

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V5.
Publication : Schneider Electric