

# Product Environmental Profile

**TeSys B Contactor 3 poles 200A 220V 50HZ**



**Schneider**  
Electric




**General information**

<b>Representative product</b>	TeSys B Contactor 3 poles 200A 220V 50HZ -CV1BG3G0ZM521J
<b>Description of the product</b>	To make and break currents up to 2000 A for motor loads and up to 200A for resistive loads at voltages up to 690 V AC for 20 years.
<b>Functional unit</b>	To switch on and off during 20 years electrical power supply of a downstream installation with an electrical and/or mechanical control. The functional unit is characterized by a type 1F+2O, a control circuit voltage 220V, a power circuit voltage 690V and a maximum allowed intensity by the power circuit 2000A.

## Constituent materials

**Reference product mass** 8920 g including the product, its packaging and additional elements and accessories

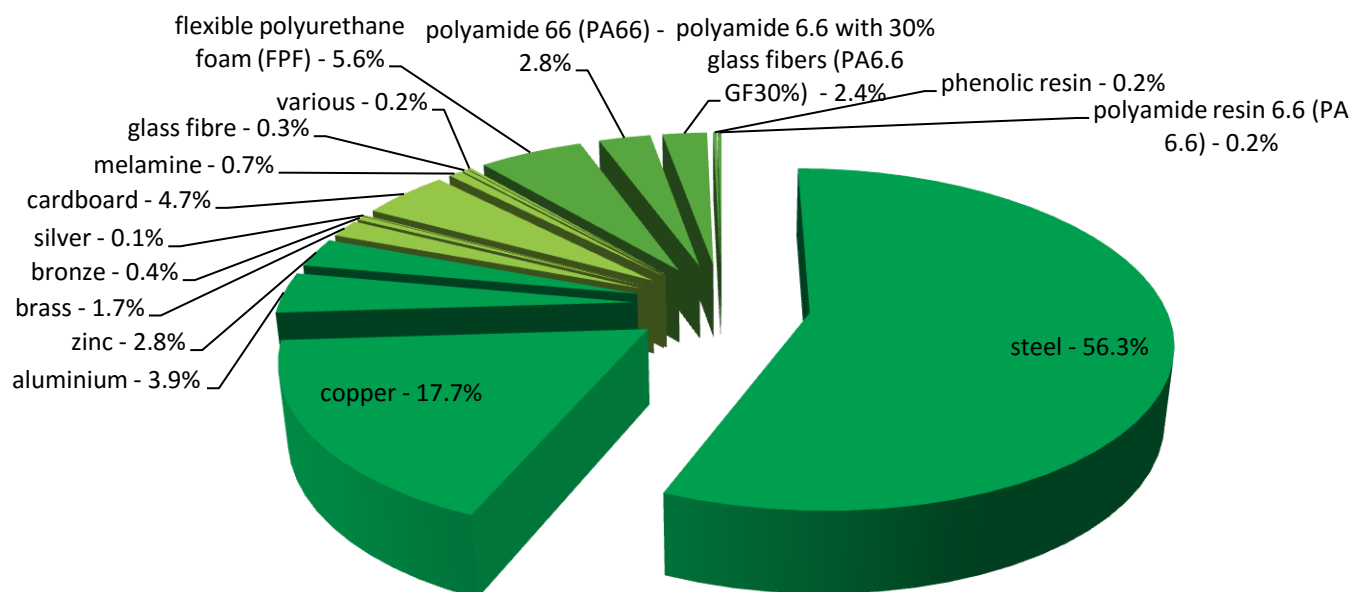

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information

The TeSys B Contactor 3 poles 200A 220V 50HZ presents the following relevant environmental aspects


**Design**

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 920.4 g, consisting of cardboard (420g), foam (500g) and paper (0.4g) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Ref CV1BG3G0ZM521J does not require any installation operations
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains plastic parts with brominated FR (49.5g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>85%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Passive products - non-continuous operation			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	Product dissipation is 102.5 W full load, loading rate is 50% and service uptime percentage is 50%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	To make and break currents up to 2000 A for motor loads and up to 200A for resistive loads at voltages up to 690 V AC for 20 years.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		TeSys B Contactor 3 poles 200A 220V 50HZ - CV1BG3G0ZM521J					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.10E-02	2.08E-02	0*	0*	2.42E-04	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	4.02E+01	1.34E-01	5.25E-03	0*	4.01E+01	0*
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1.53E+00	2.19E-02	1.21E-03	0*	1.50E+00	5.54E-04
Contribution to global warming	kg CO <sub>2</sub> eq	5.35E+03	4.67E+01	1.15E+00	0*	5.30E+03	7.85E-01
Contribution to ozone layer depletion	kg CFC11 eq	1.29E-03	6.13E-06	0*	0*	1.29E-03	0*
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.91E+00	1.17E-02	3.75E-04	0*	1.89E+00	2.50E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	1.47E+01	8.75E-01	0*	0*	1.38E+01	0*
Total Primary Energy	MJ	1.08E+05	1.00E+03	1.63E+01	0*	1.07E+05	1.29E+01

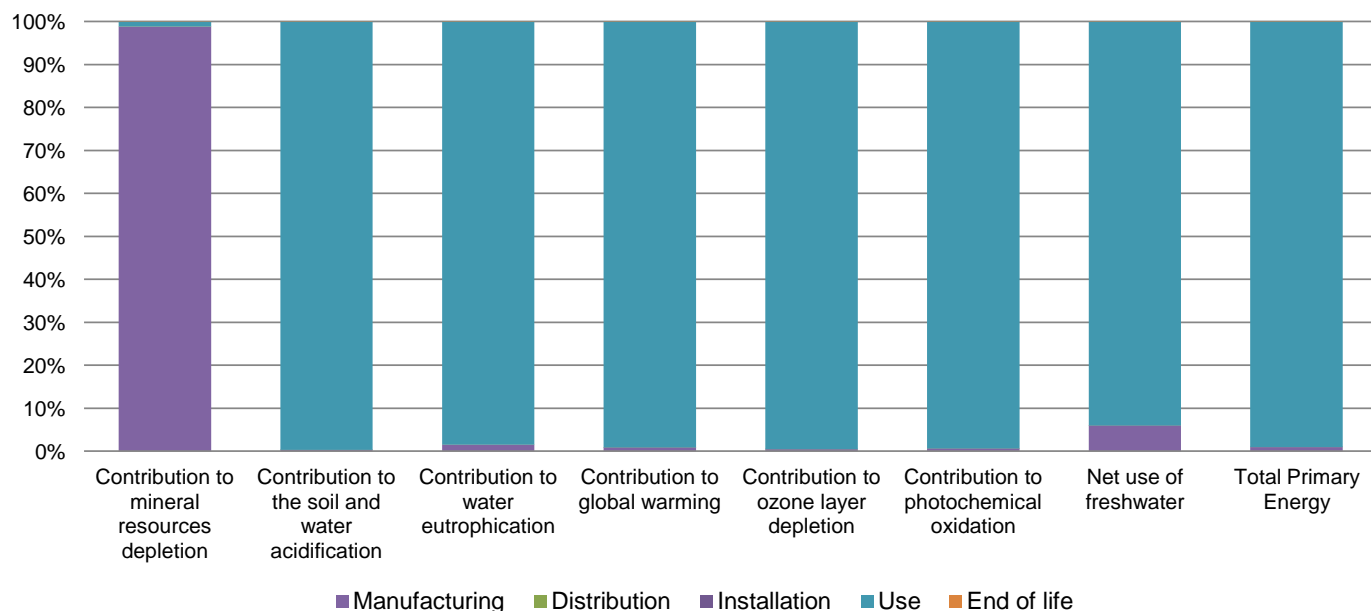

Optional indicators		TeSys B Contactor 3 poles 200A 220V 50HZ - CV1BG3G0ZM521J					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.52E+04	5.98E+02	1.62E+01	0*	5.46E+04	1.06E+01
Contribution to air pollution	m³	2.48E+05	2.08E+04	4.90E+01	0*	2.27E+05	8.25E+01
Contribution to water pollution	m³	2.29E+05	6.72E+03	1.89E+02	0*	2.22E+05	8.89E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.72E-01	2.72E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	7.71E+03	2.48E+01	0*	0*	7.69E+03	0*
Total use of non-renewable primary energy resources	MJ	1.01E+05	9.80E+02	1.63E+01	0*	9.97E+04	1.29E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	7.70E+03	1.61E+01	0*	0*	7.69E+03	0*
Use of renewable primary energy resources used as raw material	MJ	8.68E+00	8.68E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.01E+05	9.49E+02	1.63E+01	0*	9.97E+04	1.29E+01
Use of non renewable primary energy resources used as raw material	MJ	3.01E+01	3.01E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	7.77E+02	7.66E+02	0*	1.43E+00	0*	9.25E+00
Non hazardous waste disposed	kg	1.99E+04	2.93E+01	0*	0*	1.98E+04	0*
Radioactive waste disposed	kg	1.62E+01	1.70E-02	0*	0*	1.62E+01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	8.30E+00	1.05E+00	0*	4.18E-01	0*	6.83E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.90E-02	1.78E-03	0*	2.50E-02	0*	1.23E-02
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1602016_V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	07/2016	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			

Schneider Electric Industries SAS

Country Customer Care Center:

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP1602016\_V01.01-EN

© 2016 - Schneider Electric – All rights reserved

07/2016