

# ECOFIT<sup>TM</sup> for your MV Switchboard

DNF6 / FP [CEM, Delle-Alsthom, GEC-ALSTHOM]

Medium voltage distribution

Achieve higher sustainable performance with ECOFIT™ modernization solution!



# **Benefits**

- Extend your switchgear lifetime.
- Digitization, enable access to asset and energy management.
- Reduced environmental impact
- Enhance your process dependability.
- Optimize your maintenance service costs & limits your investments.
- New ECOFIT™ spare parts availability.

#### Maximize continuity of operation

- Life time extension for existing switchgear.
- · Less downtime than with full panel replacement.
- · Reduces plants shutdown time from days to hours.

# World class manufacturer design

- · Original manufacturer tested solution.
- · Worldwide support with manufacturer warranty.
- · No change of cables and no civil work.
- Safety of people and surrounding equipment.
- Improve reliability and quality with compliance to new standards.


#### Reduce environmental impact

- · Access to energy management with digital products.
- Efficient use of natural resources by replacing only active components.
- Recycling of obsolete equipment (metals, plastics, SF6, etc).

#### Schneider Electric team with you

- Worlwide support.
- Manufacturer expertize.
- · Skilled installation and commissioning experts.


# Total Cost of Ownership evolution

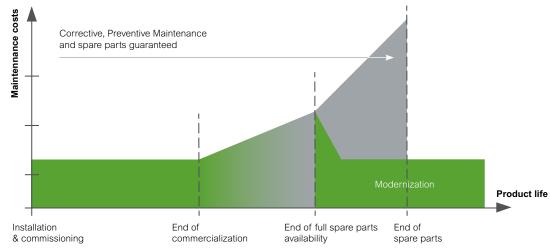


# DNF6 / FP with FP

# Original brand: CEM, Delle-Alsthom, GEC-ALSTHOM

### **ECOFIT™** proposal



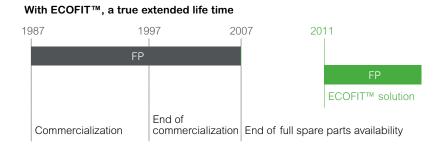

#### Main technical characteristics

	FP
Rated current (Ir)	400-2000A
Short circuit current (Isc)	31.5 kA
Rated voltage Un (50/60 Hz)	24 kV

		FP
	Technology	SF6
	Rated voltage Ur (kV)	24
	Surge withstand voltage Up (kV)	75
	Nominal frequency (Hz)	50-60
	Rated current Ir (A)	400-3150
	Short circuit current Isc (kA)	16-40
	Short circuit duration Tk (s)	3

	FP
Switching sequence	O-3 min-CO-3 min-CO CO-15s-CO O-0.3 s-CO-3 min-CO
Closing time (ms)	50
Opening time (ms)	70
Number of switching operations	10 000
Service temperature (°C)	-5/+40

#### **Additional offer**

- SF6 recycling: think about the environment and comply with regulations and policies. We offer a complete solution to take-back and recycle your obsolete MV equipment, including the SF6 gas. Consult us!
- · Improve energy and asset management: replacement of old protection relay with digital and connected relay.



Schneider Electric Industries SAS 35 rue Joseph Monier 92500 Rueil-Malmaison, France Phone: + 00 (0) 1 41 29 70 00 www.schneider-electric.com

