


Inventory



Safety and General Information

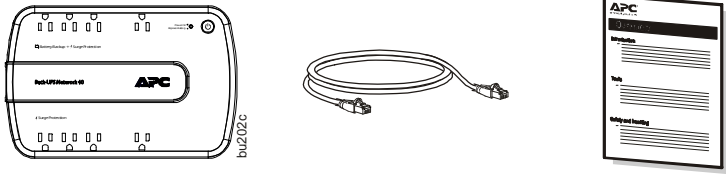

Inspect the package contents upon receipt. Notify the carrier and dealer if there is any damage.

Read the Safety Guide supplied with this unit before installing the UPS.

- This UPS is intended for indoor use only.
- Do not operate this UPS in direct sunlight, in contact with fluids, or where there is excessive dust or humidity.
- Be sure the air vents on the UPS are not blocked. Allow adequate space for proper ventilation.
- The battery typically lasts for two to three years. Environmental factors impact battery life. Elevated ambient temperatures, poor quality AC power, and frequent short duration discharges will shorten battery life.
- Connect the UPS power cable directly to a wall outlet. Do not use surge protectors or extension cords.

Specifications

Input	Voltage	120 Vac Nominal
	Frequency	50/60 Hz ± 3
	Brownout Transfers	92 Vac Typical
	Over-voltage Transfer	139 Vac Typical
Output	UPS Capacity (4 battery backup outlets)	450 VA, 257 W
	Total Amperage (all outlets)	12 A (including UPS output)
	Voltage - On Battery	115 Vac ± 8%
	Frequency - On Battery	60 Hz ± 1
Protection and Filtering	Transfer Time	6 ms Typical, 10 ms maximum
	AC Surge Protection	Full time, 340 Joules
	EMI/RFI Filter	Full time
	AC Input	Resettable circuit breaker
Battery	Network Surge Protection	10/100 Base-T
	Type	Sealed, maintenance-free, lead acid RBC114
Physical	Average Life	3 - 5 years depending on the number of discharge cycles and environmental temperature
	Net Weight	10 lb (4.7 kg)
Physical	Dimensions Length x Width x Height	12 in x 7 in x 3 in 30 cm x 18 cm x 9 cm
	Operating Temperature	32° F to 104° F (0° C to 40° C)
	Storage Temperature	5° F to 113° F (-15° C to 45° C)
	Operating Relative Humidity	0 to 95% non-condensing humidity
	Operating Elevation	0 to 10,000 ft (0 to 3000 m)
	EMC Compliance	<p>This device complies with part 68 and part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.</p> <p>Locate the label on the bottom of this device that contains, among other information, the FCC registration number and ringer equivalence number (REN) for this device. If requested, this information must be provided to the telephone company.</p> <p>If you experience trouble with this equipment, you disconnect it from the network until the problem has been corrected or until you are sure that the equipment is not malfunctioning.</p> <p>The ringer equivalence number (REN) is used to determine how many devices can be connected to your telephone line. In most areas, the sum of the RENs of all devices on any one line should not exceed five (5.0). If too many devices are attached, they may not ring properly.</p>

Wall Mount Installation

- Horizontal installation, use 2 screws 7.3" (186.3 mm) apart.
- Vertical installation, use 2 screws 5.4" (137.2 mm) apart.
- Allow 5/16" (8 mm), of the screw to protrude from the wall.


Replace Battery



Deliver the used battery to a recycling facility.

Replace the used battery with an APC by Schneider Electric approved battery. Replacement batteries can be ordered through the APC by Schneider Electric Web site, www.apc.com. Battery replacement part for Back-UPS BN4001 is **APCRBC114**.

Connect Equipment

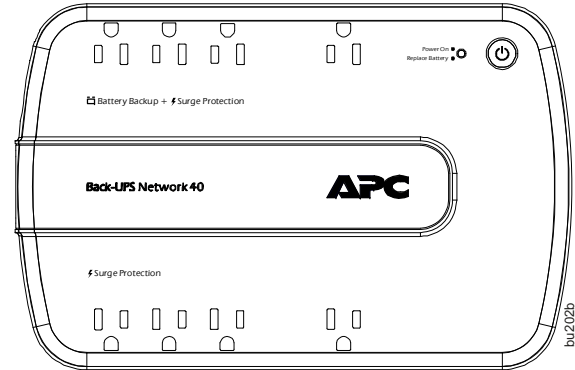

Battery Backup + Surge Protection Outlets

Battery backup outlets provide protection to connected equipment when the Back-UPS is turned on and connected to AC power.

Battery backup outlets receive power from the Back-UPS for a limited period of time when a power outage, or brownout condition occurs.

Battery backup outlets provide protection from power surges or spikes.

Connect a broadband modem and wireless router to the outlets. Voice over IP (VOIP) phones (if applicable) should also be plugged into battery backup outlets.

To maximize runtime in the event of a power outage only connect networking equipment to battery backup outlets.


Surge Protection Outlets

Surge protection outlets provide protection to connected equipment when the Back-UPS is connected to AC power, and is switched on or off.

Surge protection outlets provide protection from power surges or spikes.

Connect non-networking peripheral devices such as printers and scanners that do not need to remain on during power outages, or AC problems to the surge protection outlets.

Network Protection

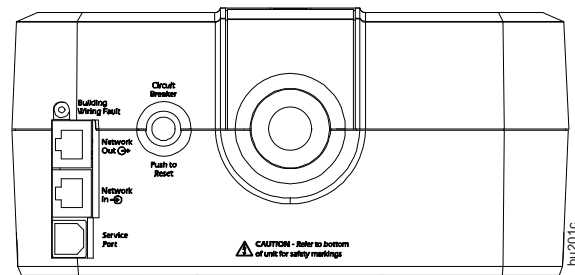

The Back-UPS protects equipment from power surges when connected by ethernet through the Back-UPS RJ-45 connectors.



Note: The Service port is intended for use during manufacturing. **Do not connect anything to this port. Do not alter the functionality of the Back-UPS as this will void the warranty.**

Turn On the Back-UPS

Press the **POWER ON** button located on the top of the Back-UPS. The **Power On/Replace Battery** LED will illuminate and a single short beep will be audible to indicate that the Back-UPS is providing protection for connected equipment.

The Back-UPS battery charges fully during the first 16 hours while connected to AC power. The Back-UPS battery will charge while the Back-UPS is switched on or off and is connected to AC power. Do not expect full battery run capability during the initial charge time.


If the red **Building Wiring Fault** LED located on the side of the Back-UPS illuminates, do not operate the Back-UPS. Have a qualified electrician correct the building wiring fault.

Warranty


The standard warranty is three (3) years from the date of purchase. Schneider Electric IT (SEIT) standard procedure is to replace the original unit with a factory reconditioned unit. Customers who must have the original unit back due to the assignment of asset tags and set depreciation schedules must declare such a need at first contact with an SEIT Technical Support representative. SEIT will ship the replacement unit once the defective unit has been received by the repair department, or cross ship upon the receipt of a valid credit card number. The customer pays for shipping the unit to SEIT. SEIT pays ground freight transportation costs to ship the replacement unit to the customer.

Connect the Battery


The Back-UPS is shipped with one battery cable disconnected. Remove the "Stop! Connect the Battery" label that covers the outlets. Prior to connecting any equipment to the unit, connect the battery cable to the unused battery terminal. It is normal for small sparks to be seen when the battery cable is connected to the battery terminal.

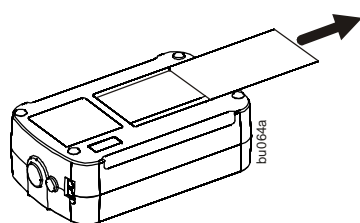

- 1** Press the battery compartment cover release tab located on the rear side of the unit. Slide the battery cover off.



- 2** Connect the battery cable securely to the battery terminal.

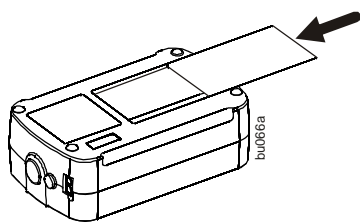

- 3** Reinstall the battery compartment cover. Be sure that the release tab locks into place.

Status Indicators

Status	LED Indicator	Audible Indicator On	Audible Indicator Terminates
Power On The Back-UPS is supplying AC power to connected equipment.	The green LED illuminates.	None	N/A
On Battery Back-UPS supplying battery power to battery backup outlets.	The green LED illuminates. The LED flashes once at the end of every 2 seconds.	Back-UPS beeps for 2 seconds when entering battery mode.	Beeping stops at the end of the first two seconds. A constant beep at the initial two seconds indicates the Back-UPS has entered the battery mode.
Low Battery warning The Back-UPS is supplying battery power to the battery backup outlets and the battery is near a total discharge state.	The green LED illuminates with rapid green flashes.	The Back-UPS emits rapid beeping, every 1/2 second.	Beeping stops when AC power is restored or the Back-UPS is turned off.
Replace Battery • The battery is disconnected. • The battery needs to be charged, or replaced.	• Replace Battery LED flashes. • Replace Battery and Power On LEDs flash alternately.	Constant tone Constant tone	Back-UPS is turned off.
Overload Shutdown While on battery power an overload condition has occurred in one or more of the battery backup outlets while the Back-UPS is operating on battery power.	None	Constant tone	Back-UPS is turned off.
Sleep Mode While on battery power the battery is completely discharged. The Back-UPS will “awaken” once AC power is restored.	None	The Back-UPS beeps once every four seconds.	The beeping stops when: • AC power is restored • If AC power is not restored within 32 seconds • The Back-UPS is turned off
Building Wiring Fault The building wiring presents a shock hazard that must be corrected by a qualified electrical.	Building Wiring Fault LED illuminates red	None	The Back-UPS is unplugged from the wall outlet or is plugged into an improperly wired outlet.

Troubleshooting

Problem and Possible Cause	Solution
The Back-UPS will not turn on	
The Back-UPS has not been turned on.	Press the POWER ON button.
The Back-UPS is not connected to AC power, there is no AC power available at the wall outlet, or the AC power is experiencing a brownout or over voltage condition.	Make sure the power cord is securely connected to the wall outlet, and that there is AC power available at the wall outlet. Where applicable, check that the wall outlet is switched on.
The battery is not connected.	Connect the battery. Refer to “Connect the Battery” on page 1 of this manual. In the event that the Back-UPS receives no AC power and the battery is connected, a cold-start can be initiated. Press and hold the Power On button until the Back-UPS emits two beeps.
The Back-UPS is on, the Replace Battery LED flashes and the unit emits a constant tone	
The battery is disconnected.	Refer to the “Connect the Battery” on page 1.
Connected equipment loses power	
A Back-UPS overload condition has occurred.	Remove all nonessential equipment connected to the outlets. One at a time reconnect equipment to the Back-UPS.
The Back-UPS battery is completely discharged.	Connect the Back-UPS to AC power and allow the battery to recharge for eight hours.
Connected equipment does not accept the step-approximated sine waveform from the Back-UPS.	The output waveform is intended for computers and peripheral devices. It is not intended for use with motor driven equipment.
The Back-UPS may require service.	Contact Schneider Electric IT (SEIT) Technical Support for more in depth troubleshooting.
The Power On LED is illuminated and the Back-UPS beeps 4 times every 30 seconds	
The Back-UPS is operating on battery power.	The Back-UPS is operating normally on battery power. At this point the user should save all open files, and shutdown the computer. When AC power is restored the battery will recharge.
The Power On LED flashes once every second while the Back-UPS beeps once every second	
The Back-UPS battery has approximately two minutes of remaining runtime.	The Back-UPS battery is near a total discharge state. At this point the user should save all open files, and shutdown the computer. When AC power is restored the battery will recharge.
The Building Wiring Fault LED illuminates	
The building wiring presents a shock hazard that must be corrected by a qualified electrical.	Do not operate the Back-UPS. Call a qualified electrician to correct the building wiring fault.
The Back-UPS has an inadequate battery runtime	
The battery is not fully charged. The battery is near the end of useful life and should be replaced.	Leave the Back-UPS connected to AC power for 16 hours while the battery charges to full capacity. As a battery ages, the runtime capability decreases. Contact APC by Schneider Electric at the Web site www.apc.com , to order replacement batteries.
The connection from the Back-UPS to the internet is lost during a power outage	
The modem has lost power.	Connect the broadband modem into one of the Battery Backup + Surge Protection outlets.

Voltage Sensitivity Adjustment (optional)

The Back-UPS detects and reacts to line voltage distortions by transferring to battery backup power to protect connected equipment. In situations where either the Back-UPS or the connected equipment is too sensitive for the input voltage level it is necessary to adjust the transfer voltage.

1. Connect the Back-UPS to a wall outlet. The Back-UPS will be in **Standby** mode, no indicators will be illuminated.
2. Press and hold the **ON/OFF** button for 10 seconds. The **OnLine** LED will illuminate alternately green-amber-red, to indicate that the Back-UPS is in **Program** mode.
3. The **Power On/Replace Battery** LED will flash either green, amber, or red to indicate the current sensitivity level. Refer to the table for an explanation of the transfer voltage sensitivity levels.
4. To select **LOW** sensitivity, press and hold the **ON/OFF** button until the LED flashes green.
5. To select **MEDIUM** sensitivity, press and hold the **ON/OFF** button until the LED flashes red.
6. To select **HIGH** sensitivity, press and hold the **ON/OFF** button until the LED flashes amber.
7. To exit **Program** mode wait five seconds and all LED indicators will extinguish. **Program** mode is no longer active.

LED Flashes	Sensitivity Setting	Input Voltage Range (AC Operation)	Recommended Use
Green	LOW	88 Vac to 142 Vac	Use this setting with equipment that is less sensitive to fluctuations in voltage or waveform distortions.
Red	MEDIUM	92 Vac to 139 Vac	Factory default setting. Use this setting under normal conditions.
Amber	HIGH	96 Vac to 136 Vac	Use this setting when connected equipment is sensitive to voltage and waveform fluctuations.

Service

If the unit requires service, do not return it to the dealer. Follow these steps:

1. Review the *Troubleshooting* section of the manual to eliminate common problems.
2. If the problem persists, contact Schneider Electric IT (SEIT) Customer Support through the APC by Schneider Electric Web site, www.apc.com.
 - a. Note the model number and serial number and the date of purchase. The model and serial numbers are located on the rear panel of the unit and are available through the LCD display on select models.
 - b. Call SEIT Customer Support and a technician will attempt to solve the problem over the phone. If this is not possible, the technician will issue a Returned Material Authorization Number (RMA#).
 - c. If the unit is under warranty, the repairs are free.
 - d. Service procedures and returns may vary internationally. Refer to the APC by Schneider Electric Web site for country specific instructions.
3. Pack the unit in the original packaging whenever possible to avoid damage in transit. Never use foam beads for packaging. Damage sustained in transit is not covered under warranty.
4. **Always DISCONNECT THE UPS BATTERIES before shipping. The United States Department of Transportation (DOT), and the International Air Transport Association (IATA) regulations require that UPS batteries be disconnected before shipping.** The internal batteries may remain in the UPS.
5. Write the RMA# provided by Customer Support on the outside of the package.
6. Return the unit by insured, pre-paid carrier to the address provided by Customer Support

APC by Schneider Electric IT Customer Support Worldwide

For country specific customer support, go to the APC by Schneider Electric Web site, www.apc.com.



Select models are ENERGY STAR® qualified. For more information go to www.apc.com/site/recycle/index.cfm/energy-efficiency/energy-star/.



This UPS is certified to comply with California Battery Charger System regulations. For more information go to www.apc.com/site/recycle/index.cfm/energy-efficiency/cec-battery-charger/.