

Symmetra™ PX 96 and 160 kW

380/400/415 V

Technical Specifications

11/2024



Legal Information

The information provided in this document contains general descriptions, technical characteristics and/or recommendations related to products/solutions.

This document is not intended as a substitute for a detailed study or operational and site-specific development or schematic plan. It is not to be used for determining suitability or reliability of the products/solutions for specific user applications. It is the duty of any such user to perform or have any professional expert of its choice (integrator, specifier or the like) perform the appropriate and comprehensive risk analysis, evaluation and testing of the products/solutions with respect to the relevant specific application or use thereof.

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this document are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owner.

This document and its content are protected under applicable copyright laws and provided for informative use only. No part of this document may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the document or its content, except for a non-exclusive and personal license to consult it on an "as is" basis.

Schneider Electric reserves the right to make changes or updates with respect to or in the content of this document or the format thereof, at any time without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this document, as well as any non-intended use or misuse of the content thereof.

Table of Contents

| | |
|--|----|
| Important Safety Instructions — SAVE THESE | |
| INSTRUCTIONS | 5 |
| Safety Precautions | 6 |
| Technical Data | 8 |
| Model List | 8 |
| Input Power Factor | 10 |
| Efficiency (TÜV certified)..... | 10 |
| Efficiency Curves | 10 |
| Derating due to Load Power Factor | 11 |
| Batteries | 11 |
| Efficiency DC to AC..... | 11 |
| Battery Runtimes – Schneider Electric Battery Solutions | 11 |
| Battery Runtimes — Third Party Classic Battery Solution | 15 |
| Battery Discharge Current | 17 |
| End of Discharge Voltage at 100% Load | 17 |
| Electrolyte Values | 17 |
| Communication and Management | 17 |
| Features | 17 |
| EPO and Input/Output Contacts | 18 |
| Compliance..... | 20 |
| Facility Planning | 21 |
| Input Specifications | 21 |
| Bypass Specifications | 21 |
| Output Specifications | 22 |
| Modular Battery Specifications | 22 |
| Classic Battery Specifications..... | 23 |
| Recommended Cable, Bolt and Lug Sizes | 24 |
| Required Upstream and Downstream Protection for Building | |
| Installation | 25 |
| Single and Dual Mains Systems | 25 |
| Physical..... | 25 |
| Weights and Dimensions | 25 |
| Shipping Weights and Dimensions | 26 |
| Clearance Symmetra PX 96 and 160 kW | 26 |
| Environmental | 26 |
| Heat Dissipation | 26 |
| Drawings | 27 |
| Symmetra PX Single System with PDU with Modular Batteries..... | 28 |
| Options | 29 |
| Hardware Options..... | 29 |
| Configuration Options | 32 |
| Limited Factory Warranty..... | 33 |

Important Safety Instructions — SAVE THESE INSTRUCTIONS

Read these instructions carefully and look at the equipment to become familiar with it before trying to install, operate, service or maintain it. The following safety messages may appear throughout this manual or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.



The addition of this symbol to a “Danger” or “Warning” safety message indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages with this symbol to avoid possible injury or death.

DANGER

DANGER indicates a hazardous situation which, if not avoided, **will result in death or serious injury.**

Failure to follow these instructions will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, **could result in death or serious injury.**

Failure to follow these instructions can result in death, serious injury, or equipment damage.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, **could result in minor or moderate injury.**

Failure to follow these instructions can result in injury or equipment damage.

NOTICE

NOTICE is used to address practices not related to physical injury. The safety alert symbol shall not be used with this type of safety message.

Failure to follow these instructions can result in equipment damage.

Please Note

Electrical equipment should only be installed, operated, serviced, and maintained by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction, installation, and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

Per IEC 62040-1: "Uninterruptible power systems (UPS) -- Part 1: Safety Requirements," this equipment, including battery access, must be inspected, installed and maintained by a skilled person.

The skilled person is a person with relevant education and experience to enable him or her to perceive risks and to avoid hazards which the equipment can create (reference IEC 62040-1, section 3.102).

Safety Precautions

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- The product must be installed according to the specifications and requirements as defined by Schneider Electric. It concerns in particular the external and internal protections (upstream circuit breakers, battery circuit breakers, cabling, etc.) and environmental requirements. No responsibility is assumed by Schneider Electric if these requirements are not respected.
- After the UPS system has been electrically wired, do not start up the system. Start-up must only be performed by Schneider Electric.

Failure to follow these instructions will result in death or serious injury.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The UPS System must be installed according to local and national regulations. Install the UPS according to:

- IEC 60364 (including 60364-4-41- protection against electric shock, 60364-4-42 - protection against thermal effect, and 60364-4-43 - protection against overcurrent), **or**
- NEC NFPA 70

depending on which one of the standards apply in your local area.

Failure to follow these instructions will result in death or serious injury.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Install the UPS system in a temperature controlled area free of conductive contaminants and humidity.
- Install the UPS system on a non-flammable, level, and solid surface (e.g. concrete) that can support the weight of the system.

Failure to follow these instructions will result in death or serious injury.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The UPS is not designed for and must therefore not be installed in the following unusual operating environments:

- Damaging fumes
- Explosive mixtures of dust or gases, corrosive gases, or conductive or radiant heat from other sources
- Moisture, abrasive dust, steam or in an excessively damp environment
- Fungus, insects, vermin
- Salt-laden air or contaminated cooling refrigerant
- Pollution degree higher than 2 according to IEC 60664-1
- Exposure to abnormal vibrations, shocks, and tilting
- Exposure to direct sunlight, heat sources, or strong electromagnetic fields

Failure to follow these instructions will result in death or serious injury.

NOTICE

RISK OF OVERHEATING

Respect the clearance requirements around the UPS system and do not cover the product's ventilation openings when the UPS system is in operation.

Failure to follow these instructions can result in equipment damage.

NOTICE

RISK OF EQUIPMENT DAMAGE

Do not connect the UPS output to regenerative load systems including photovoltaic systems and speed drives.

Failure to follow these instructions can result in equipment damage.

Technical Data

Model List

Symmetra PX 96 kW 400 V

Symmetra PX 96 kW



- Symmetra PX 32 kW Scalable to 96 kW (SY32K96H)
- Symmetra PX 32 kW Scalable to 96 kW with Integrated Modular Distribution (SY32K96H-PD)
- Symmetra PX 32kW Scalable to 96kW, without Bypass, Distribution, or Batteries, 400V (SY32K96H-NB)
- Symmetra PX 64 kW Scalable to 96 kW (SY64K96H)
- Symmetra PX 64 kW Scalable to 96 kW with Integrated Modular Distribution (SY64K96H-PD)
- Symmetra PX 64kW Scalable to 96kW, without Bypass, Distribution, or Batteries, 400V (SY64K96H-NB)
- Symmetra PX 96 kW (SY96K96H)
- Symmetra PX 96 kW with Integrated Modular Distribution (shown) (SY96K96H-PD)
- Symmetra PX 96kW, without Bypass, Distribution, or Batteries, 400V (SY96K96H-NB)


Symmetra PX 160 kW 400 V

Symmetra PX 160 kW with Integrated Modular Distribution



- Symmetra PX 32 kW Scalable to 160 kW (SY32K160H)
- Symmetra PX 32 kW Scalable to 160 kW with Integrated Modular Distribution (SY32K160H-PD)
- Symmetra PX 32kW Scalable to 160kW, without Bypass, Distribution, or Batteries, 400V (SY32K160H-NB)
- Symmetra PX 64 kW Scalable to 160 kW (SY64K160H)
- Symmetra PX 64 kW Scalable to 160 kW with Integrated Modular Distribution (SY64K160H-PD)
- Symmetra PX 64kW Scalable to 160kW, without Bypass, Distribution, or Batteries, 400V (SY64K160H-NB)
- Symmetra PX 96 kW Scalable to 160 kW (SY96K160H)
- Symmetra PX 96 kW Scalable to 160 kW with Integrated Modular Distribution (SY96K160H-PD)
- Symmetra PX 96kW Scalable to 160kW, without Bypass, Distribution, or Batteries, 400V (SY96K160H-NB)
- Symmetra PX 128 kW Scalable to 160 kW (SY128K160H)
- Symmetra PX 128 kW Scalable to 160 kW with Integrated Modular Distribution (SY128K160H-PD)
- Symmetra PX 128kW Scalable to 160kW, without Bypass, Distribution, or Batteries, 400V (SY128K160H-NB)
- Symmetra PX 160 kW (SY160K160H)
- Symmetra PX 160 kW with Integrated Modular Distribution (shown) (SY160K160H-PD)
- Symmetra PX 160kW, without Bypass, Distribution, or Batteries, 400V (SY160K160H-NB)


Input Power Factor

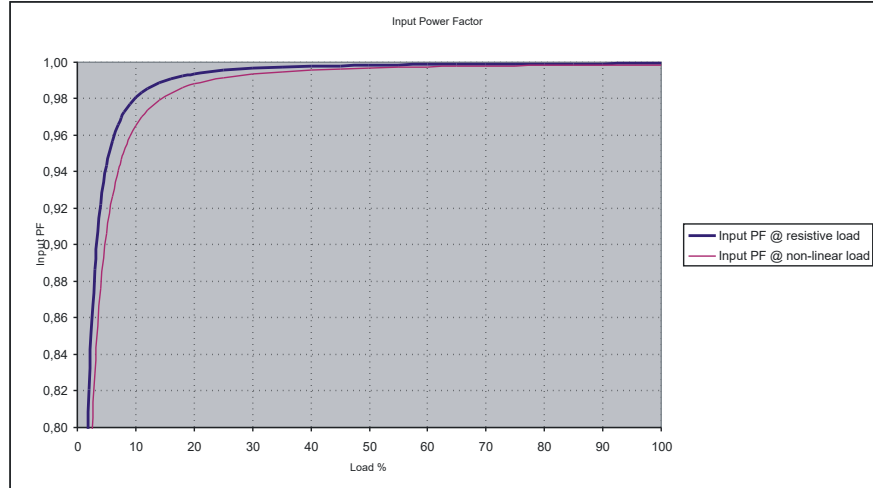

Efficiency (TÜV certified)

| System | 25% load | 50% load | 75% load | 100% load |
|--------------------------|----------|----------|----------|-----------|
| Symmetra PX 96 kW 400 V | 94.5 | 95.6 | 95.5 | 95.2 |
| Symmetra PX 160 kW 400 V | 94.7 | 95.7 | 95.6 | 95.3 |

Efficiency Curves

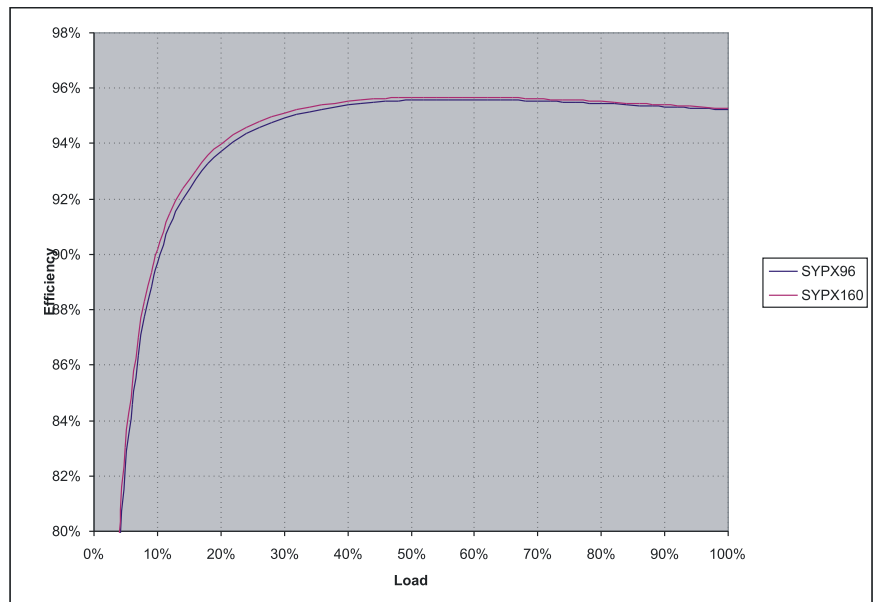

Derating due to Load Power Factor

The Symmetra PX 96/160 kW exhibits no derating due to leading or lagging load power factor


Batteries

Efficiency DC to AC

| | 96 kW | | | 160 kW | | |
|---------------------------------------|-------|-------|-------|--------|-------|-------|
| | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V |
| Efficiency at nom battery voltage (%) | 95% | 95% | 95% | 95% | 95% | 95% |


Battery Runtimes – Schneider Electric Battery Solutions

Symmetra PX 96 kW Battery Runtimes (Minutes) – Modular Battery Solution

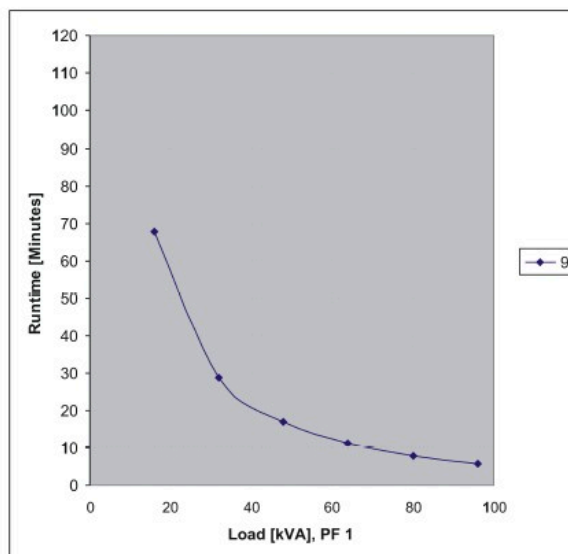

| Number of bat shelves | Load kW | | | | | |
|-----------------------|---------|----|----|----|----|----|
| | 16 | 32 | 48 | 64 | 80 | 96 |
| 9 | 68 | 29 | 17 | 11 | 8 | 6 |


Symmetra PX 96 kW Battery Runtimes (Minutes) – Extended Modular Battery Solution

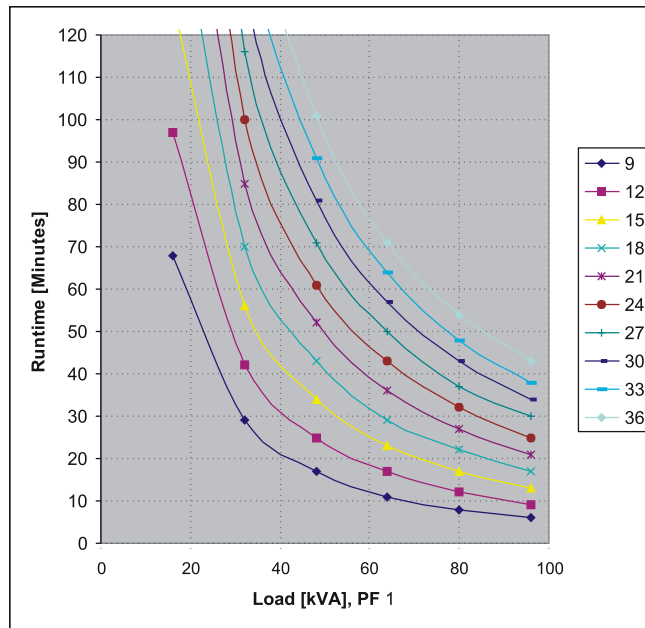

| Number of modular battery cabinets | Number of bat shelves | Load kW | | | | | |
|------------------------------------|-----------------------|---------|-----|----|----|----|----|
| | | 16 | 32 | 48 | 64 | 80 | 96 |
| 1 | 9 | 68 | 29 | 17 | 11 | 8 | 6 |
| 2 | 10 | 77 | 33 | 20 | 13 | 9 | 7 |
| | 11 | 87 | 38 | 22 | 15 | 11 | 8 |
| | 12 | 97 | 42 | 25 | 17 | 12 | 9 |
| | 13 | 107 | 47 | 28 | 19 | 14 | 11 |
| | 14 | 117 | 51 | 31 | 21 | 15 | 12 |
| | 15 | 128 | 56 | 34 | 23 | 17 | 13 |
| | 16 | 138 | 61 | 37 | 25 | 19 | 14 |
| | 17 | 149 | 65 | 40 | 27 | 20 | 16 |
| 3 | 18 | 160 | 70 | 43 | 29 | 22 | 17 |
| | 19 | 171 | 75 | 46 | 32 | 24 | 18 |
| | 20 | 182 | 80 | 49 | 34 | 25 | 20 |
| | 21 | 193 | 85 | 52 | 36 | 27 | 21 |
| | 22 | 204 | 90 | 55 | 38 | 29 | 23 |
| | 23 | 216 | 95 | 58 | 41 | 30 | 24 |
| | 24 | 227 | 100 | 61 | 43 | 32 | 25 |
| | 25 | 238 | 106 | 64 | 45 | 34 | 27 |
| | 26 | 250 | 111 | 68 | 47 | 36 | 28 |
| 27 | 262 | 116 | 71 | 50 | 37 | 30 | |
| 4 | 28 | 274 | 121 | 74 | 52 | 39 | 31 |
| | 29 | 286 | 127 | 78 | 54 | 41 | 33 |
| | 30 | 298 | 132 | 81 | 57 | 43 | 34 |
| | 31 | 310 | 137 | 84 | 59 | 45 | 35 |
| | 32 | 322 | 143 | 88 | 62 | 47 | 37 |
| | 33 | 334 | 148 | 91 | 64 | 48 | 38 |

| | | Load kW | | | | | |
|------------------------------------|-----------------------|---------|-----|-----|----|----|----|
| Number of modular battery cabinets | Number of bat shelves | 16 | 32 | 48 | 64 | 80 | 96 |
| | 34 | 346 | 154 | 95 | 66 | 50 | 40 |
| | 35 | 359 | 160 | 98 | 69 | 52 | 42 |
| | 36 | 371 | 165 | 101 | 71 | 54 | 43 |

Symmetra PX 160 kW Battery Runtimes (Minutes) – Modular Battery Solution

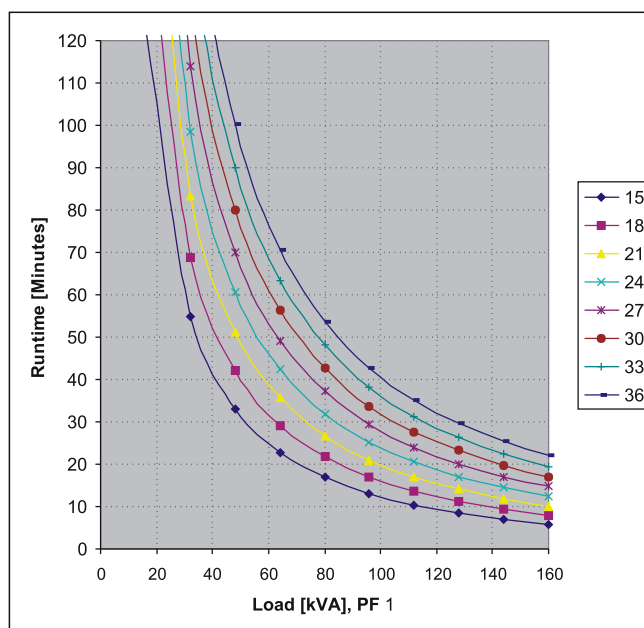

| | | Load kW | | | | | | | | | |
|---|-----------------------|---------|-----|----|----|----|----|-----|-----|-----|-----|
| Number of modular battery cabinets | Number of bat shelves | 16 | 32 | 48 | 64 | 80 | 96 | 112 | 128 | 144 | 160 |
| PDU with modular batteries and 1 modular battery cabinet | 15 | 123 | 55 | 33 | 23 | 17 | 13 | 10 | 8 | 7 | 6 |
| | 16 | 133 | 59 | 36 | 25 | 18 | 14 | 11 | 9 | 8 | 7 |
| | 17 | 144 | 64 | 39 | 27 | 20 | 16 | 13 | 10 | 9 | 7 |
| | 18 | 154 | 69 | 42 | 29 | 22 | 17 | 14 | 11 | 9 | 8 |
| PDU with modular batteries and 2 modular battery cabinets | 19 | 165 | 74 | 45 | 31 | 23 | 18 | 15 | 12 | 10 | 9 |
| | 20 | 175 | 79 | 48 | 33 | 25 | 20 | 16 | 13 | 11 | 9 |
| | 21 | 186 | 83 | 51 | 36 | 27 | 21 | 17 | 14 | 12 | 10 |
| | 22 | 197 | 88 | 54 | 38 | 28 | 22 | 18 | 15 | 13 | 11 |
| | 23 | 208 | 93 | 57 | 40 | 30 | 24 | 19 | 16 | 14 | 12 |
| | 24 | 219 | 98 | 60 | 42 | 32 | 25 | 20 | 17 | 14 | 12 |
| | 25 | 230 | 104 | 64 | 45 | 34 | 27 | 22 | 18 | 15 | 13 |
| | 26 | 241 | 109 | 67 | 47 | 35 | 28 | 23 | 19 | 16 | 14 |
| | 27 | 252 | 114 | 70 | 49 | 37 | 29 | 24 | 20 | 17 | 15 |
| PDU with modular batteries and 3 modular battery cabinets | 28 | 264 | 119 | 73 | 52 | 39 | 31 | 25 | 21 | 18 | 16 |
| | 29 | 275 | 124 | 77 | 54 | 41 | 32 | 26 | 22 | 19 | 16 |
| | 30 | 287 | 130 | 80 | 56 | 43 | 34 | 28 | 23 | 20 | 17 |
| | 31 | 298 | 135 | 83 | 59 | 44 | 35 | 29 | 24 | 21 | 18 |
| | 32 | 310 | 140 | 87 | 61 | 46 | 37 | 30 | 25 | 22 | 19 |

| Number of modular battery cabinets | Number of bat shelves | Load kW | | | | | | | | | |
|------------------------------------|-----------------------|---------|-----|-----|----|----|----|-----|-----|-----|-----|
| | | 16 | 32 | 48 | 64 | 80 | 96 | 112 | 128 | 144 | 160 |
| | 33 | 322 | 146 | 90 | 63 | 48 | 38 | 31 | 26 | 23 | 20 |
| | 34 | 334 | 151 | 93 | 66 | 50 | 40 | 33 | 27 | 23 | 20 |
| | 35 | 346 | 156 | 97 | 68 | 52 | 41 | 34 | 28 | 24 | 21 |
| | 36 | 358 | 162 | 100 | 71 | 54 | 43 | 35 | 30 | 25 | 22 |

Symmetra PX 160 kW Battery Runtimes (Minutes) – Classic Batteries

Additional details can be found on the ISX designer

Power Factor: 0.8

| Battery Configuration | 32 kVA | 64 kVA | 96 kVA | 128 kVA | 160 kVA |
|-----------------------|----------------------|--------|--------|---------|---------|
| A | 30 min | 11 min | 6 min | N/A | N/A |
| B | 41 min | 17 min | 10 min | 6 min | N/A |
| AA | 74 min | 30 min | 17 min | 11 min | 8 min |
| BB | 92 min | 41 min | 25 min | 17 min | 12 min |
| AAA | 116 min | 50 min | 30 min | 20 min | 15 min |
| BBB | 147 min ¹ | 66 min | 41 min | 29 min | 22 min |
| AAAA | 164 min ¹ | 71 min | 43 min | 30 min | 22 min |
| BBBB | 204 min ¹ | 92 min | 58 min | 41 min | 31 min |


Power Factor: 1.0

| Battery Configuration | 32kVA | 64kVA | 96kVA | 128kVA | 160kVA |
|-----------------------|----------------------|--------|--------|--------|--------|
| A | 22 min | 8 min | 4 min | N/A | N/A |
| B | 31 min | 12 min | 7 min | 4 min | N/A |
| AA | 54 min | 22 min | 13 min | 8 min | 6 min |
| BB | 72 min | 31 min | 18 min | 12 min | 9 min |
| AAA | 88 min | 37 min | 22 min | 15 min | 11 min |
| BBB | 115 min ¹ | 51 min | 31 min | 22 min | 16 min |
| AAAA | 125 min ¹ | 54 min | 32 min | 22 min | 16 min |
| BBBB | 160 min ¹ | 72 min | 44 min | 31 min | 23 min |

1. Recharge time may be too long – check with customer requirements.


Battery Runtimes — Third Party Classic Battery Solution

Symmetra PX 96 kW Battery Runtimes (Minutes) — Classic Batteries

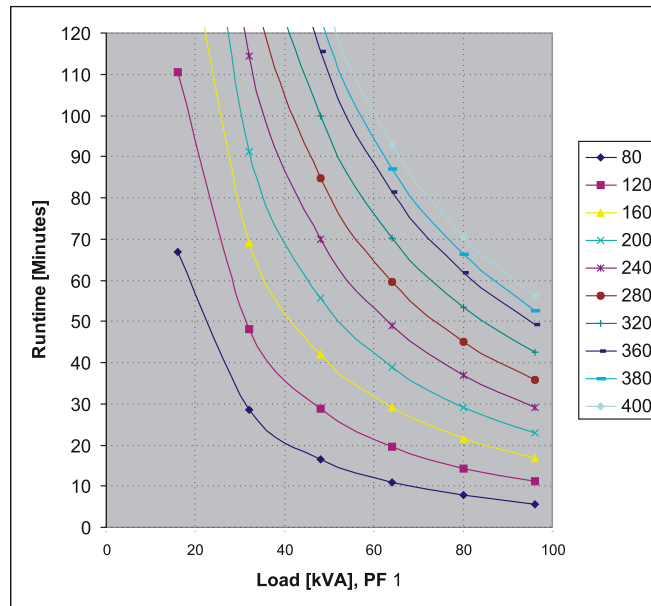

| Battery Ah | Approx. Equivalent 10 hr rate Ah | Load kW | | | | | |
|------------|----------------------------------|---------|-----|-----|----|----|----|
| | | 16 | 32 | 48 | 64 | 80 | 96 |
| 80 | 74 | 67 | 29 | 17 | 11 | 8 | 6 |
| 100 | 93 | 88 | 38 | 23 | 15 | 11 | 8 |
| 120 | 112 | 111 | 48 | 29 | 20 | 14 | 11 |
| 140 | 130 | 134 | 59 | 35 | 24 | 18 | 14 |
| 160 | 149 | 157 | 69 | 42 | 29 | 22 | 17 |
| 180 | 167 | 182 | 80 | 49 | 34 | 25 | 20 |
| 200 | 186 | 207 | 91 | 56 | 39 | 29 | 23 |
| 220 | 205 | 323 | 103 | 63 | 44 | 33 | 26 |
| 240 | 223 | 258 | 114 | 70 | 49 | 37 | 29 |
| 260 | 242 | 284 | 126 | 77 | 54 | 41 | 32 |
| 280 | 260 | 311 | 138 | 85 | 60 | 45 | 36 |
| 300 | 279 | 338 | 150 | 92 | 65 | 49 | 39 |
| 320 | 298 | 366 | 163 | 100 | 70 | 53 | 42 |
| 340 | 316 | 393 | 175 | 108 | 76 | 58 | 46 |
| 360 | 335 | 421 | 188 | 116 | 81 | 62 | 49 |
| 380 | 353 | 450 | 201 | 124 | 87 | 66 | 53 |
| 400 | 372 | 479 | 213 | 132 | 93 | 71 | 56 |

Symmetra PX 160 kW Battery Runtimes (Minutes) — Classic Batteries

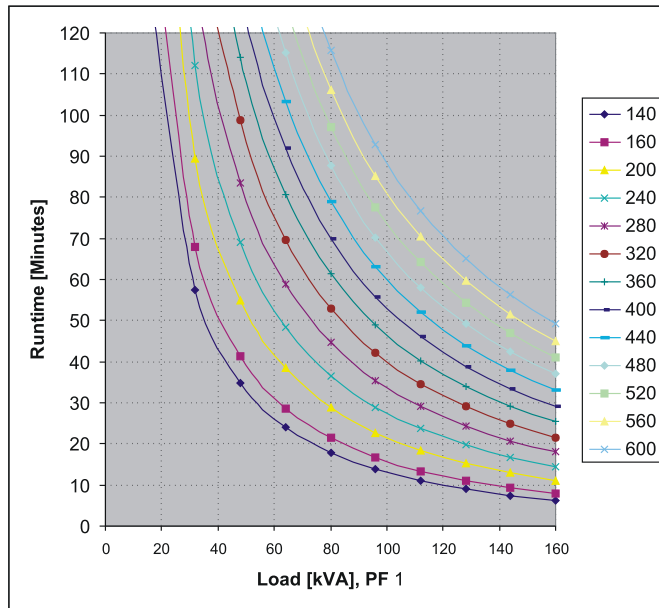


| Battery Ah | Approx. Equivalent 10 hr rate Ah | Load kW | | | | | | | | | |
|------------|----------------------------------|---------|-----|-----|-----|-----|----|-----|-----|-----|-----|
| | | 16 | 32 | 48 | 64 | 80 | 96 | 112 | 128 | 144 | 160 |
| 140 | 130 | 129 | 57 | 35 | 24 | 18 | 14 | 11 | 9 | 7 | 6 |
| 160 | 149 | 152 | 68 | 41 | 29 | 21 | 17 | 13 | 11 | 9 | 8 |
| 180 | 167 | 175 | 79 | 48 | 33 | 25 | 20 | 16 | 13 | 11 | 9 |
| 200 | 186 | 199 | 90 | 55 | 38 | 29 | 23 | 18 | 15 | 13 | 11 |
| 220 | 205 | 224 | 101 | 62 | 43 | 33 | 26 | 21 | 18 | 15 | 13 |
| 240 | 223 | 249 | 112 | 69 | 48 | 37 | 29 | 24 | 20 | 17 | 14 |
| 260 | 242 | 274 | 124 | 76 | 54 | 41 | 32 | 26 | 22 | 19 | 16 |
| 280 | 260 | 300 | 135 | 84 | 59 | 45 | 35 | 29 | 24 | 21 | 18 |
| 300 | 279 | 326 | 147 | 91 | 64 | 49 | 39 | 32 | 27 | 23 | 21 |
| 320 | 298 | 352 | 160 | 99 | 70 | 53 | 42 | 35 | 29 | 25 | 22 |
| 340 | 316 | 379 | 172 | 106 | 75 | 57 | 45 | 37 | 31 | 27 | 23 |
| 360 | 335 | 406 | 184 | 114 | 81 | 61 | 49 | 40 | 34 | 29 | 25 |
| 380 | 353 | 434 | 197 | 122 | 86 | 66 | 52 | 43 | 36 | 31 | 27 |
| 400 | 372 | 461 | 209 | 130 | 92 | 70 | 56 | 46 | 39 | 33 | 29 |
| 420 | 391 | 489 | 222 | 138 | 98 | 74 | 59 | 49 | 41 | 36 | 31 |
| 440 | 409 | 518 | 235 | 146 | 103 | 79 | 63 | 52 | 44 | 38 | 33 |
| 460 | 428 | 546 | 248 | 154 | 109 | 83 | 67 | 55 | 47 | 40 | 35 |
| 480 | 446 | 575 | 261 | 162 | 115 | 88 | 70 | 58 | 49 | 42 | 37 |
| 500 | 465 | 604 | 275 | 171 | 121 | 92 | 74 | 61 | 52 | 45 | 39 |
| 520 | 484 | 633 | 288 | 179 | 127 | 97 | 78 | 64 | 54 | 47 | 41 |
| 540 | 502 | 663 | 301 | 187 | 133 | 102 | 81 | 67 | 57 | 49 | 43 |
| 560 | 521 | 692 | 315 | 196 | 139 | 106 | 85 | 70 | 60 | 52 | 45 |
| 580 | 539 | 722 | 329 | 204 | 145 | 111 | 89 | 74 | 62 | 54 | 47 |
| 600 | 558 | 752 | 342 | 213 | 151 | 116 | 93 | 77 | 65 | 56 | 49 |

Battery Discharge Current

| | 96 kW | 160 kW |
|----------------------------------|-------|--------|
| I bat at bat nominal , 100% load | 265 | 441 |
| I bat at bat min , 100% load | 330 | 550 |
| I bat at bat min , 150% load | 495 | 825 |

End of Discharge Voltage at 100% Load

NOTE: The voltage is 1.6 to 1.75 per cell depending on load.

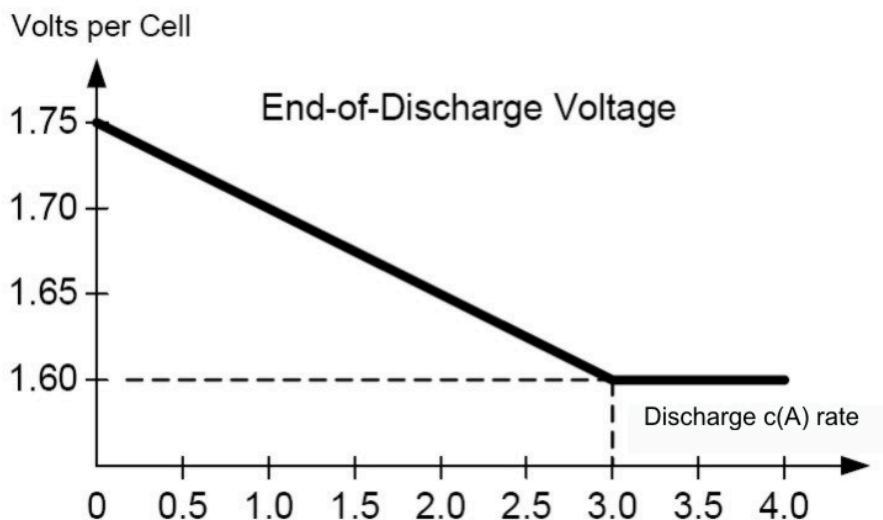

NOTE: C equals $I_{\text{discharge}}$ divided by the battery Ah capacity.

Electrolyte Values

| | Battery unit | String of batteries (4 battery units) |
|-------------------------------|--------------|---------------------------------------|
| Electrolyte volume L (gal) | 2.78 (0.61) | 11.14 (2.45) |
| Electrolyte weight kg (lbs) | 3.62 (7.98) | 14.46 (31.90) |
| Sulfuric acid weight kg (lbs) | 1.43 (3.16) | 5.73 (12.6) |


Communication and Management

Features


| | |
|---|---|
| Available SmartSlot™ Interface Quantity | 2 |
| Control panel | Multi-function LCD status and control console |
| Audible alarm | Alarm when on battery : distinctive low battery alarm : configurable delays |
| Emergency Power Off (EPO) | Yes |

EPO and Input/Output Contacts

EPO Switch Wiring Diagram for Modular Battery Cabinet

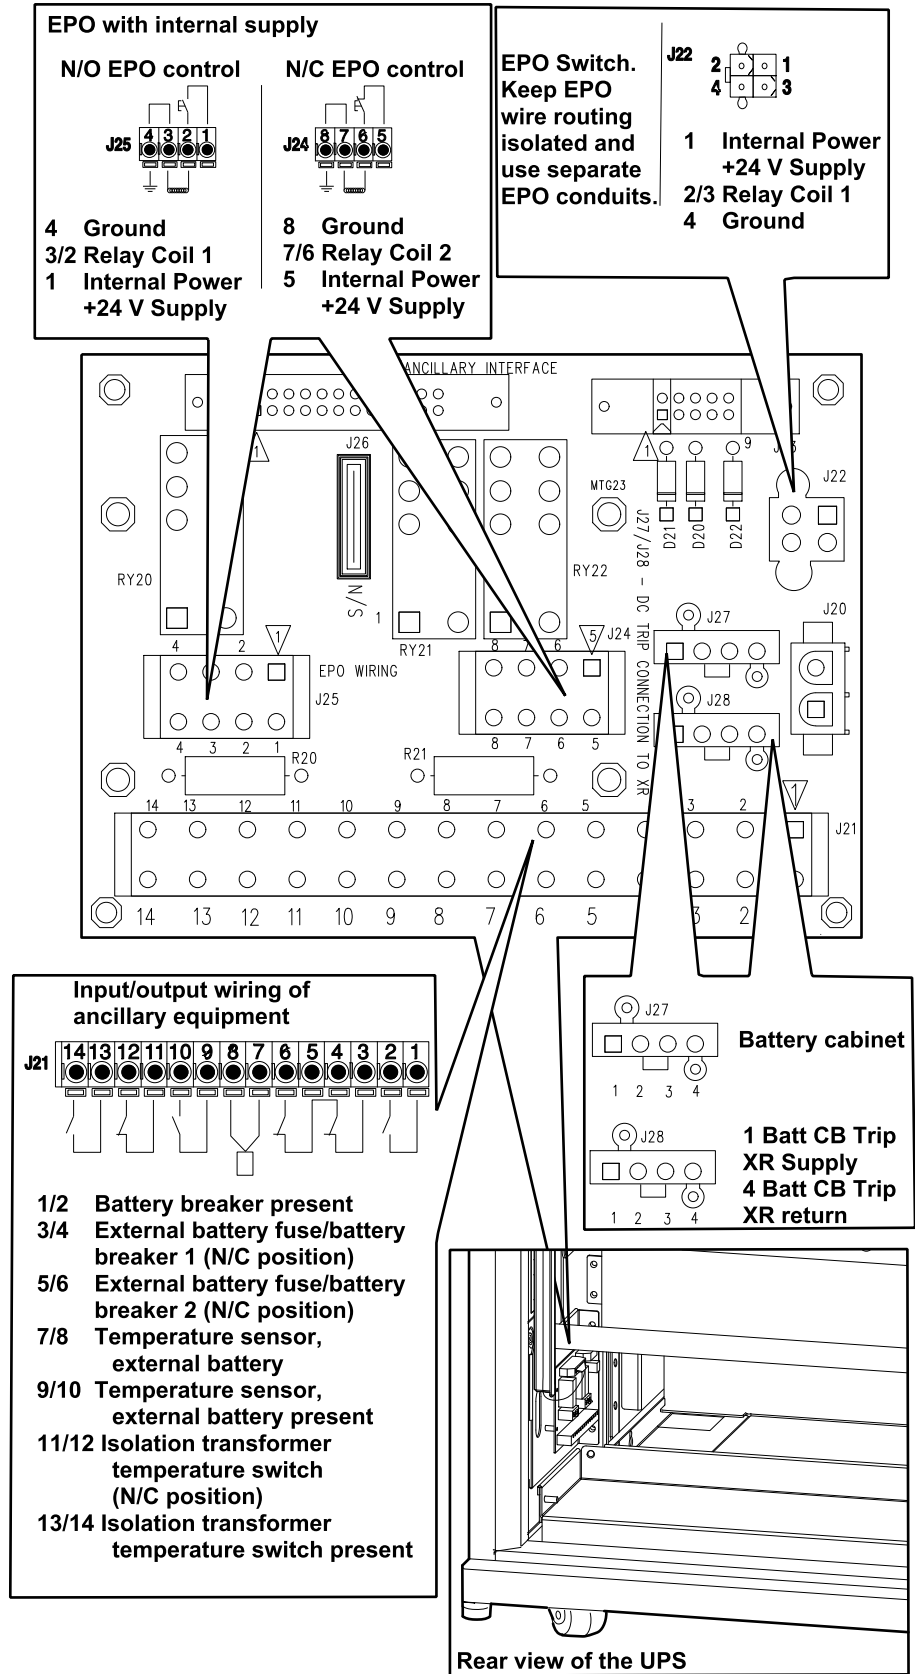

EPO Switch Wiring Diagram for Classic Battery Cabinet

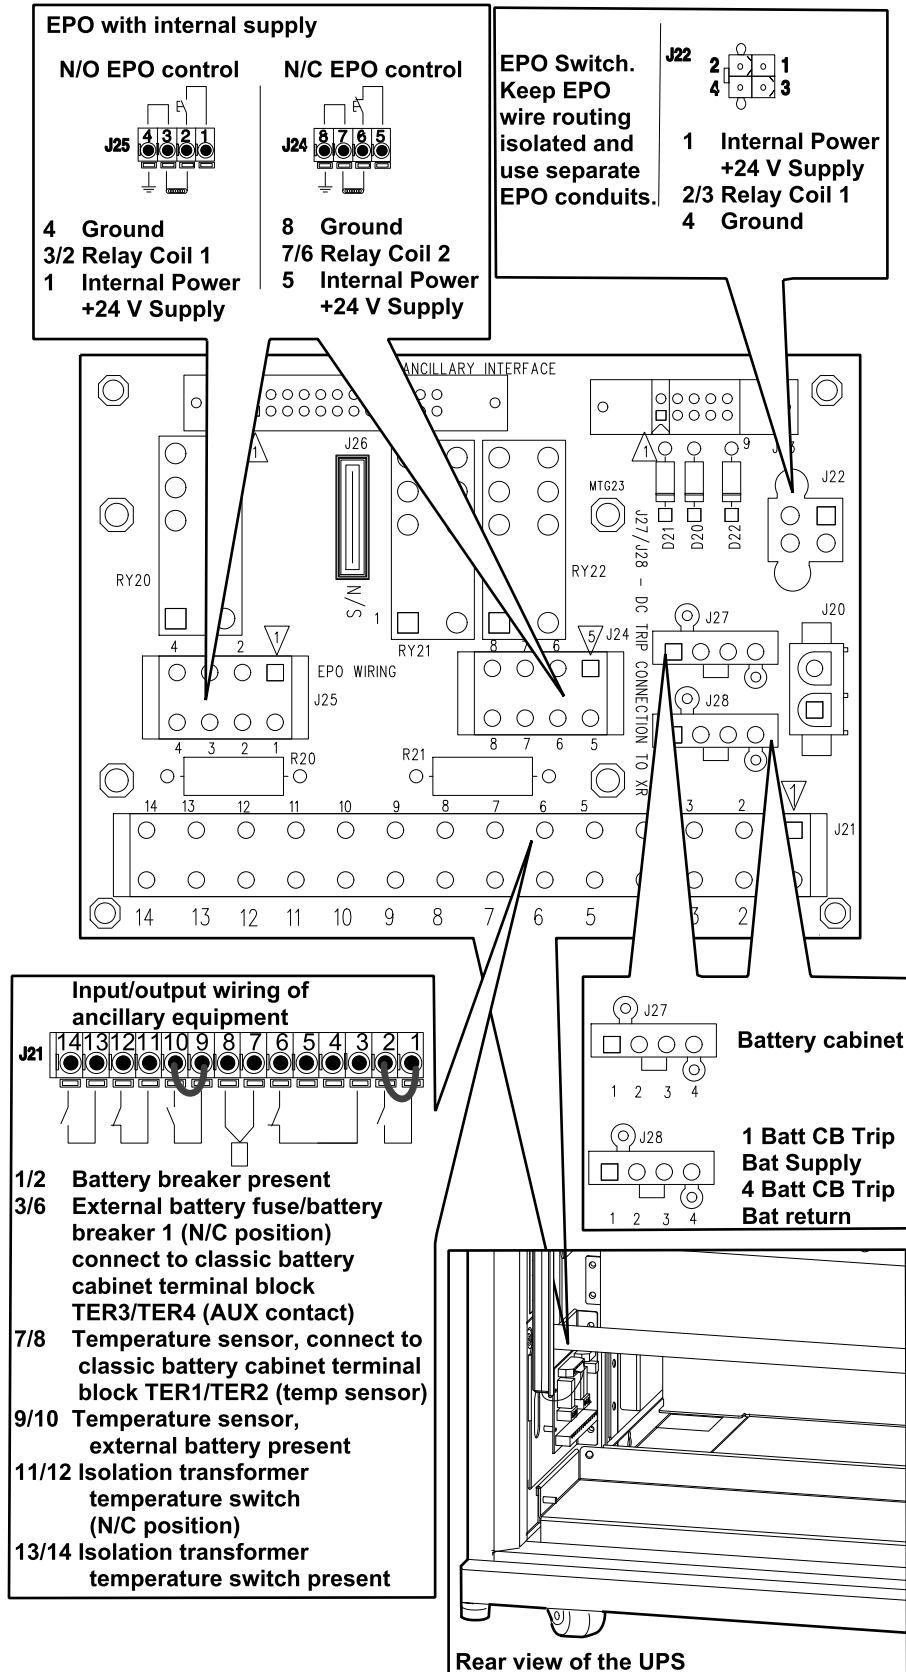

Compliance

| | |
|------------------------------------|---|
| Safety | IEC 62040-1: 2017, Edition 2.0, Uninterruptible Power Systems (UPS) - Part 1: Safety requirements |
| Safety for MBP | IEC 61439-1: 2020, Edition 3.0, Low-voltage switchgear and control gear assemblies - Part 1: General rules IEC 61439-2: 2020, Edition 3.0, Low-voltage switchgear and control gear assemblies - Part 2: Power switchgear and control gear assemblies |
| PDU with modular batteries and MBP | IEC 62040-1:2017 IEC 62040-1:2017/AMD1:2021 |
| EMC/EMI/RFI | IEC 62040-2: 2016-11, 3rd edition Uninterruptible Power Systems (UPS) - Part 2: Electromagnetic compatibility (EMC) requirements C3 |
| Performance | Performance in accordance with: IEC 62040-3: 2011 Uninterruptible Power Systems (UPS). Method of specifying the performance and test requirements. 2001 Classifications: VFI-SS-111 |
| Transportation | ISTA 2B (2006) |
| Seismic | SE CoC in accordance with AC 156 protocol |
| Earthing system | TN, TT, IT |
| Overvoltage category | This UPS is OVCII compliant. |
| Protective class | I |
| Pollution degree | 2 |

Facility Planning

Input Specifications

| | 96 kW | | | 160 kW | | |
|---|--|-------|-------|--------|-------|-------|
| | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V |
| Connection type | 3PH + N + PE ² | | | | | |
| Input frequency (Hz) | 40–70 | | | | | |
| Total harmonic distortion (THDI) | < 5% at full load | | | | | |
| Nominal input current (A) ³ | 154 | 146 | 141 | 256 | 243 | 234 |
| Maximum input current (A) ⁴ | 169 | 160 | 155 | 287 | 268 | 258 |
| Input current limitation (A) ⁵ | 197 | 197 | 197 | 295 | 295 | 295 |
| Minimum short circuit current rating | Dependent on upstream protection. See section Required Upstream and Downstream Protection for details. | | | | | |
| Input power factor correction | > 0.98 at load > 50% | | | | | |
| Maximum short circuit level Icc (kA) | Rated conditional short-circuit current Icc: 30 kA. Rated peak withstand current Ipk: Icc x 1.7. | | | | | |

Bypass Specifications

| | 96 kW | | | 160 kW | | |
|--------------------------------------|--|-------|-------|--------|-------|-------|
| | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V |
| Connection type | 3PH + N + PE ² | | | | | |
| Input frequency (Hz) | 40–70 | | | | | |
| Nominal input current (A) | 147 | 139 | 134 | 248 | 236 | 227 |
| Minimum short circuit current rating | Dependent on upstream protection. See section Required Upstream and Downstream Protection for details. | | | | | |
| Maximum short circuit level Icc (kA) | Rated conditional short-circuit current Icc: 30 kA. Rated peak withstand current Ipk: Icc x 1.7. | | | | | |

2. TN, TT, and IT power distribution systems with no earthed line conductors are supported.
3. Input current is based on nominal voltage and rated load, batteries fully charged
4. Input current is based on nominal voltage, rated load and full battery charge current.
5. Integrated electronic current limitation functionality.

Output Specifications

| | 96 kW | | | 160 kW | | |
|--|---|-------|-------|--------|-------|-------|
| | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V |
| Connection type | 3PH + N + PE | | | | | |
| Output capacity | 150% for 60 seconds (normal operation) 125% for 10 minutes (normal operation) 150% for 60 seconds (battery operation) 125% for 10 minutes (battery operation) 100% load (bypass operation) 1000% for 100 ms (bypass operation) | | | | | |
| Nom output current (A) | 147 | 139 | 134 | 248 | 236 | 227 |
| Output frequency (sync to bypass) | 47–53 Hz for 50 Hz nominal ⁶ | | | | | |
| Slew rate (Hz/sec) | Programmable to 0.25, 0.5, 1, 2, 4, and 6 | | | | | |
| Total harmonic distortion (THDU) | < 2% linear < 5% non-linear | | | | | |
| Output power factor | 0.5 leading to 0.5 lagging without derating | | | | | |
| Dynamic load response | +/- 5% | | | | | |
| Output voltage regulation | +/- 1% | | | | | |
| Crest factor | 2.7 | | | | | |
| Minimum short circuit current rating | Dependent on upstream protection. See section Required Upstream and Downstream Protection for details. | | | | | |
| Maximum short circuit level I _{cc} (kA) | Rated conditional short-circuit current I _{cc} : 30 kA. Rated peak withstand current I _{pk} : I _{cc} x 1.7. | | | | | |

Modular Battery Specifications

NOTE: The batteries must be connected to a DC rated circuit breaker.

| Battery Type | Sealed lead–acid |
|--|--|
| Nominal voltage (VDC) | +/- 192 (96 cells at 2 V) |
| Float voltage (VDC) | +/- 218 (96 cells at 2.27 V) |
| End of discharge voltage at full load (VDC) | +/- 154 (96 cells at 1.6 V) |
| End of discharge maximum battery current (A) | 96 kW: 332 160 kW: 550 |
| Maximum charging power ⁷ | 96 kW: 9.6/19.2 kW (selected via the display) 160 kW: 16/32 kW (selected via the display) |

NOTE: Battery specifications are based on VRLA batteries.

6. The following options can be selected: 40–60 Hz, 47–53 Hz, 49.9–50.1 Hz.

7. Input current limit may lower charging capability in some line and load conditions.

Classic Battery Specifications

| |
|---|
| NOTICE |
| HAZARD OF EQUIPMENT DAMAGE |
| Do not mix battery types in the same installation. |
| Failure to follow these instructions can result in equipment damage. |

| Pre-installed batteries | XP12V1800 | XP12V2500 |
|-------------------------------|------------------|-----------|
| Battery Type | Sealed lead-acid | |
| Nominal voltage (V) | 12 | 12 |
| Power ⁸ | 1370 | 1870 |
| Nominal capacity ⁹ | 56.4 | 69.5 |
| Internal resistance (mOhm) | 8.6 | 6.2 |
| Short circuit current (A) | 1521 | 2030 |

DC Power Levels for Battery Sizing with Output Power Factor = 1

| DC power in kW | | | | |
|----------------|------|------|-------|-------|
| Load | 25% | 50% | 75% | 100% |
| 32 kVA | 8.5 | 16.9 | 25.4 | 33.9 |
| 64 kVA | 16.9 | 33.9 | 50.8 | 67.7 |
| 96 kVA | 25.4 | 50.8 | 76.2 | 101.6 |
| 128 kVA | 33.9 | 67.7 | 101.6 | 135.4 |
| 160 kVA | 42.3 | 84.7 | 127.0 | 169.3 |

DC Power Levels for Battery Sizing with Output Power Factor = 0.8

| DC power in kVA | | | | |
|-----------------|------|------|-------|-------|
| Load | 25% | 50% | 75% | 100% |
| 32 kVA | 6.8 | 13.5 | 20.3 | 27.1 |
| 64 kVA | 13.5 | 27.1 | 40.6 | 54.2 |
| 96 kVA | 20.3 | 40.6 | 61.0 | 81.3 |
| 128 kVA | 27.1 | 54.2 | 81.3 | 108.4 |
| 160 kVA | 33.9 | 67.7 | 101.6 | 135.4 |

Maximum Current with Battery at End of Discharge (A)

| Load | 25% | 50% | 75% | 100% |
|-------|------|-------|-------|-------|
| 32 kW | 27.6 | 55.1 | 82.7 | 110.2 |
| 64 kW | 55.1 | 110.2 | 165.3 | 220.5 |

8. 15 min 1.60 VDC 25 °C W/block
 9. C₁₀ 1.80 VDC 25 °C Ah

| | | | | |
|--------|-------|-------|-------|-------|
| 96 kW | 82.7 | 165.3 | 248.0 | 330.7 |
| 128 kW | 110.2 | 220.5 | 330.7 | 440.9 |
| 160 kW | 137.8 | 275.6 | 413.4 | 551.1 |

Recommended Cable, Bolt and Lug Sizes

NOTE: All wiring must comply with all applicable local and/or national electrical codes.

The recommended cable sizes are based on an environment with an ambient temperature of 30 °C (86 °F) .

Temperature of the conductors: 90 °C (104 °F).

Refer to IEC 60364-5-52 for installation methods. The cable sizes are recommendations for maximum configurations and copper cables.

| Cable | Terminal bolt diameter | Cable size | Cable lug type |
|-----------|------------------------|-------------------------|----------------|
| Input | M10 | 2 x 120 mm ² | LCA4/0-12H-X |
| Bypass | M10 | 250 mm ² | LCA500-12H-X |
| Battery 1 | M10 | 150 mm ² | LCA300-12H-X |
| Battery 2 | M10 | 150 mm ² | LCA300-12H-X |
| Output | M10 | 250 mm ² | LCA500-12H-X |

Required Upstream and Downstream Protection for Building Installation

The specified upstream breakers below are required to obtain the conditional short-circuit current rating, I_{cc} at 30 kA symmetrical rms.

⚠️⚠️ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Circuit breakers must have instantaneous trip time of maximum 60 ms.
- Circuit breakers must have instantaneous override values set according to the table below.

Failure to follow these instructions will result in death or serious injury.

Single and Dual Mains Systems

Input and Bypass

With Breaker PowerPact NLGF36400U3XTW

| | 96 kW | | 160 kW | |
|--|--------|--------|--------|--------|
| | Input | Bypass | Input | Bypass |
| Trip setting | 96 kW | 96 kW | 160 kW | 160 kW |
| I _r (A) | 225 | 160 | 400 | 250 |
| I _r (@ 6 I _r) ¹⁰ | 0.5–16 | 0.5–16 | 0.5–16 | 0.5–16 |
| I _i (x I _n) | 1.5–12 | 1.5–12 | 1.5–12 | 1.5–12 |

Output

| | 96 kW 400 V | | 160 kW 400 V | |
|---|--------------------|-------------|--------------------|-------------|
| | Fuse | Breaker (A) | Fuse | Breaker (A) |
| Battery breaker (max value) ¹¹ | — | 550 | — | 550 |
| UPS output Q2 | 160 A gL type fuse | 160 | 250 A gL type fuse | 250 |

Physical

Weights and Dimensions

| | Part number | Weight kg | Height mm | Width mm | Depth mm |
|---|-------------|-----------|-----------|----------|----------|
| 96 and 160 kW UPS cabinet ¹² | (SYCF160KH) | 325 | 2011 | 600 | 1070 |

10. I_r and I_{sd} must be set by the installer based on the installation coordination
 11. For more information see .
 12. Not including power modules.


Shipping Weights and Dimensions

| | Part number | Weight kg | Height mm | Width mm | Depth mm |
|---|-------------|-----------|-----------|----------|----------|
| 96 and 160 kW UPS cabinet ¹³ | (SYCF160KH) | 358 | 2140 | 848 | 1210 |

Clearance Symmetra PX 96 and 160 kW

NOTE: Clearance dimensions are published for airflow and service access only. Consult with the local safety codes and standards for additional requirements in your local area.

NOTE: Rear clearance can only be reduced to 300 mm for ventilation when the UPS cabinet is used in push-to-wall installations, typically together with the classic battery cabinet.

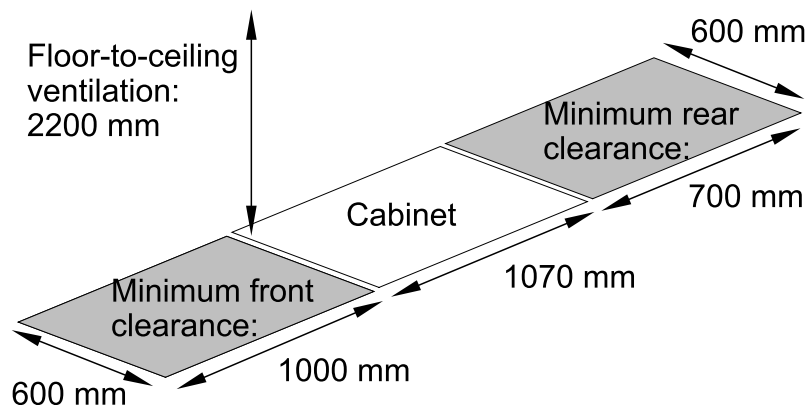

Environmental

| | Operation | Storage |
|---|---|--------------|
| Temperature | 0 to 40 °C | -15 to 40 °C |
| Relative humidity | 0 - 95% | 0 - 95% |
| Elevation | 0-1000 m: 100% load 1000-1500 m: 95% load 1500-2000 m: 91% load 2000-2500 m: 86% load 2500-3000 m: 82% load | 0-15000 m |
| Audible noise at 1 meter from surface of unit | 63.00 dBA | |
| Protection class | NEMA 1 | |
| Colour | Black | |

Heat Dissipation

NOTE: Full load heat loss at nominal mains and fully charged batteries.

| UPS rating | 32 kW | 64 kW | 96 kW | 128 kW | 160 kW |
|-------------------------------|-------------|--------------|--------------|--------------|--------------|
| Heat dissipation kWh (BTU/hr) | 1.68 (5748) | 3.37 (11496) | 5.05 (17244) | 6.73 (22992) | 8.42 (28741) |


13. Not including power modules.

Drawings

NOTE: A comprehensive set of drawings is available on www.se.com.

NOTE: These drawings are for reference ONLY – subject to change without notice.

Symmetra PX Single System with PDU with Modular Batteries

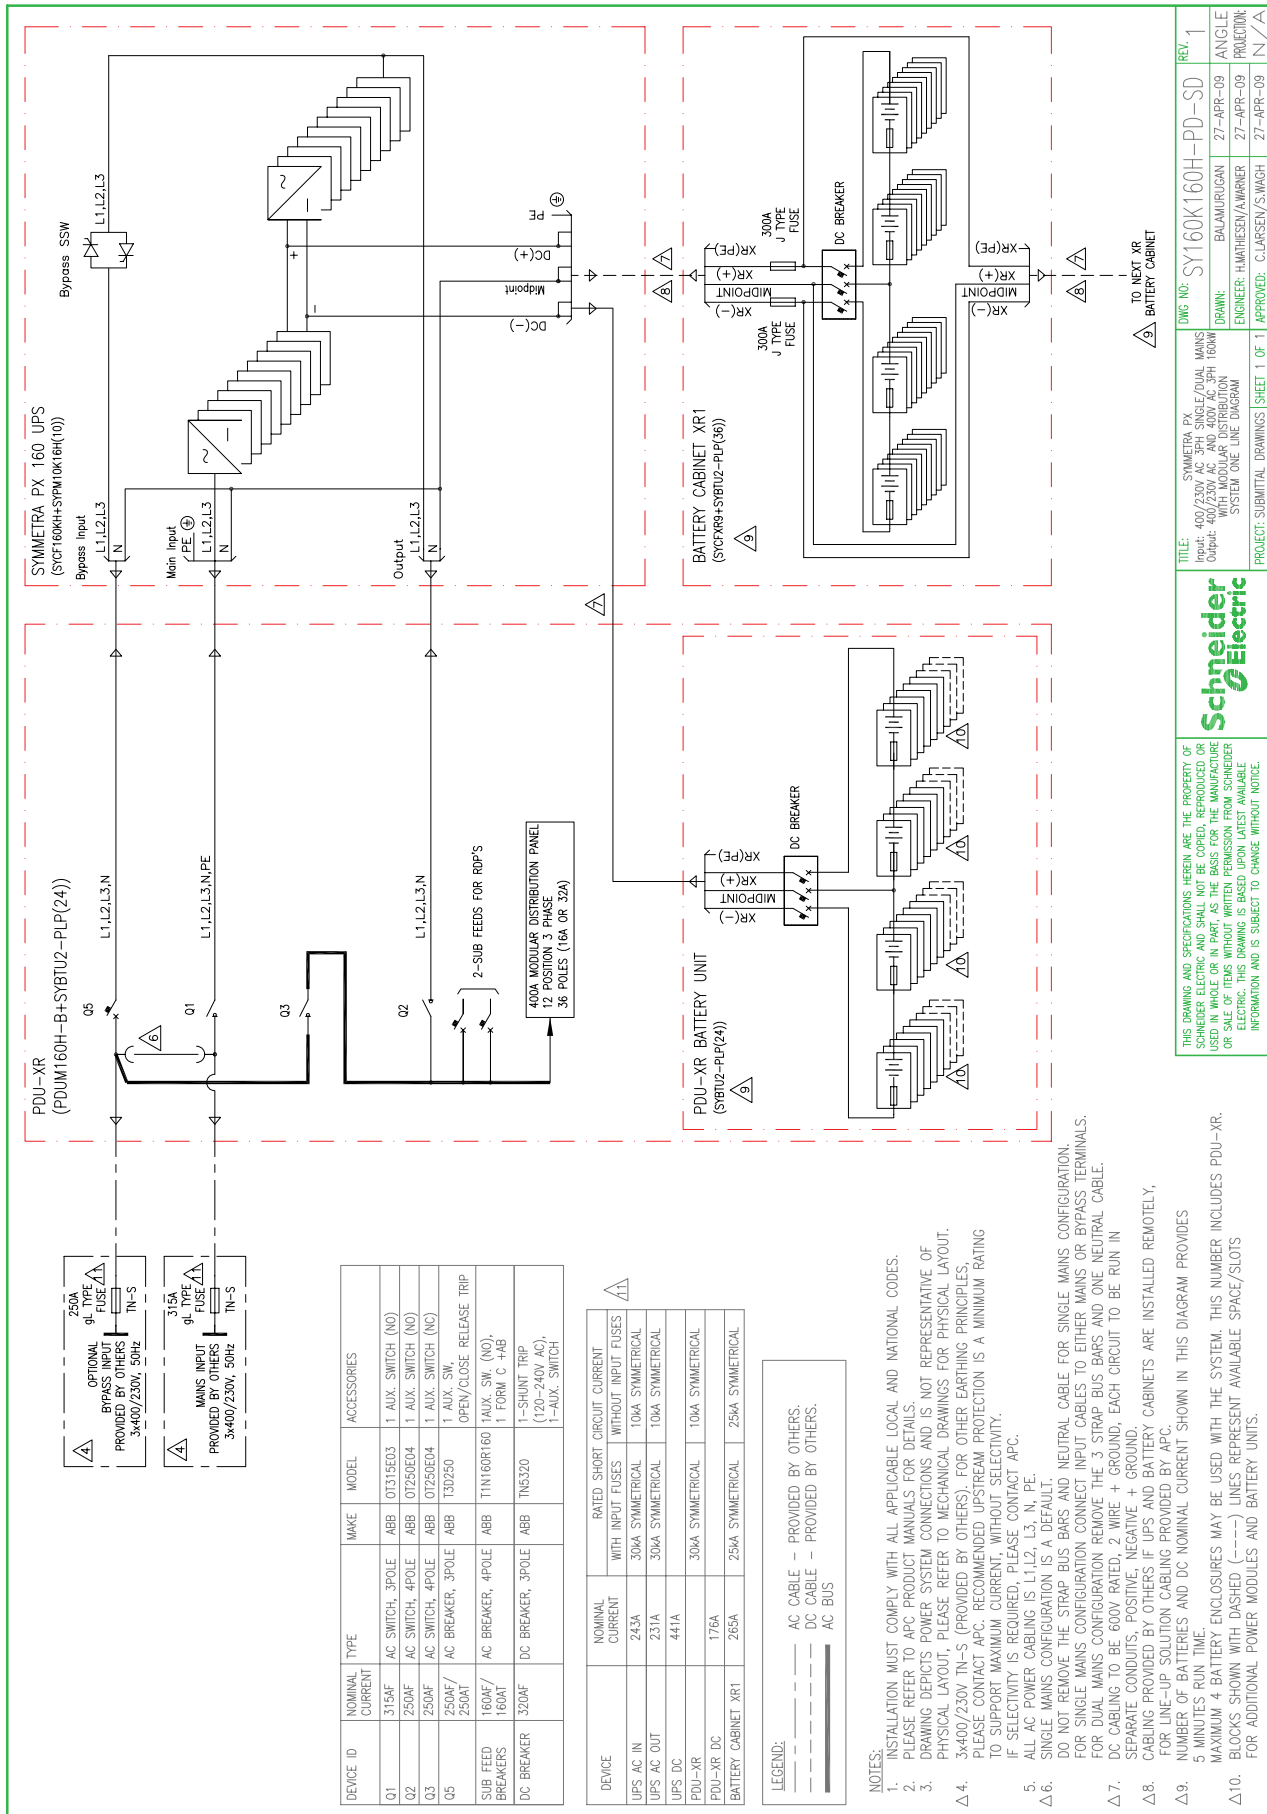

Options

Hardware Options

Modular Battery Cabinets

| | |
|---|------------|
| High-performance battery module for 400V Symmetra PX 48/96/160KW & 208V Symmetra PX 100 KW | SYBT9–B4 |
| High-performance long-life battery module for 400V Symmetra PX 48/96/160KW & 208V Symmetra PX 100 KW | SYBT9–B4LL |
| Symmetra PX Modular battery cabinet for 400V PX 96/160kW & 208V PX 100kW for 9 Battery Modules | SYCFXR9 |
| Symmetra PX Modular battery cabinet for 400V PX 96/160kW & 208V PX 100kW with 9 Battery Modules & Startup | SYCFXR9–9 |
| Symmetra PX Modular battery cabinet for 400V PX 96/160kW & 208V PX 100kW for 9 Battery Modules & Startup | SYCFXR9–S |

Classic Battery Cabinets

| | |
|--|---------------|
| Symmetra PX 96/160kW Classic battery cabinet with classic batteries A ¹⁴ | SYPBV96K160HA |
| Symmetra PX 96/160kW Classic battery cabinet with classic batteries B ¹⁴ | SYPBV96K160HB |
| Symmetra PX 96/160kW Classic battery cabinet (empty) for third party batteries ¹⁴ | SYPBV96K160H |

Power Module

| | |
|---|------------|
| Symmetra PX Power Module, 10/16kW, 400V | SYPM10K16H |
|---|------------|

Modular Power Accessories

| | |
|---|----------------|
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 1080cm | PDX316IEC-1080 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 120cm | PDX316IEC-120 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 1200cm | PDX316IEC-1200 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 240cm | PDX316IEC-240 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 360cm | PDX316IEC-360 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 480cm | PDX316IEC-480 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 600cm | PDX316IEC-600 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 720cm | PDX316IEC-720 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 840cm | PDX316IEC-840 |
| Modular IT Power Distribution Cable Extender 3 Wire 16A IEC309 960cm | PDX316IEC-960 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 1080cm | PDX332IEC-1080 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 120cm | PDX332IEC-120 |

14. Product availability may depend on geographical location

| | |
|---|--------------------|
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 1200cm | PDX332IEC-1200 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 240cm | PDX332IEC-240 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 360cm | PDX332IEC-360 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 480cm | PDX332IEC-480 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 600cm | PDX332IEC-600 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 720cm | PDX332IEC-720 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 840cm | PDX332IEC-840 |
| Modular IT Power Distribution Cable Extender 3 Wire 32A IEC309 960cm | PDX332IEC-960 |
| IT Power Distribution Module 3x1 Pole 3 Wire 16A 3xIEC309 300cm, 360cm, 420cm | PDM1316IEC-3P |
| IT Power Distribution Module 3x1 Pole 3 Wire 32A 3xIEC309 300cm, 360cm, 420cm | PDM1332IEC-3P |
| IT Power Distribution Module 3x1 Pole 3 Wire 32A 3xIEC309 480cm, 540cm, 600cm | PDM1332IEC-3P-2 |
| IT Power Distribution Module 3x1 Pole 3 Wire 32A 3xIEC309 660cm, 720cm, 780cm | PDM1332IEC-3P-3 |
| Power Dist. Mod. 3x1 POLE 3 WIRE RCD 32A 3xIEC309 300CM, 360CM, 420CM | PDM2332IEC-3P30R-1 |
| Power Dist. Mod. 3x1 POLE 3 Wire RCD 32A 3xIEC309 480CM, 540CM, 600CM | PDM2332IEC-3P30R-2 |
| Power Dist. Mod. 3x1 POLE 3 Wire RCD 32A 3xIEC309 660CM, 720CM, 780CM | PDM2332IEC-3P30R-3 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 16A 30mA IEC309 1040CM | PDM316IEC-30R-1040 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 16A 30mA IEC309 140CM | PDM316IEC-30R-140 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 16A 30mA IEC309 320CM | PDM316IEC-30R-320 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 16A 30mA IEC309 500CM | PDM316IEC-30R-500 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 16A 30mA IEC309 680CM | PDM316IEC-30R-680 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 16A 30mA IEC309 860CM | PDM316IEC-30R-860 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 32A 30mA IEC309 1040CM | PDM332IEC-30R-1040 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 32A 30mA IEC309 140CM | PDM332IEC-30R-140 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 32A 30mA IEC309 320CM | PDM332IEC-30R-320 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 32A 30mA IEC309 500CM | PDM332IEC-30R-500 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 32A 30mA IEC309 680CM | PDM332IEC-30R-680 |
| Power Dist. Mod. 3 Pole 5 Wire RCD 32A 30mA IEC309 860CM | PDM332IEC-30R-860 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 1040cm | PDM3516IEC-1040 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 140cm | PDM3516IEC-140 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 200cm | PDM3516IEC-200 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 260cm | PDM3516IEC-260 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 320cm | PDM3516IEC-320 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 380cm | PDM3516IEC-380 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 440cm | PDM3516IEC-440 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 500cm | PDM3516IEC-500 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 560cm | PDM3516IEC-560 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 620cm | PDM3516IEC-620 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 680cm | PDM3516IEC-680 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 740cm | PDM3516IEC-740 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 80cm | PDM3516IEC-80 |

| | |
|--|-----------------|
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 800cm | PDM3516IEC-800 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 860cm | PDM3516IEC-860 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 920cm | PDM3516IEC-920 |
| IT Power Distribution Module 3 Pole 5 Wire 16A IEC309 980cm | PDM3516IEC-980 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 1040cm | PDM3532IEC-1040 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 140cm | PDM3532IEC-140 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 200cm | PDM3532IEC-200 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 260cm | PDM3532IEC-260 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 320cm | PDM3532IEC-320 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 380cm | PDM3532IEC-380 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 440cm | PDM3532IEC-440 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 500cm | PDM3532IEC-500 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 560cm | PDM3532IEC-560 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 620cm | PDM3532IEC-620 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 680cm | PDM3532IEC-680 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 740cm | PDM3532IEC-740 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 800cm | PDM3532IEC-800 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 860cm | PDM3532IEC-860 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 920cm | PDM3532IEC-920 |
| IT Power Distribution Module 3 Pole 5 Wire 32A IEC309 980cm | PDM3532IEC-980 |
| Modular IT Power Distribution Cable Extender 5 Wire 16A IEC309 300cm | PDX516IEC-300 |
| Modular IT Power Distribution Cable Extender 5 Wire 16A IEC309 600cm | PDX516IEC-600 |
| Modular IT Power Distribution Cable Extender 5 Wire 32A IEC309 300cm | PDX532IEC-300 |
| Modular IT Power Distribution Cable Extender 5 Wire 32A IEC309 600cm | PDX532IEC-600 |

Modular Power Distribution

| | |
|---|-------------|
| Modular Rack Distribution Panel, 138kW, 200A, 400V, 18 Pole, 5U | PDPM138H-5U |
| Modular Rack-mounted Distribution Panel, 138kW, 200A, 400V, 18 Pole, 5U | PDPM138H-R |
| Modular Remote Power Panel, 277kW, 400A, 400V, 72 Pole, 300mm | PDPM277H |

External Maintenance Bypass

| | |
|--|---------------|
| Symmetra PX 96/160kW External maintenance bypass enclosure | SYMBP160H |
| Symmetra PX 96/160kW External maintenance bypass enclosure | SYWMP96K160H2 |

UPS Network Management Cards

| | |
|--|--------|
| UPS Network Management Card with Environmental Monitoring and Out of Band Management | AP9618 |
|--|--------|

Configuration Options

- Unity power factor corrected
- TÜV-verified high efficiency (95% at 30% load)
- Internal N+1 redundancy
- Swappable battery and power modules
- Main and redundant intelligence modules
- Service
- Automatic internal bypass
- Dual mains input
- Top or bottom feed
- Line-up/remote modular battery cabinets
- Extended battery runtime available
- Service included
- Generator compatible
- Network manageable
- StruxureWare Central compatible
- Secondary network management card
- SmartSlot device management cards
- Optional modular PDU with maintenance bypass and power distribution modules

Limited Factory Warranty

One-Year Factory Warranty

The limited warranty provided by Schneider Electric in this Statement of Limited Factory Warranty applies only to products you purchase for your commercial or industrial use in the ordinary course of your business.

Terms of Warranty

Schneider Electric warrants that the product shall be free from defects in materials and workmanship for a period of one year from the date of product start-up, when start-up is performed by Schneider Electric-authorized service personnel, or within 18 months from the shipment date from Schneider Electric, whichever occurs first. This warranty covers repairing or replacing any defective parts including on-site labor and travel. In the event that the product fails to meet the foregoing warranty criteria, the warranty covers repairing or replacing defective parts at the sole discretion of Schneider Electric for a period of one year from the shipment date.

Non-transferable Warranty

This warranty is extended to the first person, firm, association or corporation (herein referred to by "You" or "Your") for whom the Schneider Electric product specified herein has been purchased. This warranty is not transferable or assignable without the prior written permission of Schneider Electric.

Assignment of Warranties

Schneider Electric will assign you any warranties which are made by manufacturers and suppliers of components of the Schneider Electric product and which are assignable. Any such warranties are assigned "AS IS" and Schneider Electric makes no representation as to the effectiveness or extent of such warranties, assumes no responsibility for any matters which may be warranted by such manufacturers or suppliers and extends no coverage under this Warranty to such components.

Drawings, Descriptions

Schneider Electric warrants for the warranty period and on the terms of the warranty set forth herein that the Schneider Electric product will substantially conform to the descriptions contained in the Schneider Electric Official Published Specifications or any of the drawings certified and agreed to by contract with Schneider Electric if applicable thereto ("Specifications"). It is understood that the Specifications are not warranties of performance and not warranties of fitness for a particular purpose.

Exclusions

Schneider Electric shall not be liable under the warranty if its testing and examination disclose that the alleged defect in the product does not exist or was

caused by end user or any third person misuse, negligence, improper installation or testing. Further, Schneider Electric shall not be liable under the warranty for unauthorized attempts to repair or modify wrong or inadequate electrical voltage or connection, inappropriate on-site operation conditions, corrosive atmosphere, repair, installation, start-up by non-Schneider Electric designated personnel, a change in location or operating use, exposure to the elements, Acts of God, fire, theft, or installation contrary to Schneider Electric recommendations or specifications or in any event if the Schneider Electric serial number has been altered, defaced, or removed, or any other cause beyond the range of the intended use.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE, OF PRODUCTS SOLD, SERVICED OR FURNISHED UNDER THIS AGREEMENT OR IN CONNECTION HEREWITH. SCHNEIDER ELECTRIC DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTION AND FITNESS FOR A PARTICULAR PURPOSE. SCHNEIDER ELECTRIC EXPRESS WARRANTIES WILL NOT BE ENLARGED, DIMINISHED, OR AFFECTED BY AND NO OBLIGATION OR LIABILITY WILL ARISE OUT OF, SCHNEIDER ELECTRIC RENDERING OF TECHNICAL OR OTHER ADVICE OR SERVICE IN CONNECTION WITH THE PRODUCTS. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES AND REMEDIES. THE WARRANTIES SET FORTH ABOVE CONSTITUTE SCHNEIDER ELECTRIC SOLE LIABILITY AND PURCHASER'S EXCLUSIVE REMEDY FOR ANY BREACH OF SUCH WARRANTIES. SCHNEIDER ELECTRIC WARRANTIES RUN ONLY TO PURCHASER AND ARE NOT EXTENDED TO ANY THIRD PARTIES.

IN NO EVENT SHALL SCHNEIDER ELECTRIC, ITS OFFICERS, DIRECTORS, AFFILIATES OR EMPLOYEES BE LIABLE FOR ANY FORM OF INDIRECT, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, ARISING OUT OF THE USE, SERVICE OR INSTALLATION, OF THE PRODUCTS, WHETHER SUCH DAMAGES ARISE IN CONTRACT OR TORT, IRRESPECTIVE OF FAULT, NEGLIGENCE OR STRICT LIABILITY OR WHETHER SCHNEIDER ELECTRIC HAS BEEN ADVISED IN ADVANCE OF THE POSSIBILITY OF SUCH DAMAGES. SPECIFICALLY, SCHNEIDER ELECTRIC IS NOT LIABLE FOR ANY COSTS, SUCH AS LOST PROFITS OR REVENUE, LOSS OF EQUIPMENT, LOSS OF USE OF EQUIPMENT, LOSS OF SOFTWARE, LOSS OF DATA, COSTS OF SUBSTITUANTS, CLAIMS BY THIRD PARTIES, OR OTHERWISE.

NO SALESMAN, EMPLOYEE OR AGENT OF SCHNEIDER ELECTRIC IS AUTHORIZED TO ADD TO OR VARY THE TERMS OF THIS WARRANTY. WARRANTY TERMS MAY BE MODIFIED, IF AT ALL, ONLY IN WRITING SIGNED BY AN SCHNEIDER ELECTRIC OFFICER AND LEGAL DEPARTMENT.

Warranty Claims

Customers with warranty claims issues may access the SCHNEIDER ELECTRIC worldwide customer support network through the SCHNEIDER ELECTRIC web site: <http://www.schneider-electric.com>. Select your country from the country selection pull-down menu. Open the Support tab at the top of the web page to obtain contact information for customer support in your region.

Schneider Electric
35 rue Joseph Monier
92500 Rueil Malmason
France

+ 33 (0) 1 41 29 70 00

www.schneider-electric.com

As standards, specifications, and design change from time to time,
please ask for confirmation of the information given in this publication.

© 2013 – 2024 . All rights reserved.

990–3879G-001