

| REV | DESCRIPTION | BY | DATE | | | | | | |
|-----|-------------|-----|------|-----|-----|-----|-----|-----|-----|
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

FROM EMERGENCY POWER CIRCUIT


EM POWER INPUT CLASS 1
120/277VAC (BLUE)

EM POWER OUTPUT CLASS 1
120/277VAC (YELLOW)




CONNECT INPUT 1 TO 120VAC POWER MONITORING, OR
CONNECT INPUT 2 TO 277VAC POWER MONITORING
CONNECT INPUT 4 TO REGULAR POWER NEUTRAL
CONNECT SAME PHASE AS OCCUPANCY CONTROLLER
POWER


NOTE:
IF THE DEVICE IS POWERED BY 120VAC,
THEN INPUT 3 MUST BE POWERED BY
120VAC. THIS RULE APPLIES FOR
277VAC. CLASS 1 WIRING

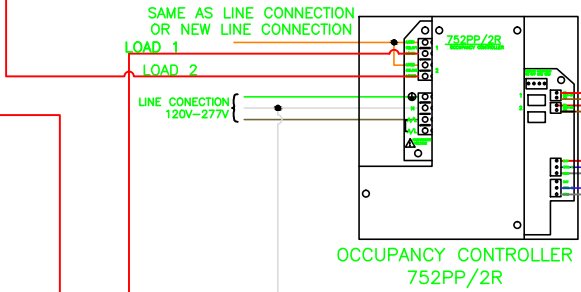

OCCUPANCY CONTROLLER
752PP/2R

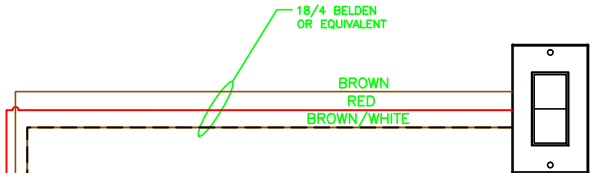

DUAL BUTTON LOW
VOLTAGE SWITCH
SLSLVS2x

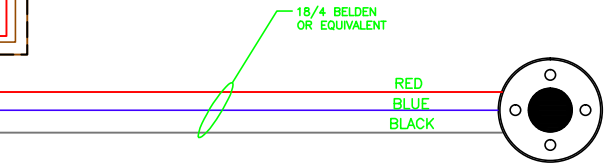

DUAL TECH
SENSOR SLSCUS501

NOTICE:

THIS DOCUMENT DOES NOT TAKE THE PLACE OF THE INSTRUCTION BULLETIN THAT IS PROVIDED WITH THE DEVICE. ANY ADDITIONAL INFORMATION CAN BE FOUND IN THE INSTRUCTION BULLETIN.

NOTE:
DRAWING DEPICTS A TYPICAL NON-NETWORK APPLICATION FOR A ONE- TO TWO-STALL RESTROOM UP TO 500 SQ. FT. WITH TWO LIGHTING CHANNELS AND NO DAYLIGHT HARVESTING OR RECEPTACLE-CONTROL REQUIREMENTS. PROVIDES 360 DEGREE, ULTRASONIC OCCUPANCY SENSING, MANUAL ON/OFF CONTROL, OPTIONAL AUTO-ON SETTING PER CHANNEL, AND AUTOMATIC BYPASS OF LIGHTING CONTROLS FOR EMERGENCY EGRESS LIGHTING (ONE CIRCUIT).

*FOR TECHNICAL ASSISTANCE CONTACT SCHNEIDER ELECTRIC AT (855) 237-0788

EMAIL:
Quotations: Lightingcontrol.quotations@us.schneider-electric.com
Tech Support: Lightingcontrol.support@us.schneider-electric.com

| | |
|-----------------|------------------------------|
| JOB NAME: | LIGHTING CONTROL APPLICATION |
| JOB LOCATION: | --- |
| DRAWN BY: | JOHN PURVIANCE |
| ENGR: | HEATH MARTIN |
| DATE: | FEBRUARY 21, 2014 |
| DRAWING STATUS: | --- |

| | |
|------------------------|-----------------------------------|
| EQUIPMENT DESIGNATION: | --- |
| EQUIPMENT TYPE: | --- |
| DRAWING TYPE: | LIGHTING CONTROL APPLICATION 132e |

