


---

# Ultrasonic sensors

## XX range

## Catalogue

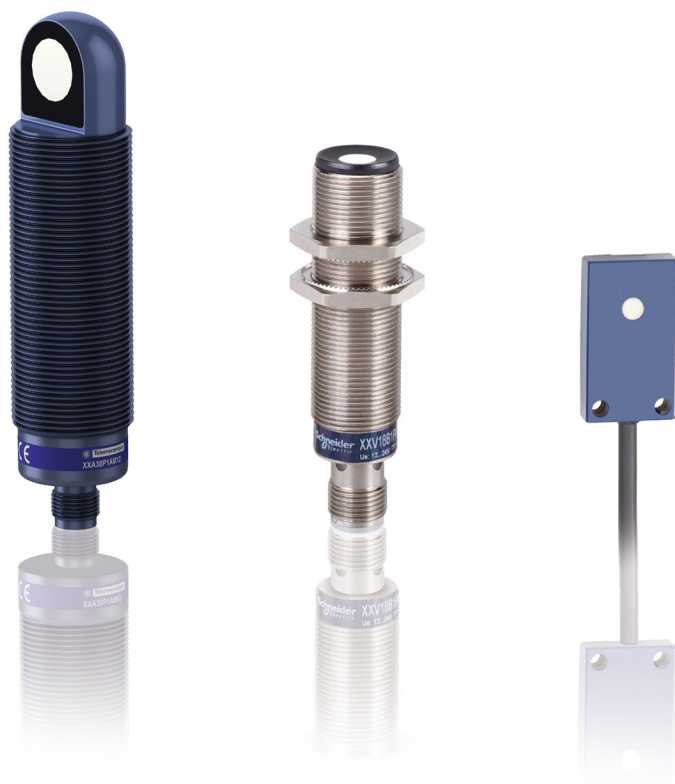

Simply easy!™

# Optimise detection with XX range

Detect objects in challenging applications with our XX ultrasonic sensors range. These ultrasonic sensors offer an efficient solution for reliable and high performance detection at distances of up to 8 m, on window mode\*.

\* The window mode enables suppression of the foreground and the background using the same sensor.

## > A technology suited to your needs

Detect objects regardless lightning conditions or material reflectivity degree.

## > 3 operating modes for efficient detection

Ideal for detecting irregular-shaped objects.

## > Short or long distance detection

From 50 mm up to 8 m.

## Contents

<b>Selection guide based on applications</b> .....	pages 4 and 5
<b>Product selection guide</b> .....	pages 6 to 9
<b>Application examples</b> .....	pages 10 to 15
<b>General</b> .....	pages 16 to 21
<b>Cylindrical sensors</b> .....	pages 22 to 61
<b>Obstacle detection system for mobile equipment</b> .....	pages 62 to 71
<b>Flat format sensors</b> .....	pages 72 to 77
<b>XX configuration software</b> .....	pages 78 to 81
<b>Accessories</b> .....	pages 82 and 83
<b>Product reference index</b> .....	page 84

## > A technology suited to your needs

Ultrasonic sensors enable non-contact detection of objects in many kinds of industrial environment, irrespective of :

- material (metal, plastic, wood, cardboard, etc.),
- nature (solid, liquid, powder, paste, etc.),
- colour,
- degree of transparency.


The ultrasonic sensors are simple to install; they feature integrated connectors, or cable versions in select models, and offer a wide range of cabling and mounting accessories for a seamless integration.

## > 3 operating modes for efficient detection

### Diffuse mode

An object reflects the ultrasonic wave back to the sensor which, in turn, changes the output state.


This operating mode is well suited for detecting objects with flat surfaces that are positioned perpendicularly to the direction of the ultrasonic beam.



### Reflex mode

The sensor is permanently detecting a fixed background (previously taught) on a machine or application. When another object breaks the ultrasonic beam, the output changes its state.


Well suited for detecting objects that absorb the ultrasonic waves (sponges, etc.) or that do not reflect the wave back to the sensor (non-flat surfaces, pointy or irregular-shaped objects).

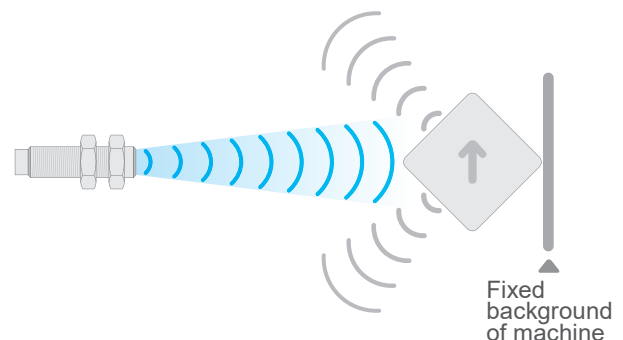

### Thru-beam mode

The transmitter is constantly sending an ultrasonic wave to the receiver. When an object breaks the ultrasonic beam, the output changes its state.

Well suited for small object detection and applications where higher accuracy and faster response time are required.

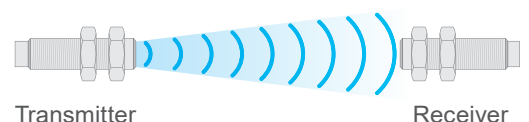


## > Long distance proximity detection

Ultrasonic technology allows now for long distance proximity detection. The XXV Ø18 ultrasonic sensors enable detection from 0 to 50 mm (i.e. 2.5 times farther than standard inductive proximity sensors) with minimal environment constraints or object material and colour restrictions.


Sensors mounted too close to moving-metal parts are exposed to hits or impacts which can cause machine downtime. Being able to install sensors farther away from moving targets reduces the exposure to potential incidents. You increase installation profitability!

**x 2.5**  
detection distance  
than standard  
inductive proximity  
sensors

XXV Ø 18 sensor

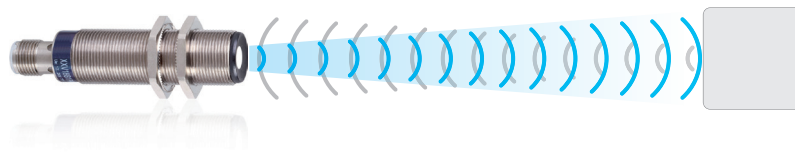


Standard inductive proximity sensor

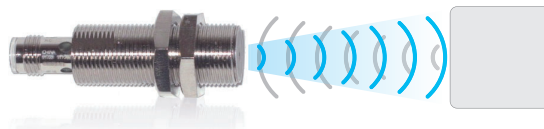

The XXV ultrasonic sensor is a “Plug and Play” solution with no adjustment or teaching required. Its solid-state output changes state when an object is less than 50 mm away from the sensor face.

Its accurate and well-defined transmission angle enables precise detection. Crosstalk with other sensors and object edge effects are mastered.













Plug & Play solution



**100 %**  
Worldwide availability

Sensor type	Detection "Digital"							Regulation "Analogue output"					Level monitoring		Mobile equipment
-------------	---------------------	--	--	--	--	--	--	------------------------------	--	--	--	--	------------------	--	------------------



Assembly		Conveying			Packaging	
Machine part	Vibrating bowl	Presence Absence	Transparent bottles	Jam	Flow	Transparent film



Ø 18 (M18x1)



Ø 12 (M12x1)



Ø 18 (M18x1)



Ø 30 (M30x1.5)



79x32.5+Ø 54



7.6x19x33




16x30x74



18x33x60  
Ø 18 (M18x1)



80x80x34

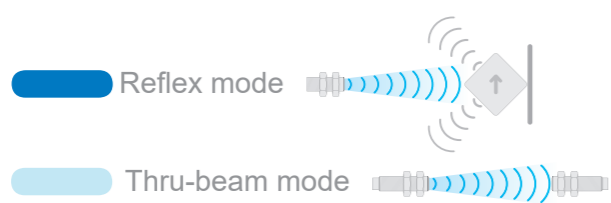

Conveying		Packaging	Handling		Process		Handling
Material level	Height of part	Radius of strip roll	Height of elevating table	Aircraft boarding bridge	Monitoring 2 thresholds	Filling Emptying	Forklift

[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	
[Bar]		[Bar]		[Bar]		[Bar]	



# Ultrasonic sensors

XX range  
Cylindrical type

**Applications**  
Non-contact detection of sound reflecting objects regardless their shape, material, colour, orientation, etc.

## Sensors with solid-state digital output

Cylindrical type

Ø 12 (M12 x 1)




Ø 18 (M18 x 1)



Ø 18 (M18 x 1) (continued)



Ø 30 (M30 x 1.5)

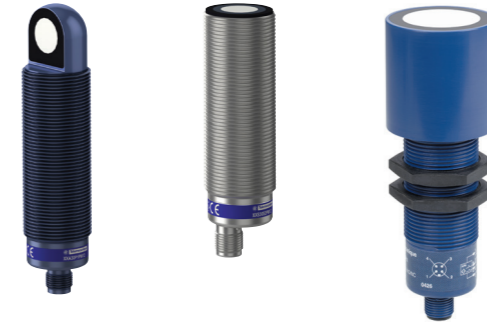

Cylindrical type

Application, monitoring 2 levels

Ø 18 (M18 x 1)

Ø 30 (M30 x 1.5)



Sensing distance Sn	Diffuse					
	Reflex					
	Thru-beam					
Assured operating distance (mm)	6.4...51 fixed	6.4...102 fixed	–	2...50 fixed	25...152 fixed	Adjustable using teach mode
Power supply	12...24 V $\overline{\text{---}}$ with protection against reverse polarity					
Type of output	PNP/NPN	NPN or PNP	PNP/NPN	PNP or NPN	PNP/NPN	NPN or PNP
Function	NO	NO	NO/NC	NO NC	NO	NO
Degree of protection	IP 67	IP 67	IP 67	IP 67	IP 67	IP 67
Connection	M8 connector	M8 connector	M8 connector	M12 connector or pre-cabled	M12 connector	M12 connector or pre-cabled
Sensor type	XX512A1●	XX512A2●	XX●12A8●	XXV18B1●	XX518A1●	XX518A3●
Page	22		22		26	

5 cm	10 cm	–	5 cm	15 cm	50 cm
–	–	–	–	–	50 cm
–	–	20 cm	–	–	–
6.4...51 fixed	6.4...102 fixed	–	2...50 fixed	25...152 fixed	Adjustable using teach mode
12...24 V $\overline{\text{---}}$ with protection against reverse polarity					
PNP/NPN	NPN or PNP	PNP/NPN	PNP or NPN	PNP/NPN	NPN or PNP
NO	NO	NO/NC	NO NC	NO	NO
IP 67	IP 67	IP 67	IP 67	IP 67	IP 67
M8 connector	M8 connector	M8 connector	M12 connector or pre-cabled	M12 connector	M12 connector or pre-cabled
XX512A1●	XX512A2●	XX●12A8●	XXV18B1●	XX518A1●	XX518A3●
22		22		26	

–	1 m	1 m	2 m/4 m depending on model	8 m	50 cm	1 m/2 m depending on model	8 m
–	1 m	1 m	2 m/4 m depending on model	8 m depending on model	–	–	–
61 cm/1 m	–	–	–	–	–	–	–
–	Adjustable using teach mode	Adjustable using teach mode			Adjustable using teach mode		
12...24 V $\overline{\text{---}}$ with protection against reverse polarity						12...24 V $\overline{\text{---}}$ with protection against reverse polarity	
PNP/NPN	PNP	PNP or NPN or PNP/NPN		PNP or NPN	PNP or NPN	PNP/NPN	PNP
NO NC	NO or NC (selectable)	NO or NC or NO+NC or NO+NO		NO + NC NO or NC (selectable)	NO	NO + NO	NO + NO
IP 67	IP 67	IP 67	IP 67	IP 67	IP 67	IP 67	IP 67
M12 connector	M12 connector	M12 connector	M12 connector	M12 connector	M12 connector	M12 connector	M12 connector
XX●18A3● XX●18A4●	XX●18●1PM12	XX●30●●1PM12 XX6V3A1● XX630A1●	XX●30●●2PM12 XXS30●●4PM12 XX630A2●	XX630A3● XXS30P8PPM12 XXS30P8NNM12	XX218A3●	XX230A1● XX230A2●	XX230A3●
26	30	36 and 42			40		(1)

## Sensors with analogue output

Cylindrical type

Ø 18 (M12 x 1)



Ø 30 (M30 x 1.5)



Sensing distance Sn	50 cm	1 m
Assured operating distance (mm)	Adjustable using teach mode	Adjustable using teach mode
Power supply	12...24 V $\overline{\text{---}}$ with protection against reverse polarity	
Type of output	4-20 mA or 0-10 V	
Degree of protection	IP 67	IP 67
Connection	M12 connector	M12 connector
Sensor type	XX918A3●	XX●18●1AM12 XX●18●1VM12
Page	26	30

50 cm	1 m
Adjustable using teach mode	Adjustable using teach mode
12...24 V $\overline{\text{---}}$ with protection against reverse polarity	
4-20 mA or 0-10 V	
IP 67	IP 67
M12 connector	M12 connector
XX918A3●	XX●18●1AM12 XX●18●1VM12
26	30

1 m	2 m	4 m	8 m
Adjustable using teach mode			
12...24 V $\overline{\text{---}}$ or 24 V $\overline{\text{---}}$ , depending on model, with protection against reverse polarity			
4-20 mA or 0-10 V			
IP 67	IP 67	IP 67	IP 67
M12 connector	M12 connector	M12 connector	M12 connector
XX●30●●1M12 XX9V3A1● XX930A1●	XX●30●●2M12 XX930A2●	XXS30●●4M12	XX930A3● XXS30P8APM12 XXS30P8VPM12
36	36	42	36 and 42

(1) Please visit our website: [www.teensors.com](http://www.teensors.com)

# Ultrasonic sensors

XX range  
Flat format

**Applications**  
Non-contact detection of sound reflecting objects regardless their shape, material, colour, orientation, etc.

Dimensions (mm)

## Sensors with solid-state digital output

Flat format

7.6 x 19 x 33

16 x 30 x 74



18 x 33 x 60 + Ø 18 (M18 x 1)

80 x 80 x 34



Sensing distance Sn	Diffuse
	Reflex
	Thru-beam
Assured operating distance (mm)	6.4...100 fixed
Power supply	12...24 V $\overline{\text{DC}}$ with protection against reverse polarity
Type of output	NPN or PNP
Function	NO
Degree of protection	IP 67
Connection	M12 connector on flying lead
Sensor type	<b>XX7F1A2</b>
Page	72

10 cm	25 cm
–	–
–	–
6.4...100 fixed	51...250 fixed
12...24 V $\overline{\text{DC}}$ with protection against reverse polarity	
NPN or PNP	PNP
NO	NO
IP 67	IP 67
M12 connector on flying lead	M12 connector
<b>XX7F1A2</b>	<b>XX7K1A2PAM12</b>
72	72

50 cm (adjustable)	1 m (adjustable)
50 cm (adjustable)	1 m (adjustable)
–	–
Adjustable using teach mode	
12...24 V $\overline{\text{DC}}$ with protection against reverse polarity	
NPN or PNP	NPN or PNP
NO	NO
IP 67	IP 67
M12 connector	M12 connector
<b>XX7V1A1</b>	<b>XX8D1A1</b>
72	72

## Sensors with solid-state digital output and analogue output

Format for mobile equipments

Dimensions (mm)

79 x 32.5 + Ø 54




Sensing distance Sn	3 m		
Assured operating distance (mm)	0.425...3		
Power supply	$\overline{\text{DC}}$ 12...24 V with protection against reverse polarity		
Type of output	0.5 - 4.5 V + PNP or 4-20 mA + PNP or CAN J1939 (depending on model)		
Degree of protection	IP 65, IP 67, IP 69K	IP 65, IP 67	IP 65, IP 67, IP 69K
Connection	Deutsch DTM04 connector on flying lead (0.15 m)	M12 connector on flying lead (0.15 m)	Pre-cabled (0.5 m)
Sensor type	<b>XXW54P3</b>	<b>XXW54P3</b>	<b>XXW54P3</b>
Page	63	63	63

## Sensors with analogue output

Flat format

18 x 33 x 65 + Ø 18 (M18 x 1)


80 x 80 x 34



50 cm (adjustable)	1 m (adjustable)		
Adjustable using teach mode			
12...24 V $\overline{\text{DC}}$ with protection against reverse polarity	24 V $\overline{\text{DC}}$ with protection against reverse polarity	12...24 V $\overline{\text{DC}}$ with protection against reverse polarity	24 V $\overline{\text{DC}}$ with protection against reverse polarity
4-20 mA	0-10 V	4-20 mA	0-10 V
IP 67	IP 67	IP 67	IP 67
M12 connector	M12 connector	M12 connector	M12 connector
<b>XX9V1A1C2M12</b>	<b>XX9V1A1F1M12</b>	<b>XX9D1A1C2M12</b>	<b>XX9D1A1F1M12</b>
73		73	


### Feeder bowl supply control

XXS18, XXA18, XX7V1A1

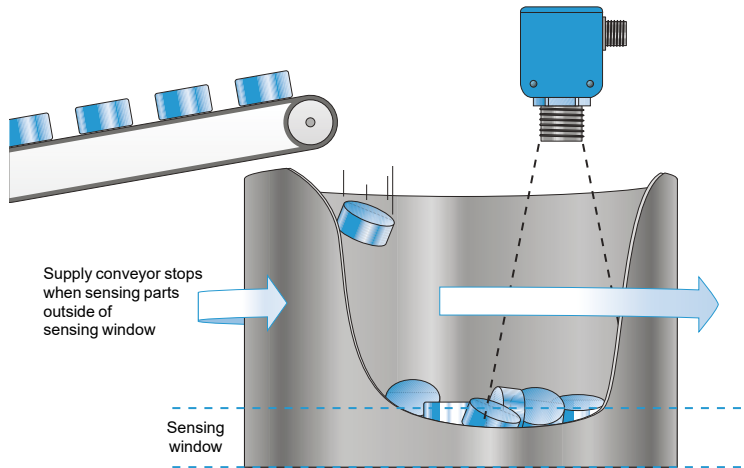


### Conveyor jam and backup detection

XXS18, XXA18, XXB18A3

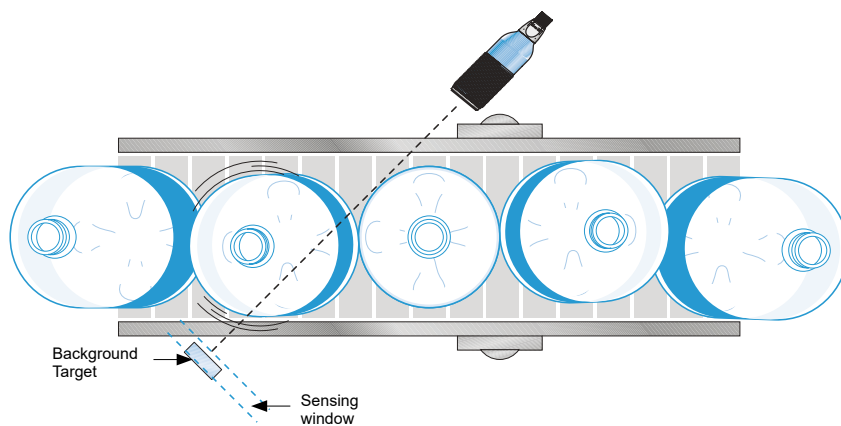

### Web process control sensing functions


XXS18, XXS30

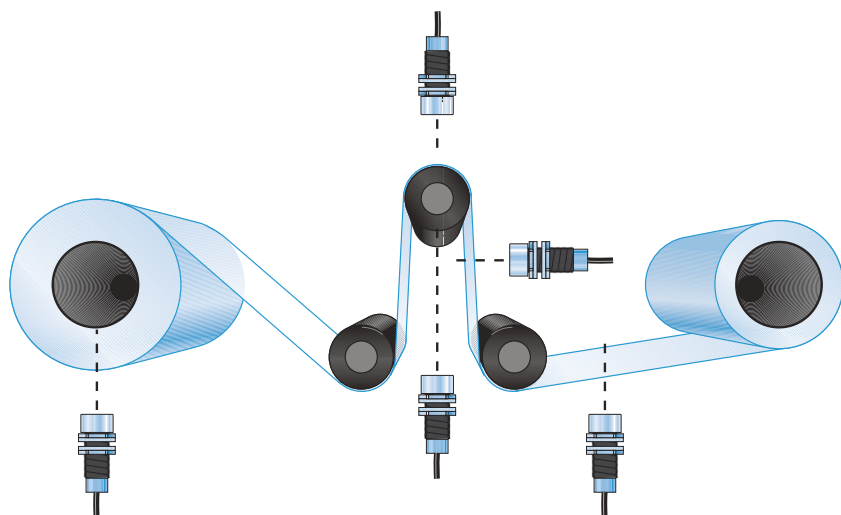




Dual level high-low latch control detection of liquids

XXS30P8, XX230A3

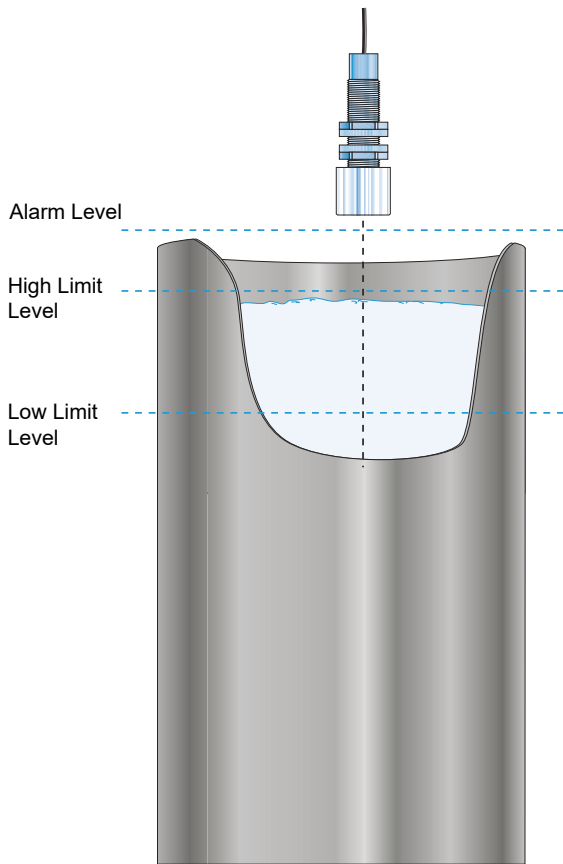


High level detection

XXS30P8, XX630A3

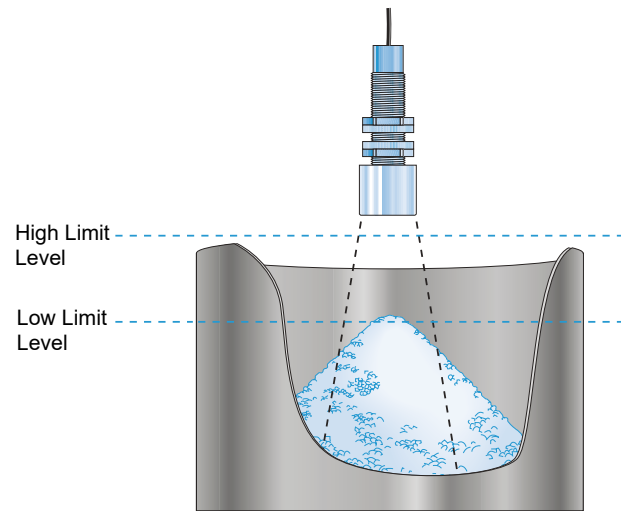


Accurate high speed counting of cylindrical clear objects

XXT18 + XXR18

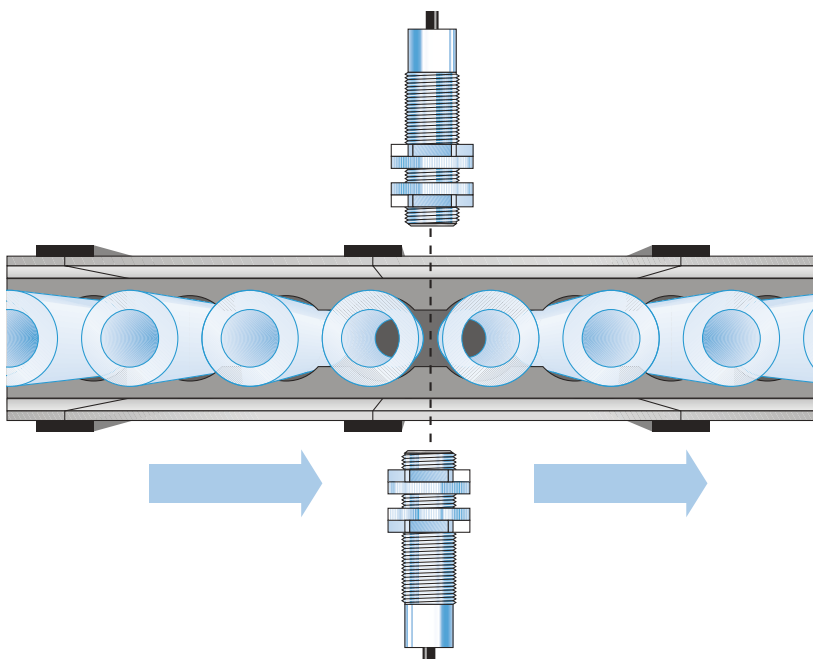


**Glue bead detection**

XXV18

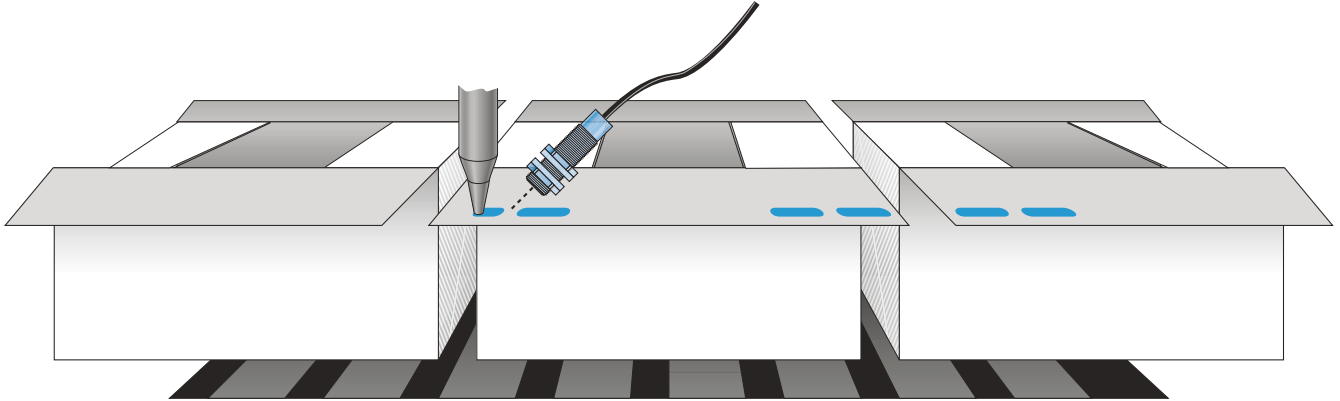

**Label edge detection on carrier web**

XX7K, XX7F (flat format), XX518A3 (M18)


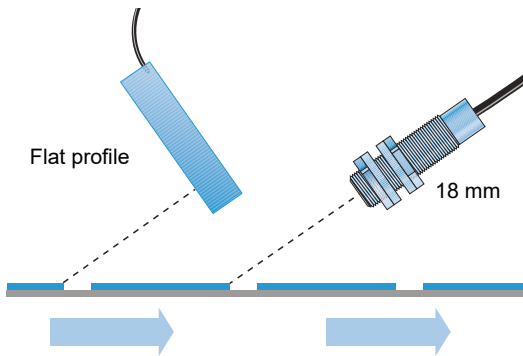


**Clear bottle detection for sustainable environments**

XXS18, XXA18, XXB18


**Broken wire/thread detection**

XXV18

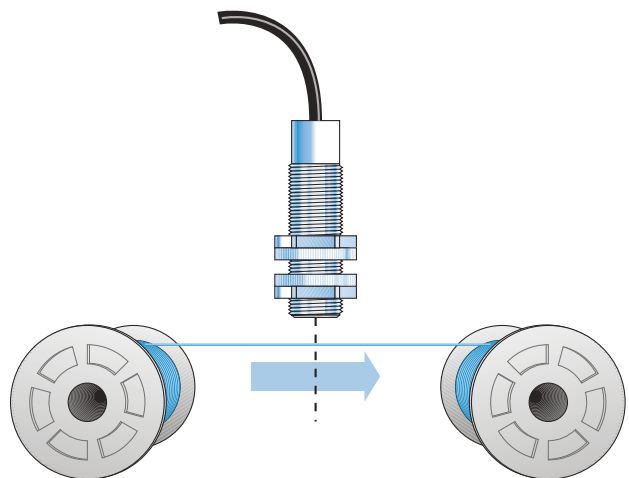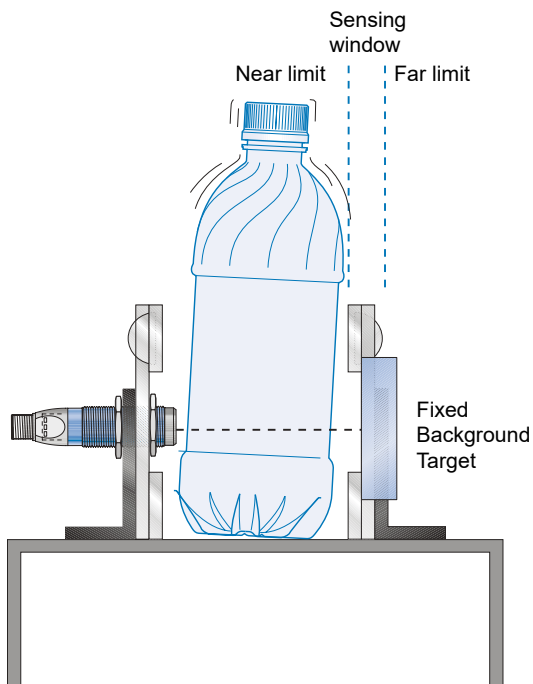


**Missing cap detection low cap supply**

Automatically stops filler and capper  
XX512

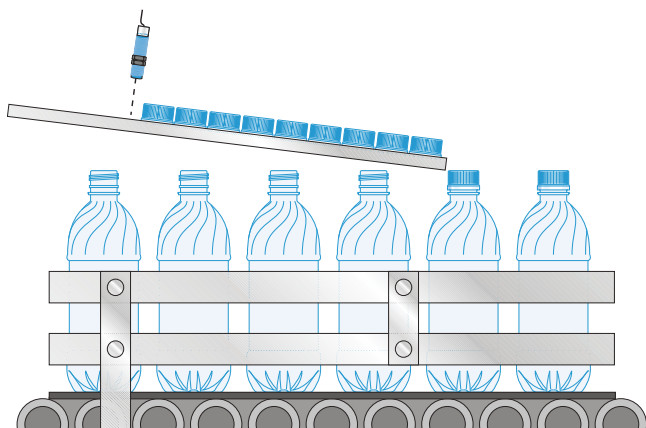


**Continuous level monitoring**

Analog output sensors  
XXS18, XXS30, XX918, XX930

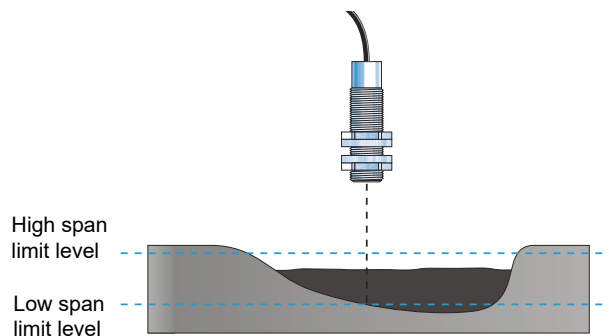


**Dual level high-low latch control detection**

XXS30●●PM12, XX230

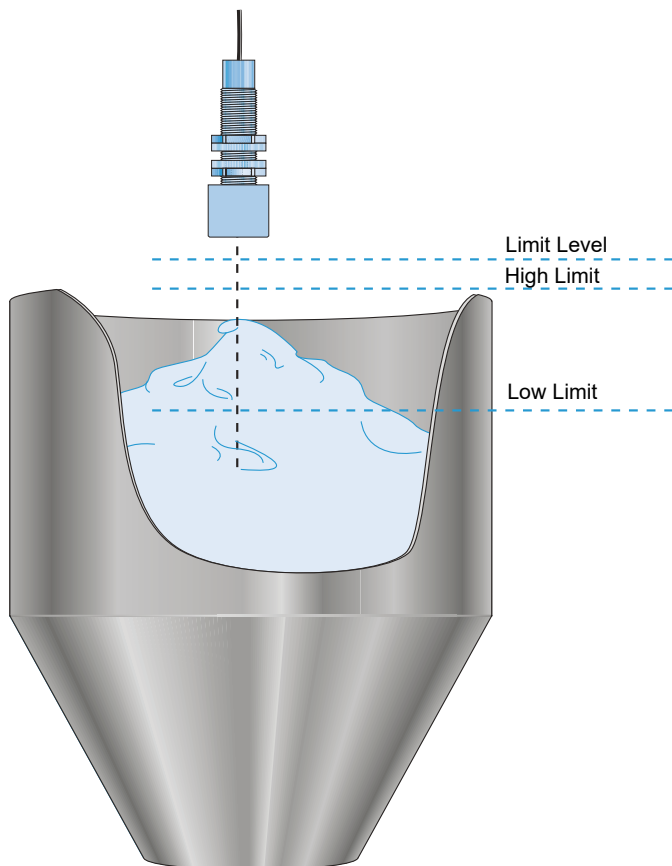


**Lead edge or backup detection**

XXT18 and XXR18

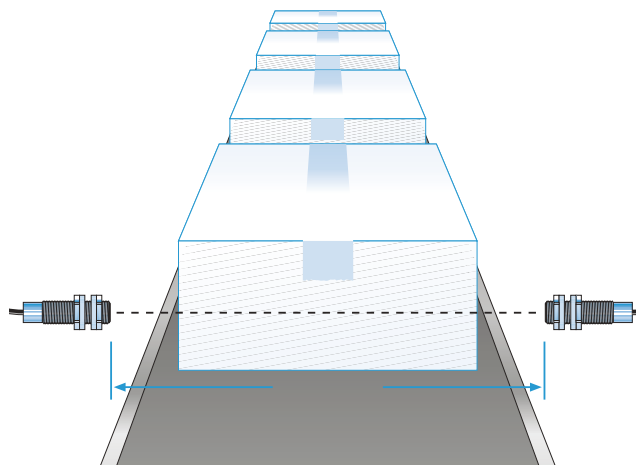


### Clear bottle detection

XXT12 and XXR12

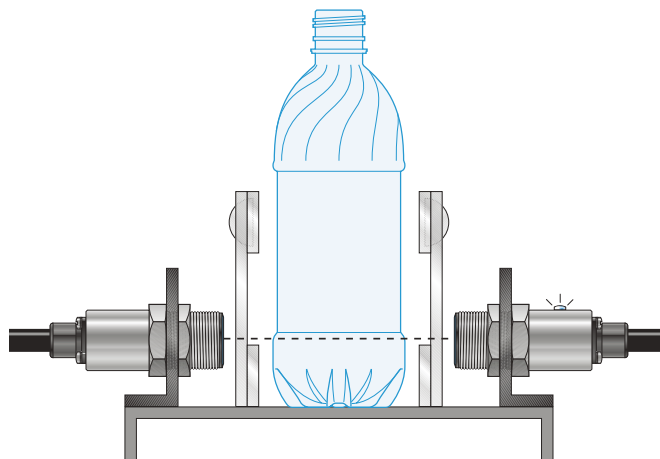


### Container detection

XX7F1

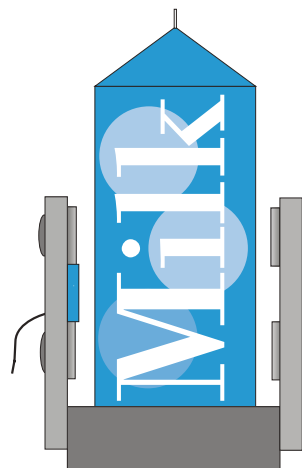


### Metal material detection

XX512

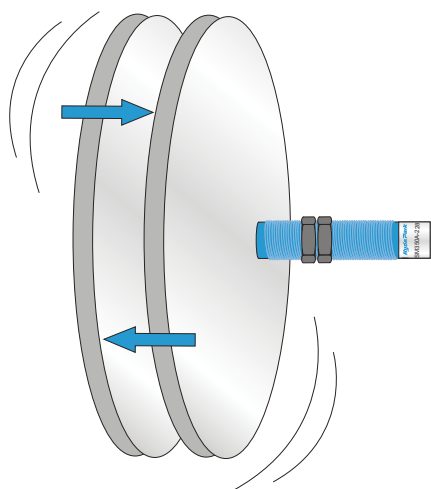


### Missing cap detection

XX518

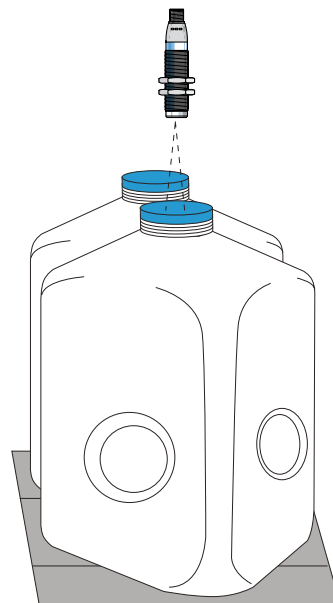


### Clear web detection

XX512

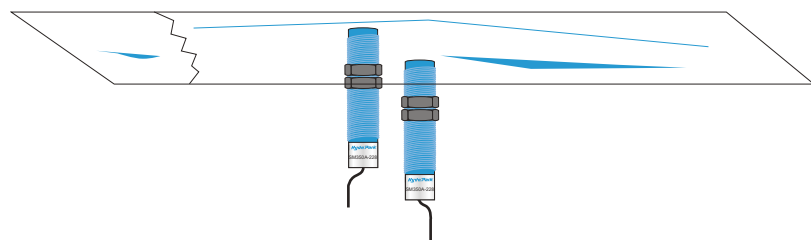


Container detection

XX7F1

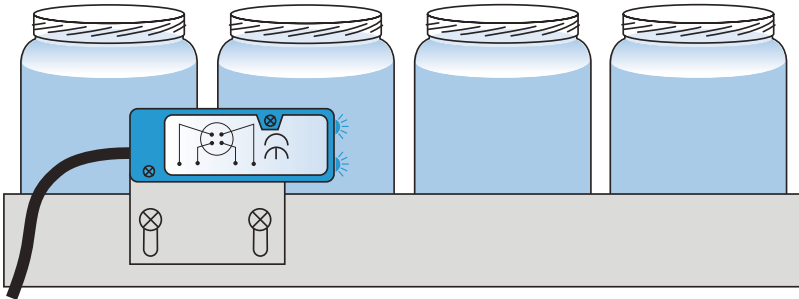

Clear cellophane panel detection


XX7F1A2

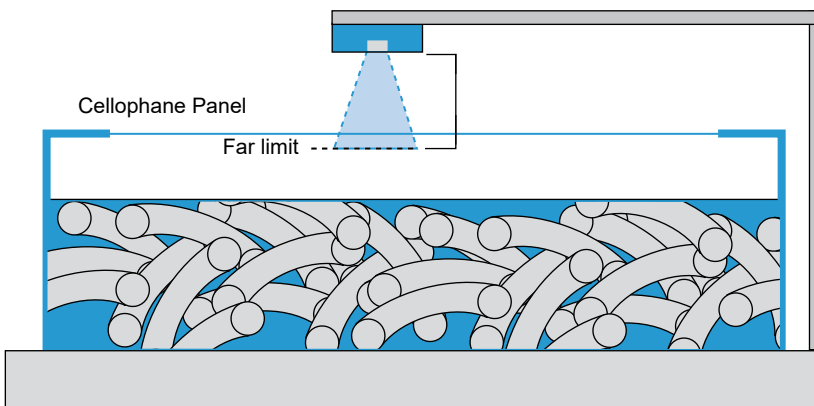

Single file jam protection

Dual level latch control sensor

XX218 and XX230

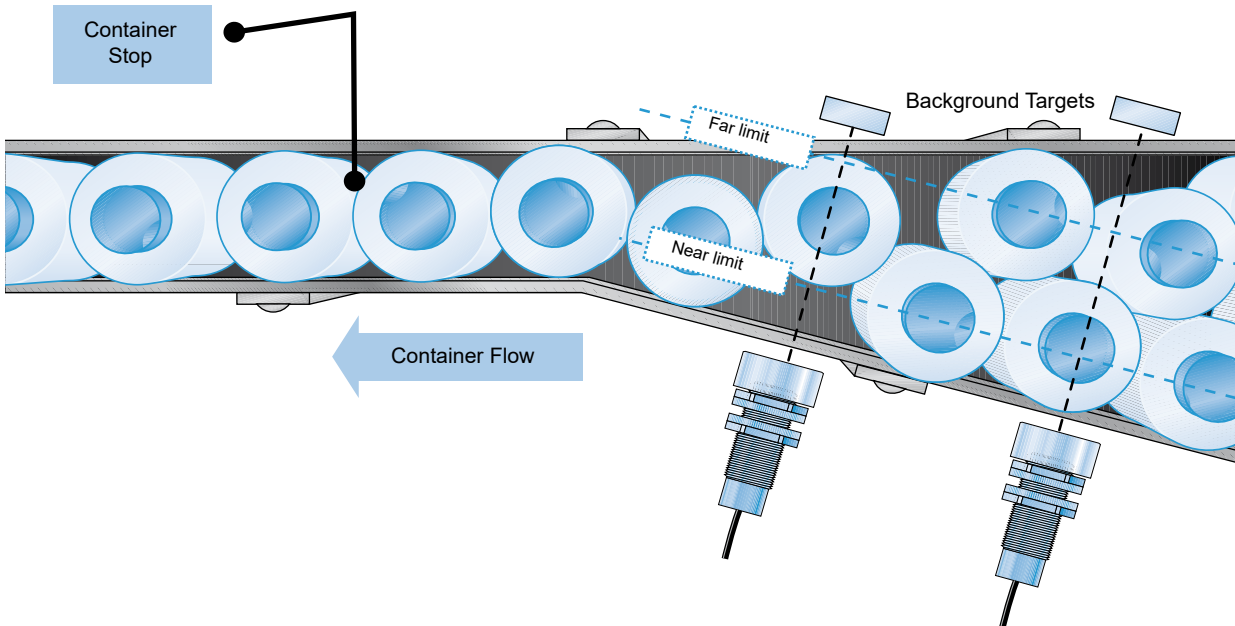

### Quality, standards and certifications

#### Quality control

The XX ultrasonic sensors models are subjected to special precautions in order to guarantee their reliability in arduous industrial environments.

##### ■ Qualification

A **qualification procedure** on the characteristics of XX range ultrasonic sensors is carried out in our laboratories.

##### ■ Production

The electrical characteristics and the sensing distances at the ambient and operating temperatures are 100% verified.

Sensors are statistically selected during the course of production and subjected to **monitoring tests** on all qualified characteristics.

##### ■ Customer returns

Returned ultrasonic sensors are subjected to systematic analysis and corrective actions are implemented to eliminate recurrence of the fault.

#### Conformity to standards

The XX ultrasonic sensors models conform to the standards IEC 60947-5-2.  
Standards and characteristics: refer to pages 23, 27, 32, 38, 41, 45, 46, 50, 54 and 58.

#### Resistance to chemicals in the environment

To ensure lasting efficient operation, it is essential that any chemicals coming into contact with the ultrasonic sensors will not affect their casing and, in doing so, prevent their reliable operation.

Due to the materials used, the XX ultrasonic sensors models are very resistant to:

##### ■ Chemical agents:

salts, aliphatic and aromatic oils,  
petroleum, diluted bases and acids.

Depending on their nature and concentration, tests should be carried out beforehand for the following chemical agents:

alcohols, ketones and phenols.

##### ■ Food and beverage industry products:

vegetable oils, animal fats,  
fruit juices,  
milk proteins, etc.

#### Resistance to the environment

##### ■ IP 65: protection against water jets.

Tested in accordance with IEC 60529: the device is subjected to water sprayed from a Ø 6.3 mm nozzle, at a flow rate of 12.5 litres/min for 3 min at a distance of 3 m.  
No deterioration in either operating or insulation characteristics is permitted.

##### ■ IP 67: protection against the effects of immersion.

Tested in accordance with IEC 60529: the sensor is immersed for 30 minutes in 1 m of water.  
No deterioration in either operating or insulation characteristics is permitted.

##### ■ IP 69K: protection against the effects of high pressure cleaning. Adherence to standard

DIN 40050 which stipulates that the product must withstand a water jet at a pressure of 90 bar and temperature of +80°C for 3 minutes.

No deterioration in either operating or insulation characteristics is permitted.

### Recommendations

The ultrasonic sensors are designed for use in standard industrial applications involving presence detection.  
 Since these sensors do not incorporate a redundant electrical circuit, they are not suitable for use in safety applications.  
 For safety applications, please refer to our website [www.tesensors.com](http://www.tesensors.com)

### Principle of ultrasonic detection



### Presentation

Ultrasonic sensors enable detection, without contact, of objects irrespective of its:

- material (metal, plastic, wood, cardboard, etc.),
- nature (solid, liquid, powder, etc.),
- colour,
- degree of transparency.

They are used in industrial applications for detecting, for example:

- the position of machine parts,
- the presence of the windscreen during automobile assembly,
- the flow of objects on a conveyor system: glass bottles, cardboard packages, cakes, etc.,
- the level
  - of different colour paints in pots,
  - of plastic pellets in injection moulding machine feeders.

The ultrasonic sensors are simple to install due to their integral connector and availability of cabling and fixing accessories.

### Operating principle


The principle of ultrasonic detection is based on measuring the time taken between transmission of an ultrasonic wave (pressure wave) and reception of its echo (return of transmitted wave).

The XX ultrasonic sensors models comprise:

- 1 a high voltage generator
- 2 a piezoelectric transducer (transmitter and receiver)
- 3 a signal processing stage
- 4 an output stage

Excited by the high voltage generator **1**, the transducer (transmitter-receiver) **2** generates a pulsed ultrasonic wave (200 to 500 kHz depending on the product) which travels through the ambient air at the speed of sound. When the wave strikes an object, it reflects (echo) and travels back towards the transducer. A micro controller **3** analyses the signal received and measures the time interval between the transmitted signal and the echo. By comparison with the preset or taught times, it determines and controls the output states **4**.



The output stage **4** controls a solid-state switch (PNP or NPN transistor) corresponding to a NO or NC contact (detection of object).

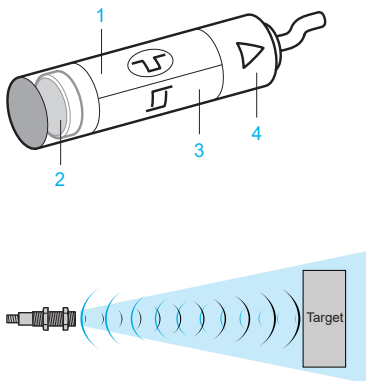




### Advantages of ultrasonic detection

- No physical contact with the object to be detected, therefore, no wear and detection possible of fragile and/or freshly painted objects, etc.
- Detection of materials, irrespective of colour, at the same distance, without adjustment or correction factor.
- Teach mode function, by simply pressing a button, for defining the effective detection zone. Teaching of the minimum and maximum sensing distances (very precise foreground and background suppression,  $\pm 6$  mm).
- Very good resistance to industrial environments (robust products entirely encapsulated in resin).
- Solid-state units: no moving parts in the sensor, therefore, service life independent of the number of operating cycles.
- Various types of outputs to suit requirements:
  - Digital output for level control or detection of any type of object
  - Analogue output for controlling systems that require a signal that is proportional to the distance at which the object is detected.

## Terminology

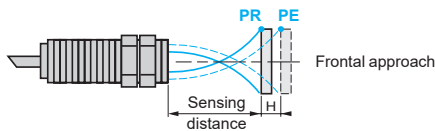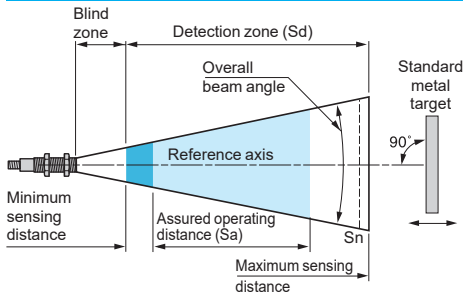

PR = drop-out point  
PE = pick-up point

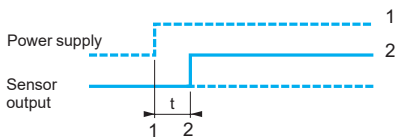

## Definitions

The terms listed below are defined by the standard IEC 60947-5-2:

■ **Nominal sensing distance (Sn)**  
Conventional value for indicating the sensing distance. It does not take into account manufacturing tolerances nor variations caused by external conditions such as voltage and temperature.

■ **Detection zone (Sd)**  
Zone in which the sensor is sensitive to objects.

■ **Minimum sensing distance**  
Lower limit of the specified detection zone.

■ **Maximum sensing distance**  
Upper limit of the specified detection zone.

■ **Assured operating distance (Sa)**  
This corresponds to the operating zone of the sensor (activation of outputs), and is included in the detection zone. It is also known as the "detection window".  
Its limits are fixed:

- at the factory for fixed sensing distance sensors,
- when setting-up within the application for sensors with teach mode.

■ **Blind zone:** Zone located in front of the sensing face of the sensor.  
For diffuse sensors, it is the zone in which the object will not be reliably detected.  
For reflex sensors, it is the zone in which the target (fixed background of machine for example) will not be reliably detected, but the object can be in this zone.  
For thru-beam sensors, there is no blind zone.

■ **Differential travel**  
The differential travel (H) or hysteresis is the distance between the pick-up point as the standard metal target moves towards the sensor and the drop-out point as it moves away from the sensor.

■ **Repeat accuracy**  
The repeat accuracy (R) is the precision of reproduction between two successive measurements of the sensing distance, made in identical conditions.

■ **Overall beam angle**  
Fixed angle around the reference axis of an ultrasonic proximity sensor.

■ **Standard metal target**  
The standard IEC 60947-5-2 defines the standard target as a square metal plate, 1 mm thick with rolled finish, placed perpendicularly to the reference axis.  
Its side dimension depends on the detection zone:

Detection zone (mm)	Size of target (mm)
< 300	10 x 10
300 < d < 800	20 x 20
> 800	100 x 100


■ **Voltage drop (Ud)**  
The voltage drop (Ud) corresponds to the voltage at the terminals of the sensor when in the closed state (value measured at the nominal current of the sensor).

■ **First-up delay**  
Time required to ensure operation of the sensor's output signal following power-up.  
1 Power-up  
2 Output signal state (0 or 1)


■ **Response time**  
Response time (Ra): time taken between the instant the object to be detected enters the active zone and the changing of the output signal state. This time limits the passing speed of the target in relation to its dimensions.  
Recovery time (Rr): time taken between the object being detected leaving the active zone and the changing of the output signal state. This time limits the interval between 2 objects.



## Digital outputs

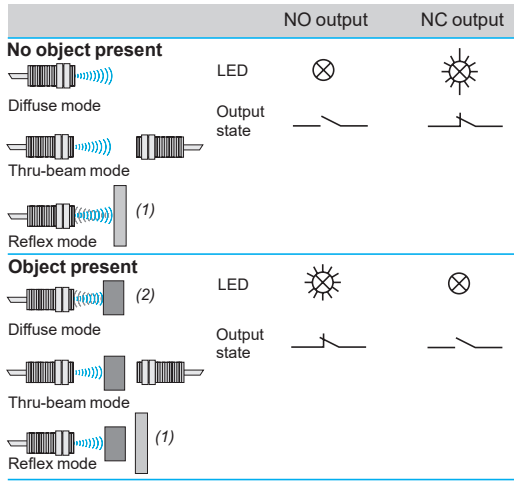

(1) Fixed background of machine  
(2) Object



## LED indicators

The majority of XX ultrasonic sensors models incorporate light-emitting diode output state indicators.

- Ø 12 sensor
  - Green LED (power on)
  - Yellow LED (object present)
- Ø 18 sensor, sensitivity 500 mm (except thru-beam versions XXT18 and XXR18)
  - Yellow LED (object present) or green LED (power on) + user assistance when adjusting the detection zone
- Ø 30 sensor
  - Multicolour LED for assisting the user when adjusting the detection distance
  - Yellow LED (object present)
  - Analogue version with LED (object present, with luminosity increasing as output signal increases)
- Parallelepiped format sensor
  - XX●F: Dual colour yellow (object present) or green (power on) LED
  - XX●V: Dual colour yellow (object present) or green (power on) LED + user assistance when adjusting the detection zone
  - XX7K: Yellow LED (object present); green LED (power on)
  - XXTK: Yellow LED (object present) only
  - XX●D: Yellow LED (object present); green LED (power on)
  - Analogue version with LED (object present, with luminosity increasing as output signal increases)


## Sensors with digital switching

### Output contact logic


- NO contact (normally open)  
Corresponds to a sensor whose output changes to the closed state when an object is present in the detection window.
- NC contact (normally closed)  
Corresponds to a sensor whose output changes to the open state when an object is present in the detection window.

### 4-wire technique


#### NO output/PNP and NPN



#### NO + NC output/NPN




#### NO + NC output/PNP




These sensors comprise 2 wires for the supply and 1 wire for each output signal

### 3-wire technique

#### NO output/NPN



#### NO output/PNP




These sensors comprise 2 wires for the supply and 1 wire for the output signal,

- PNP type:** switching the positive side to the load.
- NPN type:** switching the negative side to the load.

## Sensors with analogue output

### Operation

The characteristic feature of these sensors is the output which delivers a signal (either current or voltage) that is proportional to the distance of the object being detected. Within the detection limits, which are adjustable using teach mode, the value of the output signal increases or decreases in relation to the distance of the object. When an object is detected, an LED indicator (D) illuminates and its luminosity increases in relation to the value of the output signal. The slope of the signal can simply be changed by pressing the teach button

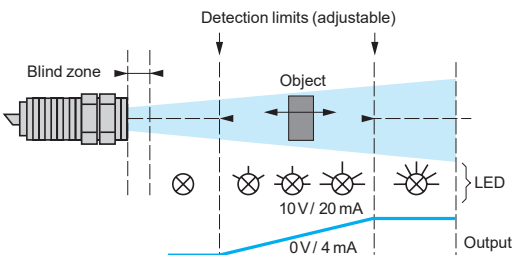

### Advantages

- Visual information available relating to the sensor/object distance.
- Protection against reverse polarity.
- Protection against overloads and short-circuits.
- No residual current, low voltage drop.

### Power supply

### Sensors for DC circuits

- **DC source:** Check that the voltage limits of the sensor and the acceptable level of ripple, are compatible with the supply used.
- **AC source** (comprising transformer, rectifier, smoothing capacitor): The supply voltage must be within the operating limits specified for the sensor.

Where the voltage is derived from a single phase AC supply, the voltage must be rectified and smoothed to ensure that:

- the peak voltage of the DC supply is lower than the maximum voltage rating of the sensor.
- Peak voltage = nominal voltage  $\times \sqrt{2}$
- the minimum voltage of the supply is greater than the minimum voltage rating of the sensor,

given that:

$$\Delta V = (I \times t) / C$$

$$\Delta V = \text{max. ripple: } 10\% (V),$$

I = anticipated load current (mA),

t = period of 1 cycle (10 ms full-wave rectified for a 50 Hz supply frequency),

C = capacitance ( $\mu\text{F}$ ).

As a general rule, use a transformer with a lower secondary voltage ( $U_e$ ) than the required DC voltage (U).



#### Example:

18 V  $\sim$  to obtain 24 V  $\dots$ ,

36 V  $\sim$  to obtain 48 V  $\dots$ .

### Setting-up precautions

For diffuse sensors:

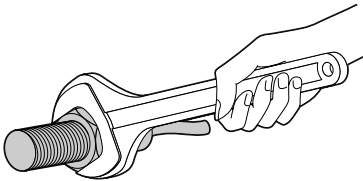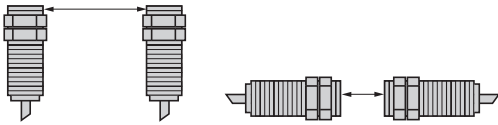

### Mounting

#### Mounting distance between ultrasonic sensors

If 2 standard sensors are mounted too close to each other, the wave transmitted by one sensor is likely to interfere with the other and result in erratic operation.

In order to avoid this, it is necessary to adhere to the minimum distances between sensors. See setting-up precautions.


#### Maximum tightening torque

Cylindrical sensors	Diameter mm	Tightening torque	Flat sensors	Screw	Tightening Torque
XX●12●	Ø 12	0.7 N.m/ 0.52 lb-ft	XX●F●	M3	0.7 N.m/ 0.52 lb-ft
XX●18●	Ø 18	1 N.m/ 0.74 lb-ft	XX●K●	M4	1 N.m/ 0.74 lb-ft
XX●30●	Ø 30	1.35 N.m/ 1 lb-ft	XX●V●	M3	0.7 N.m/ 0.52 lb-ft
XX●V3●	Ø 30	1.35 N.m/ 1 lb-ft		Ø 18	1 N.m/ 0.74 lb-ft
XXS18*	Ø 18 (Plastic)	2 N.m /			
XXA18*		1.47 lb-ft			
	Ø 18 (Metal)	15 N.m /			
		11.06 lb-ft			

#### Interchangeability

Interchangeability is made easy by using **indexed** fixing clamps:

- XSZB112 (Ø 12 mm),
- XSZB118 (Ø 18 mm),
- XSZB130 (Ø 30 mm),
- XXZB118 (Ø 18 mm),

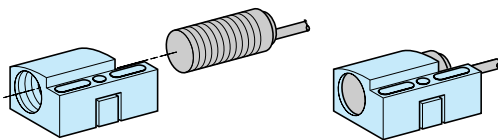

XSZB1●●

### Cabling

#### Electrical connection

- **Connect the sensor before switching on the supply**

#### ■ Length of cable

No limitation up to 200 m or up to a line capacitance of < 0.1  $\mu\text{F}$ .






It is, however, advisable to take into account the voltage drop on the line.

#### ■ Separation of control and power cables

The sensors are immune to electrical interference encountered in normal industrial conditions. Where extreme conditions of electrical "noise" could occur (large motors, spot welders, etc.), it is advisable to protect against transients in the normal way:

- suppress interference at source,
- separate power and control wiring from each other,
- smooth the supply,
- limit the length of cable.

## Setting-up precautions (continued)

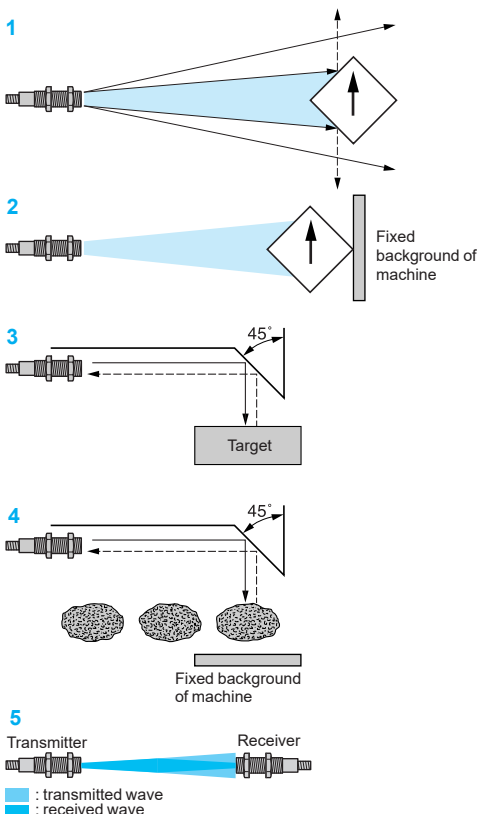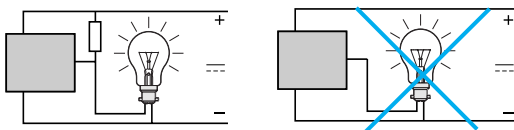

## Connection in series

**This connection method is not recommended.**

- Correct operation of the sensors cannot be assured and, if this method is used, tests should be made before installation.

The following points should be taken into account:

Sensor 1 carries the load current in addition to the no-load current consumption values of the other sensors connected in series. For certain models, this connection method is not possible unless a current limiting resistor is used.

When in the closed state, each sensor will produce a voltage drop and, therefore, the load voltage should be selected accordingly.

As sensor 1 closes, sensor 2 will not operate until a certain time "T" has elapsed (corresponding to the first-up delay) and likewise for the following sensors in the sequence.

"Flywheel" diodes should be used when the load being switched is inductive.

## Sensors and units in series with an external mechanical contact

- The following points should be taken into account:

When the mechanical contact is open, the sensor is not supplied.

When the contact closes, the sensor will not operate until a certain time "T" has elapsed (corresponding to the first-up delay).

## Connection in parallel

- No specific restrictions. The use of "flywheel" diodes is recommended when an inductive load (relay) is being switched.

## Capacitive load (C > 0.1 mF)

- At switch-on, it is necessary to limit (by resistor) the charging current of the capacitive load C. The voltage drop in the sensor can also be taken into account by subtracting it from the supply voltage for calculation of R.

$$R = \frac{U \text{ (supply)}}{I \text{ max. (sensor)}}$$

## Load comprising an incandescent lamp

- If the load comprises an incandescent lamp, the cold state resistance can be 10 times lower than the hot state resistance. This can cause very high current levels on switching. Fit a pre-heat resistance in parallel with the sensor.

$$R = \frac{U^2}{P} \times 10, U = \text{supply voltage and } P = \text{lamp power}$$

## Detection

### Influencing factors

The ultrasonic sensors are particularly suited for the detection of objects that are capable of reflecting an acoustic wave and, in general, having a flat surface perpendicular to the detection axis. However, the correct operation of the ultrasonic sensor can be disrupted by:

- air currents, which can accelerate or divert the acoustic wave transmitted by the sensor (ejection of part by air jet),
- high temperature gradients within the detection zone: an object emitting considerable heat can create zones of varying temperature that will modify the propagation time of the wave and thus prevent reliable operation,
- sound insulators: sound absorbing materials (cotton, fabrics, rubber, etc.),
- the angle between the face of the object to be detected and the reference axis of the sensor: when the angle is offset from 90°, the wave is no longer reflected back along the sensor axis and the operating distance is reduced. The greater the distance between the sensor and the target, the greater the effect. Detection is not possible when the angle exceeds  $\pm 10^\circ$ .
- the shape of the object to be detected: similar to the example above, an excessively angular object can be difficult to detect 1. In this case, use reflex mode detection.

### Detection systems

#### Diffuse mode

In this mode, it is the object itself that reflects the ultrasonic wave back to the sensor which, in turn, switches its output. It is the most widely used and the most simple mode. In this mode, the object will not be detected in the blind zone.

#### Reflex or beam break mode

The sensor is in a permanently detecting state on a fixed background of the machine and when the object to be detected breaks the acoustic beam the output switches state 2. This mode is particularly recommended in cases where the shape of the object changes (irregular, angular, non perpendicular) and also for objects that absorb sound (see above). This mode can be achieved by using a diffuse mode sensor (with background teaching) or, more simply, by using a ready to use reflex mode sensor.

In cases where space is restricted, a reflector 3 and 4, angled at 45°, can be used. This system can be used for both the diffuse and reflex modes. This reflector can be a flat part of the machine or a separate element. In this mode, the background of the machine must not be within the blind zone. But if the object is within this zone, it will be reliably detected.

#### Thru-beam mode

Detection is achieved using both a transmitter and receiver, with the transmitter permanently transmitting an acoustic wave to the receiver. The breaking of the beam by the presence of an object switches the output of the receiver. This mode provides long detection distances 5. In this mode there is no blind zone.

# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal

DC supply, solid-state digital output

121383



XX512A1KAM8

PF13112



XX518A1KAM12

PF51482



XXV18B1PAM12

## Diffuse mode

### Ø 12 sensors

Sensors	Sensing distance (Sn) m	Function/output	Connection	Reference	Weight kg
Ø 12 Plastic	0.05	NO/PNP + NO/NPN	M8 connector	<b>XX512A1KAM8</b>	0.011
	0.1	NO/NPN	M8 connector	<b>XX512A2NAM8</b>	0.011
		NO/PNP	M8 connector	<b>XX512A2PAM8</b>	0.011

### Ø 18 sensors

Ø 18 Plastic	0.15	NO/PNP + NO/NPN	M12 connector	<b>XX518A1KAM12</b>	0.033
Ø 18 Metal	0.05	NO/NPN	Pre-cabled (L = 2 m)	<b>XXV18B1NAL2</b>	0.110
			M12 connector	<b>XXV18B1NAM12</b>	0.050
	NO/PNP	Pre-cabled (L = 2 m)	<b>XXV18B1PAL2</b>	0.110	
		Pre-cabled (L = 5 m)	<b>XXV18B1PAL5</b>	0.200	
	NC/NPN	Pre-cabled (L = 5 m)	M12 connector	<b>XXV18B1PAM12</b>	0.050
			<b>XXV18B1NBL5</b>	0.200	
NC/PNP	Pre-cabled (L = 2 m)	M12 connector	<b>XXV18B1PBL2</b>	0.110	
		<b>XXV18B1PBM12</b>	0.050		

## Thru-beam mode

### Ø 12 sensors

Transmitter	0.2	–	M8 connector	<b>XXT12A8M8</b>	0.020
Receiver	0.2	NO/PNP + NO/NPN	M8 connector	<b>XXR12A8KAM8</b>	0.020


Sensor type		XX512A1●	XX512A2●	XX●12A8●	XXV18B1●	XX518A1●
<b>General characteristics</b>						
Conformity to standards		CE, IEC 60947-5-2				
Product certifications		UL	UL	UL	cULus	cULus
Nominal sensing distance (Sn)		<b>m</b> 0.05	0.1	0.2	0.05	0.15
Blind zone (in diffuse mode the object is not detected in this zone, in reflex mode the background is not detected in this zone)		<b>mm</b> 0...6.4	0...6.4	–	0...2	0... 19
Detection window		Fixed				Fixe
Detection system	Diffuse mode	●	●	–	●	●
	Reflex mode	–	–	–	–	–
	Thru-beam mode	–	–	●	–	–
Transmission frequency (transmitter resonance)		<b>kHz</b> 500			360	200
Differential travel		<b>mm</b> < 0.7	< 0.7	–	< 3	–
Repeat accuracy		<b>mm</b> ± 0.7		± 0.79	± 1.5	± 0.79
Overall beam angle (see detection lobe)		11°	10°	10°	10°	20
Minimum size of object to be detected						
	Cylinder Ø (in mm), at distance (in mm)	Ø 2.5 at 38	Ø 2.5 at 50	Ø 12 at 200	Ø 2.5 at 20	Ø 1.6 at 63
Deviation angle from 90° of the object to be detected		± 10°	± 10°	–	± 8°	± 10°
Materials	Case	ULTEM®			Nickel plated brass	ULTEM®
		Stainless steel 303 for XX630AS1●●●●				
	Sensing face (1)	Epoxy			Epoxy	Silicone
Connection	Connector	M8, 4-pin	M8 3-pin	M8, 4-pin	M12, 4-pin	M12, 4-pin
	Pre-cabled (wire c.s.a.)	–	–	–	3 x 0.34 mm <sup>2</sup> / AWG 22	–
<b>Supply characteristics</b>						
Rated supply voltage		<b>V</b> 12...24 V $\overline{\text{---}}$ with protection against reverse polarity				
Voltage limits (including ripple)		<b>V</b> $\overline{\text{---}}$ 10...28 V			$\overline{\text{---}}$ 10...36 V	$\overline{\text{---}}$ 10...28 V
Current consumption, no-load		<b>mA</b> 25		50	15	60
<b>Output characteristics</b>						
LED indicators	Output state	Yellow LED				–
	Power on	Green LED				–
	Setting-up assistance	–	–	–	–	–
Switching capacity (with overload and short-circuit protection)		<b>mA</b> < 100				< 200
Voltage drop		<b>V</b> < 1 (NPN), < 1.5 (PNP), 1.1 for XX●12A8, < 2 for XXV18B1●, 0.5 for XX630A2●				
Maximum switching frequency		<b>Hz</b> 125	125	125	80	80
Delays	First-up	<b>ms</b> 20	20	20	5	350
	Response	<b>ms</b> 2	3	0.4	4	3
	Recovery	<b>ms</b> 2	3	0.4	4	3
<b>Environment characteristics</b>						
Degree of protection		Conforming to IEC 60529 and IEC 60947-5-2	IP 67		IP 65 IP 67 or (2)	IP 67
Storage temperature		<b>°C</b> - 40...+ 80				
Operating temperature		<b>°C</b> - 20...+ 65			0...+ 60	0...+ 50
Vibration resistance		Conforming to IEC 60068-2-6	Amplitude ± 1 mm (f = 10...55 Hz); ± 2 mm for XXV18B1●			
Mechanical shock resistance		Conforming to IEC 60068-2-27	30 gn, duration 11 ms, in all 3 axes 50 gn, duration 11 ms, in all 3 axes for XXV18B1●			
Resistance to electromagnetic interference		Conforming to IEC 60947-5-2				

(1) Silicone face for optimum chemical resistance.


(2) Double insulation for pre-cabled sensors. IP 69K for sensors with M12 connector.

## Dimensions


XX●12A●●●M8




XX518A1KAM12  
XXT18A●M12  
XXR18A●●●●●



XXV18B1●●●M12



XXV18B1●●L●

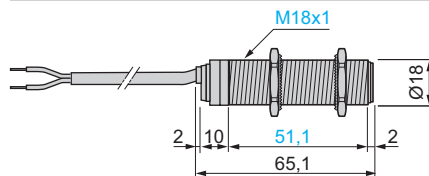


## Setting-up precautions


Minimum mounting distances

Diffuse sensors, cylindrical type

Side by side




Face to face




e: respect the distances indicated on the detection curves

$e \geq 4 \times S_n$


XXV18●



$e > 25 \text{ mm}$




$e > 700 \text{ mm}$



$e > 60 \text{ mm}$


Thru-beam sensors




Sensors	$\alpha$
XX●12●●/XX●F1●●	$\pm 5^\circ$
XX●18A4●●/XX●K1A4	$\pm 10^\circ$
XX●18A2●●/XX●K1A2	

## Curves


XX512A1KAM8



XX512A2●NAM8



XX518A1KAM12



# Ultrasonic sensors


XX range, General purpose  
Cylindrical, plastic or metal  
DC supply, solid-state digital output

## Schemes

### Digital output, Ø 12 sensor, M8 connector


XX512A1KAM8

4-wire type



1 (+)  
3 (-)  
2 PNP output  
4 NPN output

NO outputs, PNP and NPN



(-) BU (Blue) (+) BN (Brown)  
WH (White) BK (Black)


XX512A2●

3-wire type




1 (+)  
3 (-)  
4 NPN or PNP output

NO outputs, NPN



(-) BU (Blue) (+) BN (Brown)  
BK (Black)


NO outputs, PNP



### Digital output, Ø 18 sensor, M12 connector, Ø 30 (XX6V3●, XXBV3●)


XXV18B1●●M12

3-wire type




1 (+)  
3 (-)


NO outputs, NPN




NO outputs, PNP



NC outputs, NPN




NC outputs, PNP



### Digital output, Ø 18 sensor, pre-cabled

XXV18B1●●L●

3-wire type




(-) BU (Blue) (+) BN (Brown) BK (Black)

PNP/NO, NC


NPN/NO, NC

XX518A3●●L2

PNP output



NPN output




### Thru-beam sensors: XXT12●/XXR12●, XXT18●/XXR18●, XXTF1●/XXRF1●

Transmitter


XXT12A8M8, XXT18A3M12

M8




1 (+)  
3 (-)

M12




1 (+)  
3 (-)



Receiver


XXR12A8KBM8

M8



1 (+)  
2 (PNP)  
3 (-)  
4 (NPN)

NPN, PNP, NO



# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal

DC supply, solid-state digital or analog output



XX518A3NAL2



XX918A3C2M12



XXT18A3M12



XXZPB100

## Diffuse mode

### Ø 18 sensors, digital output

Sensors	Sensing distance (Sn) m	Function/output	Connection	Reference	Weight kg
Ø 18 Plastic	0.5 (adjustable)	NO/NPN	Pre-cabled (L = 2 m)	<b>XX518A3NAL2</b>	0.08
		NO/PNP	Pre-cabled (L = 2 m)	<b>XX518A3PAL2</b>	0.08
		NO/NPN	M12 connector	<b>XX518A3NAM12</b>	0.033
		NO/PNP	M12 connector	<b>XX518A3PAM12</b>	0.033

### Ø 18 sensors, analog output

Ø 18 Plastic	0.5	4-20 mA	M12 connector	<b>XX918A3C2M12</b>	0.033
		0-10 V	M12 connector	<b>XX918A3F1M12</b>	0.033

## Thru-beam mode

### Ø 18 sensors, digital output

Transmitter	0.61	-	M12 connector	<b>XXT18A3M12</b>	0.04
Receiver	0.61	NO/PNP + NO/NPN	M12 connector	<b>XXR18A3KAM12</b>	0.04
Transmitter	1	-	M12 connector	<b>XXT18A4M12</b>	0.04
Receiver	1	NO/PNP + NO/NPN	M12 connector	<b>XXR18A4KAM12</b>	0.04

## Accessories

### Teach pushbutton

Teach pushbutton	For use with sensors	Reference	Weight kg
Selection of detection window Length of cable: 152 mm Input: M12 female connector Output: M12 male connector	XX918A● XX9V3A● XX9D1A●	<b>XXZPB100</b>	0.035



## Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal

DC supply, solid-state digital or analog output



Sensor type		XX●18A3●	XX518A3●
<b>General characteristics</b>			
Conformity to standards		CE, IEC 60947-5-2	
Product certifications		UL	UL, cCSAus
Nominal sensing distance (Sn)		<b>m</b> 0.6	0.5
Blind zone (in diffuse mode the object is not detected in this zone, in reflex mode the background is not detected in this zone)		<b>mm</b> –	0 ... 51 (XX518A3●)
Detection window		Fixed	Remotely adjustable or by using teach button
Detection system	Diffuse mode	–	●
	Reflex mode	–	●
	Thru-beam mode	●	–
Transmission frequency (transmitter resonance)		<b>kHz</b> 300	300
Differential travel		<b>mm</b> < 2.5	< 2.5
Repeat accuracy		<b>mm</b> ± 1.27	± 1.27
Overall beam angle (see detection lobe)		6°	6°
Minimum size of object to be detected		–	
Cylinder Ø (in mm), at distance (in mm)		Ø 38 to 600 Ø 114 to 1 000	Ø 2.5 to 150
Deviation angle from 90° of the object to be detected		–	± 7°
Materials	Case	ULTEM®	Valox®
	Sensing face (1)	Silicone	Epoxy
Connection	Connector	M12, 4-pin	M12, 4-pin
	Pre-cabled (wire c.s.a.)	–	4 x 0.08 mm <sup>2</sup> / AWG 28

(1) Silicone face for optimum chemical resistance.


**Dimensions**

XX518A3●AM12, XXT18A●M12, XXR18A●KAM12

XX518A3●AL2



XX918A3●M12




## Setting-up precautions


### Minimum mounting distances

#### Diffuse sensors, cylindrical type

##### Side by side




##### Face to face



e: respect the distances indicated on the detection curves

$$e \geq 4 \times S_n$$

#### XXV18●




$e > 25 \text{ mm}$

$e > 700 \text{ mm}$

$e > 60 \text{ mm}$


#### Thru-beam



Sensors	$\alpha$
XX●18A4●●/XX●K1A4	$\pm 10^\circ$

## Curves

XX518A3●●L2,  
XX518A3●AM12,  
XX918A3●●M12



Blind zone for diffuse sensors.


Blind zone for reflex sensors.

## Schemes

### Digital output, $\varnothing 18$ sensor, M12 connector


#### XX518A3●

##### 3-wire type




1 (+) 2 Teach input (WH)  
3 (-) 4 NPN or PNP output

##### NO outputs, NPN



(-) BU (Blue) (+) BN (Brown)  
BK (Black)

##### NO outputs, PNP




# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 18 mm

Diffuse mode, solid-state digital or analog output

Configurable by software



XXA18P1•M12



XXS18P1•M12



XXA18B1•M12  
XXA18S1•M12



XXS18B1•M12  
XXS18S1•M12



XXZPB100

## Diffuse mode

### Sensors with solid-state digital output, M12 connector

Sensors	Sensing distance (Sn) Adjustable	Function/output	Sensing axis	Reference	Weight
					kg
Ø 18 Plastic	1	NO or NC (1)/ PNP	Straight	XXS18P1PM12	0.033
			90° angled	XXA18P1PM12	0.040
Ø 18 Nickel-plated brass	1	NO or NC (1)/ PNP	Straight	XXS18B1PM12	0.050
			90° angled	XXA18B1PM12	0.055
Ø 18 Stainless steel 316L	1	NO or NC (1)/ PNP	Straight	XXS18S1PM12	0.050
			90° angled	XXA18S1PM12	0.055

### Sensors with analog output, M12 connector

Sensors	Sensing distance (Sn) Adjustable	Analog output (2)	Sensing axis	Reference	Weight		
					kg		
Ø 18 Plastic	1	4-20 mA	Straight	XXS18P1AM12	0.033		
			90° angled	XXA18P1AM12	0.040		
		0-10 V	Straight	XXS18P1VM12	0.033		
			90° angled	XXA18P1VM12	0.040		
		Ø 18 Nickel-plated brass	1	4-20 mA	Straight	XXS18B1AM12	0.050
					90° angled	XXA18B1AM12	0.055
Ø 18 Stainless steel 316L	1	4-20 mA	Straight	XXS18S1AM12	0.050		
			90° angled	XXA18S1AM12	0.055		

## Accessories

Description	For use with sensor	Reference	Weight kg
Teach pushbutton Input: M12 female connector Output: M12 male connector	XXS18●● XXA18●●	XXZPB100	0.035

### Configuration interface and configuration kit for the synchronization function

See page 78.

(1) Output function (NO or NC) and mode (window, reflex, proximity, pump) are selectable using the XXZPB100 remote teach pushbutton.

(2) Selectable using the XXZPB100 remote teach pushbutton.

## Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 18 mm

Diffuse mode, solid-state digital or analog output

Configurable by software



XZCPV11V12L●●



XZCPV12V12L●●



XZCP1141L●



XZCP1241L●



XZCC12FDM50B



XZCC12FCM50B



XXZB118

### Accessories

Description	Type	Length m	Reference	Weight kg
<b>Connection accessories for synchronization function</b>				
Pre-wired connector 5-pin, 5-wire female M12 connector/ bare wires PVC cable	Straight	2	<b>XZCPV11V12L2</b>	0.090
		5	<b>XZCPV11V12L5</b>	0.201
		10	<b>XZCPV11V12L10</b>	0.360
	Elbowed	2	<b>XZCPV12V12L2</b>	0.090
		5	<b>XZCPV12V12L5</b>	0.201
		10	<b>XZCPV12V12L10</b>	0.360

### Connection accessories without synchronization function

Pre-wired connector 5-pin, 4-wire female M12 connector/ bare wires PVC cable	Straight	2	<b>XZCP1141L2</b>	0.090
		5	<b>XZCP1141L5</b>	0.190
		10	<b>XZCP1141L10</b>	0.370
	Elbowed	2	<b>XZCP1241L2</b>	0.090
		5	<b>XZCP1241L5</b>	0.190
		10	<b>XZCP1241L10</b>	0.370
Female M12 connector 5-pin, Pg 7 cable gland	Straight	–	<b>XZCC12FDM50B</b>	0.020
	Elbowed	–	<b>XZCC12FCM50B</b>	0.020

### Mounting accessory

Description	For use with sensor	Reference	Weight kg
Fixing clamp (1)	XXS18●● XXA18●●	<b>XXZB118</b>	0.010

(1) Recommended to use in applications below 0°C.

## Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 18 mm

Diffuse mode, solid-state digital or analog output

Configurable by software

Sensor type		XX●18●1PM12	XX●18●1AM12	XX●18●1VM12
<b>General characteristics</b>				
Conformity to standards		EN/IEC 60947-5-2, UL 508, and CSA C22.2 n°14		
Compliance with regulations		CE (based on EMC directive 2014/30/EU), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10		
Product certifications		cULus with class 2 power supply, E2, EAC, and RCM		
Nominal sensing distance (Sn)	m	1 (adjustable)		
Blind zone (in diffuse mode the object is not detected in this zone)	m	0.105		
Detection window		Remotely adjustable or by using external teachbutton <b>XXZPB100</b>		
Transmission frequency (transmitter resonance)	kHz	200		
Differential travel	mm	< 5	–	–
Repeat accuracy (repeatability)		0.1 %		
Minimum size of object to be detected		Cylinder Ø 1 mm up to sensing distance of 0.6 m		
Tilt angle with 100 x 100 mm target		± 7° at 1 m, ± 35° at 0.5 m, ± 10° at 0.9 m		
Materials	Case	XX●18P●●: PBT XX●18B●●: Nickel-plated brass XX●18S●●: Stainless steel 316L		
	Sensing face	Epoxy, polyurethane, and butyl		
Connection		M12 connector - 5-pin		
<b>Supply characteristics</b>				
Rated supply voltage (Ue) with protection against reverse polarity	V	12...24 V $\overline{\text{---}}$		24 V $\overline{\text{---}}$
Voltage limits (including ripple)	V	10...30 V $\overline{\text{---}}$	10...30 V $\overline{\text{---}}$	14...30 V $\overline{\text{---}}$
Current consumption, no-load	mA	< 30	< 30	< 30
<b>Output characteristics</b>				
LED indicators	Output state	Yellow LED	Yellow LED	Yellow LED
	Echo state	Green LED	Green LED	Green LED
Switching capacity (with overload and short-circuit protection)		< 100 mA	–	–
Resistive load impedance	Ω	–	12 V $\overline{\text{---}}$ , load ≤ 250 Ω 24 V $\overline{\text{---}}$ , load ≤ 850 Ω	≥ 1 kΩ
Voltage drop	V	< 2	–	–
Internal temperature compensation		Yes	Yes	Yes
Maximum switching frequency	Hz	11	–	–
Delays	First-up	ms	120	180
	Response	ms	45	–
	Recovery	ms	45	100
<b>Environment characteristics</b>				
Degree of protection	Conforming to IEC 60529 and EN/IEC 60947-5-2		IP 65, IP 67	
Storage temperature		°C	-40...+ 80	
Operating temperature		°C	-25...+ 70 (1)	
Relative humidity			< 95%, without condensation	
Vibration resistance	Conforming to IEC 60068-2-6		Amplitude ± 1 mm (f = 10...55 Hz)	
Mechanical shock resistance	Conforming to IEC 60068-2-27		30 gn, duration 11 ms, in all 3 axes	
Resistance to electromagnetic interference			Conforming to EN/IEC 60947-5-2 and UNECE R10-05	

(1) For applications below 0°C, it is recommended to use the **XXZB118** fixing clamp (see page 31).

# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 18 mm


Diffuse mode, solid-state digital or analog output

Configurable by software


## Operating diagrams for digital output sensors

### Settings with teach procedure


#### Window mode



#### Reflex mode




#### Proximity mode




#### Pump/Hysteresis mode

##### Emptying (stored in high threshold memory)

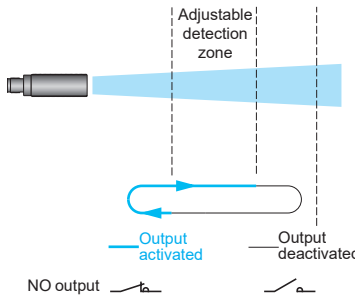


##### Filling (stored in low threshold memory)

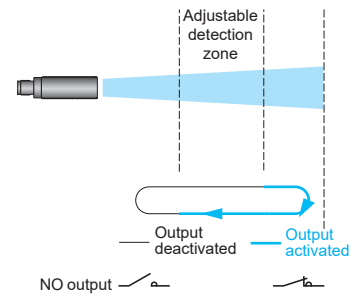


## Operating diagram for analog output sensors

### Near and far limits setting with teach procedure

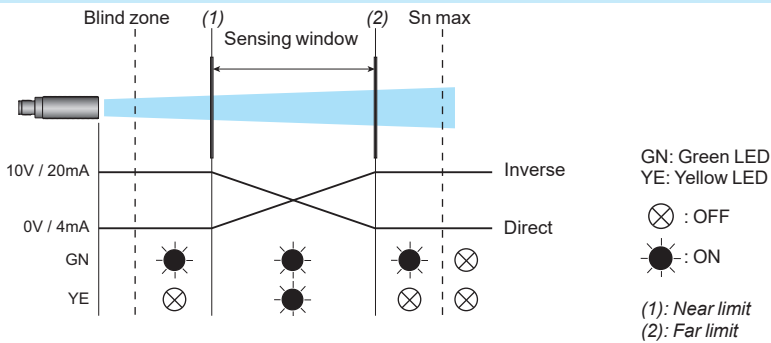

## Diagram for the synchronization function (side by side application)

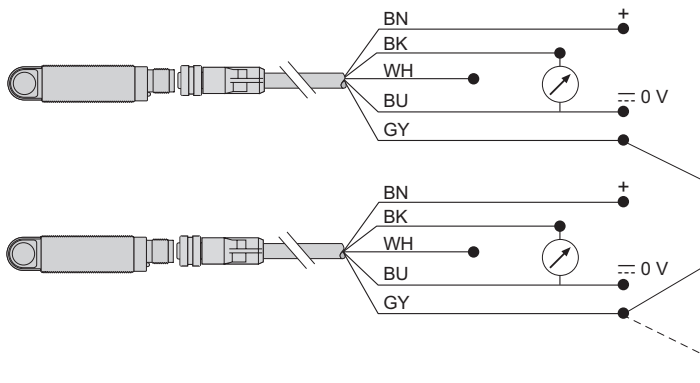

**NB:** To enable synchronization between several sensors, all of the wires of pin no.5 (gray) must be electrically connected together. A maximum of 8 sensors can be synchronized. To enable "Multiplexer" function for the sensors, use the XX Configuration Software. Without synchronization or multiplexing, the sensors must be at least 50 cm away from each other in order to avoid mutual interference.

# Ultrasonic sensors

XX range, General purpose


Cylindrical, plastic or metal, Ø 18 mm

Diffuse mode, solid-state digital or analog output


Configurable by software

## Curves

Detection curve with 100 x 100 mm square target

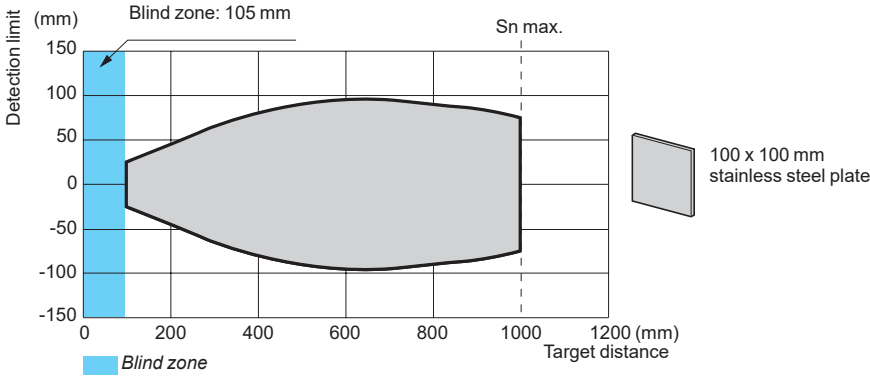


Detection curve with round bar

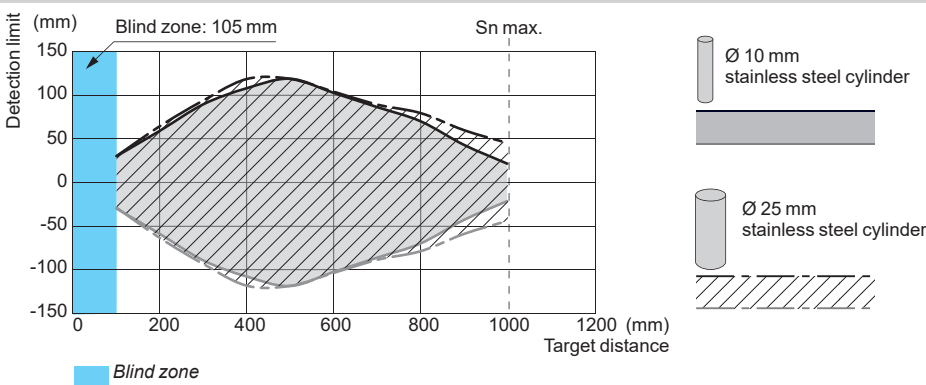

## Dimensions


### Plastic sensors, straight

XXS18P1●M12

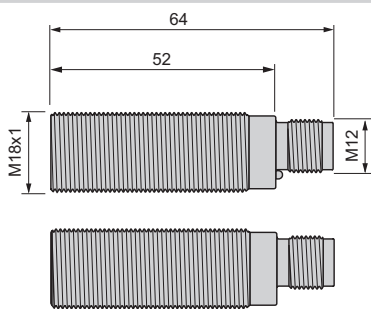


### Plastic sensors, 90° angled

XXA18P1●M12

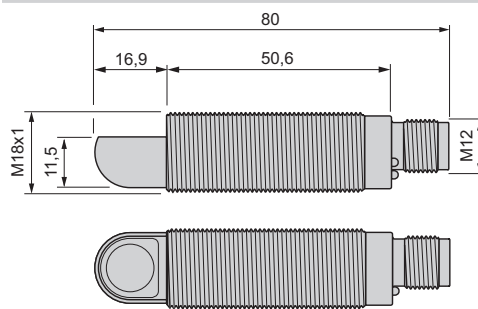


### Nickel-plated brass and stainless steel sensors, straight

XXS18B1●M12 and XXS18S1●M12

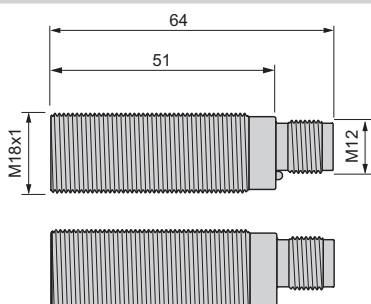

### Nickel-plated brass and stainless steel sensors, 90° angled

XXA18B1●M12 and XXA18S1●M12

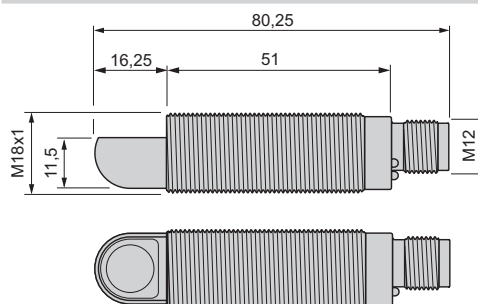



# Ultrasonic sensors

XX range, General purpose


Cylindrical, plastic or metal, Ø 18 mm

Diffuse mode, solid-state digital or analog output

Configurable by software


## Dimensions (continued)

### Fixing clamp XXZB118

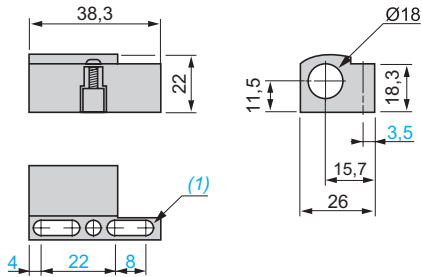

(1) 2 elongated holes Ø 4 X 8 mm


### Teach pushbutton XXZPB100

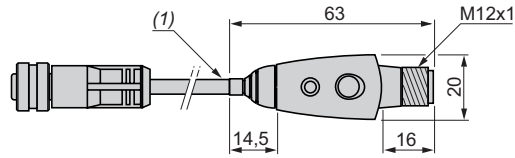

(1) Cable length: 152 mm

## Connections

### Connector wiring

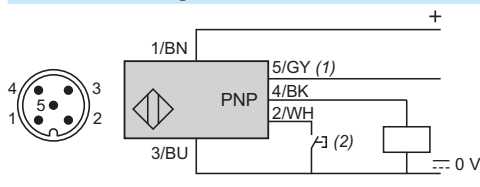


Pin number	Wire color	Digital output description	Analog output description	
			4-20 mA	0-10 V
1	BN: Brown	+12...24 V $\square$	+12...24 V $\square$	+14...24 V $\square$
2	WH: White	Input teach		
3	BU: Blue	0 V $\square$		
4	BK: Black	Output		
5	GY: Gray	Synchronization		

(1) Synchronization.

(2) External setting pushbutton or XXZPB100 remote teach pushbutton (see page 30).


### Wiring scheme (digital output NO or NC)

#### XXS18•1PM12 and XXA18•1PM12

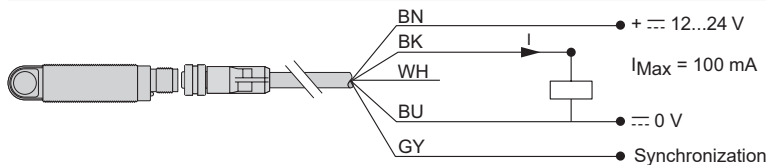

### Wiring scheme (analog output 4-20 mA)

#### XXS18•1AM12 and XXA18•1AM12

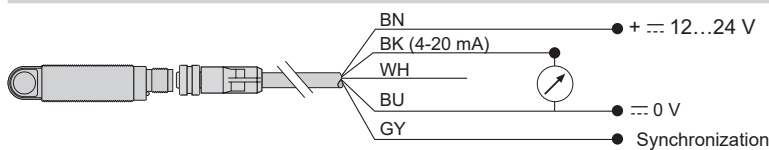


4-20 mA:

- $\square$  For 12 V  $\square$ , load  $\leq$  250  $\Omega$
- $\square$  For 24 V  $\square$ , load  $\leq$  850  $\Omega$

### Wiring scheme (analog output 0-10 V)

#### XXS18•1VM12 and XXA18•1VM12

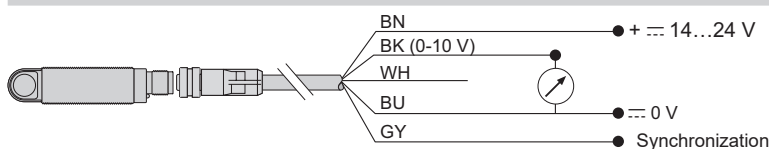

0-10 V:  
1 k $\Omega$ ... $\infty$

# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal

DC supply, solid-state digital or analog output



XX630A1KAM12



XX630S1NCM12



XX6V3A1NAM12



XX930A1A2M12



XX930A3A2M12

### Diffuse mode

#### Solid-state digital output, M12 connector

Sensors	Sensing distance (Sn) m	Function/output	Reference	Weight kg
Ø 30 Plastic	1 (adjustable)	NO/PNP + NO/NPN	XX630A1KAM12	0.09
		NO/NPN	XX6V3A1NAM12	0.09
		NO/PNP	XX6V3A1PAM12	0.09
	2 (adjustable)	NO/NPN + NC/NPN	XX630A1NCM12	0.09
		NO/PNP + NC/PNP	XX630A1PCM12	0.09
		NO/NPN + NC/NPN	XX630A2NCM12	0.09
8 (adjustable)	NO/NPN + NC/NPN	XX630A3NCM12	0.11	
	NO/PNP + NC/PNP	XX630A3PCM12	0.11	
Ø 30 Stainless steel 303	1 (adjustable)	NO/NPN + NC/NPN	XX630S1NCM12	0.09
		NO/PNP + NC/PNP	XX630S1PCM12	0.09

#### Standard analogue output, M12 connector

Sensors	Sensing distance (Sn) m	Analogue output (Slope selection using teach button)	Reference	Weight kg
Ø 30 Plastic	1	4-20 mA	XX930A1A2M12	0.095
		0-10 V	XX930A1A1M12	0.095
		4-20 mA	XX9V3A1C2M12	0.090
	2	0-10 V	XX9V3A1F1M12	0.090
		4-20 mA	XX930A2A2M12	0.095
		0-10 V	XX930A2A1M12	0.095
8	4-20 mA	XX930A3A2M12	0.115	
	0-10 V	XX930A3A1M12	0.115	
Ø 30 Stainless steel 303	1	4-20 mA	XX930S1A2M12	0.095
		0-10 V	XX930S1A1M12	0.095

#### 250 ms delayed analogue output (for unstable object), M12 connector

Ø 30 Plastic	1	4-20 mA	XX930A1A2230M12	0.095
	2	4-20 mA	XX930A2A2230M12	0.095

## Ultrasonic sensors

XX range, General purpose  
Cylindrical, plastic or metal  
DC supply, solid-state digital output

Sensor type	XX6V3A1●	XX630A1● XX630A2● XX630S1●	XX630A3●	XX930A1● XX930A2● XX930S1●	XX930A3●	XX9V3A1●	
<b>General characteristics</b>							
Conformity to standards	CE, IEC 60947-5-2			CE, IEC 60947-5-2			
Product certifications	UL, cCSAus (1)			UL, cCSAus			
Nominal sensing distance (Sn)	m	1	1 or 2 (2)	8	1 or 2 (3)	8	1
Blind zone (in diffuse mode the object is not detected in this zone, in reflex mode the background is not detected in this zone)	mm	0 ...100	0...51 (XX630●1) 0...120 (XX630A2●)	0...300	0...51 or 0...120 (3)	0...300	0...100
Detection window		Remotely adjustable or by using external teach button	Adjustable using teach button on sensor	Adjustable using teach button on sensor	Adjustable using teach button on sensor	Remotely adjustable or by using external teach button	
Detection system	Diffuse	●	●	●	–	–	–
	Reflex	●	–	–	–	–	–
	Thru-beam	–	–	–	–	–	–
Transmission frequency (transmitter resonance)	kHz	180	200	75	200	75	180
Differential travel	mm	< 2.5	< 2.5	< 12.7			
Repeat accuracy	mm	± 1.6	± 0.87	± 2.54	± 0.9	± 2.54	± 0.9 1.6mm
Overall beam angle (see detection lobe)		7°	10°	16°	10°	16°	7°
Minimum size of object to be detected		Cylinder Ø 50 mm at distance 1 m	Cylinder Ø 1.6 mm at distance 635 mm	Cylinder Ø 51 mm at distance 4732 mm	Cylinder Ø 1.6 mm up to a sensing distance of 635 mm	Cylinder Ø 51 mm up to a sensing distance of 4732 mm	Cylinder Ø 50 mm up to a sensing distance of 1 m
Deviation angle from 90° of the object to be detected		± 5°	± 7° or ± 10° (2)	± 5°	± 8°	± 5°	± 5°
Materials	Case	Valox®	ULTEM®	ULTEM®	ULTEM® : XX930A1● and XX930A2●	ULTEM®	Valox®
		Stainless steel 303 for XX630AS1●●●●			Stainless steel 303: XX930S1●	–	
	Sensing face (4)	Epoxy	Silicone	Epoxy	Silicone	Epoxy	
Connection		M12 connector, 4-pin					

(1) Only XX6V3A1●, XX630A1●, XX630A2●, XX630S1● and XX630A3● sensors are cCSAus certified.

(2) The first value is given for XX630A1● and XX630S1●, the second value for XX630A2●.

(3) The first value is given for XX930A1● and XX930S1●, the second value for XX930A2●.

(4) Silicone face for optimum chemical resistance.

# Ultrasonic sensors

XX range, General purpose  
Cylindrical, plastic or metal  
DC supply, solid-state digital output

Sensor type		XX6V3A1●	XX630A1● XX630A2● XX630S1●	XX630A3●	XX930A1● XX930A2● XX930S1●	XX930A3●	XX9V3A1●	
<b>Supply characteristics</b>								
Rated supply voltage	V	12...24 V $\overline{\text{---}}$ with protection against reverse polarity			$\overline{\text{---}}$ 15...24 V	$\overline{\text{---}}$ 15...24 V	$\overline{\text{---}}$ 15...24 V	
Voltage limits (including ripple)	V	$\overline{\text{---}}$ 10...28 V			$\overline{\text{---}}$ 10...28 V	–		
Current consumption, no-load	mA	60	50 or 100 (1)	50	60 or 80 (2)	60	60	
<b>Output characteristics</b>								
LED indicators	Output state	Yellow LED			Yellow LED	–		
	Power on	Green LED			Green LED	–		
	Setting-up assistance	Multicolour LED			Dual colour LED	–		
Slope type		–			Direct or inverse by using teach button <b>XXZPB100</b>			
Switching capacity (with overload and short-circuit protection)	mA	< 100			–	–		
Voltage drop	V	< 100			–	–		
Maximum switching frequency	Hz	70	10 or 16 (1)	2	–	–		
Delays	First-up	ms	75	720	800	720	1 200	75
	Response	ms	15	20 or 25 (1)	200			
	Recovery	ms	75	20	200	250 (delayed) 50 (standard)	250	180
Resistive load impedance	4-20 mA	$\Omega$	–			10...500		10...350
	0-10 V	$\Omega$	–			1 k... $\infty$		2 k... $\infty$
<b>Environment characteristics</b>								
Degree of protection	Conforming to IEC 60529 and IEC 60947-5-2	IP 67	IP 65 or IP 67 (1) IP67 for plastic versions. IP65 for stainless steel versions.	IP 67	IP 67	IP 67	IP 67	
Storage temperature	$^{\circ}\text{C}$	-40...+80						
Operating temperature	$^{\circ}\text{C}$	0...+70	0...+60 or 0...+50 (1)	-20...+60	0...+50	-20...+60	0...+70	
Vibration resistance	Conforming to IEC 60068-2-6	Amplitude $\pm$ 1 mm (f = 10...55 Hz); $\pm$ 2 mm for XXV18B1●			Amplitude $\pm$ 1 mm (f = 10...55 Hz)			
Mechanical shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms, in all 3 axes 50 gn, duration 11 ms, in all 3 axes for XXV18B1●			30 gn, duration 11 ms, in all 3 axes			
Resistance to electromagnetic interference		Conforming to IEC 60947-5-2						

(1) The first value is given for XX630A1● and XX630S1●, the second value for XX630A2●.




(2) The first value is given for XX930A1● and XX930S1●, the second value for XX930A2●.

## Dimensions

XX630A1●●M12  
XX630S1●●M12  
XX630A2●●M12  
XX930A1A●M12  
XX230A1●●A00M12  
XX230A2●●A00M12

XX6V3A1●AM12  
XX9V3A1●●M12

XX630A3●●M12  
XX930A3A●M12

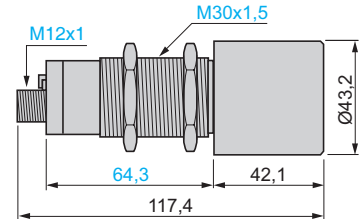

## Curves





XXV18B1●

Square object

Cylindrical object



XX630A2●CM12

XX630A3●CM12  
XX930A3●●M12



XX230A2●

XX230A1●, XX630A1●CM12, XX6V3A1●AM12, XX930A1●●M12, XX9V3A1●●M12, XX8D1A1●AM12, XXBD1A1●AM12



Blind zone for diffuse sensors  
Blind zone for reflex sensors

# Ultrasonic sensors

XX range, Application

Sensors for monitoring 2 levels

Cylindrical plastic case, M18 x 1 and M30 x 1.5

DC supply, solid-state digital output



XX218A3P●M12



XX230A12NA00M12

## Sensors for monitoring 2 levels

Sensors	Sensing distance (Sn) m	Function/output	Reference	Weight kg
<b>Ø 18, threaded M18 x 1</b>				
2 emptying levels	0.5 (adjustable)	NO/PNP	<b>XX218A3PHM12</b>	0.035
2 filling levels	0.5 (adjustable)	NO/PNP	<b>XX218A3PFM12</b>	0.035
<b>Ø 30, threaded M30 x 1.5</b>				
2 levels 2 independent outputs	1 (adjustable)	NO/NPN + NO/NPN	<b>XX230A12NA00M12</b>	0.090
		NO/PNP + NO/PNP	<b>XX230A12PA00M12</b>	0.090
	2 (adjustable)	NO/PNP + NO/PNP	<b>XX230A22PA00M12</b>	0.090
2 emptying levels	1 (adjustable)	NO/PNP + NO/PNP	<b>XX230A10PA00M12</b>	0.090
	2 (adjustable)	NO/PNP + NO/PNP	<b>XX230A20PA00M12</b>	0.090
2 filling levels	1 (adjustable)	NO/PNP + NO/PNP	<b>XX230A11PA00M12</b>	0.090
	2 (adjustable)	NO/PNP + NO/PNP	<b>XX230A21PA00M12</b>	0.090

## Accessories

### Teach pushbutton


Teach pushbutton	For use with sensors	Reference	Weight kg
Selection of detection window Length of cable: 152 mm Input: M12 female connector Output: M12 male connector	XX218A3●	<b>XXZPB100</b>	0.035

### Other connection and fixing accessories


See page 82.

## Dimensions

XX218A3P●M12




XX230A1●●A00M12  
XX230A2●●A00M12




## Curves


XX218A3●●M12



XX230A1●●●●●M12



XX230A2●●●●●M12



Blind zone for diffuse sensors.

Blind zone for reflex sensors.

## Ultrasonic sensors

XX range, Application

Sensors for monitoring 2 levels

Cylindrical plastic case, M18 x 1 and M30 x 1.5

DC supply, solid-state digital output

Sensor type		XX218A3●●●●	XX230A1●●●●	XX230A2●●●●
<b>General characteristics</b>				
Conformity to standards		CE, IEC 60947-5-2		
Product certifications		UL, cCSAus	UL, cCSAus	UL, cCSAus
Nominal sensing distance (Sn)		<b>m</b> 0.50 (adjustable)	1 (adjustable)	2 (adjustable)
Blind zone (no object must pass through this zone whilst the sensor is operating)		<b>mm</b> 0...51	0...51	0...120
Detection window		Remotely adjustable or by using external teach button	Adjustable using teach button on sensor	
Transmission frequency		<b>kHz</b> 300	200	
Differential travel		<b>mm</b> < 2.5	< 2.5	< 2.5
Repeat accuracy		<b>mm</b> ± 1.27	± 0.9	
Overall beam angle (see detection lobe)		6°	10°	10°
Minimum size of object to be detected		Cylinder Ø 2.5 mm up to a sensing distance of 150 mm	Cylinder Ø 1.6 mm up to a sensing distance of 305 mm	
Deviation angle from 90° of the object to be detected		± 7°	± 10° on 305 x 305 mm	
Materials		Case	Valox®	ULTEM®
		Sensing face (1)	Epoxy	Silicone
Connection		Connector	M12, 4-pin	
<b>Supply characteristics</b>				
Rated supply voltage		<b>V</b> 12...24 V $\overline{\text{DC}}$ with protection against reverse polarity		
Voltage limits (including ripple)		<b>V</b> 10...28 V $\overline{\text{DC}}$		
Current consumption, no-load		<b>mA</b> 40	100	
<b>Output characteristics</b>				
LED indicators		Output state	Yellow LED	Multicolour LED
		Power on	Green LED	–
		Setting-up assistance	Dual colour LED	Multicolour LED
		Distance indication	–	Yellow LED
Switching capacity		<b>mA</b>	< 100 (PNP and NPN) with overload and short-circuit protection	
Voltage drop		<b>V</b>	< 1 (PNP and NPN)	
Delays		First-up	<b>ms</b> 100	1000
		Response	<b>ms</b> 15	150
		Recovery	<b>ms</b> 1000	1000
<b>Environment characteristics</b>				
Degree of protection		Conforming to IEC 60529 and IEC 60947-5-2	IP 67	IP 65
Storage temperature		<b>°C</b>	- 40...+ 80	- 10...+ 80
Operating temperature		<b>°C</b>	- 20...+ 65	0...+ 50
Vibration resistance		Conforming to IEC 60068-2-6	Amplitude ± 1 mm (f = 10...55 Hz)	
Mechanical shock resistance		Conforming to IEC 60068-2-27	30 gn, duration 11 ms, in all 3 axes	
Resistance to electromagnetic interference			Conforming to IEC 60947-5-2	

(1) Silicone face for optimum chemical resistance.

# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm

Diffuse mode, solid-state digital or analog output

Configurable by software



XXA30P1PM12



XXS30P1PM12



XXS30B2PM12



XXA30S2PM12



XXS30S4PM12



XXS30P8M12



XXS30P1AM12



XXS30P2AM12

## Diffuse mode

### Sensors with solid-state digital output, M12 connector

Sensors	Sensing Function/ distance output (Sn)		Sensing axis	Reference	Weight kg
	m				
Ø 30 Plastic	1	NO or NC (1)/PNP	Straight	XXS30P1PM12	0.047
			90° angled	XXA30P1PM12	0.100
	2	NO or NC (1)/PNP	Straight	XXS30P2PM12	0.095
			90° angled	XXA30P2PM12	0.100
	4	NO or NC (1)/PNP	Straight	XXS30P4PM12	0.115
		8	NO or NC (1)/PNP x 2	Straight	XXS30P8PPM12
Ø 30 Nickel-plated brass	1	NO or NC (1)/PNP	Straight	XXS30B1PM12	0.165
			90° angled	XXA30B1PM12	0.175
	2	NO or NC (1)/PNP	Straight	XXS30B2PM12	0.165
			90° angled	XXA30B2PM12	0.175
	4	NO or NC (1)/PNP	Straight	XXS30B4PM12	0.195
		8	NO or NC (1)/PNP x 2	Straight	XXS30B8PPM12
Ø 30 Stainless steel 316L	1	NO or NC (1)/PNP	Straight	XXS30S1PM12	0.160
			90° angled	XXA30S1PM12	0.170
	2	NO or NC (1)/PNP	Straight	XXS30S2PM12	0.160
			90° angled	XXA30S2PM12	0.170
	4	NO or NC (1)/PNP	Straight	XXS30S4PM12	0.190
		8	NO or NC (1)/PNP x 2	Straight	XXS30S8PPM12

### Sensors with analog output, adjustable sensing distance, M12 connector

Sensors	Sensing Function/ distance output (Sn)		Sensing axis	Reference	Weight kg	
	m					
Ø 30 Plastic	1	4-20 mA	Straight	XXS30P1AM12	0.047	
		0-10 V	Straight	XXS30P1VM12	0.047	
		4-20 mA	90° angled	XXA30P1AM12	0.100	
		0-10 V	90° angled	XXA30P1VM12	0.100	
		2	4-20 mA	Straight	XXS30P2AM12	0.095
			0-10 V	Straight	XXS30P2VM12	0.095
	4-20 mA		90° angled	XXA30P2AM12	0.100	
	4	4-20 mA	Straight	XXS30P4AM12	0.115	
		0-10 V	Straight	XXS30P4VM12	0.115	
		4-20 mA + PNP (2)	Straight	XXS30P8APM12	0.210	
	8	0-10 V + PNP (2)	Straight	XXS30P8VPM12	0.210	

(1) NO or NC: configurable by software (see page 78).

(2) One analogic output and one digital output with NO or NC configurable by software (see page 78).



# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm

Diffuse mode, solid-state digital or analog output

Configurable by software



### Diffuse mode (continued)

Sensors with analog output, adjustable sensing distance, M12 connector

Sensors	Sensing distance	Function/ output	Sensing axis	Reference	Weight	
	(Sn) m					kg
Ø 30 Nickel-plated brass	1	4-20 mA	Straight	XXS30B1AM12	0.165	
		0-10 V	Straight	XXS30B1VM12	0.165	
		4-20 mA	90° angled	XXA30B1AM12	0.175	
		0-10 V	90° angled	XXA30B1VM12	0.175	
	2	4-20 mA	Straight	XXS30B2AM12	0.165	
		0-10 V	Straight	XXS30B2VM12	0.165	
		4-20 mA	90° angled	XXA30B2AM12	0.175	
		0-10 V	90° angled	XXA30B2VM12	0.175	
4	4-20 mA	Straight	XXS30B4AM12	0.195		
	0-10 V	Straight	XXS30B4VM12	0.195		
	Ø 30 Stainless steel 316L	1	4-20 mA	Straight	XXS30S1AM12	0.160
			0-10 V	Straight	XXS30S1VM12	0.160
4-20 mA			90° angled	XXA30S1AM12	0.170	
0-10 V			90° angled	XXA30S1VM12	0.170	
2		4-20 mA	Straight	XXS30S2AM12	0.160	
		0-10 V	Straight	XXS30S2VM12	0.160	
		4-20 mA	90° angled	XXA30S2AM12	0.170	
		0-10 V	90° angled	XXA30S2VM12	0.170	
4	4-20 mA	Straight	XXS30S4AM12	0.190		
	0-10 V	Straight	XXS30S4VM12	0.190		

### Accessories

Teach pushbutton	For use with sensors	Reference	Weight
Selection of detection window Length of cable: 152 mm Input: M12 female connector Output: M12 male connector	XXS30●● XXA30●●	XXZPB100	0.035

### Configuration interface and configuration kit for the synchronization function

See page 78.

# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm

Diffuse mode, solid-state digital or analog output


Configurable by software



XZCPV11V12L2



XZCPV12V12L2



XZCPV1164L10



XZCC12FDM50B



XXZB130

### Accessories (continued)

Description	Type	Length	Reference	Weight kg
Pre-wired connector 5-pin, 5-wire female M12 connector/bare wires PVC cable	Straight	2	XZCPV11V12L2	0.090
		5	XZCPV11V12L5	0.201
		10	XZCPV11V12L10	0.360
	Elbowed	2	XZCPV12V12L2	0.090
		5	XZCPV12V12L5	0.201
		10	XZCPV12V12L10	0.360

### Connection accessories without synchronization function

Pre-wired connector 5-pin, 5-wire female M12 connector/bare wires PVC cable	Straight	2	XZCPV1164L2	0.090
		5	XZCPV1164L5	0.190
		10	XZCPV1164L10	0.370
	Elbowed	2	XZCPV1264L2	0.090
		5	XZCPV1264L5	0.201
		10	XZCPV1264L10	0.360
Female M12 connector 5-pin, Pg 7 cable gland	Straight	-	XZCC12FDM50B	0.020
			XZCC12FDM50B	0.020

### Mounting accessory

Description	For use with sensor	Weight kg
Fixing clamp	XXS30●● XXA30●●	XXZB130 0.010

### Configuration interface and configuration kit for the synchronization function

See page 78.

## Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 1 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

Sensor type		XXS30P1PM12	XXS30P1AM12	XXS30P1VM12
<b>General characteristics</b>				
<b>Conformity to standards</b>		EN/IEC 60947-5-2, UL 508, and CSA C22.2 n°14		
<b>Compliance with regulations</b>		CE (based on EMC directive 2014/30/EU), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10		
<b>Product certifications</b>		cULus with class 2 power supply, E2, EAC, RCM, and ECOLAB		
<b>Nominal sensing distance (Sn)</b>		<b>m</b>	1 (adjustable)	
<b>Blind zone</b> (in diffuse mode the object is not detected in this zone)		<b>m</b>	0.105	
<b>Detection window</b>		Remotely adjustable or by using external teachbutton <b>XXZPB100</b>		
<b>Transmission frequency (transmitter resonance)</b>		<b>kHz</b>	200	
<b>Differential travel</b>		<b>mm</b>	< 5	–
<b>Repeat accuracy (repeatability)</b>			0.1 %	
<b>Minimum size of object to be detected</b>			Cylinder Ø 1 mm up to sensing distance of 0.6m	
<b>Tilt angle with 100 x 100 mm target</b>			± 7° at 1 m, ± 10° at 0.9 m ± 35° at 0.5 m	
<b>Materials</b>	Case		XX●30P●: PBT	
	Sensing face		Epoxy, resin, and rubber	
<b>Connection</b>			M12 connector - 5-pin	
<b>Supply characteristics</b>				
<b>Rated supply voltage (Ue)</b> with protection against reverse polarity		<b>V</b>	≐ 12...24 V	≐ 12...24 V
<b>Voltage limits (including ripple)</b>		<b>V</b>	≐ 10...30 V	≐ 14...30 V
<b>Current consumption, no-load</b>		<b>mA</b>	< 30	< 30
<b>Output characteristics</b>				
<b>LED indicators</b>	Output state		Yellow LED	Yellow LED
	Echo state		Green LED	Green LED
<b>Switching capacity (with overload and short-circuit protection)</b>			< 100 mA	–
<b>Resistive load impedance</b>		<b>Ω</b>	–	≐ 12 V, load ≤ 250 Ω ≐ 24 V, load ≤ 850 Ω
<b>Voltage drop</b>		<b>V</b>	< 2	–
<b>Internal temperature compensation</b>			Yes	Yes
<b>Maximum switching frequency</b>		<b>Hz</b>	11	–
<b>Delays</b>	First-up	<b>ms</b>	120	180
	Response	<b>ms</b>	45	–
	Recovery	<b>ms</b>	45	100
<b>Environment characteristics</b>				
<b>Degree of protection</b> Conforming to IEC 60529 and EN/IEC 60947-5-2			IP 65, IP 67	
<b>Storage temperature</b>		<b>°C</b>	- 40...+ 80	
<b>Operating temperature</b>		<b>°C</b>	- 25...+ 70	
<b>Relative humidity</b>			< 95%, without condensation	
<b>Vibration resistance</b> Conforming to IEC 60068-2-6			Amplitude ± 1 mm (f = 10...55 Hz)	
<b>Mechanical shock resistance</b> Conforming to IEC 60068-2-27			30 gn, duration 11 ms, in all 3 axes	
<b>Resistance to electromagnetic interference</b>			Conforming to EN/IEC 60947-5-2 and UNECE R10-05	

## Ultrasonic sensors

XX range, General purpose  
Cylindrical, plastic or metal, Ø 30 mm, 1 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

Sensor type	XXA30P1PM12 XX●30B1PM12 XX●30S1PM12	XXA30P1AM12 XX●30B1AM12 XX●30S1AM12	XXA30P1VM12 XX●30B1VM12 XX●30S1VM12
<b>General characteristics</b>			
Conformity to standards	EN/IEC 60947-5-2, UL 508, and CSA C22.2 n°14		
Compliance with regulations	CE (based on EMC directive 2014/30/EU), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10		
Product certifications	cULus with class 2 power supply, E2, EAC, RCM, and ECOLAB		
Nominal sensing distance (Sn)	m	1 (adjustable)	
Blind zone (in diffuse mode the object is not detected in this zone)	m	0.155	
Detection window	Remotely adjustable or by using external teachbutton <b>XXZPB100</b>		
Transmission frequency (transmitter resonance)	kHz	120	
Differential travel	mm	< 5	-
Repeat accuracy (repeatability)		0.1 %	
Minimum size of object to be detected	Cylinder Ø 1 mm up to sensing distance of 1m		
Tilt angle with 100 x 100 mm target	± 12° at 1 m, ± 15° at 0.9 m ± 45° at 0.5 m		
Materials	Case	XX●30P●: PBT XX●30B●: Nickel-plated brass XX●30S●: Stainless steel 316L	
	Sensing face	Epoxy, resin, and rubber	
Connection	M12 connector - 5-pin		
<b>Supply characteristics</b>			
Rated supply voltage (Ue) with protection against reverse polarity	V	12...24 V $\overline{\text{---}}$	12...24 V $\overline{\text{---}}$
Voltage limits (including ripple)	V	10...30 V $\overline{\text{---}}$	14...30 V $\overline{\text{---}}$
Current consumption, no-load	mA	< 65	< 65
<b>Output characteristics</b>			
LED indicators	Output state	Yellow LED	Yellow LED
	Echo state	Green LED	Green LED
Switching capacity (with overload and short-circuit protection)		< 100 mA	-
Resistive load impedance	Ω	-	12 V, load ≤ 250 Ω 24 V, load ≤ 850 Ω
Voltage drop	V	< 2	-
Internal temperature compensation		Yes	Yes
Maximum switching frequency	Hz	11	
Delays	First-up	ms	120
	Response	ms	45
	Recovery	ms	45
<b>Environment characteristics</b>			
Degree of protection Conforming to IEC 60529 and EN/IEC 60947-5-2		IP 65, IP 67	
Storage temperature	°C	- 40...+ 80	
Operating temperature	°C	- 25...+ 70	
Relative humidity		< 95%, without condensation	
Vibration resistance Conforming to IEC 60068-2-6		Amplitude ± 1 mm (f = 10...55 Hz)	
Mechanical shock resistance Conforming to IEC 60068-2-27		30 gn, duration 11 ms, in all 3 axes	
Resistance to electromagnetic interference		Conforming to EN/IEC 60947-5-2 and UNECE R10-05	

# Ultrasonic sensors


XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 1 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Operating diagrams for digital output sensors


### Settings with teach procedure

#### Window mode




- (1): Near limit
- (2): Far limit
- (3): Sensing window

#### Reflex mode



- (1): Reflector
- (2): Near limit
- (3): Far limit


#### Proximity mode




- (1) Switch point.

#### Pump/Hysteresis mode

##### Emptying (stored in high threshold memory)

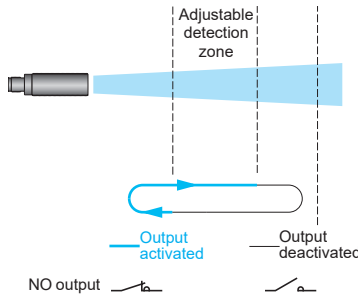


##### Filling (stored in low threshold memory)

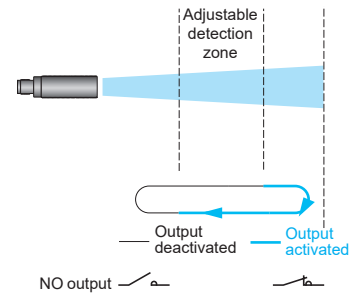


## Operating diagram for analog output sensors

### Near and far limits setting with teach procedure

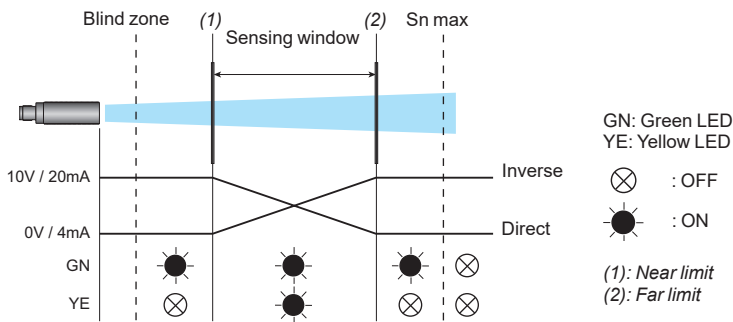

## Diagram for the synchronization function (side by side application)

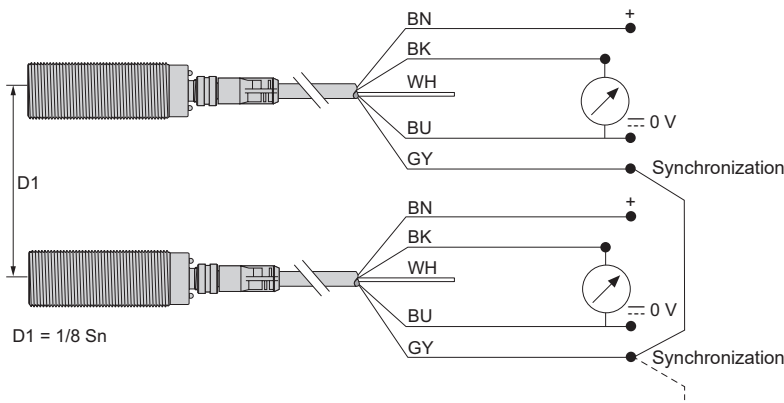


**NB:** To enable synchronization between several sensors, all of the wires of pin no.5 (gray) must be electrically connected together. A maximum of 8 sensors can be synchronized. To enable "Multiplexer" function for the sensors, use the XX Configuration Software. Without synchronization or multiplexing, the sensors must be at least 50 cm away from each other in order to avoid mutual interference.

# Ultrasonic sensors


XX range, General purpose  
Cylindrical, plastic or metal, Ø 30 mm, 1 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Dimensions


XXA30●1●M12

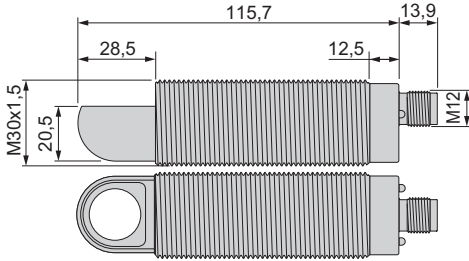


XXS30B1●M12, XXS30S1●M12

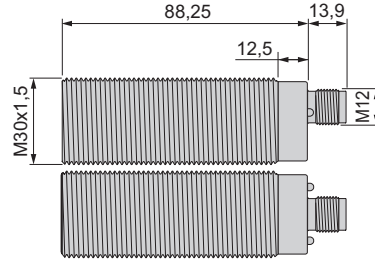

XXS30P1PM12, XXS30P1AM12, XXS30P1VM12




Teach pushbutton XXZPB100

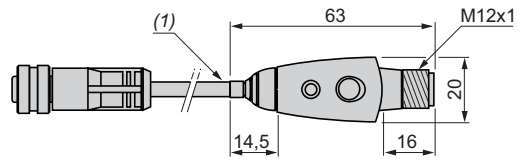

(1) Cable length: 152 mm

## Connections

### Connector wiring

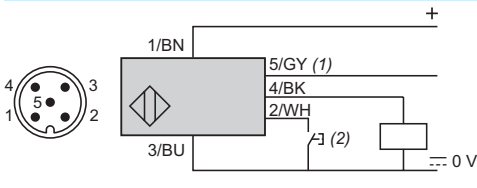


Pin number	Wire color	Digital output description	Analog output description	
			4-20 mA	0-10 V
1	BN: Brown	+12...24 V $\square$	+ $\square$ 12...24 V	+ $\square$ 14...24 V
2	WH: White	Input teach		
3	BU: Blue	0 V $\square$		
4	BK: Black	Output		
5	GY: Gray	Synchronization		

(1) Synchronization.

(2) External setting pushbutton or XXZPB100 remote teach pushbutton (see page 43).


### Wiring scheme (digital output NO or NC)

XXA30●●PM12/XXS30●●PM12

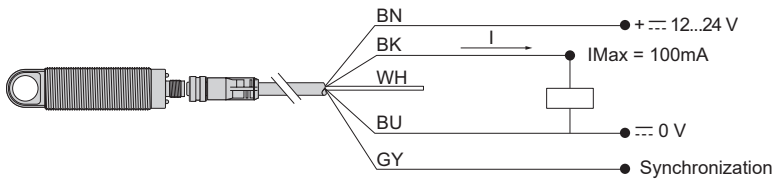


### Wiring scheme (analog output 0-10V)

XX●30●●VM12

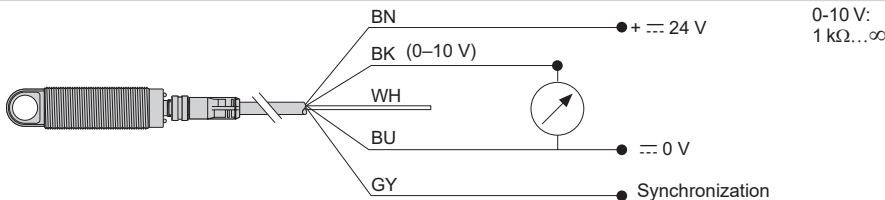

### Wiring scheme (analog output 4-20 mA)

XX●30●●AM12

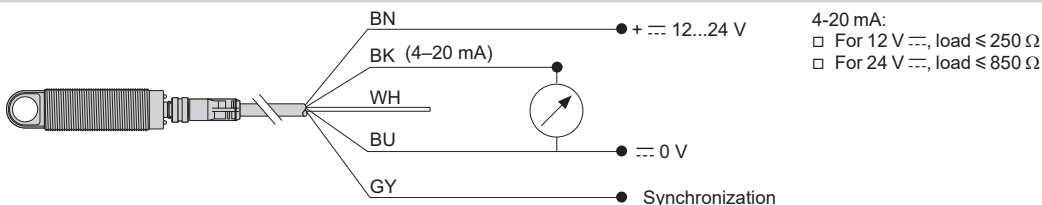

4-20 mA:  
 □ For 12 V  $\square$ , load  $\leq$  250  $\Omega$   
 □ For 24 V  $\square$ , load  $\leq$  850  $\Omega$

# Ultrasonic sensors


XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 1 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software


## Curves

### Detection curve with 100 x 100 mm square target

XXA30●1●M12, XXS30B1●M12, XXS30S1●M12

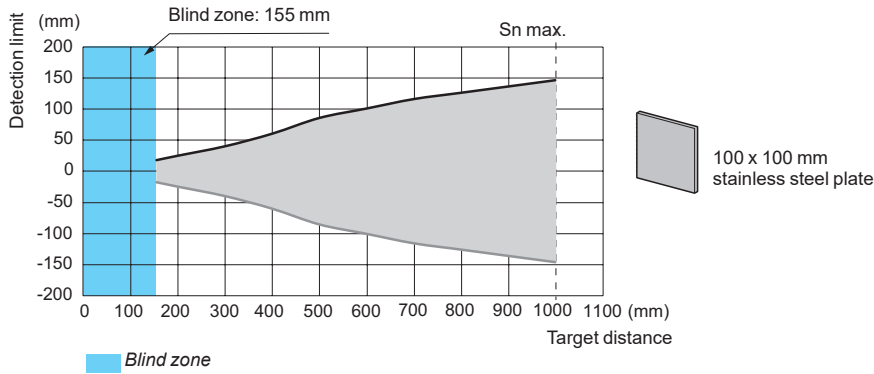


XXS30P1PM12, XXS30P1AM12, XXS30P1VM12

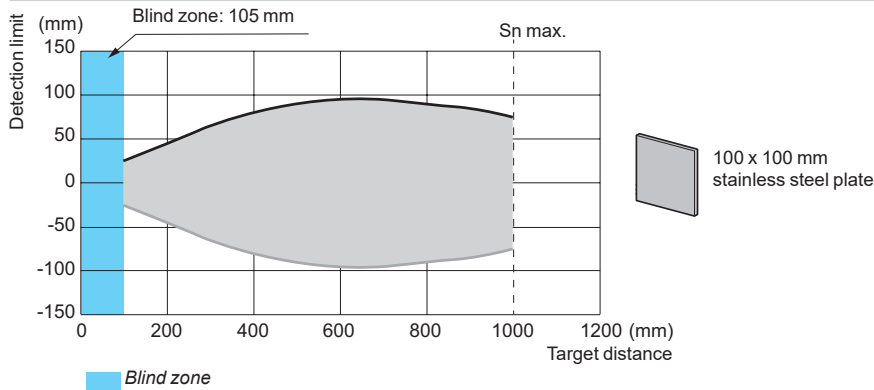


### Detection curve with round bar

XXA30●1●M12, XXS30B1●M12, XXS30S1●M12

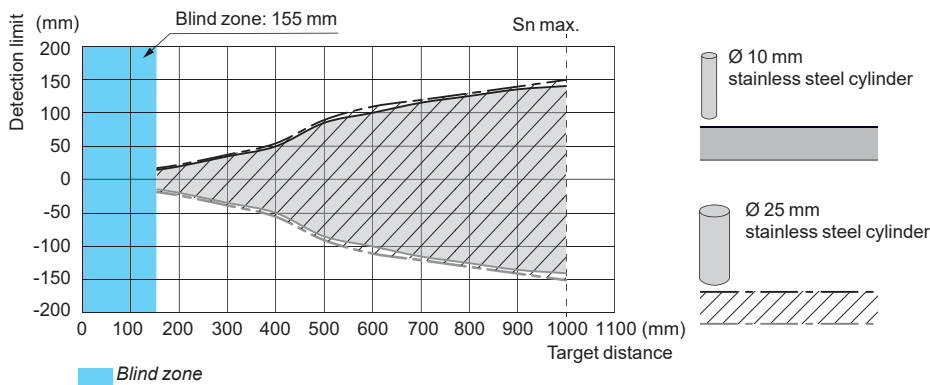

XXS30P1PM12, XXS30P1AM12, XXS30P1VM12

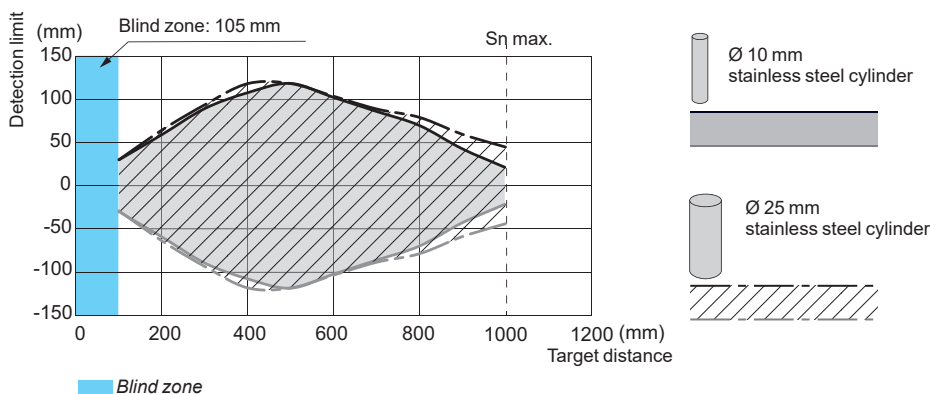

## Ultrasonic sensors

XX range, General purpose  
Cylindrical, plastic or metal, Ø 30 mm, 2 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

Sensor type	XX●30P2PM12 XX●30B2PM12 XX●30S2PM12	XX●30P2AM12 XX●30B2AM12 XX●30S2AM12	XX●30P2VM12 XX●30B2VM12 XX●30S2VM12		
<b>General characteristics</b>					
Conformity to standards	EN/IEC 60947-5-2, UL 508, and CSA C22.2 n°14				
Compliance with regulations	CE (based on EMC directive 2014/30/EU), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10				
Product certifications	cULus with class 2 power supply, E2, EAC, RCM, and ECOLAB				
Nominal sensing distance (Sn)	m	2 (adjustable)			
Blind zone (in diffuse mode the object is not detected in this zone)	m	0.155			
Detection window	Remotely adjustable or by using external teachbutton XXZPB100				
Transmission frequency (transmitter resonance)	kHz	120			
Differential travel	mm	< 10	–		
Repeat accuracy (repeatability)	0.1 %				
Minimum size of object to be detected	Cylinder Ø 1 mm up to sensing distance of 1.4m				
Tilt angle with 100 x 100 mm target	± 10° at 2 m, ± 12° at 1.8 m ± 45° at 1m				
Materials	Case	XX●30P●: PBT XX●30B●: Nickel-plated brass XX●30S●: Stainless steel 316L			
	Sensing face	Epoxy, resin, and rubber			
Connection	M12 connector - 5-pin				
<b>Supply characteristics</b>					
Rated supply voltage (Ue) with protection against reverse polarity	V	12...24 V $\overline{\text{---}}$	12...24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$	
Voltage limits (including ripple)	V	10...30 V $\overline{\text{---}}$	10...30 V $\overline{\text{---}}$	14...30 V $\overline{\text{---}}$	
Current consumption, no-load	mA	< 65	< 65	< 65	
<b>Output characteristics</b>					
LED indicators	Output state	Yellow LED	Yellow LED	Yellow LED	
	Echo state	Green LED	Green LED	Green LED	
Switching capacity (with overload and short-circuit protection)	< 100 mA				
Resistive load impedance	Ω	–	$\overline{\text{---}}$ 12 V, load ≤ 250 Ω $\overline{\text{---}}$ 24 V, load ≤ 850 Ω	≥ 1 kΩ	
Voltage drop	V	< 2	–	–	
Internal temperature compensation	Yes				
Maximum switching frequency	Hz	5.5	Yes	Yes	
Delays	First-up	ms	150	250	250
	Response	ms	90	–	–
	Recovery	ms	90	200	200
<b>Environment characteristics</b>					
Degree of protection	Conforming to IEC 60529 and EN/IEC 60947-5-2	IP 65, IP 67			
Storage temperature	°C	- 40...+ 80			
Operating temperature	°C	- 25...+ 70			
Relative humidity	< 95%, without condensation				
Vibration resistance	Conforming to IEC 60068-2-6	Amplitude ± 1 mm (f = 10...55 Hz)			
Mechanical shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms, in all 3 axes			
Resistance to electromagnetic interference	Conforming to EN/IEC 60947-5-2 and UNECE R10-05				



# Ultrasonic sensors


XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 2 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software


## Operating diagrams for digital output sensors

### Settings with teach procedure


#### Window mode



#### Reflex mode




#### Proximity mode



(1) Switch point


## Operating diagram for analog output sensors

### Near and far limits setting with teach procedure

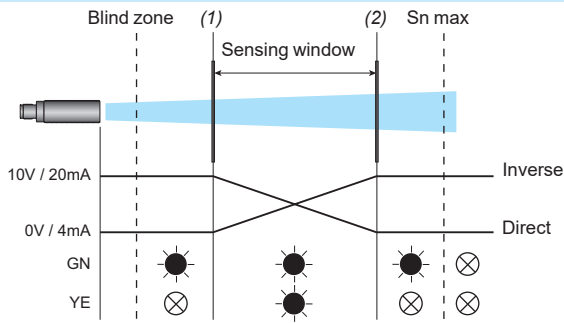


#### Pump/Hysteresis mode

##### Emptying (stored in high threshold memory)

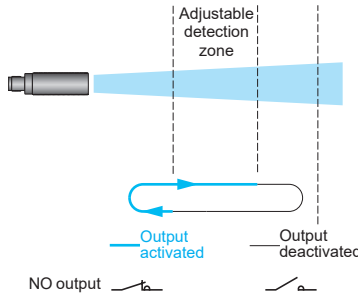

##### Filling (stored in low threshold memory)

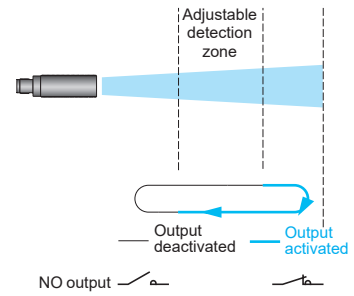

# Ultrasonic sensors



XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 2 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Dimensions


XX●30P2PM12, XX●30B2PM12, XX●30S2PM12

XX●30P2AM12, XX●30B2AM12, XX●30S2AM12  
XX●30P2VM12, XX●30B2VM12, XX●30S2VM12

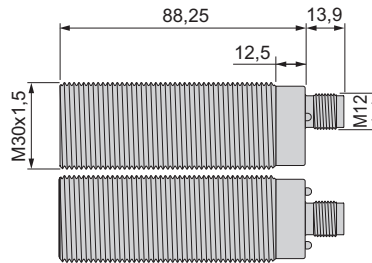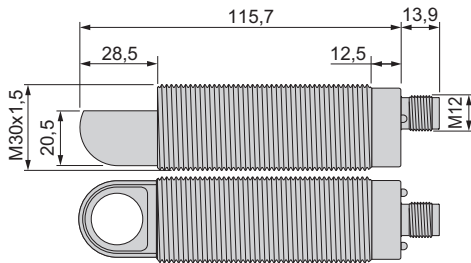

## Connections

### Connector wiring

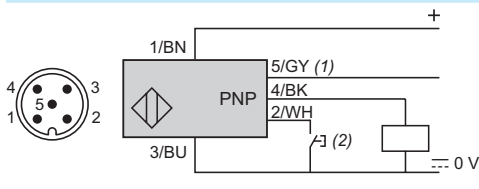


Pin number	Wire color	Digital output description	Analog output description	
			4-20 mA	0-10 V
1	BN: Brown	+12...24 V $\overline{\text{---}}$	+12...24 V $\overline{\text{---}}$	+14...24 V $\overline{\text{---}}$
2	WH: White	Input teach		
3	BU: Blue	0 V $\overline{\text{---}}$		
4	BK: Black	Output		
5	GY: Gray	Synchronization		

(1) Synchronization.

(2) External setting pushbutton or **XXZPB100** remote teach pushbutton (see page 43).


### Wiring scheme (digital output NO or NC)

XXS30●●PM12, XXA30●●PM12

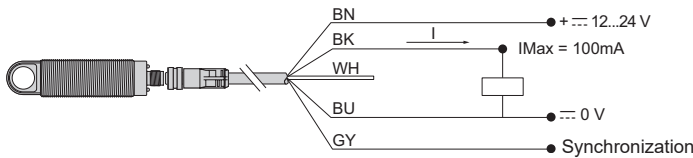

### Wiring scheme (analog output 0-10V)


XX●30●●VM12

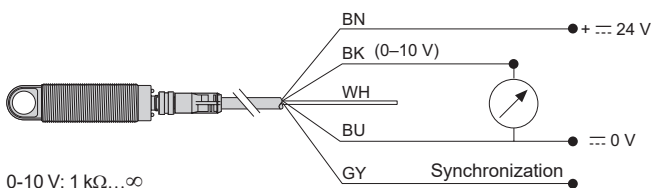

0-10 V: 1 k $\Omega$ ... $\infty$

### Wiring scheme (analog output 4-20 mA)


XX●30●●AM12

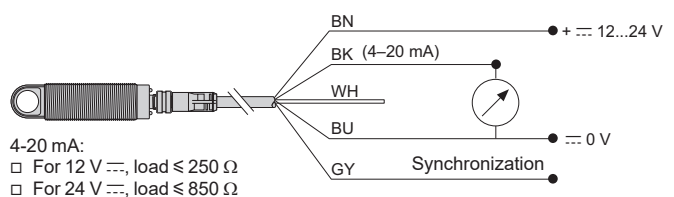

4-20 mA:

- For 12 V  $\overline{\text{---}}$ , load  $\leq$  250  $\Omega$
- For 24 V  $\overline{\text{---}}$ , load  $\leq$  850  $\Omega$

## Diagram for the synchronization function (Side by side application)

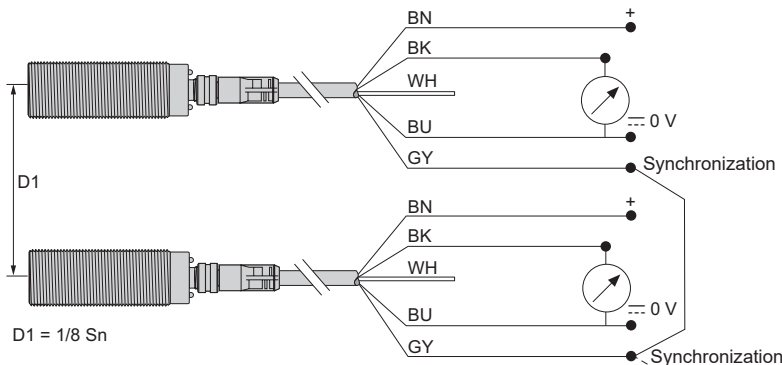

D1 = 1/8 Sn

**NB:** To enable synchronization between several sensors, all of the wires of pin no.5 (gray) must be electrically connected together. A maximum of 8 sensors can be synchronized. To enable "Multiplexer" function for the sensors, use the XX Configuration Software. Without synchronization or multiplexing, the sensors must be at least 50 cm away from each other in order to avoid mutual interference.


# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 2 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software


## Dimensions (continued)

### Fixing clamp XXZB130

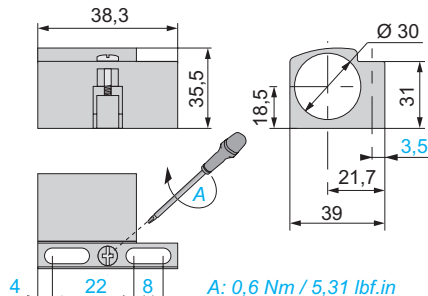

A: 0,6 Nm / 5,31 lbf.in


### Teach pushbutton XXZPB100

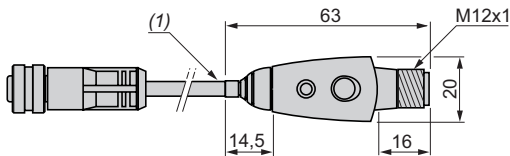


(1) Cable length: 152 mm

## Curves

### Detection curve with 100 x 100 mm square target

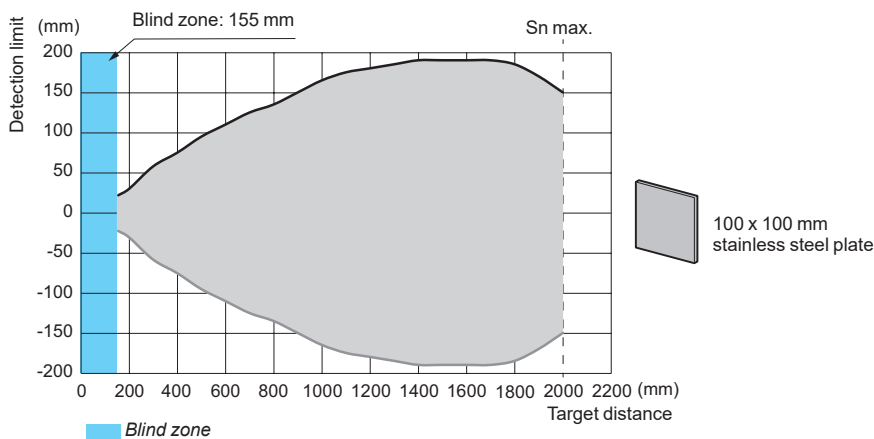

### Detection curve with round bar

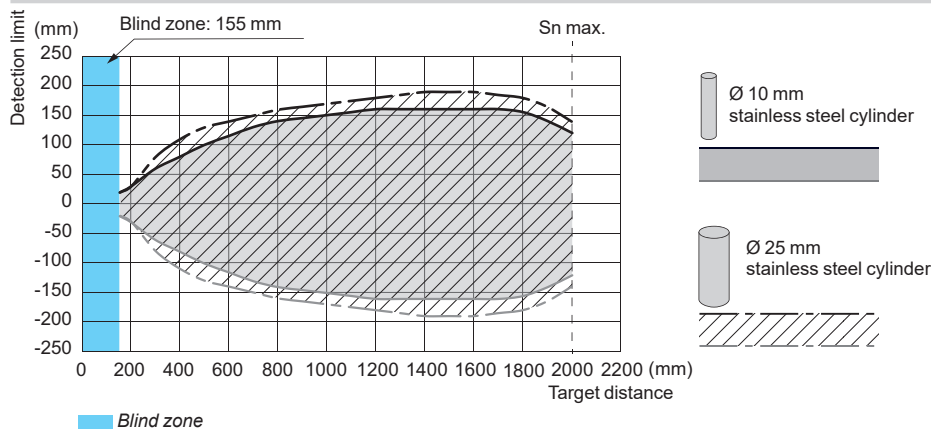

## Ultrasonic sensors

XX range, General purpose  
Cylindrical, plastic or metal, Ø 30 mm, 4 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

Sensor type		XXS30●4PM12	XXS30●4AM12	XXS30●4VM12
<b>General characteristics</b>				
Conformity to standards		EN/IEC 60947-5-2, UL 508, and CSA C22.2 n°14		
Compliance with regulations		CE (based on EMC directive 2014/30/EU), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10		
Product certifications		cULus with class 2 power supply, E2, EAC, RCM , and ECOLAB		
Nominal sensing distance (Sn)	<b>m</b>	4 (adjustable)		
Blind zone (in diffuse mode the object is not detected in this zone)	<b>m</b>	0.420		
Detection window		Remotely adjustable or by using external teachbutton XXZPB100		
Transmission frequency (transmitter resonance)	<b>kHz</b>	80		
Differential travel	<b>mm</b>	< 20	–	
Repeat accuracy (repeatability)		0.1 %		
Minimum size of object to be detected		Cylinder Ø 1 mm up to sensing distance of 1.8m		
Tilt angle with 500 x 500 mm target		± 7° at 4 m, ± 10° at 3.6 m ± 40° at 2 m		
Materials	Case	XXS30P●: PBT XXS30B●: Nickel-plated brass XXS30S●: Stainless steel 316L		
	Sensing face	Epoxy, resin, and rubber		
Connection		M12 connector - 5-pin		
<b>Supply characteristics</b>				
Rated supply voltage (Ue) with protection against reverse polarity	<b>V</b>	12...24 V $\overline{\text{---}}$	12...24 V $\overline{\text{---}}$	24 V $\overline{\text{---}}$
Voltage limits (including ripple)	<b>V</b>	10...30 V $\overline{\text{---}}$	10...30 V $\overline{\text{---}}$	14...30 V $\overline{\text{---}}$
Current consumption, no-load	<b>mA</b>	< 65	< 65	< 65
<b>Output characteristics</b>				
LED indicators	Output state	Yellow LED	Yellow LED	Yellow LED
	Echo state	Green LED	Green LED	Green LED
Switching capacity (with overload and short-circuit protection)		< 100 mA	–	–
Resistive load impedance	<b>Ω</b>	–	12 V $\overline{\text{---}}$ , load ≤ 250 Ω 24 V $\overline{\text{---}}$ , load ≤ 850 Ω	≥ 1 kΩ
Voltage drop	<b>V</b>	< 2	–	–
Internal temperature compensation		Yes	Yes	Yes
Maximum switching frequency	<b>Hz</b>	2.7	–	–
Delays	First-up	<b>ms</b> 250	500	500
	Response	<b>ms</b> 180	–	–
	Recovery	<b>ms</b> 180	400	400
<b>Environment characteristics</b>				
Degree of protection	Conforming to IEC 60529 and EN/IEC 60947-5-2	IP 65, IP 67		
Storage temperature		°C - 40...+ 80		
Operating temperature		°C - 25...+ 70 (1)		
Relative humidity		< 95%, without condensation		
Vibration resistance	Conforming to IEC 60068-2-6	Amplitude ± 1 mm (f = 10...55 Hz)		
Mechanical shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms, in all 3 axes		
Resistance to electromagnetic interference		Conforming to EN/IEC 60947-5-2 and UNECE R10-05		

# Ultrasonic sensors


XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 4 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Operating diagrams for digital output sensors


### Settings with teach procedure

#### Window mode




- (1): Near limit
- (2): Far limit
- (3): Sensing window

#### Reflex mode



- (1): Reflector
- (2): Near limit
- (3): Far limit


#### Proximity mode




- (1): Switch point

#### Pump/Hysteresis mode

##### Emptying (stored in high threshold memory)

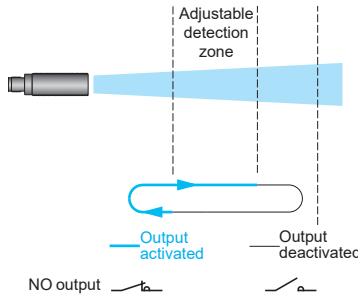


##### Filling (stored in low threshold memory)

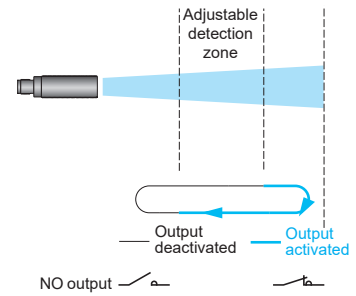

## Operating diagram for analog output sensors

### Near and far limits setting with teach procedure

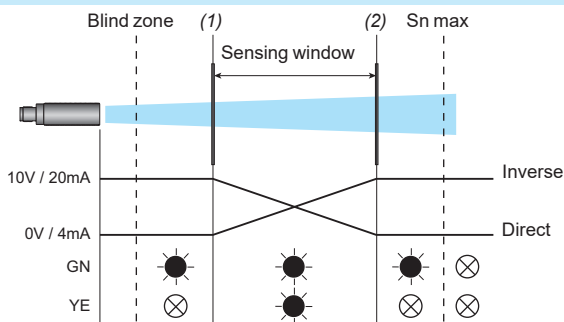

GN: Green LED  
YE: Yellow LED

⊗ : OFF

● : ON

- (1): Near limit
- (2): Far limit


# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 4 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software


## Dimensions

XXS30P4PM12, XXS30B4PM12, XXS30S4PM12

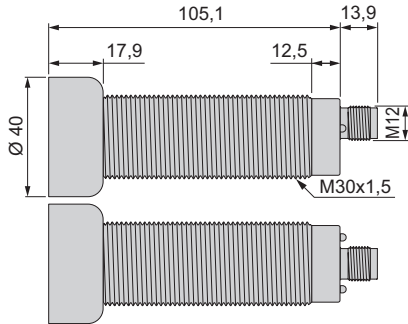

## Connections

### Connector wiring

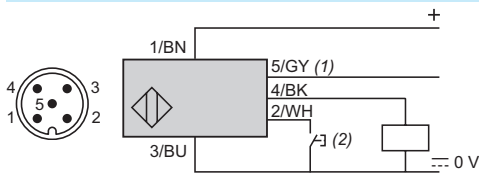


Pin number	Wire color	Digital output description	Analog output description	
			4-20 mA	0-10 V
1	BN: Brown	+12...24 V	+12...24 V	+14...24 V
2	WH: White	Input teach		
3	BU: Blue	0 V		
4	BK: Black	Output		
5	GY: Gray	Synchronization		

(1) Synchronization.

(2) External setting pushbutton or **XXZPB100** remote teach pushbutton (see page 43).


### Wiring scheme (digital output NO or NC)

XXS30●●PM12

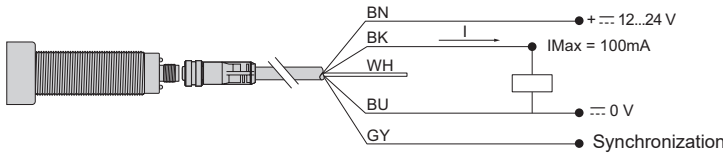

### Wiring scheme (analog output 0-10V)


XX●30●●VM12

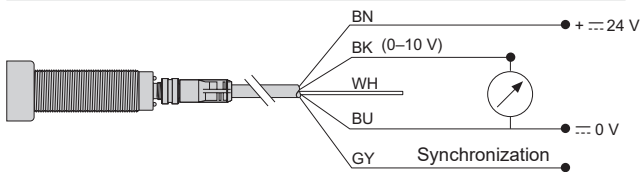

0-10 V: 1 kΩ...∞


### Wiring scheme (analog output 4-20 mA)

XX●30●●AM12

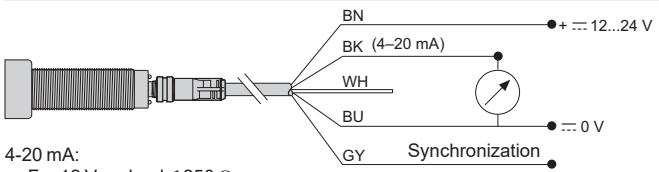

4-20 mA:  
 For 12 V, load ≤ 250 Ω  
 For 24 V, load ≤ 850 Ω

### Diagram for the synchronization function (Side by side application)

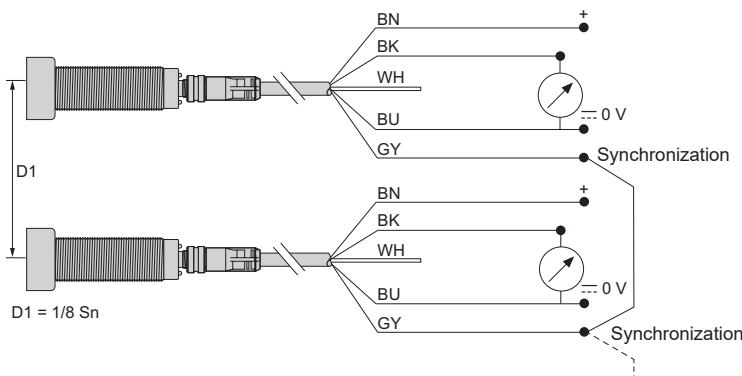

**NB:** To enable synchronization between several sensors, all of the wires of pin no. 5 (gray) must be electrically connected together. A maximum of 8 sensors can be synchronized. To enable "Multiplexer" function for the sensors, use the XX Configuration Software. Without synchronization or multiplexing, the sensors must be at least 50 cm away from each other in order to avoid mutual interference.


# Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 4 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Dimensions (continued)

### Fixing clamp XXZB130

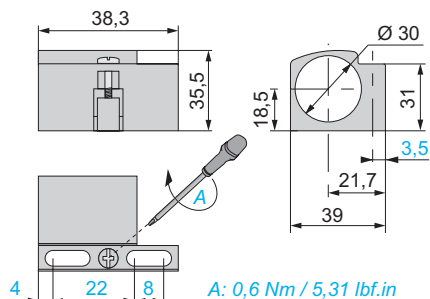


4

22 8

A: 0,6 Nm / 5,31 lbf.in


### Teach pushbutton XXZPB100

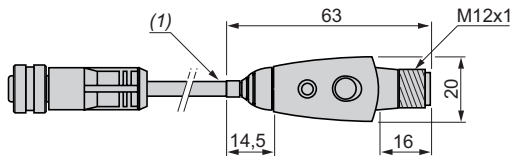

(1) Cable length: 152 mm


## Curves

### Detection curve with 100 x 100 mm square target

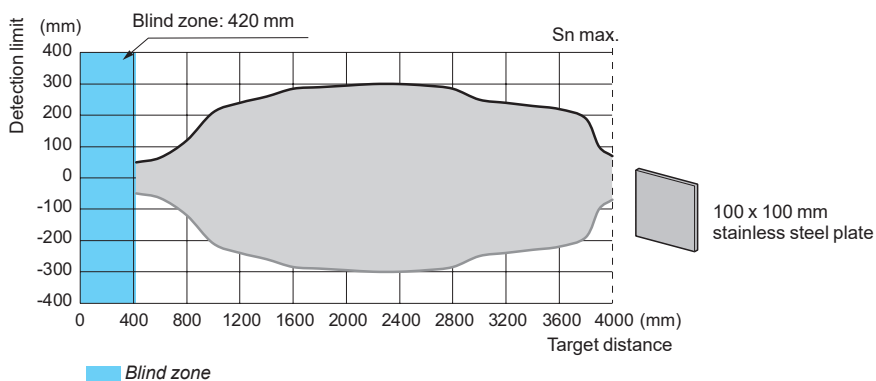

Blind zone

### Detection curve with round bar

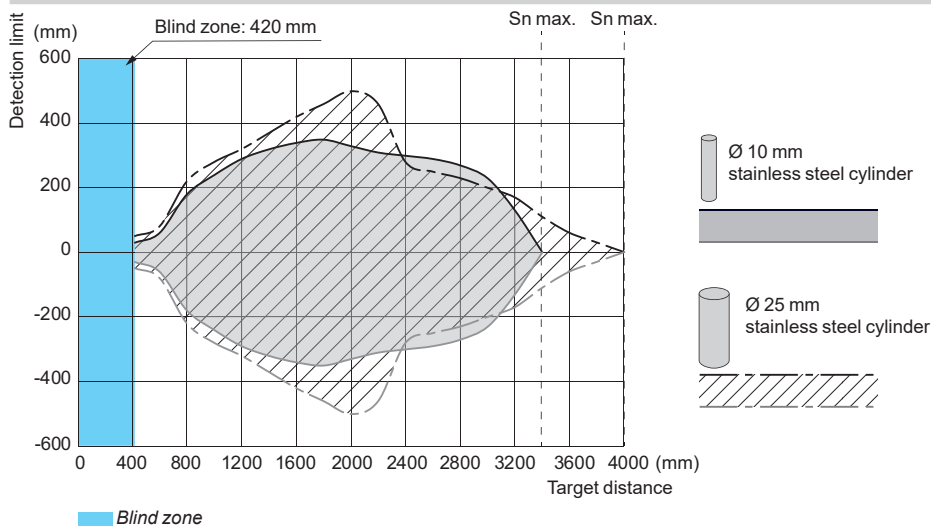

Blind zone

## Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 8 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

Sensor type		XXS30P8PPM12 XXS30P8NNM12	XXS30P8APM12	XXS30P8VPM12
<b>General characteristics</b>				
Conformity to standards		EN/IEC 60947-5-2, UL 508 and CSA C22.2 n° 14		
Compliance with regulations		CE (based on EMC directive 2014/30/EU), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10		
Product certifications		cULus with class 2 power supply, E2, EAC, RCM, and ECOLAB		
Nominal sensing distance (Sn)	m	8 (adjustable)		
Blind zone (in diffuse mode the object is not detected in this zone)	m	0.290		
Detection window		Remotely adjustable or by using external teachbutton <b>XXZPB100</b>		
Transmission frequency (transmitter resonance)	kHz	75		
Differential travel	mm	< 12.7	–	
Repeat accuracy (repeatability)		0.1 %		
Minimum size of object to be detected		Cylinder Ø 1 mm up to sensing distance of 1.8m		
Tilt angle with 500 x 500 mm target		± 4° at 8 m, ± 5° at 7.2 m ± 12° at 4 m		
Materials	Case	PBT		
	Sensing face	Epoxy, resin, and rubber		
Connection		M12 connector - 5-pin		
<b>Supply characteristics</b>				
Rated supply voltage (Ue) with protection against reverse polarity	V	≐ 12...24 V	≐ 12...24 V	≐ 24 V
Voltage limits (including ripple)	V	≐ 10...30 V	≐ 10...30 V	≐ 14...30 V
Current consumption, no-load	mA	< 50	< 50	< 50
<b>Output characteristics</b>				
LED indicators	Output state	1 dual colour LED (yellow/green) 1 three-colour LED (yellow/green/red)	1 dual colour LED (yellow/green) 1 three-colour LED (yellow/green/red)	1 dual colour LED (yellow/green) 1 three-colour LED (yellow/green/red)
	Echo state	Green LED	Green LED	Green LED
Switching capacity (with overload and short-circuit protection)		< 100 mA	–	–
Resistive load impedance	Ω	–	≐ 12 V, load ≤ 250 Ω ≐ 24 V, load ≤ 850 Ω	≥ 1 kΩ
Voltage drop	V	< 2	–	–
Internal temperature compensation		Yes	Yes	Yes
Maximum switching frequency	Hz	2	–	–
Delays	First-up	ms	600	600
	Response	ms	300	–
	Recovery	ms	300	500
<b>Environment characteristics</b>				
Degree of protection	Conforming to IEC 60529 and EN/IEC 60947-5-2		IP 65, IP 67	
Storage temperature		°C	- 40...+ 85	
Operating temperature		°C	- 25...+ 70	
Relative humidity			< 95%, without condensation	
Vibration resistance	Conforming to IEC 60068-2-6		Amplitude ± 1 mm (f = 10...55 Hz)	
Mechanical shock resistance	Conforming to IEC 60068-2-27		30 gn, duration 11 ms, in all 3 axes	
Resistance to electromagnetic interference			Conforming to EN/IEC 60947-5-2 and UNECE R10-05	




## Ultrasonic sensors

XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 8 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

### Dimensions

XXS30P8PPM12, XXS30P8NNM12, XXS30P8APM12, XXS30P8VPM12


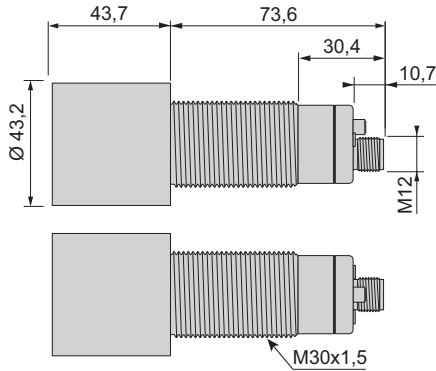


### Connections


#### Connector wiring

XXS30P8PPM12

XXS30P8NNM12

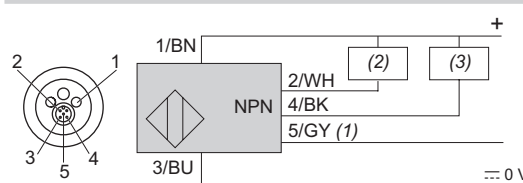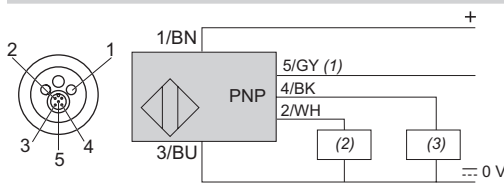

XXS30P8APM12, XXS30P8VPM12

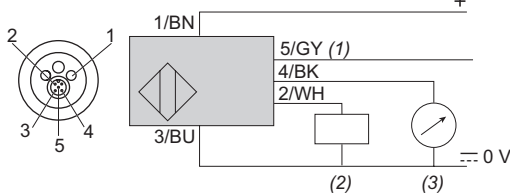

Pin number

Wire color

Digital output description

Analog output description

Pin number	Wire color	Digital output description	Analog output description	
			4-20 mA	0-10 V
1	BN: Brown	+12...24 V $\overline{\text{---}}$	+12...24 V $\overline{\text{---}}$	+24 V $\overline{\text{---}}$
2	WH: White	Output 2	PNP output	PNP output
3	BU: Blue	0 V $\overline{\text{---}}$	–	–
4	BK: Black	Output 1	4-20 mA output	0-10 V output
5	GY: Gray	Synchronization		


(1) Synchronization

(2) Output 2

(3) Output 1


#### Wiring scheme (digital output PNP, NO or NC)

XXS30P8PPM12

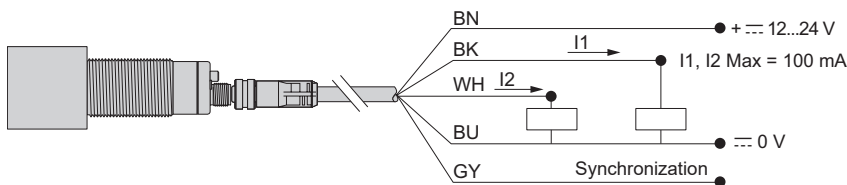

#### Wiring scheme (digital output NPN, NO or NC)

XXS30P8NNM12

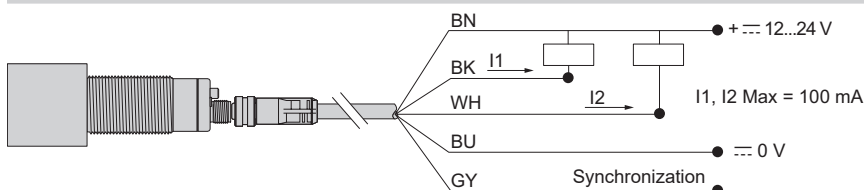

# Ultrasonic sensors


XX range, General purpose

Cylindrical, plastic or metal, Ø 30 mm, 8 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Connections (continued)


Wiring scheme (analog output 0-10 V and PNP, NO or NC)

XXS30P8VPM12

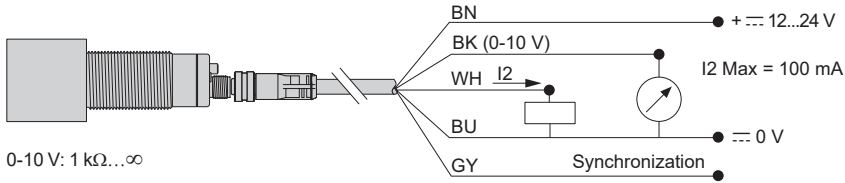


Wiring scheme (analog output 4-20 mA and PNP, NO or NC)

XXS30P8APM12

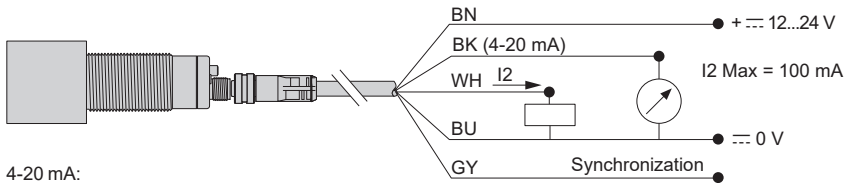

4-20 mA:  
 □ For 12 V  $\pm$ , load  $\leq$  250  $\Omega$   
 □ For 24 V  $\pm$ , load  $\leq$  850  $\Omega$

## Diagram for the synchronization function (Side by side application)

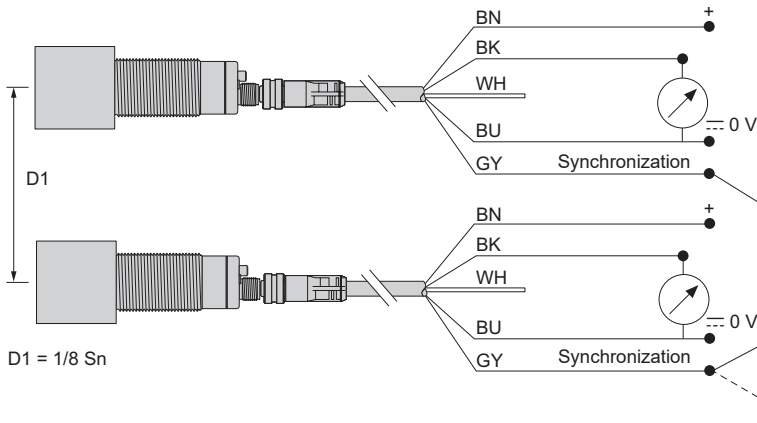

**NB:** To enable synchronization between several sensors, all of the wires of pin no. 5 (gray) must be electrically connected together. A maximum of 8 sensors can be synchronized. To enable "Multiplexer" function for the sensors, use the XX Configuration Software. Without synchronization or multiplexing, the sensors must be at least 50 cm away from each other in order to avoid mutual interference.


# Ultrasonic sensors

XX range, General purpose


Cylindrical, plastic or metal, Ø 30 mm, 8 m sensing distance. Diffuse mode, solid-state digital or analog output. Configurable by software

## Curves

Detection curve with 100 x 100 mm square target

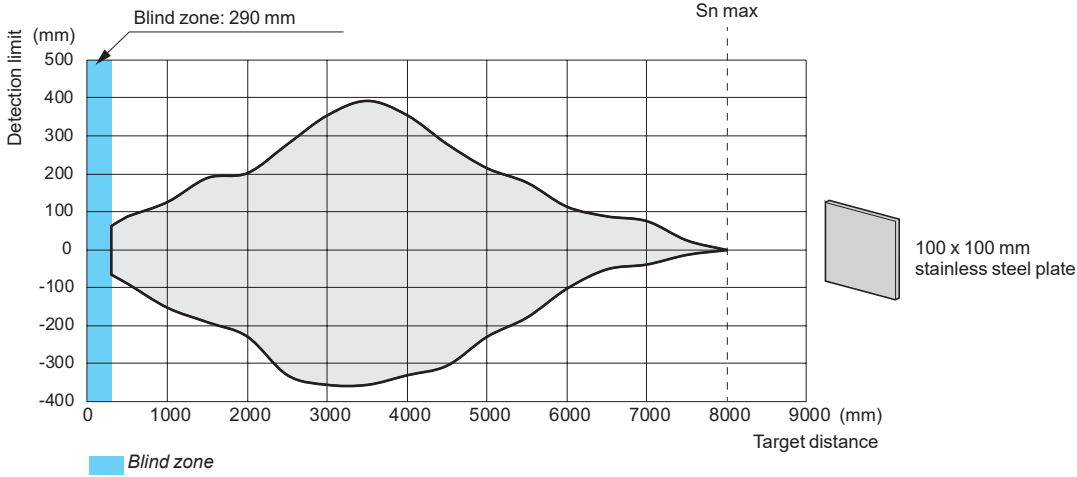


Detection curve with round bar

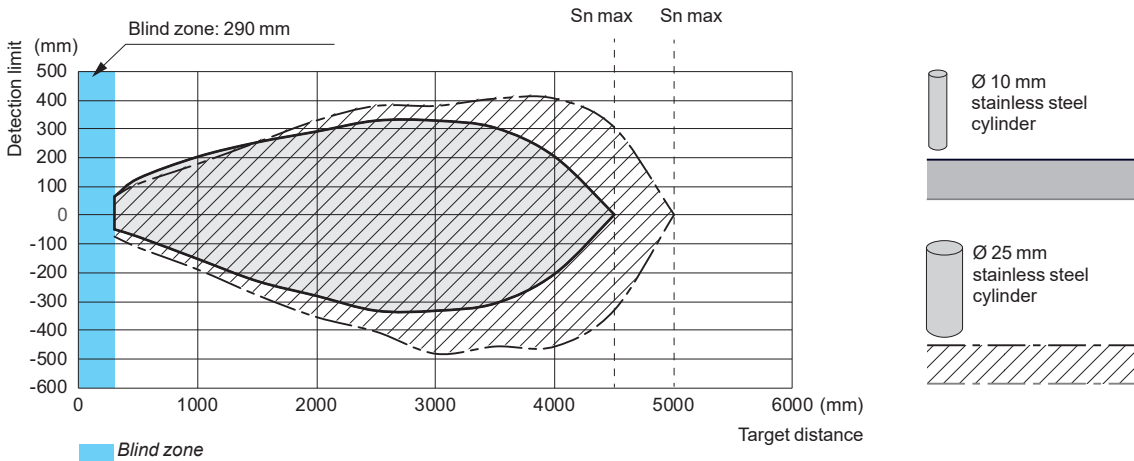

## Operating diagram for analog output sensors

Near and far limits setting with teach procedure

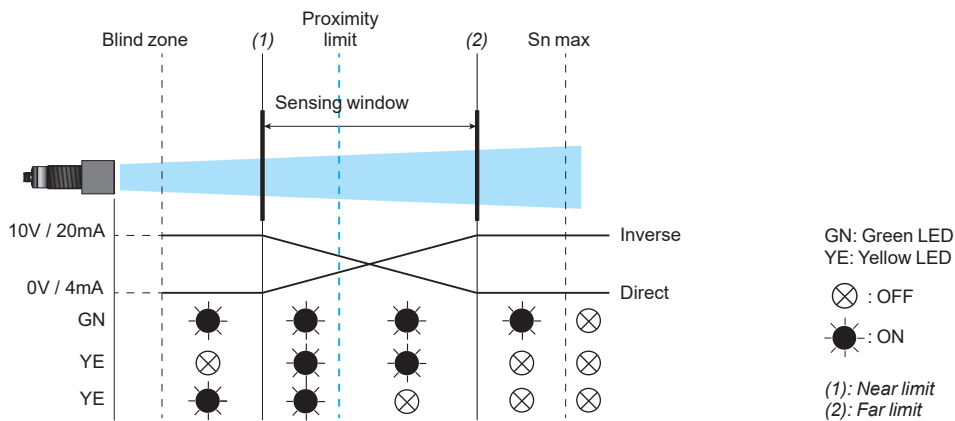

# Ultrasonic sensors

XX range, Wide Beam

Obstacle detection system for mobile equipment.

Configurable by software

## Wide Beam ultrasonic sensors

Telemecanique Sensors has expanded its range of ultrasonic sensors with the "XX Wide Beam" offer to meet the specific needs of mobile equipment such as:

- Lift trucks
- Cherry pickers
- Mobile elevating work platforms
- Self-propelled ride-on handling trucks
- Ground support equipment
- Aircraft access platforms, etc.



These sensors are designed to detect the following kinds of obstacles when mobile equipment is lifting or rotating: ceilings, beams, cables, scaffolding, other platforms or buckets, etc.

Compact and flush mountable in metal, these sensors are easy to install with:

- A remote Deutsch DTM04 connector on a 0.15 m cable, or
- A remote M12 connector on a 0.15 m cable, or
- A 0.5 m cable

They operate silently and are also suitable for indoor use.

The XX configuration software makes these sensors easy to program.

The synchronization function is used to reduce interference between sensors, even when installed close to each other, thus helping to ensure objects are detected over a wide area.

**Important:** This device does not have a Performance Level or Safety Integrity Level or any other type of capability with regard to functional safety.

For safety applications, visit our website: [www.tesensors.com](http://www.tesensors.com)

Compact solution for detecting obstacles



**Certified**

- > E2 according to UN Regulation 10R-06
- > cULus

## Obstacle detection system

- > **Wide detection area:** Fewer sensors are needed to cover a given area.
- > Better tilt angle for enhanced detection of targets and surfaces, even those that are slightly reflective or curved
- > **Rugged sensors suitable for use in harsh environments**
- > Operation in temperatures as low as -40 °C with no adverse impact on detection capability
- > Thermoplastic UV-resistant front face that can tolerate potential damage caused by building materials or bad weather
- > IP69K rating for high-pressure washdown
- > **Noise detection capability to assist the user**
- > The sensor is equipped with a noise detection function that is enabled by default. When noise detection is enabled, the sensor's analog output emits 2 mA or 5 volts, depending on model (100 for CANJ by default), when it detects excessive environmental noise.
- > Noise detection settings can be changed using the configuration interface and software (see page 78).

# Ultrasonic sensors

XX range, Wide Beam

Obstacle detection system for mobile equipment.

Configurable by software



XXW54P3●●L01DM6



XXW54P3●PL01M12



XXW54P3●PL05



XXZKITDM6

## References

Description	Sensing distance (Sn)	Function/output	Connections	Reference	Weight
	m				kg
<b>Diffuse sensors with 0.5...4.5 V analog output and solid state digital output</b>					
Ø 54 mm plastic sensor	3	0.5...4.5 V + PNP	0.15 m cable with remote Deutsch DTM04 6-pin connector	XXW54P3HPL01DM6	0.115
			0.15 m cable with remote M12, 5-pin connector	XXW54P3HPL01M12	0.115
			0.5 m cable	XXW54P3HPL05	0.115

## Diffuse sensors with 4...20 mA analog output and solid state digital output

Ø 54 mm plastic sensor	3	4...20 mA + PNP	0.15 m cable with remote Deutsch DTM04 6-pin connector	XXW54P3APL01DM6	0.115
			0.15 m cable with remote M12, 5-pin connector	XXW54P3APL01M12	0.115
			0.5 m cable	XXW54P3APL05	0.115

## Diffuse sensors with CAN SAE J1939 communication

Ø 54 mm plastic sensor	3	CANJ1939	0.15 m cable with remote Deutsch DTM04 6-pin connector	XXW54P3JL01DM6	0.115
			0.5 m cable	XXW54P3JL05	0.115

## Connection accessory

Description	Connections	Reference	Weight
			kg
Configuration cable for sensors XXW54P3●●L01DM6	1 m cable with <ul style="list-style-type: none"> <li>■ one female Deutsch DTM04 6-pin connector and</li> <li>■ one male M12 4-pin connector</li> </ul>	XXZKITDM6	0.050

## Configuration software, interface, and kit for synchronization function

See page 78.

# Ultrasonic sensors

XX range, Wide Beam

Obstacle detection system for mobile equipment.

Configurable by software

Sensor type	XXW54P3HPL01DM6	XXW54P3APL01DM6	XXW54P3HPL05	XXW54P3APL05
<b>General characteristics</b>				
Conforming to standards	EN/IEC 60947-5-2, UL 60947-5-2 and CSA C22.2 n° 60947-5-2			
Compliance with regulations	CE (based on the EMC directive 2014/30/UE), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10			
Product certifications	UKCA, E2, cULus			
Nominal sensing distance (Sn)	m	0.425...3		
Blind zone	mm	425		
Detection window	Adjustable using XX configuration software, up to 4 m			
Transmission frequency (transmitter resonance)	kHz	48		
Differential travel	mm	< 20		
Repeat accuracy	0.1 %			
Sensor accuracy	2 %			
Minimum size of object to be detected	Cylinder Ø 10 mm up to a sensing distance of 3 m			
Tilt angle with 500 x 500 mm target	± 6° at 4 m, ± 10° at 3 m, ± 45° at 1.5 m			
Materials	Casing	PBT (Valox), UV resistant		
	Sensing face	PEI (ULTEM) with PUR coating, UV resistant		
Fixing method	Using 2 M4 screws (not provided). 2 x Ø 4.32 mm stainless steel inserts and silicone washers are provided with the sensor. Tightening torque ≤ 3 Nm (26.6 lb-in)			
Connection	By remote Deutsch DTM04 6-pin connector, on 0.15 m Ø 6 mm TPU cable		By 0.5 m Ø 6 mm TPU cable CSA: 5 x 0.34 mm <sup>2</sup>	
<b>Power supply characteristics</b>				
Rated supply voltage (Ue) with protection against reverse polarity	V	12...24 V $\overline{\text{---}}$ . Powered by a dedicated safety extra low voltage (SELV) or a protected extra low voltage (PELV)		
Voltage limits (including ripple)	V	$\overline{\text{---}}$ 9...32		
Current consumption, no-load	mA	< 50		
<b>Output characteristics</b>				
Indicator lights	Output status	1 yellow LED		
	Power supply and echo status	1 two-tone LED (white and green). White: power on; green: echo status		
Switching capacity	mA	< 100 (with overload and short-circuit protection)		
Resistive load impedance		≥ 2 K Ω	≤ 250 Ω (12 V), ≤ 850 Ω (24 V)	≥ 2 K Ω ≤ 250 Ω (12 V), ≤ 850 Ω (24 V)
Voltage drop	V	< 2		
Internal temperature compensation	Yes			
Maximum switching frequency	Hz	1.6		
Delays	First-up	ms	400	
	Response	ms	300	
	Recovery	ms	300	
<b>Environmental characteristics</b>				
Degree of protection	Conforming to IEC 60529 and EN/IEC 60947-5-2	IP 65, IP 67, IP 69K		
Storage temperature	°C	- 40...+ 85		
Operating temperature	°C	- 40...+ 70		
Relative humidity	< 95%, non-condensing			
Vibration resistance	Conforming to IEC 60068-2-6	Amplitude ± 1 mm (f = 10...55 Hz)		
Mechanical shock resistance	Conforming to IEC 60068-2-27	30 gn, duration 11 ms, in all 3 axes		
Immunity to electromagnetic interference	Conforming to EN/IEC 60947-5-2			

# Ultrasonic sensors

XX range, Wide Beam

Obstacle detection system for mobile equipment.

Configurable by software

Sensor type		XXW54P3HPL01M12	XXW54P3APL01M12	XXW54P3JL01DM6	XXW54P3JL05
<b>General characteristics</b>					
Conforming to standards		EN/IEC 60947-5-2, UL 60947-5-2 and CSA C22.2 n° 60947-5-2			
Compliance with regulations		CE (based on the EMC directive 2014/30/UE), NEC (ANSI/NFPA 70), CEC (CSA C22), UNECE R10			
Product certifications		UKCA, E2, cULus			
Nominal sensing distance (Sn)		m	0.425...3		
Blind zone		mm	425		
Detection window		Adjustable using XX configuration software, up to 4 m			
Transmission frequency (transmitter resonance)		kHz	48		
Differential travel		mm	< 20		
Repeat accuracy		0.1 %			
Sensor accuracy		2 %			
Minimum size of object to be detected		Cylinder Ø 10 mm up to a sensing distance of 3 m			
Tilt angle with 500 x 500 mm target		± 6° at 4 m, ± 10° at 3 m, ± 45° at 1.5 m			
Materials		Casing		PBT (Valox), UV resistant	
		Sensing face		PEI (ULTEM) with PUR coating, UV resistant	
Fixing method		Using 2 M4 screws (not provided). 2 x Ø 4.32 mm stainless steel inserts and silicone washers are provided with the sensor. Tightening torque ≤ 3 Nm (26.6 lb-in)			
Connection		By remote M12 5-pin connector, on 0.15 m Ø 6 mm TPU cable		By remote Deutsch DTM04 6-pin connector, on 0.15 m Ø 6 mm TPU cable	
<b>Power supply characteristics</b>					
Rated supply voltage (Ue) with protection against reverse polarity		V	12...24 V $\overline{\text{---}}$ . Powered by a dedicated safety extra low voltage (SELV) or a protected extra low voltage (PELV)		
Voltage limits (including ripple)		V	$\overline{\text{---}}$ 9...32		
Current consumption, no-load		mA	< 50	< 50	< 101
<b>Output characteristics</b>					
Indicator lights		Output status		1 yellow LED	
		Power supply and echo status		1 two-tone LED (white and green). White: power on; green: echo status	
Switching capacity		mA	< 100 (with overload and short-circuit protection)		
Resistive load impedance			≥ 2 K Ω	≤ 250 Ω (12 V), ≤ 850 Ω (24 V)	–
Voltage drop		V	< 2		
Internal temperature compensation		Yes			
Maximum switching frequency		Hz	1.6		
Delays		First-up		400	
		Response		300	
		Recovery		300	
<b>Environmental characteristics</b>					
Degree of protection		Conforming to IEC 60529 and EN/IEC 60947-5-2		IP 65, IP 67	
Storage temperature		°C	- 40...+ 85		
Operating temperature		°C	- 40...+ 70		
Relative humidity		< 95%, non-condensing			
Vibration resistance		Conforming to IEC 60068-2-6		Amplitude ± 1 mm (f = 10...55 Hz)	
Mechanical shock resistance		Conforming to IEC 60068-2-27		30 gn, duration 11 ms, in all 3 axes	
Immunity to electromagnetic interference		Conforming to EN/IEC 60947-5-2			
Sensor type		XXW54P3JL01DM6		XXW54P3JL05	
<b>CANJ1939 characteristics</b>					
CAN Standard		SAE J1939			
CAN interface		2-wire (5-pin or 6-pin), electro static discharge and transient protected			
Internal terminating resistor		102 Ω resistor, not supplied (purchase separately)			
CAN bus type		CAN 2.0B High speed			
CAN bus speed		250 k bits/s by default 500 k bits/s configurable			
J1939 frame emission rate		ms	50		
J1939 addressing mode		Configurable (dynamic addressing)			
CAN identifier length		29 bits			
Maximum network length		m	40		
Maximum number of sensors		Up to 30 sensors			

# Ultrasonic sensors

XX range, Wide Beam


Obstacle detection system for mobile equipment.

Configurable by software

## Dimensions


### Sensors with remote Deutsch DTM04 connector

XXW54P3HPL01DM6, XXW54P3APL01DM6, XXW54P3JL01DM6

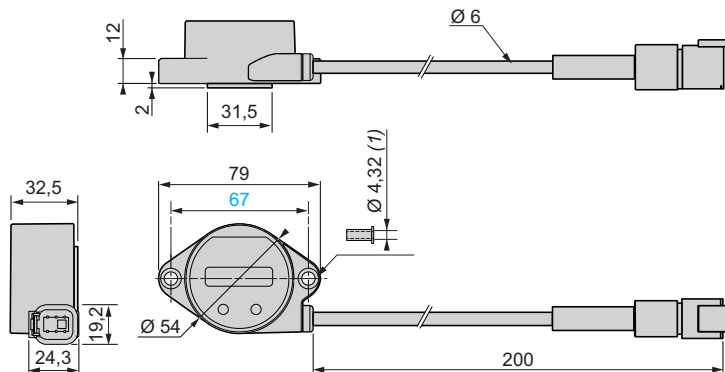


### Sensors with remote M12 connector

XXW54P3HPL01M12, XXW54P3APL01M12

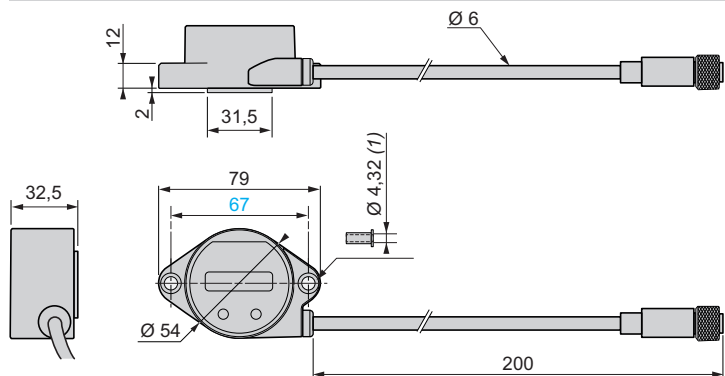


### Pre-wired sensors

XXW54P3HPL05, XXW54P3APL05, XXW54P3JL05

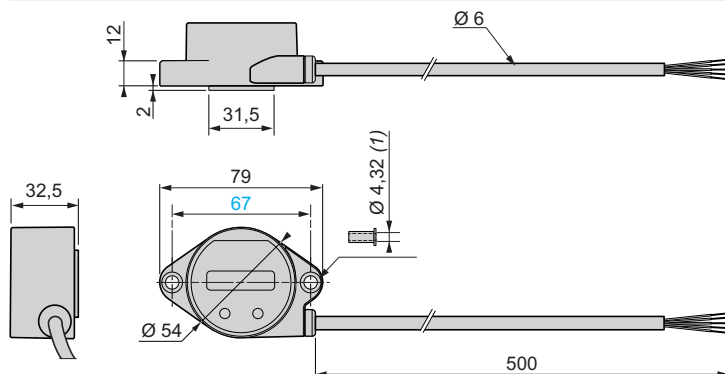

### XXZKITDM6 cable with Deutsch DTM04 connector for sensor configuration

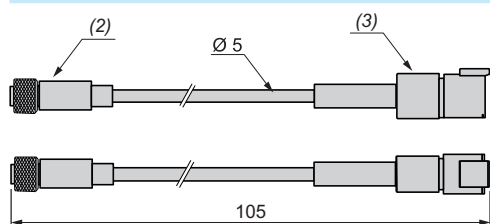

(1) The sensor is supplied with 2 stainless steel inserts  $\varnothing 4.32$  mm and 2 silicone washers. M4 screws not provided.

(2) M12 connector.

(3) Deutsch DTM04 connector.



# Ultrasonic sensors


XX range, Wide Beam

Obstacle detection system for mobile equipment.


Configurable by software

## Connections (continued)

### Sensors with remote Deutsch DTM04 connector

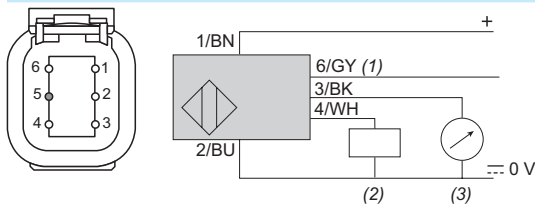


Pin number	Wire color	Description	
		XXW54P3HPL01DM6	XXW54P3APL01DM6
1	BN: Brown	+ 12...24 V $\overline{\text{---}}$	+ 12...24 V $\overline{\text{---}}$
2	BU: Blue	0 V $\overline{\text{---}}$	0 V $\overline{\text{---}}$
3	BK: Black	0.5...4.5 V analog output (5)	4...20 mA analog output (6)
4	WH: White	PNP solid-state output	PNP solid-state output
5 (4)	–	Not connected	Not connected
6	GY: Gray	Synchronization	Synchronization

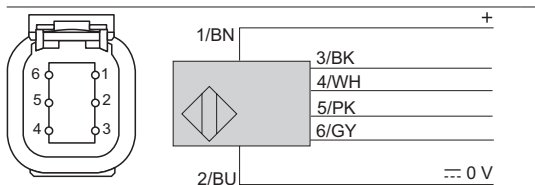

Pin number	Wire color	Description	
		XXW54P3JL01DM6	
1	BN: Brown	+ 12...24 V $\overline{\text{---}}$	
2	BU: Blue	0 V $\overline{\text{---}}$	
3	BK: Black	XXZBOX01 communication	
4	WH: White	Synchronization	
5	PK: Pink	CAN HIGH (7)	
6	GY: Gray	CAN LOW (7)	



### Sensors with remote M12 connector

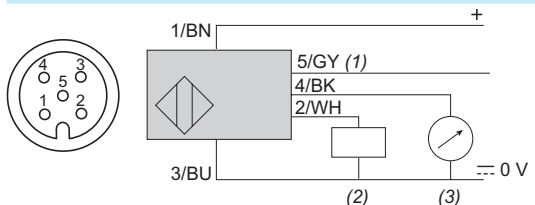


Pin number	Wire color	Description	
		XXW54P3HPL01M12	XXW54P3APL01M12
1	BN: Brown	+ 12...24 V $\overline{\text{---}}$	+ 12...24 V $\overline{\text{---}}$
2	WH: White	PNP solid-state output	PNP solid-state output
3	BU: Blue	0 V $\overline{\text{---}}$	0 V $\overline{\text{---}}$
4	BK: Black	0.5...4.5 V analog output (5)	4...20 mA analog output (6)
5	GY: Gray	Synchronization	Synchronization

### XXZKITDM6 cable

#### M12



#### Deutsch



#### M12 connector


Pin number	Wire color	Description
1	BN: Brown	+ 24 V $\overline{\text{---}}$ , power to sensor
2	WH: White	Software communication
3	BU: Blue	0 V $\overline{\text{---}}$
4	BK: Black	Software communication

#### Deutsch connector

Pin number	Couleur des fils	Description
1	BN: Brown	+ 24 V $\overline{\text{---}}$ , power to sensor
2	BU: Blue	0 V $\overline{\text{---}}$
3	BK: Black	Software communication
4	WH: White	Software communication
5 (8)	–	Not connected
6 (8)	–	Not connected


### Pre-wired sensors

#### XXW54P3HPL05

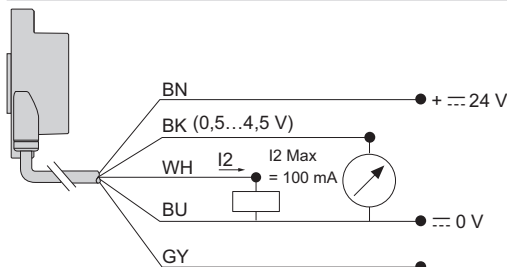

0.5...4.5 V: load 2 k $\Omega$ ... $\infty$

#### XXW54P3APL05

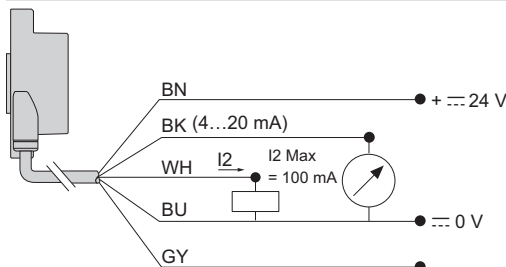

4...20 mA: load  $\leq$  250  $\Omega$  ( $\overline{\text{---}}$  12 V), load  $\leq$  850  $\Omega$  ( $\overline{\text{---}}$  24 V).

(1) Synchronization

(2) Output 2

(3) Output 1

(4) Contact not connected, equipped with a sealing plug (provided with the sensor).

(5) The sensor's analog output emits 5 volts when it detects excessive environmental noise.

(6) The sensor's analog output emits 2 mA when it detects excessive environmental noise.

(7) When noise detection is enabled, the sensor's CAN bus will output 100 by default

(configurable to 6400) when it detects excessive environmental noise.

(8) Contact not connected, equipped with a sealing plug (provided with the sensor).

# Ultrasonic sensors

XX range, Wide Beam


Obstacle detection system for mobile equipment.

Configurable by software

## Connections (continued)

### Pre-wired sensors (1)

XXW54P3JL05

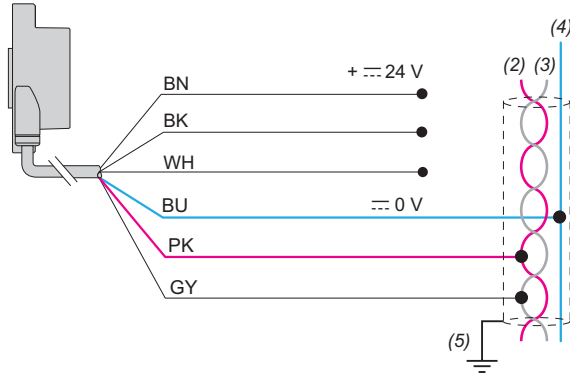

(1) Connecting the detector to the **XXZBOX01** configuration interface with the **XZCC12MDM40B** connector: BN (Brown), WH (White), BU (Blue), BK (Black).

(2) CAN HIGH


(3) CAN LOW

(4) GND

(5) EMC/GND

### Synchronization function diagram (side-by-side application)

XXW54P3HPL01DM6, XXW54P3APL01DM6, XXW54P3HPL01M12, XXW54P3APL01M12, XXW54P3HPL05

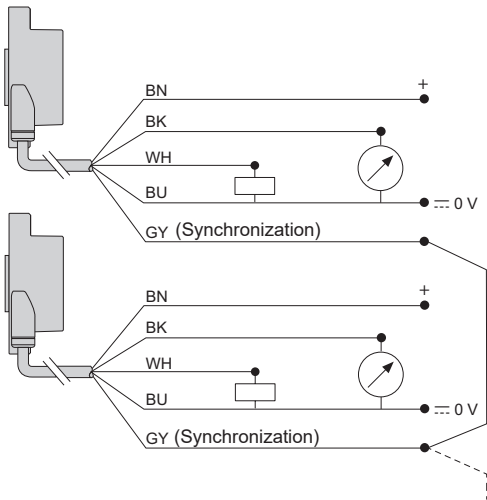


**Note:** Synchronization is recommended if more than one sensor is used in the same direction in order to avoid any interference between sensors due to the width of their beam.

Up to 8 sensors can be synchronized to operate side by side by electrically connecting all pin no. 6 (gray) wires together.

All sensors must be the same model and have the same cycle time setting.

XXW54P3JL01DM6, XXW54P3JL05

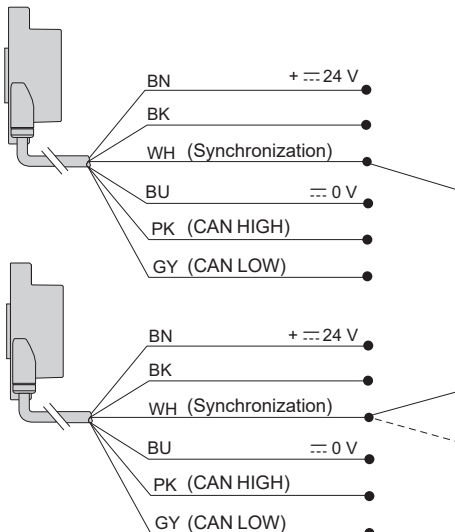

**Note:** Synchronization is recommended if more than one sensor is used in the same direction in order to avoid any interference between sensors due to the width of their beam.

Up to 8 sensors can be synchronized to operate side by side by electrically connecting all pin no. 4 (white) wires together.

All sensors must be the same model and have the same cycle time setting.

# Ultrasonic sensors


XX range, Wide Beam

Obstacle detection system for mobile equipment.

Configurable by software

## Connections (continued)


### CANJ network topology

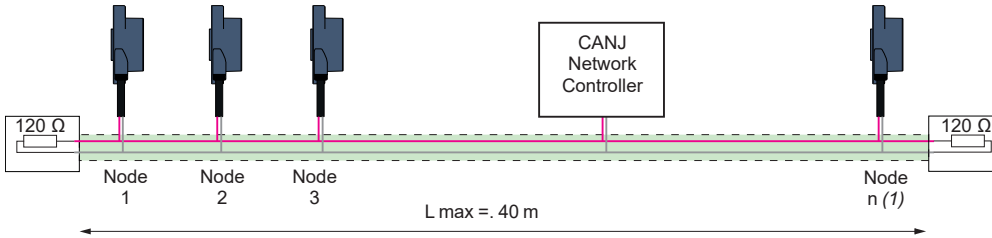


(1) Max. number: 30 sensors.

## Curves

### Detection curve with 100 x 100 mm square target

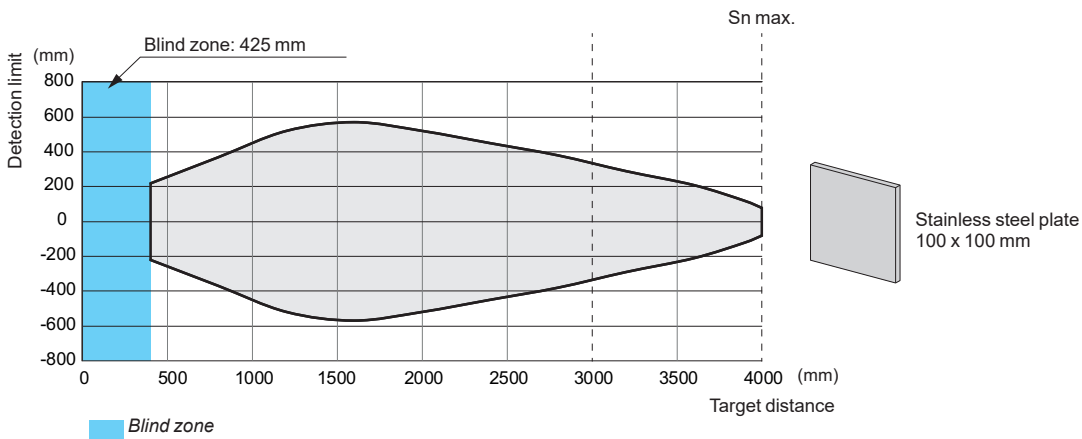

### Detection curve with round bar

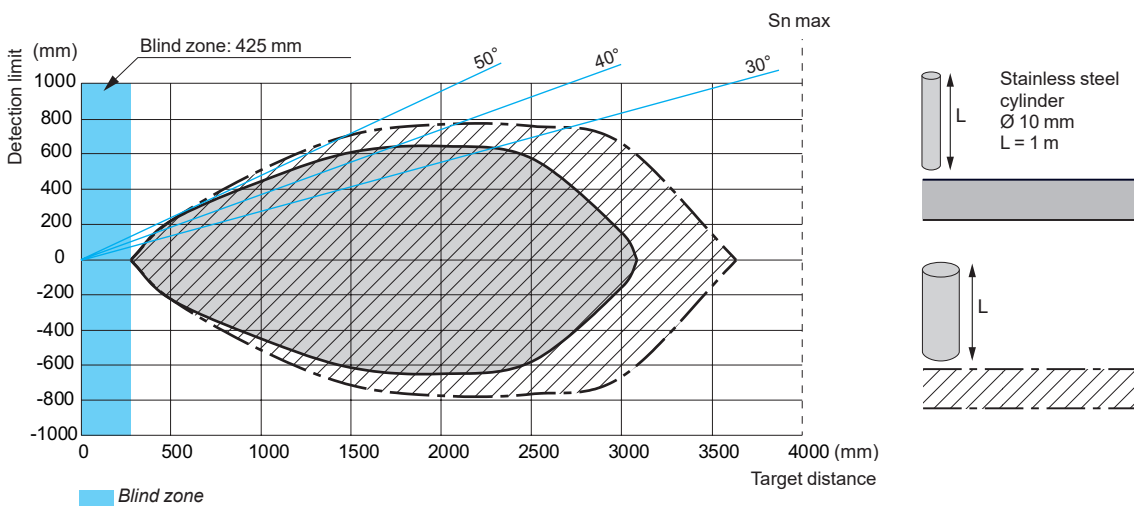

# Ultrasonic sensors

XX range, Wide Beam


Obstacle detection system for mobile equipment.

Configurable by software

## Operating diagram


Setting the near and far limits using the configuration software

XXW54P3HPL01DM6, XXW54P3HPL05, XXW54P3HPL01M12

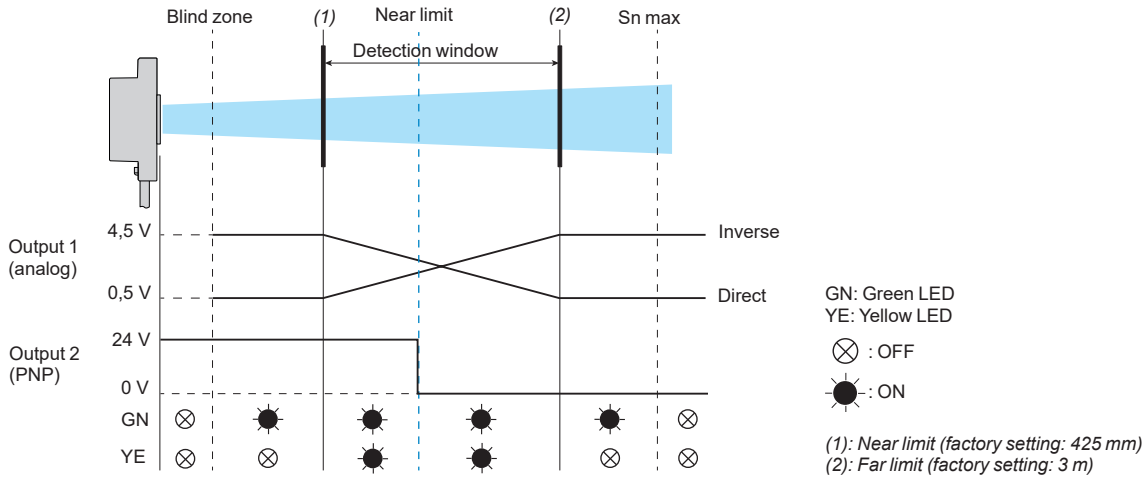

Note: The sensor's analog output emits 5 volts when it detects excessive environmental noise.

XXW54P3APL01DM6, XXW54P3APL05, XXW54P3APL01M12

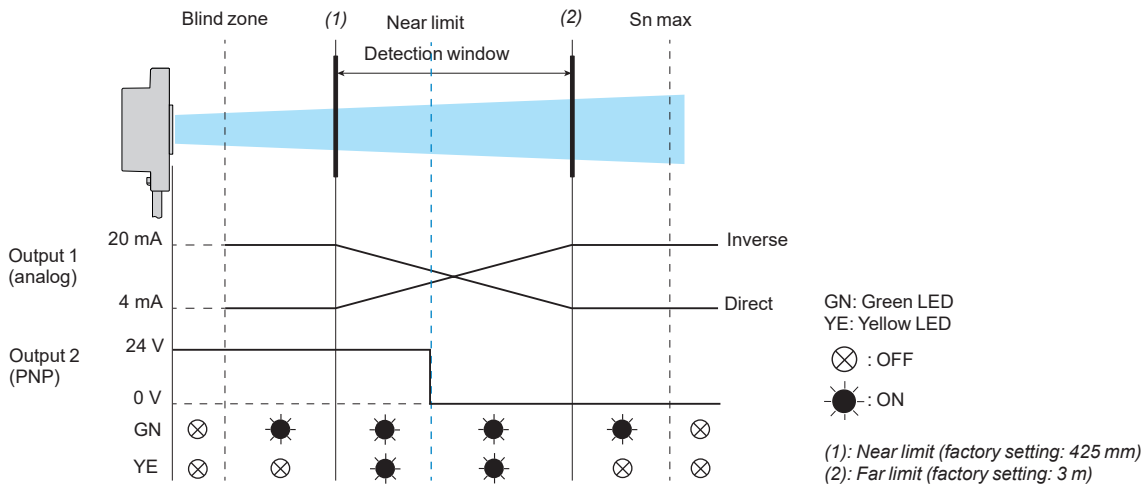

Note: The sensor's analog output emits 2 mA when it detects excessive environmental noise.

## Ultrasonic sensors

XX range, Wide Beam


Obstacle detection system for mobile equipment.

Configurable by software

### Operating diagram (continued)

Setting the near and far limits using the configuration software


XXW54P3JL01DM6, XXW54P3JL05

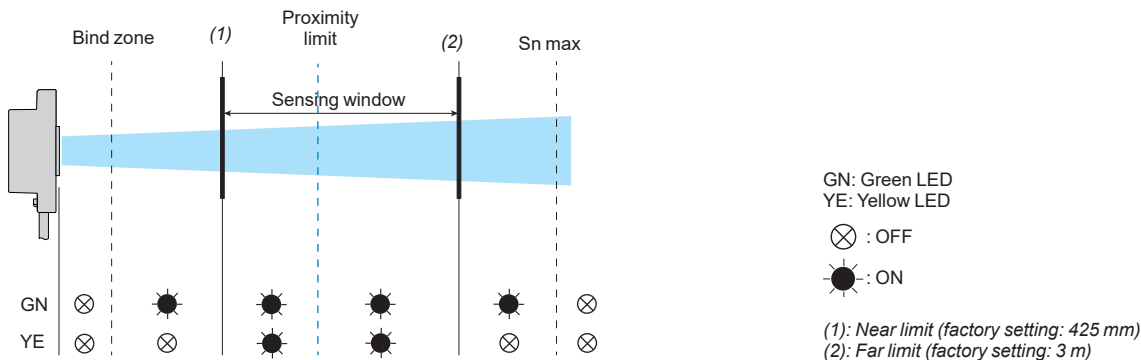

**Note:** When noise detection is enabled, the sensor's CAN bus will output 100 by default (configurable to 6400) when it detects excessive environmental noise.

### Setting-up instructions


Mutual interference between two separate pieces of mobile equipment, side by side

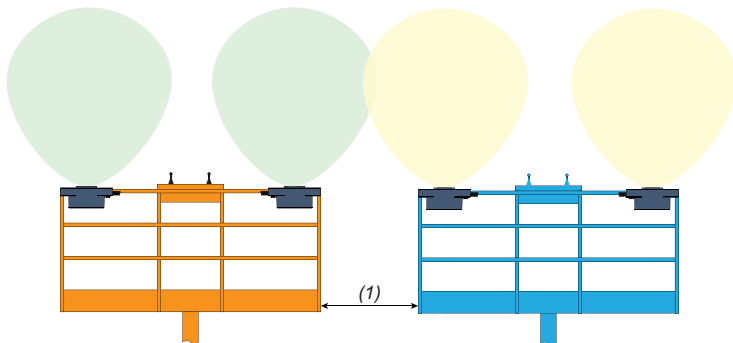

(1) Minimum distance: 2.5 m

**Note:** Sensors in the same mobile equipment must be synchronized, but sensors in two separate pieces of mobile equipment cannot be synchronized.

#### Mounting with inserts and washers




1 Silicone washer

2 Stainless steel insert

**Note:** The sensor is supplied with 2 stainless steel inserts  $\varnothing$  4.32 mm and 2 silicone washers. M4 screws not provided

#### Flush-mounting recommendations



(1) Max. thickness = 10 mm

(2) Minimum  $\varnothing$  = 33 mm

# Ultrasonic sensors

XX range

Flat format, plastic

DC supply, solid-state digital output



XX7F1A2NAL01M12



XX7K1A2PAM12



XX8D1A1NAM12



XXZPB100

## Diffuse mode

### Fixed sensing distance sensors

Sensors	Sensing distance (Sn)	Function/output	Connection	Reference	Weight
mm	m				kg
7.6 x 19 x 33	0.10	NO/NPN	152 mm flying lead + M12 connector	<b>XX7F1A2NAL01M12</b>	0.040
		NO/PNP	152 mm flying lead + M12 connector	<b>XX7F1A2PAL01M12</b>	0.040
16 x 30 x 74	0.25	NO/PNP	M12 connector	<b>XX7K1A2PAM12</b>	0.050

### Adjustable sensing distance sensors

18 x 33 x 60 + Ø 18	0.50 (adjustable)	NO/NPN	Connecteur M12	<b>XX7V1A1NAM12</b>	0.060
		NO/PNP	Connecteur M12	<b>XX7V1A1PAM12</b>	0.060
80 x 80 x 34	1 (adjustable)	NO/NPN	Connecteur M12	<b>XX8D1A1NAM12</b>	0.300
		NO/PNP	Connecteur M12	<b>XX8D1A1PAM12</b>	0.300

## Accessories

### Teach pushbutton

Description	For use with sensor	Reference	Weight kg
Selection of detection window Length of cable: 152 mm Input: M12 female connector Output: M12 male connector	XX7V1A1●AM12 XX8D1A1●AM12	<b>XXZPB100</b>	0.035

### Other connection and fixing accessories

See page 82.

# Ultrasonic sensors

XX range

Flat format, plastic

Sensors with analogue output signal 0...10 V  
or 4-20 mA

DF53726



XX9V1A1C2M12

108068



XX9D1A1●●M12

121388



XXZPB100

## Diffuse mode

### Adjustable sensing distance sensors

Sensors	Sensing distance (Sn)	Analogue output (Slope selection using teach button)	Reference	Weight
mm	m			kg
18 x 33 x 65 + Ø 18	0.50 (adjustable)	4-20 mA	<b>XX9V1A1C2M12</b>	0.090
		0-10 V	<b>XX9V1A1F1M12</b>	0.060
80 x 80 x 34	1 (adjustable)	4-20 mA	<b>XX9D1A1C2M12</b>	0.300
		0-10 V	<b>XX9D1A1F1M12</b>	0.300

## Accessories

### Teach pushbutton

Description	For use with sensors	Reference	Weight
Selection of detection window Length of cable: 152 mm Input: M12 female connector Output: M12 male connector	XX9V1A1●●M12 XX9D1A1●●M12	<b>XXZPB100</b>	0.035

### Other connection and fixing accessories

See page 82.

Sensor type	XX7F1A2●	XX7K1A2●	XX7V1A1●	XX8D1A1●	XX9V1A1●	XX9D1A1●	
<b>General characteristics</b>							
Conformity to standards	CE, IEC 60947-5-2						
Product certifications	UL	UL	UL	UL	UL, cCSAus		
Nominal sensing distance (Sn)	m	0.1	0.25	0.5	1	0.5	1
Blind zone (in diffuse mode the object is not detected in this zone, in reflex mode the background is not detected in this zone)	mm	0...6.4	0...51	0... 51	0... 100	0...51	0...100
Detection window	Fixed		Remotely adjustable or by using teach button				
Detection system	Diffuse mode	●	●	●	●	●	●
Transmission frequency	kHz	500	500	300	180	300	180
Differential travel	mm	< 0.7	< 0.35	< 2.5	< 2.5	–	–
Repeat accuracy	mm	± 0.7	± 0.7	± 1.27	± 1.6	1.27	± 1.6
Overall beam angle (see detection lobe)		14°	14°	12°	7°	6°	7°
Minimum size of object to be detected		Cylinder Ø 2.5 mm or flat bar 1 mm wide up to 50 mm	Cylinder Ø 1.6 mm up to 76 mm	Cylinder Ø 2.5 mm or flat bar 1 mm wide for a sensing distance of 150 mm	Cylinder Ø 50 mm up to 1 m	Cylinder Ø 2.5 mm or flat bar 1 mm wide for a sensing distance of 150 mm	Cylinder Ø 50 mm up to a sensing distance of 1 m
Deviation angle from 90° of the object to be detected		–				± 7°	± 5°
Materials	Case	ULTEM®		Valox®			
	Sensing face (1)	Epoxy	Silicone	Epoxy			
Connection	Connector	M12, 4-pin, on 152 mm flying lead	M12, 4-pin				
<b>Supply characteristics</b>							
Rated supply voltage	V	≐ 12...24 V				≐ 15...24 V	
Voltage limits (including ripple)	V	≐ 10...28 V					
Current consumption, no-load	mA	25	60	40	70	40	70

(1) Silicone face for optimum chemical resistance.





Sensor type		XX7F1A2●	XX7K1A2●	XX7V1A1●	XX8D1A1●	XX9V1A1●	XX9D1A1●	
<b>Output characteristics</b>								
<b>Slope type</b>		Direct or inverse by using teach button (see page 72).						
<b>LED indicators</b>	Output state	Yellow LED						
	Power on	Green LED		Green LED				
	Setting-up assistance	–		Multicolour LED		Dual colour LED		
<b>Delays</b>	First-up	ms	–			100	75	
<b>Recovery time</b>		ms	–			150	180	
<b>Resistive load impedance</b>	4-20 mA	Ω	–			10...500	10...350	
	0-10 V	Ω	–			1 k...∞	2 k fixed	
<b>Switching capacity</b>	(PNP and NPN)	mA	< 100, NO or NC function			100		
<b>Voltage drop</b>	(PNP and NPN)	V	< 1	< 1	< 1	< 1		
<b>Maximum switching frequency</b>		Hz	100	80	40	72		
<b>Delays</b>	First-up	ms	20	350	100	75		
	Response	ms	4	5	10	15		
	Recovery	ms	4	5	10	75		
<b>Environment characteristics</b>								
<b>Degree of protection</b>	Conforming to IEC 60529 and IEC 60947-5-2		IP 67					
<b>Storage temperature</b>		°C	- 40...+ 80					
<b>Operating temperature</b>		°C	- 20...+ 65	0...+ 50	- 20...+ 65	0...+ 70	- 20...+ 65	0...+ 70
<b>Vibration resistance</b>	Conforming to IEC 60068-2-6		Amplitude ± 1 mm (f = 10...55 Hz)					
<b>Mechanical shock resistance</b>	Conforming to IEC 60068-2-27		30 gn, duration 11 ms, in all 3 axes					
<b>Resistance to electromagnetic interference</b>			Conforming to IEC 60947-5-2					

**Dimensions**

XX7F1A2NAL01M12, XX7F1A2PAL01M12



XX7K1A2PAM12

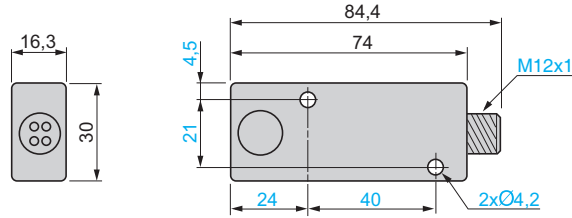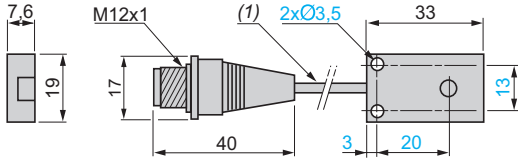


(1) Cable, length: 152 mm.

XX7V1A1NAM12, XX7V1A1PAM12

XX9V1A1C2M12, XX9V1A1F1M12

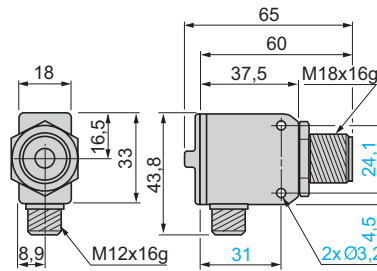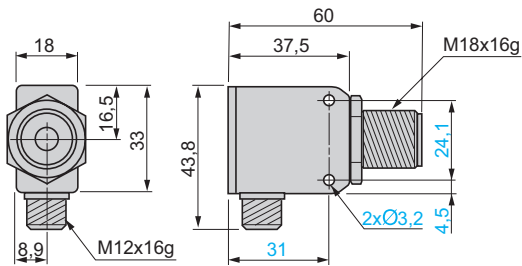


XX8D1A1NAM12, XX8D1A1PAM12, XX9D1A1C2AM12, XX9D1A1F1AM12

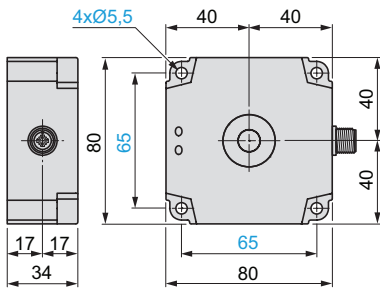

**XXZPB100**

Teach pushbutton

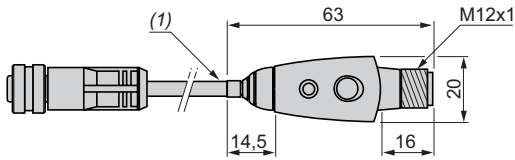


(1) Cable, length: 152 mm.

## Setting-up precautions

### Minimum mounting distances

#### Diffuse sensors, flat format


#### Side by side




e: respect the distances indicated on the detection curves

## Curves


XX7F1A2NAL01M12,  
XX7F1A2PAL01M12




XX7K1A2PAM12



XX7V1A1NAM12, XX7V1A1PAM12,  
XX9V1A1C2M12, XX9V1A1F1M12



XX8D1A1NAM12, XX8D1A1PAM12,  
XX9D1A1C2AM12, XX9D1A1F1AM12




Blind zone

## Schemes

### M12 connector, solid-state digital output


#### 3-wire type



1 (+)  
3 (-)  
4 NPN or PNP output


XX7F1A2NAL01M12 (1)

NO outputs, NPN



XX7F1A2PAL01M12 (1), XX7K1A2PAM12

NO outputs, PNP




(-) BU (Blue)  
(+) BN (Brown)  
BK (Black)

(1) Remote connector on flying lead approximately 15 cm long.


### M12 connector, analogue output

#### 4-wire type




1 (+)  
2 Return signal or teach  
3 (-)  
4 Output signal


XX7V1A1NAM12  
XX8D1A1NAM12



XX7V1A1PAM12  
XX8D1A1PAM12



XX9V1A1C2M12, XX9V1A1F1M12, XX9D1A1C2AM12,  
XX9D1A1F1AM12

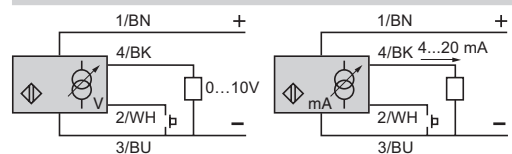

For impedance of resistive load refer to values on page 75.

## XX Configuration Software

Telemecanique Sensors is now offering a solution for configuring ultrasonic XX range sensors. This software enables users to quickly find the optimal sensing solution for their applications. An interface unit connects the sensor to the PC via a USB connection.

### > Easy configuration to unique applications

The configuration software has more than 20 parameters that can be modified to suit the machine application. The parameters can be saved in PDF format for quick, easy reference.


### > Real-time sensor performance display

One of the best functions of the new software is the ability to troubleshoot and visualize the effects of the parameters on the configured sensor. The "echo display" function shows the exact position of any false echoes. The recording function can record the values of the echoes in an .xlsx or .xml file for extended periods of time.

### > Quick duplication of programmed settings

Optimal parameters set on one sensor can be saved and loaded on other units of the same reference. This function reduces time and effort.

### > The interface can be used to configure specific configurable models of XX ultrasonic sensors (XXS●●, XXA●● & XXW54P3●●●).

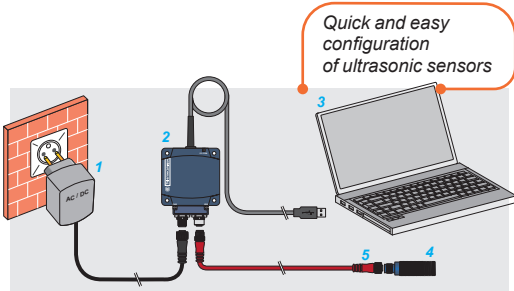

- 1: Power supply, provided with 4 adapters
- 2: Configuration interface **XXZBOX01**
- 3: XX Configuration Software, installed on a PC
- 4: Ultrasonic sensor **XXS●●**, **XXA●●** or **XXW54P3●●●**.
- 5: M12-M12 cable or Deutsch DTM04-M12.

## XX Configuration Software for ultrasonic sensors

### > XX Configuration Software is available in English, French, German, Spanish, Italian, and Chinese. It can be downloaded directly from the website [www.tesensors.com](http://www.tesensors.com).

### > Recommended PC performance:

- > Windows OS: 7 SP1 embedded standard(x86 & x64), 8.1 (x86 & x64), or 10 (x86 & x64)
- > Internet Explorer: 9.0 or higher
- > Disk space: 1 GB or higher
- > RAM memory: 2 GB or higher
- > Processor speed: 1 GHz or higher
- > Display resolution: 1360 x 768 or higher



Ultrasonic sensors configuration interface  
XXZBOX01



Ultrasonic sensors configuration kit  
XXZKIT01

## References

Description	Reference	Weight kg
<b>Ultrasonic sensors configuration interface</b>		
<b>Configuration interface provided with:</b>	<b>XXZBOX01</b>	0.400
<ul style="list-style-type: none"> <li>■ 1 power supply (1)</li> <li>■ 1 UK adapter</li> <li>■ 1 SAA adapter</li> <li>■ 1 US adapter</li> <li>■ 1 EU adapter</li> </ul>		
<b>Ultrasonic sensors configuration kit</b>		
<b>Plastic case including:</b>	<b>XXZKIT01</b>	1.200
<ul style="list-style-type: none"> <li>■ 1 configuration interface XXZBOX01</li> <li>■ 1 power supply (1)</li> <li>■ 1 UK adapter</li> <li>■ 1 SAA adapter</li> <li>■ 1 US adapter</li> <li>■ 1 EU adapter</li> <li>■ 1 cable of 1 m, with M12 connectors (5-pin male/female)</li> </ul>		

(1) Power supply: 24 V  $\overline{-}$ , 0.5 A min., with M12 connector.


**+** One of the most user-friendly ultrasonic sensor configuration software solutions

## Configuration software presentation

### Principle




- 1: Power supply, provided with 4 adapters
- 2: Configuration interface **XXZBOX01**
- 3: XX Configuration Software, installed on a PC
- 4: Ultrasonic sensor **XXS**●●, **XXA**●● or **XXW54P3**●●●.

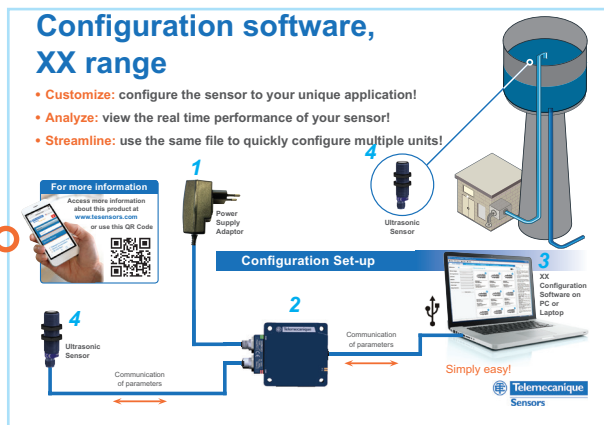

## Setting examples

### Sensor selection

- > This page is used to manually select or auto-download the XX reference sensor to be configured. Once a reference has been selected, the user can start the configuration process.
- > There are 4 methods of selection. The **Reset search** button can reinitialize the search, regardless of the method used.
  - 1: Direct selection from the full reference list
  - 2: Selection through reference
  - 3: Manual search using criteria
  - 4: Automatic sensor detection

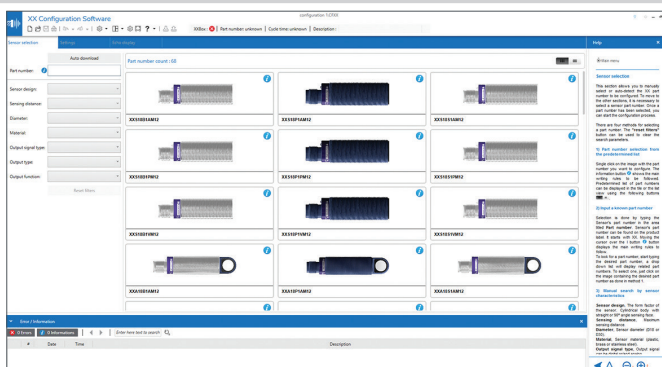

### Detection settings


- > This tab is used to configure the sensor detection settings.

Hysteresis		
Limit	Value	Unit
Near	- 4 +	mm
Far	- 4 +	mm

Unexpected echoes		
Limit	Value	Unit
Foreground	- 100 +	mm
Background	- 1020 +	mm

Change ON / OFF		
Change	Value	Unit
ON	- 3 +	cycles
OFF	- 3 +	cycles

Multiplexer		
Number of sensors	- 1 +	
Address	- 1 +	

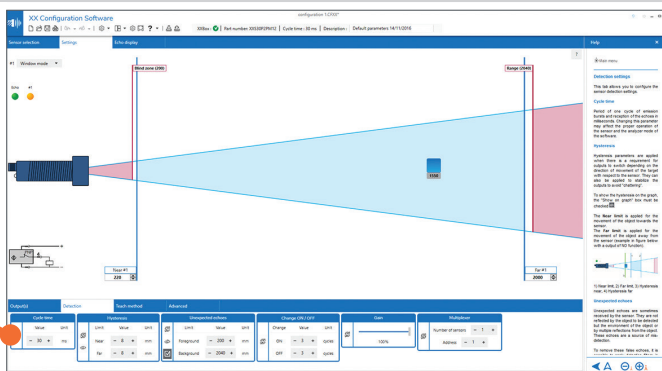

### Output settings


- > This page enables the configuration of sensor outputs. If the sensor has several outputs, they may be configured separately, unless specified otherwise.

Output		
#	Type	Function
1	PNP	NO

Pulse length		
Value	Unit	
- 0 +	ms	

Loss of echo		
Number of cycles	- 3 +	
Output #1 state	Non-detection	

Delays		
Delay	Value	Unit
ON	- 0 +	ms
OFF	- 0 +	ms

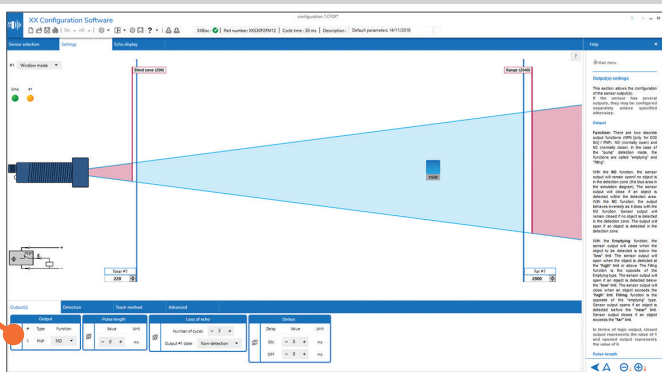


## Configuration software presentation (continued)

### Setting examples (continued)


#### Teach method settings

- > This tab allows the configuration of the pushbutton for manual teaching. Depending on the sensor reference, the teach button is either integrated in the sensor or available through the teach pushbutton **XXZPB100** (see page 43).

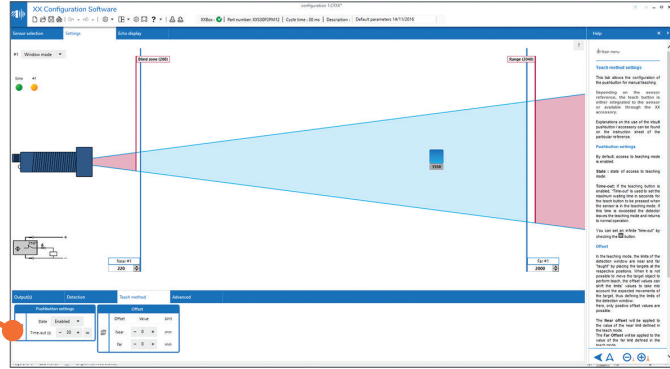


#### Echo display mode

- > With the “echo display” mode, the user can visualize several echoes received by the sensor in the same cycle.
- > The first valid echo is shown in blue and the others in gray. The blue echo is what the sensor considers as the detected object.
- > It is also possible to record the data over extended periods of time using the “record” function.

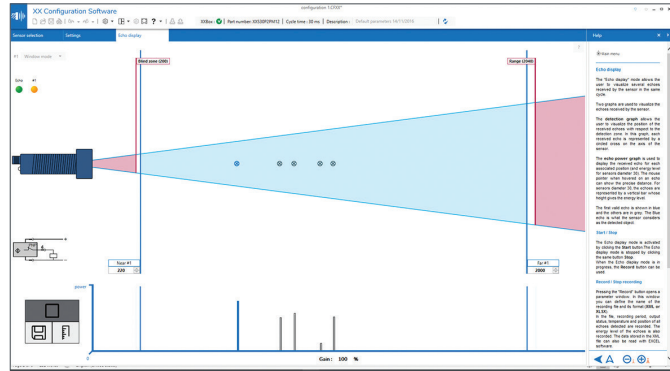

#### Measure mode

- > The “measure” button opens a pop-up window giving a real-time numerical display of the position of the object in mm or inches.

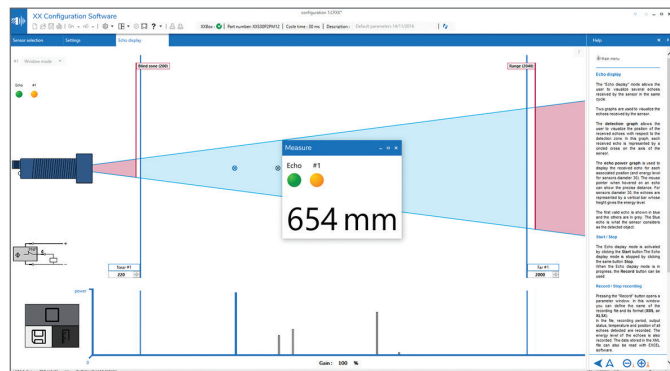

## Characteristics

### Supply characteristics

Rated supply voltage (Ue) with protection against reverse polarity	V	24 V $\overline{\text{---}}$
Voltage limits	V	14...30 V $\overline{\text{---}}$ (ripple: 10% max)
Consumption	W	4 (consumption excluding sensor)

### LED indicators

LED indicators	Power supply	Green LED
	PC communication	Orange LED
	Error	Red LED

### Communication

Data communication baud rate	bps	19,200
------------------------------	-----	--------


### Connection

Maximum cabling distance between sensor and interface	m	3
Electrical connection to sensor		M12 female connector
Connection to PC or laptop		0.5 m USB cable , A type connector

### Environment characteristics

Compliance to regulations		CE
Degree of protection	Conforming to IEC 60529	IP 40
Storage temperature	°C	-20...+45
Operating temperature	°C	0...+45
Relative humidity		< 95%, without condensation

## Dimensions

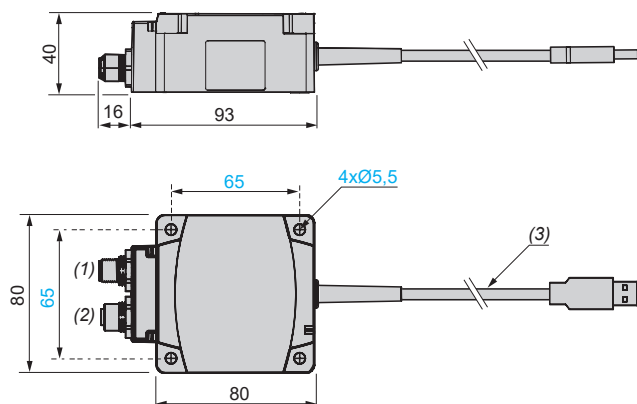

- (1) Male M12 connector, 5-pin: power supply  
 (2) Female M12 connector, 5-pin: sensor  
 (3) Cable length: 0.5 m (USB cable A type connector): PC

## Connections

### Interface connector for power supply adapter (M12 male)



Pin number	Wire color	Description
1	BN: Brown	+14...30 V $\overline{\text{---}}$
2	WH: White	Output 2 (4) (5)
3	BU: Blue	0 V $\overline{\text{---}}$
4	BK: Black	Output 1 (4)
5	-	Not used (6)

### Interface connector for sensor (M12 female)






Pin number	Description
1	Power out to sensor
2	Software communication
3	0 V $\overline{\text{---}}$
4	Software communication
5	Not used (6)

(4) Output is only active during the "echo display" mode and "measure" mode.

(5) Output 2 is not available on all sensors.

(6) The 5<sup>th</sup> pins of the M12 male and M12 female connectors are electrically connected to one another.

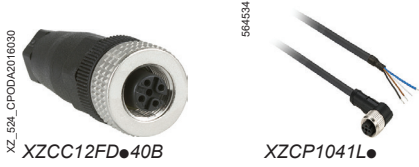

References of accessories

Cabling accessories

Connectors	For use with sensor	Type of connection		Reference	Weight kg
M8 3-pin	∅ 12	IDC (Insulation Displacement Connector)	Straight	<b>XZCC8FDM30V</b>	0.010
	XX512A2•		Elbowed	<b>XZCC8FCM30V</b>	0.010
M8 4-pin	XX512A1•		Straight	<b>XZCC8FDM40V</b>	0.010
	XX•12A8•		Elbowed	<b>XZCC8FCM40V</b>	0.010
M12	∅ 18, ∅ 30	Screw terminals, metal clamping ring	Straight	<b>XZCC12FDM40B</b>	0.020
			Elbowed	<b>XZCC12FCM40B</b>	0.020
		Screw terminals, plastic clamping ring	Straight	<b>XZCC12FDP40B</b>	0.020
			Elbowed	<b>XZCC12FCP40B</b>	0.020

Pre-wired connectors	For use with sensor	Type	Cable length m	Reference	Weight kg
M8 3-pin	∅ 12 XX512A2•	Straight	2	<b>XZCP0166L2 (1)</b>	0.080
		Elbowed	2	<b>XZCP0266L2 (1)</b>	0.080
M12	∅ 18, ∅ 30	Straight	2	<b>XZCP1141L2 (1)</b>	0.090
		Elbowed	2	<b>XZCP1241L2 (1)</b>	0.090

Fixing accessories

Description		For use with sensor	Reference	Weight kg
Fixing clamps		∅ 12	<b>XSZB112</b>	0.006
		∅ 18	<b>XSZB118</b>	0.010
		∅ 30	<b>XSZB130</b>	0.020
Fixing clamps (mounting on 35 mm rail)		XX•D•	<b>XSZBD10</b>	0.065
90° fixing bracket		∅ 12	<b>XXZ12</b>	0.025
		∅ 18	<b>XUZA118</b>	0.038
		∅ 30	<b>XXZ30</b>	0.115
3D fixing kit (2)	M12 rod	∅ 12, ∅ 18 and ∅ 30	<b>XUZ2001</b>	0.050
	Support for M12 rod	∅ 12, ∅ 18 and ∅ 30	<b>XUZ2003</b>	0.160
	Ball-joint mounted fixing bracket	∅ 12	<b>XUZB2012</b>	0.175
		∅ 18	<b>XUZB2003</b>	0.175
	∅ 30	<b>XUZB2030</b>	0.160	

(1) For a 5 m long cable replace L2 by L5, for a 10 m long cable replace L2 by L10.

(2) To obtain a 3D fixing kit, order:  
rod support **XUZ2003**, M12 rod **XUZ2001** and ball-joint mounted fixing bracket **XUZB20••**




## Dimensions of accessories

### Fixing accessories


#### XUZA118

90° fixing bracket (Ø 18)

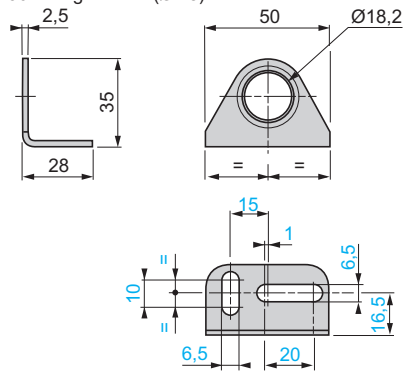

#### XXZ12, XXZ30


90° fixing bracket (Ø 12 and Ø 30)

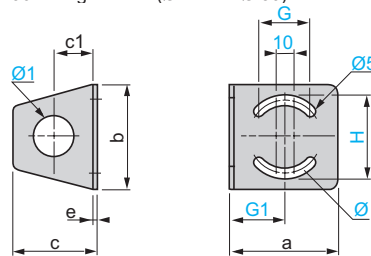

XXZ	a	b	c	c1	e	H	G	G1	Ø	Ø1
12	35	40	33	18	2	31	18	18	25	13
30	67	65	52	25	3	51	35	33	50	31

#### XSZB112, XSZB118

Fixing clamps (Ø 12, Ø 18 and Ø 30)

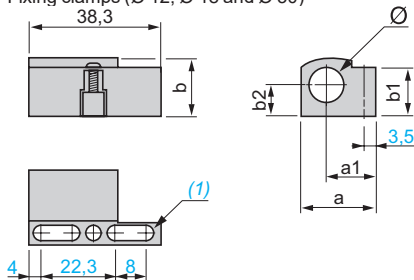


XSZ	a	a1	b	b1	b2	Ø
B112	21.9	14.5	16	15.5	8.5	12
B118	26	15.7	22.3	20.1	11.5	18
B130	39	21.7	35.5	31	18.5	30

(1) 2 elongated holes Ø 4 x 8.


#### XUZ2001

M12 rod

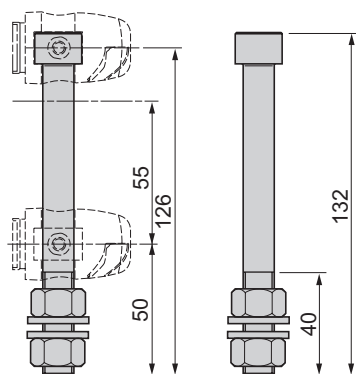


#### XUZ2003

Support for M12 rod

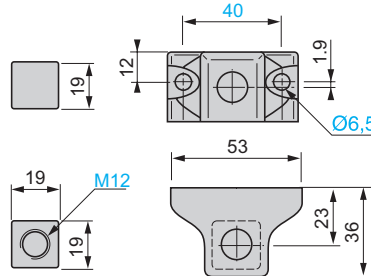


#### XSZBD10

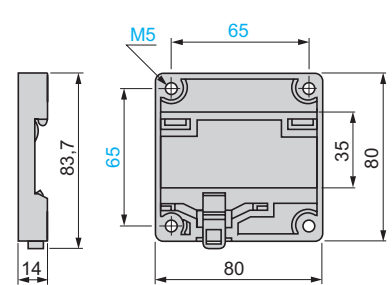


#### XUZB2012

Ball-joint mounted fixing bracket (Ø 12)

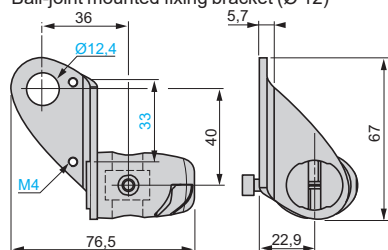


#### XUZB2003

Ball-joint mounted fixing bracket (Ø 18)



#### XUZB2030

Ball-joint mounted fixing bracket (Ø 30)

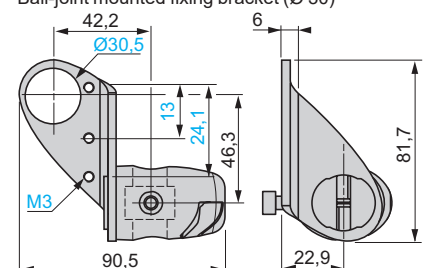

<b>X</b>							
XSZB112	82	XX930S1A2M12	36	XXS30S1PM12	42	XZCPV11V12L10	31
XSZB118	82	XXA18B1AM12	30	XXS30S1VM12	43		44
XSZB130	82	XXA18B1PM12	30	XXS30S2AM12	43	XZCPV12V12L2	31
XSZBD10	82	XXA18B1VM12	30	XXS30S2PM12	42		44
XUZ2001	82	XXA18P1AM12	30	XXS30S2VM12	43	XZCPV12V12L5	31
XUZ2003	82	XXA18P1PM12	30	XXS30S4AM12	43		44
XUZA118	82	XXA18P1VM12	30	XXS30S4PM12	42	XZCPV12V12L10	31
XUZB2003	82	XXA18S1AM12	30	XXS30S4VM12	43		44
XUZB2012	82	XXA18S1PM12	30	XXT12A8M8	22	XZCPV1164L2	44
XUZB2030	82	XXA18S1VM12	30	XXT18A3M12	26	XZCPV1164L5	44
XX6V3A1NAM12	36	XXA30B1AM12	43	XXT18A4M12	26	XZCPV1164L10	44
XX6V3A1PAM12	36	XXA30B1PM12	42	XXV18B1NAL2	22	XZCPV1264L2	44
XX7F1A2NAL01M12	72	XXA30B1VM12	43	XXV18B1NAM12	22	XZCPV1264L5	44
XX7F1A2PAL01M12	72	XXA30B2AM12	42	XXV18B1NBL5	22	XZCPV1264L10	44
XX7K1A2PAM12	72	XXA30B2PM12	42	XXV18B1PAL2	22		
XX7V1A1NAM12	72	XXA30B2VM12	43	XXV18B1PAL5	22		
XX7V1A1PAM12	72	XXA30P1AM12	42	XXV18B1PAM12	22		
XX8D1A1NAM12	72	XXA30P1PM12	42	XXV18B1PBL2	22		
XX8D1A1PAM12	72	XXA30P1VM12	42	XXV18B1PBM12	22		
XX9D1A1C2M12	73	XXA30P2AM12	42	XXW54P3APL01DM6	63		
XX9D1A1F1M12	73	XXA30P2PM12	42	XXW54P3APL01M12	63		
XX9V1A1C2M12	73	XXA30P2VM12	42	XXW54P3APL05	63		
XX9V1A1F1M12	73	XXA30S1AM12	43	XXW54P3HPL01DM6	63		
XX9V3A1C2M12	36	XXA30S1PM12	42	XXW54P3HPL01M12	63		
XX9V3A1F1M12	36	XXA30S1VM12	43	XXW54P3HPL05	63		
XX218A3PFM12	40	XXA30S2AM12	43	XXW54P3JL01DM6	63		
XX218A3PHM12	40	XXA30S2PM12	42	XXW54P3JL05	63		
XX230A10PA00M12	40	XXA30S2VM12	43	XXZ12	82		
XX230A11PA00M12	40	XXR12A8KAM8	22	XXZ30	82		
XX230A12NA00M12	40	XXR18A3KAM12	26	XXZB118	31		
XX230A12PA00M12	40	XXR18A4KAM12	26	XXZB130	44		
XX230A20PA00M12	40	XXS18B1AM12	30	XXZBOX01	78		
XX230A21PA00M12	40	XXS18B1PM12	30	XXZKIT01	78		
XX230A22PA00M12	40	XXS18B1VM12	30	XXZKITDM6	63		
XX512A1KAM8	22	XXS18P1AM12	30	XXZPB100	26		
XX512A2NAM8	22	XXS18P1PM12	30		30		
XX512A2PAM8	22	XXS18P1VM12	30		40		
XX518A1KAM12	22	XXS18S1AM12	30		43		
XX518A3NAL2	26	XXS18S1PM12	30		72		
XX518A3NAM12	26	XXS18S1VM12	30		73		
XX518A3PAL2	26	XXS30B1AM12	43	XZCC8FCM30V	82		
XX518A3PAM12	26	XXS30B1PM12	42	XZCC8FCM40V	82		
XX630A1KAM12	36	XXS30B1VM12	43	XZCC8FDM30V	82		
XX630A1NCM12	36	XXS30B2AM12	43	XZCC8FDM40V	82		
XX630A1PCM12	36	XXS30B2PM12	42	XZCC12FCM40B	82		
XX630A2NCM12	36	XXS30B2VM12	43	XZCC12FCM50B	31		
XX630A2PCM12	36	XXS30B4AM12	43	XZCC12FCP40B	82		
XX630A3NCM12	36	XXS30B4PM12	42	XZCC12FDM40B	82		
XX630A3PCM12	36	XXS30B4VM12	43	XZCC12FDM50B	31		
XX630S1NCM12	36	XXS30P1AM12	42		44		
XX630S1PCM12	36	XXS30P1PM12	42	XZCC12FDP40B	82		
XX918A3C2M12	26	XXS30P1VM12	42	XZCP0166L2	82		
XX918A3F1M12	26	XXS30P2AM12	42	XZCP0266L2	82		
XX930A1A1M12	36	XXS30P2PM12	42	XZCP1141L2	31		
XX930A1A2M12	36	XXS30P2VM12	42		82		
XX930A1A2230M12	36	XXS30P4AM12	42	XZCP1141L5	31		
XX930A2A1M12	36	XXS30P4PM12	42	XZCP1141L10	31		
XX930A2A2M12	36	XXS30P4VM12	42	XZCP1241L2	31		
XX930A2A2230M12	36	XXS30P8APM12	42		82		
XX930A3A1M12	36	XXS30P8NNM12	42	XZCP1241L5	31		
XX930A3A2M12	36	XXS30P8PPM12	42	XZCP1241L10	31		
XX930S1A1M12	36	XXS30P8VPM12	42	XZCPV11V12L2	31		
		XXS30S1AM12	43		44		
				XZCPV11V12L5	31		
					44		

[www.tesensors.com](http://www.tesensors.com)

The information provided in this catalogue contains description of products sold by TMSS France, its subsidiaries and other affiliated companies ('Offer') with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by TMSS France, its subsidiaries and other affiliated companies for any type of damage arising out of or in connexion with (a) informational content of this catalogue not conforming with or exceeding the technical specifications, or (b) any error contained in this catalogue, or (c) any use, decision, act or omission made or taken on the basis of or in reliance on any information contained or referred to in this catalogue.

**NEITHER TMSS FRANCE, ITS SUBSIDIARIES, NOR ITS OTHER AFFILIATES, AS THE CASE MAYBE, MAKE NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOGUE OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.**

Telemecanique™ Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this catalogue are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners.

This catalogue and its content are protected under applicable copyright laws and provided for informative use only.

No part of this catalogue may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of TMSS France. Copyright, intellectual, and all other proprietary rights in the content of this catalogue (including but not limited to audio, video, text, and photographs) rests with TMSS France, its subsidiaries, and other affiliated companies or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

As standards, specifications and design change from time to time, please ask for confirmation of the information given in this publication.

©2024, TMSS France, All Rights Reserved.

#### **TMSS France SAS**

Share capital: 366 931 214 €  
Tour Eqho, 2 avenue Gambetta  
92 400 Courbevoie – France  
908 125 255 RCS Nanterre

February 2024 - V1.1

TESEBRO000046EN