




- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL. STATE AND LOCAL CODES.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK
- 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES[MILLIMETERS].
- 4. NET WEIGHT OF UNIT IS 20.75 lb [9.41kg].
- 5. LENGTH OF THE CORD IS 120 INCHES [3050mm].
- 6. UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURES. BRACKET IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
- 7. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
- △8. REFER TO WARNING LABEL ON REAR OF UNIT FOR SCREW MOUNTING.

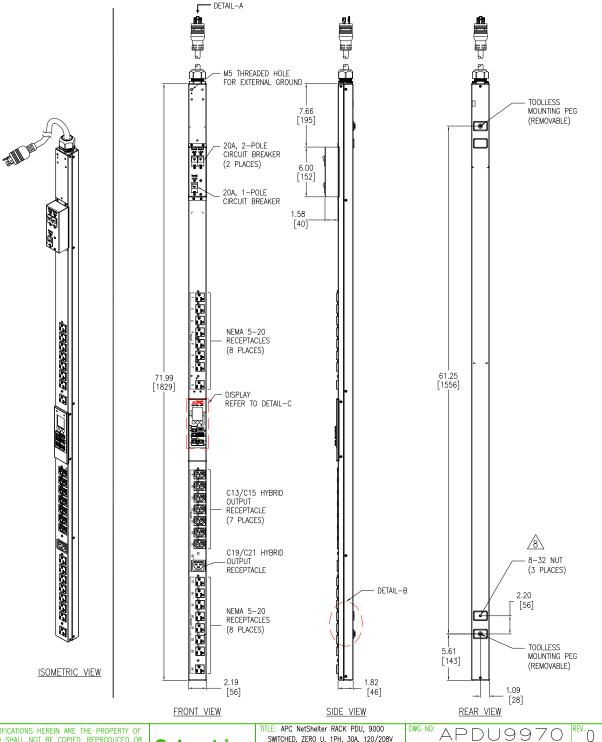


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider # Electric

SWITCHED, ZERO U, 1PH, 30A, 120/208V INPUT: NEMA L14-30P OUTPUT: (16)5-20R, (7)C13/C15 HYBRID & (1)C19/C21 HYBRID GENERAL ARRANGEMENT

31-AUG-20 THIRD DRAWN BY: JAYAPRAKASH NGINEER: YUCHUN JIANG 06-OCT-20 ANGLE PROJECT: STD SUBMITTAL DRAWINGS | SHEET | 1 OF 2 | APPROVED BY: WeiCheng CHENG | 06-OCT-20 PROJ

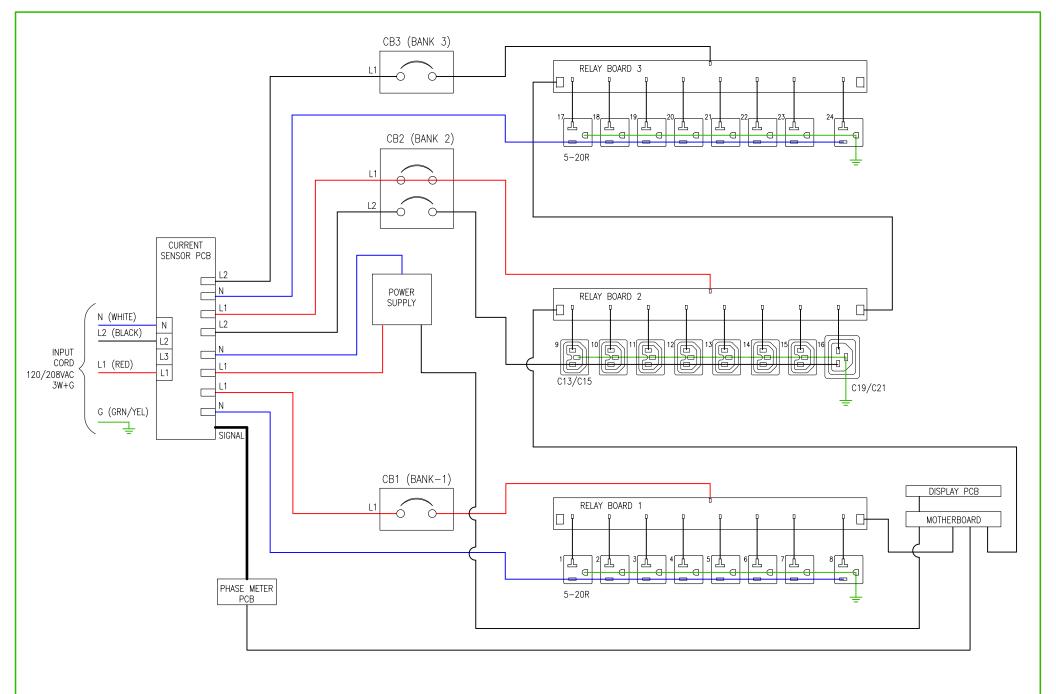

NOTES:

- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
- 2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION
- 3. THIS DRAWING DEPICTS THE POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF THE PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL DRAWINGS FOR PHYSICAL LAYOUT.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: APC NetShelter RACK PDU, 9000					
SWITCHED, ZERO U, 1PH, 30A, 120/208V					
INPUT: NEMA L14-30P					
OUTPUT: (16)5–20R, (7)C13/C15 HYBRID & (1)C19/C21 HYBRID SCHEMATIC DIAGRAM					
SCHEMATIC DIAGRAM					

SWITCHED, ZERO U, 1PH, 30A, 120/208V	DWG NO: APDU9970		REV. O	
INPUT: NEMA L14-30P OUTPUT: (16)5-20R, (7)C13/C15 HYBRID & (1)C19/C21 HYBRID . SCHEMATIC DIAGRAM		DRAWN BY: JAYAPRAKASI	1 31-AUG-20	ANGLE
SCHEMATIC DIAGRAM	ENGINEER: YUCHUN JIANG	06-0CT-20	PROJECTION	
PROJECT: STD SUBMITTAL DRAWINGS S	SHEET 2 OF 2	APPROVED BY: WeiCheng CHEN	G 06-0CT-20	N.A