



## Optical Touchless Buttons for improved hygiene and modernization



### Reduce the risk of infection from surface contact with contactless sensor buttons

Well managed, safe facilities are those which ensure every facet of their environment minimizes risk to those present. A touchless button solution from Telemecanique Sensors will help provide a safer, more sanitary experience for everyone using it.

#### Non contact detection of fingers or gloved fingers

The Telemecanique Sensors products used in the Optical Touchless Buttons are the catalysts activating the button's function, whether it be putting an elevator in motion or another action. The adjustable detection range of the sensors allows for sensing distance optimization and minimizing false triggers.


#### Pleasant installation, look, maintenance and operation

Telemecanique Sensors Touchless Buttons are easily installed using a standard 22.5mm mounting hole. Once installed, the stainless steel collar design provides a pleasant aesthetic look and easily withstands cleansers during washdown. The operation of the touchless button is extremely quiet.

It's "Simply easy...and safer!"



**Telemecanique**  
**Sensors**

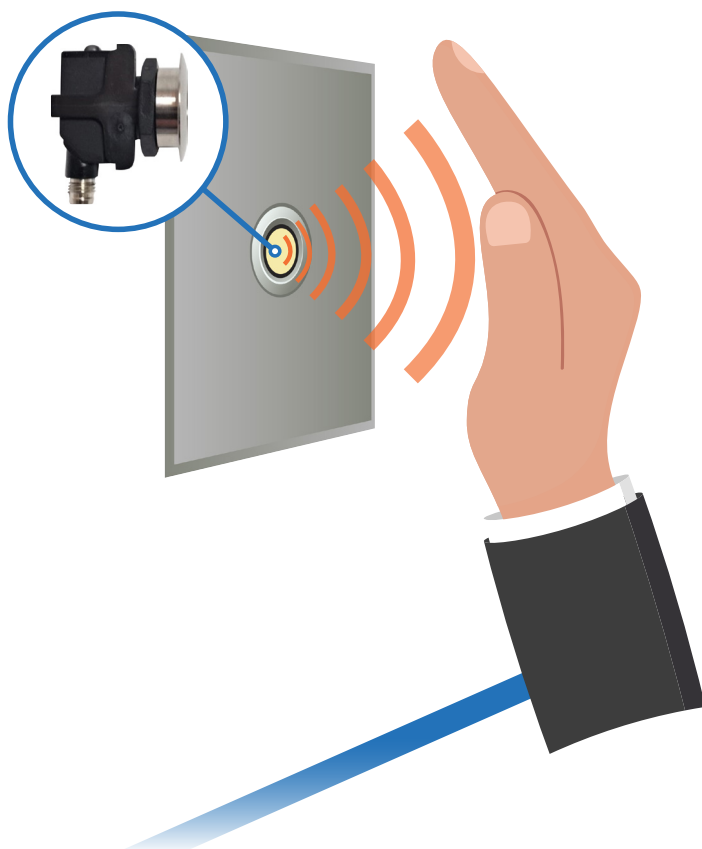

## Features and benefits

**Reduces risk of infection from surfaces by eliminating physical contact with buttons.**

- Automatically detects fingers or gloved fingers
- Adjustable sensing distances allows optimization for the application and reduces false triggers

### Easy-to-install

- Mounts in standard 22.5mm mounting hole




### Three detection options

- XUM Optical Touchless Button
- XXV Ultrasonic Touchless Button
- XUB Ultrasonic Touchless Button

## Characteristics

- Ecolab conformity
- IP67 degree of protection

## Part Numbers (3 available options)

XUM Optical Touchless Button		Features	Sensor	Accessories
	Telemecanique Sensors	0 to 600mm sensing range	XUM8APCNM8	XUZASM001 XUZASB001
	XUM Photoelectric Sensor	Rated wire output for easy integration		
XXV Ultrasonic Touchless Button		Features	Sensor	Accessory
	Telemecanique Sensors	2 to 25mm sensing range	XXV18B1PAL1	XUZASB001
	XXV Ultrasonic Sensor	Rated 10-36vdc with NO, 3-wire PNP output		
XUB Optical Touchless Button		Features	Sensor	Accessory
	Telemecanique Sensors	0 to 600mm sensing range	XUB5APANL2	XUZASB001
	XUB Photoelectric Sensor	Rated wire output for easy integration		

For our complete selection of sensor solutions, visit [www.tesensors.com](http://www.tesensors.com)