



ALTIVAR[®] 16

ALTIVAR[®] 66

VW3-A66401 ... A66406

Filtres atténuateurs de radio-perturbations

Radio-interference attenuating filters

Funkentstörfilter

Filtros atenuadores de radio perturbaciones

		①	②
VW3-A66401	400/460 V - 6,5 A	ATV-66U41N4 (0,75 - 1,5 kW)	ATV-66U41N4 (0,75 - 1,5 kW)
VW3-A66402	400/460 V - 16 A	ATV-66U41N4 (2,2 kW) ATV-66U54N4 (3 kW) ATV-66U72N4 (4 kW) ATV-66U41M2 (2,2 kW)	ATV-66U41N4 (2,2 - 3 kW) ATV-66U54N4 (4 kW)
VW3-A66404	400/460 V - 26 A	ATV-16U90N4 (5,5 kW) ATV-66U90N4 (5,5 kW) ATV-66D12N4 (7,5 kW) ATV-66U72M2 (4 kW)	ATV-66U72N4 (5,5 kW) ATV-66U90N4 (7,5 kW) ATV-66U41M2 (3 kW)
VW3-A66405	400/460 V - 46 A	ATV-66D16N4 (11 kW) ATV-66D23N4 (15 kW) ATV-66D90M2 (5,5 kW) ATV-66D12M2 (7,5 kW)	ATV-66D12N4 (11 kW) ATV-66D16N4 (15 kW) ATV-66U72M2 (5,5 kW) ATV-66U90M2 (7,5 kW)
VW3-A66406	400/460 V - 78 A	ATV-66D33N4 (22 kW) ATV-66D46N4 (30 kW) ATV-66D16M2 (11 kW) ATV-66D23M2 (15 kW)	ATV-66D23N4 (18,5 kW) ATV-66D33N4 (22 - 30 kW) ATV-66D12M2 (11 kW) ATV-66D23M2 (18,5 kW)

① **Couple constant - Couple variable faible bruit**

Constant torque - Low noise variable torque

Konstantes Drehmoment - Variables Drehmoment mit Reduzierung der Motorgeräusche

Par constante - Par variable bajo ruido


② **Couple variable**

Variable torque

Variables Drehmoment


Par variable

IP 20

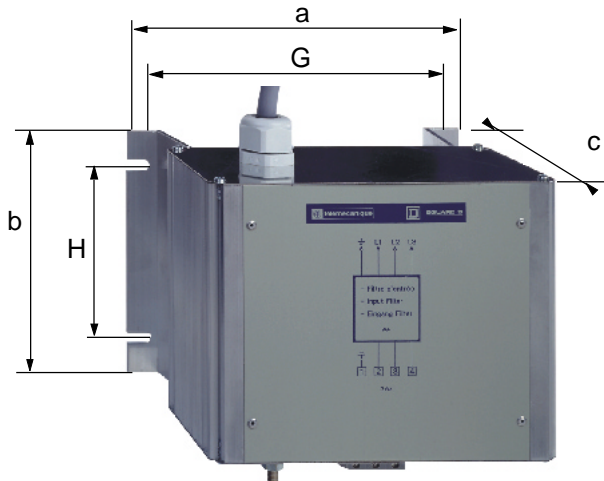

VW3-	(mm)	a	b	c	G	H
A66401, A66402		190	140	145	170	100
A66404		190	180	145	170	100
A66405, A66406		190	180	145	170	140

1 inch = 25,4 mm

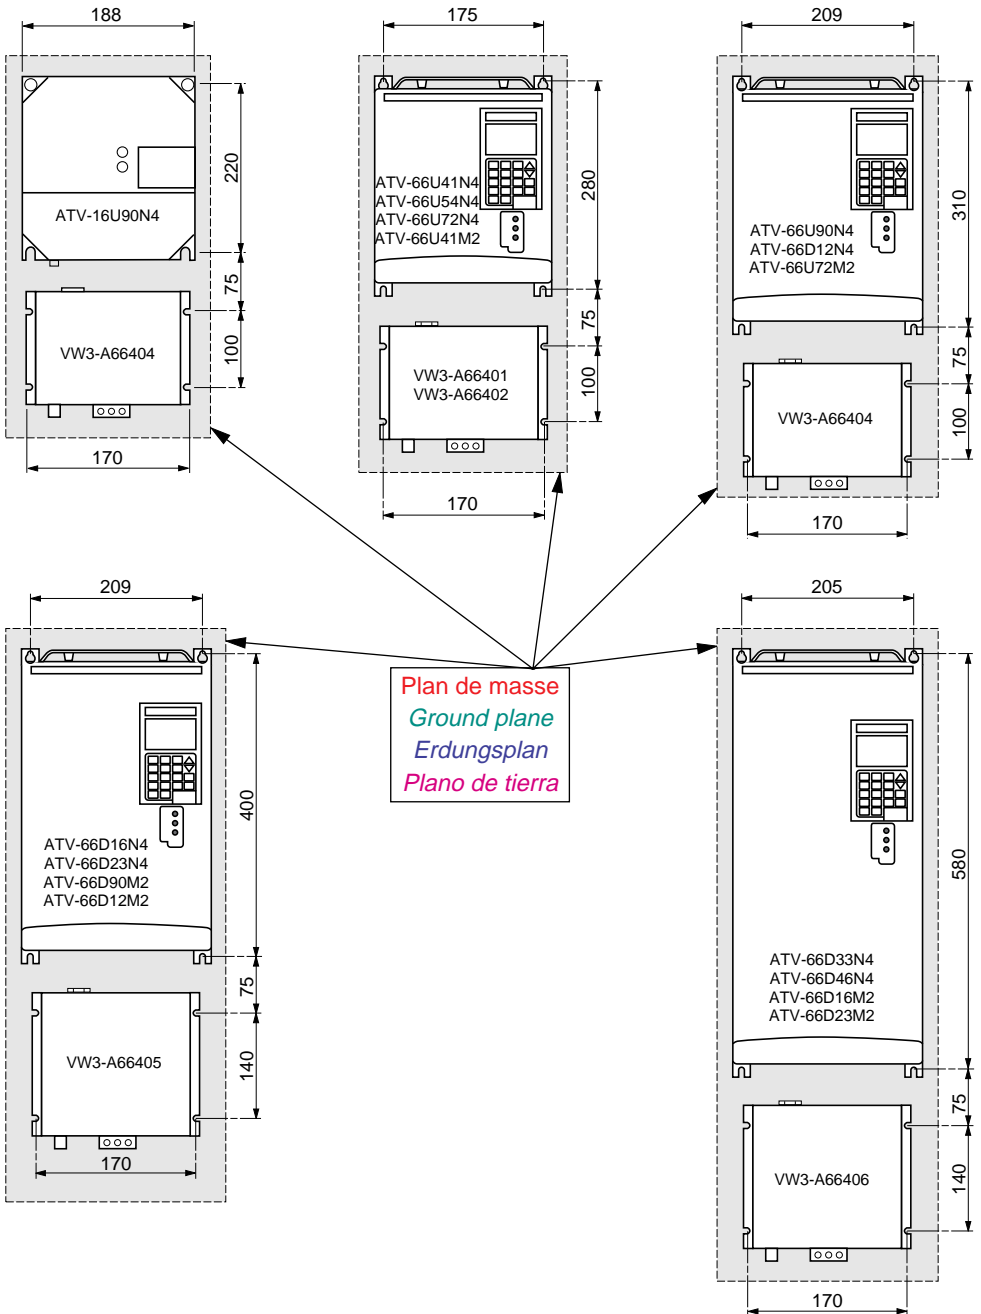

Raccordement

Wiring

Anschlüsse

Conexion

Altivar 16
Altivar 66

