

Instructions for :  
**Lisse Deco Grid System**

**Lisse**

AR1909 Ed A

7. Ensure that the plastic frame is correctly refitted and retained by the frame clips on the grid frame.
8. Secure grid frame to the wall box using fixing screws provided.
9. Replace front plate by clipping onto the plastic frame.
10. Replace the appropriate fuse, or switch on the appropriate circuit breaker. Switch the mains back on.

**MULTIPLE ROW GRID INSTALLATION**

When installing multiple grid frame units please note:  
Avoid excessive bunching of cables and avoid routing cables below grid fixing screws. Where necessary, use multiple cable entry points.

Please read these instructions fully before commencing work and retain them for future reference.


**SAFETY**

These accessories are to be installed in accordance with the current edition of the IEE Wiring Regulations (BS 7671: Requirements for Electrical Installations) and appropriate statutory regulations.

In the Republic of Ireland the installation must be in accordance with the ETCI National Rules for Electrical installations - ET 101.

Switch OFF the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation. Ensure that no one else has access that would enable the supply to be inadvertently reconnected.

**NOTE: IF YOU ARE IN ANY DOUBT ON HOW TO PROCEED, CONSULT A QUALIFIED ELECTRICIAN**

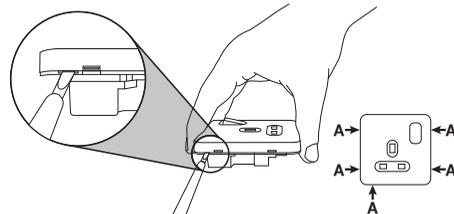

**LISSE DECO ACCESSORIES WITH METAL FRONTPLATES**

Remove the clip-on frontplate by inserting a small screwdriver alternatively into the small slots (A) on the sides of the frontplate and gently prise off.

Once the socket is installed replace the screwless frontplate by clipping it back in place. **Do this before reconnecting to the mains power.**

To keep decorative metal frontplates clean, occasionally wipe the frontplate with a clean soft cloth. Do not use any form of cleaning agent as this could damage the decorative finish.

Fig. 1


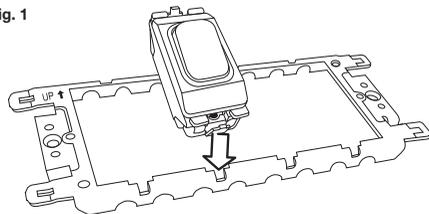


Fig. 2



**IMPORTANT NOTICE - WIRING COLOUR CHANGES**

As from 1st April 2004 new installations in the UK could be wired using the new EU Harmonised colours for the supply conductors of twin and earth cable:

**New colours**    Brown = Live    Blue = Neutral  
**Old Colours**    Red = Live    Black = Neutral

The old colours ceased to be used after 1st April 2006.

**Flexible cable colours remain unchanged:**

Brown = Live    Blue = Neutral

**Fire conductor colours for twin and earth cable and flexible cable:**

Brown = Live    Blue = Neutral

**INSTALLATION**

1. For the best mounting results and visual appearance, it is recommended that prior to installation, the mounting surface beneath the accessory frontplate is first prepared to ensure that it is flat and all high spots have been removed.
2. 1 and 2 module grid frames may require that the top and bottom lugs in 1 gang, 4 lug boxes, are bent inwards and out of the way ensure the correct installation within the box.
3. Always use cable of the correct rating and type.
4. Ensure grid module(s) are securely snapped onto grid frame from the front, prior to connection - as shown in fig 1.
5. Grid frames must be correctly earthed. This is achieved by connecting the supply earth wire to the earth terminal provided and then connecting a short length of wire from this terminal to the terminal in the back box. If the earth wire is bare it should be sheathed with a length of green/yellow sleeving.
6. Fit moulded shrouds to the grid module - as shown in fig 2.

**International Customer Care Centre Numbers**

Saudi Arabia	+966 920011101
Cyprus	+357 24812649
Iraq	+962 65166260
Jordan	+962 65166465
Lebanon	+961 1321645
Hong Kong	+852 2579 9699
Nigeria	+234 (0)14483381
UAE/Pakistan/Yemen	+971 4 7099333
Bahrain	+973 17 213277
Kuwait	+965 22494604
Oman	800 73666
Qatar	+974 44553010
UK	+44 (0)870 608 8608

Schneider Electric Ltd,  
Stafford Park 5, Telford, Shropshire TF3 3BL, UK  
[www.schneider-electric.com](http://www.schneider-electric.com)