

CLIPSAL®


WIRING DETAILS

Cat. No's 438/110HD, 438/2HD, 438/32HD,
438LHD, 438/20HD, 492/32HD


RECOMMENDED CABLES

CORD EXTENSION SOCKETS	Cat. No. 438LHD Cat. No. 438/110HD	250 V 10A 110V 10A	1.00 mm ² heavy duty three core flexible cord
	Cat. No. 438/20HD	250 V 20A	2.5 mm ² heavy duty three core flexible cord
	Cat. No. 438/2HD	250 V 10A	1.00 mm ² heavy duty 2 core flexible cord
	Cat. No. 438/32HD	32V 15A Polarised	1.5 mm ² heavy duty 2 core flexible cord
PLUG TOPS	Cat. No. 492/32HD	32V 15A Polarised 2 Pin	1.5 mm ² heavy duty 2 core flexible cord

* Stripping dimensions (actual size shown)

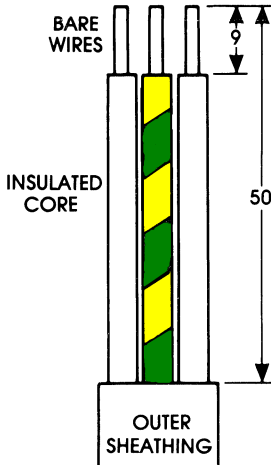

Cat. No.
438LHD
438/110HD
438/20HD

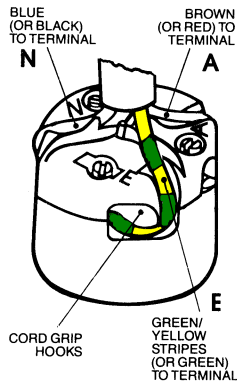

WIRING INSTRUCTIONS

1. SLIP CORD GRIP NUT (SMALL END FIRST) AND COVER, OVER FLEX CORD.
2. CONNECT EARTH WIRE WITH GREEN/YELLOW STRIPE (OR ALL GREEN) TO EARTH TERMINAL MARKED 'E' AND WITH GREEN INDICATOR.
3. CONNECT BROWN (OR RED) WIRE TO ACTIVE TERMINAL MARKED 'A'.
4. CONNECT BLUE (OR BLACK) WIRE TO NEUTRAL TERMINAL MARKED 'N'.
5. ENSURE ALL WIRES SECURELY LOOPED UNDER CORD GRIP HOOKS.
6. **DOUBLE CHECK EARTH WIRE IS CONNECTED TO EARTH TERMINAL.**
7. FIT COVER AND TIGHTEN CORD-GRIP NUT.

SAFETY PRECAUTIONS




ENSURE EARTH WIRE WITH GREEN/YELLOW STRIPES (OR ALL GREEN) IS CONNECTED TO EARTH TERMINAL MARKED 'E' AND WITH GREEN INDICATION.

TWO WIRE MODELS

Cat. No's 438/32HD, 438/2HD, 492/32HD

* Stripping dimensions (actual size shown)

Cat. No's 438/32HD, 438/2HD

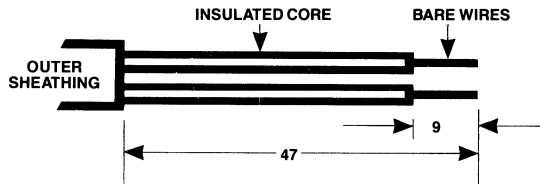

FLEXIBLE CORD WRAPPED UNDER CORD GRIP HOOKS

WIRING INSTRUCTIONS

1. SLIP CORD GRIP NUT, (SMALL END FIRST) AND COVER, OVER FLEXIBLE CORD.
2. CONNECT ONE WIRE (ANY COLOUR) TO TERMINAL AND TIGHTEN.
3. CONNECT REMAINING WIRE TO OTHER TERMINAL AND TIGHTEN.
4. ENSURE BOTH WIRES SECURELY LOOPED UNDER CORD GRIP HOOKS.
5. FIT COVER AND TIGHTEN CORD GRIP NUT.

Cat. No. 492/32HD

