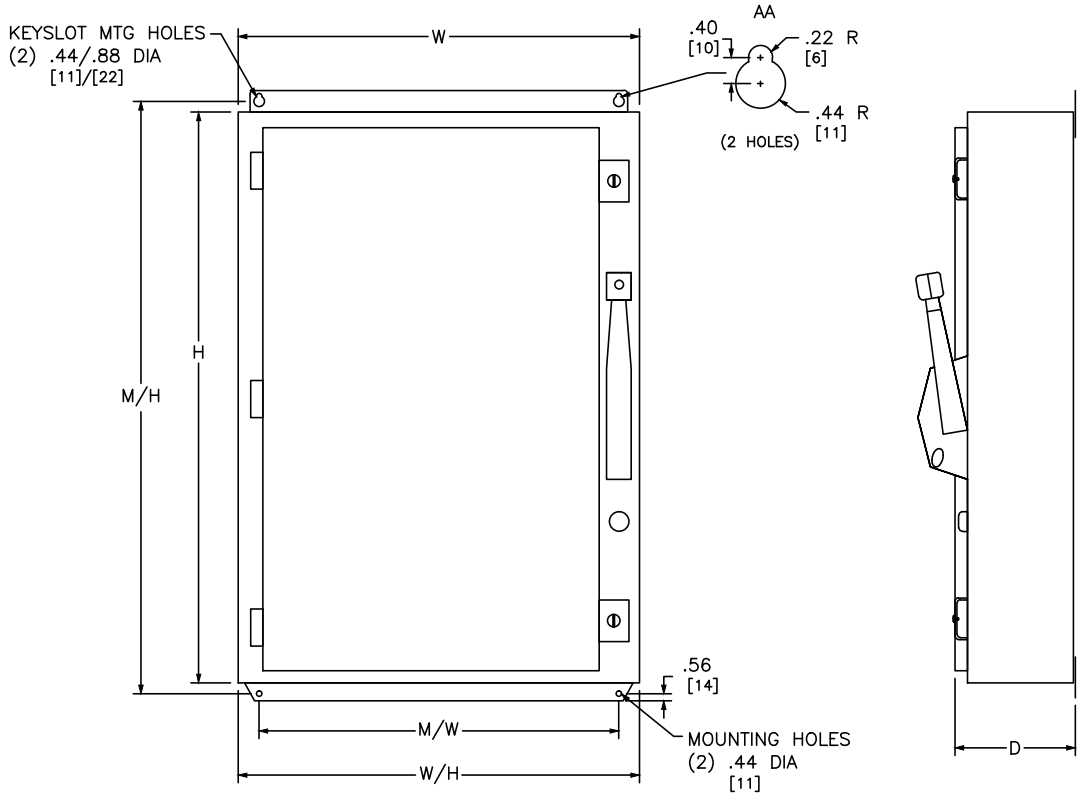

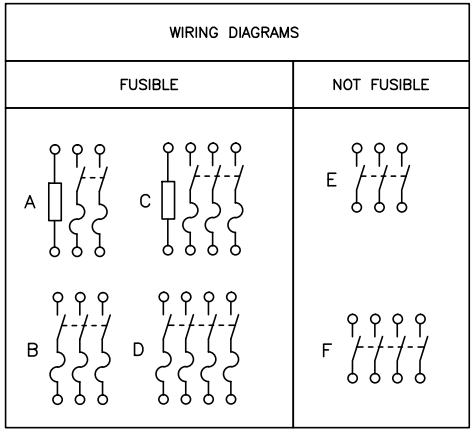

TERMINAL LUG DATA			
AMPERES	MAX WIRE	MIN WIRE	TYPE
400	(1) 600 KCMIL OR (2) 250 KCMIL	(1) #1 AWG OR (2) #1 AWG	CU

DUAL DIMENSIONS: INCHES / MILLIMETERS

CATALOG NUMBER		VOLTAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS										OVERALL DIMENSIONS											
				240VAC		480VAC		600VAC		250 VAC		600 VAC		H		W		D		W/H		M/H		M/W	
				STD	MAX	STD	MAX	STD	MAX	STD	MAX	STD	MAX												
				3Ø	3Ø	3Ø	3Ø	3Ø	3Ø					IN	mm	IN	mm	IN	mm	IN	mm	IN	mm	IN	mm
CH225NAWK	CH225NDS	240VAC, 250VDC	A	–	–	–	–	–	–	–	–	–	–	46.25	1175	26.25	687	9.75	248	26.25	667	48.00	1219	23.00	584
CH325NAWK	CH325NDS	240VDC	C	50	125	–	–	–	–	–	50	–	–	46.25	1175	26.25	687	9.75	248	26.25	667	48.00	1219	23.00	584
CH365AWK	CH365DS	600VAC, 600VDC	B	–	–	100	250	125	350	–	–	–	50	46.25	1175	26.25	687	9.75	248	26.25	667	48.00	1219	23.00	584
CH465AWK■	–	600VAC	D	–	–	–	–	–	–	–	–	–	–	46.25	1175	32.50	826	9.75	248	32.50	826	48.00	1219	29.13	740
CHU365AWK■	CHU365DS■	600VAC, 600VDC	E	–	125	–	250	–	350	–	–	–	50	46.25	1175	26.25	687	9.75	248	26.25	667	48.00	1219	23.00	584
CHU465AWK■	–	600VAC	F	–	–	–	–	–	–	–	–	–	–	46.25	1175	32.50	826	9.75	248	32.50	826	48.00	1219	29.13	740

NOTES:
FINISH – TYPE 3R/12 – GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHALIZED STEEL.
TYPE 4/4X,5 – TYPE 304 STAINLESS STEEL.
NEUTRALS – INSULATED GROUNDABLE
CSA CERTIFIED – FILE #LL–97407
KNOCKOUTS NOT PROVIDED.
■ NOT SUITABLE FOR USE AS SERVICE EQUIPMENT

* WHEN THIS ENCLOSURE IS USED IN AN OUTDOOR APPLICATION, REMOVE DRAIN SCREW IN BOTTOM ENDWALL AND DISCARD.

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
400 AMPERE
ENCLOSURE – TYPE 3R/12 INDUSTRIAL
TYPE 4/4X, 5 STAINLESS STEEL

Schneider Electric

DWG# NO. CSSD–400A–E_EN

MARCH 2014