Prefabricated Busbar trunking systems

Canalis®

In car parks


Application datasheet







Your needs



As a designer or operator of covered, underground or multistorey car parks, you seek to build or rehabilitate safe and pleasant areas in which users can drive easily despite limited space.

You are also obliged to comply with current regulations particularly in terms of ventilation of the building and fire protection, while optimising your installation and operational costs.



Comfort

Safety

- > Lighting is of utmost importance to make the user feel safe. For user comfort, lighting is adapted with various brightness levels depending on the zone in which he is driving (traffic lane, walkway, parking space, etc.).
- > Emergency lighting, signalling, intercom system, radio, videosurveillance all these functions contribute to the comfort and safety of users in a car park.



Time saving

> For greater comfort and to save time, the user is guided by a guidance system to his parking space as soon as he enters the car park.





Service continuity

Multi-storey distribution

- > To provide the necessary power to all storeys:
 - high power (lighting, emergency lighting, elevator, toll system, etc.),
 - low power (public address system, fire detection, camera and intercom, etc.).





Energy management

Optimisation of consumption

> As lighting consumes a lot of power in car parks, energy control calls for the management of lighting by zones, presence detection or according to time slots.



Our Solutions



- > **Safety:** Our prefabricated busbar trunking systems are RoHS-compliant (Restriction Of Hazardous Substances), halogen-free, IP55 and sprinkler test certified. They are equipped if necessary with fire barriers.
- > Clarity / aesthetics: Our prefabricated busbar trunking systems give your installation compactness and aestheticism.
- > Reliability and service continuity: Our prefabricated equipment complies with IEC standard IEC 60439-2 and are certified by ASEFA laboratory. Maintenance tasks are carried out without suspending power supply to your operation and are made easy by the plug and play system (light fittings are simply clipped onto their support).

The advantages of a range based on

50 years of experience

- > Canalis KBA/KBB performs supply and support functions for the following equipment:
 - · Canalis KBL light fitting for lighting,
 - Vehicle presence signalling LEDs, for the guidance system,
 - Canalis KBA/KBB with T option allows lighting management with the DALI protocol.
- > The KBL light fitting is pre-equipped with a connector and attachments for easy installation and maintenance.
- > Straight sections can be used for a more economical installation, if tap-off outlets are not necessary.
- > Flexible sections are used to avoid obstacles.
- > Low current cables are routed in the Canalis system cable tray.



- > Canalis KS ensures rising main distribution of energy to all storeys, insulated from one another by fire barriers.
 - Use of KS Canalis ensures a competitive installation that will adapt to changing requirements.
 - Elastic electrical contacts do not require any maintenance.



> Canalis KBA offers a high degree of flexibility in the production of various lighting zones, which can be controlled independently phase after phase, for progressive lighting.



A comprehensive offer

The ideal solution for your electrical installations



Canalis is part of a comprehensive offer of products that are perfectly coordinated to meet all medium and low power electrical distribution requirem ents. All of these products have been designed to work together: electrical, mechanical and communication compatibility.

The electrical installation is thus both optimised and has improved performance:

- > better service continuity,
- > increased personnel and equipment safety,
- > guaranteed upgradeability,
- > efficient monitoring and control.

All the advantages in terms of know-how and creativity for achieving optimised, safe, upgradeable and compliant installations are therefore available to you.



Schneider Electric products

Prefabricated busbar trunking systems



Canalis KBA with KBL

Canalis KBA and KBB: trunking system for lighting and low power loads

Nominal current 25 or 40 A.

Degree of protection IP55, halogen-free, RoHS-compliant, sprinkler test certified.

Number of live conductors: 2 to 4 for KBA and 2 to 8 for KBB.

Length of sections: 2 and 3 m.

Straight RAL 2003 sections or with tap-off outlets at regular intervals (0.5 m to 1.5 m).

Flexible sections.

Tap-off connectors: 10 and 16 A.

Maximum distance between fastening points: 3 m for KBA, 5 m for KBB.

Cable trays and fastening accessories for low current.

Control bus.

Canalis KBL industrial light fittings

Power: 2 x 49 W, 2 x 58 W, 2 x 80 W.

Pre-equipped with tap-off connector and fastening system.

Degree of protection IP20 to IP55.

Canalis KS riser to feed low voltage sub-distribution switchboards

Nominal current: 100 to 1000 A.

Degree of protection IP55, halogen-free, RoHS-compliant, sprinkler test certified.

Length of sections: 2 and 2.5 m.

Tap-off outlet on each side at regular intervals (0.5 m to 1 m).

Connectors and tap-off units: 25 to 400 A.


Fire barriers.



Canalis KS riser

Application example

A multi-storey underground car park

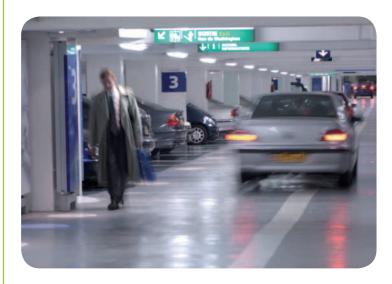


The car park considered

- > 1344 spaces in total.
- > 3 levels with 448 spaces.
- > 100 m x 114 m per storey.

Equipment installed for the 3 levels

- > 3360 m of canalis KBB which provides mechanical support and power supply:
 - 672 dust and damp-proof KBL light fittings (2 x 58 W) on a first circuit for lighting parking spaces and traffic lanes,
 - vehicle presence signalling LEDs, for guiding the user to the parking space, on a second circuit.
- > 972 m of KBA for mechanical support and power supply of 198 dust and damp-proof KBL light fittings (2 x 58 W) for lighting the other traffic lanes.
- > For distribution to different storeys: 9 m of Canalis KS rising main equipped with fire barriers, in the equipment room.

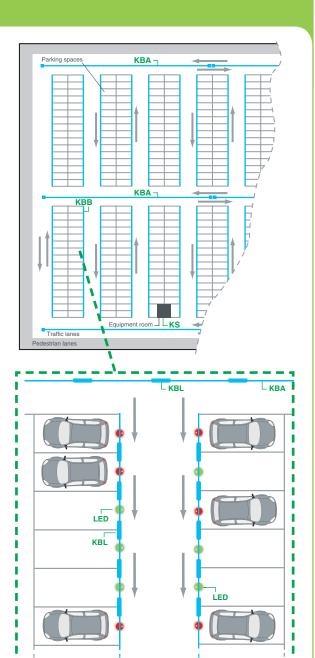

KBB



- Thanks to its modular design, Canalis can be easily adapted to car park infrastructures and provides optimum lighting exactly where it is required.
- Operations in the installation can be carried out in complete safety by maintenance staff, without disrupting the rest of the network.
- By construction, all Canalis prefabricated busbar trunking is halogen-free, releasing no toxic fumes and with no propagation of flames.
- As Canalis is prefabricated, mounting times are significantly reduced when compared to a conventional electrical installation, ensuring the delivery of the worksite on time.



Other applications

- > Livestock production building
- > Logistic centres
- > Greenhouses
- > Cruise ships
- > Garages
- > Hypermarkets
- > Industrial workshops
- > Flooring tile plants
- > Electronic plants
- > Car factories
- > Trade fairs and exhibitions
- > Solution iBusway for Data Center
- > Solution iBusway for Lighting management

Make the most of your energy™

www.schneider-electric.com

Schneider Electric Industries SAS

35, rue Joseph Monier CS 30323 F-92506 Rueil-Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 € www.schneider-electric.com As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.



> Printed on ecological paper

Publishing: Schneider Electric Industries SAS Design - Layout: SEDOC