
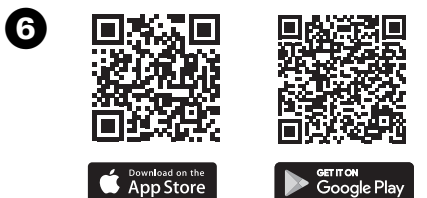
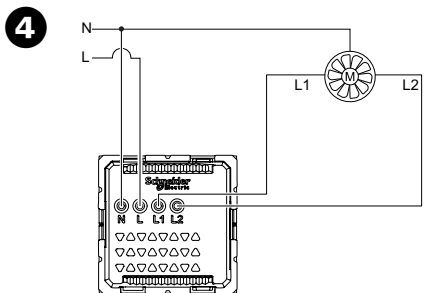
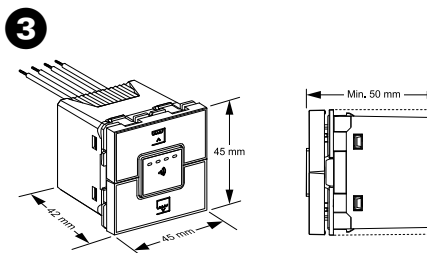
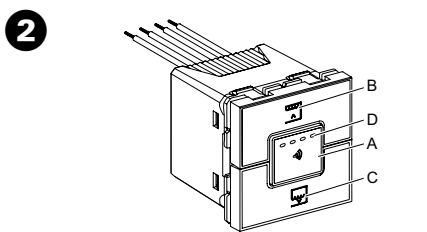


CDWCRTC2M\*\*

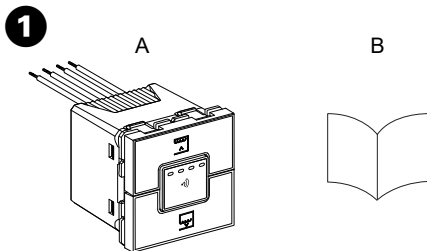

## Connected Curtain Controller 2M

### About this product

The Connected Curtain Controller (hereinafter referred to as **module**) is used to open and close blinds via switches. The module can be operated manually, through the Wiser app or by voice command (Alexa and Google home only).

#### 1 Package contents

- A Connected Curtain Controller 2M
- B Installation guide

#### 2 Operating elements

- A ON/OFF button
- B Open
- C Close
- D LED indicator

#### 3 Dimensions

#### 4 Wiring diagram and electrical connections

### ⚠ ⚠ DANGER

#### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

Safe electrical installation must be carried out only by skilled professionals. Skilled professionals must prove profound knowledge in the following areas:

- Connecting to installation networks.
- Connecting several electrical devices.
- Laying electric cables.
- Safety standards, local wiring rules and regulations.

**Failure to follow these instructions will result in death or serious injury.**

Typical installation using connected curtain controller

- N - Neutral
- L - Line/Phase
- L1 - Open
- L2 - Close

#### Installing the product

### ⚠ ⚠ DANGER

#### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Turn off the power supply before installation or servicing the device.
- Remove the cover and switch frame to access the connected curtain controller.
- Select the loads to be connected on particular terminals.
- Minimum 1 mm<sup>2</sup> wires must be used for connections.
- This device requires a neutral wire to operate.

**Failure to follow these instructions will result in death or serious injury.**

### NOTICE

#### EQUIPMENT DAMAGE

- Do not install in area with high level of moisture and dirt.
- Wear standard personal protection equipment to give protection to the installer.
- Do not pull out the wires from the device.

**Failure to follow these instructions can result in equipment damage.**

#### 5 Reading the full device guide online

Scan the QR code for complete information about the device, including operation, configuration and using the product.

#### 6 Download App

Scan the QR code to download the Wiser App.

### Technical data

Nominal Voltage	230 VAC ±10%, 50Hz
Devices Controlled	Curtains / Blinds
Supported Curtain Types	Roller curtains, Venetian blinds, motorized drapes, blackout curtains, skylights
Maximum Load	150 W Inductive load at 230 V
Intelligent overload protection	6.6 A (Subject to power factor)
Overvoltage protection	> 300 V AC
Undervoltage protection	< 90 V AC
Over temperature protection	upto 110 °C
Sustained surge protection	Yes
Energy Monitoring	Yes
Operating Temperature	-5 °C to +45 °C.
Relative humidity	10 % to 95 %
Wire specification (N - Neutral, L - Line/Phase, L1 - Open, L2 - Close)	1.0 mm <sup>2</sup>
Wi-Fi Range	Indoor range up to 30 m, suitable for typical residential spaces
<b>Compliance</b>	
Radio/RF	ETSI EN 300 328
Product certification	WPC
Connectivity	Wi-Fi®: 2.4 GHz only, IEEE 802.11 b/g/n

### Trademarks

- Wiser™ is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies.
- Wi-Fi® is a registered trademark of Wi-Fi Alliance®.
- Apple® and App Store® are brand names or registered trademarks of Apple Inc.
- Google Play™ Store and Android™ are brand names or registered trademarks of Google Inc. Other brands and registered trademarks are properties of their relevant owners.

### Customer Care

#### Schneider Electric India Pvt Ltd.

2nd Floor, Tower A, Bestech Business Tower, Sec 66, Mohali -160 062, Punjab.

Registered office:

#### Schneider Electric India Pvt Ltd.

C 56, Mayapuri Industrial area Phase-11, New Delhi-110064.

Customer Care: 1800 103 0011

Email: [customercare.in@se.com](mailto:customercare.in@se.com)

Website: [www.se.com/in](http://www.se.com/in)

Schneider electric reserves the right to change the specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to help to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© Schneider Electric 2026

This material is copyright of Schneider Electric. No part of this work may be reproduced by any process without prior written permission of and acknowledgement to Schneider Electric.