

Product End-of-Life Instructions

Product Range: *LCD Key input*

Marketing Model/Name:

5085DL, GF C-Bus LCD Key Input 15-36Vdc, 22mA, Transparent Glass Facia, White C-Touch colour screen, C-Touch spectrum colour touch screen and LCD series are covered by this EoLI.

Purpose:

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Note :

This product family is in the scope of EU directive 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE).




H x L x D in mm: 115 x75 x30

Weight in g: 281.4 grams

Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy : Reuse → Separation for special treatment → Other dismantling → Shredding.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

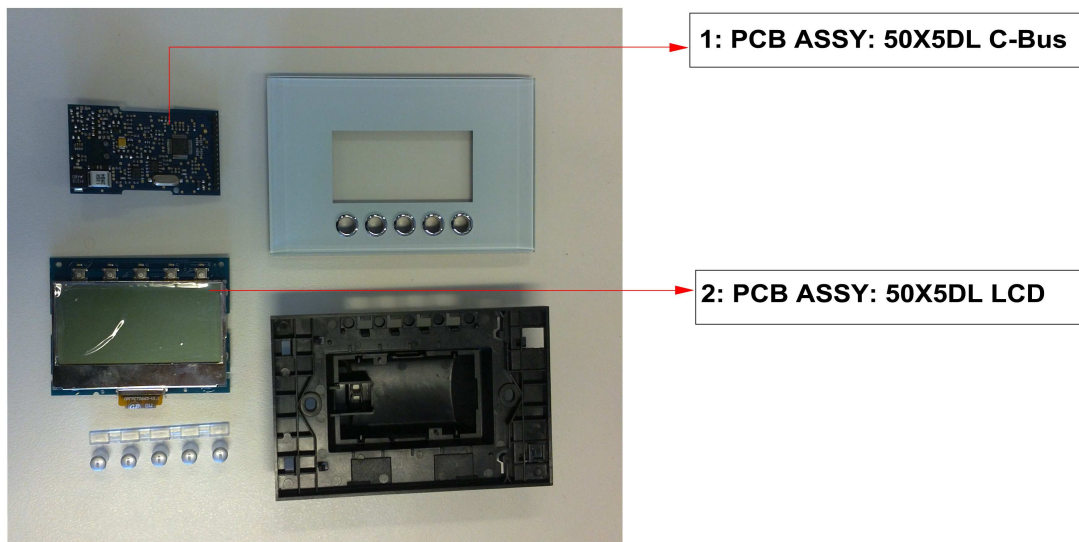

Recommendation	Number on drawing	Components	Weight (g)	Comment
Depollution	1	PCB Assembly :50X5DL C- Bus	10.98 g	
	2	PCB Assembly :50X5DL LCD	30.25 g	

Schneider Electric SA
 43-45, boulevard Franklin Roosevelt
 F-92500 Rueil-Malmaison Cedex (France)
 Tel.: +33 (0) 1 41 29 70 00
 www.schneider-electric.com

The version of the Guide used to create the document: End of Life
 Instruction Drafting Guide of Schneider Electric version V2

ENVEOLI100701EN

Publication date : 07/2012