


# Product End of Life Instructions

## Canalis KTC 1000 to 6300A

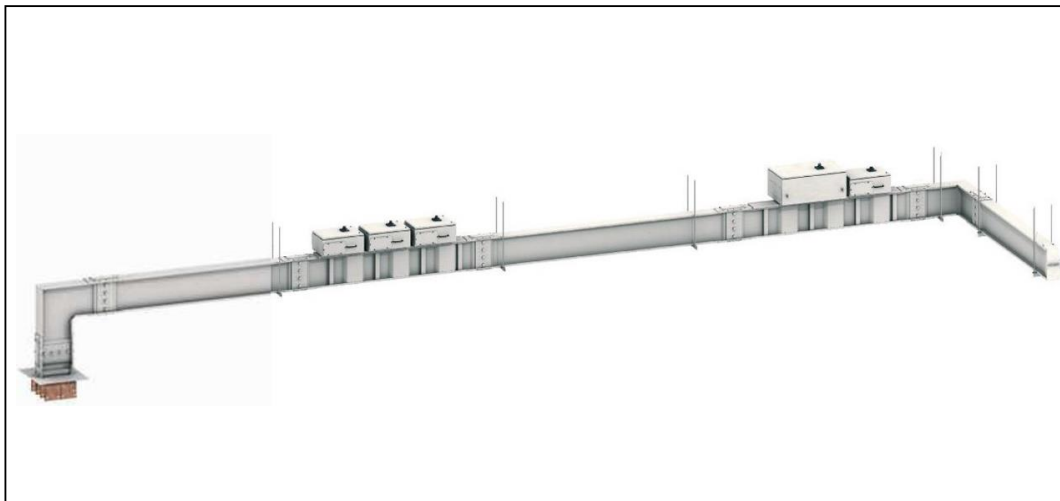

## ⚠ Operations Recommended for the End of Life Treatment


This product contains components made of bromide materials which are recommended to be treated separately during the End of Life operations.

The components of the product that optimize the recycling performances are listed, identified and located hereunder.

There are several steps to process the products at the end of life so as to recover components, materials or energy :

**Reuse --> Depollution --> Dismantling --> Shredding**

## 🔧 End of Life Instructions

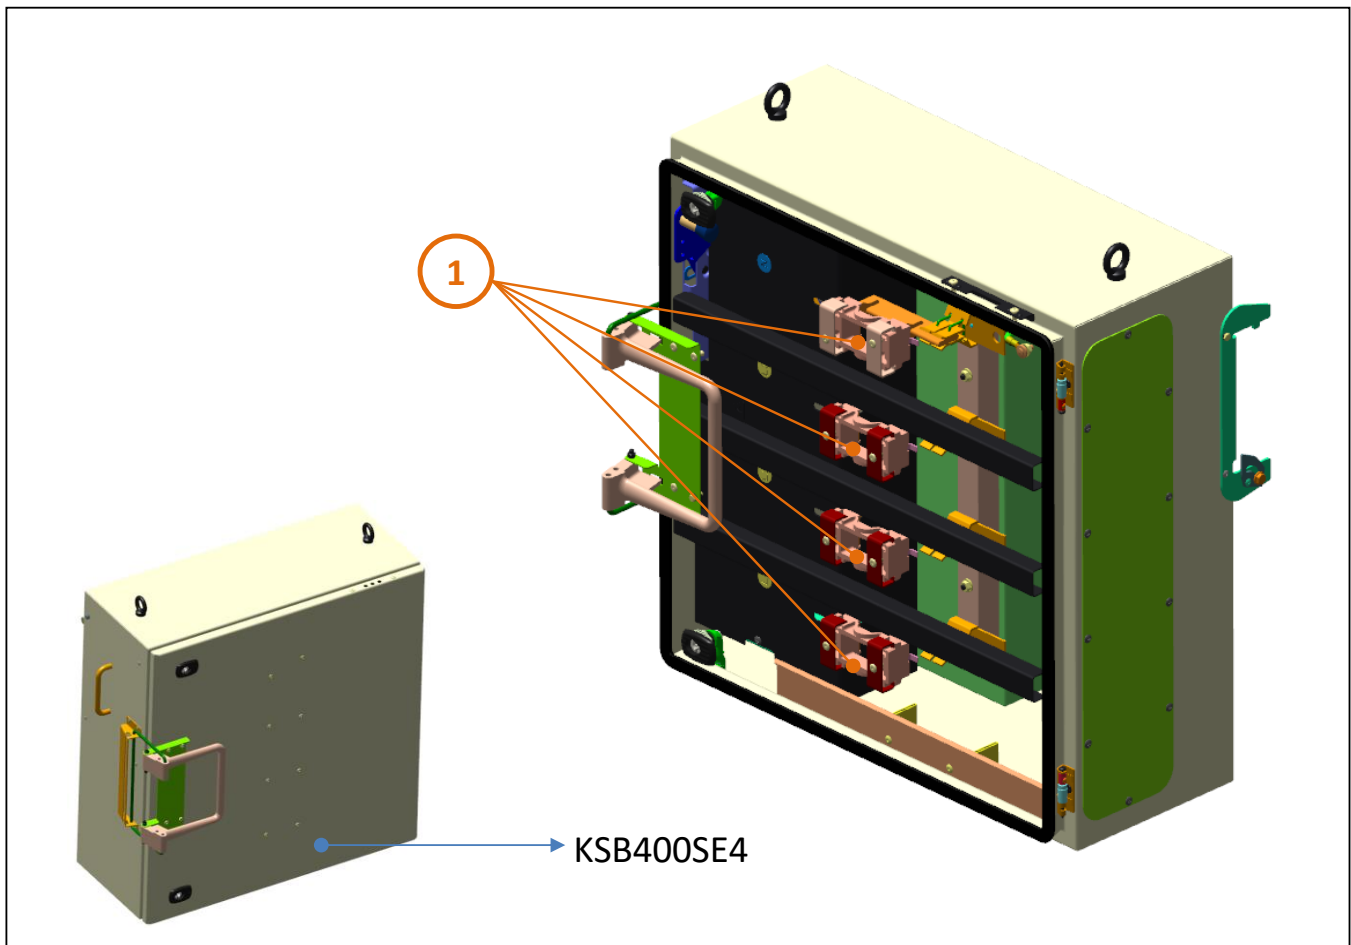

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Plastic parts with brominated flame retardants (PBT GF30 FR(17) GREY)	72.2	KS 250A PIU FUSE HOLDER BASE
To be depolluted		Liquid and pasty substances	As Needed	Glue & Grease
To be depolluted		Cable (low current)	0.1g / mm	905 g used in the Configuration



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	<ul style="list-style-type: none"> <li>• Canalis is part of a comprehensive offering of Schneider Electric products designed to operate together. This concept covers all low and medium voltage electrical distribution components.</li> <li>• The result is an optimised electrical installation with even higher performance through full electrical, mechanical and communication compatibility.</li> <li>• With the Canalis, we get complete type tested distribution solution that complies with IEC61439-6.</li> <li>• It is perfectly suited to traditional applications (factories, warehouses, etc.) and to the distribution of electrical power from transformer to all types of loads in offices, commercial premises, laboratories, etc.</li> </ul>
Product reference	The representative product used for the analysis is the typical product, Canalis KTC 3200 A with its PIU - Plug in Unit KSB400SE4 which contains component made of bromide material which are recommended to be treated separately during the End of Life operations.
Additional similar product references	The End of Life Instruction (EOLI) covers the configuration of Canalis KTC 1000 A to 6300 A
Total representative product mass	5877000 g & PIU - Plug in Unit KSB400SE4 is 28 kg
Representative product dimensions	600 X 600 X 366 (PIU - Plug in Unit)
Date of information release	03/2020



## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	<b>94%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVEOLI1307067\_V2

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

03/2020