

# Product End of Life Instructions

**Safety controller XPS-MC 32 inputs, Modbus and CANopen**

**Preventa configurable safety controllers**





## Potential disassembly risks


### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power from all equipment including connected devices prior to removing any covers or doors, or installing or removing any accessories, hardware, cables, or wires except under the specific conditions specified in the appropriate hardware guide for this equipment.
- Always use a properly rated voltage sensing device to confirm the power is off where and when indicated.
- Replace and secure all covers, accessories, hardware, cables, and wires and confirm that a proper ground connection exists before applying power to the unit.
- Use only the specified voltage when operating this equipment and any associated products.

**Failure to follow these instructions will result in death or serious injury.**



## End of Life Instructions

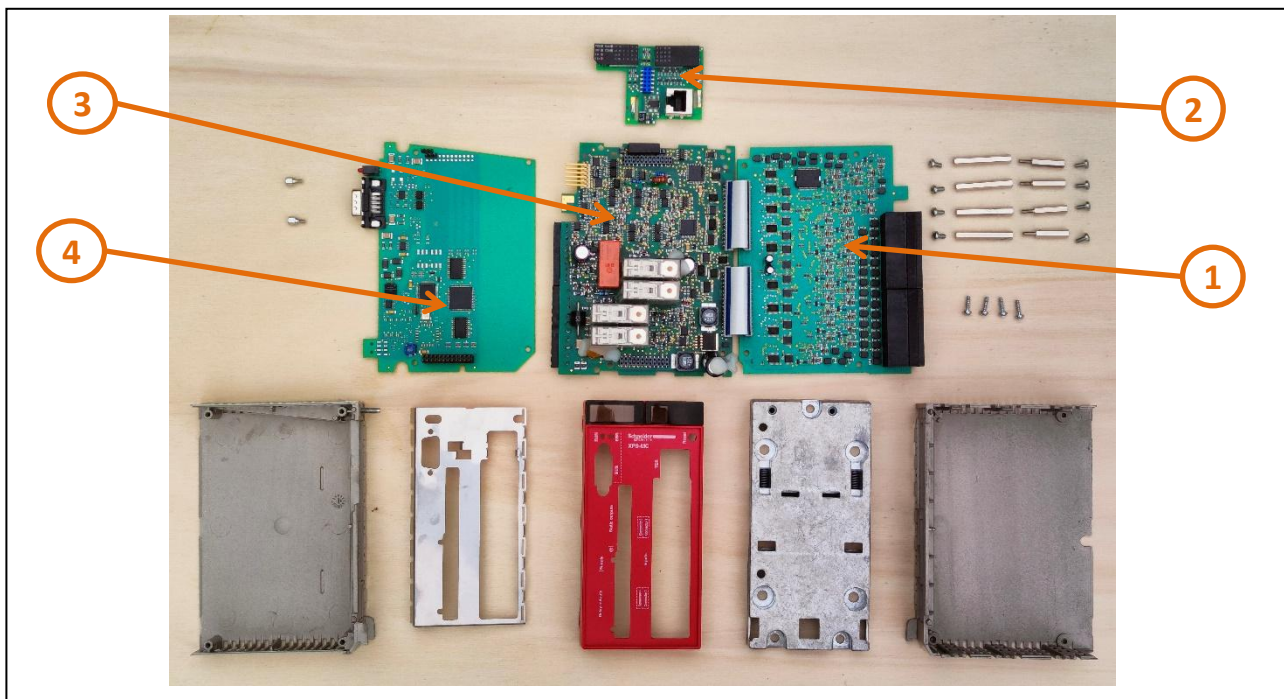

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1; 2; 3 & 4	Electronic Board (Power) > 10cm <sup>2</sup>	422,8	
Other			417,2	

## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	It is a configurable safety controller. It is supplied with 24 V DC. It has 32 safety inputs. This safety controller is designed for monitoring multiple safety functions such as emergency stop, guard monitoring, perimeter guarding, position monitoring, speed monitoring and enabling movement.
Product reference	XPSMC32ZC
Additional similar product references	XPSMC••••
Total representative product mass	840 g
Representative product dimensions	152mm x 140mm x 74mm
Accessories	No
Date of information release	12/02/2026

## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	<b>35%</b> The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €

[www.se.com](http://www.se.com)

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved