


Product End-of-Life Instructions

U.Motion KNX Server Plus

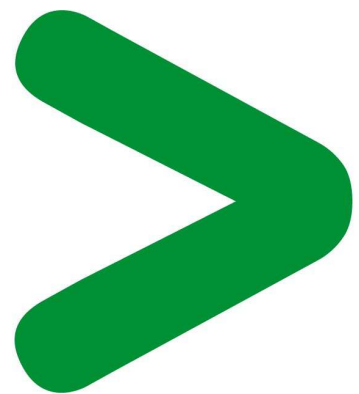

Product overview

The main purpose of the U.Motion KNX Server Plus is visualises, manages and controls KNX building functions across platforms e.g. communication with door stations (IP-SIP), building monitoring with IP cameras or visualising the energy efficiency. The KNX Server Plus is suitable for controlling larger residential buildings, office buildings, schools, etc. It supports communication with a door station and VoIP intercom. The Server Plus acts as a master and provides “client devices” with all the data and functions for visualisation. U.Motion Knx Server Plus is a DIN rail device that supports the functions in a larger system, including door communication. U.Motion is web-based visualisation system for home and building automation based on KNX. The server acts as master and allows the control of the KNX devices through U.motion Client Touches, smartphones, tablet PCs, and any kind of device (PC/MAC) with a working browser. The remote access to the visualisation is possible with a smartphone, tablet PCs or any standard computer with a working browser (PC/MAC).

Product Range: U.Motion KNX

Marketing Model/Name: U.Motion KNX Server Plus, com. ref.: MTN6501-0002

Size: H x L x D in mm = 95 x 161 x 63 mm

Weight in g = 248 g

Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Note:

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE).

Operations recommended for the end of life treatment


There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse → Separation for special treatment → Other dismantling → Shredding

CAUTION: *“risk of electric shock due to electrical components containing energy: capacitors”*

Product End-of-Life Instructions – EoLI

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

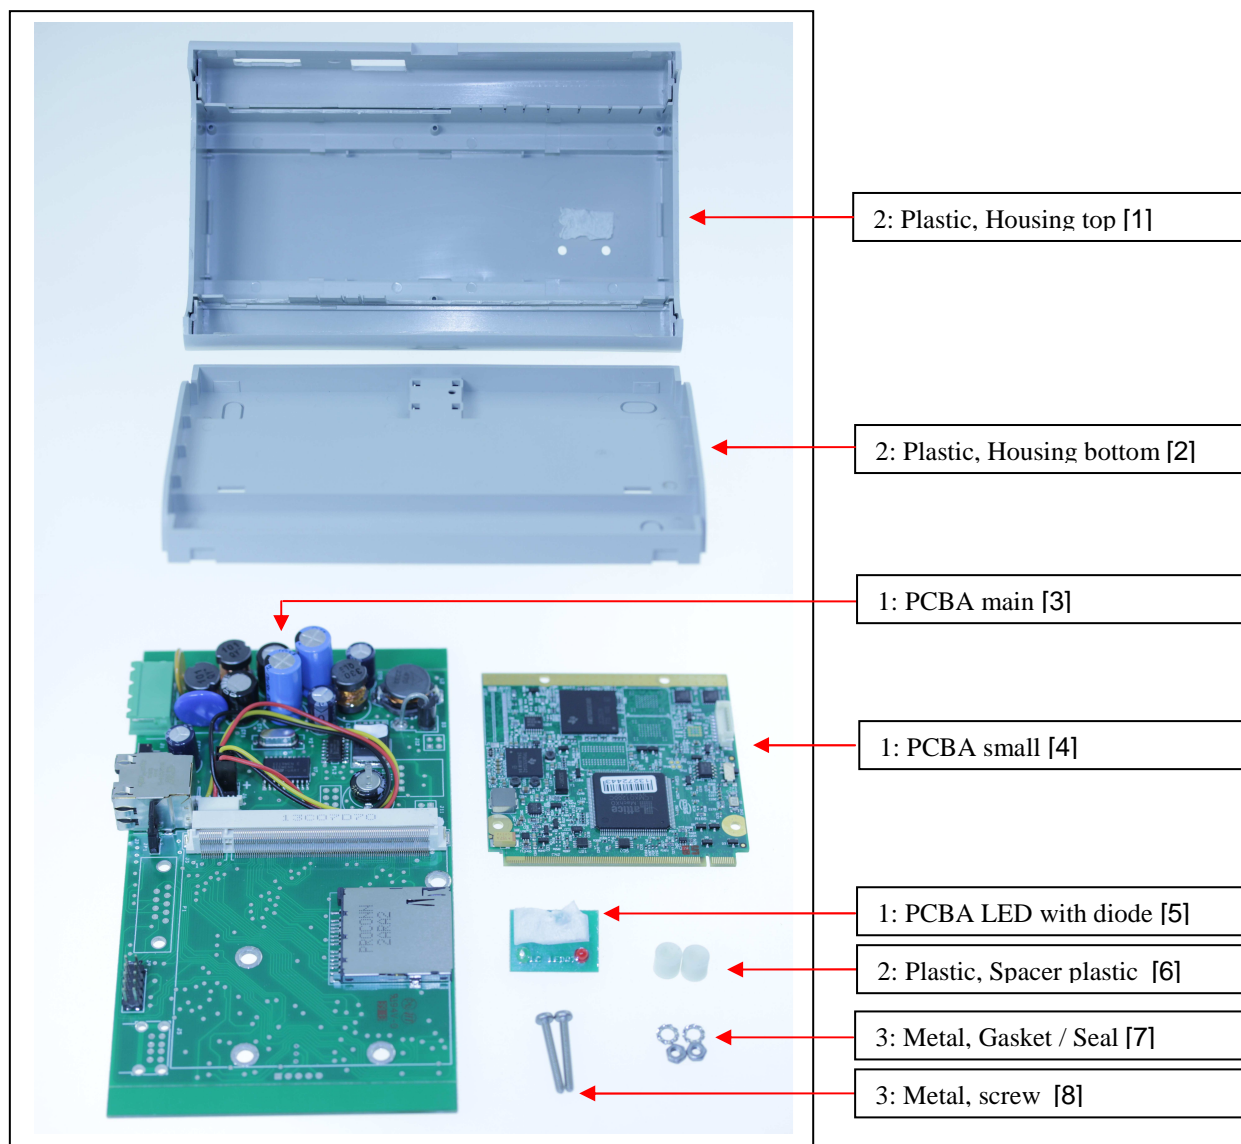

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Depollution	1	PCBA (3x)	130g	[3, 4, 5]
Shredding	2	Plastic (3x)	115g	[1, 2, 6]
Dismantling	3	Metal (2x)	3g	[7, 8]

EoLI achieved with Schneider-Electric TT03 V5 procedure

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com