

Product End of Life Instructions

PowerLogic AccuSine™ PCSP





Potential disassembly risks

The information provided in this document assumes that the product is completely de-energized and uninstalled (refer to the instructions provided in the appropriate product manuals).

Dismantling/disassembling the product may entail hazards caused by, for example, sharp edges, chemical aggression or ejected parts.

⚠ WARNING


HAZARD DUE TO INSUFFICIENT PROTECTION

- Implement all safety measures required by the applicable regulations and by the processes used to dismantle/disassemble and dispose of the product.
- Use all necessary personal protective equipment such as gloves and goggles.

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

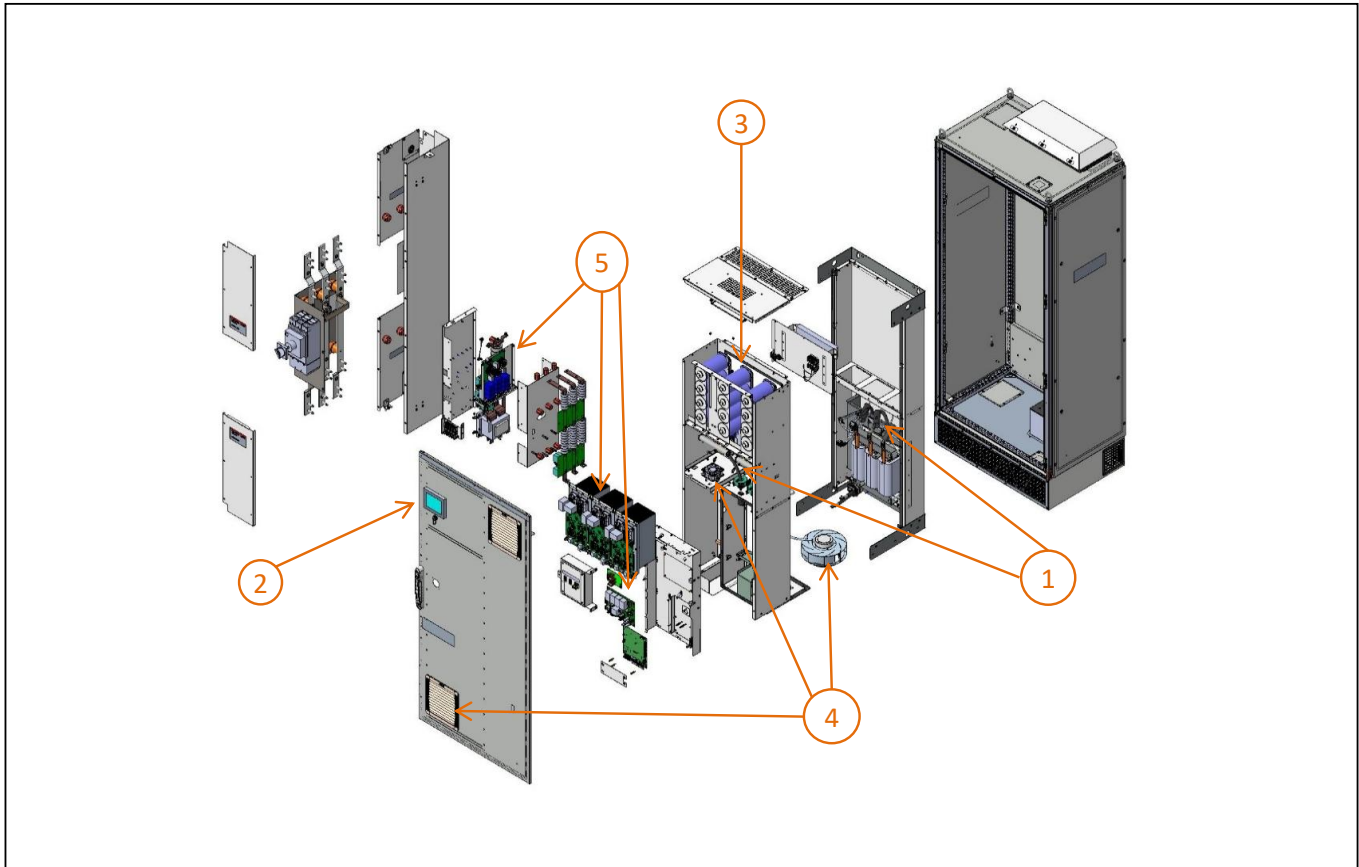

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Cables	13338	
To be depolluted	2	LCD Display	165	
To be depolluted	3	Electrolyte Capacitors	19116	
To be depolluted	4	3 Fans	11478	
To be depolluted	5	PCBAs	16038	

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	PowerLogic AccuSine™ PCSP (Power Conditioning System Plus) is an advanced power electronics device that actively mitigates harmonic distortion in electrical power systems by injecting compensating currents to cancel out unwanted harmonics. It's a dynamic solution that provides real-time power quality correction.
Product reference	PCSP300D5IP54
Total representative product mass	436000 g
Representative product dimensions	H 2100mm x W 900mm x D 600mm
Date of information release	02-2026

Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	73% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVEOLI1507014_V2

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

02-2026