

Product End of Life Instructions

WISER MICRO MODULE SHADES CONTROL






Potential disassembly risks

Risk of fatal injury from electric shock. The output may carry electrical current even when the load is switched off. When working on the device: Always disconnect the device from the supply by means of the fuse in the incoming circuit.



End of Life Instructions

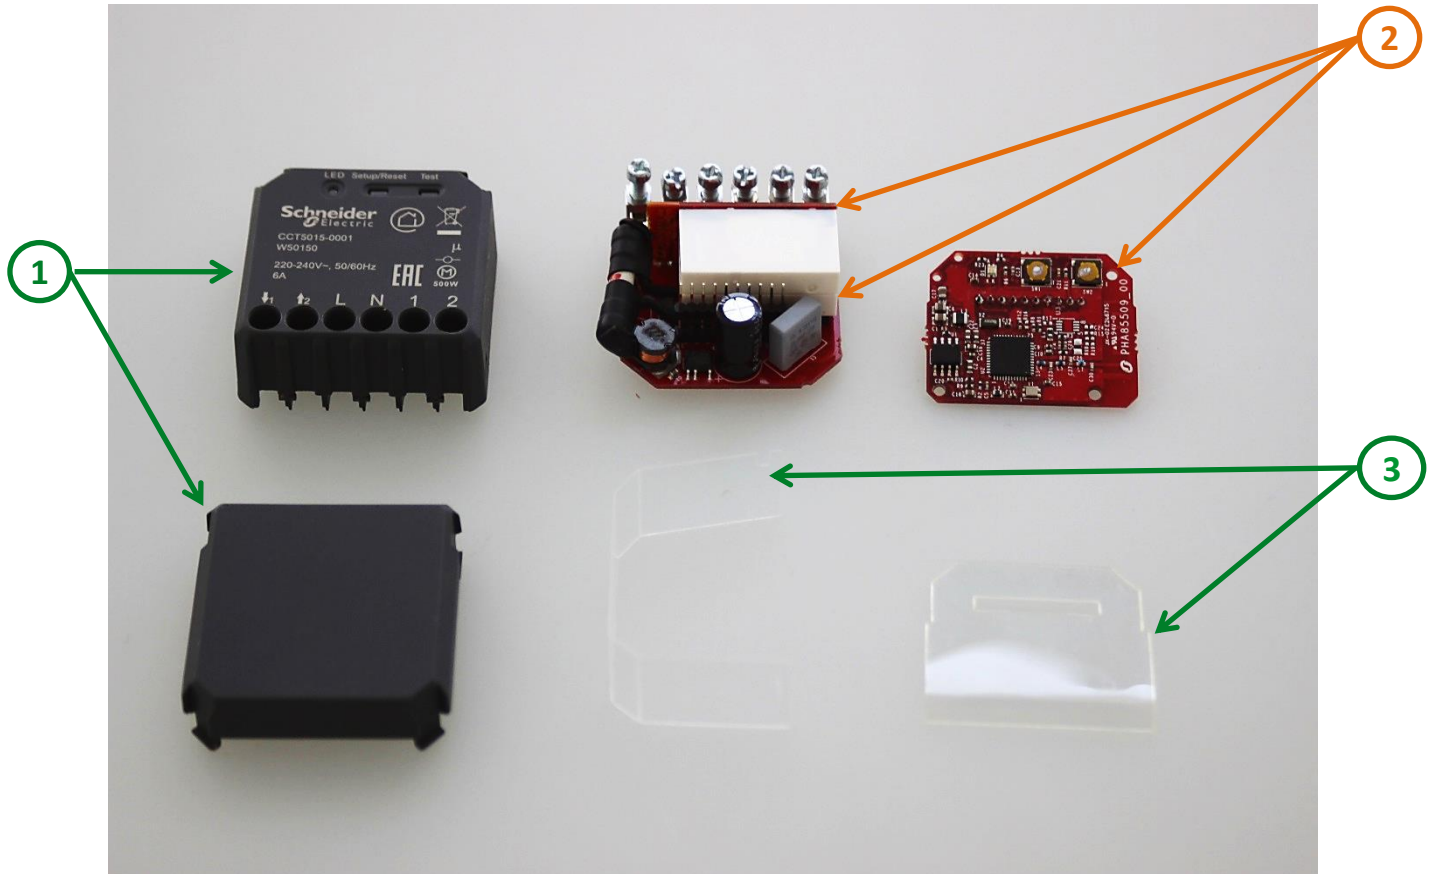

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|-------------------|--------------------------------|---------------|--|
| To be dismantled | 1 | Plastic housing parts | 16,5 | |
| To be depolluted | 2 | Electronic Boards | 33,9 | Cable(0,6g) that connects fuse and PCBA included |
| Other | 3 | Plastic insulating strips/pads | 0,7 | Shreding |



Product description

| | |
|---------------------------------------|--|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | The main function of the Shutter Module is the control shutters or blinds that are specified in the user manual with regards to drive up/down or stop in between a shutter motor. It has RF on board and can be remote controlled by a smart phone or other transmitters such as the Free Locate Switch of the Wisier Home System. |
| Product reference | CCT5015-0001 |
| Additional similar product references | CCT5015-0001 CCTCH5015-01 MEG5015-0001 CLP5015-0001 PDL5015WB |
| Total representative product mass | 51,5 g |
| Representative product dimensions | 22mm x 43mm x 43mm |
| Date of information release | 11/2018 |



Additional information

| | | |
|-------------------------|--|---|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | |
| Recyclability potential | 51% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1706004_V1-EN

Published by Schneider Electric

© 2017 - Schneider Electric – All rights reserved

11/2018