# **Product End of Life Instructions**

#### **EXW-LIGHT IP65 ACT.LMR/500SA/1LFP**








ENVEOLI2011002\_V1 01/2021

### $\Lambda$

### **Potential disassembly risks**

### **End of Life Instructions**

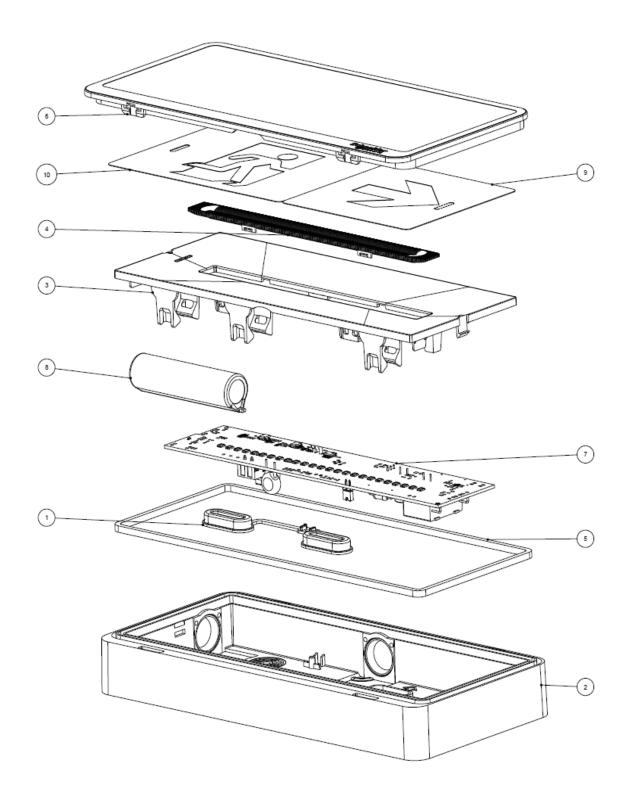

ENVEOLI2011002\_V1 01/2021

#### ENVEOLI2011002\_V1 - End of Life Instructions - EXW-LIGHT IP65 ACT.LMR/500SA/1LFP

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be dismantled	1	PE Polyethylene (Caps for IP65)	2,16	
To be dismantled	2	PC (Lamp body)	135	
To be dismantled	3	PC (Reflective body to fix PCBA)	44,2	
To be dismantled	4	PMMA Polymethyl Methacrylate (Light Diffusor)	8	
To be dismantled	5	ABS Acrylonitrile Butadiene Styrene (GASKET)	0,8	
To be dismantled	6	PC (Transparent screen)	65	
To be depolluted	7	Other battery	50	
To be depolluted	7	Electronic Board (Power) > 10cm <sup>2</sup>	50	
Other	9	PVC (&K.5SCH.SER/I STD SPARK M20 - Arrow side)	2,5	
Other	10	PVC (&K.5SCH.SER/I STD SPARK M20 - Man side)	2,5	



## Product description

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	Schneider Electric	
Product function	Maintained emergency luminaire (EN 60598-2-22) luminaire in which the emergency lighting lamps are energized at all times when normal or emergency lighting is required	
Product reference	OVA44115	
Additional similar product references	OVA44115 OVA44110 OVA44111 OVA44112 OVA44113 OVA44114	
Total representative product mass	450 g	
Representative product dimensions	229mm x 112mm x 32mm	
Accessories	Light Diffuser	
Date of information release	01/2021	

01/2021 ENVEOLI2011002\_V1

## (II) Additional information

Legal information	and Electing legislation facilities.	nis product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the gislation of the country. This document is intended for use by end of life recyclers or treatment cilities. It provides the basic information to assure an appropriate end of life treatment for the omponents and materials of the product.		
In case of special transportation: transportation method	0			
ecyclability potential 65%		Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).		

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2011002\_V1

Published by Schneider Electric

© 2019 - Schneider Electric - All rights reserved

01/2021

ENVEOLI2011002\_V1 01/2021