

Product End of Life Instructions

Galaxy VL UPS 200-500kW

200-500 kW 400/480V UPS






Potential disassembly risks

Hazard of electric shock, explosion or arc flash

The UPS contains an internal energy source. Hazardous voltage can be present even when disconnected from the utility/mains supply. Before installing or servicing the UPS system, ensure that the units are OFF and that utility/mains and batteries are disconnected. Wait five minutes before opening the UPS to allow the capacitors to discharge.



End of Life Instructions

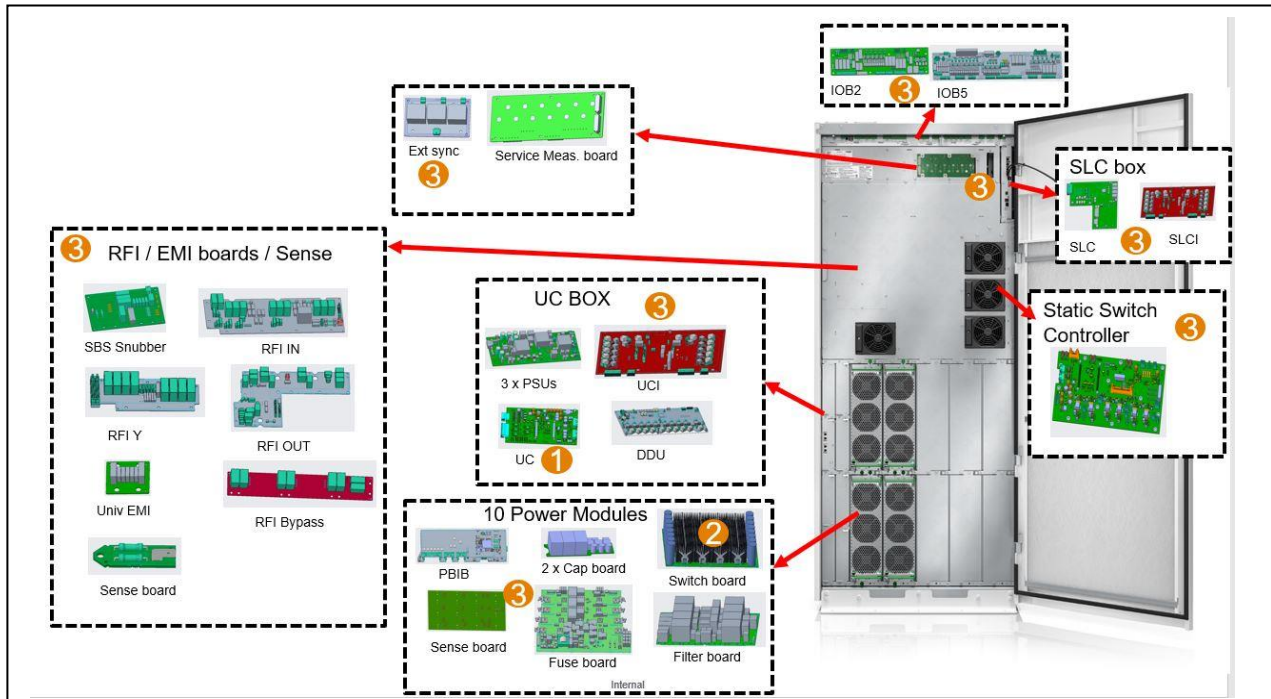

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Batteries (Lithium metal coin batteries)*	3	1 x coin batteries CR 2032
To be depolluted	2	Electrolytic Capacitors*	25600	160 x large electrolytic capacitors
To be depolluted	3	Printed Circuit Board Assemblies (PCBAs)*	252663	53 x PCBs > 10cm ²

*Not all batteries, capacitors and PCBAs are pictured here. Power batteries for the UPS system are in separate battery cabinet(s) not addressed by this document.



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	Galaxy VL is a highly efficient, compact, modular, and scalable 200-500 kW (400 V/480 V) 3-phase uninterruptible power supply (UPS) available worldwide that delivers top performance for medium, large, and edge data centers, as well as critical infrastructure in commercial and industrial facilities.
Product reference	GVL200K500D

Additional similar product references	GVL200K500D
Total representative product mass	562371.2 g
Representative product dimensions	1970 mm x 850 mm x 925 mm
Accessories	No
Date of information release	07/2021



Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	68%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com
ENVEOLI2105015_V1

Published by Schneider Electric
© 2019 - Schneider Electric – All rights reserved

07/2021