



Product End of Life Instructions

Galaxy VXL UPS



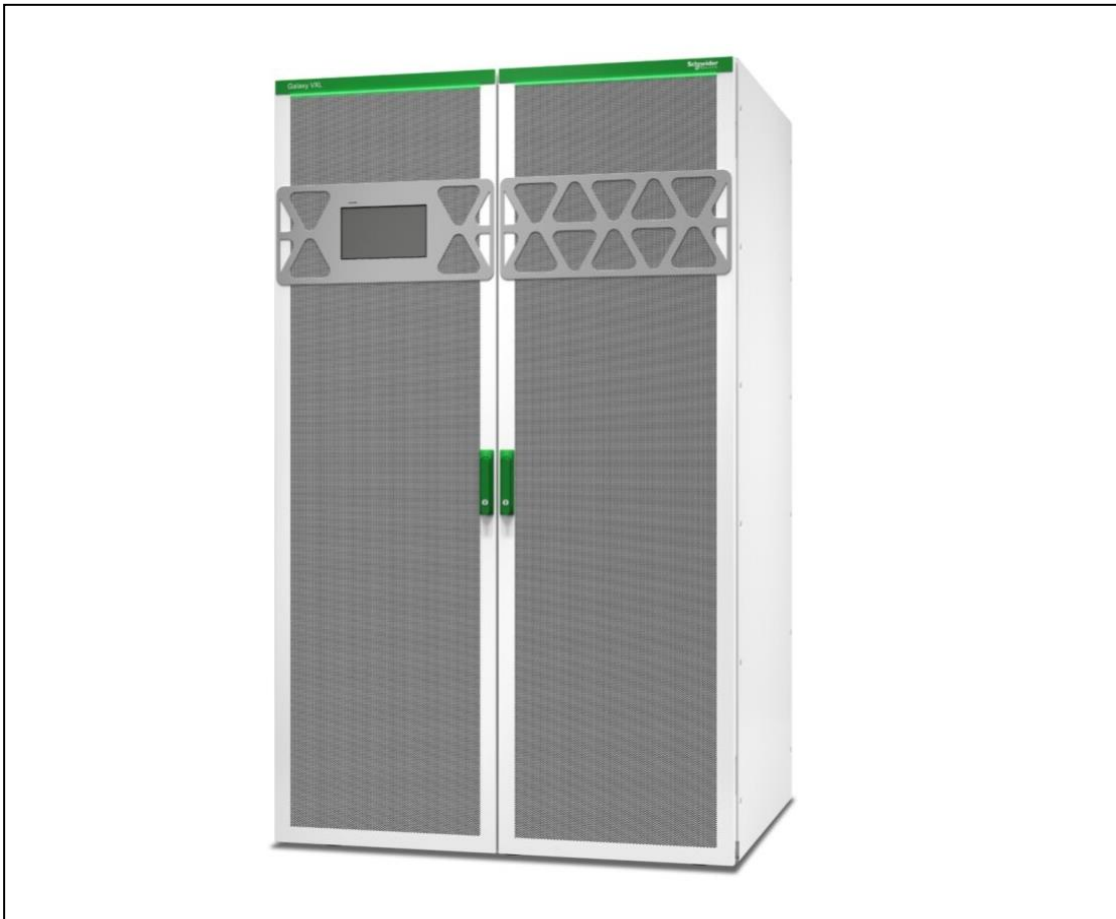

Potential disassembly risks

⚠ WARNING


HAZARD OF ARC FLASH OR FIRE

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

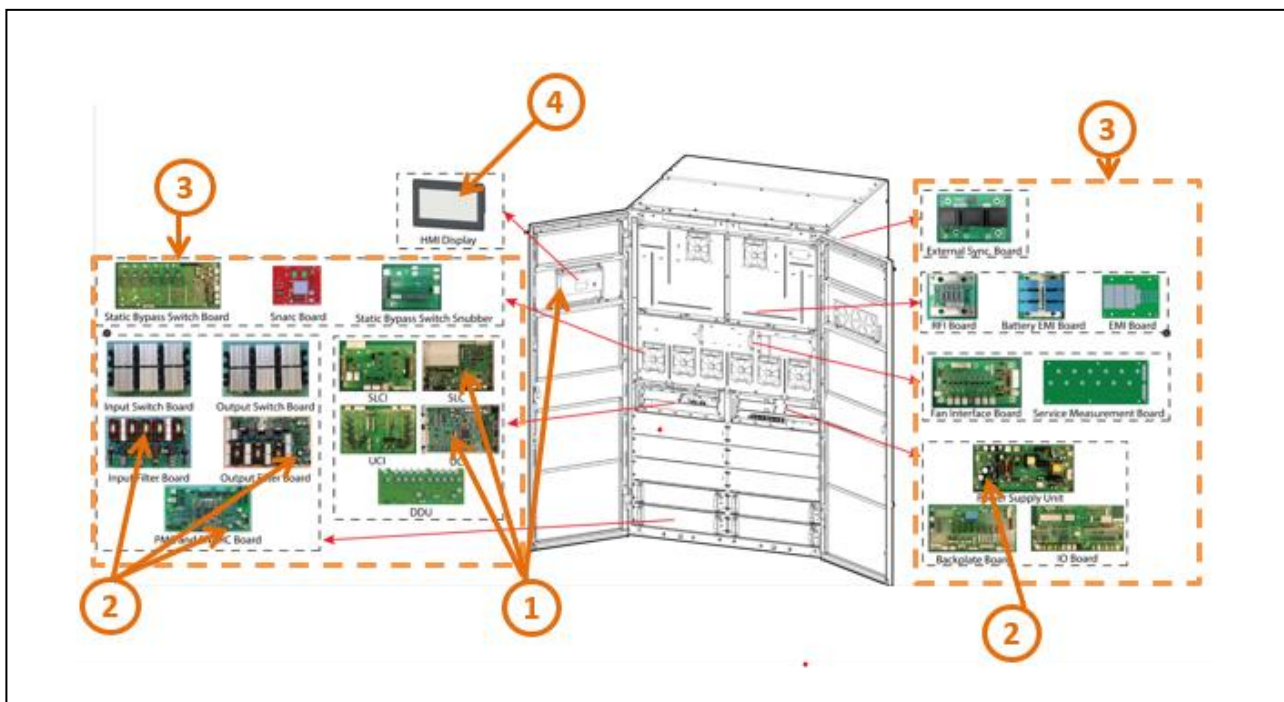

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Batteries	10	3 × Coin batteries
To be depolluted	2	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	12849	223 × Big electrolyte capacitors
To be depolluted	3	Electronic Board (Communication) > 10cm ²	299458	70× PCBA>10cm ²
To be depolluted	4	LCD (surface > 100cm ²) and all those back-lighted with gas discharge lamps	260	1 × LCD>100cm ²

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	Galaxy VXL is a highly efficient, compact, modular, scalable, and redundant 500-1250 kW (400V) 3-phase UPS with Live Swap. Available in all IEC regions, it delivers top performance for colocation, large and extra-large data centers, as well as critical infrastructure in commercial & industrial and cloud & service provider facilities.
Product reference	GVXL1250KHS
Additional similar product references	GVXL500K1250HS GVXL600K600HS GVXL625K1250HS GVXL750K1250HS GVXL875K1250HS GVXL1000K1250HS GVXL1125K1250HS
Total representative product mass	1175000 g
Representative product dimensions	1970mmX1200mmX1000mm
Date of information release	12/4/2024

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	61% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVEOLI2404027_V2

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

12/4/2024