


# Product End of Life Instructions

## SpaceLogic Automation Server V3 Premium



**End of Life Instructions**

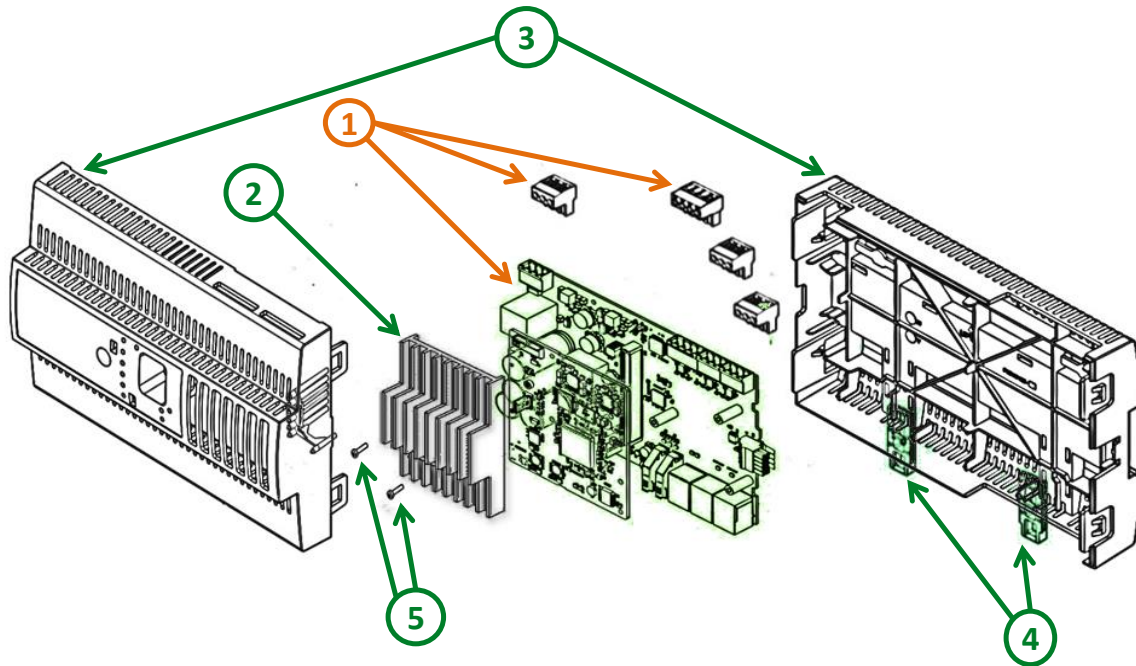

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Printed Circuit Board Assy	279,66 g	Including 4 connectors
To be dismantled	2	Heatsink	107,86 g	Aluminium
To be dismantled	3	Plastic Parts (Cover+Base)	168,81 g	PC/Siloxane
To be dismantled	4	Plastic Parts (Din-rail clips)	4,06 g	PC+ABS
To be dismantled	5	M3 Screws	2,48 g	Steel

**Product description**

<b>Manufacturer identification</b>	Schneider Electric Industries SAS
<b>Brand name</b>	Schneider Electric
<b>Product function</b>	<p>The SpaceLogic AS-P-3 Controller is a powerful device with built-in power supply that can act as a standalone server, control I/O modules and also monitor and manage field bus devices. In a small installation, the embedded Automation Server acts as a stand-alone server, mounted on DIN rail together with its belonging I/O modules. In medium and large installations, functionality is distributed through multiple Automation Servers that communicate over TCP/IP. AS-P-3 is a one-piece automation server and power supply unit without terminal bases, it instead uses pluggable terminal blocks, which are easy to install and remove from the device.</p> <p>(This document describes the different stages of the product, from manufacturing to its end of life. For its end of life optimization, any dismantling or separation of parts required is carried out as mentioned in the EOLI document and in accordance with EU regulations, viz. WEEE)</p>
<b>Product reference</b>	SXWASP3XX10001
<b>Additional similar product references</b>	SXWASPL3X10001
<b>Total representative product mass</b>	590 g
<b>Representative product dimensions</b>	114 x180 x 64
<b>Date of information release</b>	2024-11-15

## Additional information

<b>Legal information</b>	<p>This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.</p>
<b>Recyclability potential</b>	<p><b>19%</b> The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).</p>

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €

[www.se.com](http://www.se.com)

ENVEOLI2411008\_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

2024-11-15