

# Product End of Life Instructions

## Galaxy VS UPS



## Potential disassembly risks


### WARNING

#### HAZARD OF ARC FLASH OR FIRE

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

**Failure to follow these instructions can result in death or serious injury.**

## End of Life Instructions

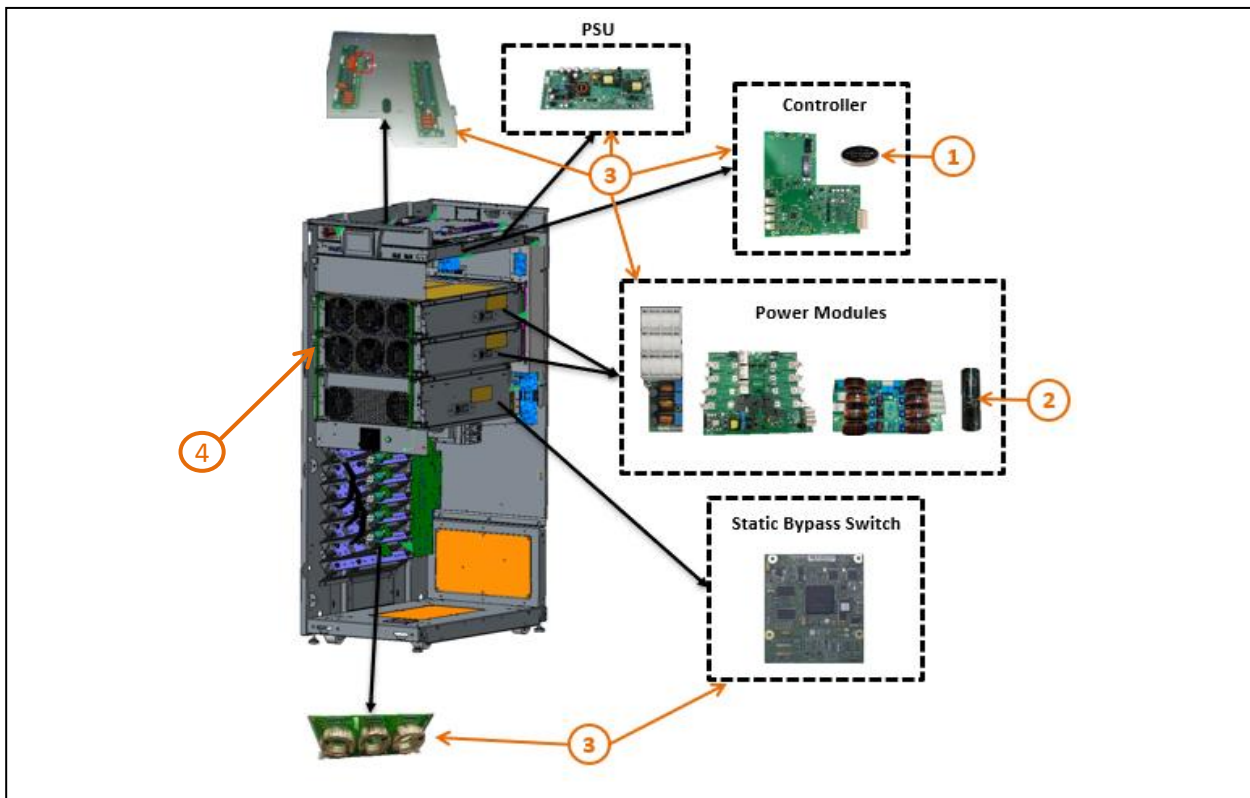

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Capacitors	5.9	2 x coin batteries
To be depolluted	2	Electrolytic Capacitors*	160	Large electrolytic capacitors
To be depolluted	3	Electronic Board (Communication) >10cm <sup>2</sup>	48602	31 x PCBs > 10cm <sup>2</sup>
To be depolluted	4	ABS with brominated flame retardants	14	Plastics with brominated flameretardants

\*Not all batteries, capacitors and PCBAs are pictured here.



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	Galaxy VS is a highly efficient, compact, modular and scalable 10-150kW (208V, 400V, 480V) 3-phase uninterruptible power supply (UPS) available worldwide that delivers top performance for small data centers, as well as critical infrastructure in commercial and industrial facilities.
Product reference	GVSUPS150KHS
Additional similar product references	GVSUPS150KHS GVSUPS20KHS GVSUPS30KHS GVSUPS40KHS GVSUPS50KHS GVSUPS60KHS GVSUPS80KHS GVSUPS100KHS GVSUPS120KHS GVSUPS150KH GVSUPS20KH GVSUPS30KH GVSUPS40KH GVSUPS50KH GVSUPS60KH GVSUPS80KH GVSUPS100KH GVSUPS120KH GVSUPS20KGS GVSUPS30KGS GVSUPS40KGS GVSUPS50KGS GVSUPS60KGS GVSUPS80KGS GVSUPS100KGS GVSUPS120KGS GVSUPS150KGS GVSUPS10KFS GVSUPS15KFS GVSUPS20KFS GVSUPS25KFS GVSUPS30KFS
Total representative product mass	260000 g
Representative product dimensions	1485mm x 521mm x 847mm
Date of information release	26/03/2025



## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	<b>73%</b> The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
 CS 30323

F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €

[www.se.com](http://www.se.com)

ENVEOLI2412030\_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

26/03/2025