

Product End of Life Instructions

SSP3 Solid State Relay





Potential disassembly risks

The information provided in this document assumes that the product is completely de-energized and uninstalled (refer to the instructions provided in the appropriate product manuals).

Dismantling/disassembling the product may entail hazards caused by, for example, sharp edges, chemical aggression or ejected parts.

⚠ WARNING


HAZARD DUE TO INSUFFICIENT PROTECTION

- Implement all safety measures required by the applicable regulations and by the processes used to dismantle/disassemble and dispose of the product.
- Use all necessary personal protective equipment such as gloves and goggles.

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

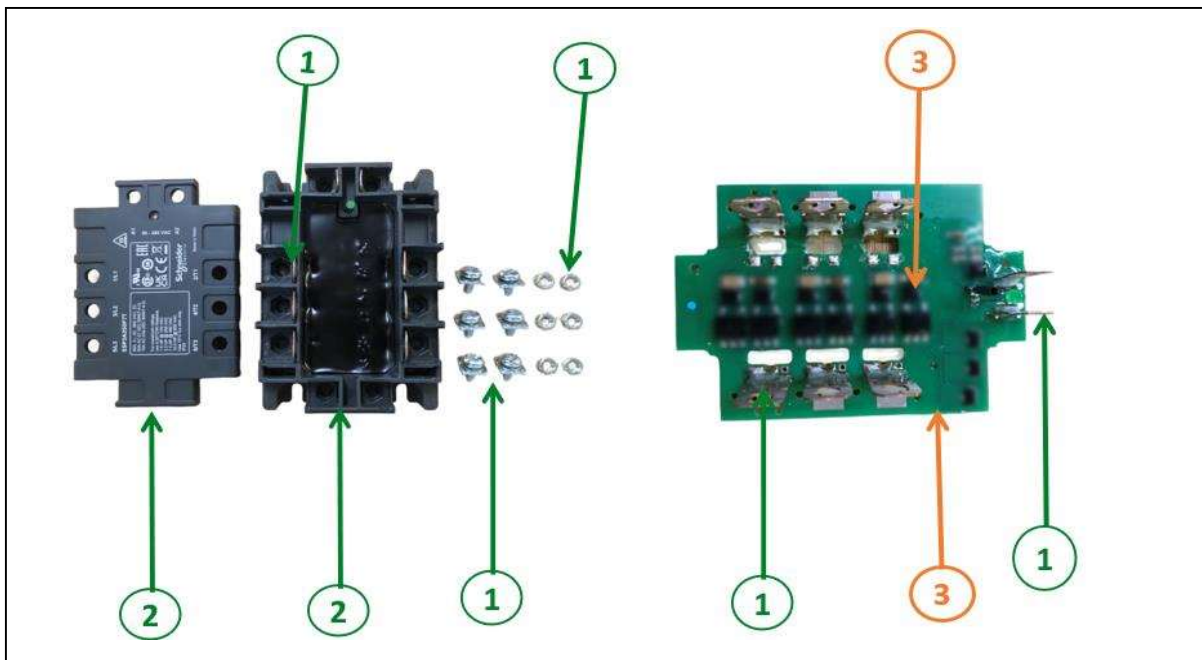

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|-------------------|--|---------------|---------------|
| To be dismantled | 1 | Screws, Nuts, Terminal | 88.5 | Metal Parts |
| To be dismantled | 2 | Case Output and Input | 227.1 | Plastic Parts |
| To be depolluted | 3 | Electronic Board (Power) > 10cm ² | 28.4 | PCBA |

Product description

| | |
|-----------------------------------|--|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | A relay protects electronic devices by switching the current from one path to another one. |
| Product reference | SSP3A250P7T |
| Total representative product mass | 357 g |
| Representative product dimensions | 73.5 mm x 73.5 mm x 41 mm |
| Accessories | No accessories needed. |
| Date of information release | 03-2025 |

Additional information

| | |
|--|--|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. |
| In case of special transportation: transportation method | Special transportation method is not required |
| Recyclability potential | 29% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability). |

Schneider Electric Industries SAS
 Country Customer Care Center
<http://www.se.com/contact>
 35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 928 298 512 €

www.se.com

ENVEOLI2504009_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

03-2025