

Product Environmental Profile

LALH Molded Case Circuit Breaker






General information

Representative product	LA/LH Molded Case Circuit Breaker - LAL36400
Description of the product	The main purpose of the LA/LH Molded Case Circuit Breaker (MCCB) product range is to provide a means to manually open a circuit and to automatically open a circuit under overload or short circuit conditions.
Functional unit	<p>Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 600 Vac and 250 Vdc and rated current 400A. This protection is ensured in accordance with the following parameters:</p> <ul style="list-style-type: none"> - Number of poles Np : 3 Poles - Rated breaking capacity Icn : 22KA - Trip unit type: Thermal-magnetic - Tripping curve Cd : long time, short time and instantaneous protections



Constituent materials

Reference product mass 7503 g including the product, its packaging and additional elements and accessories

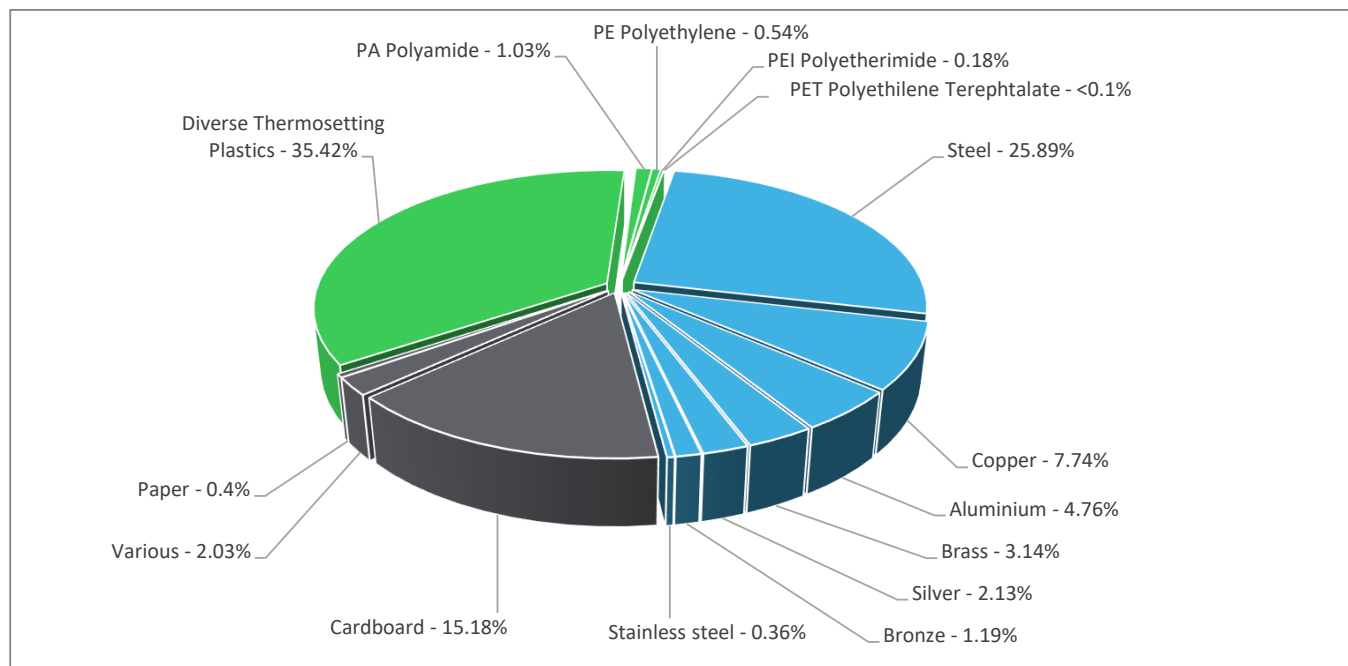

Plastics	37.2%
Metals	45.2%
Others	17.6%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The LA/LH Molded Case Circuit Breaker presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 1276.6 g, consisting of Cardboard (93.5%), PE film (3.33%), Paper (2.4%), Various (0.7%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 48% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	20 years			
Product category	Circuit-breakers			
Installation elements	No special components needed			
Use scenario	Product dissipation is 32 W at 100% Load rate and 8 W at load rate / rated current (In): 50 % of In & percentage of utilization time: 30%			
Geographical representativeness	USA			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Mexico	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US

Compulsory indicators		LALH Molded Case Circuit Breaker - LAL36400					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.09E-01	1.09E-01	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	4.20E-01	1.93E-01	4.42E-03	3.49E-04	2.21E-01	1.99E-03
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	8.56E-02	2.20E-02	1.02E-03	3.39E-03	5.86E-02	5.60E-04
Contribution to global warming	kg CO ₂ eq	3.50E+02	4.94E+01	9.68E-01	1.77E+00	2.96E+02	1.07E+00
Contribution to ozone layer depletion	kg CFC11 eq	6.70E-05	7.72E-06	0*	0*	5.93E-05	4.53E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	7.18E-02	1.97E-02	3.15E-04	4.28E-04	5.12E-02	2.08E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.48E+00	1.21E+00	0*	0*	2.73E-01	9.13E-04
Total Primary Energy	MJ	3.31E+03	7.72E+02	1.37E+01	1.17E+00	2.51E+03	9.68E+00

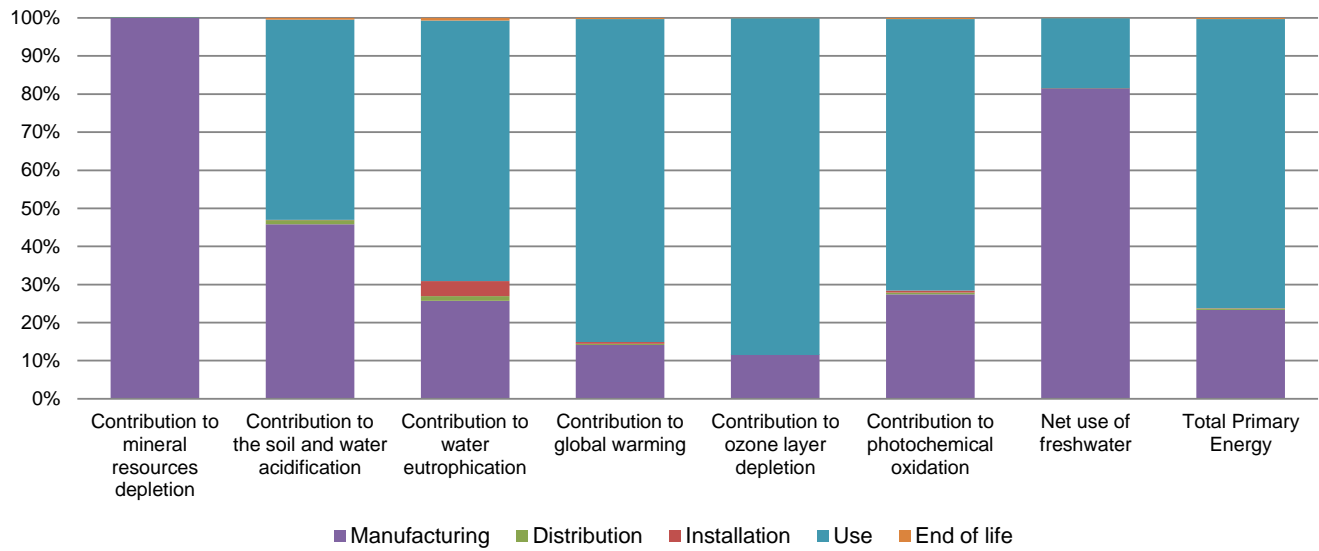

Optional indicators		LAL/LH Molded Case Circuit Breaker - LAL36400					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.66E+03	4.90E+02	1.36E+01	1.07E+00	2.14E+03	7.77E+00
Contribution to air pollution	m³	2.94E+04	1.11E+04	4.12E+01	8.71E+00	1.82E+04	7.01E+01
Contribution to water pollution	m³	2.03E+04	3.76E+03	1.59E+02	1.01E+02	1.62E+04	8.48E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	5.57E-01	5.57E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.92E+02	4.00E+01	0*	0*	2.52E+02	0*
Total use of non-renewable primary energy resources	MJ	3.02E+03	7.33E+02	1.37E+01	1.17E+00	2.26E+03	9.66E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.68E+02	1.60E+01	0*	0*	2.52E+02	0*
Use of renewable primary energy resources used as raw material	MJ	2.39E+01	2.39E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.93E+03	6.46E+02	1.37E+01	1.17E+00	2.26E+03	9.66E+00
Use of non renewable primary energy resources used as raw material	MJ	8.66E+01	8.66E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.76E+02	4.63E+02	0*	0*	3.33E+00	1.00E+01
Non hazardous waste disposed	kg	8.24E+01	6.75E+01	3.44E-02	1.28E+00	1.35E+01	2.96E-02
Radioactive waste disposed	kg	4.40E-02	2.55E-02	2.45E-05	5.16E-06	1.84E-02	4.69E-05
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3.96E+00	7.72E-01	0*	0*	0*	3.19E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.49E-01	0*	0*	0*	0*	1.49E-01
Exported Energy	MJ	3.87E-03	3.64E-04	0*	3.51E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1410004_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric United States
 Country Customer Care Center
<https://www.se.com/us/en/work/support/contacts.jsp>
 +1 8773425173
 North American Division, Boston One Campus
 800 Federal Street
 MA 01810, Andover, USA

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1410004_V2

© 2019 - Schneider Electric – All rights reserved

11/2020