

Product Environmental Profile

2G 13A DP SWITCHED SOCKET WITH LED INDICATOR




General information

Representative product	2G 13A DP SWITCHED SOCKET WITH LED INDICATOR - GGBL3020D
Description of the product	The main purpose of the Lisse 2 gang DP switched socket outlet with an indicator lamp, rated at 13A 230V AC product range is to give a solution for the control of Electricity and Energy consumption Indicator light on switch rocker.
Functional unit	Connect/Disconnect during 20 years the plug of a load consuming 13A under a voltage of 230V while protecting the user from direct contact with live parts and with a protection class IP20.

Constituent materials

Reference product mass 242.06 g including the product, its packaging and additional elements and accessories

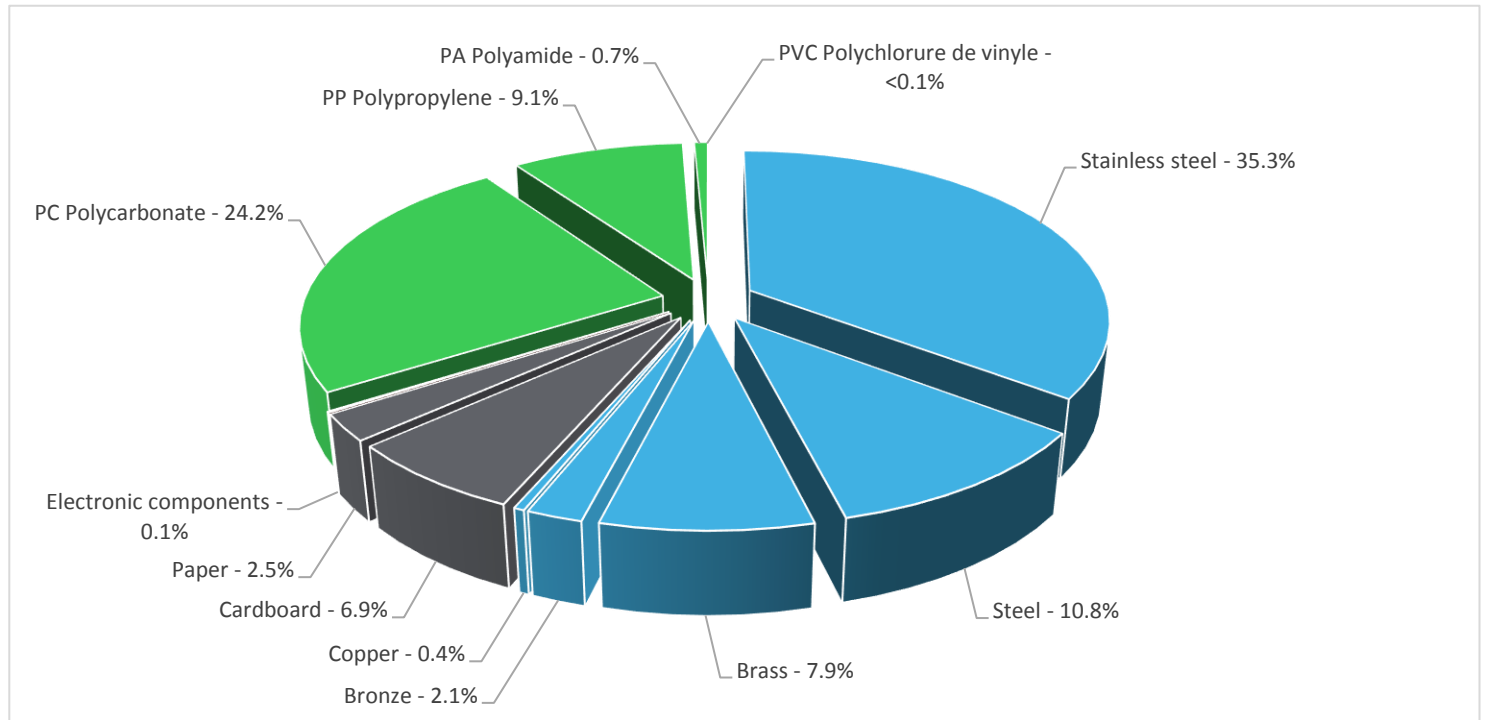

Plastics	34.0%
Metals	56.5%
Others	9.5%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The 2G 13A DP SWITCHED SOCKET WITH LED INDICATOR presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified	
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 22.7 g, consisting of cardboard (73.16%), PVC seal tape (0.01%), paper (26.83%) Product distribution optimised by setting up local distribution centres	
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).	
Use	The product does not require special maintenance operations.	
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 65% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).	




Environmental impacts

Reference life time	20 years		
Product category	Power socket		
Installation elements	No special components needed		
Use scenario	Load rate: 50 % of In Use rate: 50% of the RLT		
Geographical representativeness	Europe		
Technological representativeness	The main purpose of the Lisse 2 gang DP switched socket outlet with an indicator lamp, rated at 13A 230V AC product range is to give a solution for the control of Electricity and Energy consumption Indicator light on switch rocker.		
Energy model used	Manufacturing	Installation	Use
	Energy model used: T&J Electric Shenzhen Limited, China	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27
			End of life
			Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators

2G 13A DP SWITCHED SOCKET WITH LED INDICATOR - GGBL3020D

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.30E-04	1.30E-04	0*	0*	3.03E-08	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.42E-02	1.25E-02	1.43E-04	3.50E-06	1.45E-03	6.53E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4.87E-03	4.68E-03	3.28E-05	4.87E-05	8.78E-05	1.74E-05
Contribution to global warming	kg CO ₂ eq	1.86E+00	1.42E+00	3.12E-02	2.83E-02	3.49E-01	3.05E-02
Contribution to ozone layer depletion	kg CFC11 eq	2.21E-07	1.97E-07	6.33E-11	7.50E-11	2.27E-08	1.44E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	8.60E-04	7.56E-04	1.02E-05	6.67E-06	7.99E-05	6.88E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.32E+00	5.20E-02	0*	0*	1.26E+00	0*
Total Primary Energy	MJ	3.00E+01	2.23E+01	4.42E-01	8.55E-03	6.96E+00	3.21E-01

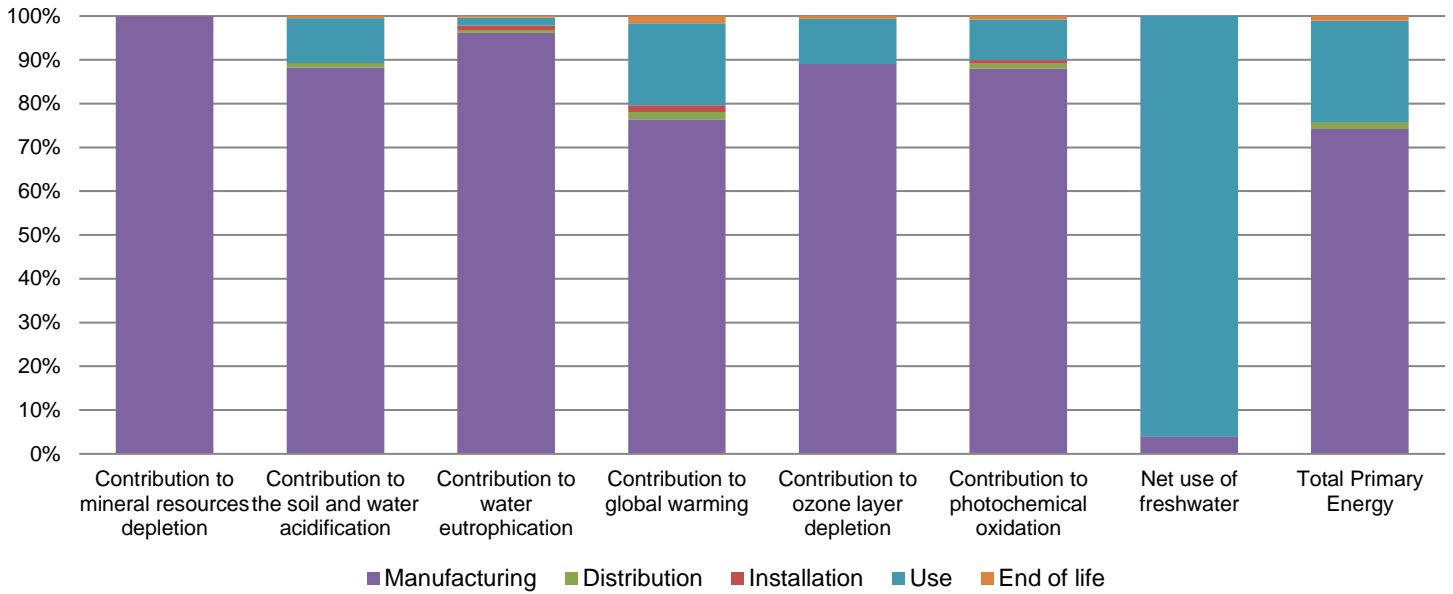

Optional indicators		2G 13A DP SWITCHED SOCKET WITH LED INDICATOR - GGBL3020D					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Contribution to fossil resources depletion	MJ	2.40E+01	1.93E+01	4.39E-01	1.05E-02	3.96E+00	2.93E-01
Contribution to air pollution	m³	3.50E+02	3.32E+02	1.33E+00	2.23E-01	1.50E+01	2.30E+00
Contribution to water pollution	m³	2.29E+02	2.06E+02	5.14E+00	1.27E+00	1.44E+01	2.68E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Use of secondary material	kg	9.64E-03	9.64E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.76E+00	8.77E-01	5.88E-04	1.94E-04	8.86E-01	3.57E-04
Total use of non-renewable primary energy resources	MJ	2.82E+01	2.14E+01	4.41E-01	8.36E-03	6.08E+00	3.20E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.42E+00	5.35E-01	5.88E-04	1.94E-04	8.86E-01	3.57E-04
Use of renewable primary energy resources used as raw material	MJ	3.42E-01	3.42E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.50E+01	1.82E+01	4.41E-01	8.36E-03	6.08E+00	3.20E-01
Use of non renewable primary energy resources used as raw material	MJ	3.23E+00	3.23E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Hazardous waste disposed	kg	9.84E+00	9.54E+00	0*	0*	0*	2.97E-01
Non hazardous waste disposed	kg	2.21E+00	8.81E-01	1.11E-03	2.34E-02	1.30E+00	9.85E-04
Radioactive waste disposed	kg	1.42E-03	5.51E-04	7.90E-07	2.52E-07	8.68E-04	1.54E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Materials for recycling	kg	1.66E-01	2.40E-02	0*	0*	0*	1.42E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.75E-03	4.70E-04	0*	0*	0*	3.28E-03
Exported Energy	MJ	3.49E-03	0*	0*	3.49E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1709004_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	09/2017	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1709004_V1-EN

© 2017 - Schneider Electric – All rights reserved

09/2017

