

# Product Environmental Profile

**13A250V1GFusedConwDPSw&Neon,WD**




## General information

<b>Representative product</b>	13A250V1GFusedConwDPSw&Neon,WD - E8331DFSGN_WD
<b>Description of the product</b>	The main function of the socket is one gate switch with fusing.
<b>Functional unit</b>	To establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current 13A, for the operating voltage 250V for a specified time.

## Constituent materials

**Reference product mass** 144 g including the product, its packaging and additional elements and accessories

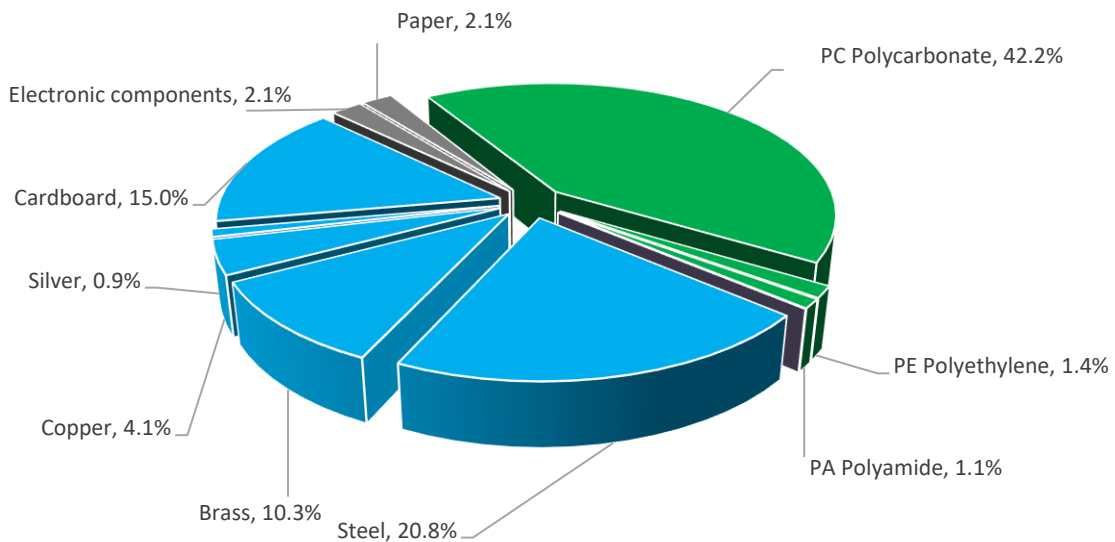

Plastics	44.7%
Metals	36.1%
Others	19.2%

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information

The 13A250V1GFusedConwDPSw&Neon,WD presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 25.6 g, consisting of Paper (7.8%), Cardboard (84.4%), Plastic film (7.8%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Reference E8331DFSGN_WD does not require any installation operations.


<b>Use</b>	The product does not require special maintenance operations.		
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials		
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.		
	Recyclability potential:	<b>41%</b>	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

## Environmental impacts

<b>Reference life time</b>	20 years
<b>Product category</b>	Switches
<b>Installation elements</b>	No special components needed
<b>Use scenario</b>	The product is in active mode 30% of the time with a power use of 0.004W and in standby mode 70% of the time with a power use of 0W, for 20 years
<b>Geographical representativeness</b>	Indian
<b>Technological representativeness</b>	The main function of the socket is one gate switch with fusing.

<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Vietnam	Electricity mix; AC; consumption mix, at consumer; 230V; IN	Electricity mix; AC; consumption mix, at consumer; 230V; IN	Electricity mix; AC; consumption mix, at consumer; 230V; IN

Compulsory indicators		13A250V1GFusedConwDPSw&Neon,WD - E8331DFSGN_WD					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.34E-03	1.34E-03	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	3.82E-03	3.38E-03	8.48E-05	6.10E-06	3.18E-04	3.61E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	6.15E-04	4.99E-04	1.95E-05	2.06E-06	8.40E-05	1.04E-05
Contribution to global warming	kg CO <sub>2</sub> eq	1.59E+00	1.25E+00	1.86E-02	1.48E-03	3.04E-01	2.06E-02
Contribution to ozone layer depletion	kg CFC11 eq	1.12E-07	1.02E-07	3.76E-11	0*	8.46E-09	8.32E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	3.85E-04	3.34E-04	6.05E-06	4.58E-07	4.06E-05	3.74E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2.53E-01	2.53E-01	0*	0*	3.33E-04	0*
Total Primary Energy	MJ	2.33E+01	1.82E+01	2.63E-01	1.90E-02	4.67E+00	1.74E-01

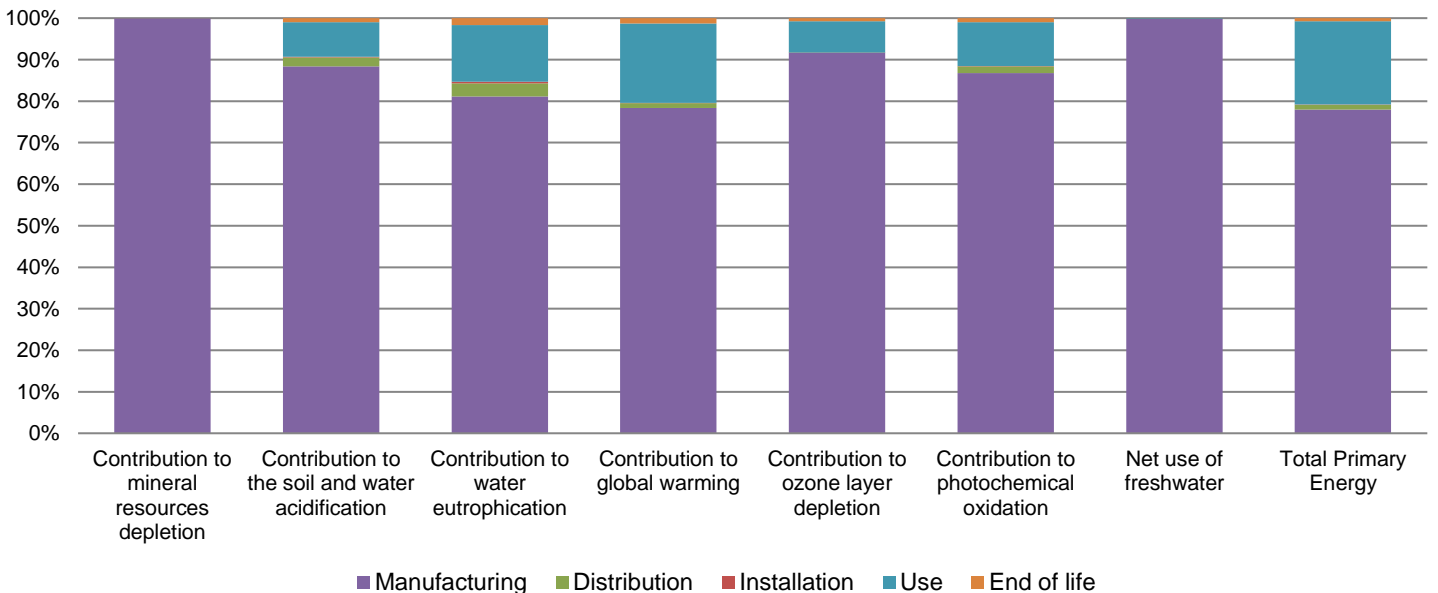

Optional indicators		13A250V1GFusedConwDPSw&Neon,WD - E8331DFSGN_WD					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.49E+01	1.01E+01	2.61E-01	1.86E-02	4.33E+00	1.40E-01
Contribution to air pollution	m <sup>3</sup>	2.94E+02	2.62E+02	7.90E-01	7.24E-02	3.01E+01	1.27E+00
Contribution to water pollution	m <sup>3</sup>	4.70E+02	4.50E+02	3.06E+00	2.18E-01	1.52E+01	1.56E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.39E-02	2.39E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	7.73E-01	5.54E-01	3.50E-04	0*	2.19E-01	1.93E-04
Total use of non-renewable primary energy resources	MJ	2.25E+01	1.76E+01	2.62E-01	1.89E-02	4.45E+00	1.74E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	6.92E-01	4.72E-01	3.50E-04	7.33E-05	2.19E-01	1.93E-04
Use of renewable primary energy resources used as raw material	MJ	8.14E-02	8.14E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.02E+01	1.53E+01	2.62E-01	1.89E-02	4.45E+00	1.74E-01
Use of non renewable primary energy resources used as raw material	MJ	2.27E+00	2.27E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	8.02E+00	7.82E+00	0*	0*	9.09E-03	1.89E-01
Non hazardous waste disposed	kg	8.03E-01	7.49E-01	6.60E-04	1.77E-03	5.05E-02	5.33E-04
Radioactive waste disposed	kg	3.07E-04	3.02E-04	4.70E-07	8.94E-08	3.58E-06	8.47E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	8.57E-02	1.37E-02	0*	2.41E-02	0*	4.80E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.11E-03	0*	0*	0*	0*	3.11E-03
Exported Energy	MJ	7.43E-05	6.72E-06	0*	6.76E-05	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.4, database version 2022-01 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1711001_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2022	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Independent verification of the declaration and data			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric