

Product Environmental Profile

GoPact™ Molded Case Circuit Breaker ETU 2.4





General information

Representative product

GoPact™ Molded Case Circuit Breaker ETU 2.4 - G80H3E630

Description of the product

The GoPact MCCB 800H 3 pole MCCB equipped with an electronic trip unit is designed to provide protection against overloads and short-circuits for electrical distribution systems for operational voltages upto 415 V and available from 500 A- 800 A. It conforms to EN 60947-2 / IEC 60947-2 .

Impulse Withstand Voltage U_{imp} (kV) = 8
 Rated Operational Voltage U_e (V AC) (MAX) @ 50 / 60 Hz = 415
 Rated Insulation Voltage U_i (V AC) = 440
 IP Class = IP40 (Front cutout)

ETU:
 Overload Current Setting I_r : 0.25 x I_n to 1 x I_n
 Short Circuit Setting I_s : 1.5 x I_r to 12 x I_r (500 A); 1.5 x I_r to 10 x I_r (630 A); 1.5 x I_r to 8 x I_r (800 A)
 Instantaneous Current Setting I_i : 1.5 x I_n to 12 x I_n (500 A); 1.5 x I_n to 10 x I_n (630 A); 1.5 x I_n to 8 x I_n (800 A)

Functional unit


Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 415 V and rated current 630 A. This protection is ensured in accordance with the following parameters:
 - Number of poles N_p - 3P
 - Rated breaking capacity I_{cu} - 70 kA at 415 V
 - Tripping curve C_d - Long time and Instantaneous protections



Constituent materials

Reference product mass

10400 g including the product, its packaging

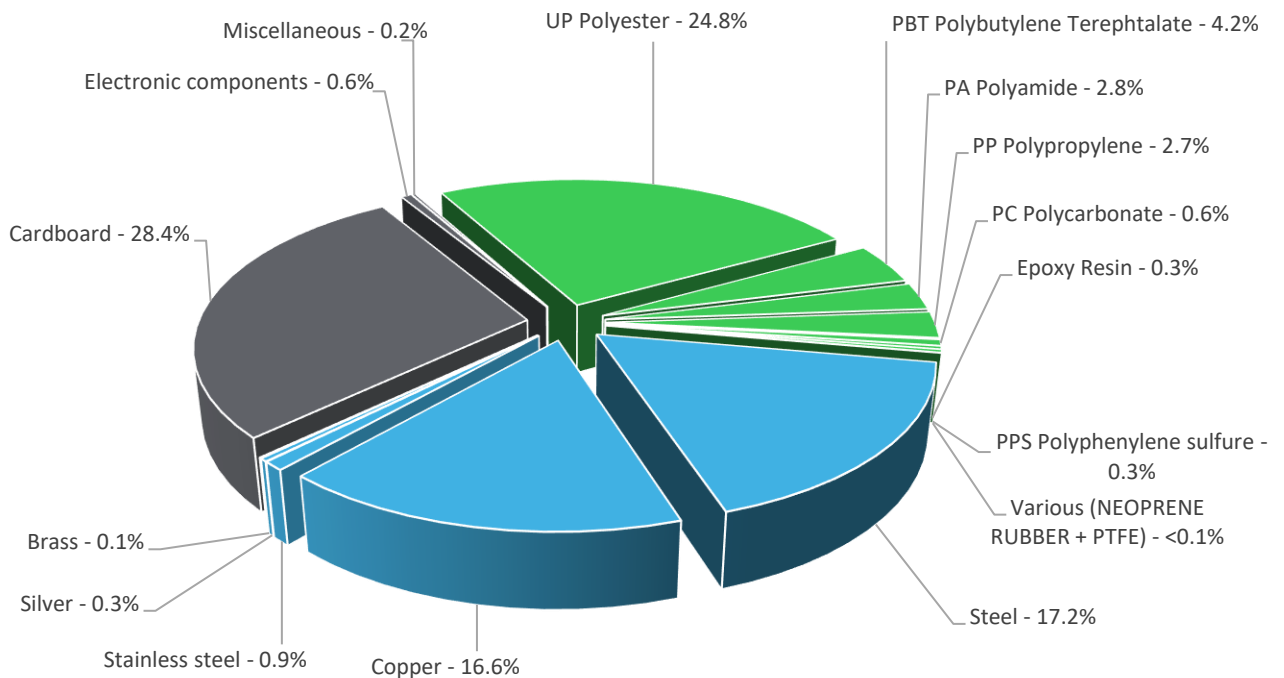

Plastics	35.7%
Metals	35.1%
Others	29.2%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The GoPact™ Molded Case Circuit Breaker ETU 2.4 presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 3054.1 g, consisting of cardboard (99.49%), paper (0.38%), plastic film (0.13%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special components included during installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic card (14 g) and spring charged mechanism that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 46% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	20 years			
Product category	Circuit-breakers			
Installation elements	No special components needed			
Use scenario	Load rate: 50% of In Use time rate: 30% of RLT Assumed service lifetime is 20 years and use scenario is : Power Dissipation in W @ 100% Load rate is 150 W and @ 50% Load rate is 37.5 W			
Geographical representativeness	Europe, Asia, South America			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: INDIA	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27
		Electricity mix; AC; consumption mix, at consumer; 127-230V; ID	Electricity mix; AC; consumption mix, at consumer; 127-230V; ID	Electricity mix; AC; consumption mix, at consumer; 127-230V; ID
Electricity mix AC; Europe consistent; consumption mix, at power plant; US		Electricity mix AC; Europe consistent; consumption mix, at power plant; US	Electricity mix AC; Europe consistent; consumption mix, at power plant; US	

Compulsory indicators		GoPact™ Molded Case Circuit Breaker ETU 2.4 - G80H3E630					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.70E-02	2.70E-02	0*	0*	3.55E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2.77E+00	1.45E-01	4.35E-03	8.20E-04	2.62E+00	2.36E-03
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	5.54E-01	1.31E-01	1.63E-04	8.29E-03	4.14E-01	6.90E-04
Contribution to global warming	kg CO ₂ eq	1.65E+03	4.80E+01	5.75E-01	4.34E+00	1.60E+03	1.40E+00
Contribution to ozone layer depletion	kg CFC11 eq	2.33E-04	1.08E-05	1.40E-07	0*	2.23E-04	5.59E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2.67E-01	1.13E-02	2.05E-04	1.05E-03	2.55E-01	2.43E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.19E+03	6.48E-01	0*	0*	1.19E+03	0*
Total Primary Energy	MJ	2.58E+04	8.23E+02	1.16E+01	2.76E+00	2.50E+04	1.14E+01

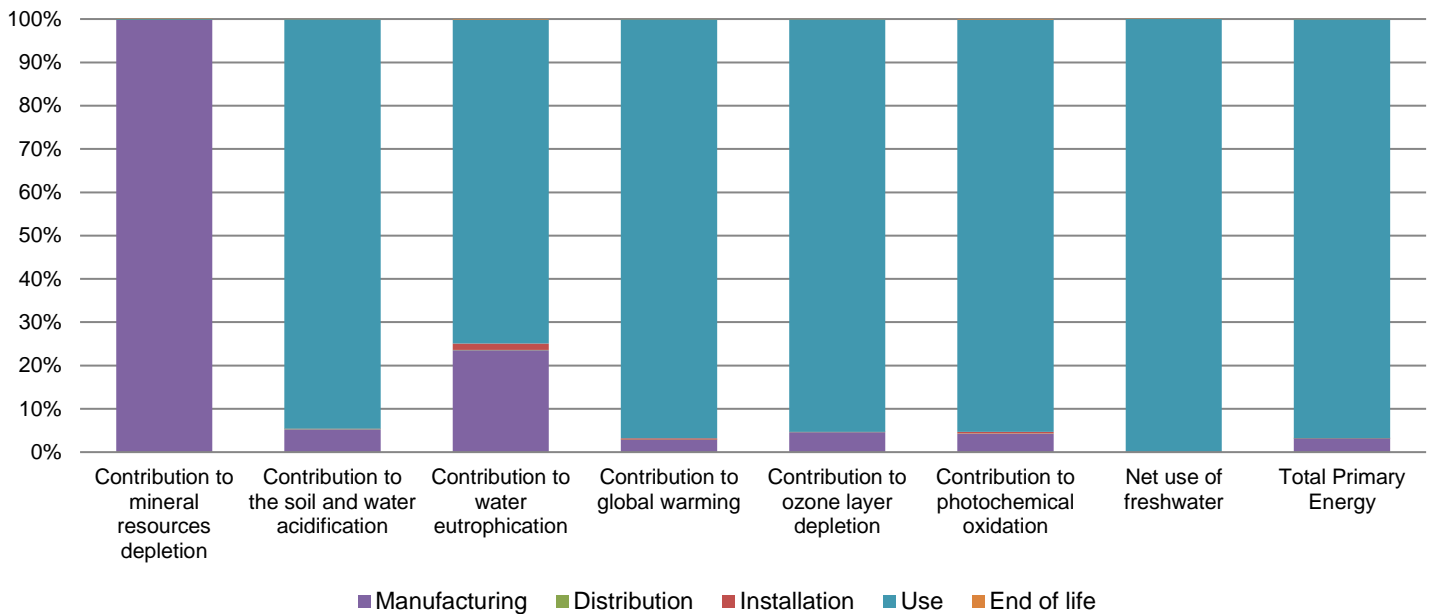

Optional indicators		GoPact™ Molded Case Circuit Breaker ETU 2.4 - G80H3E630					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.04E+04	4.89E+02	5.92E+00	2.53E+00	1.99E+04	9.13E+00
Contribution to air pollution	m ³	1.45E+05	7.98E+03	2.46E+01	2.02E+01	1.36E+05	8.24E+01
Contribution to water pollution	m ³	1.01E+05	4.70E+03	2.41E+01	2.49E+02	9.55E+04	1.03E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.97E+00	1.97E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.22E+03	3.86E+01	8.33E-01	0*	1.18E+03	0*
Total use of non-renewable primary energy resources	MJ	2.46E+04	7.84E+02	1.08E+01	2.76E+00	2.38E+04	1.13E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.16E+03	0*	8.33E-01	0*	1.18E+03	0*
Use of renewable primary energy resources used as raw material	MJ	6.04E+01	6.04E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.46E+04	7.24E+02	1.08E+01	2.76E+00	2.38E+04	1.13E+01
Use of non renewable primary energy resources used as raw material	MJ	6.07E+01	6.07E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*


Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.27E+02	2.68E+02	0*	0*	4.72E+01	1.19E+01
Non hazardous waste disposed	kg	1.48E+03	1.05E+02	2.15E+00	3.06E+00	1.37E+03	0*
Radioactive waste disposed	kg	9.07E-01	1.42E-02	1.75E-03	0*	8.91E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4.30E+00	7.73E-01	0*	0*	0*	3.53E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.21E-01	0*	0*	0*	0*	2.21E-01
Exported Energy	MJ	9.64E-03	9.06E-04	0*	8.74E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.4, database version 2020-12 in compliance with ISO14044.

The use phase and some of manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00833-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH39	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	09/2022	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2016			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

SCHN-00833-V01.01-EN

© 2019 - Schneider Electric – All rights reserved

09/2022