

NOTES:

1. INSTALLATION MUST COMPLY WITH NATIONAL AND LOCAL ELECTRICAL REGULATIONS.
2. PLEASE REFER TO PRODUCT MANUALS FOR DETAILED INFORMATION.
- △ 3. UTILITY SOURCE MUST BE 1PH 220/230/240VAC (1PH+N+G) 50/60Hz OR 3PH 380/400/415VAC(3PH+N+G) 50/60Hz PROVIDED BY OTHERS. NEUTRAL AND GROUND CONTINUITY IS SHOWN ON SHEET 2 OF THIS DRAWING.
- △ 4. DASHED LINES BETWEEN UNITS (- - -) REPRESENT CABLING PROVIDED BY OTHERS.
- △ 5. THE SYMMETRA LX, SKU NUMBER SYA16K16IXR, IS SHOWN IN A NON-REDUNDANT CONFIGURATION, HAVING FOUR (4) POWER MODULES (SYPM4KI) AND NINE (9) BATTERY MODULES (SYBT5), PROVIDING UP TO 16kVA POWER. FURTHER POWER MODULE (1-SYPM4KI) CAN BE PURCHASED SEPARATELY AND INSTALLED IN THE SYSTEM TO PROVIDE AN N+1 REDUNDANT SYSTEM, OFFERING A TOTAL SYSTEM POWER OF UP TO 16kVA WITH REDUNDANCY. THE RUNTIME CAN ALSO BE FURTHER EXTENDED BY THE PURCHASE AND INSTALLATION OF UP TO FOUR (4) ADDITIONAL BATTERY MODULES (SYBT5) IN THE MAIN UPS FRAME.
- △ 6. UP TO THREE (3), OPTIONAL, SYMMETRA LX PDU PANELS CAN BE PURCHASED SEPARATELY AND INSTALLED TO PROVIDE FURTHER LOAD CONNECTIONS.
7. BLOCKS SHOWN WITH DASHED (-----) LINES REPRESENTS AVAILABLE SPACE/SLOTS FOR ADDITIONAL POWER MODULES AND BATTERY UNITS.
8. UP TO SIX (6) ADDITIONAL EXTENSION BATTERY CABINETS CAN BE CONNECTED TO INCREASE THE RUNTIME FURTHER.
- △ 9. A SMALLER OUTPUT BREAKER MAY BE USED TO ALLOW CIRCUIT BREAKER COORDINATION, HOWEVER THIS MAY REDUCE THE MAXIMUM LOAD KVA SUPPORTED.


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider Electric

TITLE: SYMMETRA LX 16kVA TOWER, XR
INPUT: 220/230/240VAC (1φ+N+G) 50/60Hz
OR 380/400/415VAC (3φ+N+G) 50/60Hz
OUTPUT: 220/230/240VAC, 50/60Hz
SYSTEM SINGLE-LINE DIAGRAM

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 2

DWG NO:	SYA16K16IXR-SD	REV.	2
DRAWN:	S CUNHA	13-JAN-11	PROJ.
ENGINEER:	K WHITE	13-JAN-11	ANGLE
APPROVED:	N WHITING	13-JAN-11	N/A

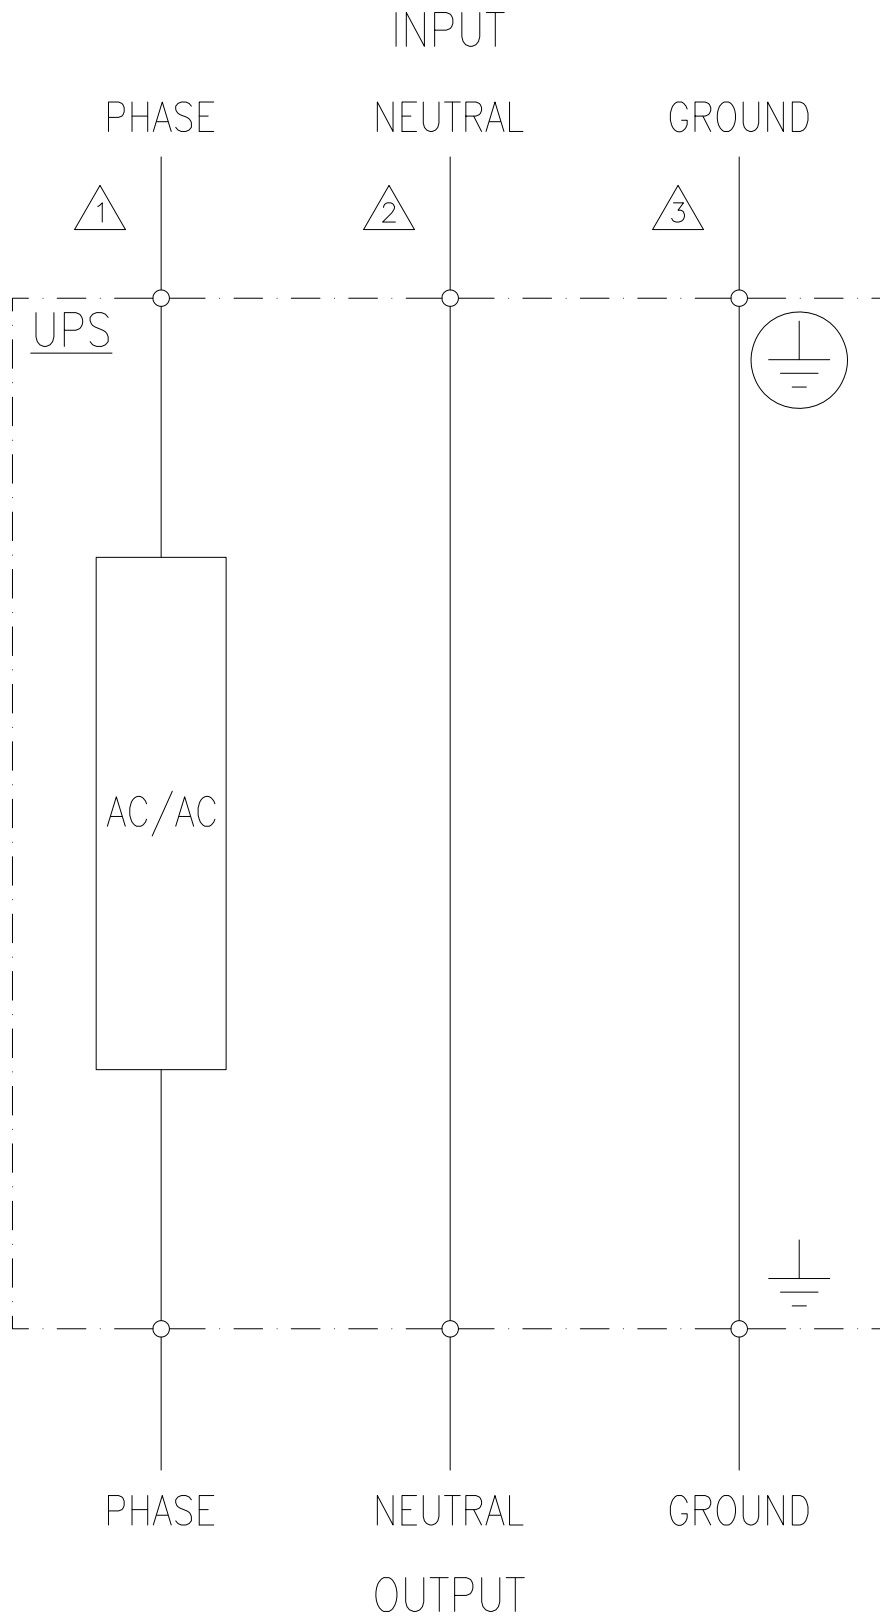

NOTES:

- △ 1. ONE OR MORE PHASE CONNECTIONS DEPENDING ON MODEL.
- △ 2. INPUT AND OUTPUT NEUTRAL ARE PERMANENTLY CONNECTED.
- △ 3. INPUT AND OUTPUT GROUND ARE PERMANENTLY CONNECTED.
- 4. EQUIPMENT IS NOT CONSIDERED A SEPARATELY DERIVED SYSTEM. (REF NEC 2008 ARTICLE 250.20.(D))

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SYMMETRA LX 16kVA TOWER, XR
INPUT: 220/230/240VAC (1φ+N+G) 50/60Hz
OR 380/400/415VAC (3φ+N+G) 50/60Hz
OUTPUT: 220/230/240VAC, 50/60Hz
NEUTRAL AND GROUND CONTINUITY DIAGRAM

DWG NO:	SYA16K16IXR-SD		REV.	0
DRAWN:	S CUNHA	13-JAN-11	PROJ.	ANGLE
ENGINEER:	K WHITE	13-JAN-11	PROJ.	ANGLE
APPROVED:	N WHITING	13-JAN-11	PROJ.	N/A