

Installation Guide - Battery Module SRYLBM

Replace Battery Modules

Actual models may differ in appearance from those depicted in these graphics. Installation process is identical for all models.

WARNING

RISK OF CHEMICAL HAZARD AND EXCESSIVE SMOKE

- Replace the battery module at least every 10 years or at the end of its service life, whichever is earlier.
- Replace the battery module immediately when the UPS indicates battery replacement is necessary.
- Replace battery module with the same type as originally installed in the equipment.

Failure to follow these instructions can result in death or serious injury.







CAUTION











RISK OF DAMAGE TO EQUIPMENT OR PERSONNEL

- The equipment is heavy. Always practice safe lifting techniques adequate for the weight of the equipment.
- Be sure to hold the battery module with both hands while sliding the battery module in and out.
- Adhere to all local and national electrical codes.
- Use the handle on the front face of the battery module to slide the battery modules in and out.
- Do not use the handle to lift or carry the battery module.

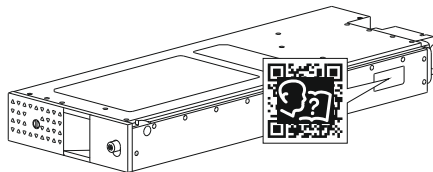
Failure to follow these instructions could result in equipment damage and minor or moderate injury.

NOTE: Skip steps ⑥ to ⑧ below, while installing the battery modules for the first time into UPS/XLBP.

| | Left side battery module | Right side battery module |
|---|---|---|
| ① | Unbox the new replacement battery module.  | |
| ② | Remove the protection cushions.  | |
| ③ | Remove the front bezel of the Uninterruptible Power Supply (UPS) or the External Battery Pack (XLBP) in which the battery module is to be replaced. | |
| ④ | Turn the thumbscrew in counter clockwise direction to unlock the battery module.  |  |
| ⑤ | Turn the battery switch in clockwise direction, using a screwdriver, to switch <i>off</i> the battery.  |  |

| | Left side battery module | Right side battery module |
|----|--|--|
| 6 | <p>Push down and hold the thumbscrew downwards and slide out the battery module.</p>  | <p>Pull up and hold the thumbscrew upwards and slide out the battery module.</p>  |
| 7 | <p>Install the protective cushions on the battery module removed from the UPS or XLBP.</p>  | |
| 8 | <p>Put the battery pack (with cushions) into the packaging box.</p>  | |
| 9 | <p>Slide the replacement battery module into the UPS or XLBP till it gets locked in position.</p>  |  |
| 10 | <p>Press the thumbscrew till it engages and turn it in clockwise direction to lock the battery</p>  |  |
| 11 | <p>Turn the battery switch in counter clockwise direction, using a screwdriver, to switch <i>on</i> the battery.</p>  |  |
| 12 | <p>Re-install the bezel removed in step 3.</p> | |

QR Code Location



Recycle Batteries

Always dispose used batteries properly.



Use the packing from the new APC by Schneider Electric replacement battery module to ship the used battery module.

Refer to the APC by Schneider Electric web site

<http://www.apc.com/recycle>, for battery disposal/recycling facility locations.

Customer support and warranty information are available on the APC web site, www.apc.com.

© 2021 APC by Schneider Electric. APC, the APC logo, Smart-UPS and PowerChute are owned by Schneider Electric Industries S.A.S., or their affiliated companies. All other trademarks are property of their respective owners.

EN 990-91521
04/2021