

# Product Environmental Profile

## 30–100 A General & Heavy Duty F-Series Safety Switches



# Product Environmental Profile–PEP

## Product Overview

The main purpose of the F-series safety switch is to isolate power and provide an effective way to interrupt power in an emergency. Two primary applications for safety switches are as a lockout on sight disconnect and as a circuit isolation device.

F-series General and Heavy Duty safety switches comply with UL® 98 and CSA® No22 on the offer noted below:

- Rated 30, 60 and 100 Amperes
- Fused and non-fused
- Type 1, 3R, 4X and 12
- General Duty suitable for use on 120/240 Vac systems
- Heavy Duty suitable for use on 120, 240, 480 and 600 Vac and 250 and 600 Vdc systems
- Horsepower rated
- Suitable for use as service equipment


The representative product used for the analysis is the HU361RB Safety Switch.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

The environmental analysis was performed in conformity with ISO 14040.

## Constituent Materials

The mass of the F-series Safety Switch ranges from 3.61 lbs. (3.00 kg) to 32 lbs. (14.50 kg) including packaging. It is 8.15 lbs. (3.70 kg) for the HU361RB. The constituent materials are distributed as follows:

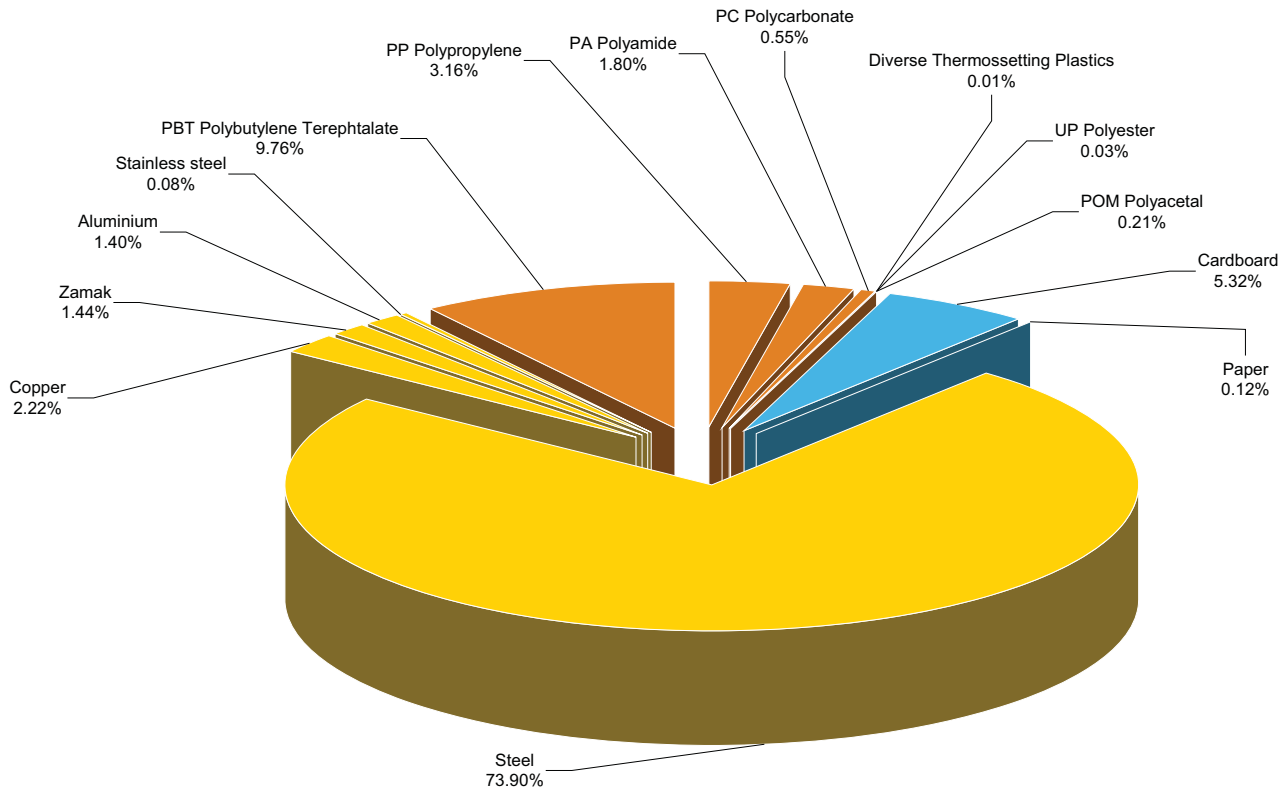

# Product Environmental Profile—PEP

## Substance Assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or only contain in the authorized proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

Details of RoHS and REACH substances information are available on the Schneider-Electric Green Premium Website (<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>)

## Manufacturing

The F-series Safety Switch product range is manufactured at a Schneider Electric production site on which an ISO 14001 certified environmental management system has been established.

## Distribution

The weight and volume of the packaging have been optimized. The F-series Safety Switch packaging weight is 0.44 lbs (0.20 kg) and consists of corrugated cardboard.

The product distribution flows have been optimized by setting up local distribution centers close to the market areas.

## Use

The products of the F-series Safety Switch range do not generate environmental pollution (noise, emissions) requiring special precautionary measures in standard use.

The dissipated power depends on the conditions under which the product is implemented and used. This dissipated power is between 0.16 W and 14.85 W for the F-series Safety Switch product range. It is 0.24W for the referenced HU361RB F-series Safety Switch.

This thermal dissipation represents less than 0.1% of the power which passes through the product.

For recommended maintenance instructions refer to instruction bulletin 40273-829-02, available on the Schneider-Electric website: ([http://www.downloads.schneider-electric.com/sites/oreo/us/document-detail.page?p\\_docId=25657056&p\\_Conf=i#http://www.schneider-electric.us](http://www.downloads.schneider-electric.com/sites/oreo/us/document-detail.page?p_docId=25657056&p_Conf=i#http://www.schneider-electric.us))

## End of Life

At end of life, the products in the F-series Safety Switch range have been optimized to decrease the amount of waste and allow recovery of the product components and materials.

This product range does not need any special end-of-life treatment. According to countries' practices this product can enter the usual end-of-life treatment process.

The potential to recycle the products has been evaluated using the "ECO DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio is: 77%.

As described in the recycling calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

# Product Environmental Profile–PEP

## Environmental Impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I), Use (U), and End of Life (E).

Modeling hypothesis and method:

- The calculation was performed on the HU361RB F-series Safety Switch.
- Product packaging is included.
- Installation components: no special components are included.
- Scenario for the Use phase: this product range is included in the category Energy Passing Product with an assumed service life of 20 years. The Use scenario is: product dissipation is 0.24 W, loading rate is 30% and service uptime of 30%.
- The geographical representative area for the assessment is the United States, and the electrical power model used for calculation is American model.

End of life impacts are based on a worst-case transport distance to the recycling plant 621 miles (1000 km).

### Presentation of the Product Environmental Impacts:

Data calculated for product use for a period of 20 years.

Environmental Indicators	Unit	For HU361RB					
		S = M + D + I + U + E	M	D	I	U	E
Raw Material Depletion	Y-1	1.37 10 <sup>-14</sup>	1.37 10 <sup>-14</sup>	1.26 10 <sup>-17</sup>	0	1.11 10 <sup>-17</sup>	7.51 10 <sup>-18</sup>
Energy Depletion	MJ	2.25 10 <sup>2</sup>	1.98 10 <sup>2</sup>	9.26	0	1.22 10 <sup>1</sup>	5.50
Water Depletion	dm <sup>3</sup>	1.09 10 <sup>2</sup>	1.06 10 <sup>2</sup>	8.79 10 <sup>-1</sup>	0	1.40	5.23 10 <sup>-1</sup>
Global Warming	g ≈ CO <sub>2</sub>	1.53 10 <sup>4</sup>	1.34 10 <sup>4</sup>	7.33 10 <sup>2</sup>	0	8.03 10 <sup>2</sup>	4.36 10 <sup>2</sup>
Ozone Depletion	g ≈ CFC-11	1.78 10 <sup>-3</sup>	9.24 10 <sup>-4</sup>	5.18 10 <sup>-4</sup>	0	2.63 10 <sup>-5</sup>	3.08 10 <sup>-4</sup>
Air Toxicity	m <sup>3</sup>	3.42 10 <sup>6</sup>	3.02 10 <sup>6</sup>	1.38 10 <sup>5</sup>	0	1.78 10 <sup>5</sup>	8.21 10 <sup>4</sup>
Photochemical Ozone Creation	g ≈ C <sub>2</sub> H <sub>4</sub>	5.73	4.56	6.27 10 <sup>-1</sup>	0	1.64 10 <sup>-1</sup>	3.73 10 <sup>-1</sup>
Air Acidification	g ≈ H <sup>+</sup>	2.12	1.82	9.35 10 <sup>-2</sup>	0	1.51 10 <sup>-1</sup>	5.56 10 <sup>-2</sup>
Water Toxicity	dm <sup>3</sup>	3.28 10 <sup>3</sup>	3.05 10 <sup>3</sup>	9.17 10 <sup>1</sup>	0	7.63 10 <sup>-1</sup>	5.45 10 <sup>1</sup>
Water Eutrophication	g≈PO <sub>4</sub>	9.84 10 <sup>-1</sup>	9.63 10 <sup>-1</sup>	1.22 10 <sup>-2</sup>	0	1.85 10 <sup>-3</sup>	7.25 10 <sup>-3</sup>
Hazardous Waste Production	kg	1.15	1.13	2.73 10 <sup>-4</sup>	0	1.76 10 <sup>-2</sup>	1.62 10 <sup>-4</sup>

Life cycle assessment has been performed with the Environmental Impact and Management Explorer (EIME) software version 4.0, and with its database version 11.0.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators.

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range: depending on the impact analysis, the environmental indicators of other products in this family may be proportional extrapolated by the mass of the F-series Safety Switch.

## System Approach

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

# Product Environmental Profile–PEP


## Glossary

<b>Raw Material Depletion (RMD)</b>	This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.
<b>Energy Depletion (ED)</b>	This indicator gives the quantity of energy consumed, whether it be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.
<b>Water Depletion (WD)</b>	This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm <sup>3</sup> .
<b>Global Warming (GW)</b>	The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO <sub>2</sub> .
<b>Ozone Depletion (OD)</b>	This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.
<b>Air Toxicity (AT)</b>	This indicator represents the air toxicity in a human environment. It takes into account the usually accepted concentrations for several gases in the air and the quantity of gas released over the life cycle. The indication given corresponds to the air volume needed to dilute these gases down to acceptable concentrations.
<b>Photochemical Ozone Creation (POC)</b>	This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C <sub>2</sub> H <sub>4</sub> ).
<b>Air Acidification (AA)</b>	The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H <sup>+</sup> .
<b>Water Toxicity (WT)</b>	This indicator represents the water toxicity. It takes into account the usually accepted concentrations for several substances in water and the quantity of substances released over the life cycle. The indication given corresponds to the water volume needed to dilute these substances down to acceptable concentrations.
<b>Hazardous Waste Production (HWP)</b>	This indicator calculates the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.

# Product Environmental Profile–PEP

---

Square D™ by Schneider Electric™ has achieved compliance status and the accuracy of data in this PEP document is based on our best knowledge as of the date of its publication.

Registration N°: <a href="#">SCHN-2013-019-V0</a>		Applicable PCR : PEP- PCR-ed 2-EN-2011 12 09	
Verifier accreditation N° : VH05		Program information: <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>	
Date of issue: <a href="#">06-2013</a>		Period of validity: 4 years	
Independent verification of the declaration and data, in compliance with ISO 14025:2006			
Internal	X	External	
In compliance with ISO 14025:2006 type III environmental declarations			
PCR review was conducted by an expert panel chaired by J. Chevalier (CSTB).			
The elements of the actual PEP cannot be compared with elements from another program.			

## Schneider Electric Industries SAS

35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

PEP ecopassport SCHN-2013-019-V0

ENVPEP1304031\_V1

## Square D by Schneider Electric

1415 S. Roselle Road  
Palatine, IL 60067 USA  
1-888-778-2733  
[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

06-2013

© 2013 Schneider Electric All Rights Reserved