
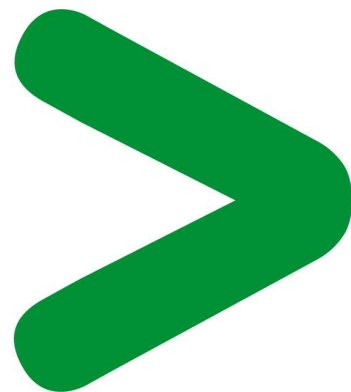


Product Environmental Profile

SMARTLINK IP

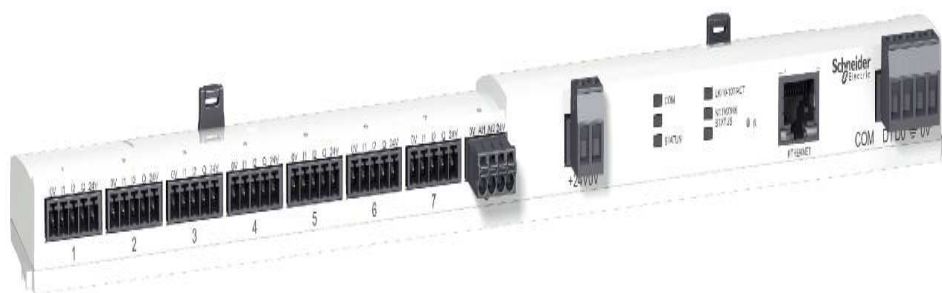

Product Environmental Profile - PEP

Product overview

The main purpose of the SMARTLINK IP is to transmit data from Acti 9 devices including energy counters, to a PLC or a supervision system via Modbus RS485 communication network (Modbus serial line).

The Acti 9 Smartlink consists in:

- Acti 9 Smartlink product which is a concentrator with eleven I/O channels, 2 rotary wheels to define the Modbus slave address, 1 Modbus connector to connect the Acti 9 Smartlink to the RS485 network, a 24 V DC power supply connector to feed the Acti 9 Smartlink,
- Accessories to fix it to the DIN rail or on power horizontal bus bar (Multiclip 80 & 200)
- Pre manufactured flat cables(with 3 different length) to link DIN mounted devices to the Acti 9 Smartlink.


The representative product used for the analysis is SMARTLINK IP and commercial reference is A9XMEA08.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

The environmental analysis was performed in conformity with ISO 14040.

Constituent materials

The mass of the product range is from 290 g and 300 g including packaging. It is 267.61 g for the SMARTLINK IP ASSEMBLY and commercial reference A9XMEA08. The constituent materials are distributed as follows:

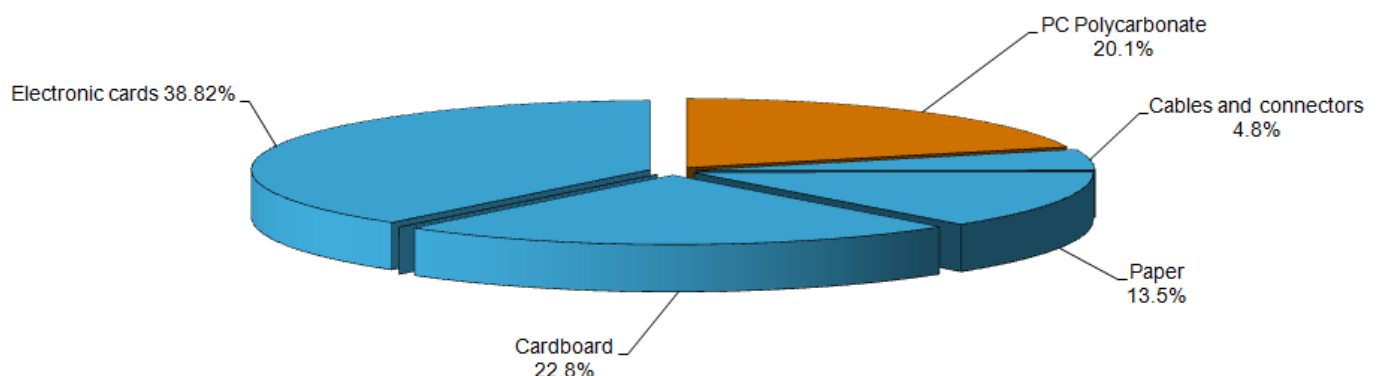

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric [Green Premium website](http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page) .
(<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>)

Manufacturing

The SMARTLINK IP product range is manufactured at a Schneider Electric production site on which an ISO14001 certified environmental management system has been established.

Distribution

The weight and volume of the packaging have been optimized, based on the European Union's packaging directive. The SMARTLINK IP packaging weight is 97 g. It consists of paper (36g) and cardboard (61g).

Product Environmental Profile - PEP

Use

The products of the SMARTLINK IP range do not generate environmental pollution (noise, emissions) requiring special precautionary measures in standard use.

The electrical power consumption depends on the conditions under which the product is implemented and used. The electrical power consumed by the SMARTLINK IP range is between 2.6 W and 2.7 W. It is 2.64 W in active mode for the referenced SMARTLINK IP commercial reference is A9XMEA08.

This thermal dissipation represents less than 0.001% of the power which passes through the product.

End of life

At end of life, the products in the SMARTLINK IP have been optimized to decrease the amount of waste and allow recovery of the product components and materials.

This product range contains Electronic components that should be separated from the stream of waste so as to optimize end-of-life treatment by special treatments. The location of these components and other recommendations are given in the End of Life Instruction document which is available for this product range on the Schneider-Electric Green Premium website [Green Premium website](http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page) (<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>).

The recyclability potential of the products has been evaluated using the "ECO DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio is: 26.3%.

As described in the recyclability calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

Environmental impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I) Use (U), and End of life (E).

Modelling hypothesis and method:

- The calculation was performed on the SMARTLINK IP and commercial reference is A9XMEA08.

- Product packaging: Is included

- Installation components: No special components included.

- Scenario for the Use phase: this product range is included in the category "Energy consuming product".

- The typical life time is 10 years.

- The consumed power is 2.64w.

-Uptime 100% (based on the real using data).

- The geographical representative area for the assessment is Europe and the electrical power model used for calculation is European model.

End of life impacts are based on a worst case transport distance to the recycling plant (1000km)

Presentation of the product environmental impacts

Environmental indicators	Unit	For give the name and commercial reference or description of the representative product					
		S = M + D + I + U + E	M	D	I	U	E
Air Acidification (AA for PEP)	kg H+ eq	1.90E-02	1.02E-03	5.96E-06	0.00E+00	1.79E-02	3.81E-05
Air toxicity (AT for PEP)	m ³	2.38E+07	1.54E+06	8.86E+03	0.00E+00	2.22E+07	5.68E+04
Energy Depletion (ED for PEP)	MJ	2.73E+03	7.70E+01	4.52E-01	0.00E+00	2.65E+03	2.74E+00
Global Warming Potential (GWP for PEP)	kg CO ₂ eq.	1.39E+02	5.26E+00	3.20E-02	0.00E+00	1.34E+02	1.94E-01
Hazardous Waste Production (HWP for PEP)	kg	2.35E+00	1.29E-01	3.97E-08	0.00E+00	2.22E+00	2.41E-07
Ozone Depletion Potential (ODP for PEP)	kg CFC-11 eq.	7.81E-06	5.54E-07	6.08E-11	0.00E+00	7.26E-06	3.68E-10
Photochemical Ozone Creation Potential (POCP for PEP)	kg C ₂ H ₄ eq.	4.80E-02	1.25E-03	7.15E-06	0.00E+00	4.67E-02	4.84E-05
Raw Material Depletion (RMD for PEP)	Y-1	1.08E-13	1.05E-13	6.56E-19	0.00E+00	3.01E-15	3.97E-18
Water Depletion (WD for PEP)	dm ³	4.18E+02	3.54E+01	3.33E-03	0.00E+00	3.83E+02	2.02E-02
Water Eutrophication (WE for PEP)	kg PO ₄ ³⁻ eq.	7.36E-04	4.22E-04	5.96E-08	0.00E+00	3.14E-04	3.61E-07
Water Toxicity (WT for PEP)	m ³	3.99E+01	1.41E+00	1.37E-02	0.00E+00	3.84E+01	8.31E-02

Life cycle assessment has been performed with the EIME software (Environmental Impact and Management Explorer), version 5.3, and with its database version 2013-02.

The U phase is the life cycle phase which has the greatest impact on the majority of environmental indicators except RMD and WE.

Extrapolation rules for product range:

Depending on the impact analysis, the environmental indicators (without RMD and WE) of other products in this family may be proportional extrapolated by energy consumption values". For RMD and WE, impact may be proportional extrapolated by mass of the product.

Product Environmental Profile - PEP

System approach


As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Product Environmental Profile - PEP

Glossary

Air Acidification (AA)	The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H ⁺ .
Air Toxicity (AT)	This indicator represents the air toxicity in a human environment. It takes into account the usually accepted concentrations for several gases in the air and the quantity of gas released over the life cycle. The indication given corresponds to the air volume needed to dilute these gases down to acceptable concentrations.
Energy Depletion (ED)	This indicator gives the quantity of energy consumed, whether it is from fossil, hydroelectric, nuclear or other sources. It takes into account the energy from the material produced during combustion. It is expressed in MJ.
Global Warming (GW)	The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO ₂ .
Hazardous Waste Production (HWP)	This indicator quantifies the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.
Ozone Depletion (OD)	This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.
Photochemical Ozone Creation (POC)	This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C ₂ H ₄).
Raw Material Depletion (RMD)	This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.
Water Depletion (WD)	This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm ³ .
Water Eutrophication (WE)	Eutrophication is a natural process defined as the enrichment in mineral salts of marine or lake waters or a process accelerated by human intervention, defined as the enrichment in nutritive elements (phosphorous compounds, nitrogen compounds and organic matter). This indicator represents the water eutrophication of lakes and marine waters by the release of specific substances in the effluents. It is expressed in grams equivalency of PO43-(phosphate).
Water Toxicity (WT)	This indicator represents the water toxicity. It takes into account the usually accepted concentrations for several substances in water and the quantity of substances released over the life cycle. The indication given corresponds to the water volume needed to dilute these substances down to acceptable concentrations.

Registration N°: SCHN-2014-009		Applicable PCR : PEP- PCR- ed 2.1-EN-2012 12 11	
Verifier accreditation N°: VH08		Program informatio n: www.pep-ecopassport.org	
Date of issue: 04-2014		Period of validity: 4 years	
Independent verification of the declaration and data, according to ISO 14025:2006			
Internal		External	X
In compliance with ISO 14025:2006 type III environmental declarations			
PCR review was conducted by an expert panel chaired by J. Chevalier (CSTB).			
The elements of the actual PEP cannot be compared with elements from another program.			

Schneider Electric Industries SAS
 35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric