

CARACTÉRISTIQUES TECHNIQUES / Technical data
VLVAF2P03510AA

TENSION ASSIGNEE / rated voltage (Un):	400	V
PUISSANCE ASSIGNEE / rated power (Qn):	150	Kvar
COURANT ASSIGNÉ / rated current (In):	217	A
COURANT MAXIMUM PERMANENT / maximum continuous current (Imp):	258	A
FRÉQUENCE ASSIGNÉE / rated frequency (Fn):	50	Hz
ISOLEMENT / insulation (Um):	690	V
PERTES CALCULÉES / calculated losses:	900	W
ACCORD / tuning:	190	Hz
COURANT ASSIGNE DE COURT-CIRCUIT CONDITIONNEL / rated conditional short-circuit current (Icc):	50	kA
COURANT ASSIGNE DE COURTE DUREE ADMISSIBLE / rated short-time withstand current (Icw):	-	kA/1s
UTILISATION INTÉRIEURE / indoor type:	IP31	
NORME / standard:	IEC 61439-1 : 2011 IEC 61439-2 : 2011 IEC 61921 : 2017	
TEMPERATURE / temperature:	-5° / +45°C	°C
MOYENNE SUR 24 HEURE / average temperature over 24 hours :	35°C	°C
MOYENNE ANNUELLE / average annual temperature :	25°C	°C
SCHEMA ELECTRIQUE DE PUISSANCE / Power diagram :	PF2PA4S(DD)WCBSPF	
SCHEMA ELECTRIQUE DE CONTROLE / Control diagram :	CF2PA4S(DD)WCB	
PLANS D'ARCHITECTURE, D'IMPLANTATION & D'INSTALLATION / General Arrangement, Layout & Installation drawings :	EF2P2A2M4SBWCBPF	
BORNIER CLIENT / Customer Terminal Blocks :	S1B9989700	



VarSet capacitor bank Auto 150kvar DR3,8 with incomer CB xxB 400V 50Hz

Number:

VLVAF2P03510AA

Revision:

00

Sheet:

1/2

Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires.

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

NOMENCLATURE / Bill of material

Item	Description	Part N°
QS01	Gamme / range – Ref Disjoncteur / Ref Breaker	NSX400N - LV432693
	Réglage / Setting	320/0,9/7
	Bobine MX - Auxiliary MX	LV429387

MODULES						
	n=1	n=2	n=3	n=4	n=5	n=6
Power (kVar)	25 + 25	50 + 50	-	-	-	-
QS _n	Fuses 125A	Fuses 250A				
KM _n	LC1D38P7 x 2	LC1D95P7 x 2				
C _n	BLRCH339A407B48 x 2	BLRCH680A000B48 x 2				
DR _n	LVR7250A40T x 2	LVR7500A40T x 2				
	n=7	n=8	n=9	n=10	n=11	n=12
Power (kVar)	-	-	-	-	-	-
QS _n						
KM _n						
C _n						
DR _n						

Item	Description	Part N°
QF1	Fuses or CB	DF2CA04
QF2	Unipolar and neutral breaker	A9F74602
TC1	Transformer	ABL6TS40U
ST1	Thermostat (ventilation)	
ST2	Thermostat (overheating)	NSYCCOTH0
EV1	Fan	PHA25988
EV2	Fan	
A1	PFC controller	VPL06N

(La liste et les références des composants figurant ci-après sont données à titre indicatif compte tenu de leur caractère évolutif du fait des éventuelles modifications de design ou évolutions des normes de référence / As product design and standards of reference change from time to time, the following list of part and corresponding reference are for information only)



VarSet capacitor bank Auto 150kvar DR3,8 with incomer CB xxB 400V 50Hz

Number:

VL VAF2P03510AA

Revision:


00


Sheet:

2/2


Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

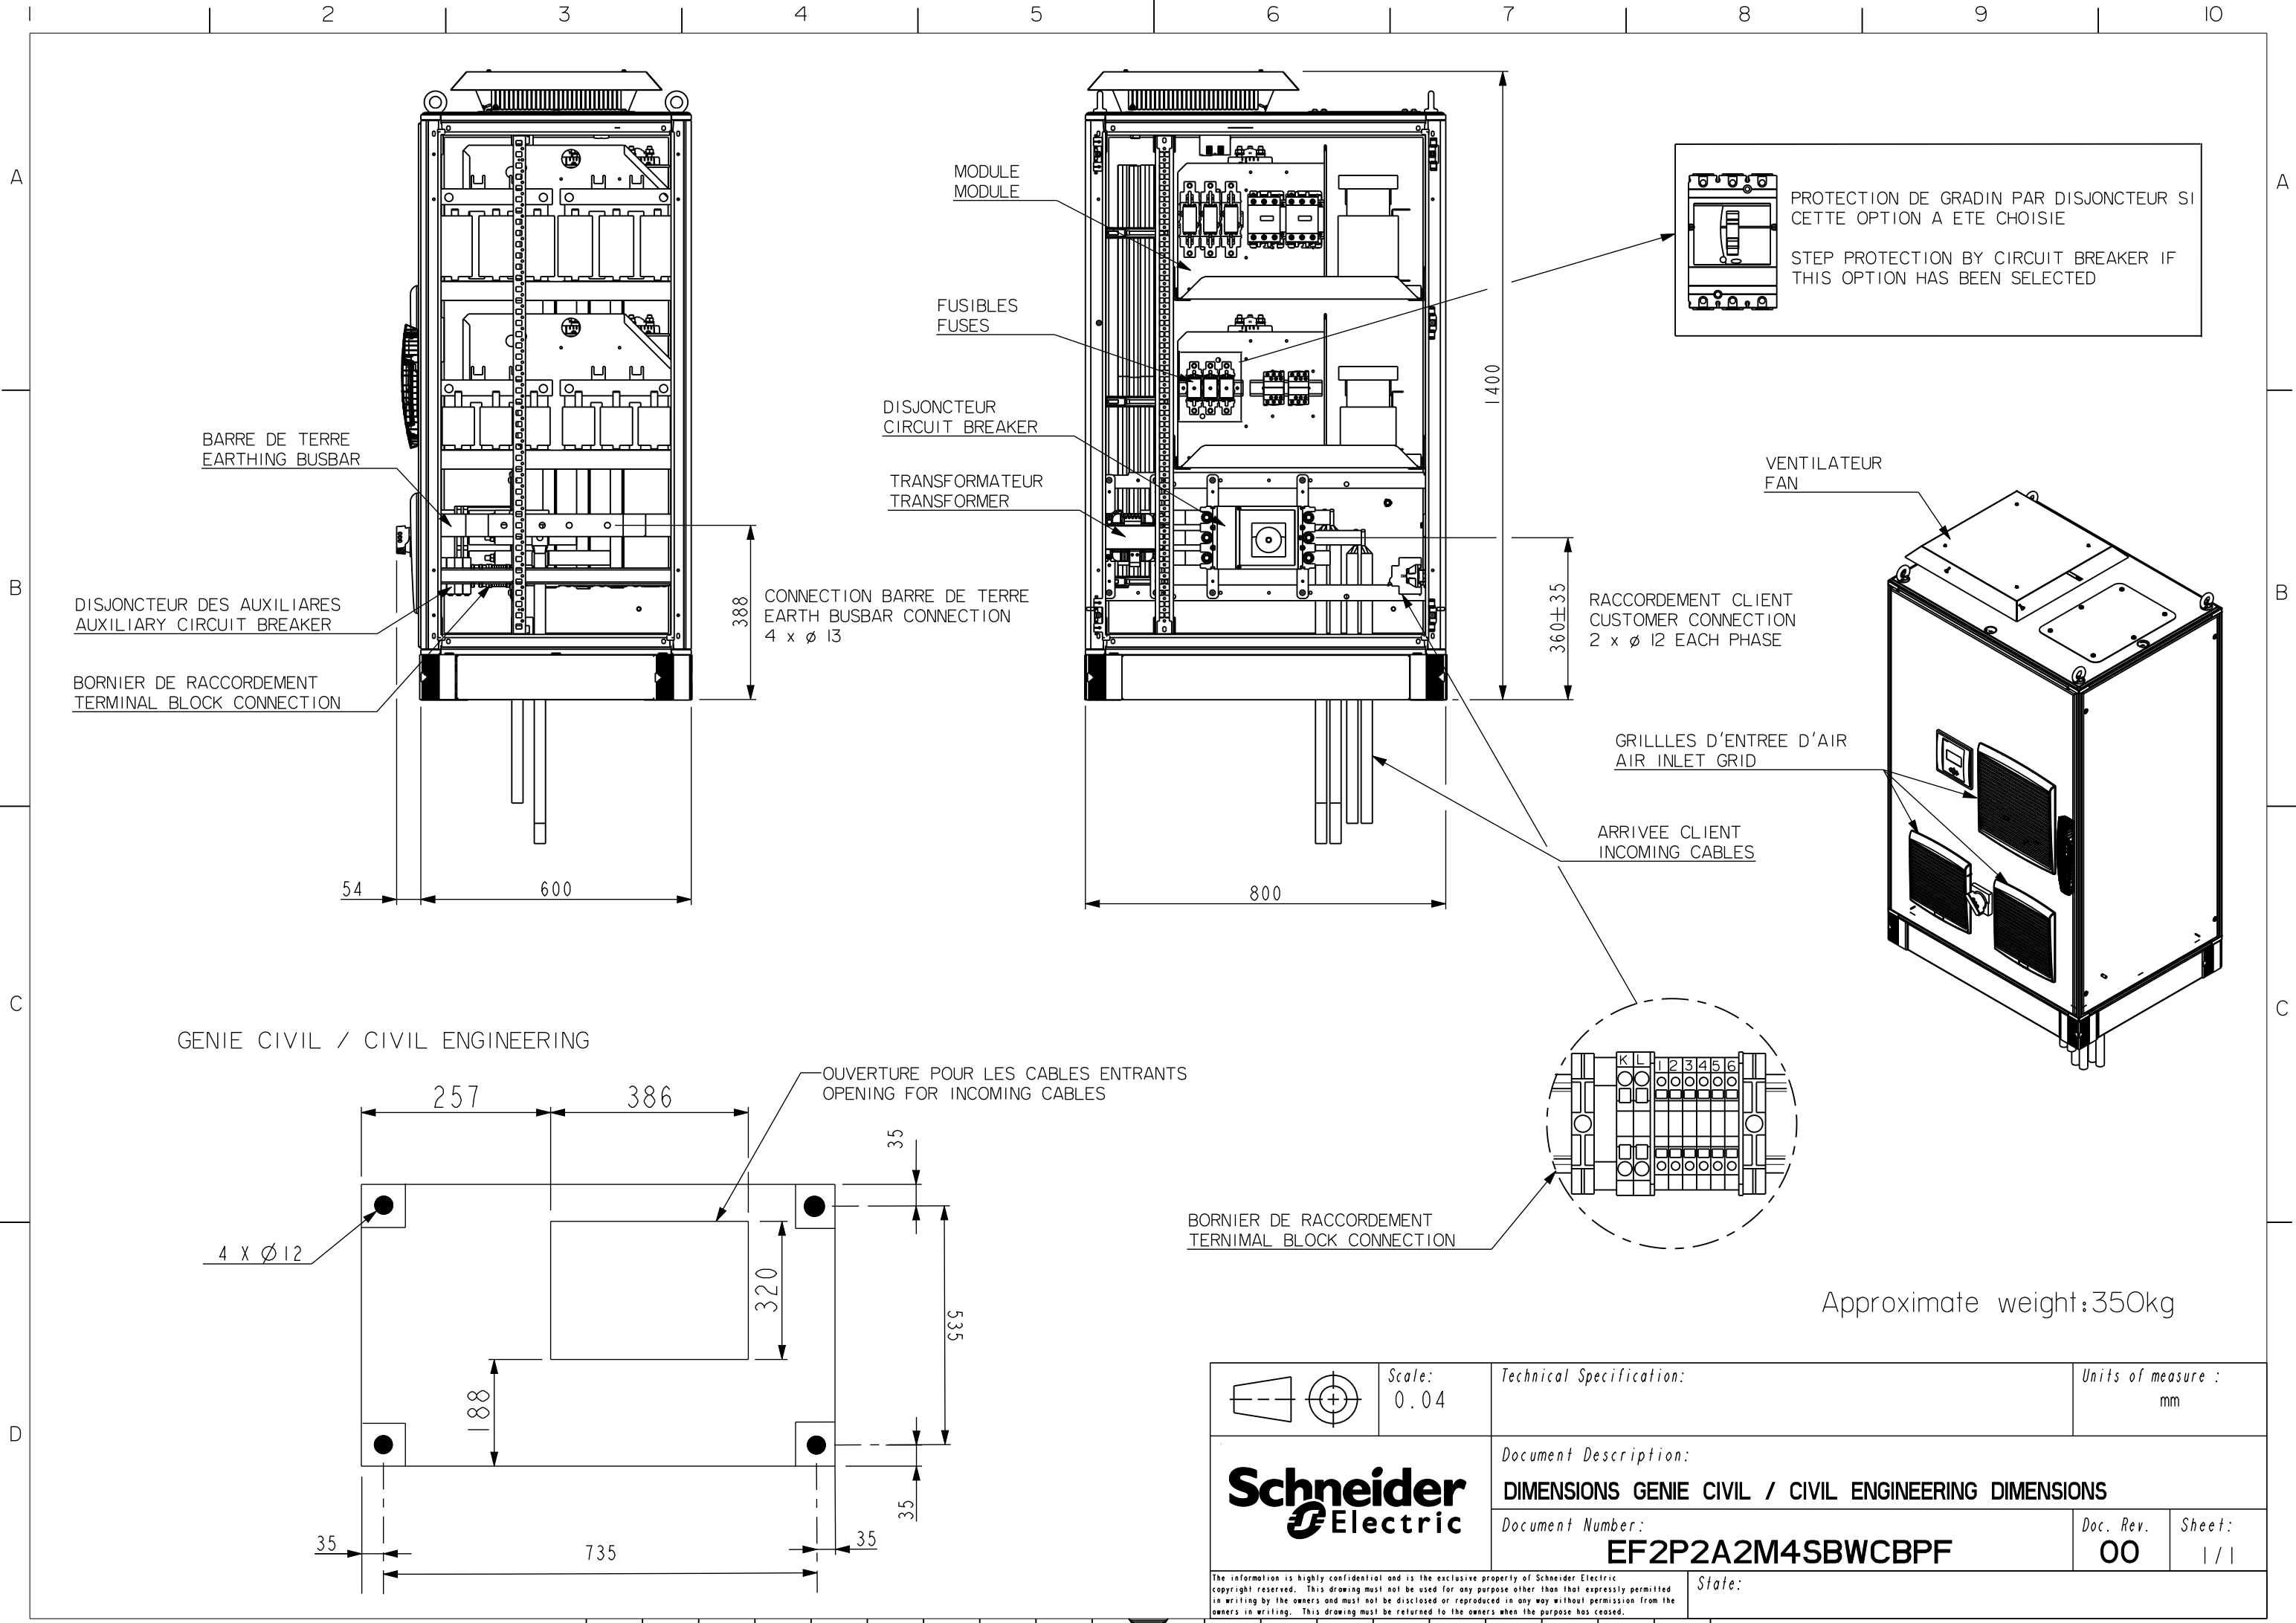

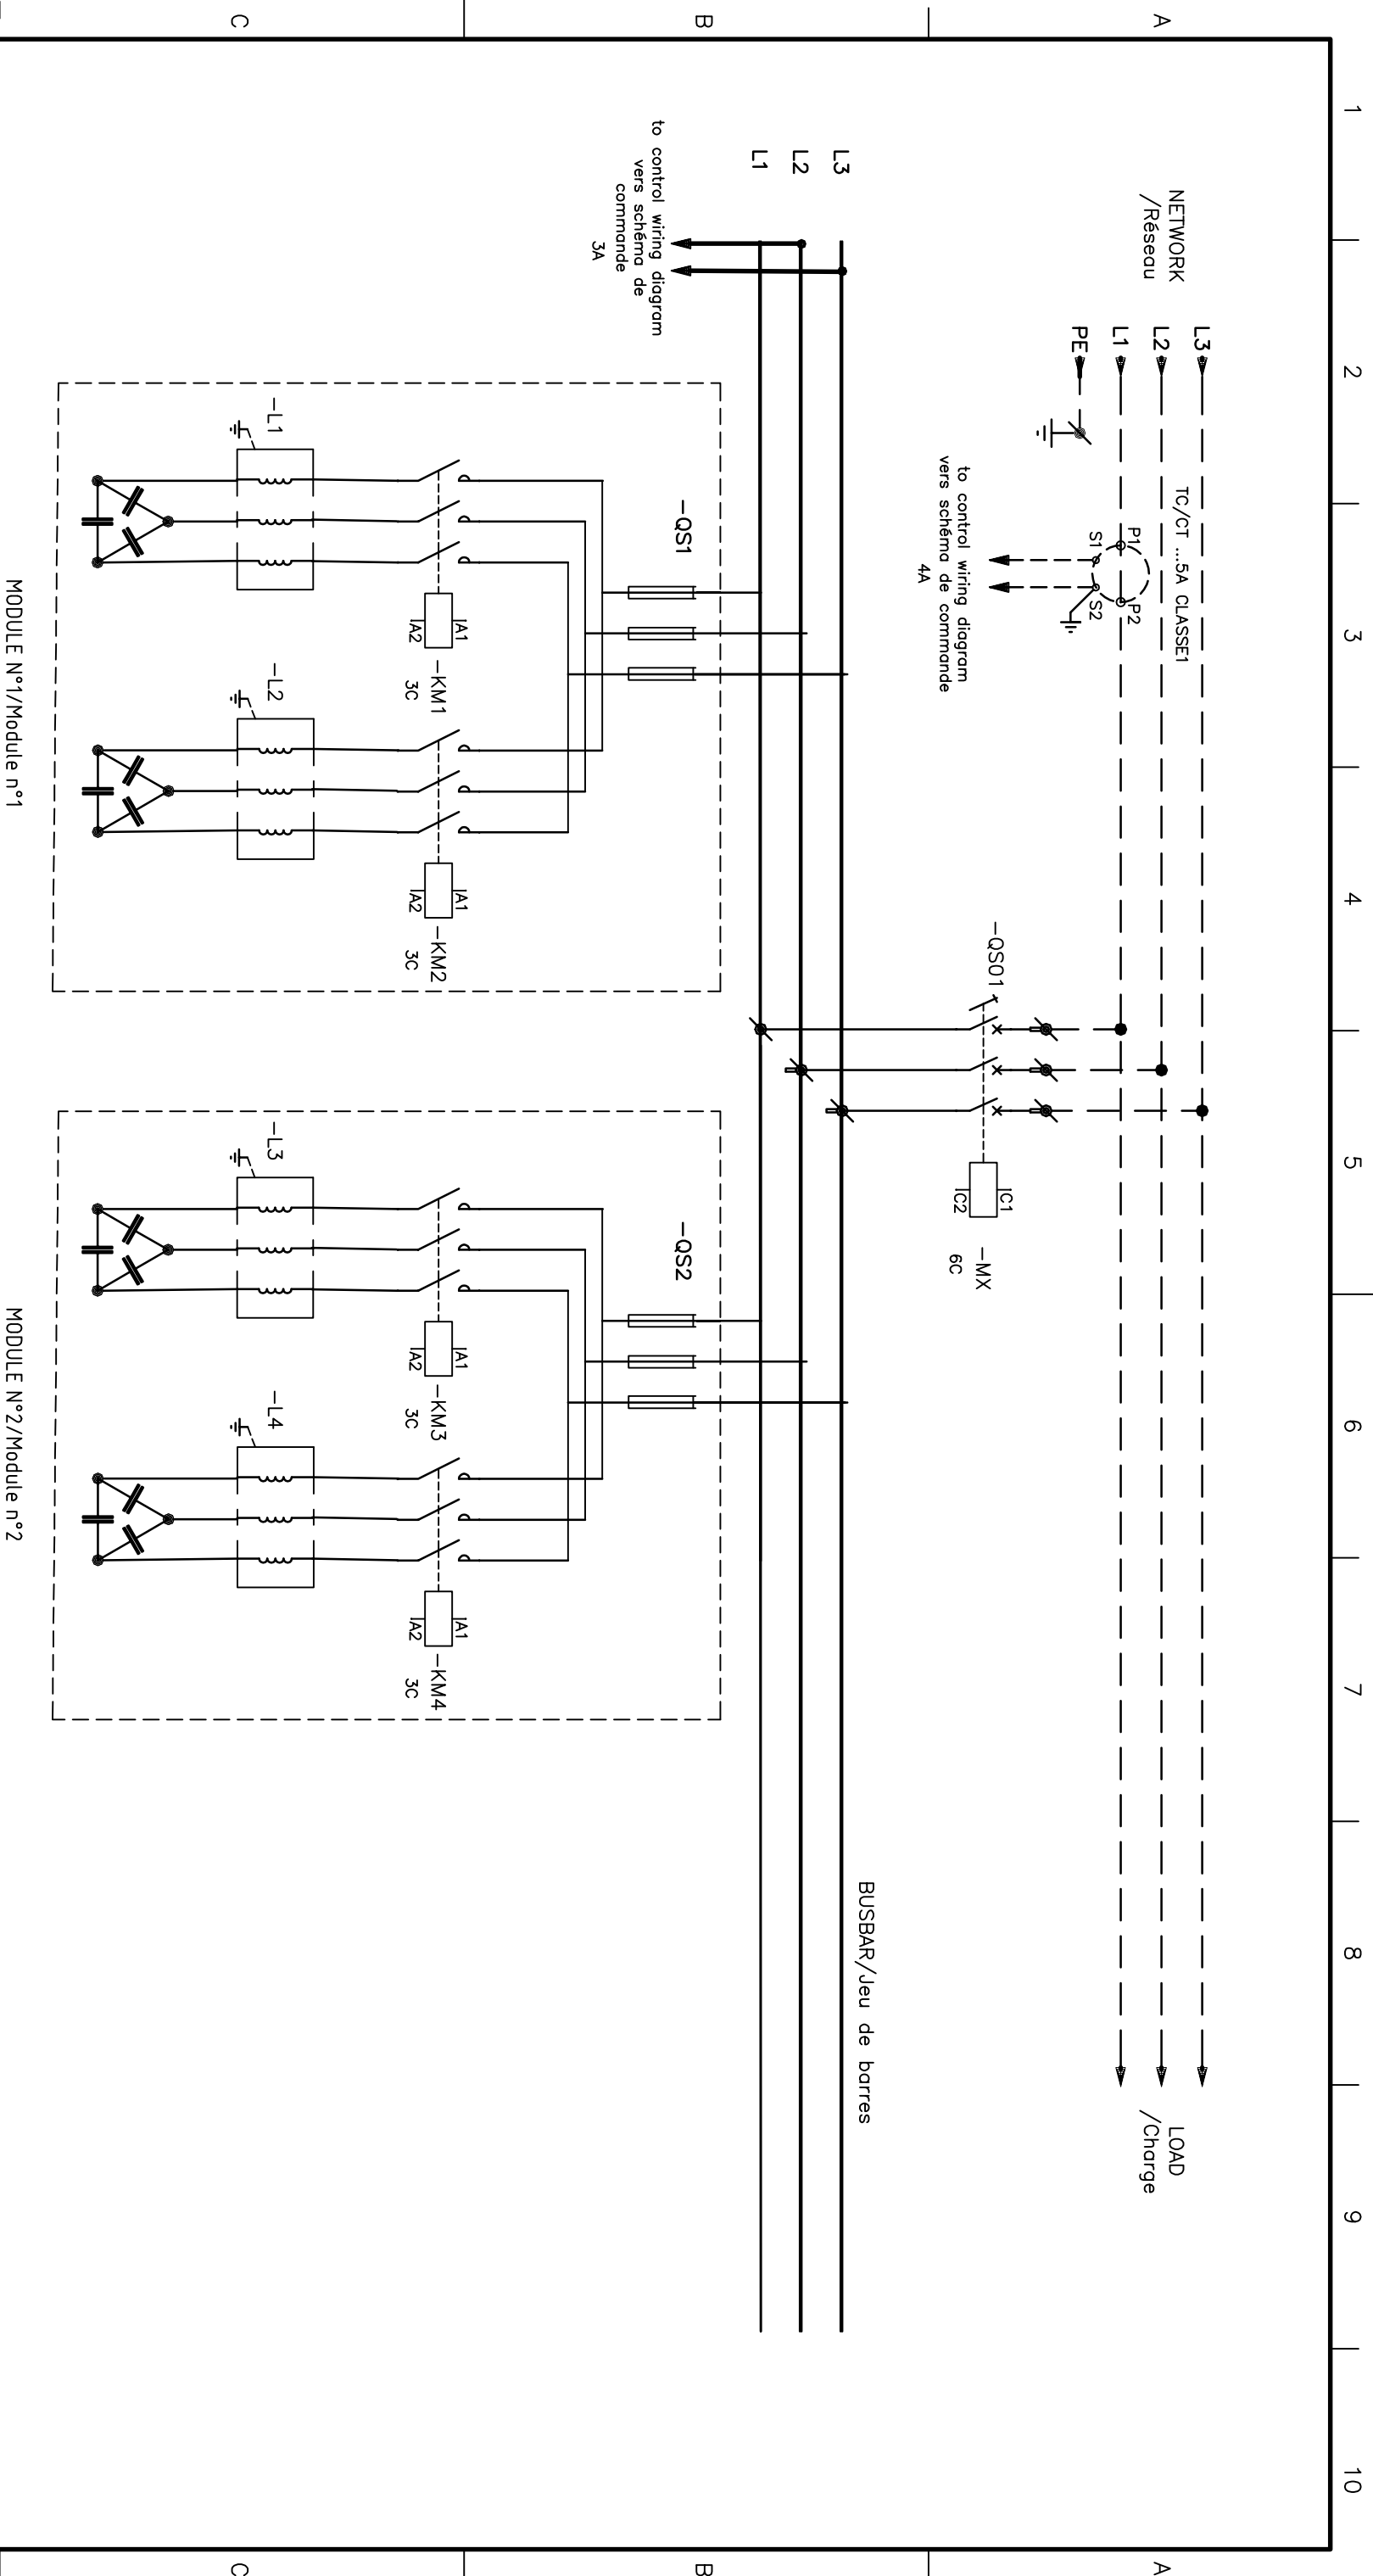

D	Connection not supply/Connexion non fournie



F2P auto P wiring diag W CB 4 steps

Schneider
Electric

Number:


PF2PA4S(DD)WCBSPF

Revision:

1/1

All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent

State:

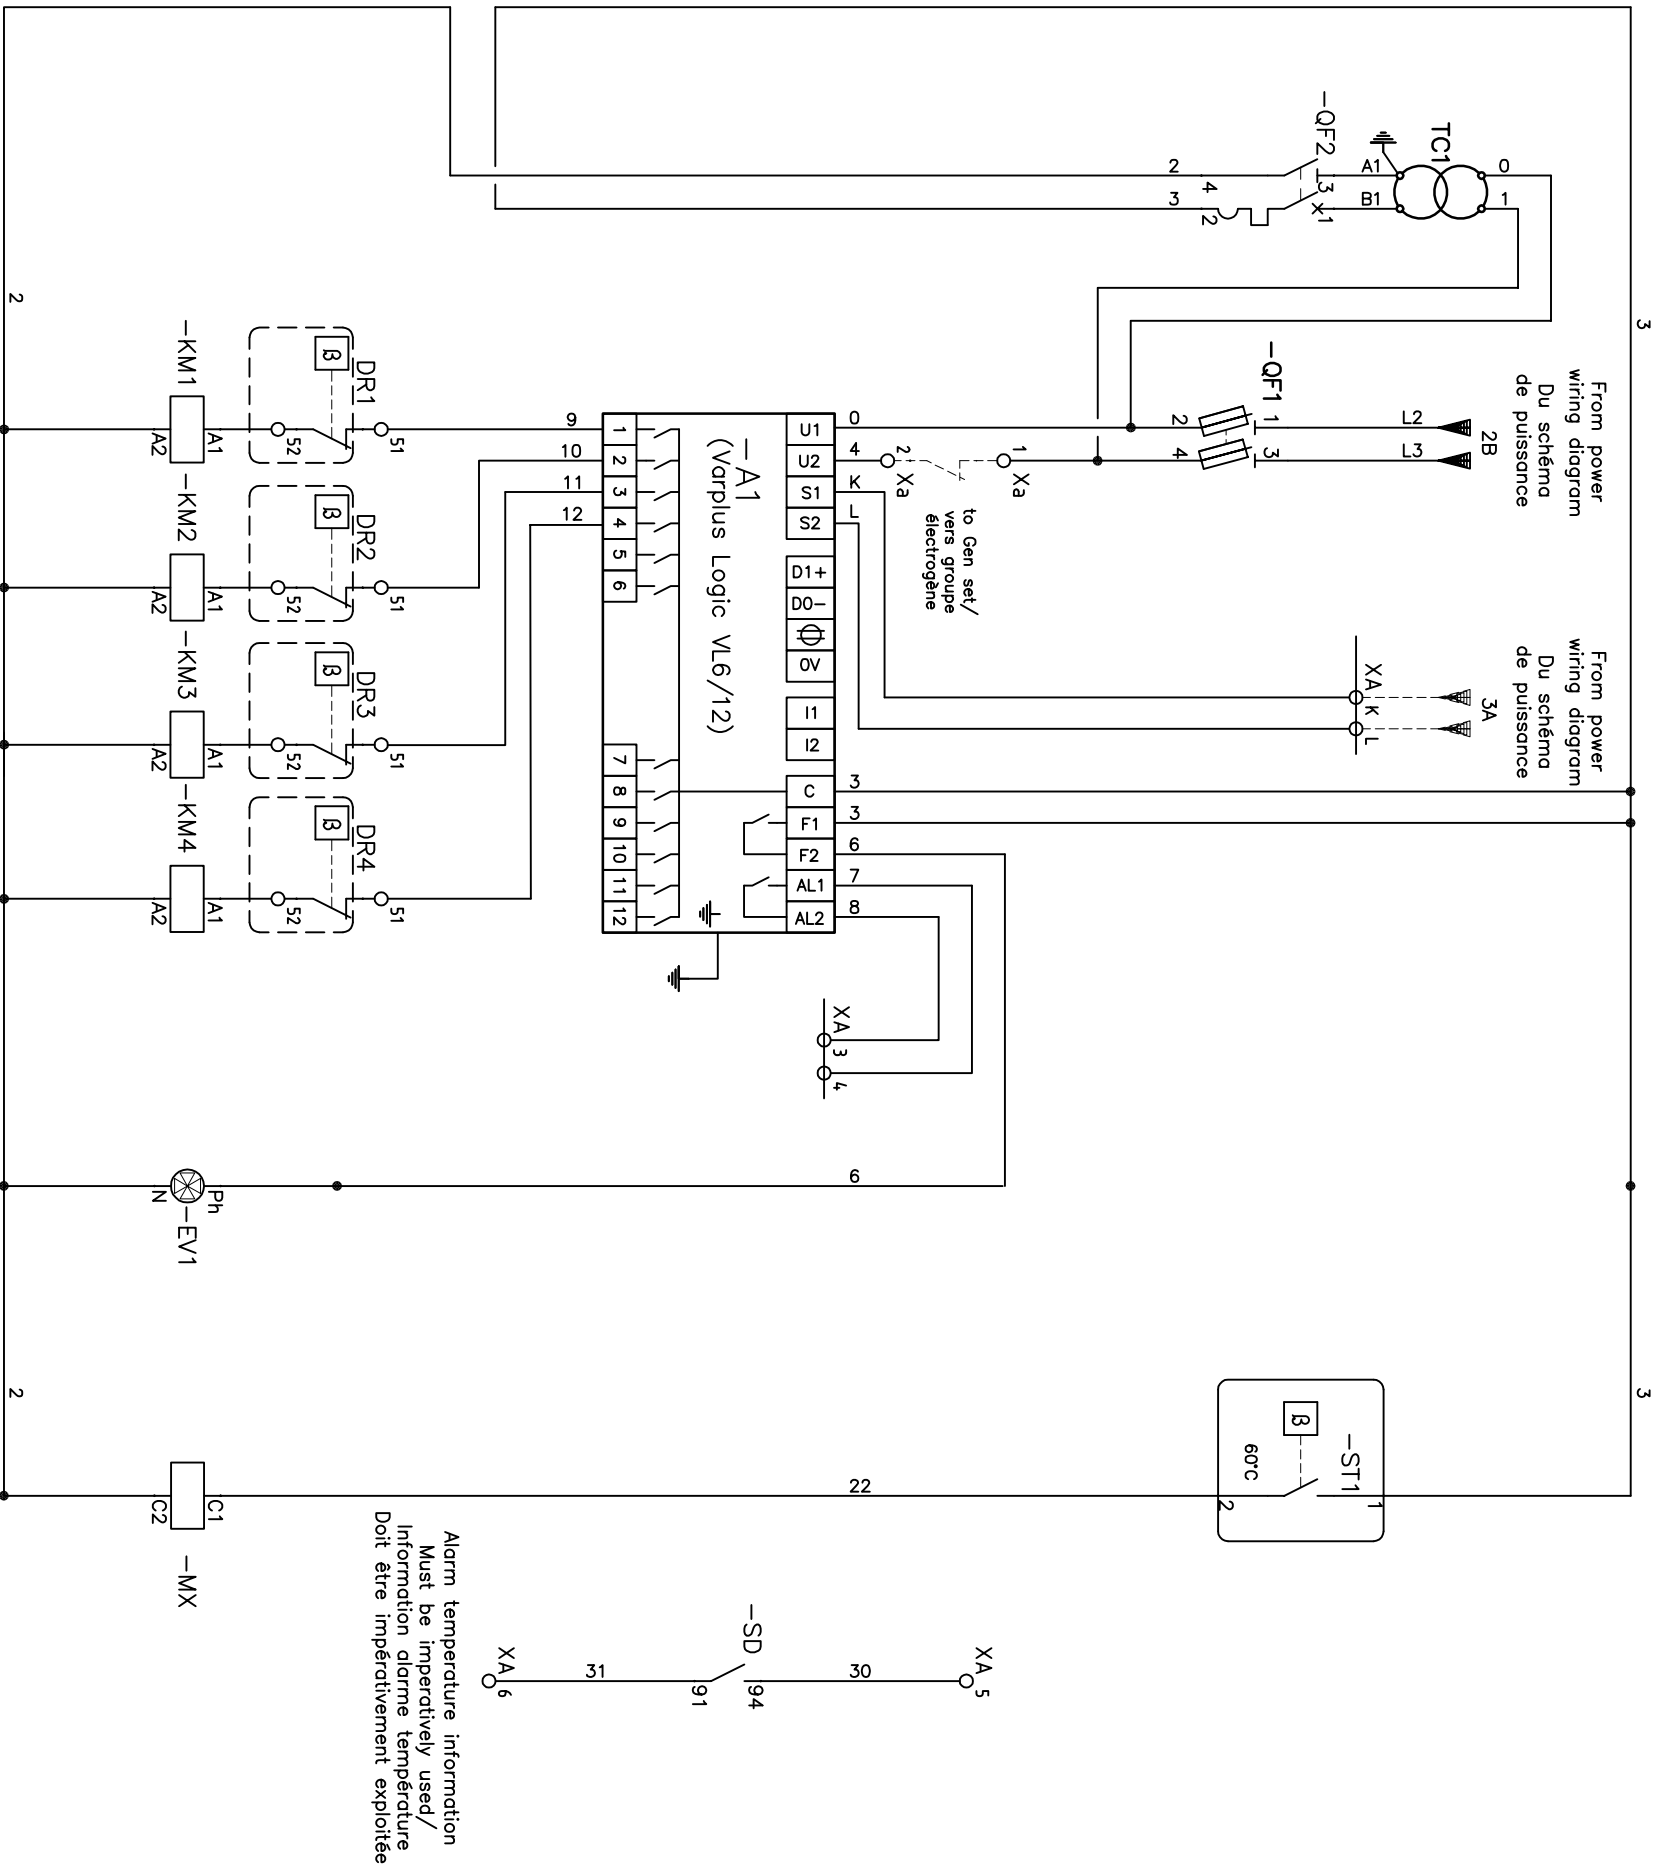

----- Connection not supply/Connexion non fournie

	Scale:	Tolerancing Standard :	Units of measure :
--	--------	------------------------	--------------------

	F2P CONTROL WIRING DIAGRAM - 4 STEPS - WITH CB NETWORK : 400V-415V/50Hz & 400V/60Hz
Number: CF2PA4S(DD)WCB	Revision: 00
State:	Sheet: 1 / 1


All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent

CUSTOMER TERMINAL BLOCK

Bornier client

Клеммный блок для внешних присоединений

VLVAW1N/VLVAW2N/VLVAW3N
/VLVAF5N/VLVAF6P
VLVAF2P/VLVAF3P/VLVAF5P

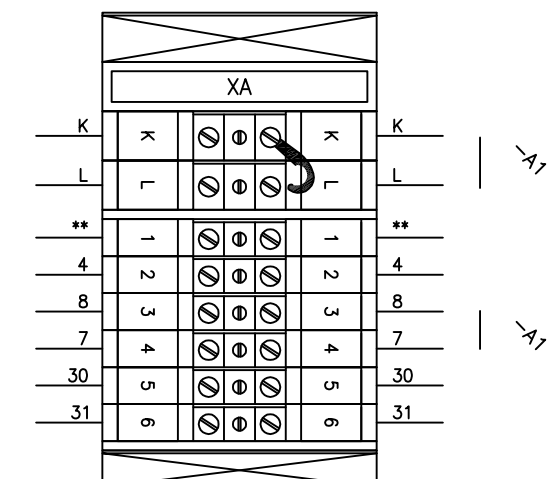

**
= 1 for VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P/
= 1 для контроллеров VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P
= 1 for VL12 VLVAF5N-VLVAF6P /
= 1 для контроллеров VL12 VLVAF5N-VLVAF6P

PFC current measure/Mesure courant régulateur/
Измерение тока
Gen set/ Groupe électrogène
Генераторная установка
PFC alarm/Alarme température
Сигнализация
Alarm temperature information/Information alarme température
Сигнализация по температурному режиму



Scale:

Tolerancing Standard :

Units of measure :

Schneider
Electric

CUSTOMER TERMINAL BLOCKS
BORNIER CLIENT

Number: **S1B9989700**

Revision: **06** Sheet: 1 / 1

All information and data contained in this document are the exclusive property of Schneider Electric.
Indicateurs SAE and may either be used or otherwise without the prior written consent.

State: