

CARACTÉRISTIQUES TECHNIQUES / Technical data
VLVAF5N03517AA

TENSION ASSIGNEE / rated voltage (Un):	400	V
PUISSANCE ASSIGNEE / rated power (Qn):	350	Kvar
COURANT ASSIGNÉ / rated current (In):	505	A
COURANT MAXIMUM PERMANENT / maximum continuous current (Imp):	722	A
FRÉQUENCE ASSIGNÉE / rated frequency (Fn):	50	Hz
ISOLEMENT / insulation (Um):	690	V
PERTES CALCULÉES / calculated losses:	875	W
ACCORD / tuning:	-	Hz
COURANT ASSIGNE DE COURT-CIRCUIT CONDITIONNEL / rated conditional short-circuit current (Icc):	50	kA
COURANT ASSIGNE DE COURTE DUREE ADMISSIBLE / rated short-time withstand current (Icw):	-	kA/1s
UTILISATION INTÉRIEURE / indoor type:	IP31	
NORME / standard:	IEC 61439-1 : 2011 IEC 61439-2 : 2011 IEC 61921 : 2017	
TEMPERATURE / temperature:	-5° / +45°C	°C
MOYENNE SUR 24 HEURE / average temperature over 24 hours :	35°C	°C
MOYENNE ANNUELLE / average annual temperature :	25°C	°C
SCHEMA ELECTRIQUE DE PUISSANCE / Power diagram :	PF5NA4S(S31)WCBSPF	
SCHEMA ELECTRIQUE DE CONTROLE / Control diagram :	CF5N4S(S31)WCB	
PLANS D'ARCHITECTURE, D'IMPLANTATION & D'INSTALLATION / General Arrangement, Layout & Installation drawings :	EF5NA4M4SBWCBF	
BORNIER CLIENT / Customer Terminal Blocks :	S1B9989700	



VarSet capacitor bank Auto 350kvar with incomer CB xxB 400V 50Hz

Number:

VL VAF5N03517AA

Revision:

00

Sheet:

1/2

Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires.

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

NOMENCLATURE / Bill of material

Item	Description	Part N°
QS01	Gamme / range – Ref Disjoncteur / Ref Breaker	NS800N - 33466
	Réglage / Setting	0,95/4/6
	Bobine MX - Auxiliary MX	33662

MODULES						
	n=1	n=2	n=3	n=4	n=5	n=6
Power (kVar)	50	100	100	100	-	-
QS _n	Fuses 125A	Fuses 250A	Fuses 250A	Fuses 250A		
KM _n	LC1DWK12P7	LC1DWK12P7 x 2	LC1DWK12P7 x 2	LC1DWK12P7 x 2		
C _n	BLRCH500A000B40	BLRCH500A000B40 x 2	BLRCH500A000B40 x 2	BLRCH500A000B40 x 2		
DR _n	-	-	-	-		
	n=7	n=8	n=9	n=10	n=11	n=12
Power (kVar)	-	-	-	-	-	-
QS _n						
KM _n						
C _n						
DR _n						

Item	Description	Part N°
QF1	Fuses or CB	DF2CA04
QF2	Unipolar and neutral breaker	A9F74603
TC1	Transformer	ABL6TS63U
ST1	Thermostat (ventilation)	NSYCCOTH0
ST2	Thermostat (overheating)	NSYCCOTH0
EV1	Fan	NSYCVF575M230MF
EV2	Fan	
A1	PFC controller	VPL06N

(La liste et les références des composants figurant ci-après sont données à titre indicatif compte tenu de leur caractère évolutif du fait des éventuelles modifications de design ou évolutions des normes de référence / As product design and standards of reference change from time to time, the following list of part and corresponding reference are for information only)



VarSet capacitor bank Auto 350kvar with incomer CB xxB 400V 50Hz

Number:

VL VAF5N03517AA

Revision:

00

Sheet:

2/2

Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

A

FUSIBLE
FUSE
OR
DISJONCTEUR *
CIRCUIT BREAKER *
(*) PROTECTION PAR DISJONCTEUR DE GRADIN
SI CETTE OPTION A ETE CHOISIE
(*) STEP PROTECTION BY CIRCUIT BREAKER IF
THIS OPTION HAS BEEN SELECTED


MODULE
MODULE

DISJONCTEUR D'ENTREE
INCOMING CIRCUIT BREAKER

TRANSFORMATEUR
TRANSFORMER

BORNIER DE RACCORDEMENT
TERMINAL BLOCK CONNECTION

DISJONCTEUR DES AUXILIAIRES
AUXILIARY CIRCUIT BREAKER

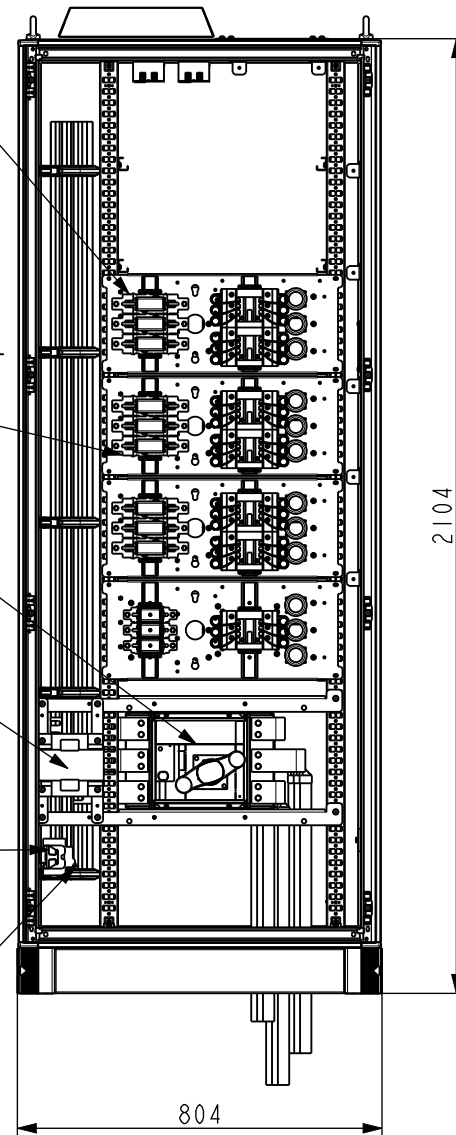

3 TROUS Ø 13MM
PAR PHASE
/
3 HOLES Ø 13MM
PER PHASE

POSITION DES CABLES
CABLE POSITION

580

450

BARRE DE TERRE
EARTHING BUSBAR
4x Ø 13MM


ARRIVEE CLIENT
INCOMING CABLES

669

VENTILATEUR
FAN

REGULATEUR
CONTROLLER


2 GRILLES D'ENTREE D'AIR
2 INLET GRID

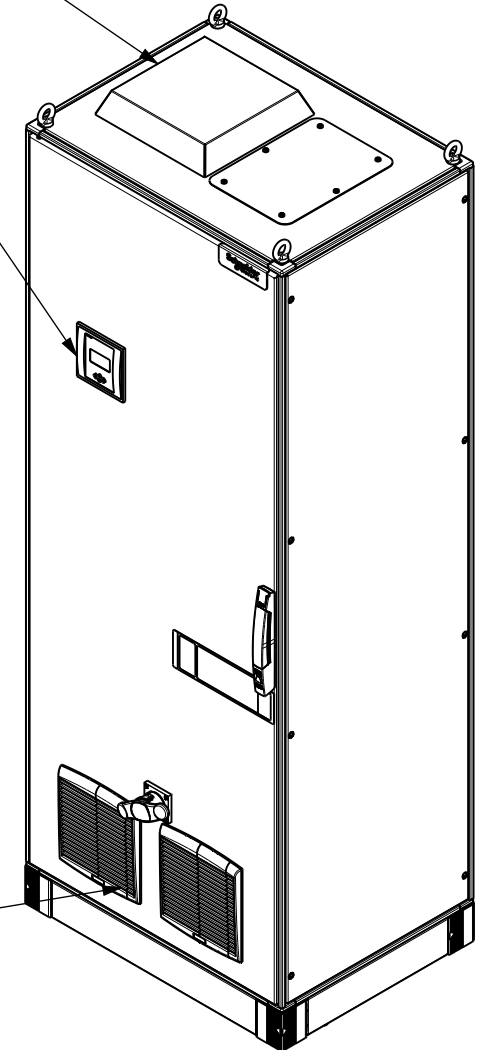


B


C

GENIE CIVIL / CIVIL ENGINEERING

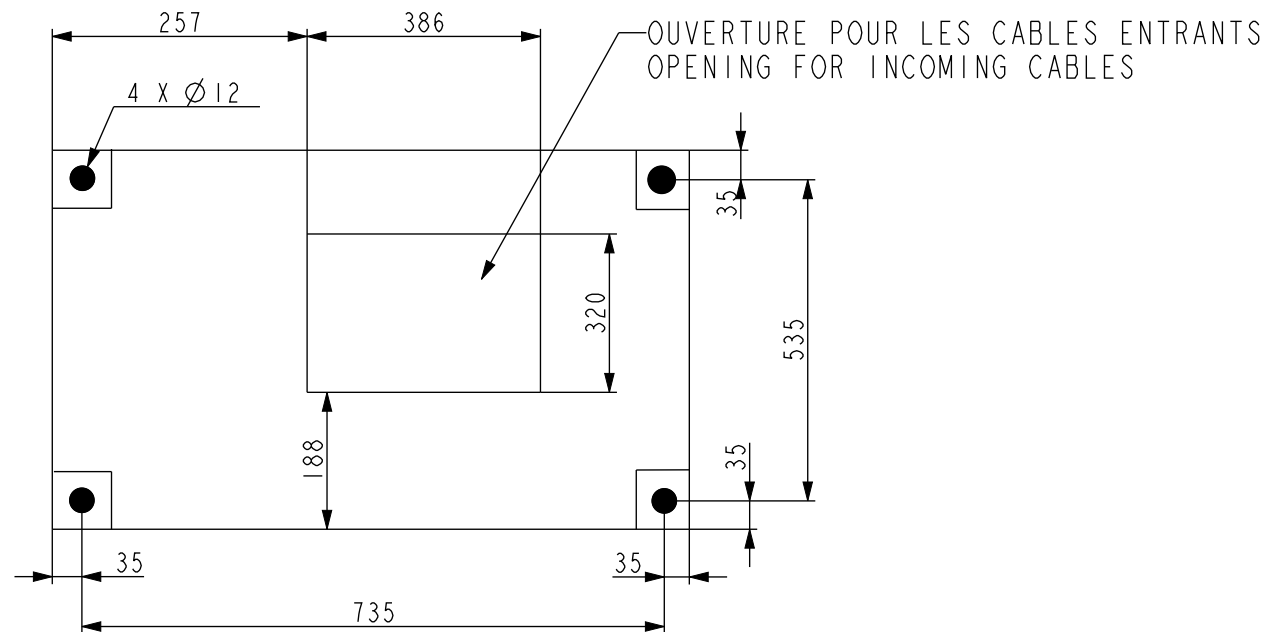

D

	Scale:	Technical Specification:	Units of measure : mm	
		Document Description:		
		DIMENSIONS GENIE CIVIL / CIVIL ENGINEERING DIMENSIONS		
		Document Number:	Doc. Rev.	Sheet:
		EF5NA4M4SBWCBF	00	1 / 1
The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This drawing must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing. This drawing must be returned to the owners when the purpose has ceased.		State: Creation Printed on 2018/07/03		

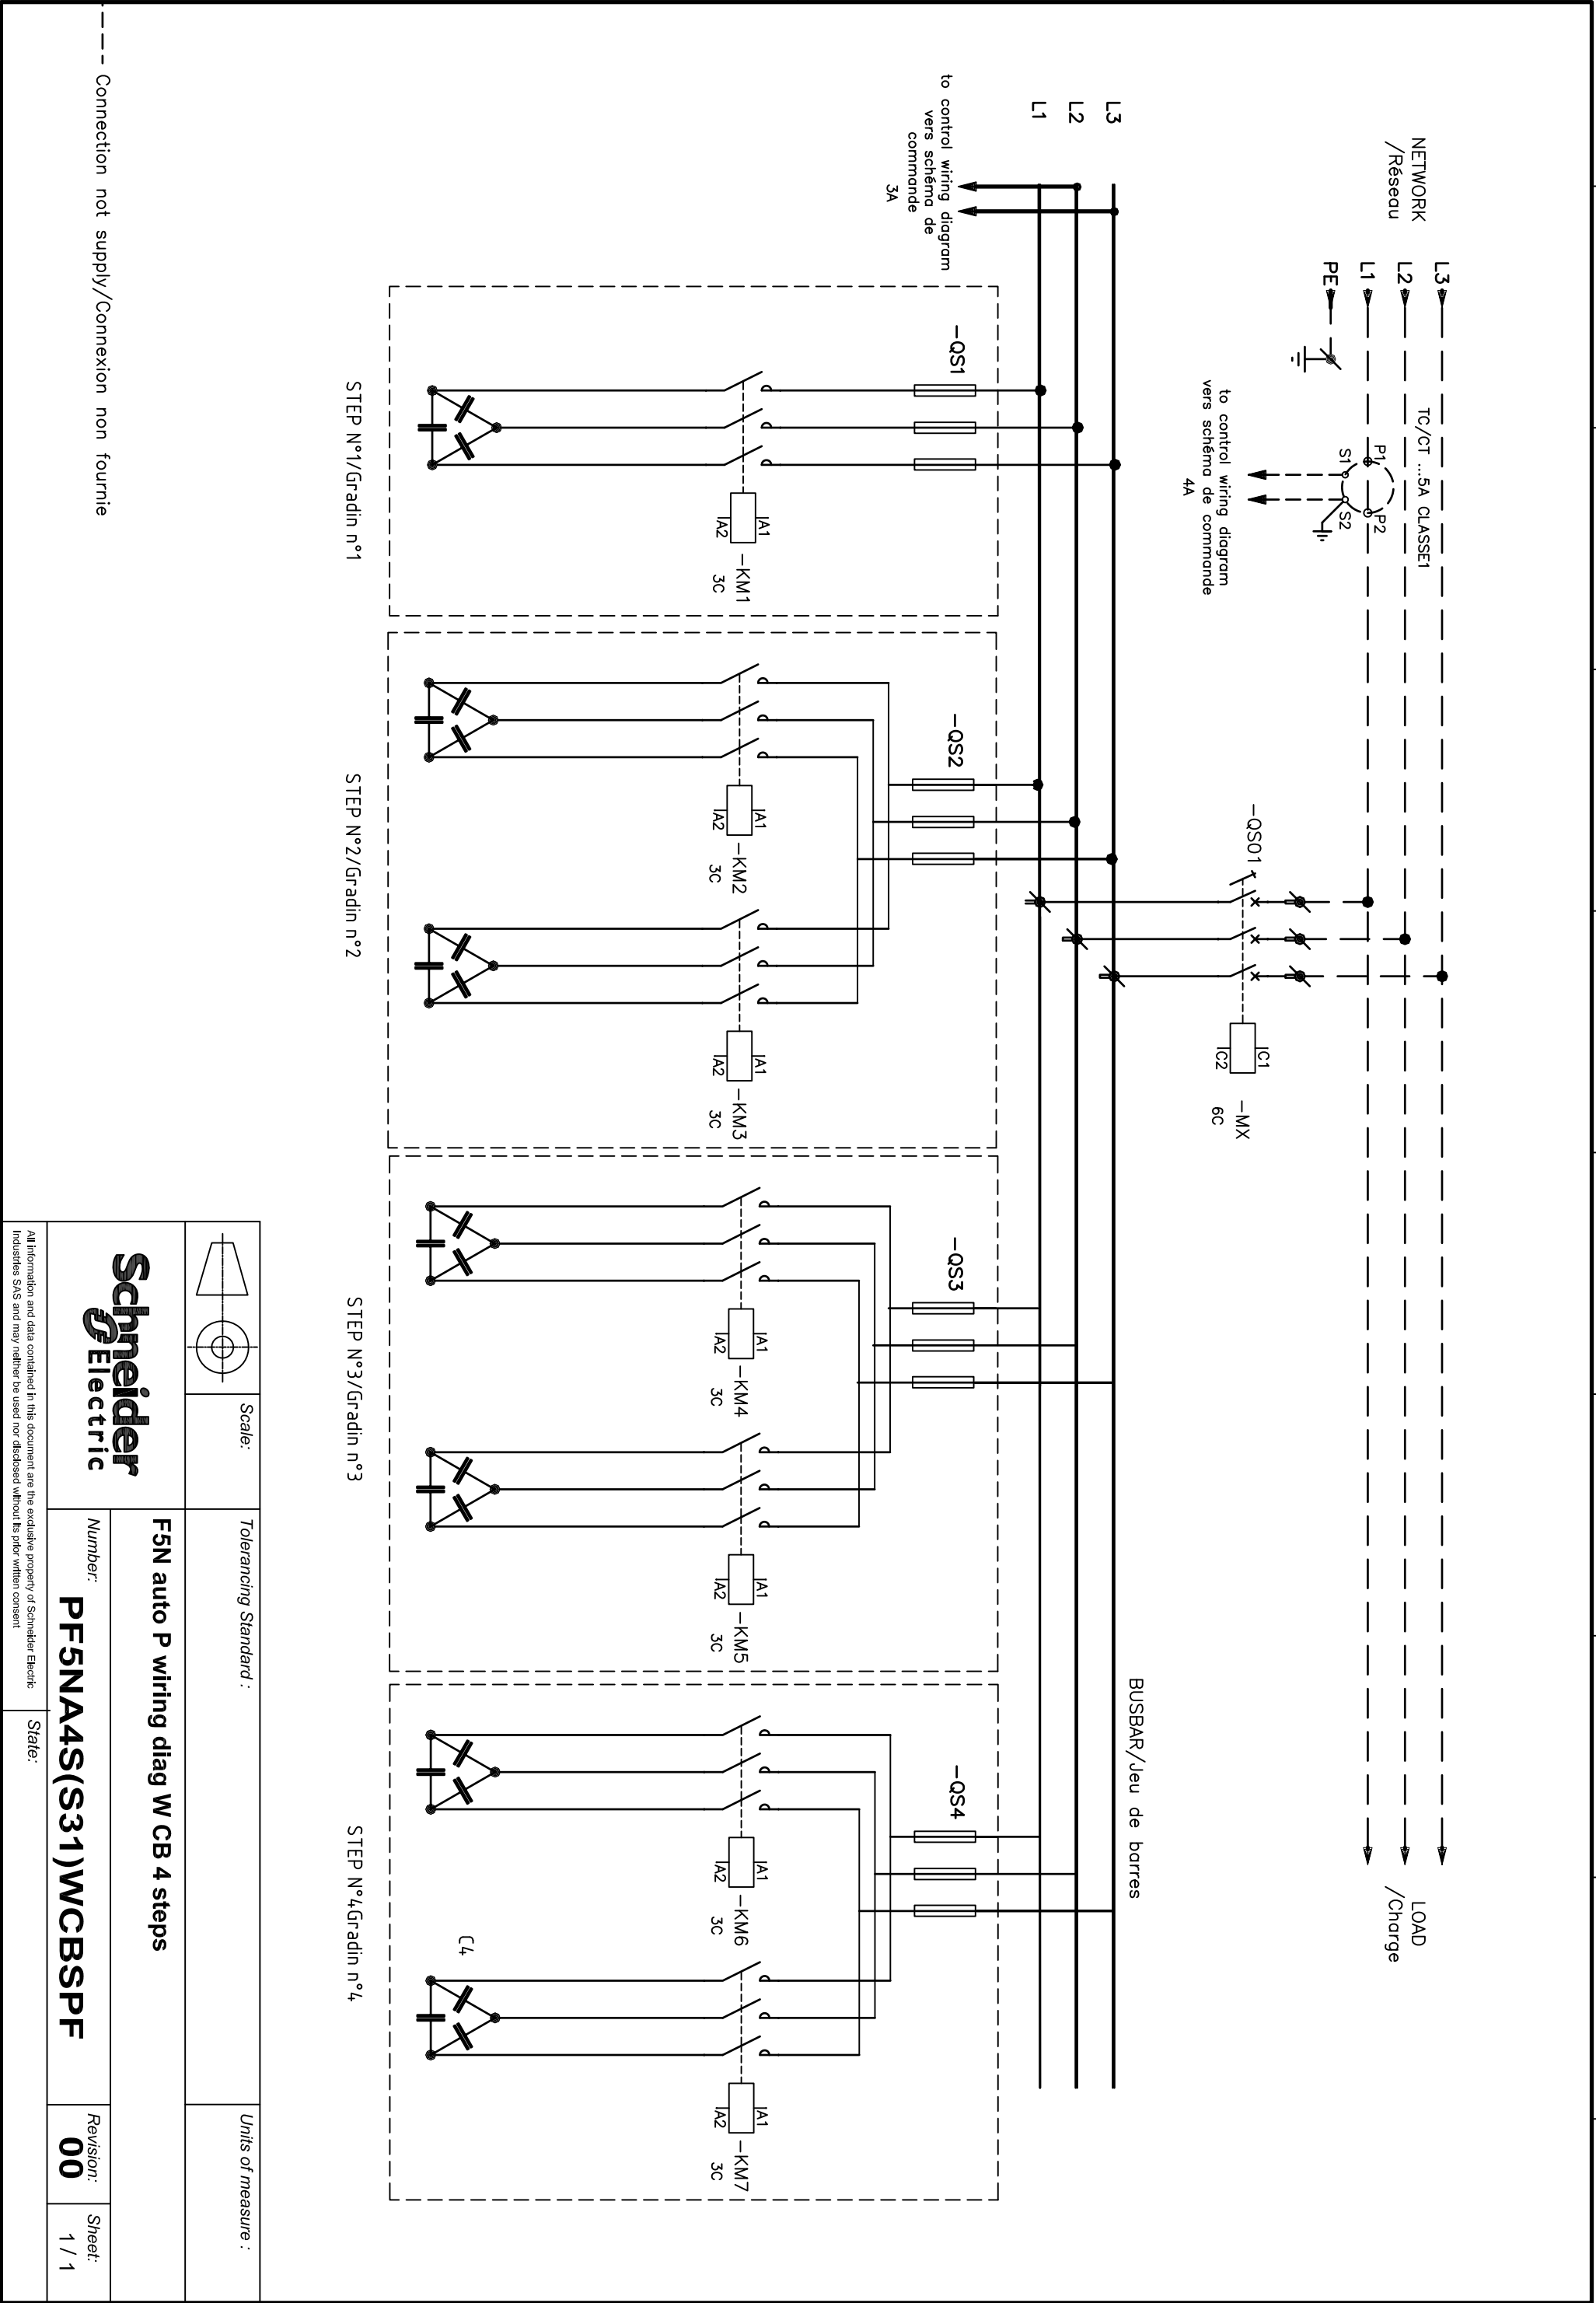

----- Connection not supply/Connexion non fournie

	Scale:	Tolerancing Standard :	Units of measure :
--	--------	------------------------	--------------------

F5N auto P wiring diag W CB 4 steps

Schneider Electric


Number: PF5NA4S(S31)WCBSPP

Revision: 00

Sheet: 1 / 1

All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent

State:

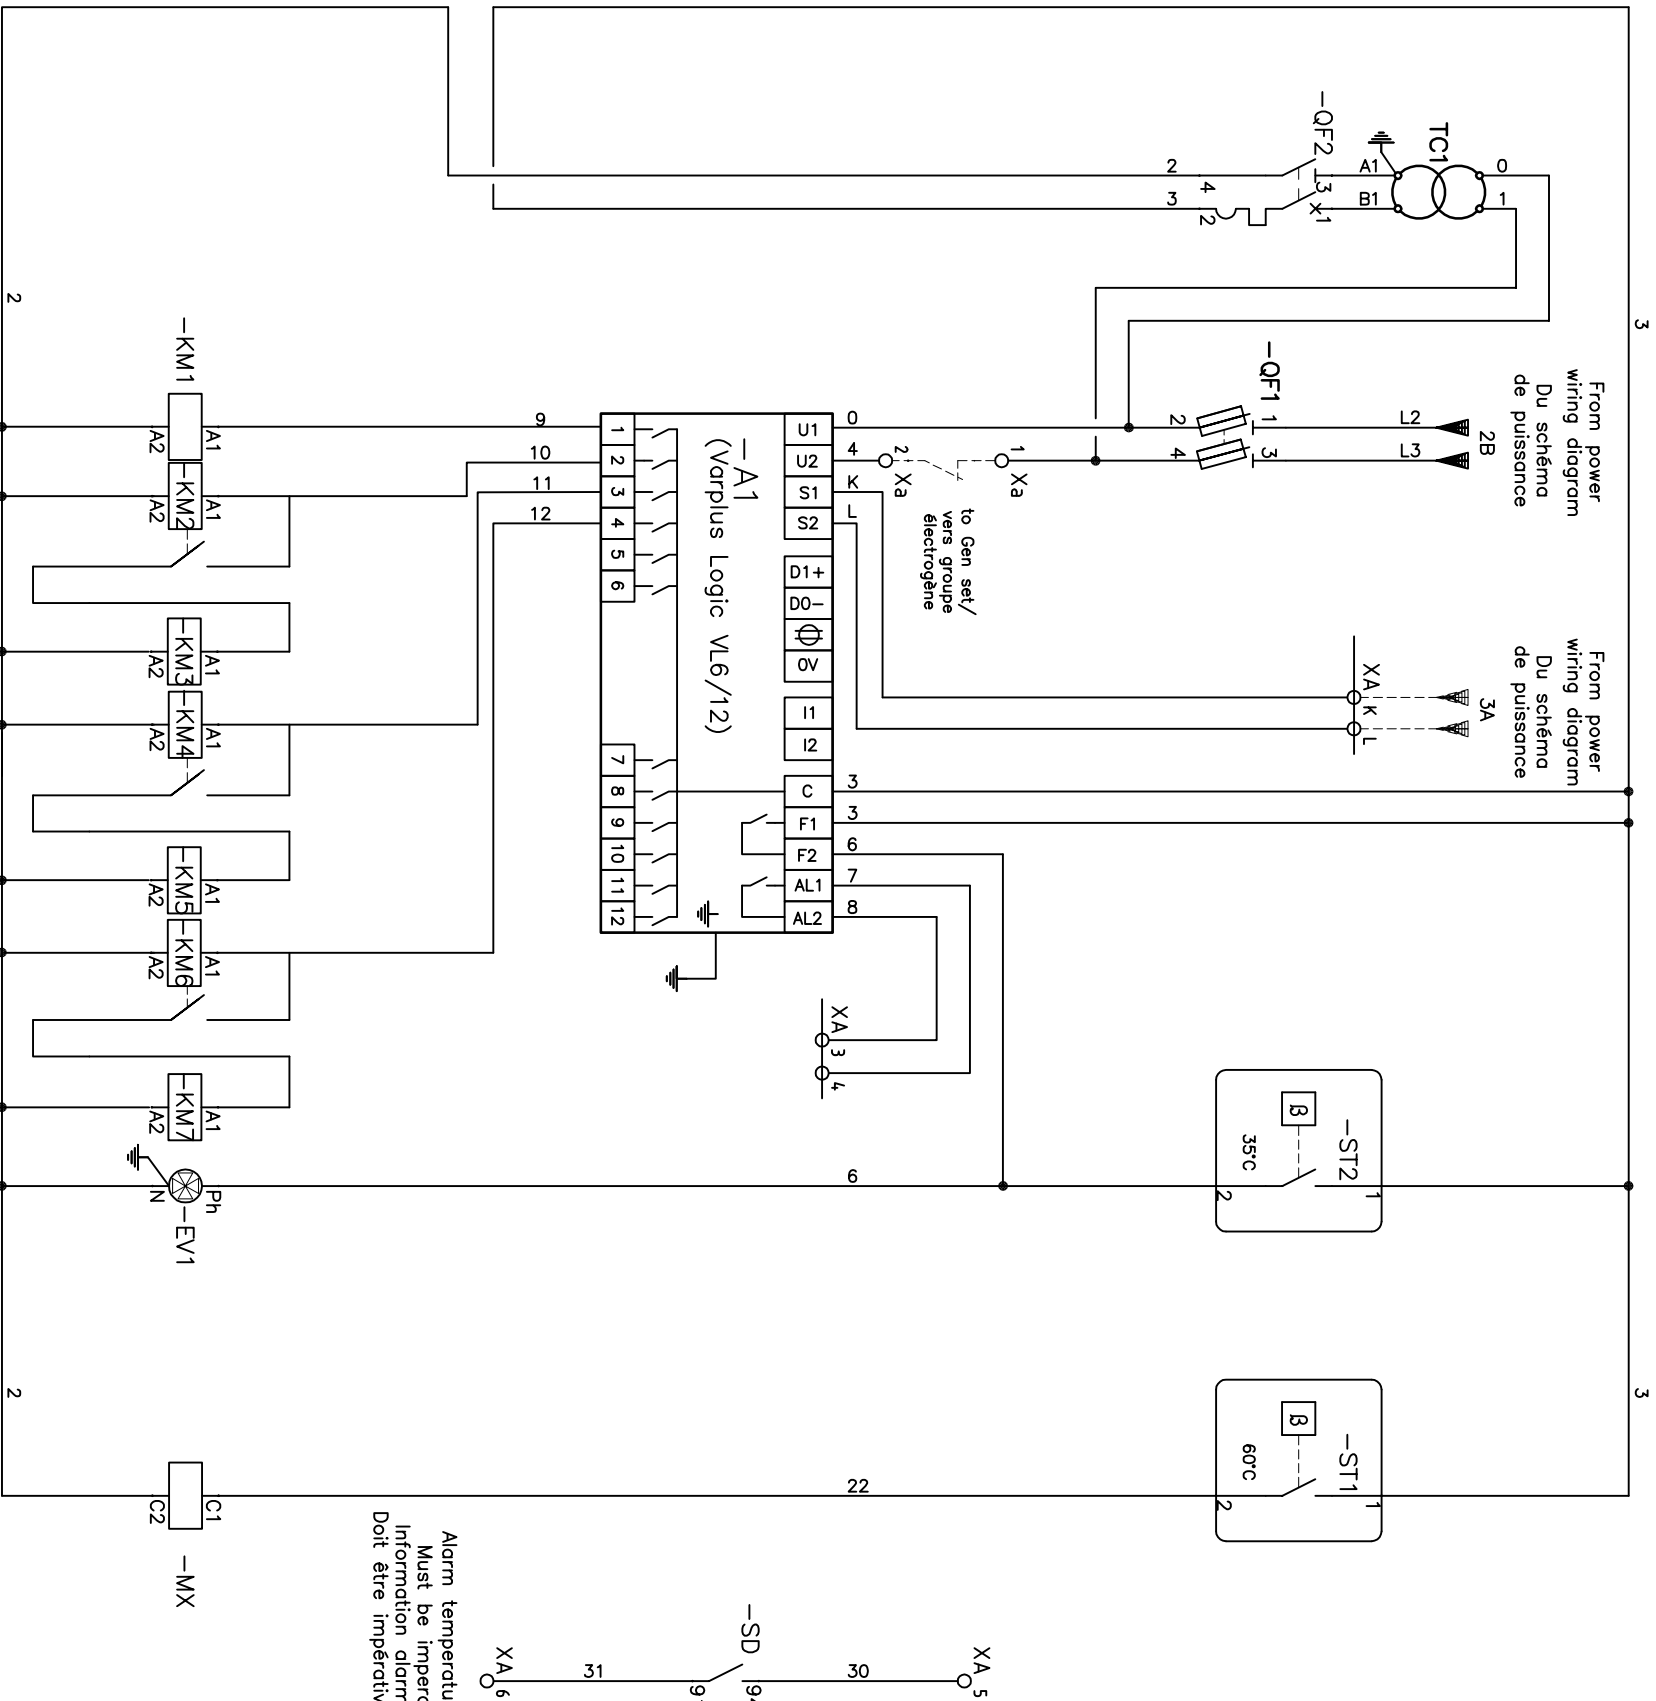

----- Connection not supply/Connexion non fournie

	Scale:	Tolerancing Standard :	Units of measure :
--	--------	------------------------	--------------------

Schneider Electric		F5N CONTROL WIRING DIAGRAM - 4 STEPS - WITH CB	
NETWORK : 400V-415V/50Hz & 400V/60Hz		Revision: 00	
Number: CF5N4S(S31)WCB		Sheet: 1 / 1	

All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent


State:

CUSTOMER TERMINAL BLOCK

Bornier client

Клеммный блок для внешних присоединений

VLVAW1N/VLVAW2N/VLVAW3N
/VLVAF5N/VLVAF6P
VLVAF2P/VLVAF3P/VLVAF5P

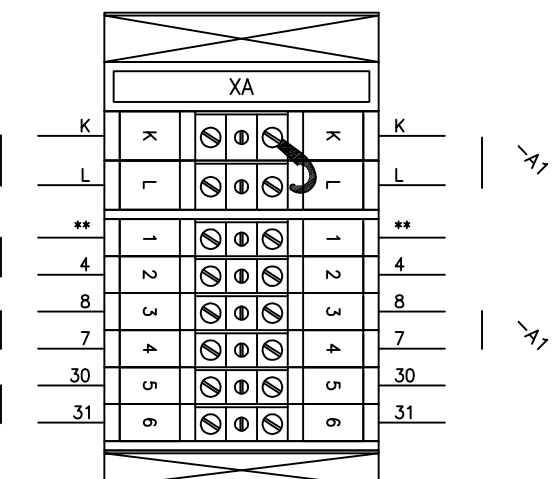

**

= 1 for VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P/
= 1 для контроллеров VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P
= 1 for VL12 VLVAF5N-VLVAF6P /
= 1 для контроллеров VL12 VLVAF5N-VLVAF6P

VLVAW1N/VLVAW2N/VLVAW3N
/VLVAF5N/VLVAF6P
VLVAF2P/VLVAF3P/VLVAF5P

Gen set/Генераторная установка
PFC alarm/Аларме температурного режима
PFC current measure/Mesure courant régulateur/
Измерение тока
Alarm temperature information/Information alarme température
Сигнализация по температурному режиму



Scale:

Tolerancing Standard :

Units of measure :

Schneider
Electric

CUSTOMER TERMINAL BLOCKS
BORNIER CLIENT

Number: **S1B9989700**

Revision: **06** Sheet: **1 / 1**

All information and data contained in this document are the exclusive property of Schneider Electric.
Indicate the SAE and may either be used for reference without the right to copy.

State: