


# Product Environmental Profile

## EA9R C10 RCBO






## General information

Representative product	EA9R C10 RCBO - EA9RN2C1030C
Description of the product	The functional unit of the Easy 9 Vigi C65 ELE RCBO is to provide protection against over current, short circuit, and leakage current in circuit for 20 years.
Functional unit	<p>Protect during 20 years the installation against overloads and short-circuits and people and premises at risk of fire or explosion against insulation defects in circuit with assigned voltage 230/400 VAC (Ue) and rated current 10A (In). This protection is ensured in accordance with the following parameters:</p> <ul style="list-style-type: none"> <li>- Number of poles 2p</li> <li>- Rated breaking capacity 6 kA Icn</li> <li>- Tripping curve C</li> <li>- Sensitivity 30 mA</li> <li>- Type of differential protection 2p</li> </ul>



## Constituent materials

Reference product mass 372.78 g including the product, its packaging and additional elements and accessories

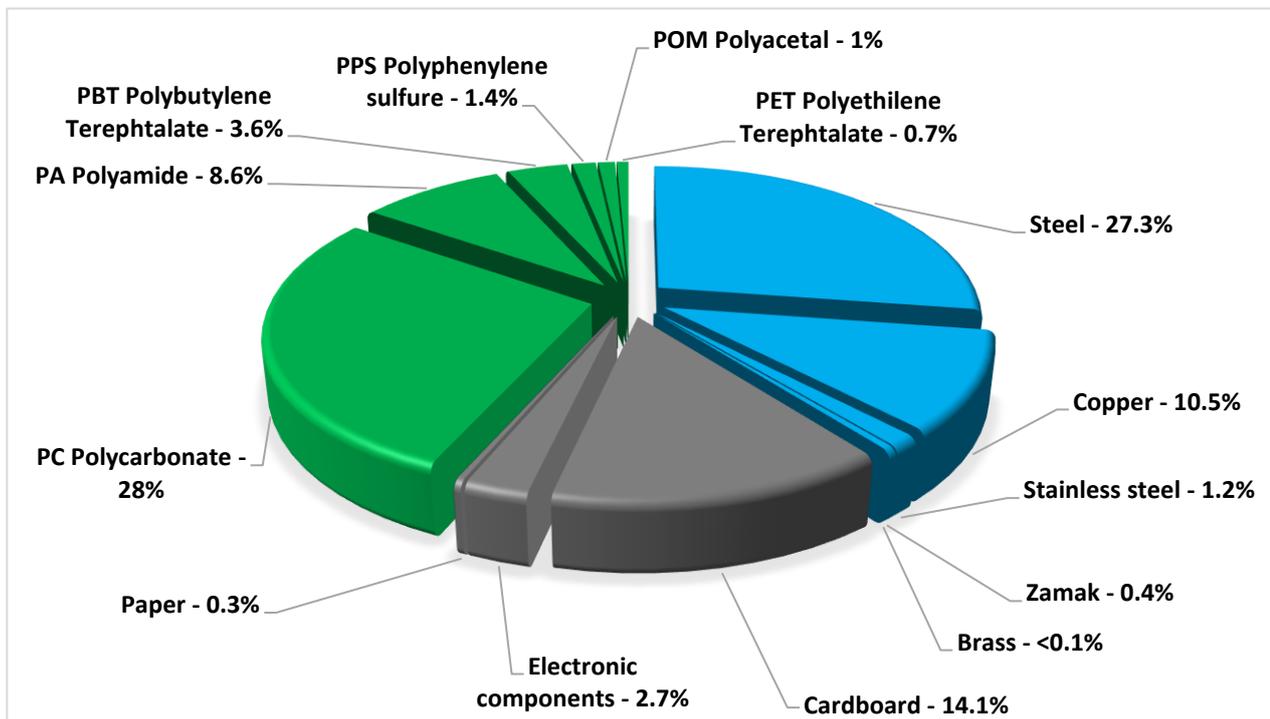

Plastics	43.3%
Metals	39.4%
Others	17.3%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium, flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), or phthalates (Bis(2-ethylhexyl) phthalate - DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The EA9R C10 RCBO presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 55.8 g, consisting of cardboard(98%), paper(2%)
<b>Installation</b>	Ref EA9RN2C1030C does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains Plastic parts with brominated FR(11.3g), Electronic card (9.6g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website</p> <p><a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a></p> <p>Recyclability potential: <b>41%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>




## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Differential circuit breaker			
<b>Installation elements</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).			
<b>Use scenario</b>	Load rate: 50% of In Use time rate: 30% of RLT			
<b>Geographical representativeness</b>	China			
<b>Technological representativeness</b>	The functional unit of the Easy 9 Vigi C65 ELE RCBO is to provide protection against over current, short circuit, and leakage current in circuit for 20 years.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN

Compulsory indicators		EA9R C10 RCBO - EA9RN2C1030C					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	5.59E-04	5.59E-04	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.31E-02	6.94E-03	2.20E-04	1.26E-05	5.79E-03	1.05E-04
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	4.26E-03	2.65E-03	5.06E-05	3.06E-06	1.53E-03	3.21E-05
Contribution to global warming	kg CO <sub>2</sub> eq	9.19E+00	3.73E+00	4.81E-02	3.02E-03	5.35E+00	6.90E-02
Contribution to ozone layer depletion	kg CFC11 eq	4.04E-07	3.59E-07	9.74E-11	0*	4.26E-08	2.74E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.60E-03	8.85E-04	1.57E-05	9.40E-07	6.85E-04	1.06E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	2.86E-02	2.26E-02	4.30E-06	0*	5.97E-03	5.20E-05
Total Primary Energy	MJ	1.38E+02	4.97E+01	6.80E-01	3.94E-02	8.75E+01	5.00E-01

ENVPEP1509012\_V2 - Product Environmental Profile - EA9R C10 RCBO

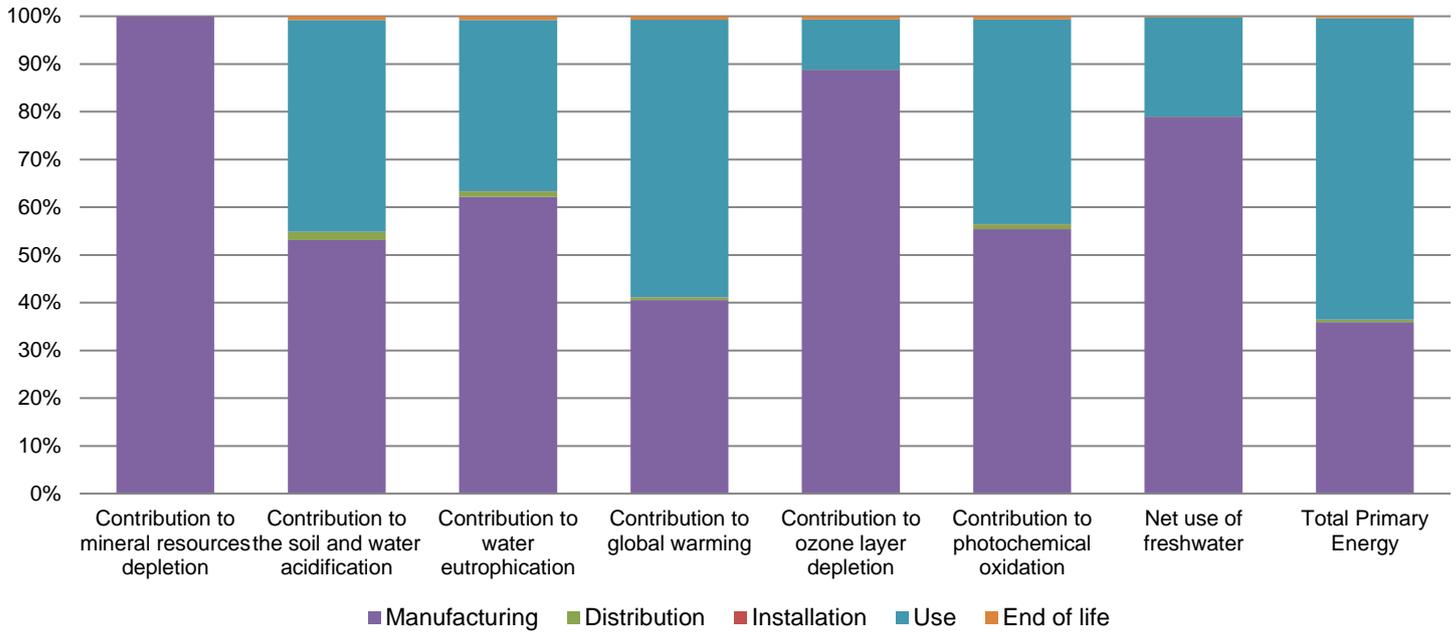

Optional indicators		EA9R C10 RCBO - EA9RN2C1030C						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	1.12E+02	2.96E+01	6.76E-01	3.91E-02	8.08E+01	4.03E-01	
Contribution to air pollution	m³	1.15E+03	5.92E+02	2.05E+00	1.20E-01	5.55E+02	3.63E+00	
Contribution to water pollution	m³	1.73E+03	1.45E+03	7.91E+00	4.58E-01	2.66E+02	4.76E+00	
Resources use		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.14E-02	2.14E-02	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	5.54E+00	1.06E+00	9.06E-04	0*	4.49E+00	0*	
Total use of non-renewable primary energy resources	MJ	1.33E+02	4.86E+01	6.79E-01	3.94E-02	8.30E+01	5.00E-01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.15E+00	6.61E-01	9.06E-04	0*	4.49E+00	5.45E-04	
Use of renewable primary energy resources used as raw material	MJ	3.95E-01	3.95E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.25E+02	4.05E+01	6.79E-01	3.94E-02	8.30E+01	5.00E-01	
Use of non renewable primary energy resources used as raw material	MJ	8.15E+00	8.15E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.58E+01	1.51E+01	0*	0*	1.72E-01	5.37E-01	
Non hazardous waste disposed	kg	2.57E+00	1.60E+00	1.71E-03	4.10E-04	9.70E-01	1.51E-03	
Radioactive waste disposed	kg	1.18E-03	1.15E-03	1.22E-06	0*	3.19E-05	2.51E-06	
Other environmental information		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.25E-01	3.53E-02	0*	5.55E-02	0*	1.34E-01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	1.22E-02	0*	0*	0*	0*	1.22E-02	
Exported Energy	MJ	1.76E-04	1.66E-05	0*	1.60E-04	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the Abiotic depletion(elements,ultimate reserves), Acidification potential of soil and water, Eutrophication, Ozone layer depletion ODP steady state, Photochemical oxidation, Net use of freshwater.

The use phase is the life cycle phase which has the greatest impact on the Global warming, Total Primary Energy.

*Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.*

<i>Registration number</i>	ENVPEP1509012_V2	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	08/2021	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP1509012\_V2

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

08/2021