

# Product Environmental Profile

## Lexium 62 DC Link Support Module






## General information

Representative product	Lexium 62 DC Link Support Module -LXM62LS18A01000
Description of the product	The Lexium 62 DC Link Support Module LXM62LS18A01000 can be used with the Lexium 62 and Lexium 62 ILM system. The Lexium 62 DC Link Support Module is a passive module with capacitors and one CN1 connection.
Functional unit	To store energy for Pac Drive 3 System 100% of the time for 60 000 hours continuous operating hours.



## Constituent materials

Reference product mass 3752,43 g including the product, its packaging and additional elements and accessories

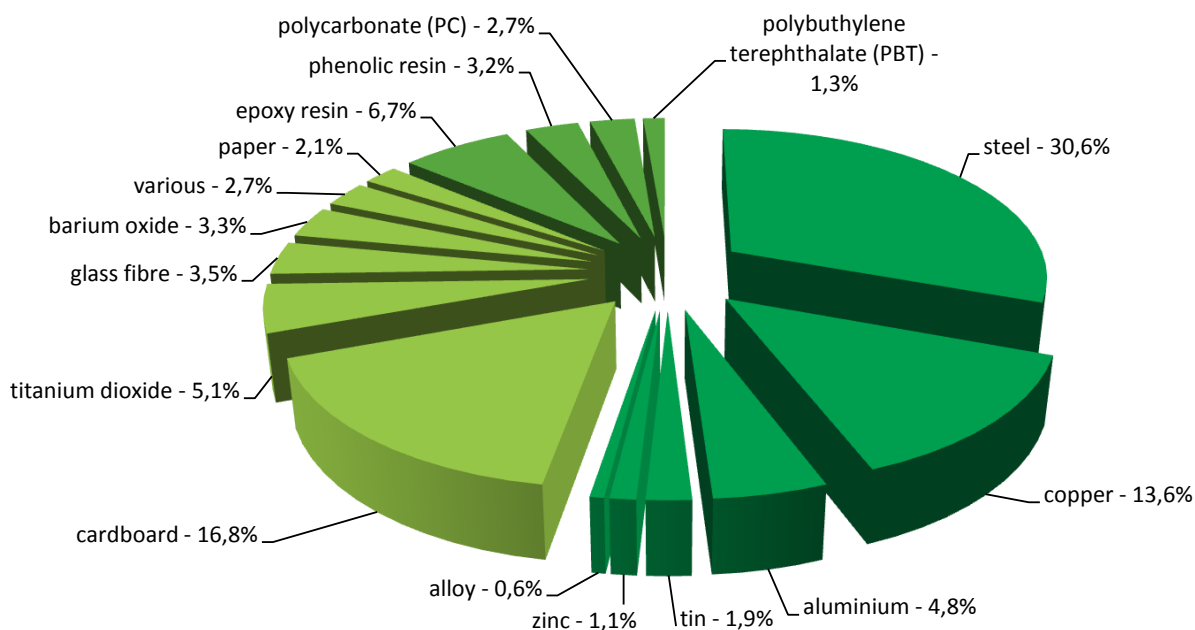

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information


The Lexium 62 DC Link Support Module presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive
	Packaging weight is 665,7 g, consisting of cardboard ( 96,80%), paper ( 0,8%), polyethylene film (0,3%), polycarbonate (CD - 2,09%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials
	This product contains Electronic card ( 1790g ) , 32 Electrolytic capacitors (33 g) and polycarbonate housing parts ( 85 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.
	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). Recyclability potential: <b>41%</b>

## Environmental impacts

<b>Reference life time</b>	60 000 hours			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	The product is in active mode 100% of the time with power losses of 21,10W for 60000 hours.			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The Lexium 62 DC Link Support Module LXM62LS18A01000 can be used with the Lexium 62 and Lexium 62 ILM system. The Lexium 62 DC Link Support Module is a passive module with capacitors and one CN1 connection.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Germany	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Lexium 62 DC Link Support Module - LXM62LS18A01000					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	9,59E-03	9,56E-03	0*	0*	3,41E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	5,73E+00	7,15E-02	2,21E-03	0*	5,65E+00	1,51E-03
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	2,30E-01	1,67E-02	5,09E-04	4,73E-05	2,12E-01	5,57E-04
Contribution to global warming	kg CO <sub>2</sub> eq	7,89E+02	3,90E+01	4,84E-01	0*	7,48E+02	1,43E+00
Contribution to ozone layer depletion	kg CFC11 eq	1,86E-04	4,21E-06	0*	0*	1,82E-04	1,00E-07
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2,80E-01	1,20E-02	1,58E-04	0*	2,67E-01	1,32E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2,16E+00	2,07E-01	0*	0*	1,95E+00	9,26E-04
Total Primary Energy	MJ	1,61E+04	9,28E+02	6,85E+00	0*	1,51E+04	7,84E+00

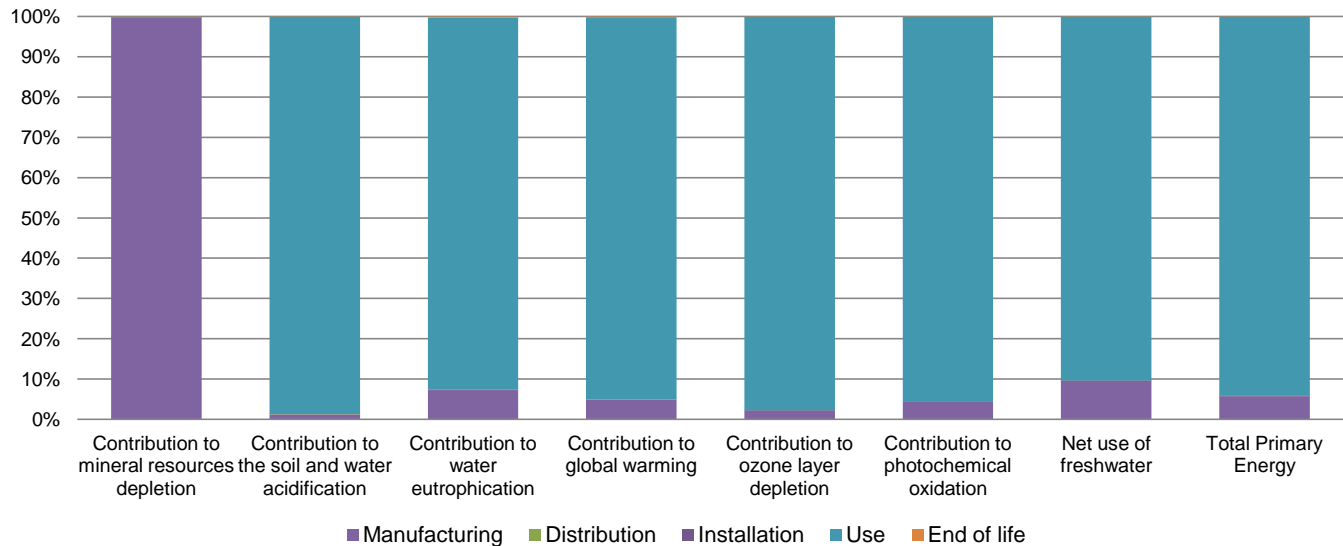


Optional indicators		Lexium 62 DC Link Support Module - LXM62LS18A01000					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	8,25E+03	5,36E+02	6,80E+00	8,90E-01	7,70E+03	6,61E+00
Contribution to air pollution	m³	3,83E+04	6,20E+03	2,06E+01	6,97E+00	3,21E+04	4,65E+01
Contribution to water pollution	m³	3,59E+04	4,32E+03	7,96E+01	7,50E+00	3,14E+04	8,22E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,13E+00	1,13E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,09E+03	1,08E+01	0*	0*	1,08E+03	0*
Total use of non-renewable primary energy resources	MJ	1,50E+04	9,18E+02	6,84E+00	0*	1,41E+04	7,83E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,09E+03	1,08E+01	0*	0*	1,08E+03	0*
Use of renewable primary energy resources used as raw material	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,50E+04	8,96E+02	6,84E+00	0*	1,41E+04	7,83E+00
Use of non renewable primary energy resources used as raw material	MJ	2,12E+01	2,12E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2,94E+01	2,13E+01	0*	1,32E+00	0*	6,73E+00
Non hazardous waste disposed	kg	2,80E+03	7,44E+00	0*	0*	2,80E+03	0*
Radioactive waste disposed	kg	2,29E+00	5,49E-03	0*	0*	2,28E+00	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1,46E+00	1,78E-01	0*	1,83E-03	0*	1,28E+00
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3,42E-01	2,50E-02	0*	7,15E-04	0*	3,16E-01
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00095-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH24	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Date of issue	07-2016	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS  
 Schneider Electric Country Customer Care Center  
 35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00095-V01.01-EN

© 2016 - Schneider Electric – All rights reserved

07-2016



