# **Product Environmental Profile**

**VPIS V3: Voltage Presence Indicator System** 

Easergy range








#### **General information**

Representative product	VPIS V3 : Voltage Presence Indicator System - VPI62618			
Description of the product	Voltage Presence Indicator System (VPIS)			
Description of the range	Smart devices for grid automation  The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.			
Functional unit	In compliance with the IEC 62271-206 standard, indicate the presence of voltage in medium voltage equipment (typically from 1 to 52 KV), 24h per day, for 10 years of continuous operations in Europe.  The 10 years of operations in this document are defined for calculation purposes only, and are not representative of the effective lifetime of this range products, which is more than 10 years.			

### Constituent materials

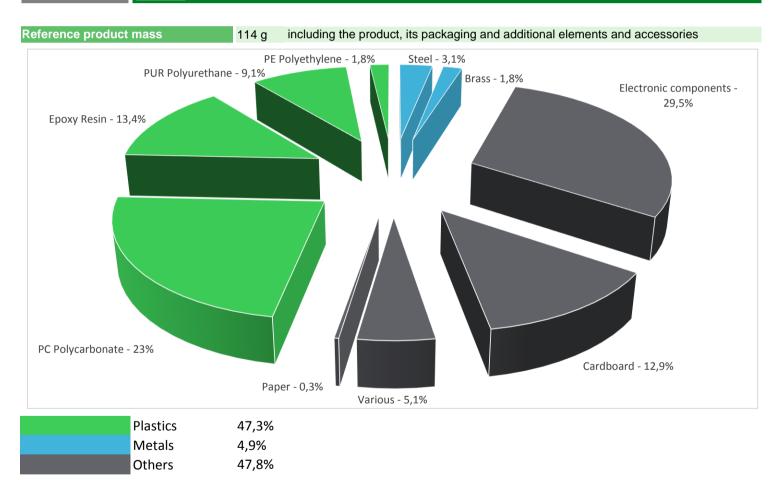

## **Substance assessment**

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>


#### **Additional environmental information**

The VPIS V3 : Voltage Presence Indicator System presents the following relevent environmental aspects							
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
Distribution	Packaging weight is 18 g, consisting of Paper / cardboard (95%), PE film (5%)						
Distribution	Packaging recycled materials is 88% of total packaging mass.						
	Product distribution optimised by setting up local distribution centres						
Installation	This product does not require any installation operations.						
Use	The product does not require special maintenance operations.						
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
End of life	This product contains electronic cards (16 g) that should be separated from the stream of waste so as to optimize end- of-life treatment.						
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page						
	Recyclability potential:  Based on "ECO'DEEE recyclability and recoverability calculation method"  (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						

## **Environmental impacts**

Reference life time	10 years					
Product category	Active products					
Installation elements	End of life of the packaging					
Use scenario	The product is in active mode 100% of the time with a power use of 5 mW for 10 years.					
Geographical representativeness	Voltage Presence Indicator System (VPIS)					
Technological representativeness						
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27		

Compulsory indicators	VPIS V3 : Voltage Presence Indicator System - VPI62618						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	8,18E-05	8,18E-05	0*	0*	1,86E-08	0*
Contribution to the soil and water acidification	$kg SO_2 eq$	2,86E-03	1,87E-03	6,72E-05	4,34E-07	8,95E-04	3,04E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	2,09E-03	2,01E-03	1,55E-05	0*	5,40E-05	8,88E-06
Contribution to global warming	kg CO <sub>2</sub> eq	1,16E+00	9,13E-01	1,47E-02	0*	2,15E-01	1,79E-02
Contribution to ozone layer depletion	kg CFC11 eq	1,54E-07	1,40E-07	2,98E-11	0*	1,40E-08	7,19E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2,49E-04	1,92E-04	4,79E-06	2,96E-08	4,92E-05	3,12E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	8,12E-01	3,38E-02	0*	0*	7,78E-01	0*
Total Primary Energy	MJ	2,05E+01	1,58E+01	2,08E-01	0*	4,29E+00	1,46E-01

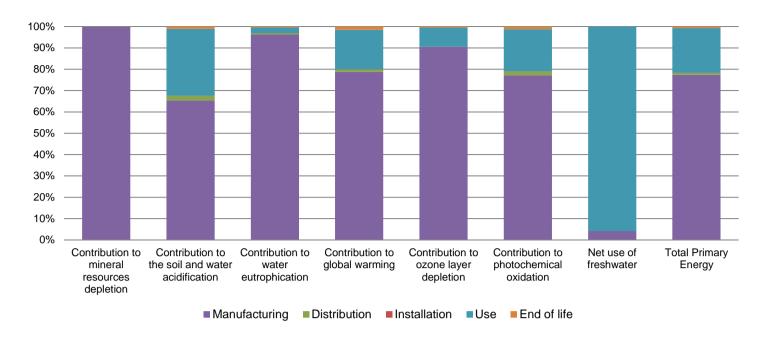

Optional indicators	VPIS V3 : Voltage Presence Indicator System - VPI62618						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,70E+01	1,42E+01	2,07E-01	0*	2,44E+00	1,33E-01
Contribution to air pollution	m³	9,58E+01	8,48E+01	6,26E-01	0*	9,24E+00	1,06E+00
Contribution to water pollution	m³	3,17E+02	3,04E+02	2,42E+00	0*	8,86E+00	1,32E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,49E-02	1,49E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	7,94E-01	2,49E-01	2,77E-04	0*	5,45E-01	1,60E-04
Total use of non-renewable primary energy resources	MJ	1,97E+01	1,56E+01	2,08E-01	0*	3,74E+00	1,45E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	7,48E-01	2,02E-01	2,77E-04	0*	5,45E-01	1,60E-04
Use of renewable primary energy resources used as raw material	MJ	4,66E-02	4,66E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,71E+01	1,30E+01	2,08E-01	0*	3,74E+00	1,45E-01
Use of non renewable primary energy resources used as raw material	MJ	2,63E+00	2,63E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4,69E-01	2,96E-01	0*	2,18E-03	1,12E-04	1,70E-01
Non hazardous waste disposed	kg	1,41E+00	6,05E-01	5,23E-04	0*	8,00E-01	4,44E-04
Radioactive waste disposed	kg	9,22E-04	3,87E-04	3,72E-07	0*	5,34E-04	7,13E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4,67E-02	3,41E-03	0*	1,58E-02	0*	2,74E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3,25E-03	4,12E-04	0*	0*	0*	2,83E-03
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

The environmental impacts of the other products in this homogeneous environmental family, except for the mineral resources depletion indicator, can be extrapolated proportionally to the energy consumption values. On the other hand, the impact on the mineral resources depletion can be extrapolated proportionally to the mass of the reference product.

Other products in this family: VPI62601, VPI62602, VPI62603, VPI62604, VPI62605, VPI62606, VPI62607, VPI62608, VPI62609, VPI62611, VPI62612, VPI62613, VPI62614, VPI62615, VPI62616, VPI62619

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00269-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH26	Supplemented by	PSR-0005-ed2-FR-2016 03 29
Date of issue	12/201/	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1:2014

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS

Denis MONGELLAZ

denis.mongellaz@schneider-electric.com

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00269-V01.01-EN

Published by Schneider Electric

© 2017 - Schneider Electric - All rights reserved

12/2017