

Product Environmental Profile

ServoDrive Lexium16D PT 1~220VAC 1500W

Easy Lexium 16




General information

Reference product	ServoDrive Lexium16D PT 1~220VAC 1500W - LXM16DU15M2X
Description of the product	The main function of the LXM18 servo drive product is the position, speed and torque control and variation of an AC brushless synchronous motor for industrial applications.
Description of the range	This range consists of products LXM16 servo drive, with power from 100w to 1500w for operation on 200-230V AC control supply.
	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	During the 10 years, the Servo Driver to adapt the position, speed and torque of synchronous motor to the machine's operating point. The function unit is accordance with the following technical data: -Rated supply voltage:220 V (- 15...10 %) for single phase. -Continuous Power: 1500 W at 220 V -IP20 in accordance with the standard IEC 60529.

Constituent materials

Reference product mass	1708 g including the product, its packaging and additional elements and accessories
------------------------	---

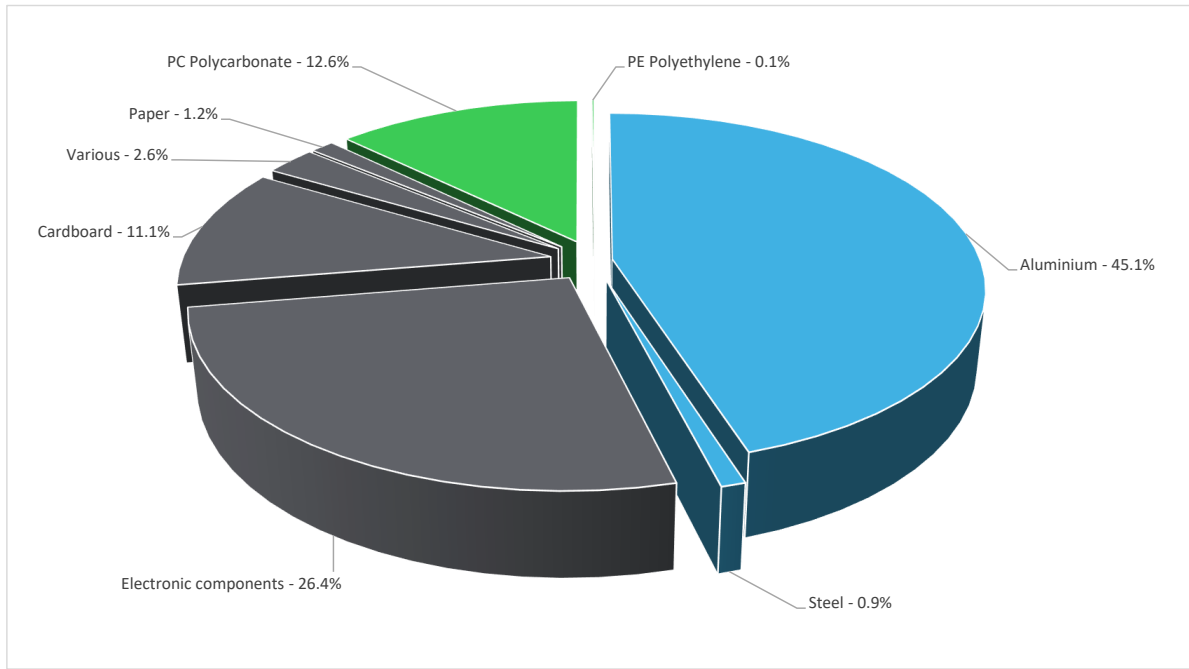

Plastic	12.70%
Metals	46.00%
Others	41.30%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<https://www.se.com/ww/en/work/support/green-premium/>

Additional environmental information

End Of Life	Recyclability potential:	52%	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	------------	--

Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	Ref LXM16DU15M2X does not require any installation operations, the disposal of the packaging materials are accounted for 12.18% during the installation phase (including transport to disposal).			
Use scenario	The product is in active mode 80% of the time with a power use of 86W and in stand-by mode 20% of the time with a power use of 3W, for 10 years.			
Technological representativeness	The main function of the LXM18 servo drive product is the position, speed and torque control and variation of an AC brushless synchronous motor for industrial applications.			
Geographical representativeness	China & India			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN

Detailed results, including all the optional indicators mentioned in PCRred4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		ServoDrive Lexium16D PT 1~220VAC 1500W - LXM16DU15M2X						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	5.89E+03	5.76E+01	0*	0*	5.83E+03	1.38E+00	-1.19E+01
Contribution to climate change-fossil	kg CO2 eq	5.89E+03	5.72E+01	0*	0*	5.83E+03	1.36E+00	-1.16E+01
Contribution to climate change-biogenic	kg CO2 eq	1.21E+00	4.00E-01	0*	1.68E-02	7.75E-01	1.68E-02	-3.55E-01
Contribution to climate change-land use and land use change	kg CO2 eq	9.16E-08	7.38E-08	0*	2.76E-09	0*	1.51E-08	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.18E-05	8.44E-06	0*	2.50E-08	3.33E-05	5.34E-08	-1.60E-06
Contribution to acidification	mol H+ eq	4.43E+01	4.14E-01	0*	0*	4.38E+01	1.01E-02	-9.34E-02
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	1.22E-03	1.29E-04	0*	2.74E-06	1.07E-03	2.27E-05	-4.63E-05
Contribution to eutrophication marine	kg N eq	4.73E+00	4.34E-02	8.59E-04	0*	4.68E+00	6.38E-03	-6.90E-03
Contribution to eutrophication, terrestrial	mol N eq	5.37E+01	4.63E-01	9.43E-03	0*	5.32E+01	6.87E-03	-7.46E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.58E+01	1.56E-01	2.39E-03	0*	1.56E+01	2.48E-03	-2.55E-02
Contribution to resource use, minerals and metals	kg Sb eq	4.29E-03	4.22E-03	0*	0*	6.68E-05	5.23E-07	-2.65E-04
Contribution to resource use, fossils	MJ	9.45E+04	7.48E+02	0*	0*	9.37E+04	1.35E+01	-1.59E+02
Contribution to water use	m3 eq	3.79E+02	1.39E+01	0*	1.62E-01	2.57E+02	1.08E+02	-3.34E+00

Additional indicators for the French regulation are available as well

Inventory flows Indicators		ServoDrive Lexium16D PT 1~220VAC 1500W - LXM16DU15M2X						
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	8.89E+03	2.50E+01	0*	0*	8.87E+03	0*	-5.08E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	4.15E+00	4.15E+00	0*	0*	0*	0*	-3.74E+00
Contribution to total use of renewable primary energy resources	MJ	8.90E+03	2.91E+01	0*	0*	8.87E+03	0*	-8.82E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	9.44E+04	7.35E+02	0*	0*	9.37E+04	1.35E+01	-1.59E+02
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.23E+01	1.23E+01	0*	0*	0*	0*	-2.35E-02
Contribution to total use of non-renewable primary energy resources	MJ	9.45E+04	7.48E+02	0*	0*	9.37E+04	1.35E+01	-1.59E+02
Contribution to use of secondary material	kg	4.52E-05	4.52E-05	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	9.14E+00	3.23E-01	0*	3.77E-03	5.99E+00	2.82E+00	-7.78E-02
Contribution to hazardous waste disposed	kg	2.38E+02	5.91E+01	0*	0*	1.77E+02	1.50E+00	-2.36E+01
Contribution to non hazardous waste disposed	kg	1.05E+03	3.83E+01	0*	1.23E+00	1.01E+03	3.21E-01	-2.37E+01
Contribution to radioactive waste disposed	kg	6.39E-02	2.33E-02	6.82E-06	1.65E-04	4.04E-02	2.69E-05	-1.47E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	9.91E-01	4.14E-03	0*	2.08E-01	0*	7.78E-01	0.00E+00
Contribution to materials for energy recovery	kg	2.40E-08	2.40E-08	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow
 Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP1806011_V2	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	0	Supplemented by Information and reference documents	PSR-0005-ed2-2016 03 29
Date of issue	2023/10/19	Validity period	www.pep-ecopassport.org 5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

Published by Schneider Electric
©2023 - Schneider Electric – All rights reserved

2023/10/19