

Product Environmental Profile

Acti9 Disbo electrical distribution box






General information

Representative product	DISBO EXTRA 36W 3P NSX 160 A FLUSH FL - A9H336MNS160FD
Description of the product	Electrical Final Distribution Box, intended flush mounted on a plastered wall of brick.
Functional unit	Protect persons during 20 years against direct contact with live parts, provision of initial residential power distribution, and allow grouping of monitoring, control and protection devices with 220/440V AC-50/60Hz, in a single enclosure or a cabinet having the following dimensions 888.3mm x 440mm x 138.2mm, while protecting against mechanical impacts (IK08) and the penetration of solid objects and liquids (IP40) with IEC 61439-3



Constituent materials

Reference product mass 21450 g including the product, its packaging and additional elements and accessories

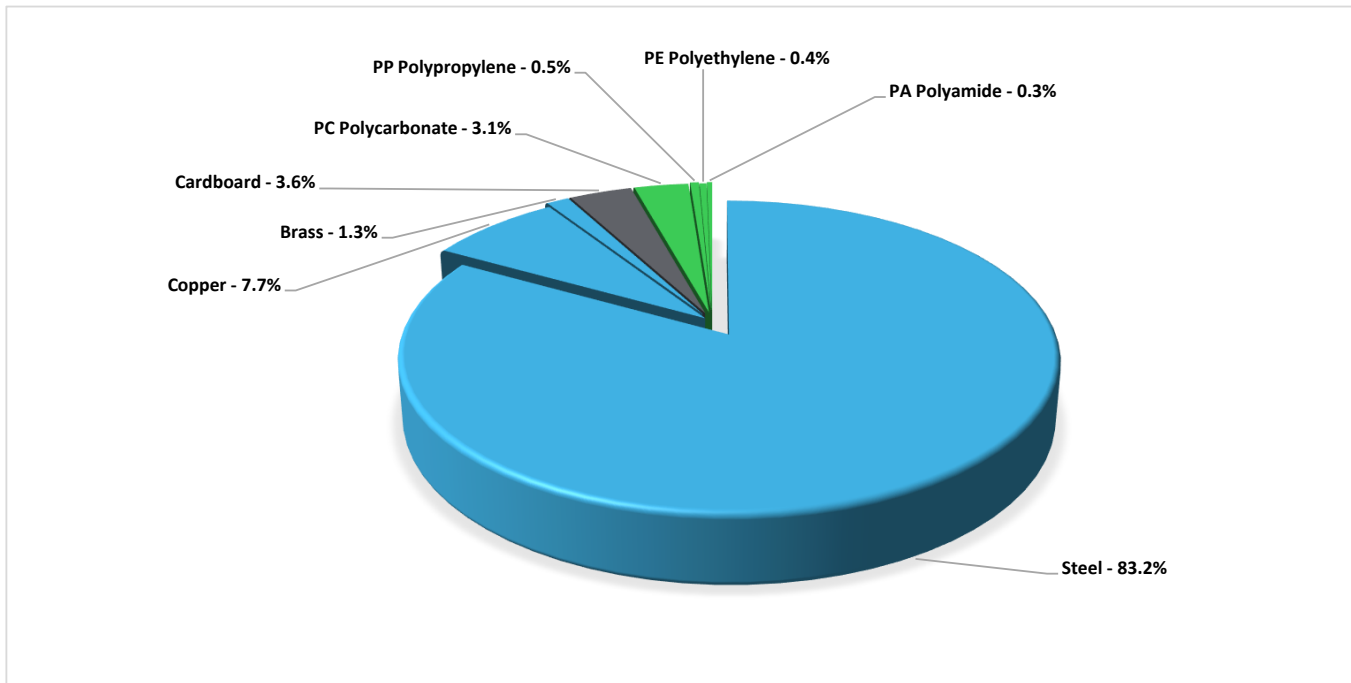

	Plastics	4.3%
	Metals	92.2%
	Others	3.6%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The DISBO EXTRA 36W 3P NSX 160 A FLUSH FL presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified		
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 890.9 g, consisting of cardboard (80.72%), PE film (8.98%), PP (10.3%)		
Installation	Ref A9H336MNS160FD has no special requirement in installation stage. The packaging disposal is considered in installation stage		
Use	The product does not require special maintenance operations.		
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials		
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.		
	Recyclability potential:	95%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	20 years			
Product category	Unequipped enclosures and cabinets			
Installation elements	Packaging disposal is accounted in the installation phase.			
Use scenario	Non applicable for unequipped enclosures and cabinets			
Geographical representativeness	Saudi			
Technological representativeness	Electrical Final Distribution Box, intended flush mounted on a plastered wall of brick.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Saudi	0	0	0

Compulsory indicators		DISBO EXTRA 36W 3P NSX 160 A FLUSH FL - A9H336MNS160FD					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.57E-03	2.57E-03	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2.14E-01	1.96E-01	1.26E-02	2.01E-04	0*	5.51E-03
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	6.32E-02	5.89E-02	2.91E-03	4.82E-05	0*	1.30E-03
Contribution to global warming	kg CO ₂ eq	7.22E+01	6.75E+01	2.77E+00	4.75E-02	0*	1.81E+00
Contribution to ozone layer depletion	kg CFC11 eq	1.91E-06	1.79E-06	5.61E-09	0*	0*	1.14E-07
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2.48E-02	2.33E-02	9.02E-04	1.49E-05	0*	5.97E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	7.87E-01	7.85E-01	2.48E-04	0*	0*	2.19E-03
Total Primary Energy	MJ	2.52E+03	2.45E+03	3.91E+01	6.29E-01	0*	2.78E+01

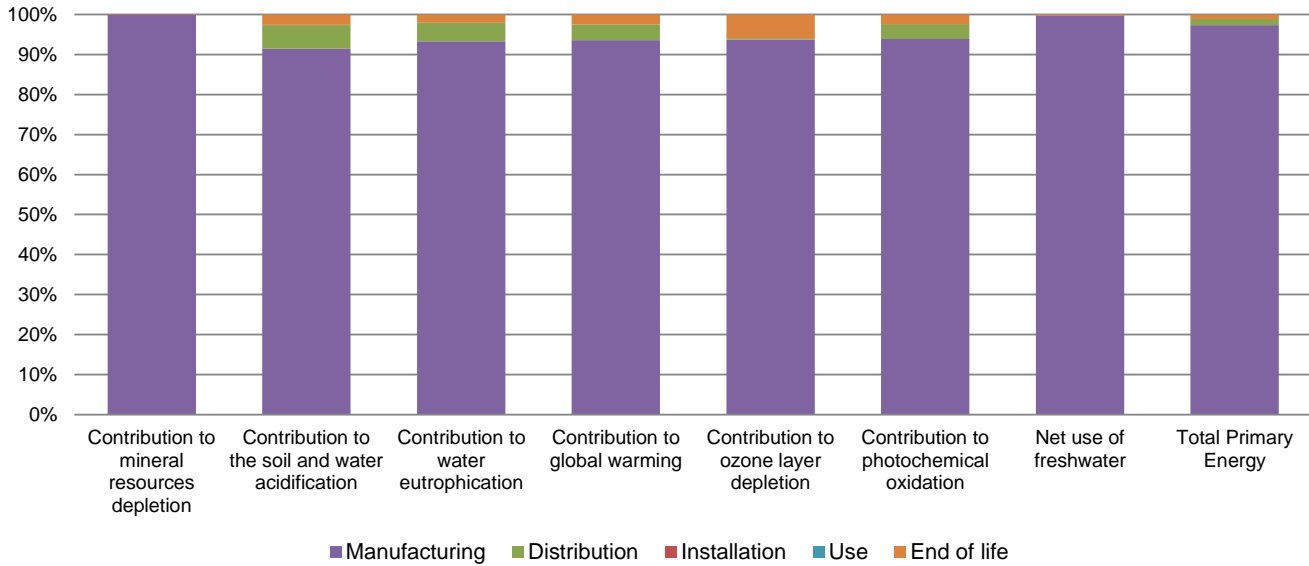

Optional indicators		DISBO EXTRA 36W 3P NSX 160 A FLUSH FL - A9H336MNS160FD						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	7.69E+02	7.07E+02	3.89E+01	6.25E-01	0*	2.23E+01	
Contribution to air pollution	m³	1.75E+04	1.72E+04	1.18E+02	1.90E+00	0*	1.96E+02	
Contribution to water pollution	m³	4.81E+03	4.14E+03	4.55E+02	7.31E+00	0*	2.10E+02	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	7.55E+00	7.55E+00	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	1.24E+01	1.24E+01	5.21E-02	0*	0*	3.12E-02	
Total use of non-renewable primary energy resources	MJ	2.50E+03	2.44E+03	3.91E+01	6.28E-01	0*	2.78E+01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.02E+01	1.01E+01	5.21E-02	0*	0*	3.12E-02	
Use of renewable primary energy resources used as raw material	MJ	2.23E+00	2.23E+00	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.48E+03	2.41E+03	3.91E+01	6.28E-01	0*	2.78E+01	
Use of non renewable primary energy resources used as raw material	MJ	2.36E+01	2.36E+01	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	2.35E+02	2.15E+02	0*	0*	0*	2.02E+01	
Non hazardous waste disposed	kg	1.73E+01	1.71E+01	9.83E-02	5.59E-03	0*	8.58E-02	
Radioactive waste disposed	kg	7.26E-03	7.06E-03	7.00E-05	1.26E-06	0*	1.31E-04	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	2.11E+01	1.98E+00	0*	8.70E-01	0*	1.82E+01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	6.83E-03	0*	0*	0*	0*	6.83E-03	
Exported Energy	MJ	2.28E-03	2.16E-04	0*	2.06E-03	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1903001_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	03/2019	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1903001_V1-EN

© 2017 - Schneider Electric – All rights reserved

03/2019