Product Environmental Profile

Wiser Iconic Switch (2AX)










General information

Representative product	Wiser Iconic Switch (2AX) - 41E2PBSWM-VW
Description of the product	Wiser Iconic Switch (2AX) rated with timer function that can be configured and controlled by the WISER ROOM APP through BLE or Zigbee wireless interface.
Functional unit	The product used for Room Light and Exaust Fan Control for 10 years. It comply with standard AS/NZS 60669.2.1 and AS/NZS CISPR-15. The function unit is accordance with the following technical: - Supply Voltage - 220 to 240V, 50Hz, - IP20 (Indoor use only)

Constituent materials

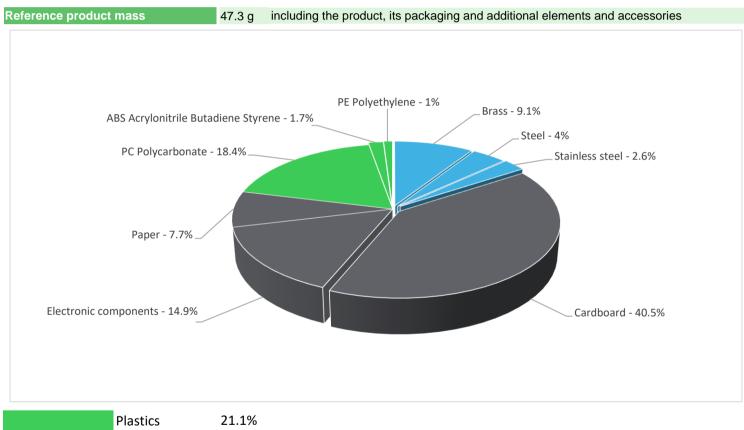

Plastics 21.1%

Metals 15.7%

Others 63.1%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate – BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

Additional environmental information

	The Wiser Iconic Switch (2AX) presents the following relevent environmental aspects					
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 24.3 g, consisting of cardboard (84.2%), paper (14.0%), PE (1.8%)					
Installation	Ref 41E2PBSWM-VW does not require any installation operations.					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
	This product contains electronic card (12g) that should be separated from the stream of waste so as to optimize end- of-life treatment.					
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website					
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page					
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 21% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					




Reference life time	10 years						
Product category	Other equipments - Active product						
Installation elements	No special components needed						
Use scenario	The product is in active mode 20% of the time with a power use of 0.36W and in stand-by mode 80% of the time with a power use of 0.26W, for 10 years						
Geographical representativeness	Australia						
Technological representativeness	Wiser Iconic Switch (2AX) rated with timer function that can be configured and controlled by the WISER ROOM APP through BLE or Zigbee wireless interface.						
Energy model used	Manufacturing	Installation	Use	End of life			
	Energy model used: Vietnam	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU			

Compulsory indicators	Wiser Iconic Switch (2AX) - 41E2PBSWM-VW						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.90E-04	1.90E-04	0*	0*	1.08E-07	0*
Contribution to the soil and water acidification	$kg SO_2 eq$	2.93E-02	1.25E-03	2.79E-05	6.16E-06	2.80E-02	1.28E-05
Contribution to water eutrophication	kg PO ₄ 3- eq	7.88E-03	4.68E-04	6.42E-06	2.70E-06	7.39E-03	6.45E-06
Contribution to global warming	kg CO ₂ eq	2.79E+01	5.94E-01	6.10E-03	0*	2.73E+01	2.04E-02
Contribution to ozone layer depletion	kg CFC11 eq	3.95E-07	6.68E-08	0*	0*	3.28E-07	7.02E-10
Contribution to photochemical oxidation	kg C₂H₄ eq	3.93E-03	1.27E-04	1.99E-06	4.64E-07	3.80E-03	1.05E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.27E-02	4.88E-03	0*	0*	2.78E-02	1.02E-05
Total Primary Energy	MJ	4.09E+02	7.60E+00	8.63E-02	0*	4.01E+02	5.43E-02

05/2020 ENVPEP2001003_V1

ENVPEP2001003_V1 - Product Environmental Profile - Wiser Iconic Switch (2AX)

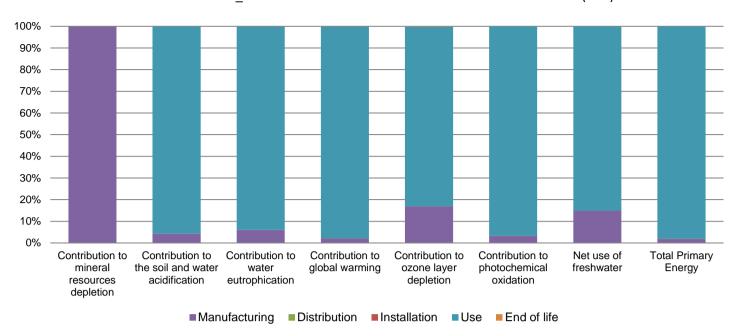

Optional indicators		Wiser Iconic	Switch (2AX) - 4	1E2PBSWM-V	w		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	3.84E+02	5.40E+00	8.57E-02	0*	3.78E+02	4.45E-02
Contribution to air pollution	m³	2.71E+03	8.29E+01	0*	0*	2.62E+03	3.94E-01
Contribution to water pollution	m³	1.35E+03	9.59E+01	1.00E+00	2.15E-01	1.25E+03	8.67E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.89E-04	6.89E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.09E+01	3.96E-01	0*	0*	1.05E+01	0*
Total use of non-renewable primary energy resources	MJ	3.98E+02	7.20E+00	8.62E-02	0*	3.90E+02	5.42E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.04E+01	0*	0*	0*	1.05E+01	0*
Use of renewable primary energy resources used as raw material	MJ	4.62E-01	4.62E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.97E+02	6.78E+00	8.62E-02	0*	3.90E+02	5.42E-02
Use of non renewable primary energy resources used as raw material	MJ	4.26E-01	4.26E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.76E+00	8.83E-01	0*	0*	8.23E-01	5.67E-02
Non hazardous waste disposed	kg	5.22E+00	7.58E-01	0*	3.45E-03	4.46E+00	0*
Radioactive waste disposed	kg	3.43E-04	1.49E-04	1.54E-07	1.44E-07	1.93E-04	3.63E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3.02E-02	3.57E-03	0*	2.12E-02	0*	5.38E-03
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5.56E-03	0*	0*	0*	0*	5.56E-03
Exported Energy	MJ	6.37E-05	5.99E-06	0*	5.77E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

ENVPEP2001003_V1 - Product Environmental Profile - Wiser Iconic Switch (2AX)

Registration number Drafting rules PCR-ed3-EN-2015 04 02

Date of issue 05/2020 Supplemented by PSR-0005-ed2-EN-2016 03 29

Validity period 5 years Information and reference documents www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center

http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

ENVPEP2001003_V1 © 2019 - Schneider Electric – All rights reserved 05/2020