


Product Environmental Profile

TeSys Enclosures - Empty enclosure for starter without isolating devices






General information

Representative product	TeSys Enclosures - Empty enclosure for starter without isolating devices -DE1DS1
Description of the product	Enclosures equipped for starters
Functional unit	Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure, while protecting against mechanical impacts IK09 and the penetration of solid objects and liquids IP65. It can be supplied empty or equipped with contactors. On the cover of the product, it can indicate the different status



Constituent materials

Reference product mass 531.5 g including the product, its packaging and additional elements and accessories

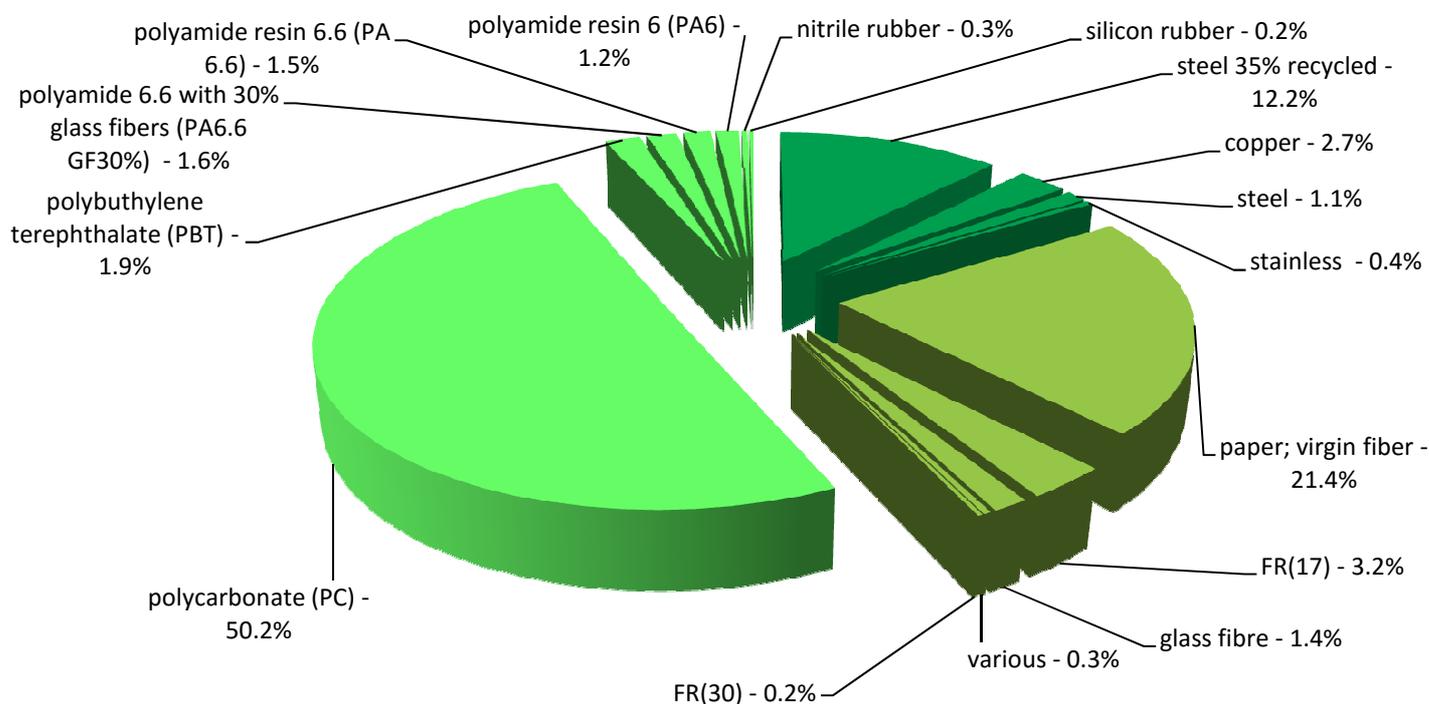

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The TeSys Enclosures - Empty enclosure for starter without isolating devices presents the following relevant environmental


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified		
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 112.8 g, consisting of Cardboard 112.4g, paper 0.4g Product distribution optimised by setting up local distribution centres		
Installation	Reference DE1DS1 does not require any installation operations		
Use	The product does not require special maintenance operations.		
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 45% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).		



Environmental impacts

Reference life time	20 years			
Product category	Enclosures			
Installation elements	No special components needed			
Use scenario	This product does not have any energy consumption			
Geographical representativeness	Europe			
Technological representativeness	Enclosures equipped for starters			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		TeSys Enclosures - Empty enclosure for starter without isolating devices - DE1DS1					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	5.62E-04	5.62E-04	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	6.10E-03	5.44E-03	4.97E-04	3.39E-05	0*	1.27E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.80E-03	1.64E-03	1.15E-04	8.02E-06	0*	3.69E-05
Contribution to global warming	kg CO ₂ eq	4.61E+00	4.42E+00	1.06E-01	1.08E-02	0*	7.38E-02
Contribution to ozone layer depletion	kg CFC11 eq	4.72E-07	4.68E-07	2.15E-10	8.88E-10	0*	2.88E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	7.95E-04	7.42E-04	3.59E-05	3.56E-06	0*	1.31E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	2.19E-02	2.18E-02	9.50E-06	1.32E-05	0*	5.97E-05
Total Primary Energy	MJ	8.48E+01	8.25E+01	1.50E+00	1.85E-01	0*	6.78E-01

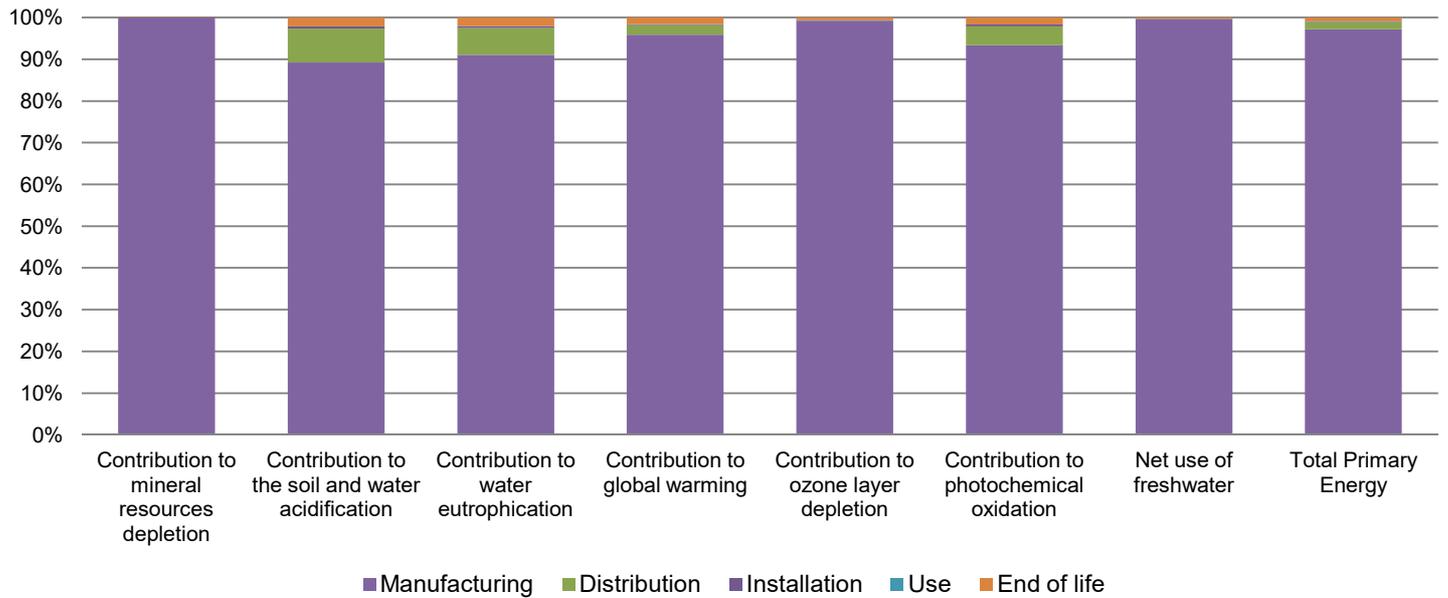

Optional indicators		TeSys Enclosures - Empty enclosure for starter without isolating devices - DE1284					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.95E+01	5.73E+01	1.49E+00	1.53E-01	0*	5.58E-01
Contribution to air pollution	m³	3.94E+02	3.83E+02	4.98E+00	1.19E+00	0*	4.45E+00
Contribution to water pollution	m³	1.89E+03	1.86E+03	1.75E+01	1.28E+00	0*	5.51E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3.56E-02	3.56E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.13E+00	2.13E+00	2.00E-03	0*	0*	6.76E-04
Total use of non-renewable primary energy resources	MJ	8.27E+01	8.03E+01	1.50E+00	1.85E-01	0*	6.77E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.47E-01	1.45E-01	2.00E-03	1.84E-04	0*	6.76E-04
Use of renewable primary energy resources used as raw material	MJ	1.98E+00	1.98E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.19E+01	6.96E+01	1.50E+00	1.85E-01	0*	6.77E-01
Use of non renewable primary energy resources used as raw material	MJ	1.08E+01	1.08E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.68E+00	2.81E+00	0*	2.26E-01	0*	6.45E-01
Non hazardous waste disposed	kg	2.05E-01	1.99E-01	3.77E-03	5.06E-04	0*	1.87E-03
Radioactive waste disposed	kg	2.29E-04	2.23E-04	2.69E-06	8.35E-07	0*	2.96E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.14E-01	2.72E-02	0*	0*	0*	1.87E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.31E-02	1.66E-03	0*	0*	0*	1.14E-02
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP111273EN_V01	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	05-2016	Supplemented by	PSR-0005-ed1-EN -2012 12 11
Validity period	5 years	Information and reference	www.pep-ecopassport.org
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS

Country Customer Care Center:

<http://www2.schneiderelectric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP111273EN_V01

© 2015 - Schneider Electric – All rights reserved

05-2016